

Appendix F

Test Information:

Sample No.:	2VH6-3	Test Date:	2024/12/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Usain Ou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.2	Relative Humidity: (%)	45	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Transmitter Conducted Output Power And ERP/EIRP


Band	Channel	Freq (MHz)	Connection Type	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP(Limit) (dBm)	Verdict
2	9538	1907.6	RMC	25.14	28.12	33.01	PASS
2	9538	1907.6	HSDPA Subtest-1	24.17	27.15	33.01	PASS
2	9538	1907.6	HSDPA Subtest-2	23.88	26.86	33.01	PASS
2	9538	1907.6	HSDPA Subtest-3	23.57	26.55	33.01	PASS
2	9538	1907.6	HSDPA Subtest-4	23.55	26.53	33.01	PASS
2	9538	1907.6	HSUPA Subtest-1	23.53	26.51	33.01	PASS
2	9538	1907.6	HSUPA Subtest-2	24.07	27.05	33.01	PASS
2	9538	1907.6	HSUPA Subtest-3	23.06	26.04	33.01	PASS
2	9538	1907.6	HSUPA Subtest-4	24.11	27.09	33.01	PASS
2	9538	1907.6	HSUPA Subtest-5	23.08	26.06	33.01	PASS
2	9538	1907.6	HSPA+	22.87	25.85	33.01	PASS
2	9400	1880.0	RMC	24.94	27.92	33.01	PASS
2	9400	1880.0	HSDPA Subtest-1	23.97	26.95	33.01	PASS
2	9400	1880.0	HSDPA Subtest-2	23.77	26.75	33.01	PASS
2	9400	1880.0	HSDPA Subtest-3	23.35	26.33	33.01	PASS
2	9400	1880.0	HSDPA Subtest-4	23.34	26.32	33.01	PASS
2	9400	1880.0	HSUPA Subtest-1	23.18	26.16	33.01	PASS
2	9400	1880.0	HSUPA Subtest-2	23.90	26.88	33.01	PASS
2	9400	1880.0	HSUPA Subtest-3	22.86	25.84	33.01	PASS
2	9400	1880.0	HSUPA Subtest-4	23.93	26.91	33.01	PASS
2	9400	1880.0	HSUPA Subtest-5	22.87	25.85	33.01	PASS
2	9400	1880.0	HSPA+	23.14	26.12	33.01	PASS
2	9262	1852.4	RMC	24.58	27.56	33.01	PASS
2	9262	1852.4	HSDPA Subtest-1	23.90	26.88	33.01	PASS
2	9262	1852.4	HSDPA Subtest-2	23.71	26.69	33.01	PASS
2	9262	1852.4	HSDPA Subtest-3	23.36	26.34	33.01	PASS
2	9262	1852.4	HSDPA Subtest-4	23.36	26.34	33.01	PASS
2	9262	1852.4	HSUPA Subtest-1	23.23	26.21	33.01	PASS
2	9262	1852.4	HSUPA Subtest-2	23.88	26.86	33.01	PASS
2	9262	1852.4	HSUPA Subtest-3	22.83	25.81	33.01	PASS
2	9262	1852.4	HSUPA Subtest-4	23.94	26.92	33.01	PASS
2	9262	1852.4	HSUPA Subtest-5	22.82	25.80	33.01	PASS
2	9262	1852.4	HSPA+	22.95	25.93	33.01	PASS
5	4233	846.6	RMC	23.99	24.34	38.45	PASS
5	4233	846.6	HSDPA Subtest-1	23.17	23.52	38.45	PASS
5	4233	846.6	HSDPA Subtest-2	23.06	23.41	38.45	PASS
5	4233	846.6	HSDPA Subtest-3	22.66	23.01	38.45	PASS
5	4233	846.6	HSDPA Subtest-4	22.67	23.02	38.45	PASS
5	4233	846.6	HSUPA Subtest-1	22.67	23.02	38.45	PASS
5	4233	846.6	HSUPA Subtest-2	23.19	23.54	38.45	PASS
5	4233	846.6	HSUPA Subtest-3	22.27	22.62	38.45	PASS
5	4233	846.6	HSUPA Subtest-4	23.21	23.56	38.45	PASS
5	4233	846.6	HSUPA Subtest-5	22.24	22.59	38.45	PASS
5	4233	846.6	HSPA+	22.46	22.81	38.45	PASS
5	4182	836.4	RMC	23.71	24.06	38.45	PASS
5	4182	836.4	HSDPA Subtest-1	22.76	23.11	38.45	PASS
5	4182	836.4	HSDPA Subtest-2	22.69	23.04	38.45	PASS
5	4182	836.4	HSDPA Subtest-3	22.36	22.71	38.45	PASS
5	4182	836.4	HSDPA Subtest-4	22.34	22.69	38.45	PASS
5	4182	836.4	HSUPA Subtest-1	22.16	22.51	38.45	PASS
5	4182	836.4	HSUPA Subtest-2	22.84	23.19	38.45	PASS
5	4182	836.4	HSUPA Subtest-3	21.91	22.26	38.45	PASS
5	4182	836.4	HSUPA Subtest-4	22.78	23.13	38.45	PASS
5	4182	836.4	HSUPA Subtest-5	21.82	22.17	38.45	PASS
5	4182	836.4	HSPA+	22.65	23.00	38.45	PASS
5	4132	826.4	RMC	23.77	24.12	38.45	PASS
5	4132	826.4	HSDPA Subtest-1	22.88	23.23	38.45	PASS
5	4132	826.4	HSDPA Subtest-2	22.75	23.10	38.45	PASS
5	4132	826.4	HSDPA Subtest-3	22.37	22.72	38.45	PASS
5	4132	826.4	HSDPA Subtest-4	22.36	22.71	38.45	PASS
5	4132	826.4	HSUPA Subtest-1	22.36	22.71	38.45	PASS
5	4132	826.4	HSUPA Subtest-2	22.95	23.30	38.45	PASS
5	4132	826.4	HSUPA Subtest-3	21.99	22.34	38.45	PASS
5	4132	826.4	HSUPA Subtest-4	22.94	23.29	38.45	PASS
5	4132	826.4	HSUPA Subtest-5	21.92	22.27	38.45	PASS
5	4132	826.4	HSPA+	22.38	22.73	38.45	PASS

Peak to Average Ratio


Band	Channel	Freq (MHz)	Result (dB)	Limit (dB)	Verdict
2	9538	1907.6	3.48	13	PASS
2	9400	1880.0	3.45	13	PASS
2	9262	1852.4	3.48	13	PASS
5	4233	846.6	3.57	13	PASS
5	4182	836.4	3.04	13	PASS
5	4132	826.4	3.22	13	PASS


Occupied Bandwidth

Band	Channel	Freq (MHz)	OBW (MHz)	26dB BW (MHz)	Verdict
2	9400	1880.0	4.1823	4.718	PASS
5	4182	836.4	4.1823	4.718	PASS

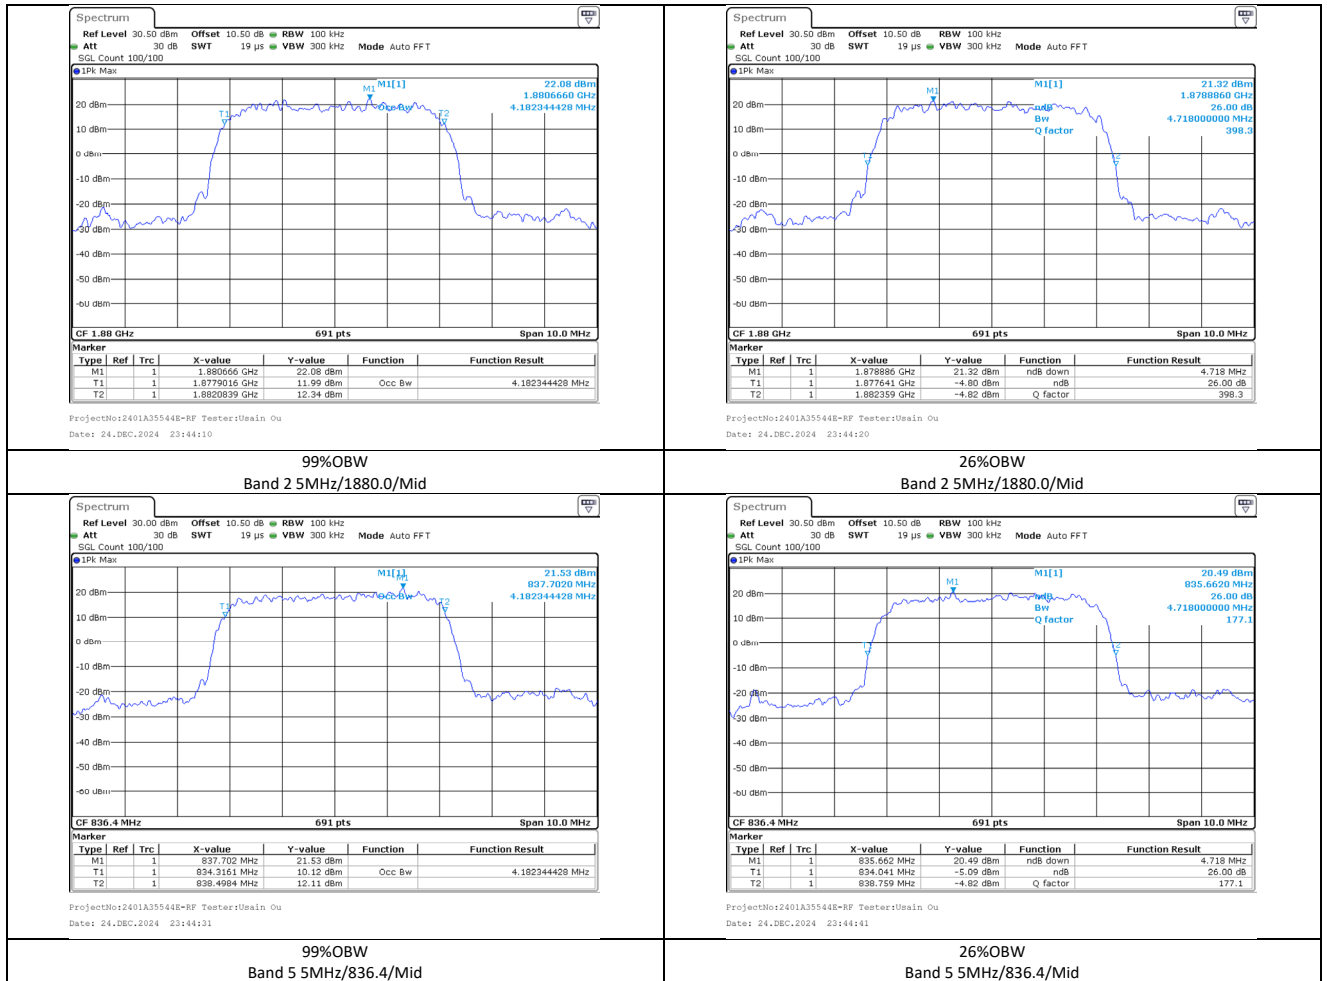


Conducted Spurious Emissions

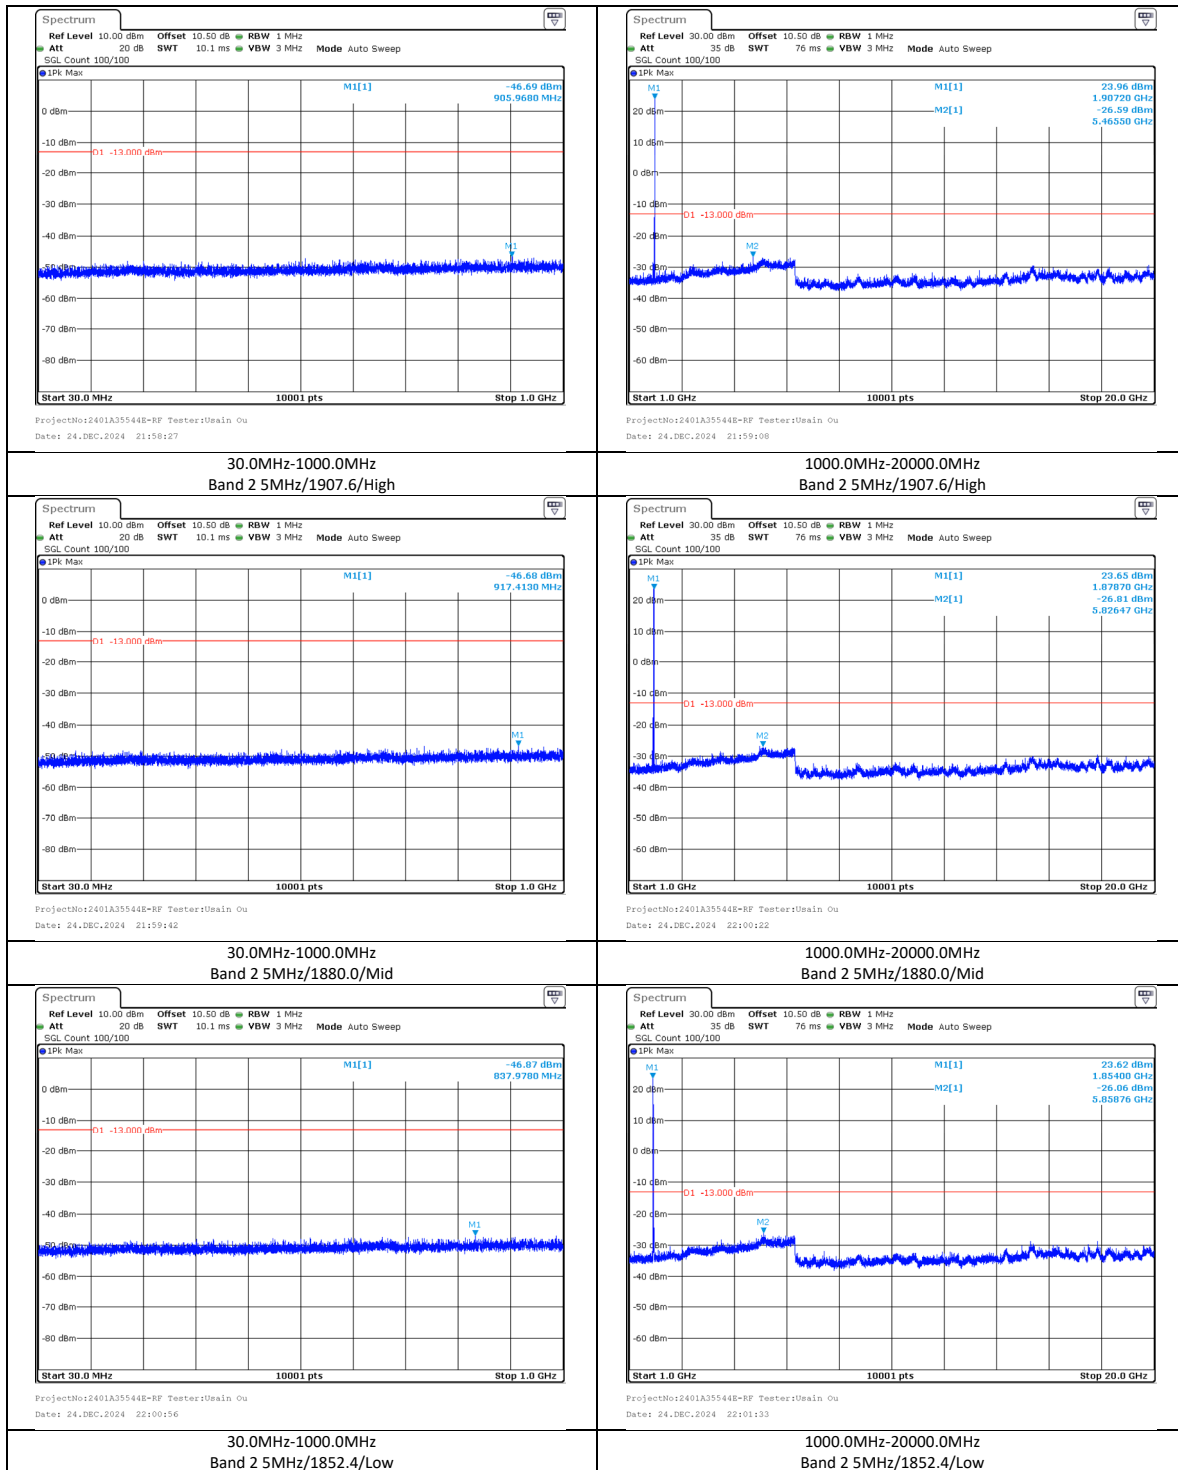

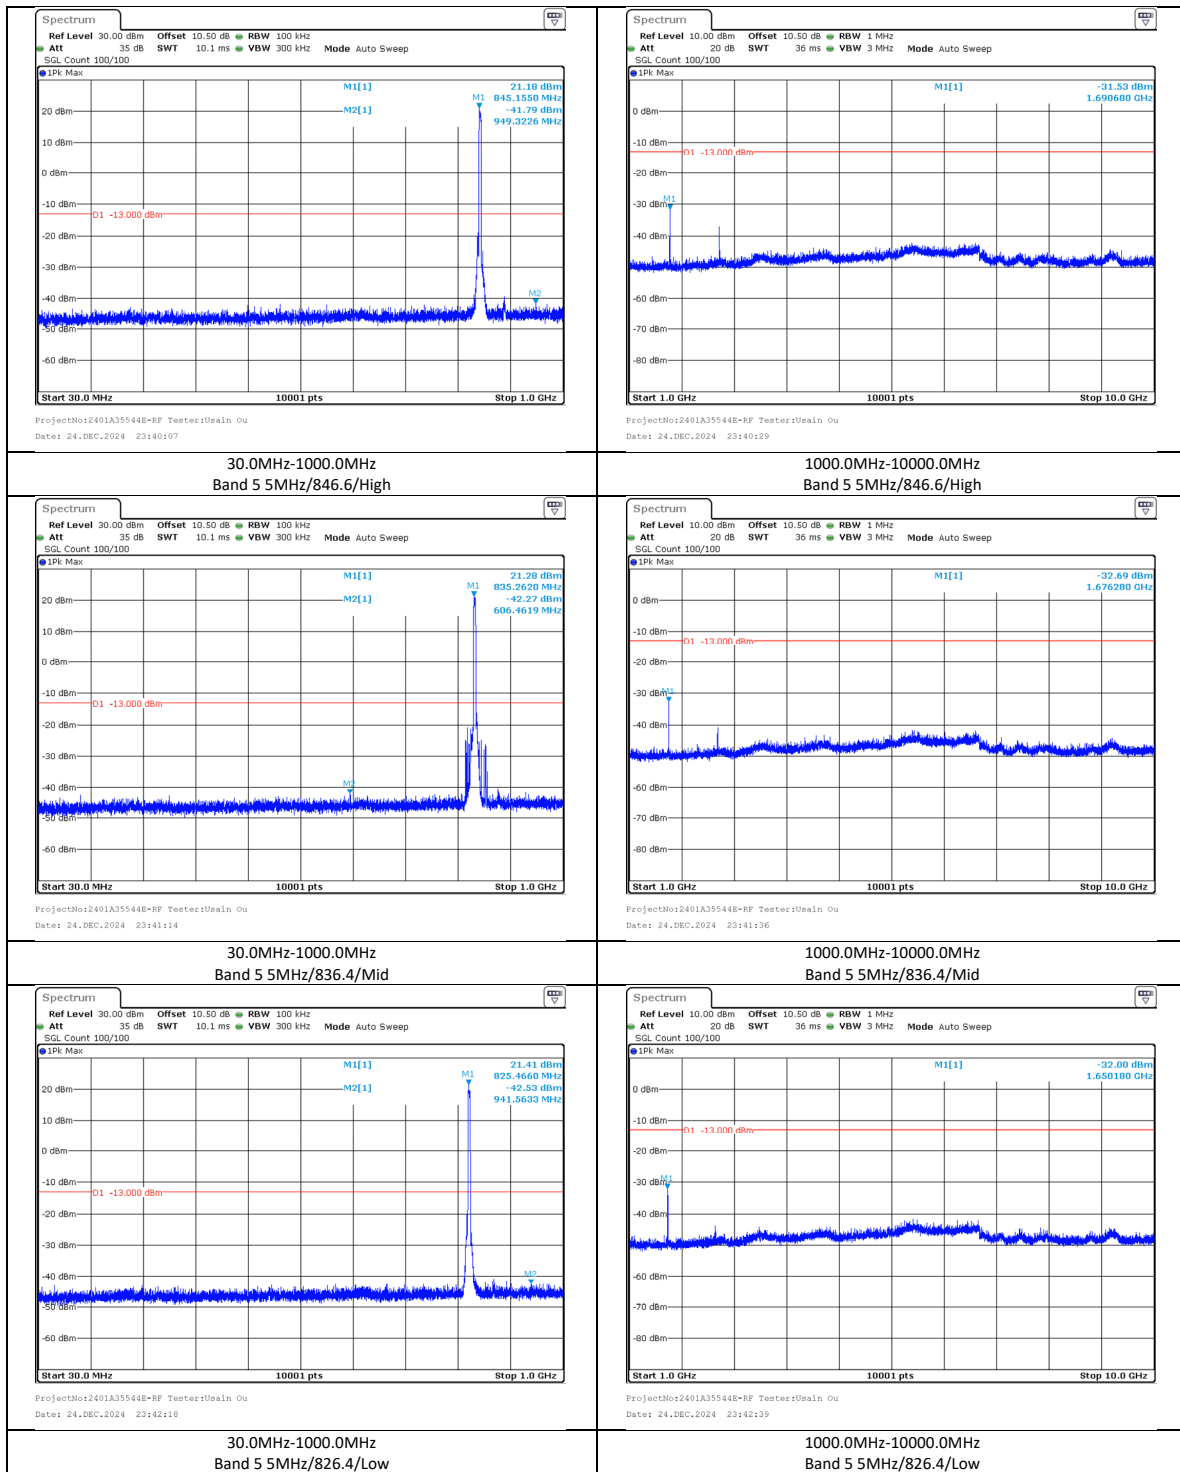

Conducted Band Edge

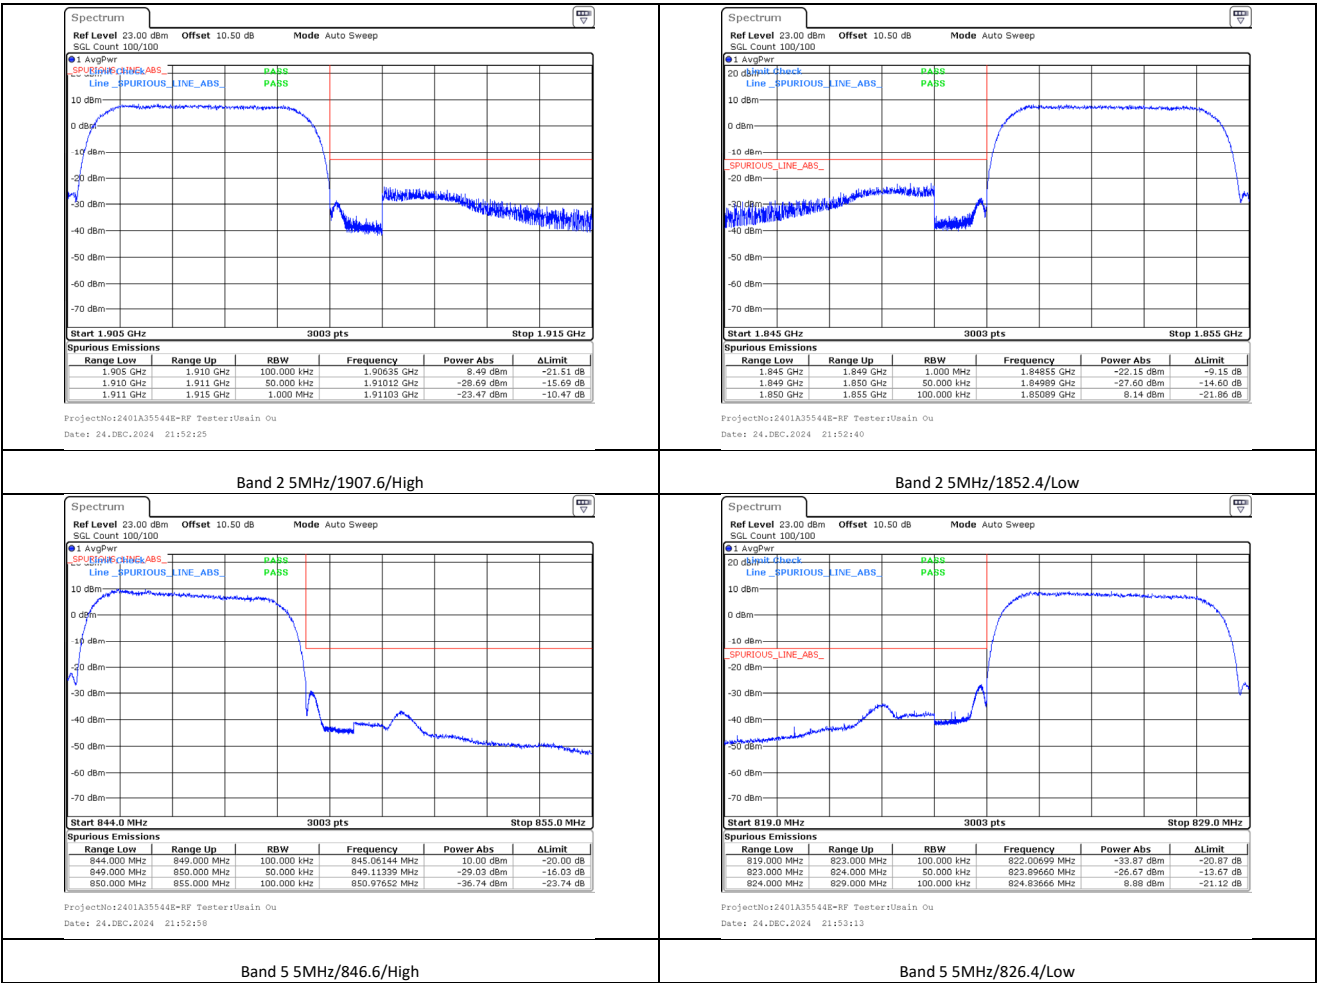

Frequency Stability Error

Band	Channel	Freq (MHz)	Deviation (Hz)	Deviation (ppm)	Limit(ppm)	Verdict	Environment
5	4233	846.6	5.47	0.00646	±2.5	PASS	20°C/8.70V
5	4233	846.6	4.84	0.00572	±2.5	PASS	20°C/6.46V
5	4233	846.6	1.80	0.00213	±2.5	PASS	50°C/7.60V
5	4233	846.6	-0.96	-0.00113	±2.5	PASS	40°C/7.60V
5	4233	846.6	0.23	0.00027	±2.5	PASS	30°C/7.60V
5	4233	846.6	2.95	0.00348	±2.5	PASS	20°C/7.60V
5	4233	846.6	2.32	0.00274	±2.5	PASS	10°C/7.60V
5	4233	846.6	0.35	0.00041	±2.5	PASS	0°C/7.60V
5	4233	846.6	3.89	0.00459	±2.5	PASS	-10°C/7.60V
5	4233	846.6	2.00	0.00236	±2.5	PASS	-20°C/7.60V
5	4233	846.6	-0.90	-0.00106	±2.5	PASS	-30°C/7.60V
5	4182	836.4	2.28	0.00273	±2.5	PASS	20°C/8.70V
5	4182	836.4	-0.29	-0.00035	±2.5	PASS	20°C/6.46V
5	4182	836.4	2.60	0.00311	±2.5	PASS	50°C/7.60V
5	4182	836.4	1.24	0.00148	±2.5	PASS	40°C/7.60V
5	4182	836.4	-3.66	-0.00438	±2.5	PASS	30°C/7.60V
5	4182	836.4	0.26	0.00031	±2.5	PASS	20°C/7.60V
5	4182	836.4	1.46	0.00175	±2.5	PASS	10°C/7.60V
5	4182	836.4	1.29	0.00154	±2.5	PASS	0°C/7.60V
5	4182	836.4	-1.37	-0.00164	±2.5	PASS	-10°C/7.60V
5	4182	836.4	0.96	0.00115	±2.5	PASS	-20°C/7.60V
5	4182	836.4	2.93	0.00350	±2.5	PASS	-30°C/7.60V
5	4132	826.4	-0.84	-0.00102	±2.5	PASS	20°C/8.70V
5	4132	826.4	-4.23	-0.00512	±2.5	PASS	20°C/6.46V
5	4132	826.4	3.39	0.00410	±2.5	PASS	50°C/7.60V
5	4132	826.4	-0.64	-0.00077	±2.5	PASS	40°C/7.60V
5	4132	826.4	-2.23	-0.00270	±2.5	PASS	30°C/7.60V
5	4132	826.4	-0.86	-0.00104	±2.5	PASS	20°C/7.60V
5	4132	826.4	-2.00	-0.00242	±2.5	PASS	10°C/7.60V
5	4132	826.4	-2.15	-0.00260	±2.5	PASS	0°C/7.60V
5	4132	826.4	1.79	0.00217	±2.5	PASS	-10°C/7.60V
5	4132	826.4	4.00	0.00484	±2.5	PASS	-20°C/7.60V
5	4132	826.4	0.70	0.00085	±2.5	PASS	-30°C/7.60V

Frequency Stability Range

Band	Channel (Low/High)	Freq (MHz)	Lower Edge (MHz) (Result)	Limit (1850MHz)	Upper Edge (MHz) (Result)	Limit (1910MHz)	Environment
2	9262/9538	1852.4/1907.6	1850.073	1850.000	1909.991	1910.000	20°C/8.70V
2	9262/9538	1852.4/1907.6	1850.066	1850.000	1909.836	1910.000	20°C/6.46V
2	9262/9538	1852.4/1907.6	1850.058	1850.000	1909.962	1910.000	50°C/7.60V
2	9262/9538	1852.4/1907.6	1850.191	1850.000	1909.872	1910.000	40°C/7.60V
2	9262/9538	1852.4/1907.6	1850.134	1850.000	1909.946	1910.000	30°C/7.60V
2	9262/9538	1852.4/1907.6	1850.141	1850.000	1909.958	1910.000	20°C/7.60V
2	9262/9538	1852.4/1907.6	1850.101	1850.000	1909.985	1910.000	10°C/7.60V
2	9262/9538	1852.4/1907.6	1850.014	1850.000	1909.822	1910.000	0°C/7.60V
2	9262/9538	1852.4/1907.6	1850.071	1850.000	1909.860	1910.000	-10°C/7.60V
2	9262/9538	1852.4/1907.6	1850.058	1850.000	1909.829	1910.000	-20°C/7.60V
2	9262/9538	1852.4/1907.6	1850.108	1850.000	1909.867	1910.000	-30°C/7.60V