




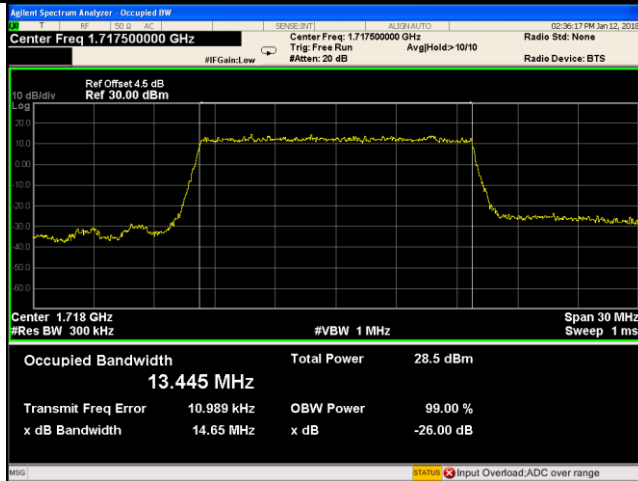


LTE Band IV - Low CH QPSK-15

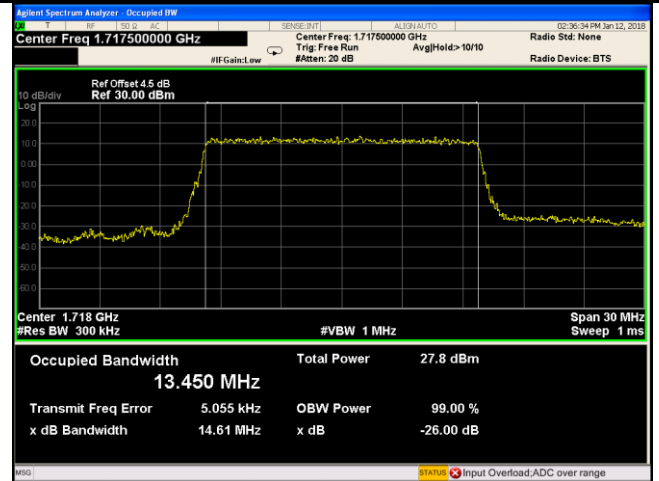


LTE Band IV - Low CH 16QAM-15

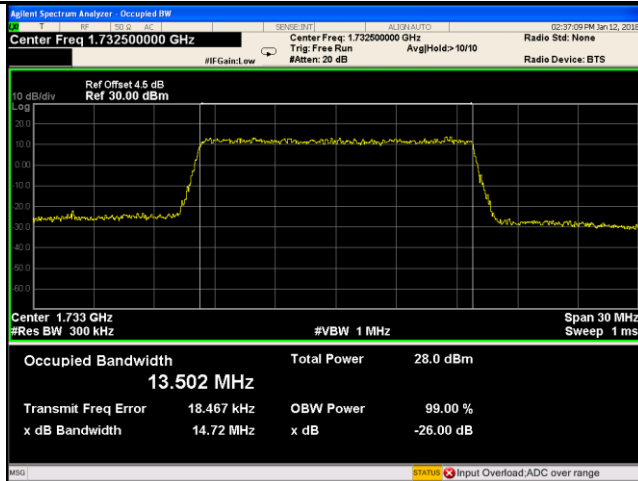


LTE Band IV - Middle CH QPSK-15

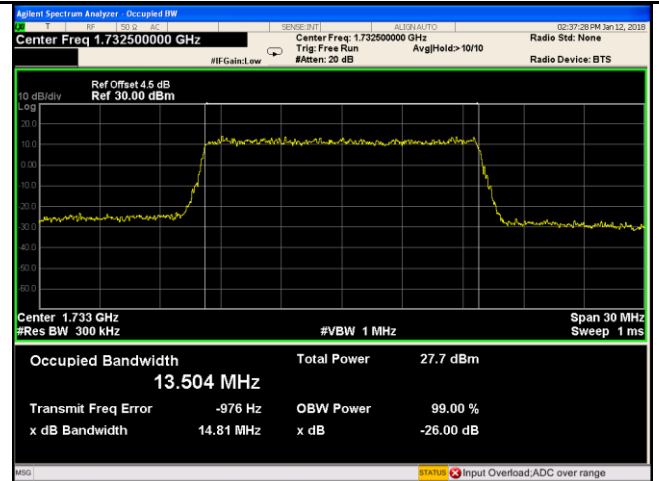


LTE Band IV - Middle CH 16QAM-15

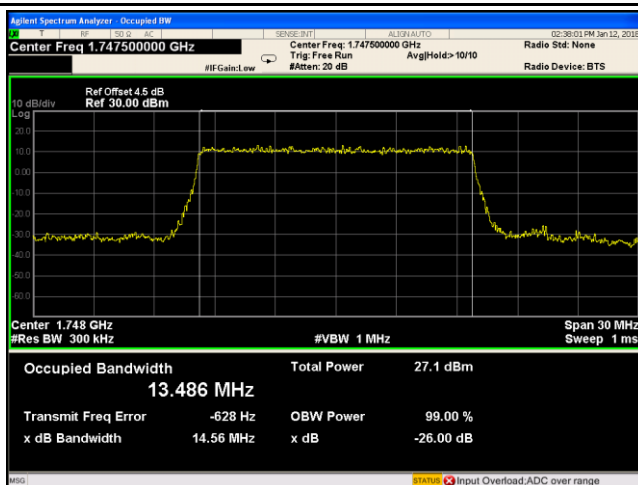


LTE Band IV - High CH QPSK-15

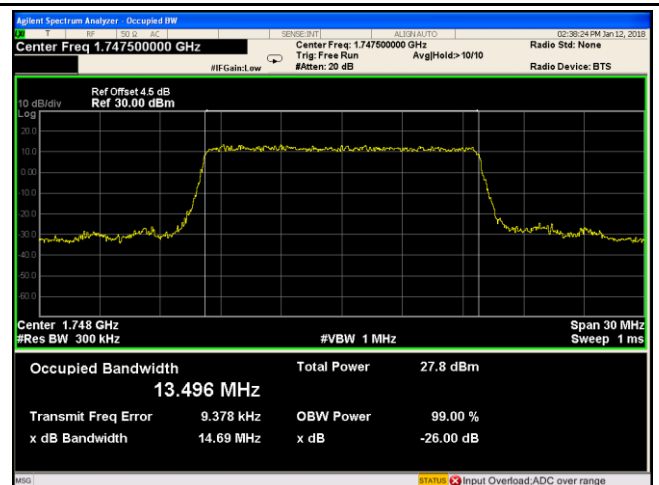


LTE Band IV - High CH 16QAM-15

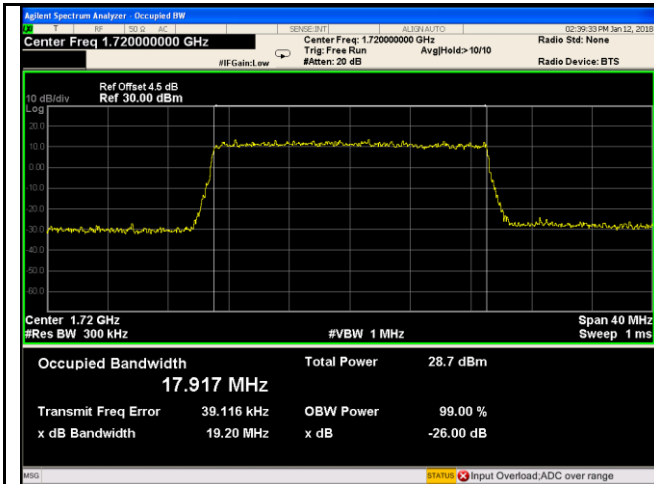


LTE Band IV - Low CH QPSK-20

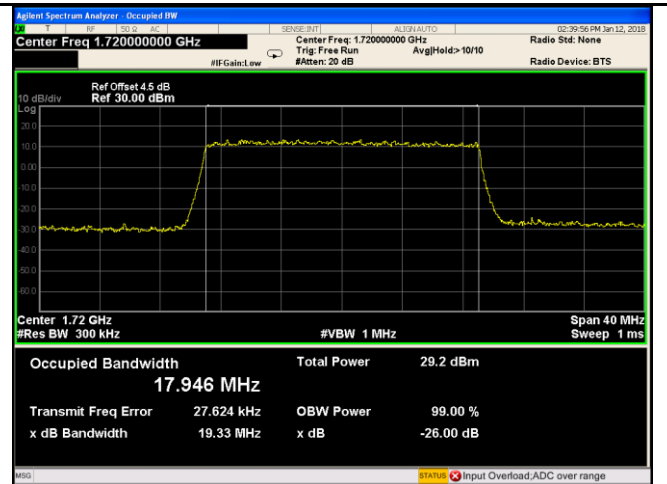


LTE Band IV - Low CH 16QAM-20

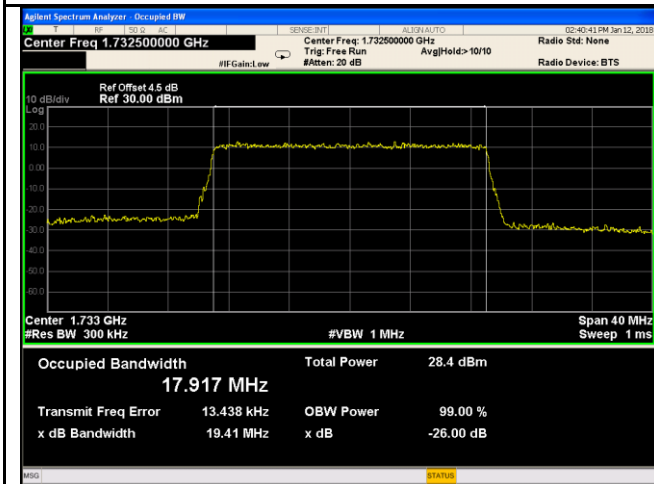


LTE Band IV - Middle CH QPSK-20

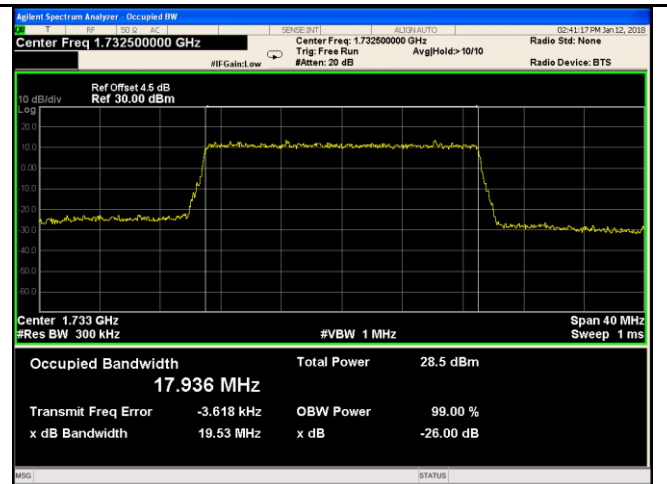

LTE Band IV - Middle CH 16QAM-20

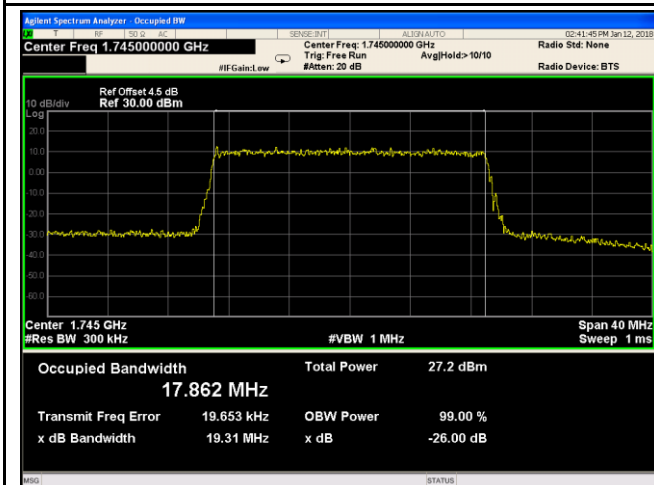


LTE Band IV - High CH QPSK-20

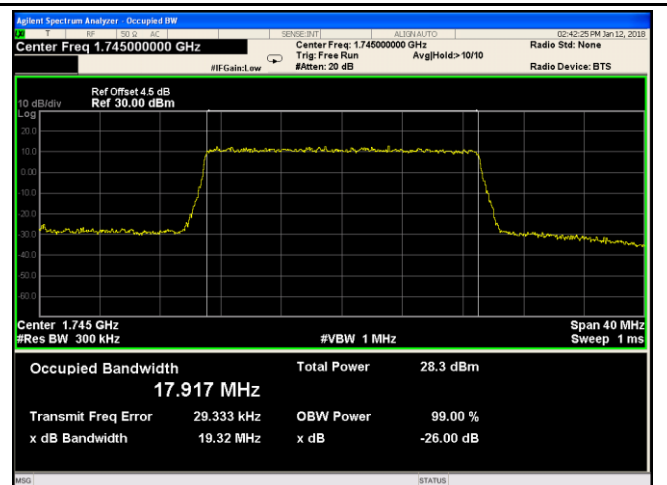


LTE Band IV - High CH 16QAM-20


LTE Band V (Part 22H)

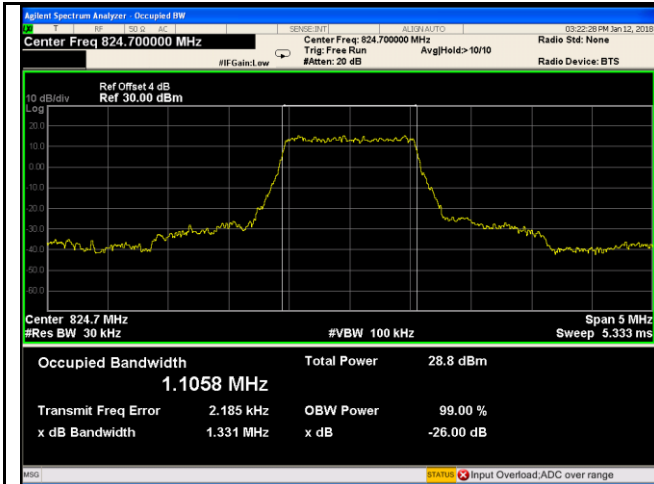


LTE Band V - Low CH QPSK-1.4

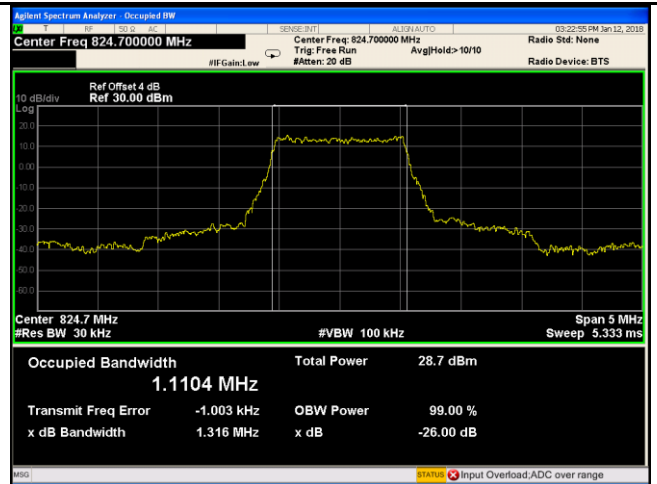


LTE Band V - Low CH 16QAM-1.4

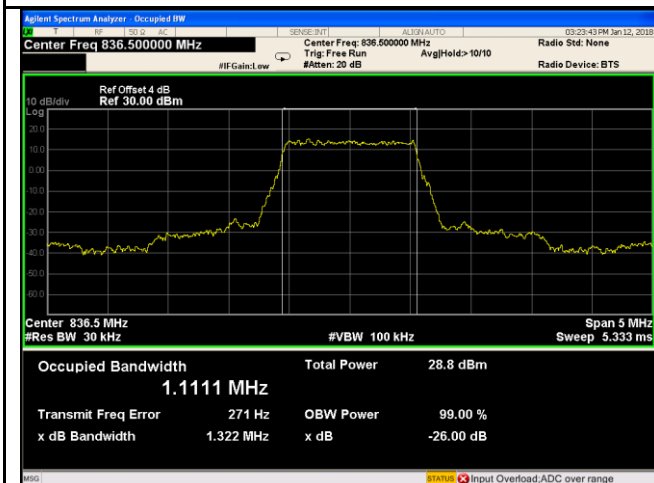


LTE Band V - Middle CH QPSK-1.4

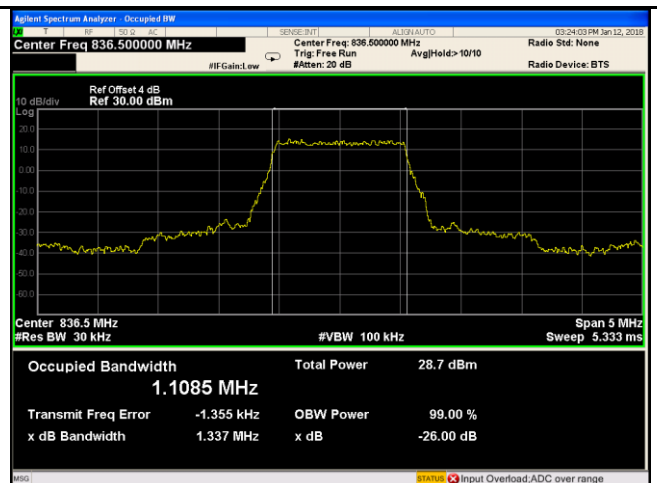


LTE Band V - Middle CH 16QAM-1.4

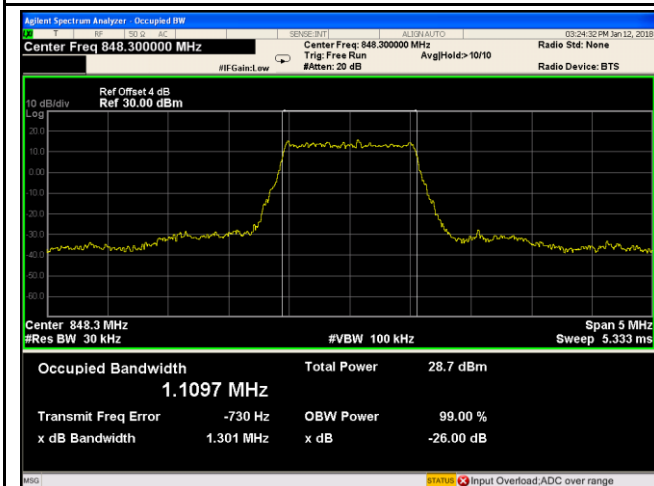


LTE Band V - High CH QPSK-1.4

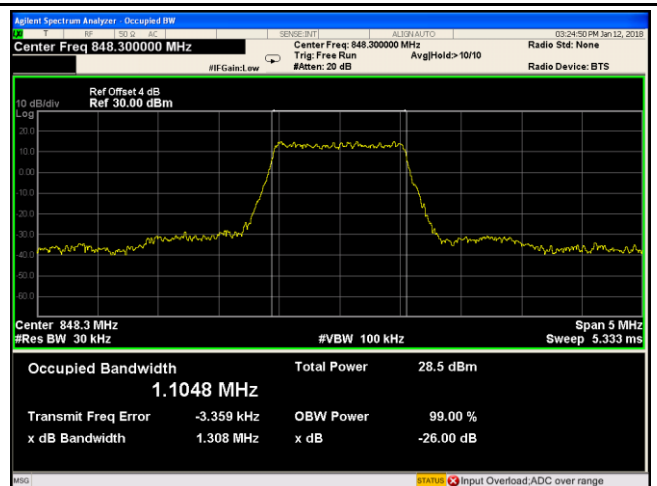


LTE Band V - High CH 16QAM-1.4

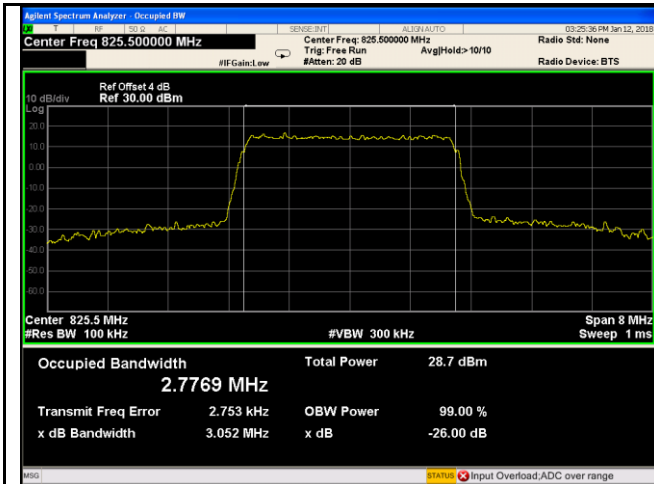


LTE Band V - Low CH QPSK-3

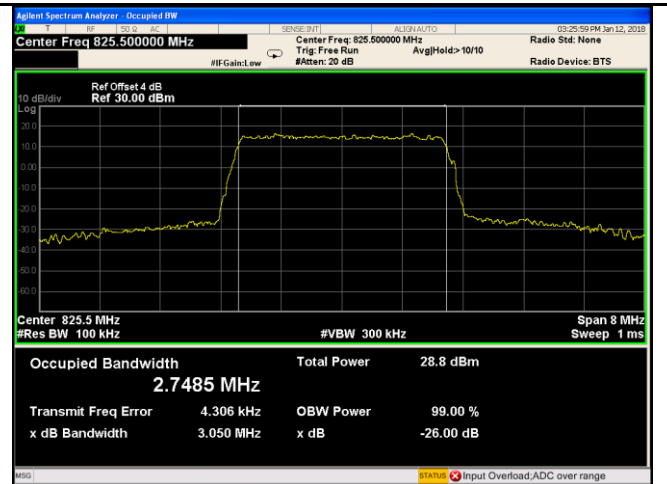


LTE Band V - Low CH 16QAM-3

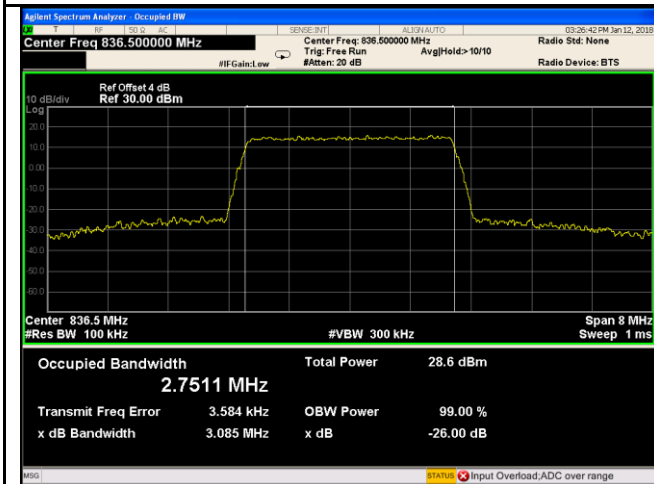


LTE Band V - Middle CH QPSK-3

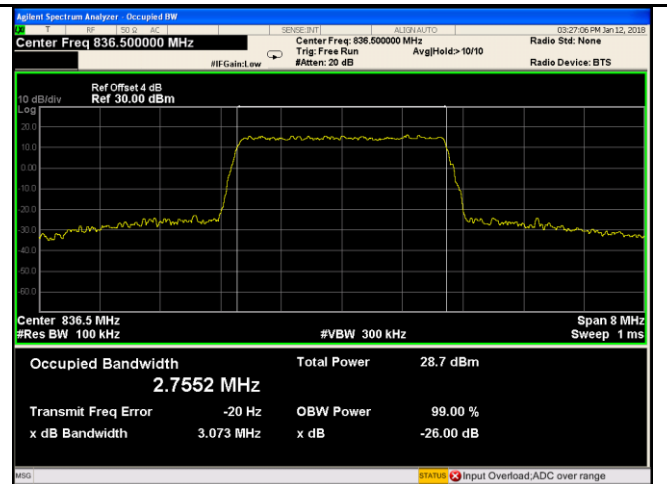


LTE Band V - Middle CH 16QAM-3

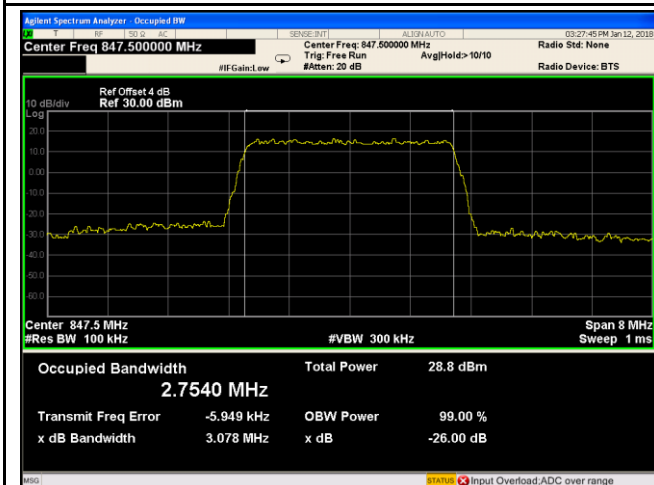


LTE Band V - High CH QPSK-3

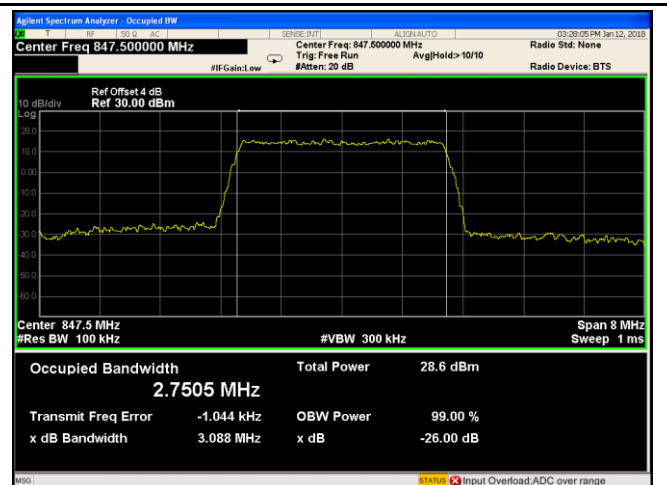


LTE Band V - High CH 16QAM-3

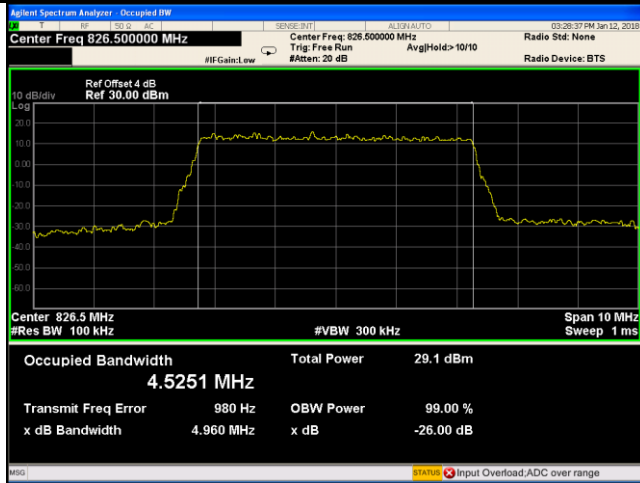


LTE Band V - Low CH QPSK-5

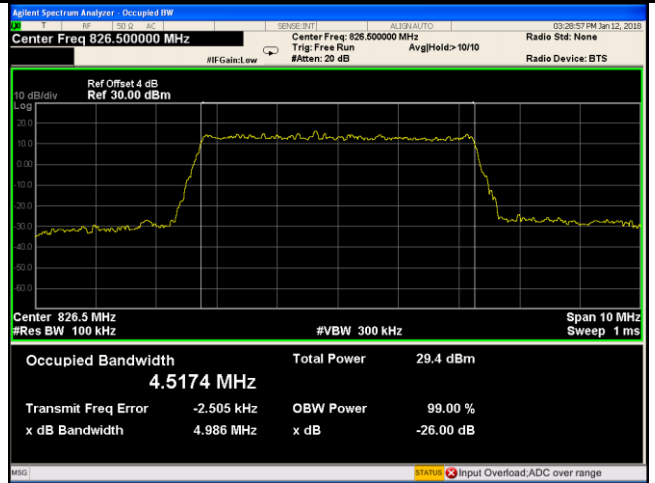


LTE Band V - Low CH 16QAM-5

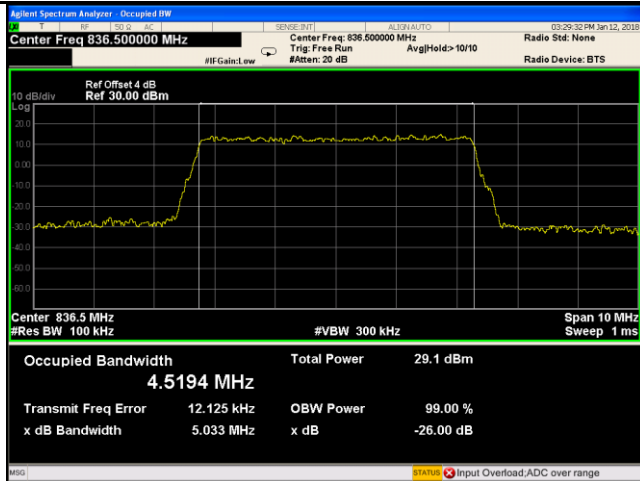


LTE Band V - Middle CH QPSK-5

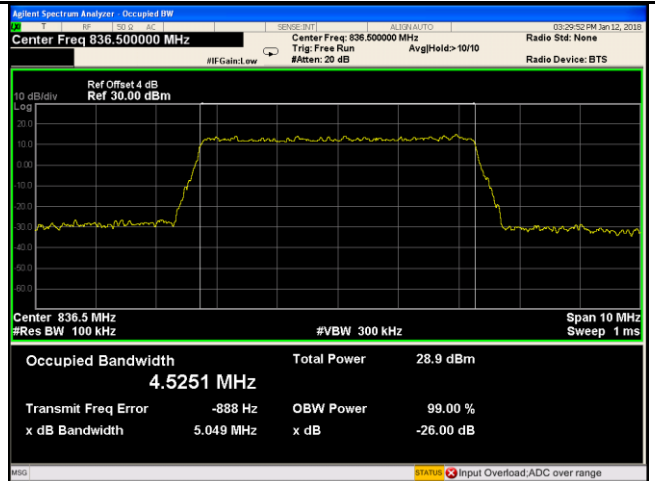


LTE Band V - Middle CH 16QAM-5

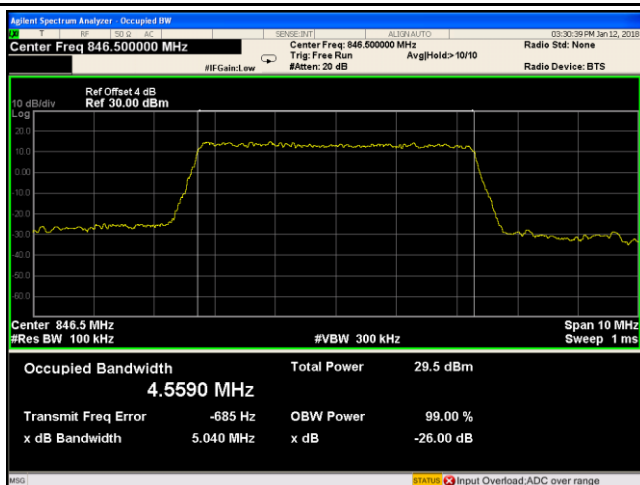


LTE Band V - High CH QPSK-5

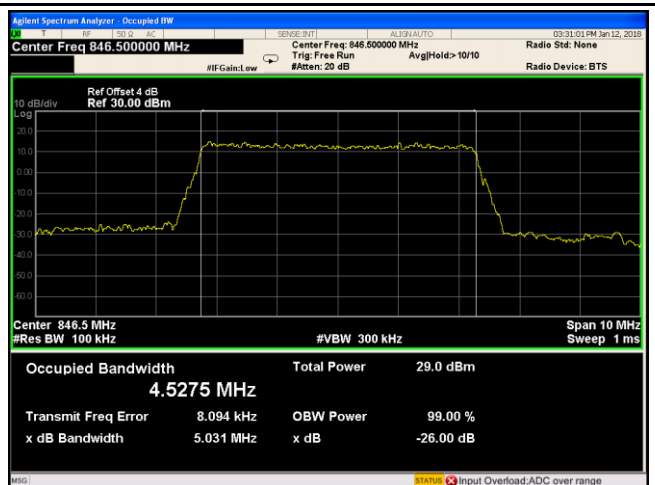


LTE Band V - High CH 16QAM-5

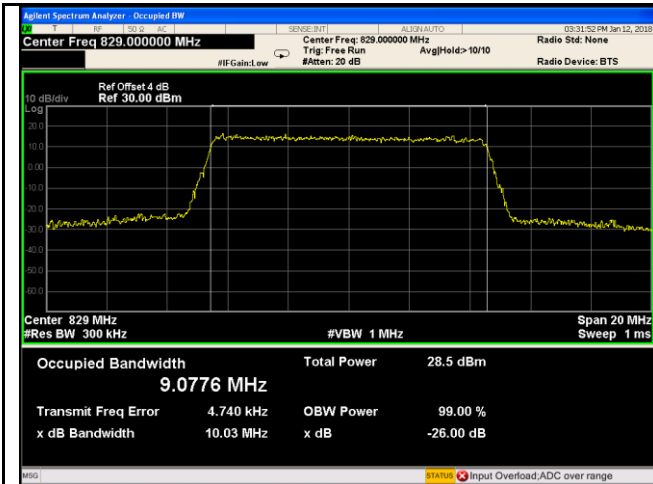


LTE Band V - Low CH QPSK-10

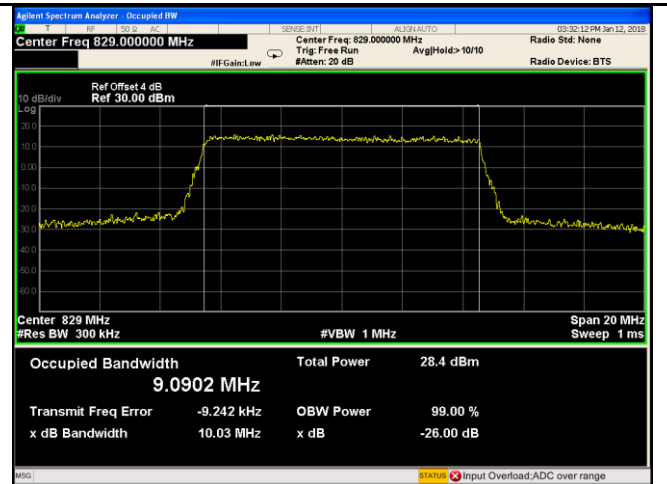


LTE Band V - Low CH 16QAM-10

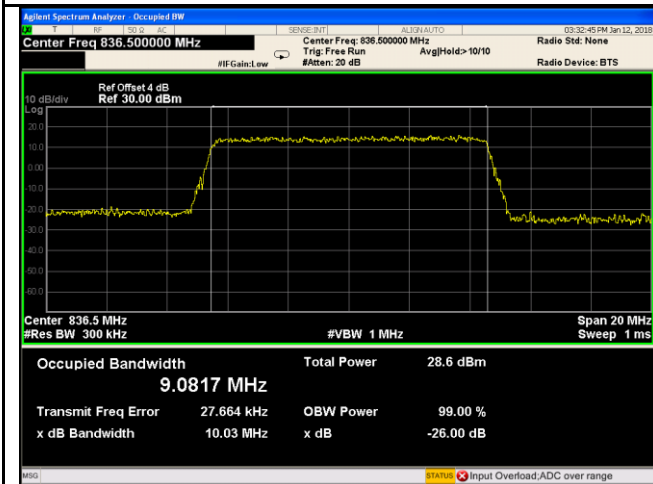


LTE Band V - Middle CH QPSK-10

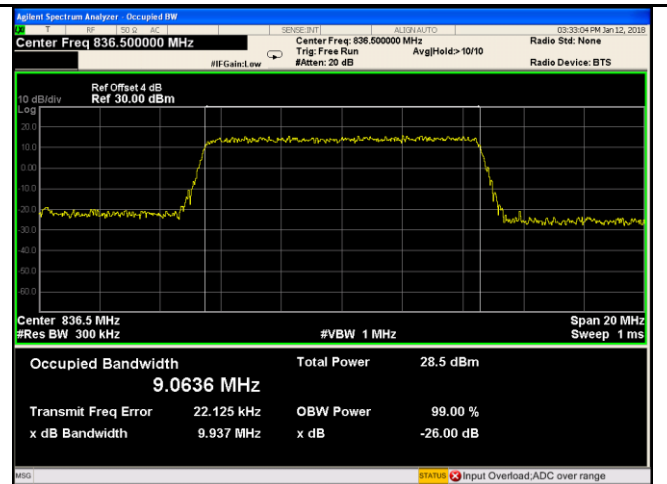

LTE Band V - Middle CH 16QAM-10

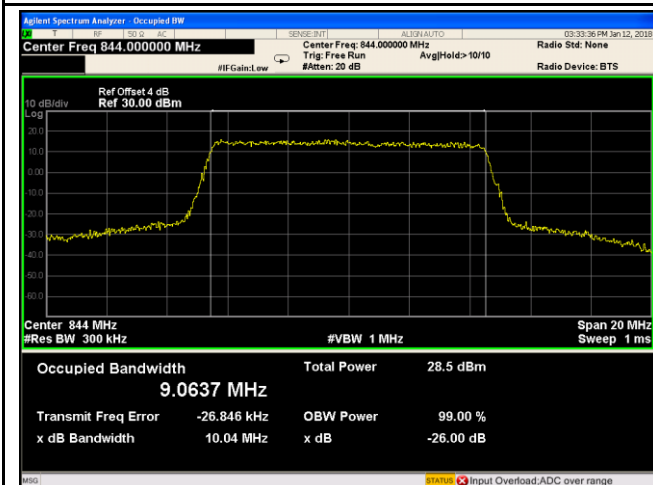

LTE Band V - High CH QPSK-10

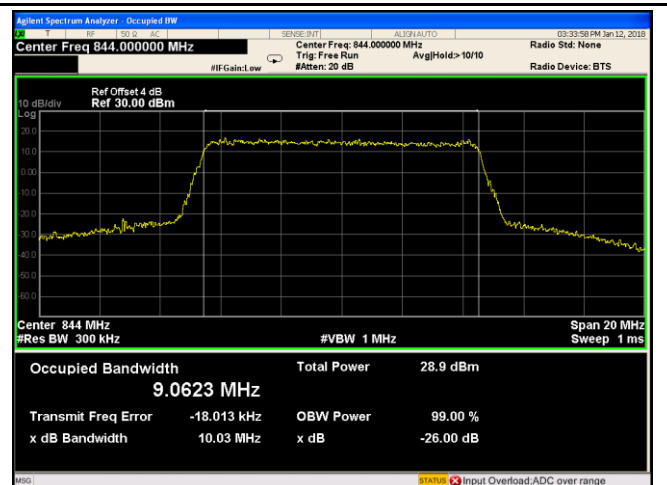


LTE Band V - High CH 16QAM-10

6.5 Spurious Emissions at Antenna Terminals

Temperature	25°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	January 12, 2018
Tested By :	Aaron Liang


Requirement(s):

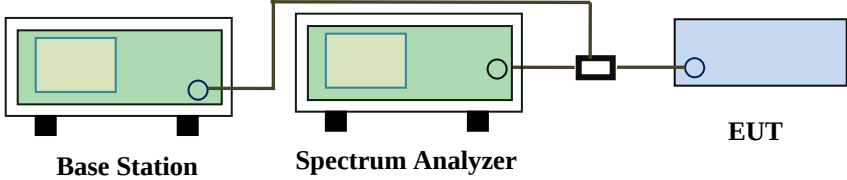Spec	Item	Requirement	Applicable
§2.1051, §22.917(a)& §24.238(a) § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB	☒
Test Setup			
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. - Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		


Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A

Test Plots 30MHz-5GHz


LTE Band II (Part 24E)

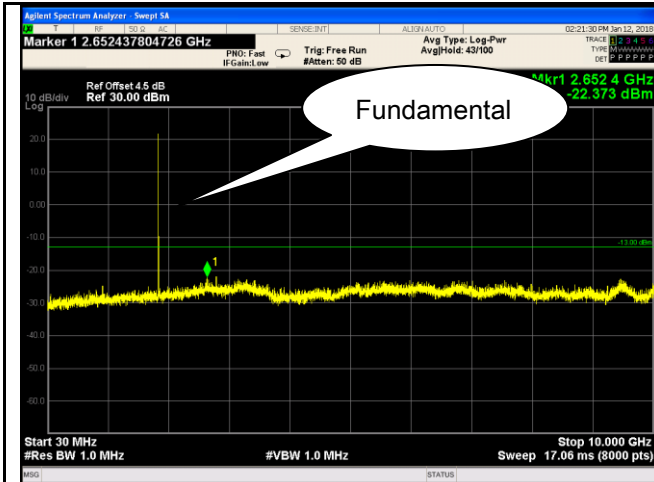


LTE Band II - Low Channel-1

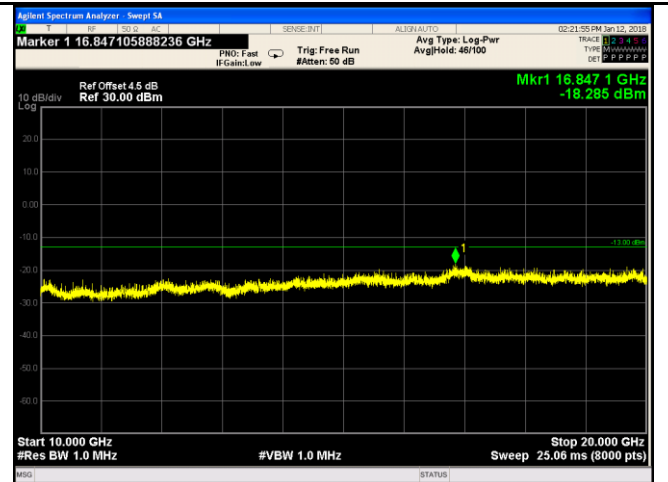


LTE Band II - Low Channel-2

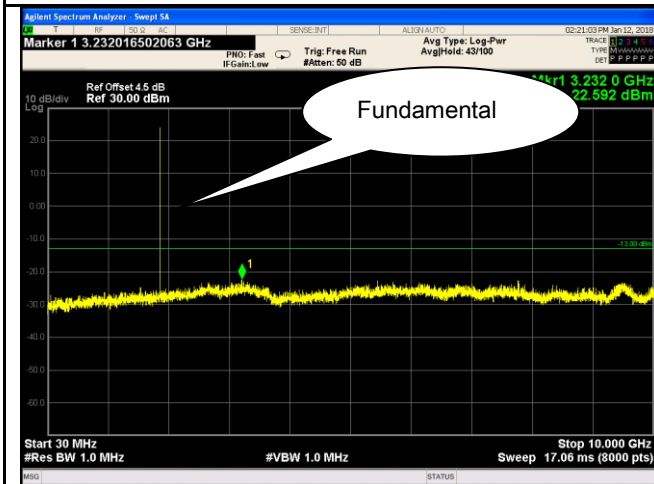


LTE Band II Middle Channel-1

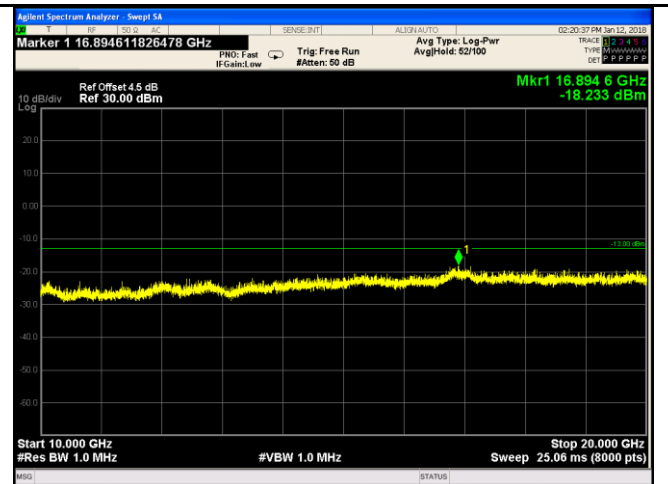

LTE Band II Middle Channel-2

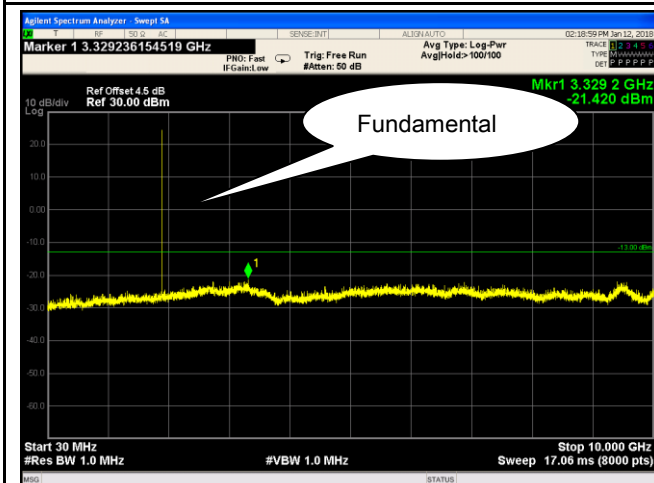


LTE Band II - High Channel-1

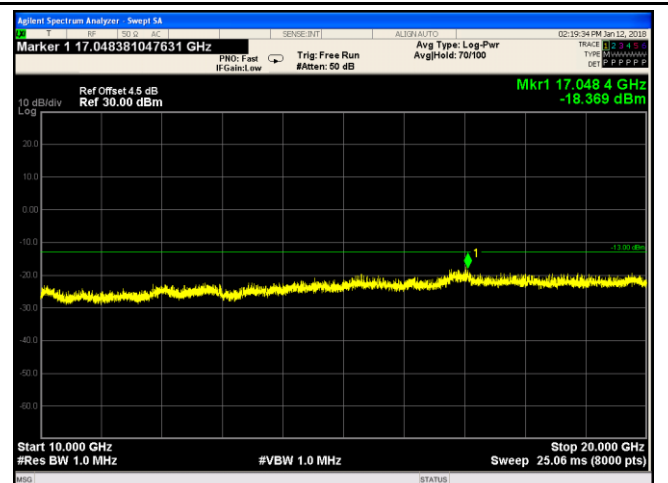


LTE Band II - High Channel-2


LTE Band IV (Part27) result

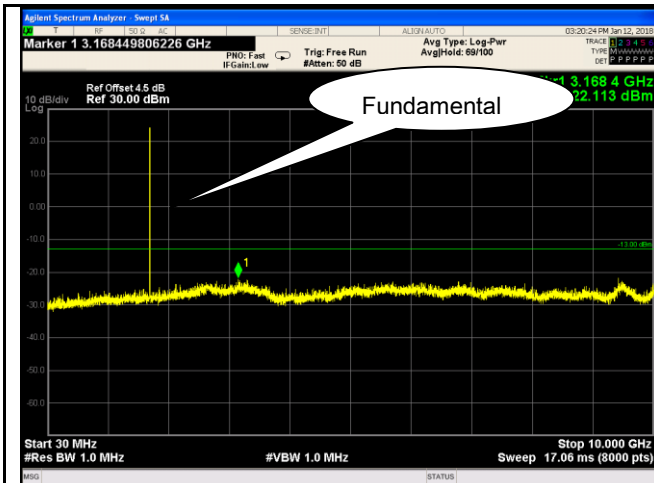


LTE Band IV - Low Channel-1

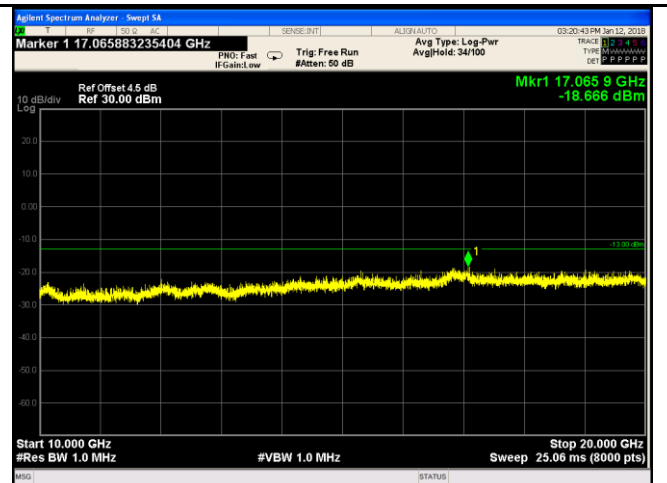


LTE Band IV - Low Channel-2

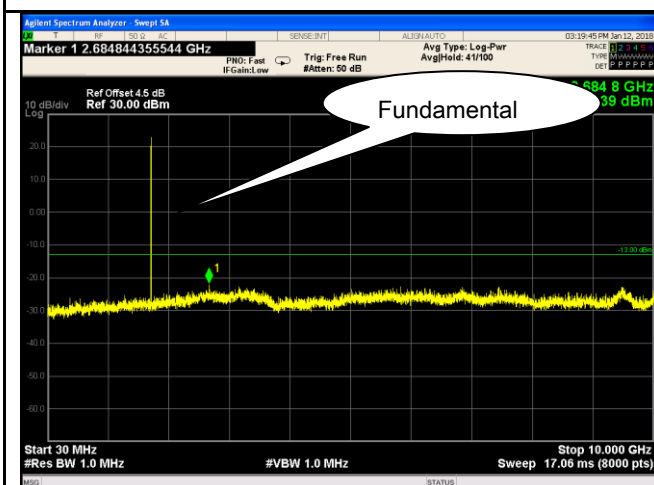


LTE Band IV - Middle Channel-1

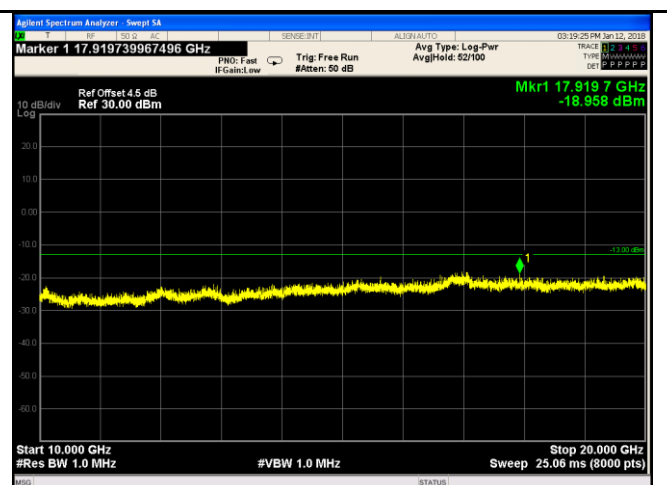

LTE Band IV - Middle Channel-2

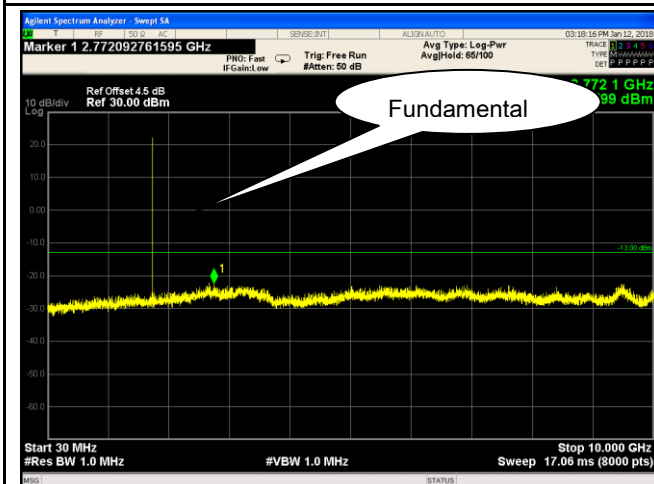


LTE Band IV - High Channel-1

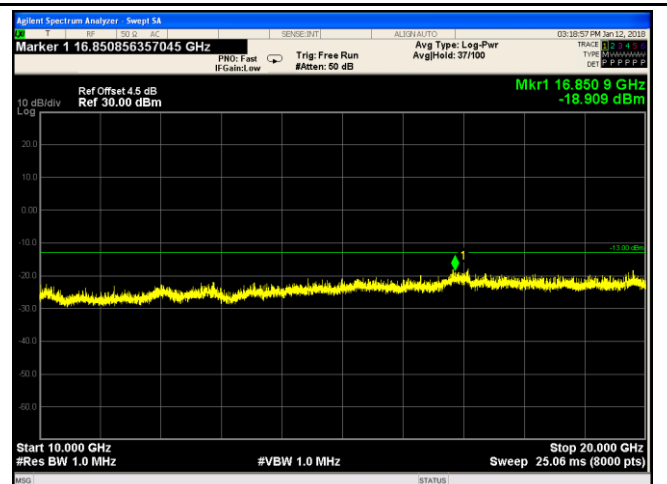


LTE Band IV - High Channel-2


LTE Band V (Part 22H)

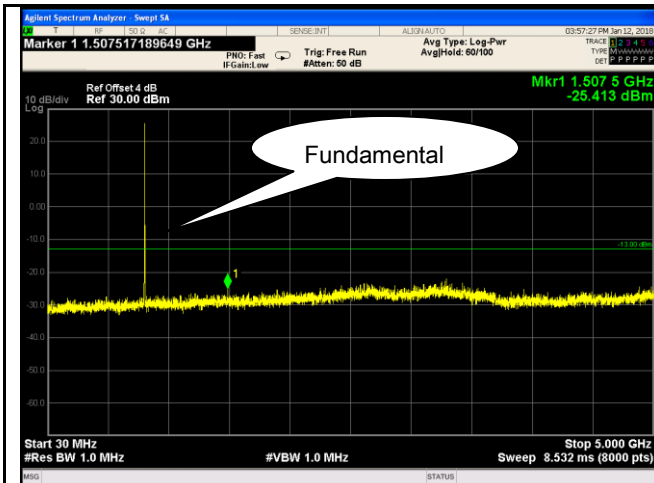


LTE Band V - Low Channel-1

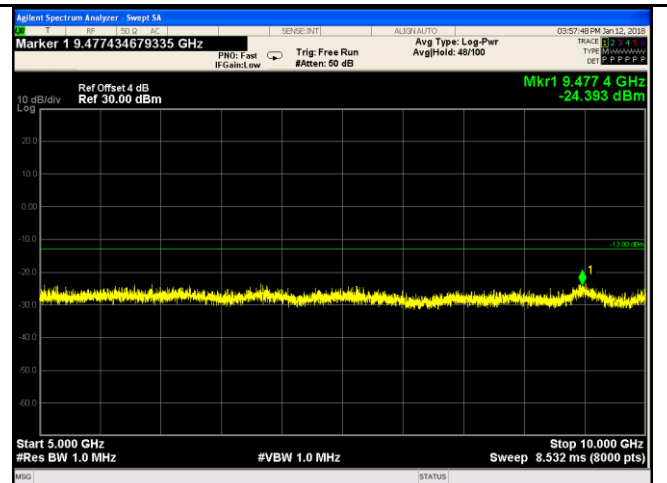


LTE Band V - Low Channel-2

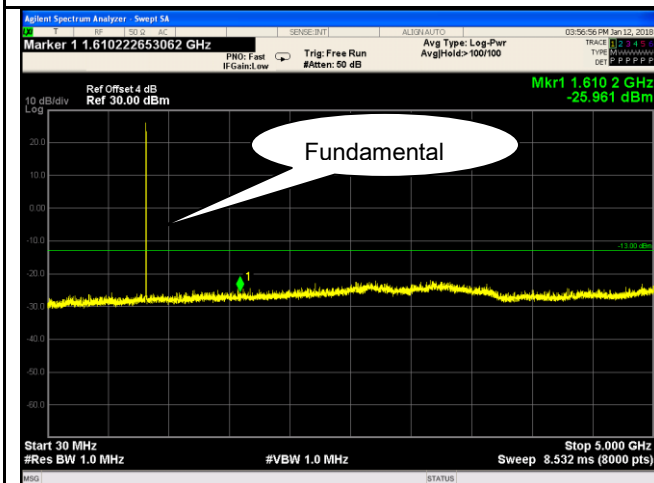


LTE Band V - Middle Channel-1

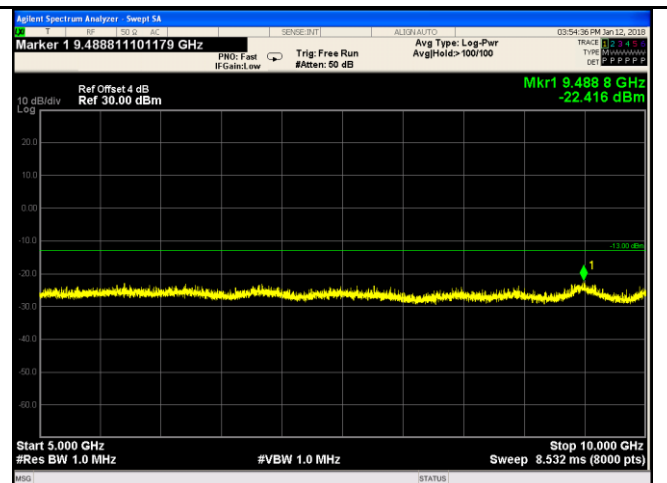

LTE Band V - Middle Channel-2

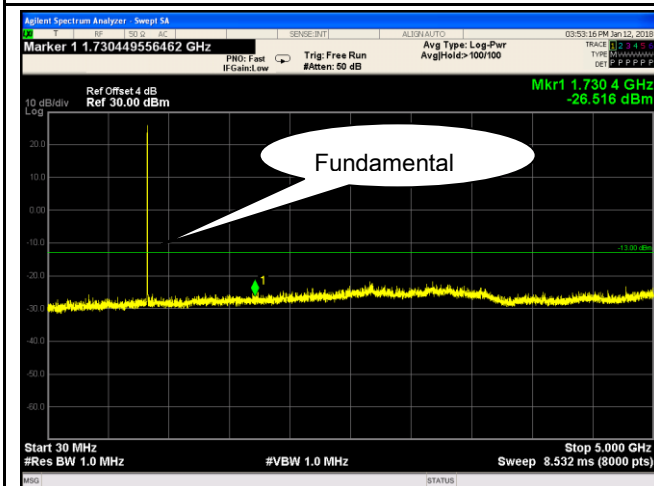

LTE Band V - High Channel-1

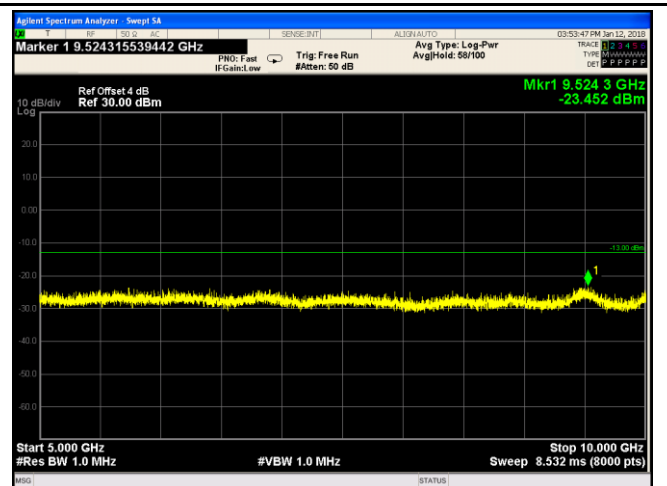


LTE Band V - High Channel-2

6.6 Spurious Radiated Emissions

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1023mbar
Test date :	January 27, 2018
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1053, §22.917 & §24.238 § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.	☒

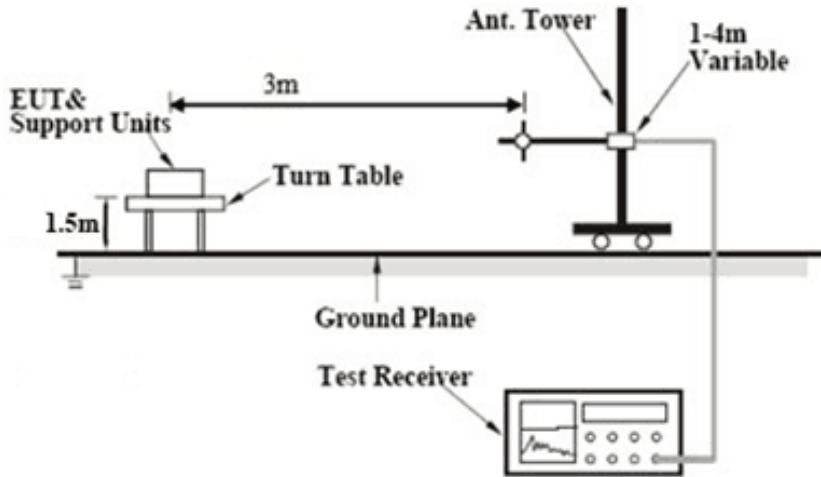Test setup	
------------	--

Test Procedure	- The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Sample Calculation: EUT Field Strength = Raw Amplitude (dBμV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)
----------------	---

Remark		
Result	☒ Pass	☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

LTE Band II (Part 24E) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3720	-49.18	V	10.25	2.73	-41.66	-13	-28.66
3720	-50.67	H	10.25	2.73	-43.15	-13	-30.15
291.17	-52.76	V	5.86	0.28	-47.18	-13	-34.18
702.09	-52.75	H	6.21	0.42	-46.96	-13	-33.96

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-48.3	V	10.25	2.73	-40.78	-13	-27.78
3760	-49.06	H	10.25	2.73	-41.54	-13	-28.54
422	-53.13	V	5.93	0.29	-47.49	-13	-34.49
643.64	-54.07	H	6.17	0.44	-48.34	-13	-35.34

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3800	-49.03	V	10.36	2.73	-41.4	-13	-28.4
3800	-49.36	H	10.36	2.73	-41.73	-13	-28.73
841	-53.36	V	6.23	0.44	-47.57	-13	-34.57
386.63	-53.59	H	5.85	0.28	-48.02	-13	-35.02

Note:

1, The testing has been conformed to $10 \times 1907.5 \text{ MHz} = 19,075 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE Band IV (Part27) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3440	-49.52	V	10.06	2.52	-41.98	-13	-28.98
3440	-50.35	H	10.06	2.52	-42.81	-13	-29.81
520.59	-54.3	V	6.42	0.38	-48.26	-13	-35.26
524.04	-53.68	H	6.39	0.39	-47.68	-13	-34.68

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3465	-49.65	V	10.09	2.52	-42.08	-13	-29.08
3465	-50.05	H	10.09	2.52	-42.48	-13	-29.48
791.88	-52.84	V	6.21	0.47	-47.1	-13	-34.1
810.83	-53.24	H	6.17	0.41	-47.48	-13	-34.48

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3490	-49.58	V	10.09	2.52	-42.01	-13	-29.01
3490	-50.27	H	10.09	2.52	-42.7	-13	-29.7
442.86	-52.85	V	6.39	0.33	-46.79	-13	-33.79
699.87	-53.91	H	6.2	0.46	-48.17	-13	-35.17

Note:

1, The testing has been conformed to $10 \times 1752.5 \text{ MHz} = 17,525 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

LTE Band V (Part22H) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1658	-49.49	V	7.95	0.78	-42.32	-13	-29.32
1658	-49.63	H	7.95	0.78	-42.46	-13	-29.46
646.66	-53.56	V	6.21	0.48	-47.83	-13	-34.83
383.2	-53.67	H	5.9	0.29	-48.06	-13	-35.06

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673	-49.9	V	7.95	0.78	-42.73	-13	-29.73
1673	-49.56	H	7.95	0.78	-42.39	-13	-29.39
846.8	-53.41	V	6.24	0.47	-47.64	-13	-34.64
704.78	-52.99	H	6.21	0.41	-47.19	-13	-34.19

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1688	-49.97	V	7.95	0.78	-42.8	-13	-29.8
1688	-50.28	H	7.95	0.78	-43.11	-13	-30.11
812.14	-52.59	V	6.16	0.42	-46.85	-13	-33.85
800.1	-53.94	H	6.23	0.44	-48.15	-13	-35.15

Note:

1, The testing has been conformed to $10 \times 846.5 \text{ MHz} = 8,465 \text{ MHz}$


2, All other emissions more than 30 dB below the limit

3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

6.7 Band Edge

Temperature	25°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	January 12, 2018
Tested By :	Aaron Liang

Requirement(s):

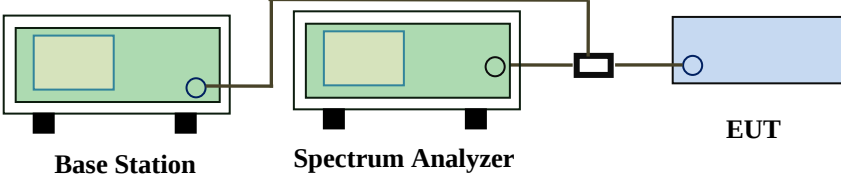Spec	Item	Requirement	Applicable
§22.917(a) §24.238(a) § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.	☒
Test setup	 The diagram illustrates the test setup. A Base Station (green box) is connected to a Spectrum Analyzer (green box) via a cable. The Spectrum Analyzer is then connected to an EUT (blue box) through a power divider (black box). Labels 'Base Station', 'Spectrum Analyzer', and 'EUT' are placed below their respective components.		
Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

LTE Band II (Part 24E) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	18607	1850	QPSK	-30.071	-13
			16QAM	-29.852	-13
1.4	18900	1910	QPSK	-23.556	-13
			16QAM	-24.056	-13
3	18615	1850	QPSK	-22.920	-13
			16QAM	-24.044	-13
3	19185	1910	QPSK	-24.132	-13
			16QAM	-25.458	-13
5	18625	1850	QPSK	-22.482	-13
			16QAM	-25.563	-13
5	19175	1910	QPSK	-27.783	-13
			16QAM	-27.780	-13
10	18650	1850	QPSK	-30.401	-13
			16QAM	-26.867	-13
10	19150	1910	QPSK	-23.210	-13
			16QAM	-27.566	-13
15	18675	1850	QPSK	-28.334	-13
			16QAM	-29.699	-13
15	19125	1910	QPSK	-27.534	-13
			16QAM	-29.399	-13
20	18700	1850	QPSK	-27.285	-13
			16QAM	-30.670	-13
20	19100	1910	QPSK	-20.828	-13
			16QAM	-21.666	-13

LTE Band IV (Part 27) result


BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	19957	1709.9	QPSK	-26.691	-13
			16QAM	-28.696	-13
1.4	20393	1755	QPSK	-25.211	-13
			16QAM	-26.739	-13
3	19965	1709.9	QPSK	-21.848	-13
			16QAM	-20.844	-13
3	20385	1755	QPSK	-23.997	-13
			16QAM	-25.361	-13
5	19975	1709.9	QPSK	-26.615	-13
			16QAM	-25.915	-13
5	20375	1755	QPSK	-26.442	-13
			16QAM	-24.365	-13
10	20000	1709.9	QPSK	-21.501	-13
			16QAM	-20.428	-13
10	20350	1755	QPSK	-24.623	-13
			16QAM	-28.202	-13
15	20025	1709.9	QPSK	-28.287	-13
			16QAM	-29.483	-13
15	20325	1755	QPSK	-26.903	-13
			16QAM	-25.832	-13
20	20050	1709.9	QPSK	-27.589	-13
			16QAM	-27.584	-13
20	20300	1755	QPSK	-29.939	-13
			16QAM	-30.561	-13

LTE Band V (Part 22H) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	20407	823.9	QPSK	-29.174	-13
			16QAM	-30.179	-13
1.4	20643	849	QPSK	-24.794	-13
			16QAM	-25.395	-13
3	20415	824	QPSK	-21.428	-13
			16QAM	-20.495	-13
3	20635	849	QPSK	-22.852	-13
			16QAM	-25.646	-13
5	20425	824	QPSK	-21.802	-13
			16QAM	-25.077	-13
5	20625	849	QPSK	-19.426	-13
			16QAM	-23.254	-13
10	20450	824	QPSK	-23.824	-13
			16QAM	-23.824	-13
10	20800	849	QPSK	-26.278	-13
			16QAM	-27.267	-13


Test Plots

LTE Band II (Part 24E)

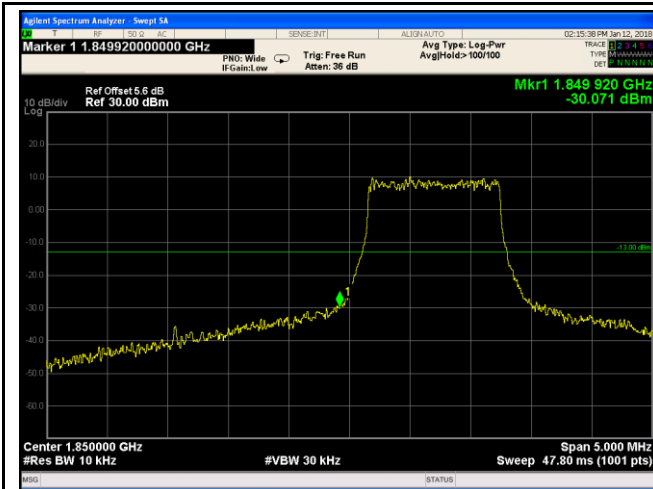


LTE Band II - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(13.05/10)=4.5+1.1=5.6dB

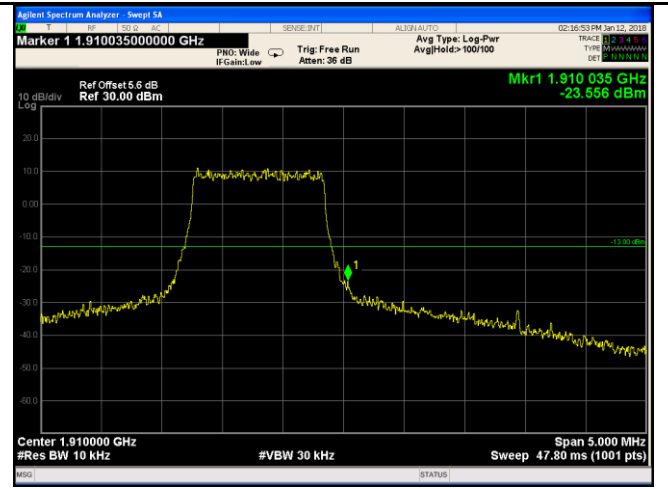


LTE Band II - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(13.03/10)=4.5+1.1=5.6dB

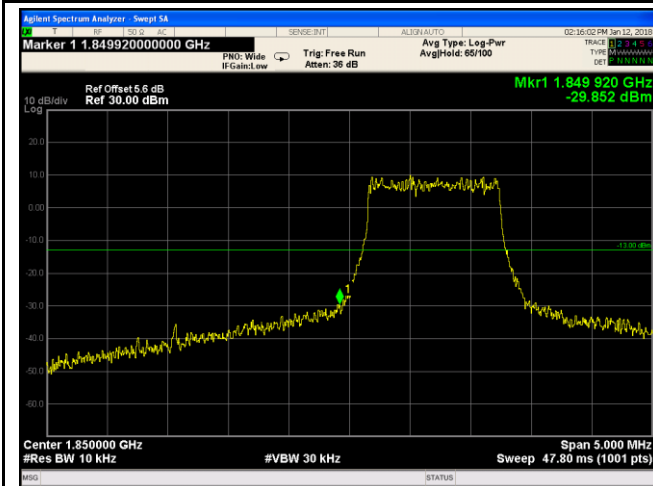


LTE Band II - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.88/10)=4.5+1.1=5.6 dB

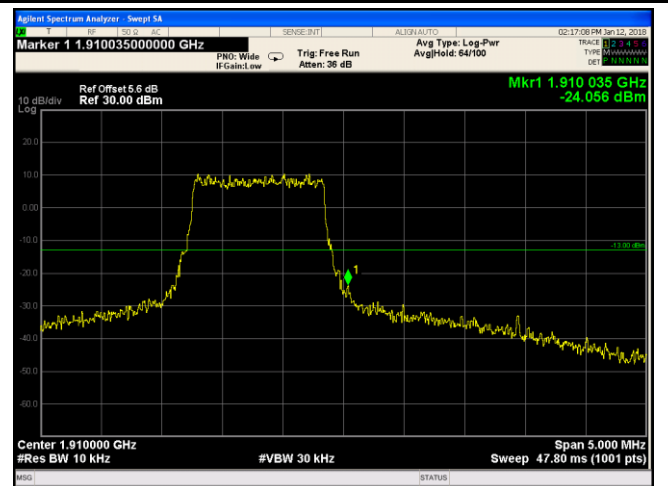


LTE Band II - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(13.00/10)=4.5+1.1=5.6 dB

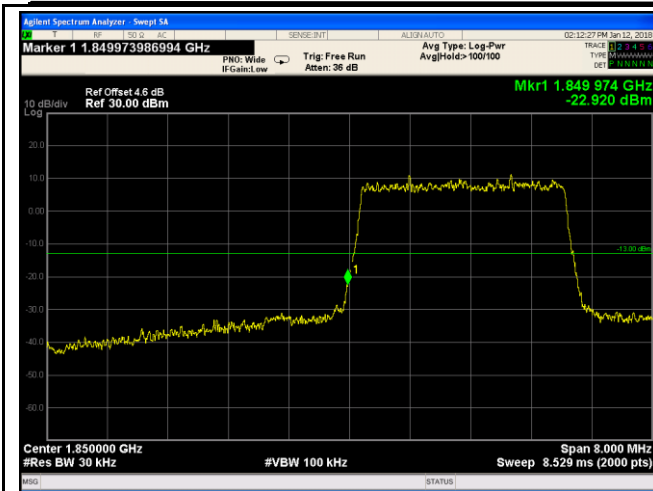


LTE Band II - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.57/30)=4.5+0.1=4.6 dB

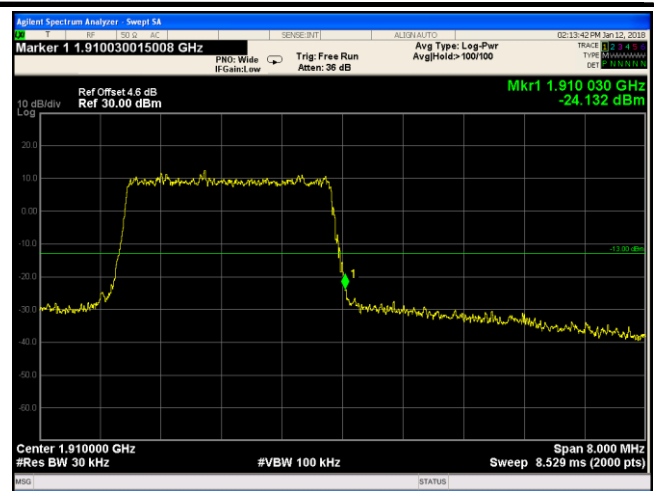


LTE Band II - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.50/30)=4.5+0.1=4.6 dB

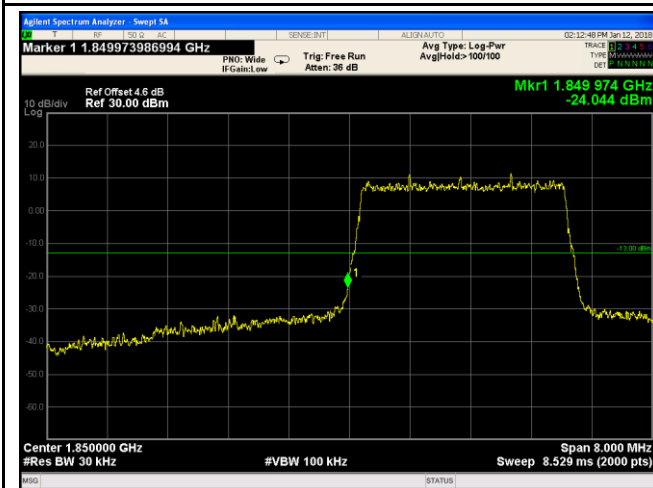


LTE Band II - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.57/30)=4.5+0.1=4.6 dB

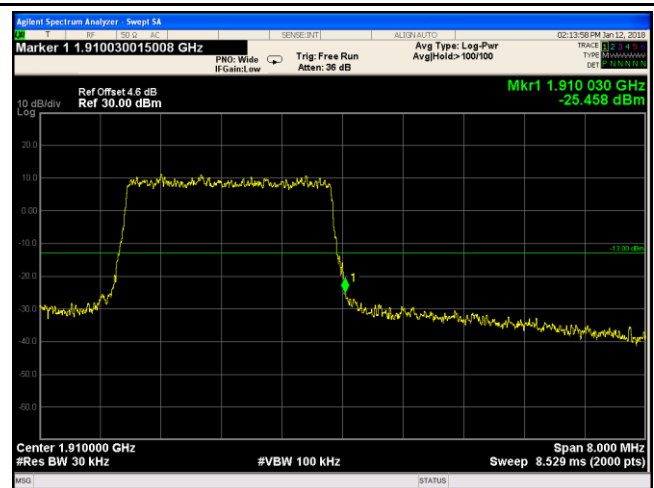


LTE Band II - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.89/30)=4.5+0.1=4.6 dB

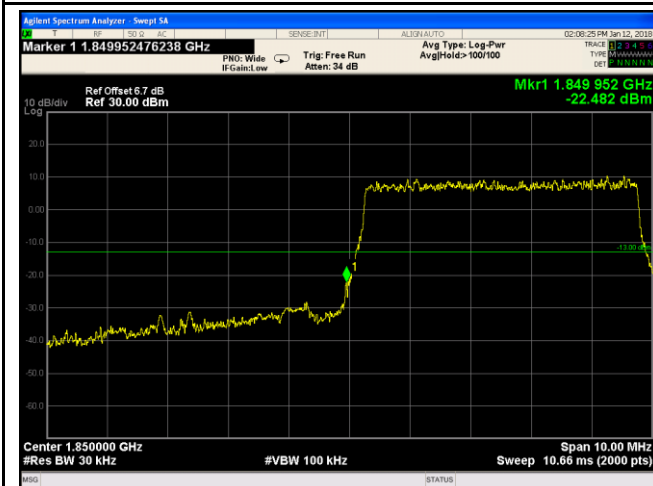


LTE Band II - Low Channel QPSK-5

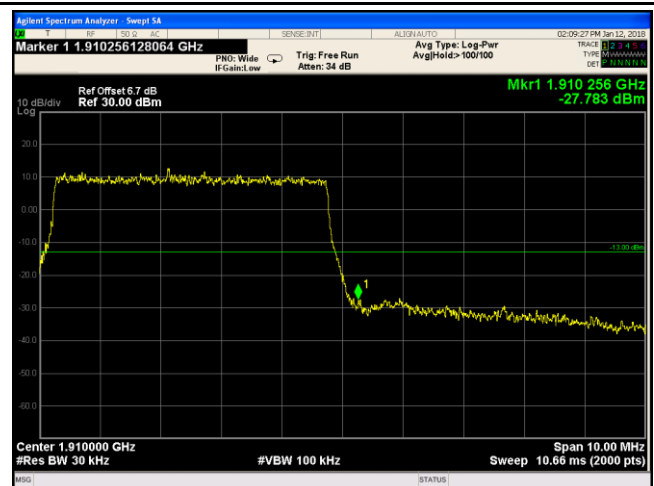


LTE Band II - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(49.92/30)=4.5+2.2=6.7dB

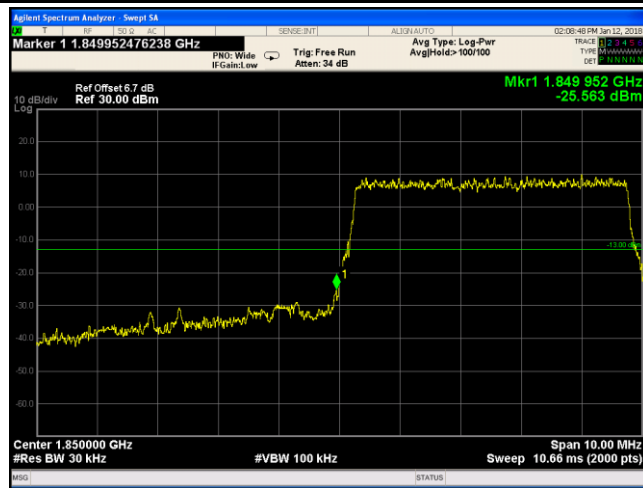


LTE Band II - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.23/30)=4.5+2.2=6.7 dB

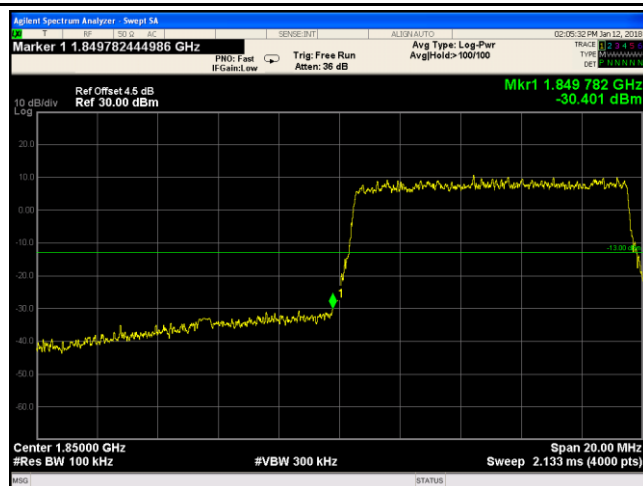


LTE Band II - Low Channel QPSK-10

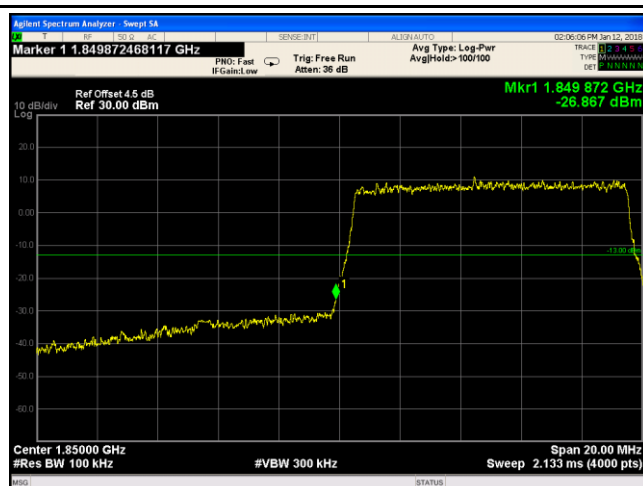


LTE Band II - Low Channel 16QAM-10

Note: Offset=Cable loss (4.5) + 10log
(49.41/30)=4.5+2.2=6.7 dB

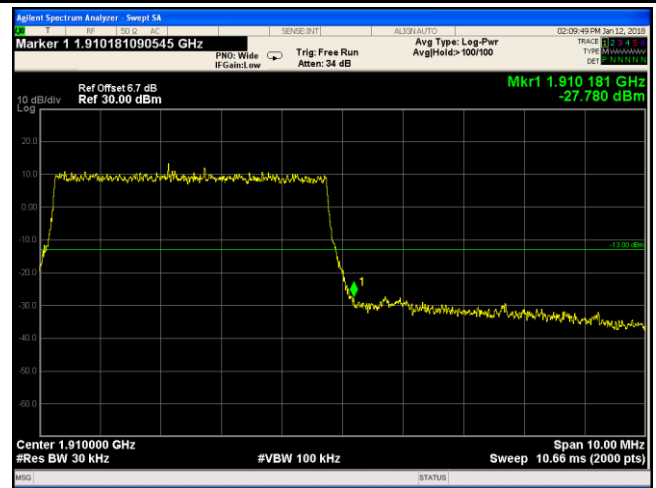


LTE Band II - High Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.08/30)=4.5+2.2=6.7 dB

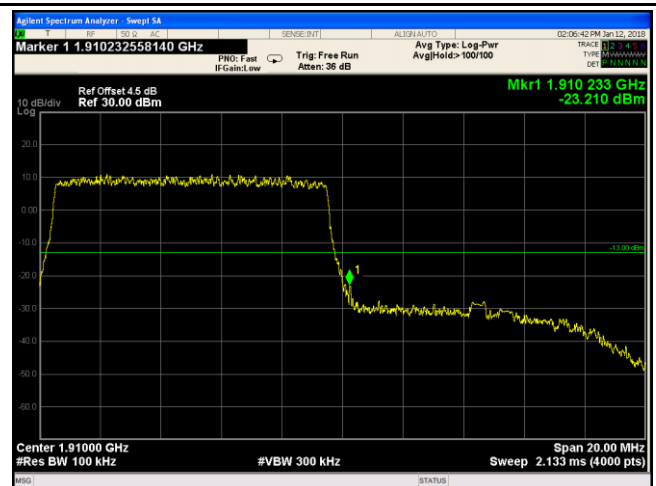


LTE Band II - High Channel QPSK-10

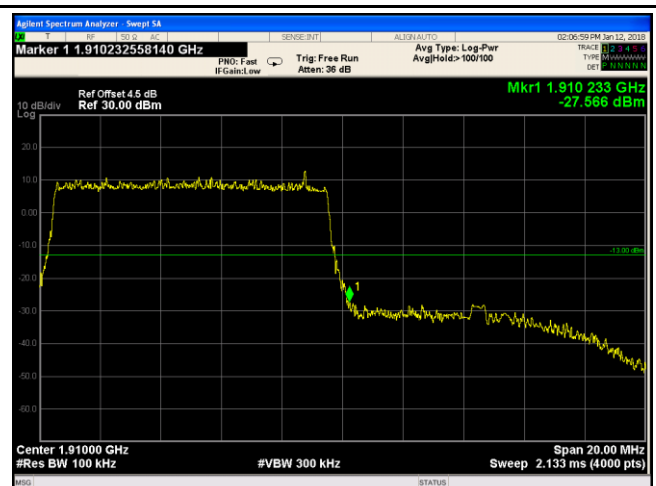


LTE Band II - High Channel 16QAM-10

Note: Offset=Cable loss (4.5) + 10log
(98.64/100)=4.5+0.0=4.5 dB

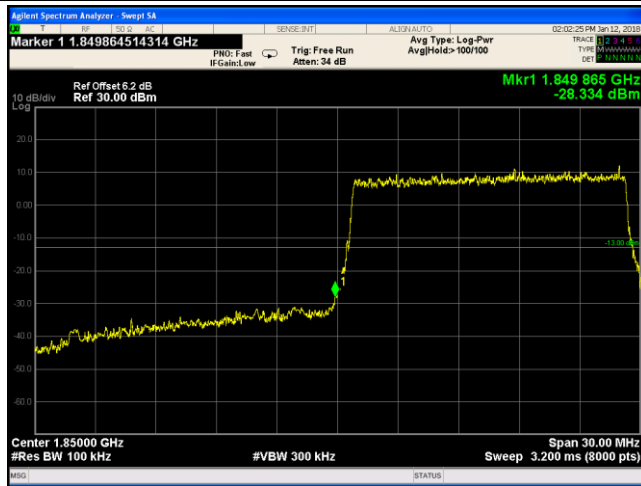

LTE Band II - Low Channel QPSK-15


Note: Offset=Cable loss (4.5) + 10log
(148.5/100)=4.5+2.3=6.2 dB

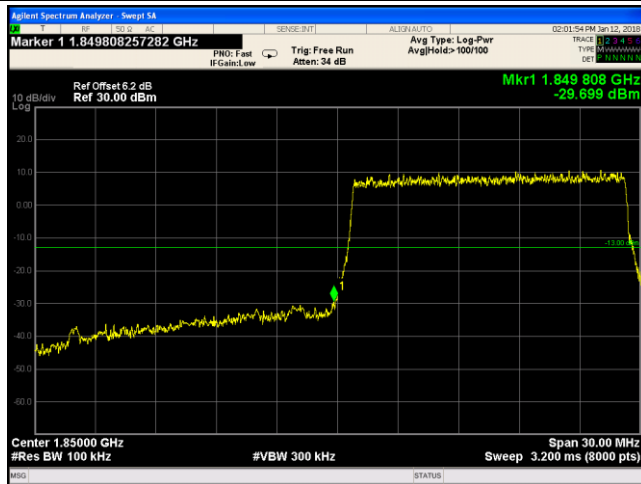

LTE Band II - Low Channel 16QAM-15


Note: Offset=Cable loss (4.5) + 10log
(146.5/100)=4.5+2.3=6.2 dB

Note: Offset=Cable loss (4.5) + 10log
(100.2/100)=4.5+0.0=4.5 dB

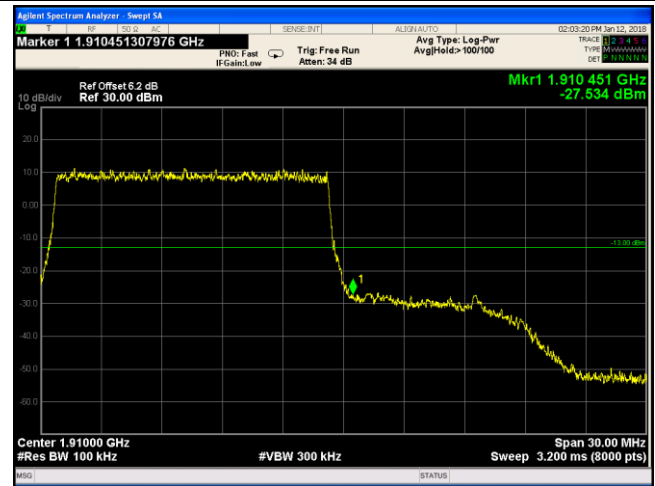


LTE Band II - High Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(146.6/100)=4.5+2.3=6.2 dB

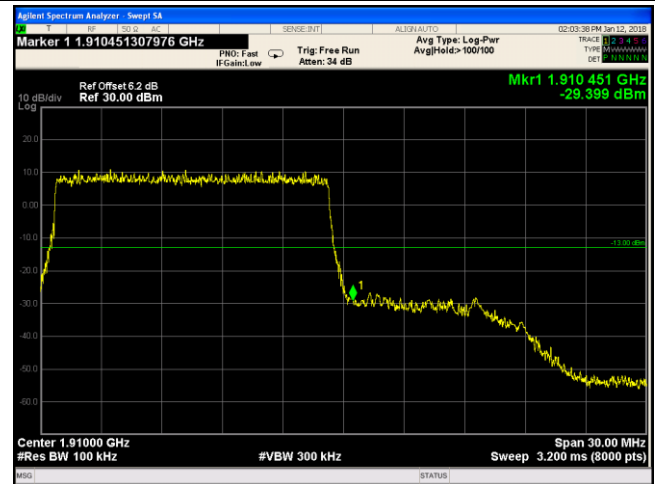


LTE Band II - High Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(147.1/100)=4.5+2.3=6.2 dB

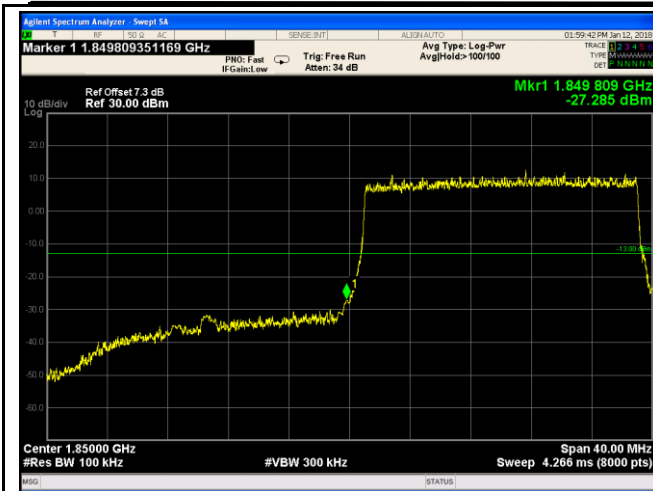


LTE Band II - Low Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(190.9/100)=4.5+2.8=7.3 dB

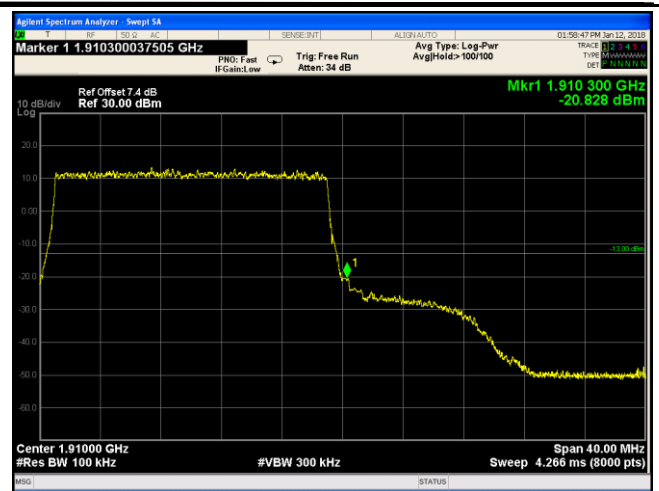


LTE Band II - High Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(193/100)=4.5+2.9=7.4 dB

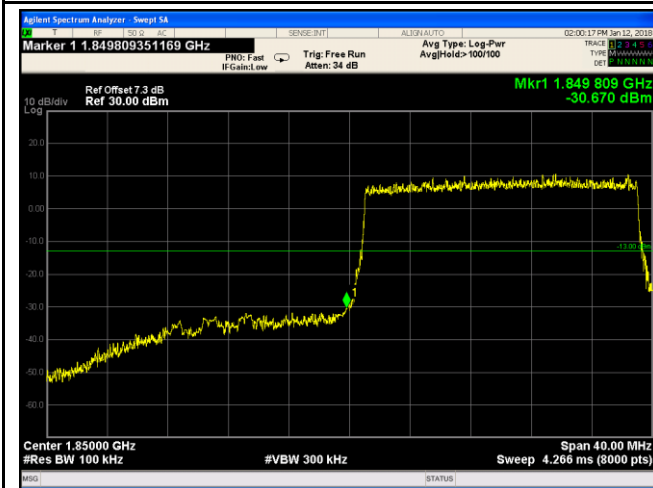

LTE Band II - Low Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log
(191/100)=4.5+2.8=7.3dB

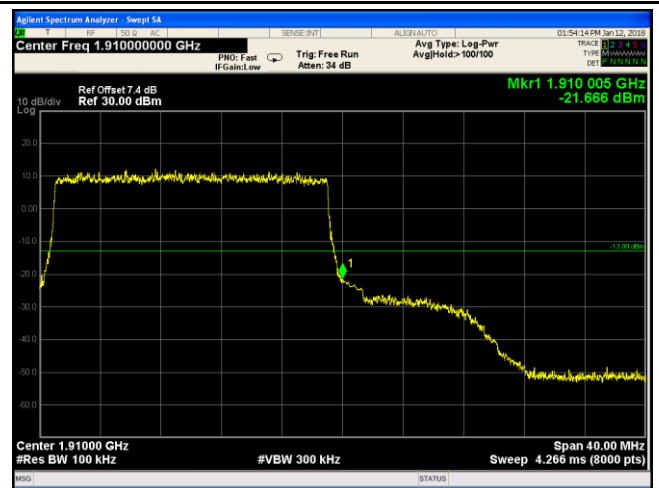

LTE Band II - High Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log
(191.5/100)=4.5+2.9=7.4 dB