



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

TEST REPORT

FCC PART 15.247

Report Reference No.: CTL1611214303-WF

Compiled by:
(position+printed name+signature)

Allen Wang
(File administrators)

Allen Wang

Tested by:
(position+printed name+signature)

Nice Nong
(Test Engineer)

Nice Nong

Approved by:
(position+printed name+signature)

Tracy Qi
(Manager)

Tracy Qi

Product Name.....: Bluetooth headset

Model/Type reference: 8B095BT

List Model(s).....: N/A

Trade Mark.....: N/A

FCC ID.....: 2AJ33-8B095BT

Applicant's name: **Eurosun International Limited**

Address of applicant: 3F, bldg F1, F518 Idea Land, Baoyuan Road, Xixiang Avenue, Bao An District, Shenzhen, China

Test Firm: **Shenzhen CTL Testing Technology Co., Ltd.**

Address of Test Firm: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: **FCC Part 15.247:** Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Date of Receipt.....: Nov. 21, 2016

Date of Test Date.....: Nov. 21, 2016–Dec. 07, 2016

Data of Issue.....: Dec. 07, 2016

Result.....: Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. : CTL1611214303-WF	Dec. 07, 2016 Date of issue
---	--------------------------------

Equipment under Test : Bluetooth headset

Model /Type : 8B095BT

Listed Models : N/A

Applicant : **Eurosun International Limited**

Address : 3F, bldg F1, F518 Idea Land, Baoyuan Road, Xixiang Avenue, Bao An District ,Shenzhen, China

Manufacturer : **Dongguan Eurosun Electronic Technology Ltd**

Address : No1.Guangchang Road, Qiaotou Town, Dongguan City, China

Test result	Pass *
--------------------	---------------

*In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****

Revisions	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2016-12-07	CTL1611214303-WF	Tracy Qi



Table of Contents

Page

1. SUMMARY.....	5
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
2. GENERAL INFORMATION.....	7
2.1. ENVIRONMENTAL CONDITIONS	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	7
2.4. EQUIPMENTS USED DURING THE TEST	8
2.5. RELATED SUBMITTAL(S) / GRANT (S).....	9
2.6. MODIFICATIONS.....	9
3. TEST CONDITIONS AND RESULTS	10
3.1. CONDUCTED EMISSIONS TEST	10
3.2. RADIATED EMISSIONS AND BAND EDGE	13
3.3. MAXIMUM PEAK OUTPUT POWER	20
3.4. 20dB BANDWIDTH.....	24
3.5. FREQUENCY SEPARATION	28
3.6. NUMBER OF HOPPING FREQUENCY.....	30
3.7. TIME OF OCCUPANCY (DWEIL TIME).....	32
3.8. OUT-OF-BAND EMISSIONS	36
3.9. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	44
3.10. ANTENNA REQUIREMENT.....	45
4. TEST SETUP PHOTOS OF THE EUT	46
5. PHOTOS OF THE EUT.....	47

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[ANSI C63.4: 2014](#): –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz
Range of 9 kHz to 40GHz

[KDB558074 D01 V03r03](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(1)(i)	20dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(b)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii)	Number of hopping frequency& Time of Occupancy	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.205/15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	± 0.57 dB	(1)
Transmitter power Radiated	± 2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	± 2.20 dB	(1)
Occupied Bandwidth	± 0.01 ppm	(1)
Radiated Emission 30~1000MHz	± 4.10 dB	(1)
Radiated Emission Above 1GHz	± 4.32 dB	(1)
Conducted Disturbance 0.15~30MHz	± 3.20 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Bluetooth headset
Model/Type reference:	8B095BT
Power supply:	DC 3.7V from battery
Bluetooth :	
Version:	Supported BT4.1
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB antenna
Antenna gain:	0dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

Operation Frequency :

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Preliminary tests were performed in each mode and packet length of BT, and found worst case as below, finally test were conducted at those mode and recorded in this report.

Test Items	Worst case
Conducted Emissions	DH5 Middle channel
Radiated Emissions and Band Edge	DH5
Maximum Conducted Output Power	DH5/2DH5/3DH5
20dB Bandwidth	DH5/2DH5/3DH5
Frequency Separation	DH5/2DH5/3DH5 Middle channel
Number of hopping frequency	DH5/2DH5/3DH5
Time of Occupancy (Dwell Time)	DH1/DH3/DH5 Middle channel 2DH1/2DH3/2DH5 Middle channel 3DH1/3DH3/3DH5 Middle channel
Out-of-band Emissions	DH5/2DH5/3DH5

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.1 2	2016/06/02	2017/06/01
LISN	R&S	ESH2-Z5	860014/010	2016/06/02	2017/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2016/06/02	2017/06/01
EMI Test Receiver	R&S	ESCI	103710	2016/06/02	2017/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2016/05/21	2017/05/20
Spectrum Analyzer	Agilent	N9020	US46220290	2016/01/17	2017/01/16
Controller	EM Electronics	Controller EM 1000	N/A	2016/05/21	2017/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2016/05/19	2017/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2016/05/19	2017/05/18
Amplifier	Agilent	8349B	3008A02306	2016/05/19	2017/05/18
Amplifier	Agilent	8447D	2944A10176	2016/05/19	2017/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2016/05/20	2017/05/19
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2016/05/20	2017/05/19
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2016/05/20	2017/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2016/06/02	2017/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/06/02	2017/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/06/02	2017/06/01

RF Cable	Megalon	RF-A303	N/A	2016/06/02	2017/06/01
----------	---------	---------	-----	------------	------------

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.



3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

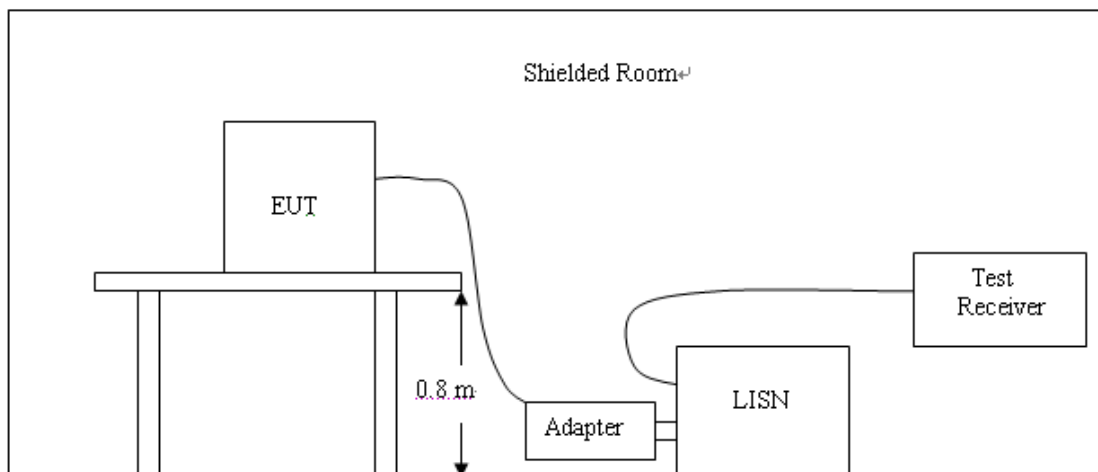

TEST PROCEDURE


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark: All modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK Middle Channel was reported as below:

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

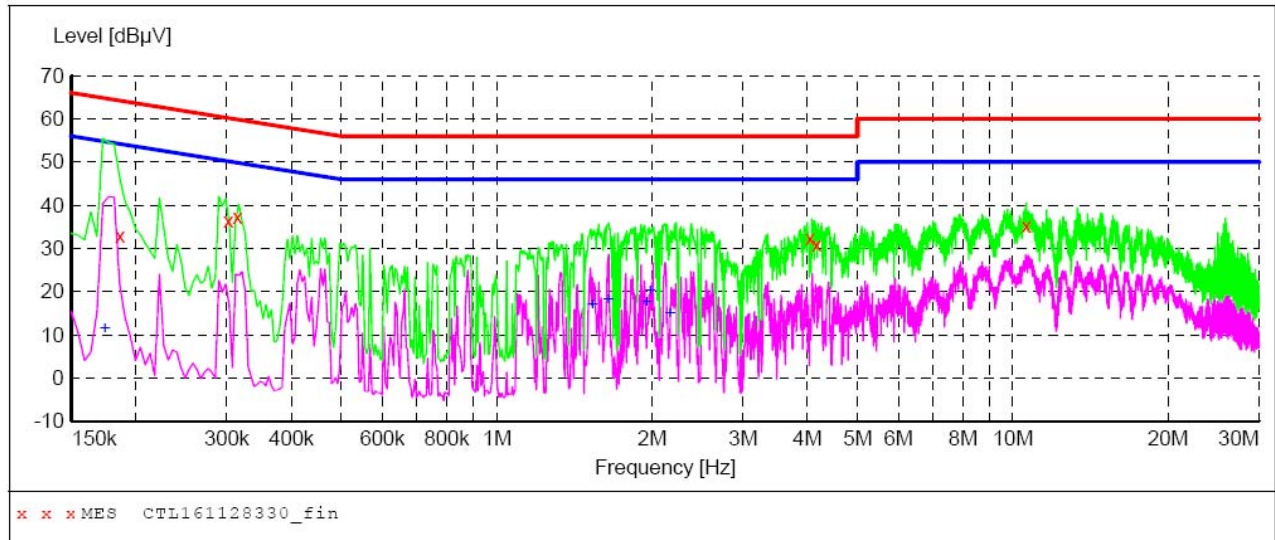***MEASUREMENT RESULT: "CTL161128330_fin"***

11/28/2016 9:18AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.186000	33.00	10.2	64	31.2	QP	L1	GND
0.302000	36.40	10.2	60	23.8	QP	L1	GND
0.314000	37.20	10.2	60	22.7	QP	L1	GND
4.040000	32.40	10.4	56	23.6	QP	L1	GND
4.160000	31.00	10.4	56	25.0	QP	L1	GND
10.616000	35.20	10.6	60	24.8	QP	L1	GND


MEASUREMENT RESULT: "CTL161128330_fin2"

11/28/2016 9:18AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.174000	11.30	10.2	55	43.5	AV	L1	GND
1.532000	16.80	10.3	46	29.2	AV	L1	GND
1.646000	18.10	10.3	46	27.9	AV	L1	GND
1.952000	17.50	10.3	46	28.5	AV	L1	GND
1.982000	20.00	10.3	46	26.0	AV	L1	GND
2.168000	14.90	10.4	46	31.1	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

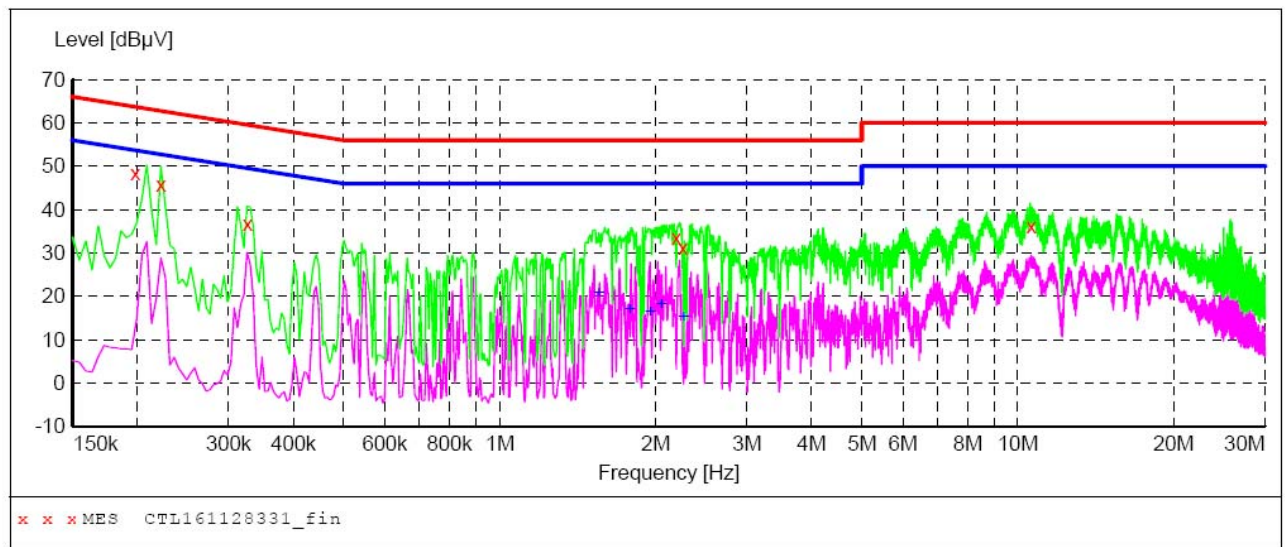**MEASUREMENT RESULT: "CTL161128331_fin"**

11/28/2016 9:21AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.198000	48.40	10.2	64	15.3	QP	N	GND
0.222000	45.60	10.2	63	17.1	QP	N	GND
0.326000	36.60	10.2	60	23.0	QP	N	GND
2.192000	33.40	10.4	56	22.6	QP	N	GND
2.258000	31.10	10.4	56	24.9	QP	N	GND
10.604000	36.00	10.6	60	24.0	QP	N	GND

MEASUREMENT RESULT: "CTL161128331_fin2"

11/28/2016 9:21AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
1.556000	20.70	10.3	46	25.3	AV	N	GND
1.784000	16.80	10.3	46	29.2	AV	N	GND
1.952000	16.30	10.3	46	29.7	AV	N	GND
2.054000	18.00	10.4	46	28.0	AV	N	GND
2.264000	15.10	10.4	46	30.9	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

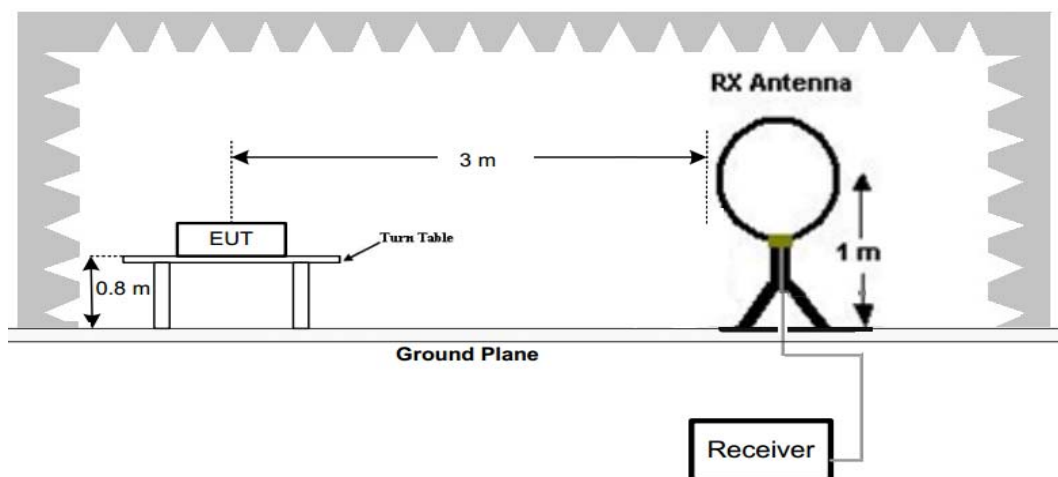

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

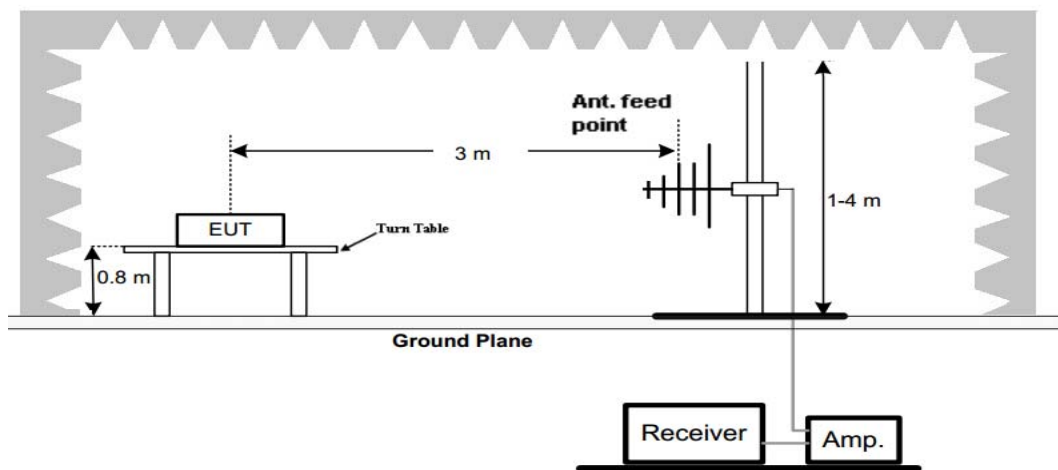

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

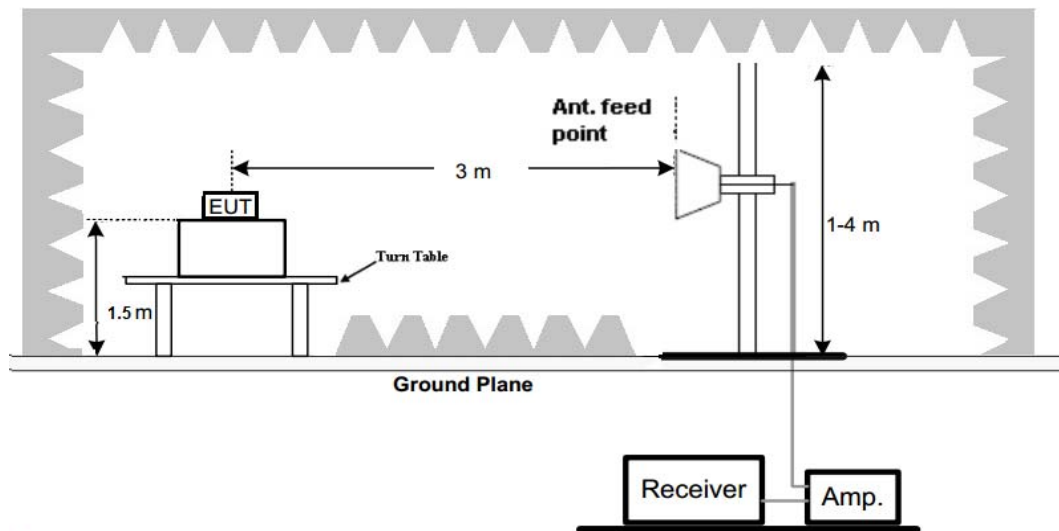

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:


1. We measured Radiated Emission at GFSK, $\pi/4$ DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
2. For below 1GHz testing recorded worst at GFSK DH5 low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength		Transducer	
Start	Stop	Detector	Meas.	IF	
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

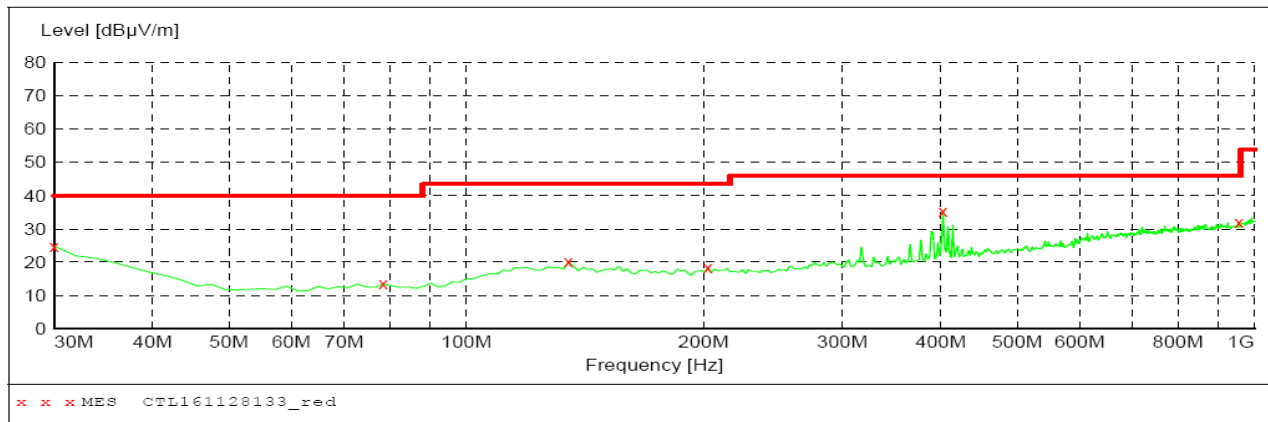**MEASUREMENT RESULT: "CTL161128133_red"**


11/28/2016 9:59AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	24.80	20.8	40.0	15.2	---	300.0	124.00	HORIZONTAL
78.500000	13.40	8.4	40.0	26.6	---	200.0	254.00	HORIZONTAL
134.760000	20.10	14.4	43.5	23.4	---	300.0	145.00	HORIZONTAL
202.660000	18.50	14.1	43.5	25.0	---	100.0	112.00	HORIZONTAL
402.480000	35.40	18.0	46.0	10.6	---	100.0	41.00	HORIZONTAL
955.380000	32.10	26.6	46.0	13.9	---	200.0	58.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength		Transducer	
Start	Stop	Detector	Meas.	IF	
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

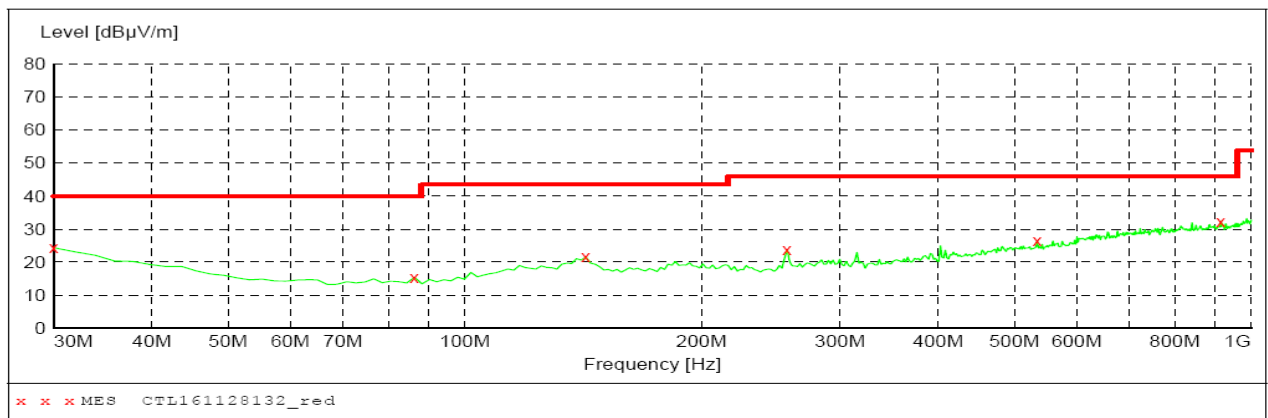**MEASUREMENT RESULT: "CTL161128132_red"**

11/28/2016 9:57AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	24.40	20.8	40.0	15.6	---	100.0	124.00	VERTICAL
86.260000	15.40	9.0	40.0	24.6	---	100.0	125.00	VERTICAL
142.520000	21.60	14.2	43.5	21.9	---	200.0	258.00	VERTICAL
256.980000	23.70	14.4	46.0	22.3	---	100.0	74.00	VERTICAL
534.400000	26.40	20.5	46.0	19.6	---	100.0	325.00	VERTICAL
914.640000	32.40	26.1	46.0	13.6	---	100.0	215.00	VERTICAL

For 1GHz to 25GHz

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

GFSK (above 1GHz)

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	57.25	PK	74	16.75	52.74	33.49	6.91	35.89	4.51
4804.00	49.25	AV	54	4.75	44.74	33.49	6.91	35.89	4.51
5125.75	47.62	PK	74	26.38	40.41	34.38	7.10	34.28	7.21
5125.75	--	AV	54	--	--	--	--	--	--
7206.00	50.11	PK	74	23.89	39.00	36.95	9.18	35.03	11.11
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	57.98	PK	74	16.02	53.47	33.49	6.91	35.89	4.51
4804.00	49.63	AV	54	4.37	45.12	33.49	6.91	35.89	4.51
5223.75	48.01	PK	74	25.99	40.60	34.56	7.15	34.31	7.41
5223.75	--	AV	54	--	--	--	--	--	--
7206.00	50.22	PK	74	23.78	39.11	36.95	9.18	35.03	11.11
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2441		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882.00	56.11	PK	74	17.89	51.46	33.60	6.95	35.90	4.65
4882.00	49.25	AV	54	4.75	44.60	33.60	6.95	35.90	4.65
5385.50	47.63	PK	74	26.37	40.02	34.73	7.25	34.37	7.61
5385.50	--	AV	54	--	--	--	--	--	--
7323.00	48.52	PK	74	25.48	36.82	37.46	9.23	35.00	11.70
7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2441		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882.00	57.54	PK	74	16.46	52.89	33.60	6.95	35.90	4.65
4882.00	49.01	AV	54	4.99	44.36	33.60	6.95	35.90	4.65
5337.25	47.69	PK	74	26.31	40.14	34.68	7.22	34.35	7.55
5337.25	--	AV	54	--	--	--	--	--	--
7323.00	49.86	PK	74	24.14	38.16	37.46	9.23	35.00	11.70
7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	56.48	PK	74	17.52	51.56	33.84	7.00	35.92	4.92
4960.00	48.69	AV	54	5.31	43.77	33.84	7.00	35.92	4.92
5155.75	48.04	PK	74	25.96	40.76	34.45	7.12	34.29	7.28
5155.75	--	AV	54	--	--	--	--	--	--
7440.00	48.74	PK	74	25.26	36.79	37.64	9.28	34.97	11.95
7440.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	57.36	PK	74	16.64	52.44	33.84	7.00	35.92	4.92
4960.00	49.22	AV	54	4.78	44.30	33.84	7.00	35.92	4.92
5035.50	48.52	PK	74	25.48	41.61	34.10	7.05	34.24	6.91
5035.50	--	AV	54	--	--	--	--	--	--
7440.00	49.66	PK	74	24.34	37.71	37.64	9.28	34.97	11.95
7440.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	94.69	PK	--	--	61.29	28.78	4.61	0.00	33.40
2402.00	88.41	AV	--	--	55.01	28.78	4.61	0.00	33.40
2365.25	45.92	PK	74	28.08	12.78	28.56	4.57	0.00	33.14
2365.25	--	AV	54	--	--	--	--	--	--
2390.00	48.25	PK	74	25.75	14.93	28.72	4.60	0.00	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	50.24	PK	74	23.76	16.85	28.78	4.61	0.00	33.39
2400.00	--	AV	54	--	--	--	--	--	--


Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	95.72	PK	--	--	62.32	28.78	4.61	0.00	33.40
2402.00	89.41	AV	--	--	56.01	28.78	4.61	0.00	33.40
2382.50	45.52	PK	74	28.48	12.26	28.67	4.59	0.00	33.26
2382.50	--	AV	54	--	--	--	--	--	--
2390.00	49.25	PK	74	24.75	15.93	28.72	4.60	0.00	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	50.99	PK	74	23.01	17.60	28.78	4.61	0.00	33.39
2400.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	95.24	PK	--	--	61.62	28.92	4.70	0.00	33.62
2480.00	89.86	AV	--	--	56.24	28.92	4.70	0.00	33.62
2483.50	51.25	PK	74	22.75	17.62	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2490.25	48.24	PK	74	25.76	14.59	28.94	4.71	0.00	33.65
2490.25	--	AV	54	--	--	--	--	--	--
2500.00	46.20	PK	74	27.8	12.52	28.96	4.72	0.00	33.68
2500.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	95.39	PK	--	--	61.77	28.92	4.70	0.00	33.62
2480.00	90.01	AV	--	--	56.39	28.92	4.70	0.00	33.62
2483.50	51.52	PK	74	22.48	17.89	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2485.50	48.55	PK	74	25.45	14.91	28.93	4.70	0.00	33.64
2485.50	--	AV	54	--	--	--	--	--	--
2500.00	46.33	PK	74	27.67	12.65	28.96	4.72	0.00	33.68
2500.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.

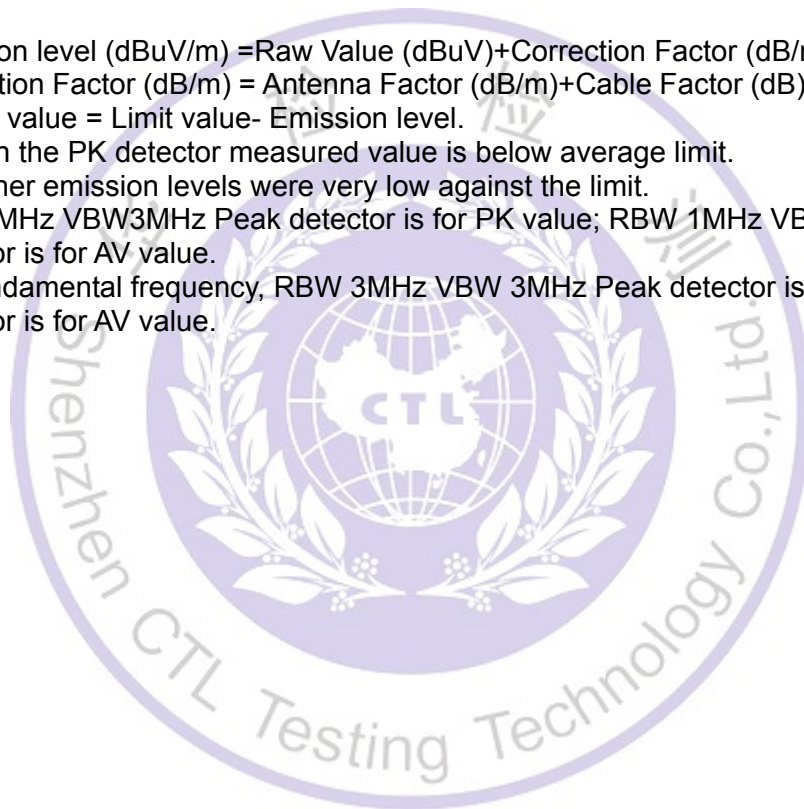

3.3. Maximum Peak Output Power


Limit

The Maximum Peak Output Power Measurement is 125mW(20.97).

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.

Test Configuration




Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	-0.437	20.97	Pass
	39	-0.855		
	78	-1.467		
π/4DQPSK	00	0.787	20.97	Pass
	39	0.327		
	78	-0.223		
8DPSK	00	0.733	20.97	Pass
	39	0.340		
	78	-0.214		


Note: 1.The test results including the cable lose.

Test plot as follows:


GFSK Modulation

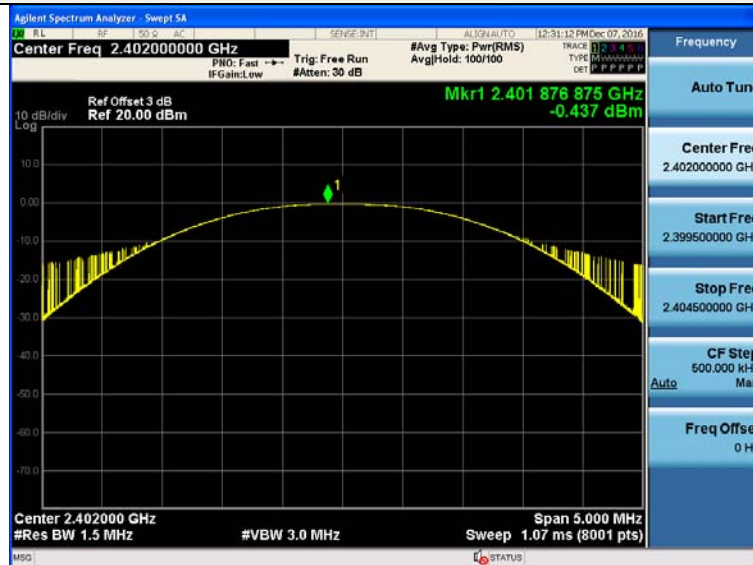


CH00

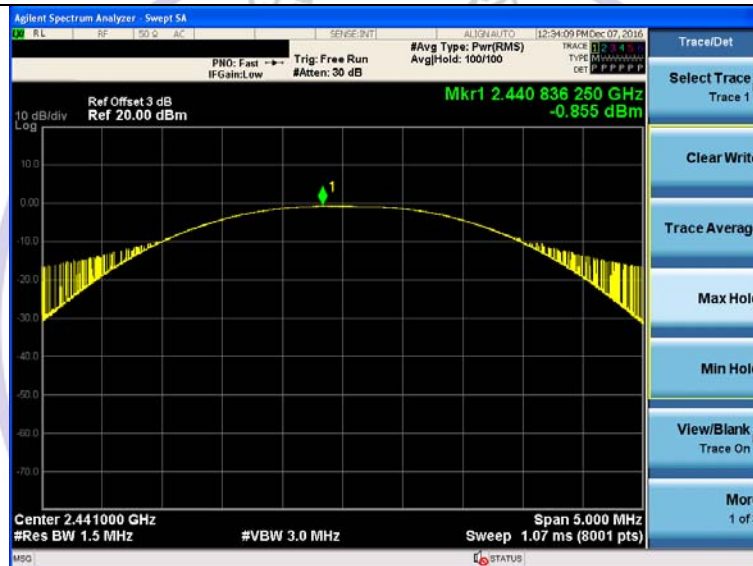


CH39

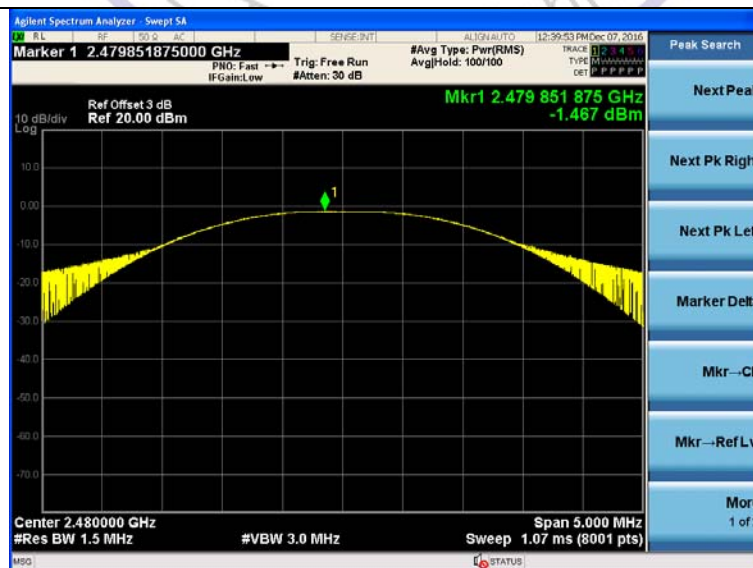


CH78

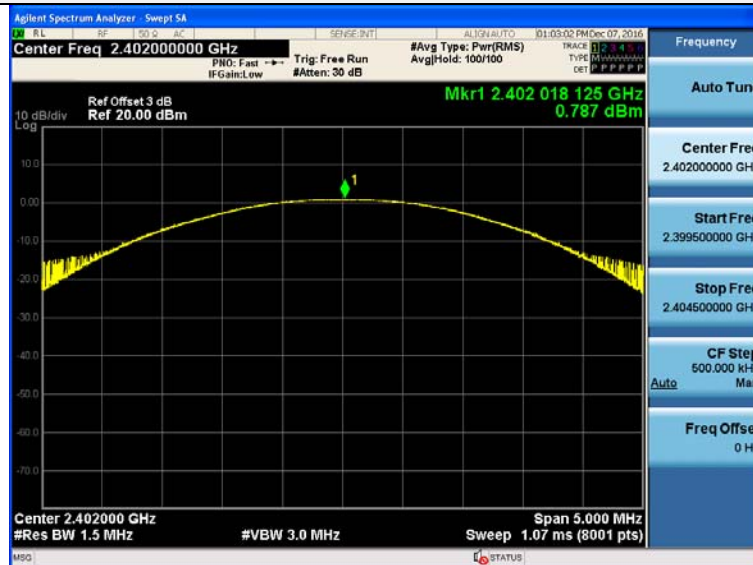$\pi/4$ DQPSK Modulation

CH00

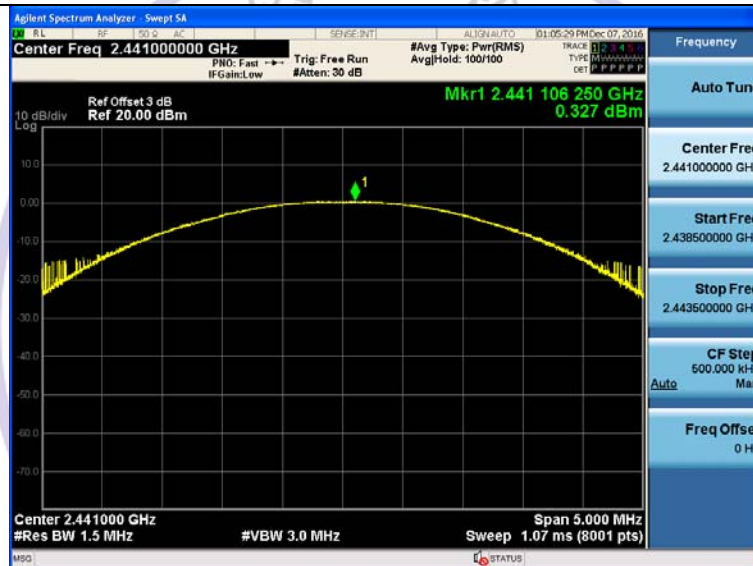


CH39

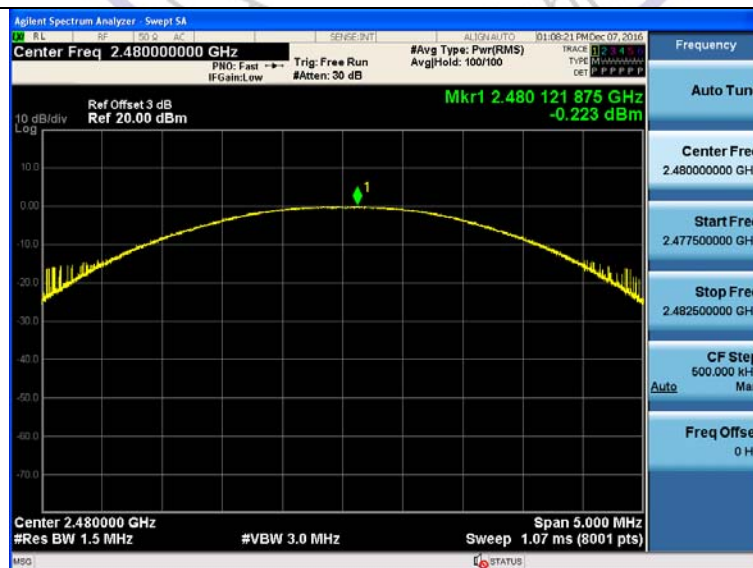


CH78


8DPSK Modulation

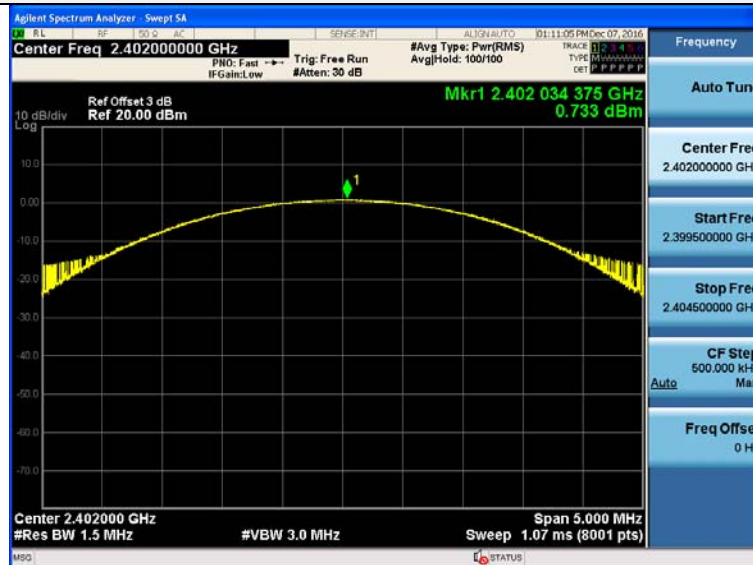

CH00

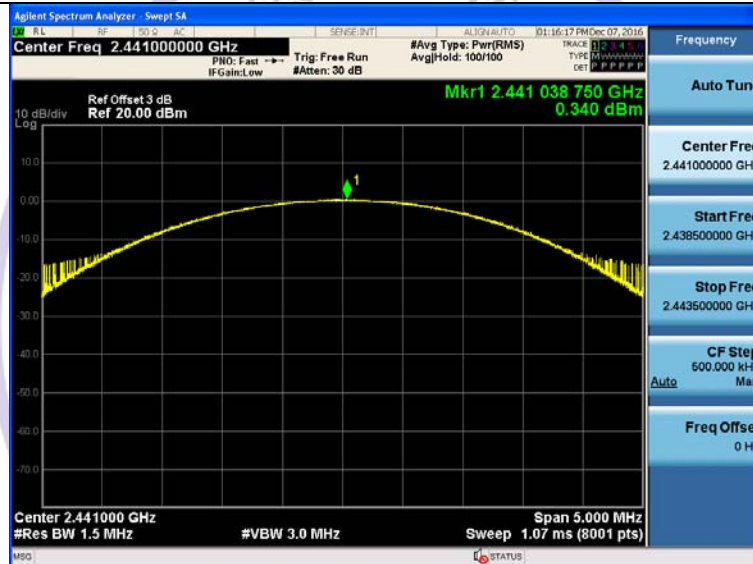

CH39

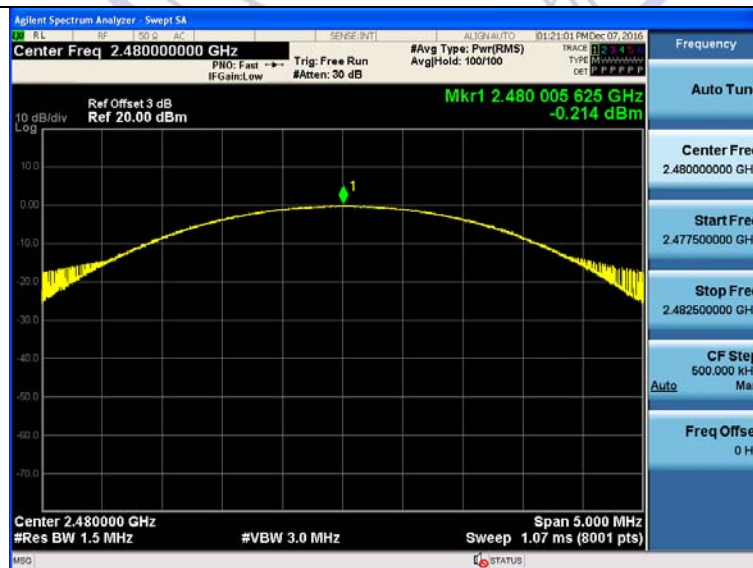

CH78

3.4. 20dB Bandwidth

Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration



Test Results

Modulation	Channel	20dB bandwidth (MHz)	99% OBW (MHz)	Result
GFSK	CH00	0.9821	0.86638	Pass
	CH39	0.9635	0.86977	
	CH78	0.9873	0.87042	
$\pi/4$ DQPSK	CH00	1.308	1.2211	
	CH39	1.315	1.2294	
	CH78	1.325	1.2187	
8DPSK	CH00	1.305	1.2069	
	CH39	1.311	1.1928	
	CH78	1.303	1.2036	

Test plot as follows:

Agilent Spectrum Analyzer - Occupied BW

Center Freq 2.402000000 GHz

Ref Offset 3 dB
Ref 20.00 dBm

Span 3 MHz
Sweep 3.2 ms

Occupied Bandwidth 866.38 kHz

Total Power 7.45 dBm

Transmit Freq Error -9.822 kHz

OBW Power 99.00 %

x dB Bandwidth 982.1 kHz

x dB -20.00 dB

Detailed description: The image shows a screenshot of an Agilent Spectrum Analyzer. The main display is a frequency spectrum plot with a yellow trace. The trace shows a signal centered at 2.402 GHz. The y-axis is labeled 'Log' and ranges from -70 to 10 dBm. The x-axis is labeled 'MHz' and ranges from 2.400 to 2.404. The signal has a peak at 2.402 GHz and a bandwidth of approximately 866 kHz. The plot is titled 'Occupied BW'. The top of the screen shows various settings: 'Center Freq 2.402000000 GHz', 'Ref Offset 3 dB', 'Ref 20.00 dBm', 'Span 3 MHz', 'Sweep 3.2 ms', 'Occupied Bandwidth 866.38 kHz', 'Total Power 7.45 dBm', 'Transmit Freq Error -9.822 kHz', 'OBW Power 99.00 %', 'x dB Bandwidth 982.1 kHz', and 'x dB -20.00 dB'. The bottom of the screen shows a 'MSG' button and a 'STATUS' button.

Agilent Spectrum Analyzer - Occupied BW

Center Freq 2.441000000 GHz

Ref Offset 3 dB
Ref 20.00 dBm

Log

10 dB/div

0.00

-10.00

-20.00

-30.00

-40.00

-50.00

-60.00

-70.00

Center 2.441 GHz

#Res BW 30 kHz

#VBW 100 kHz

Span 3 MHz

Sweep 3.2 ms

Occupied Bandwidth

869.77 kHz

Total Power

7.64 dBm

Transmit Freq Error

-1.648 kHz

OBW Power

99.00 %

x dB Bandwidth

963.5 kHz

x dB

-20.00 dB

Agilent Spectrum Analyzer - Occupied BW

REF: FREQ: 2.480000000 GHz
 CENTER Freq 2.480000000 GHz
 #IF Gain: Low → #Atten: 30 dB

REF Offset 3 dB
 REF 20.00 dBm


Center 2.48 GHz
 #Res BW 30 kHz
 #VBW 100 kHz
 Span 3 MHz
 Sweep 3.2 ms

Occupied Bandwidth	Total Power	7.38 dBm
870.42 kHz		
Transmit Freq Error	-2.348 kHz	OBW Power
x dB Bandwidth	987.3 kHz	x dB
		-20.00 dB


Frequency
 Center Freq
 2.480000000 GHz
 CF Step
 300.000 kHz
 Ma
 Auto
 Freq Offset
 0 Hz

MSO STATUS


CH78

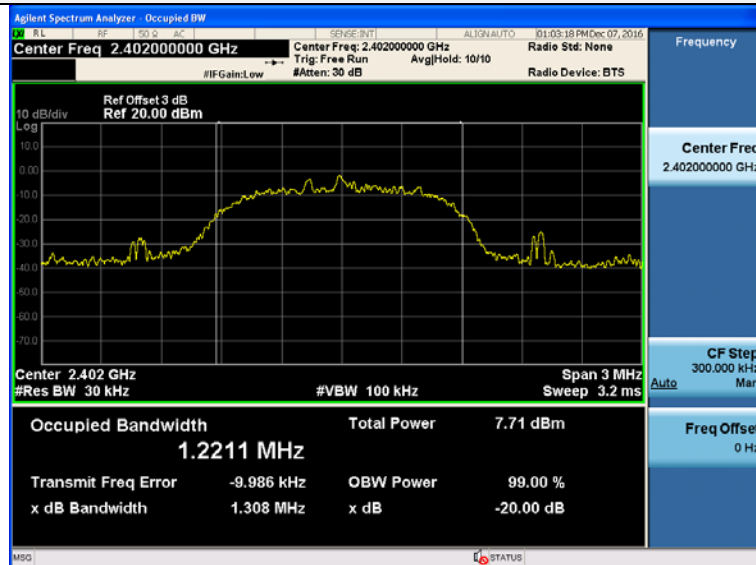$\pi/4$ DQPSK Modulation


CH00

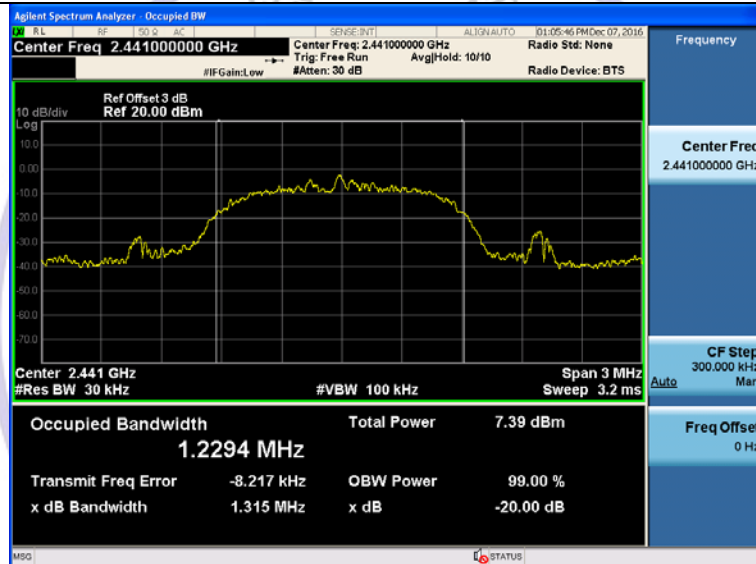

CH39

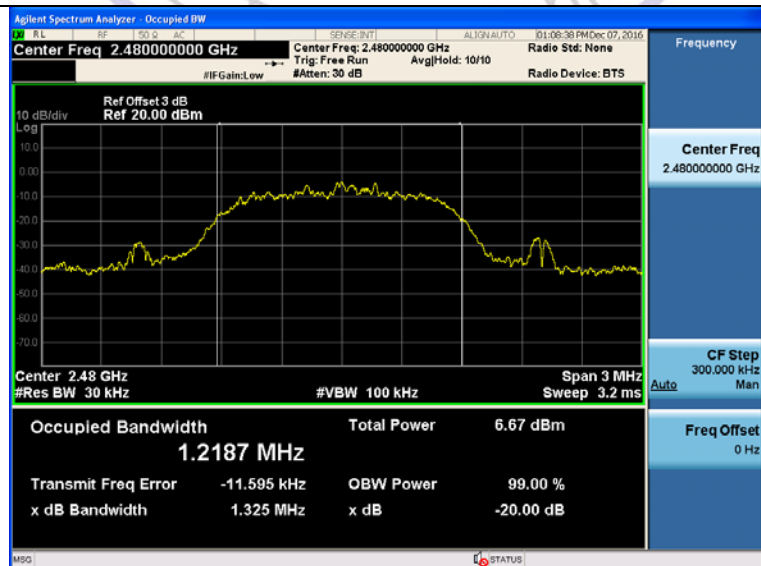

CH78

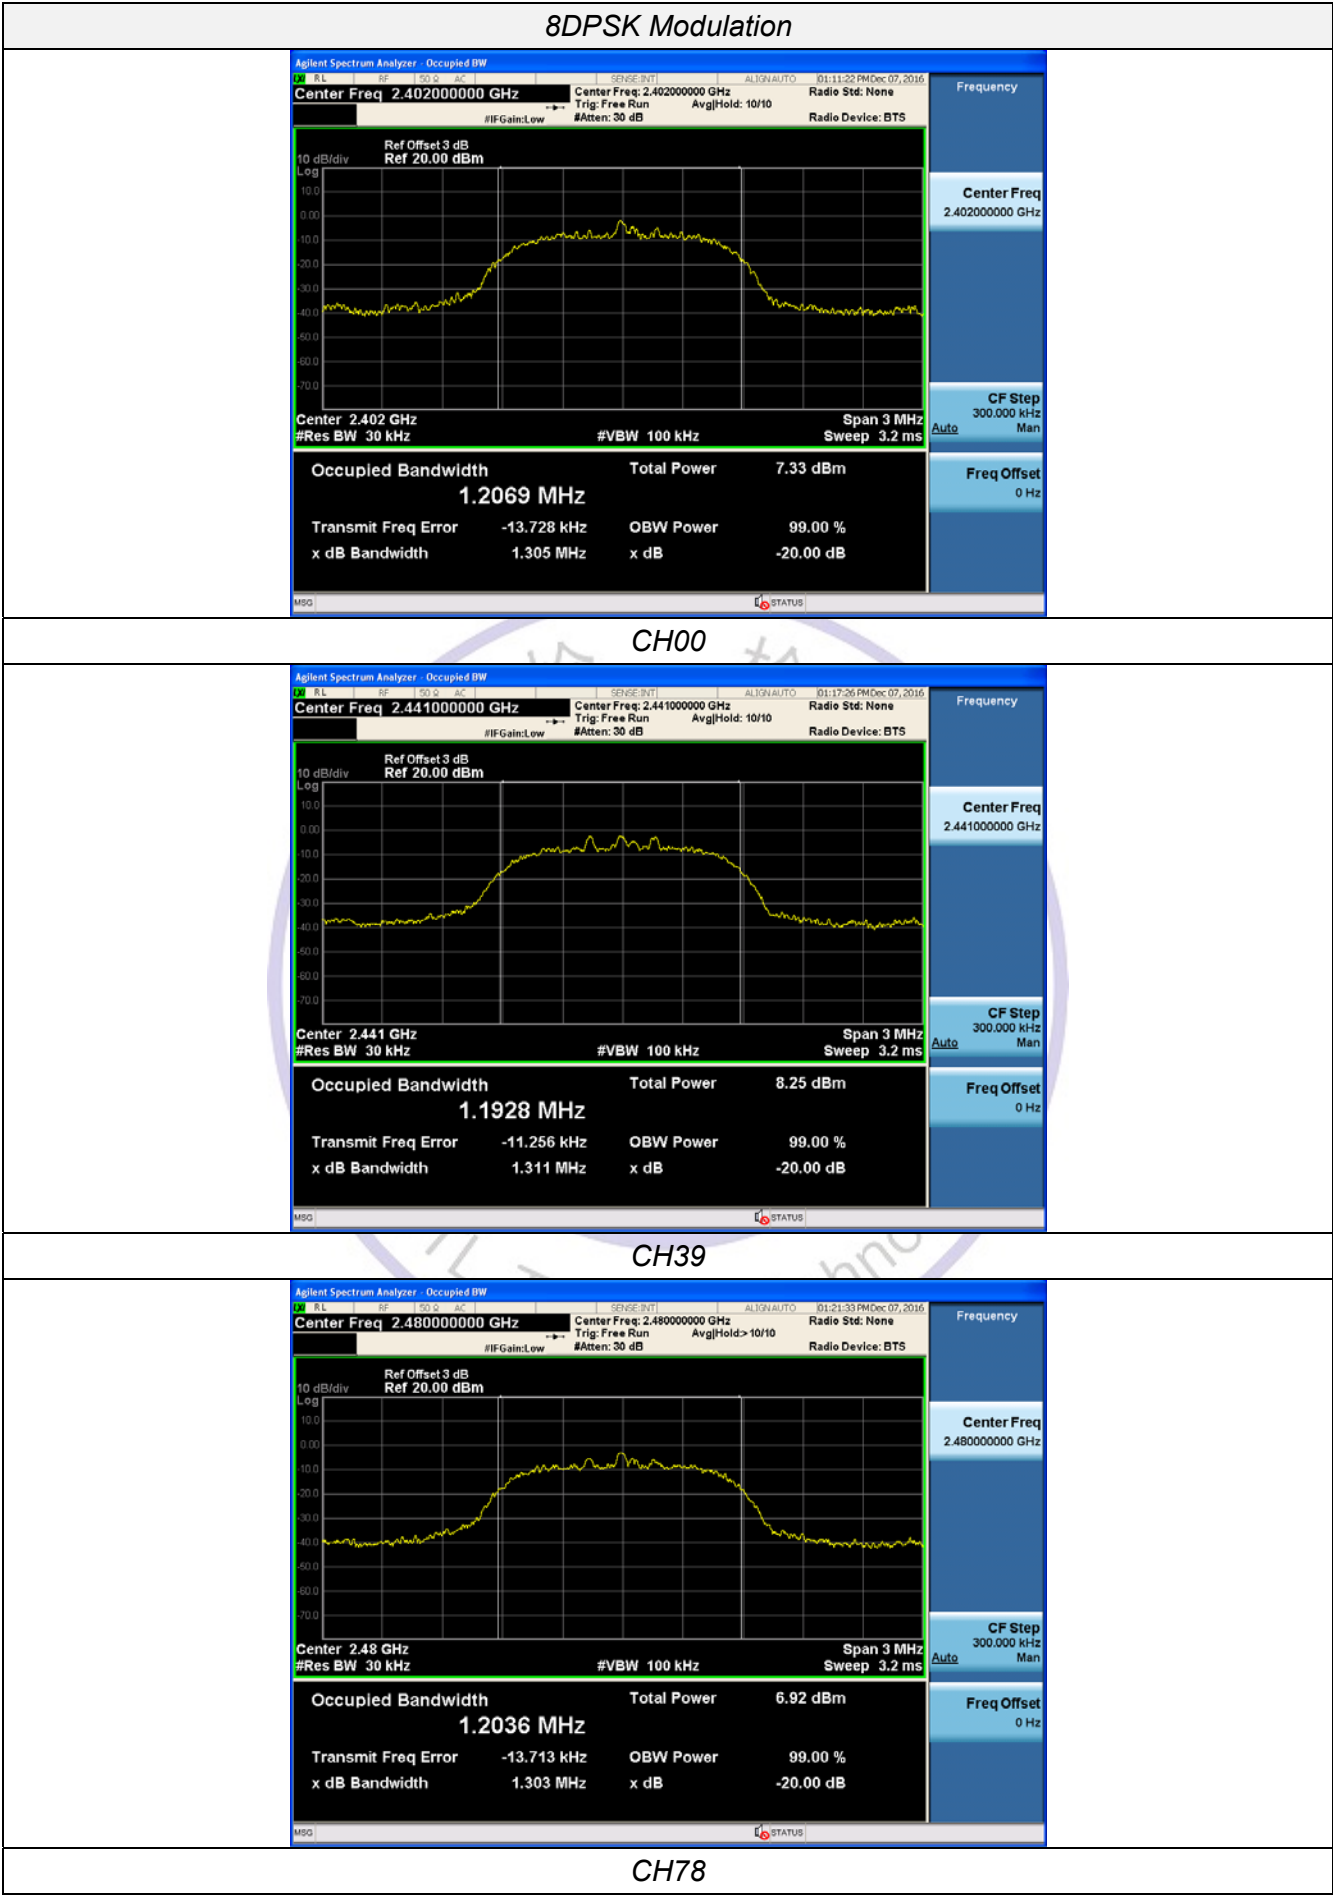

3.5. Frequency Separation

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

TEST CONFIGURATION



TEST RESULTS

Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH39	0.999	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
$\pi/4$ DQPSK	CH39	0.998	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
8DPSK	CH39	1.007	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			

Note:

We have tested all mode at high, middle and low channel, and recorded worst case at middle

Test plot as follows:

[illegible][illegible]

Agilent Spectrum Analyzer - Sweep SA

Center Freq 2.440500000 GHz

Ref Offset 3 dB
Ref 30.00 dBm

Delta Mk1 1.007 00 MHz
0.306 dB

Stop 2.441500 MHz

Sweep 1.07 ms (8001 pts)

Start 2.439500 MHz
#Res BW 100 kHz

#VBW 300 kHz

Trig: Free Run
IF Gain: Low
#Atten: 40 dB

#Avg Type: Pwr(RMS)
Avg/Hold: 100/100

DATE: 01-31-2016
TIME: 07:00:00

Trace 1: 2.440500000 GHz
Type: Pwr(RMS)
Det: P P P P P P

Auto

Frequency

Auto Tun

Center Freq
2.440500000 GHz

Start Freq
2.439500000 GHz

Stop Freq
2.441500000 GHz

CF Stop
200.000 kHz

Auto

Freq Offset
0 Hz

MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	f	1.007 00 MHz (Δ)	0.306 dB			
2	F	1	f	2.440 001 00 GHz	-15.16 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								

MSO

STATUS

3.6. Number of hopping frequency


Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

Test Configuration





Test Results


Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass
π/4DQPSK	79		
8DPSK	79		

Test plot as follows:

GFSK Modulation

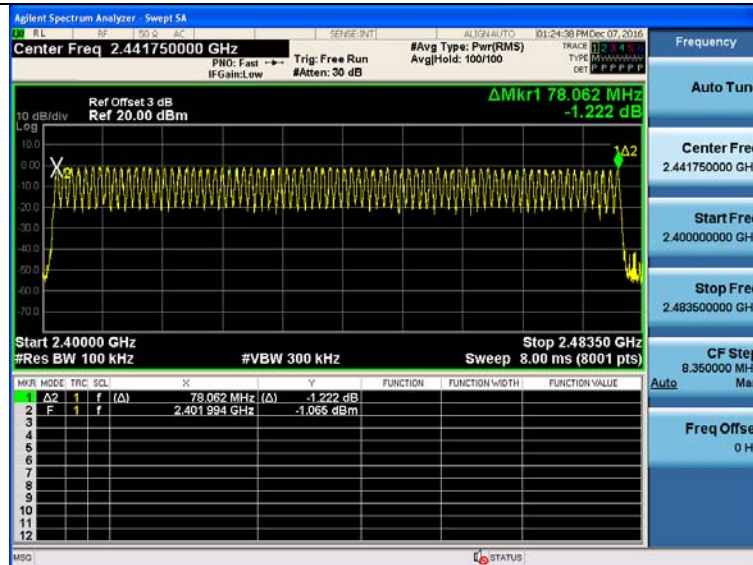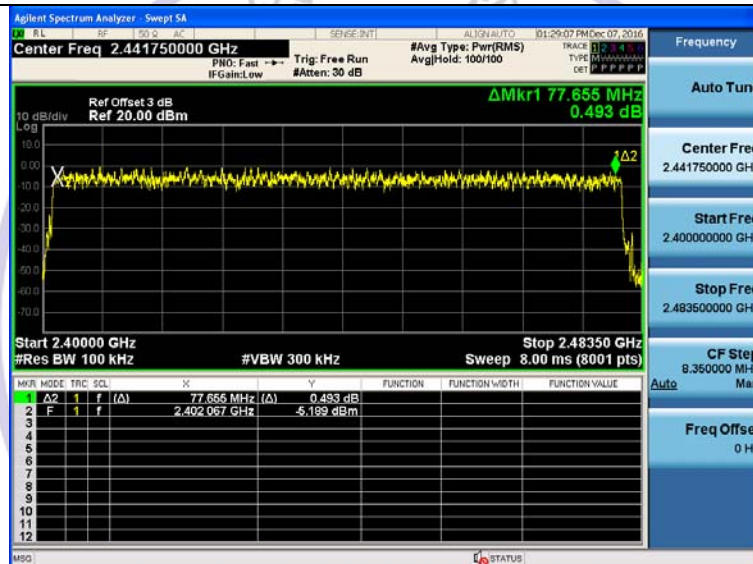 $\pi/4$ DQPSK Modulation

8DPSK Modulation

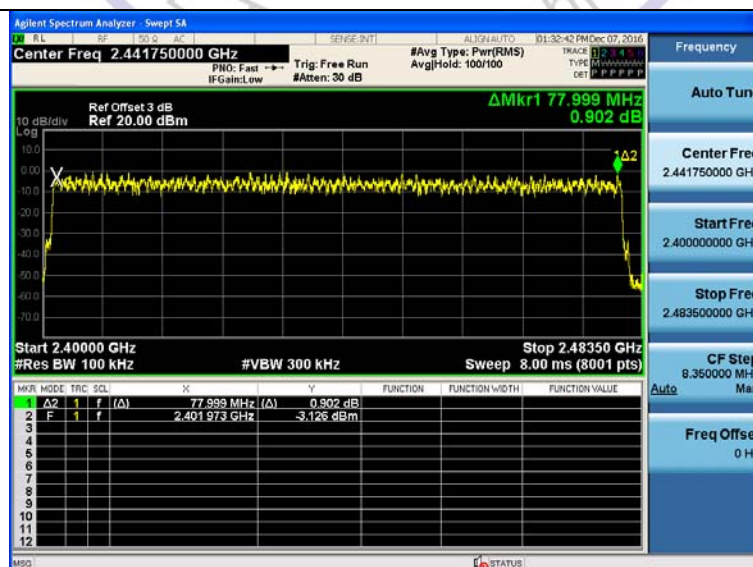

3.7. Time of Occupancy (Dwell Time)


Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

Test Configuration



Test Results


Modulation	Packet	Pulse time (ms)	Dwell time (s)	Limit (s)	Result
GFSK	DH1	0.403	0.129	0.40	Pass
	DH3	1.658	0.265		
	DH5	2.904	0.310		
π/4DQPSK	2-DH1	0.414	0.132	0.40	Pass
	2-DH3	1.665	0.266		
	2-DH5	2.913	0.311		
8DPSK	3-DH1	0.414	0.132	0.40	Pass
	3-DH3	1.662	0.266		
	3-DH5	2.913	0.311		

Note:


- We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
- $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 2 \div 79) \times 31.6 \text{ Second}$ for DH1, 2-DH1, 3-DH1
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 4 \div 79) \times 31.6 \text{ Second}$ for DH3, 2-DH3, 3-DH3
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 6 \div 79) \times 31.6 \text{ Second}$ for DH5, 2-DH5, 3-DH5

Test plot as follows:


GFSK Modulation

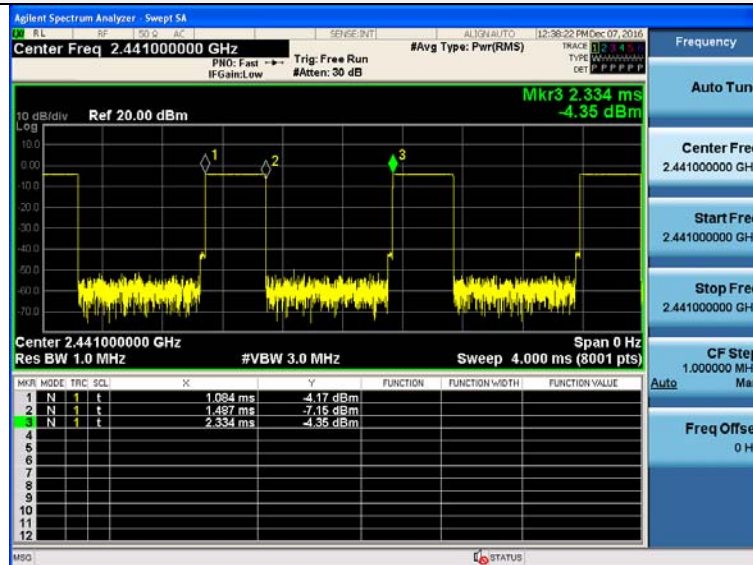


DH1

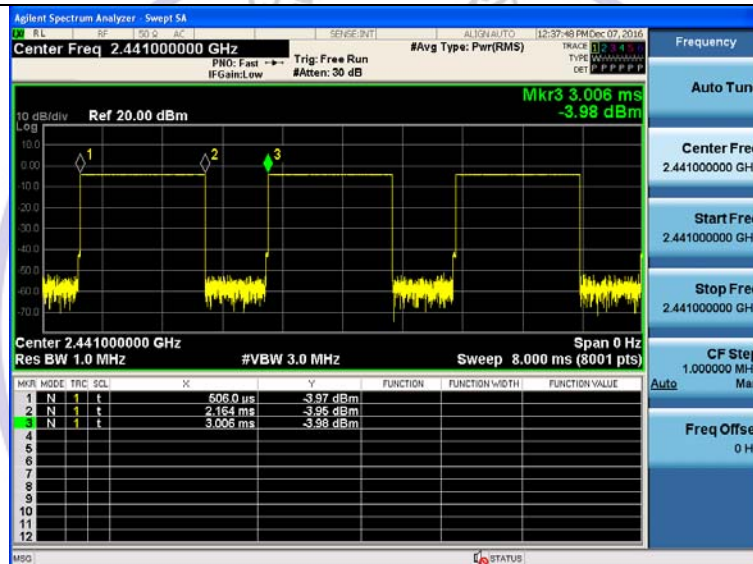


DH3

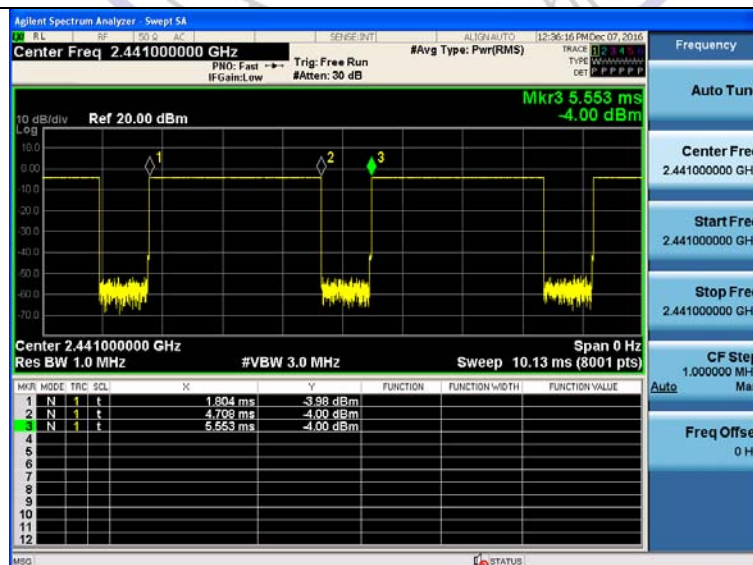


DH5

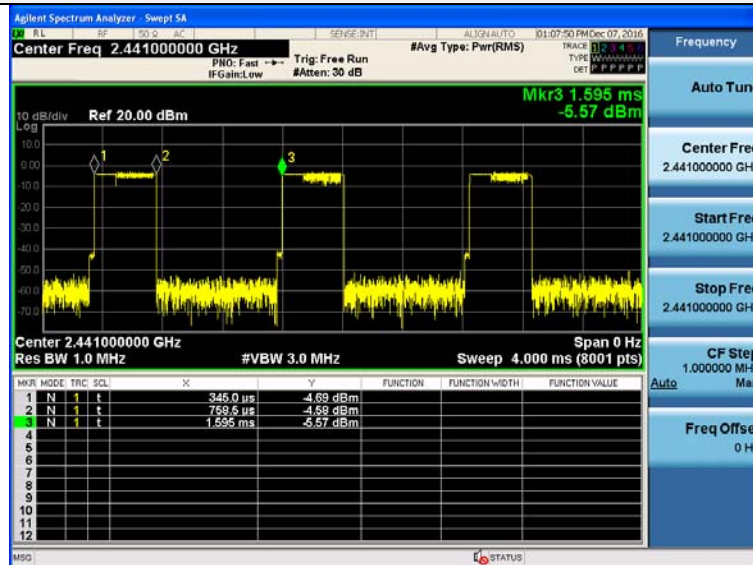$\pi/4$ DQPSK Modulation

2-DH1

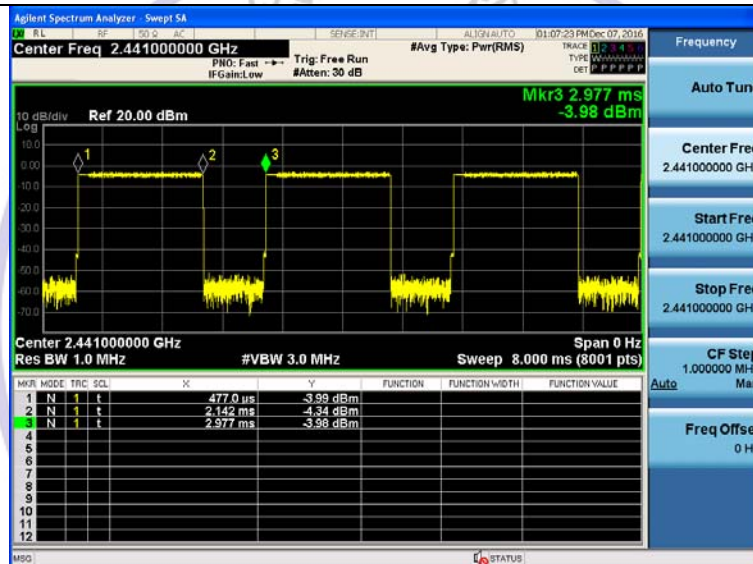


2-DH3

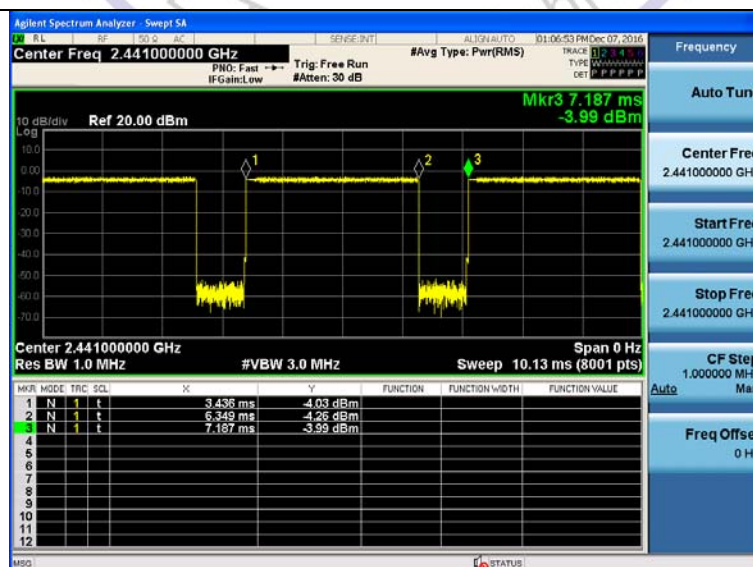


2-DH5


8DPSK Modulation

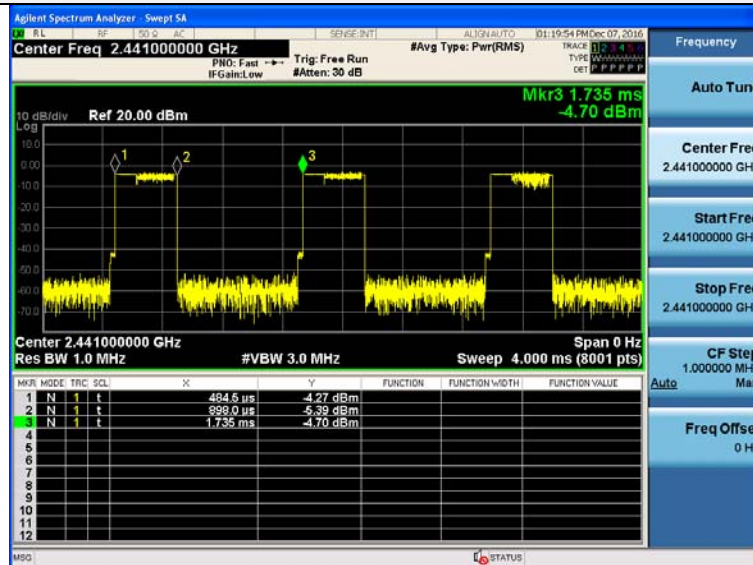

3-DH1

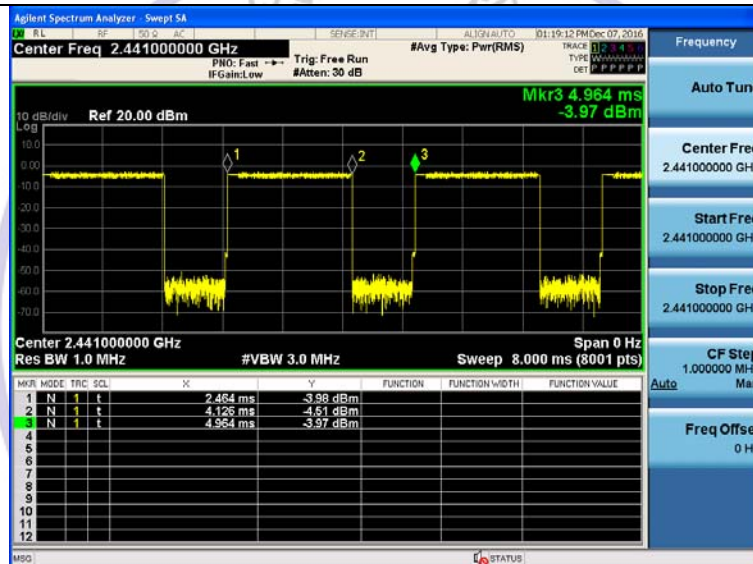

3-DH3

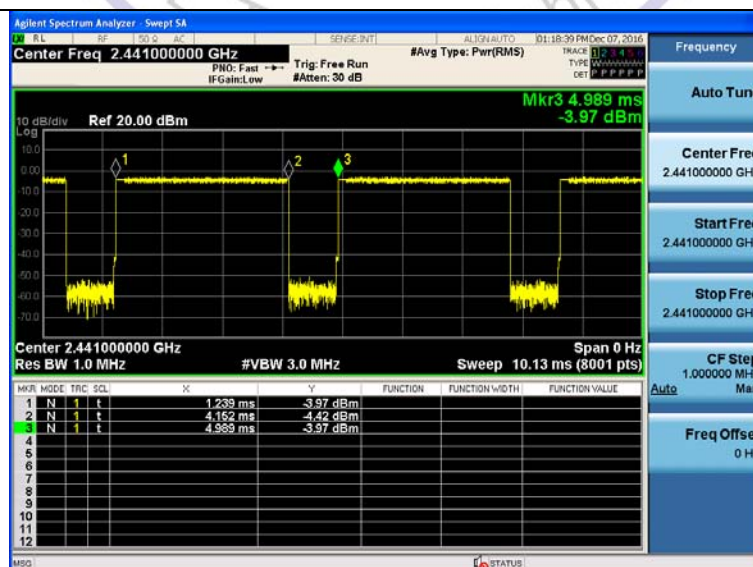

3-DH5

3.8. Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration



Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

We measured all conditions (DH1, DH3, DH5) and recorded worst case at DH5

Test plot as follows:


GFSK CH00




GFSK CH39



Reference

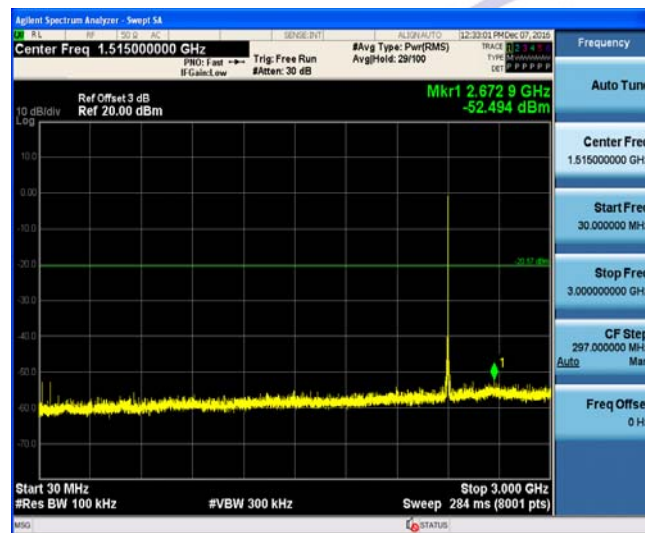

Reference

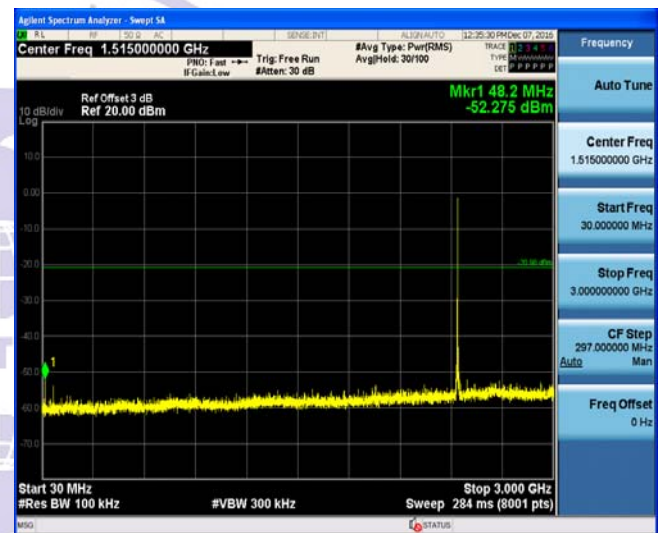

30MHz-3GHz



30MHz-3GHz




3GHz-25GHz

3GHz-25GHz


GFSK CH78

 $\pi/4$ DQPSK CH01


Reference

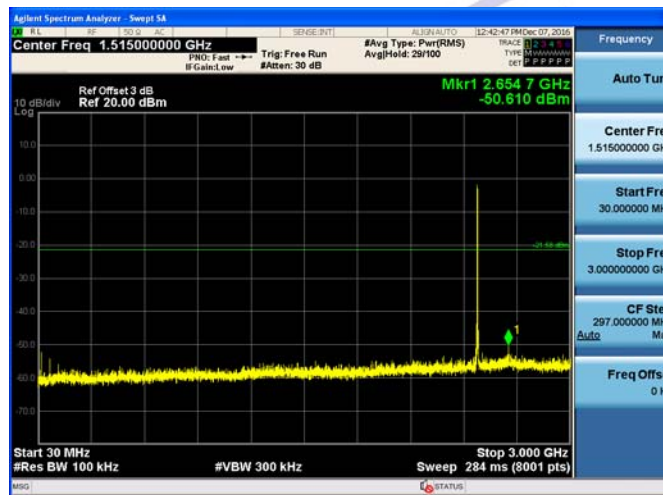


Reference

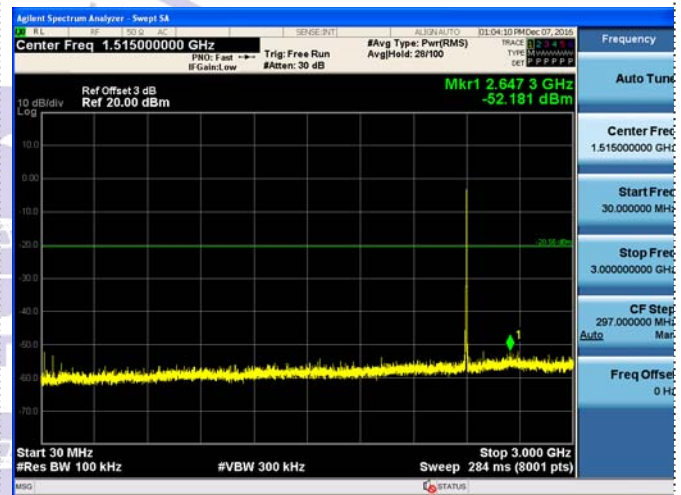

30MHz-3GHz

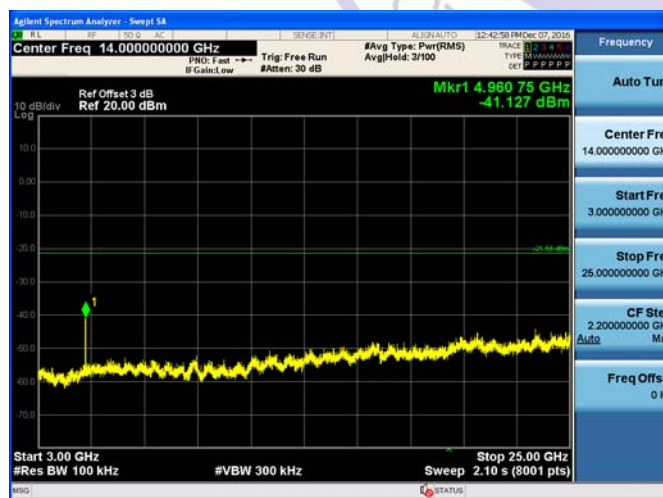

30MHz-3GHz

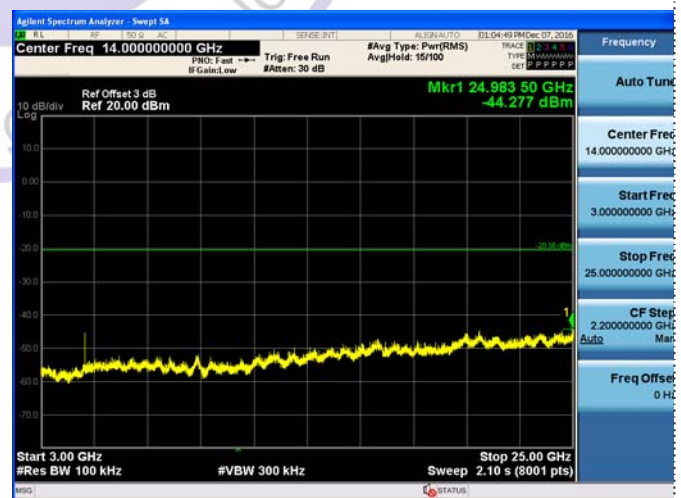



3GHz-25GHz

3GHz-25GHz

$\pi/4$ DQPSK CH39 $\pi/4$ DQPSK CH78



Reference

Reference

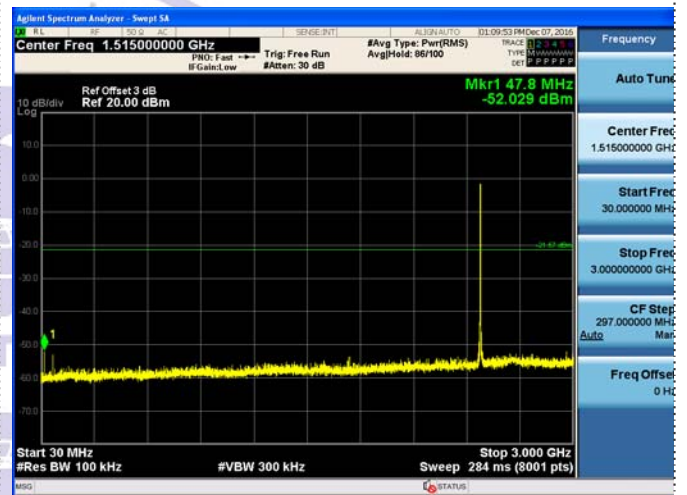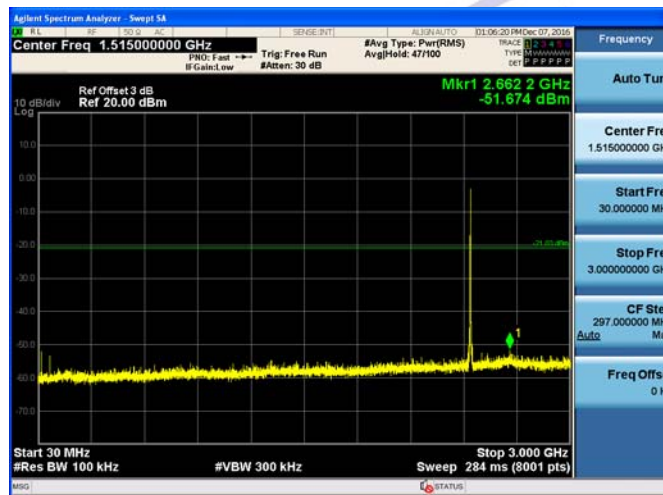

30MHz-3GHz

30MHz-3GHz

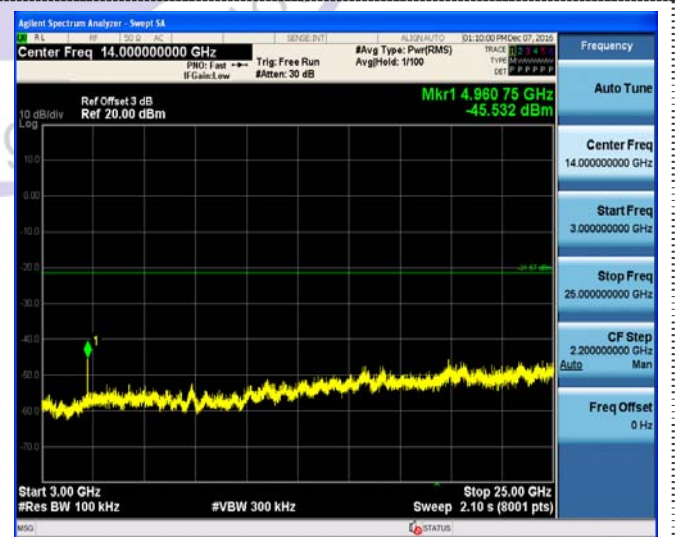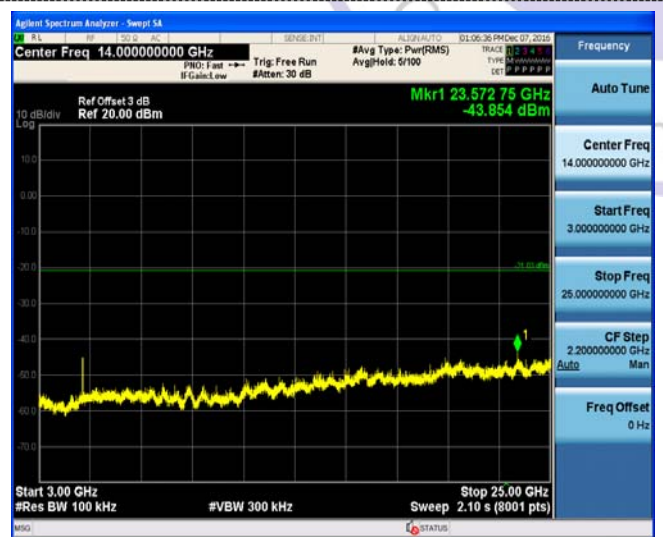

3GHz-25GHz

3GHz-25GHz


8DPSK CH00




8DPSK CH39



Reference

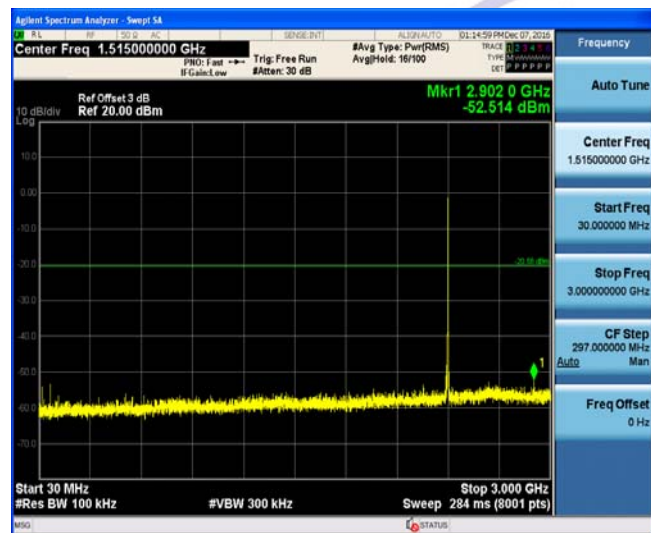

Reference

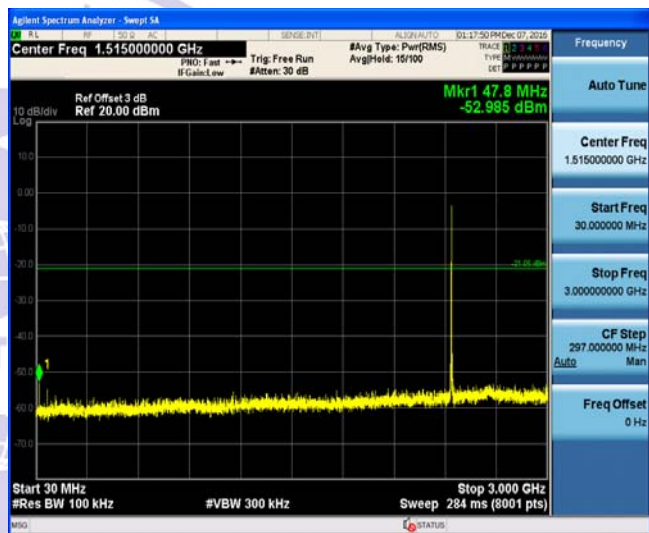

30MHz-3GHz



30MHz-3GHz




3GHz-25GHz

3GHz-25GHz

8DPSK CH78




Reference

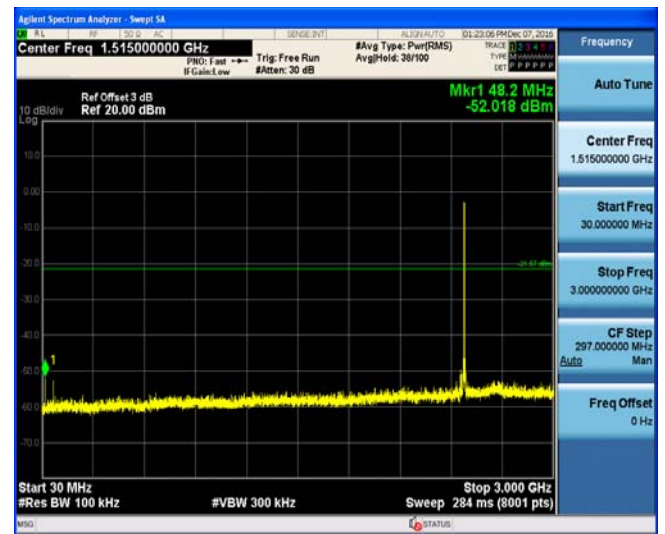


30MHz-3GHz



3GHz-25GHz

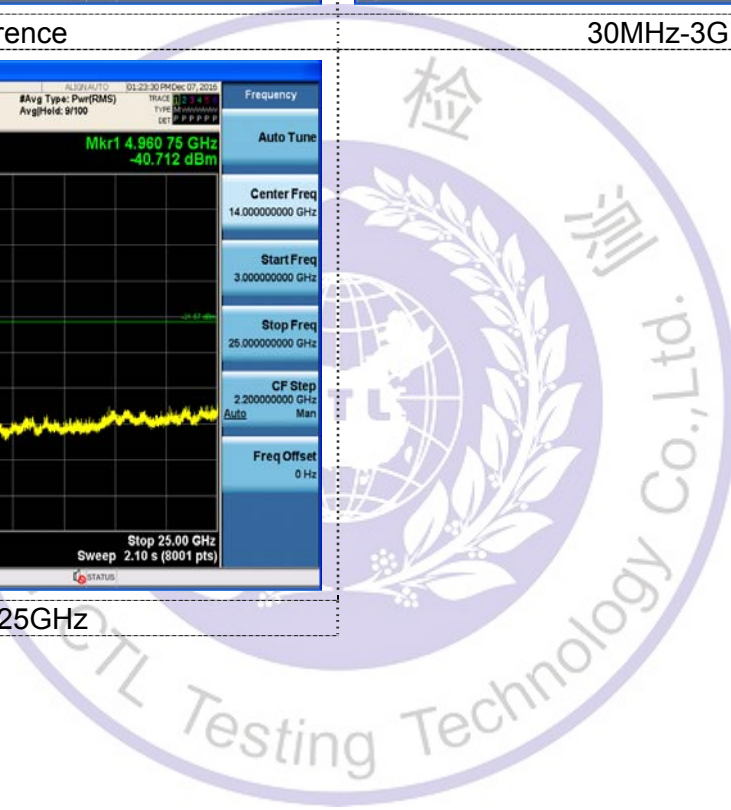

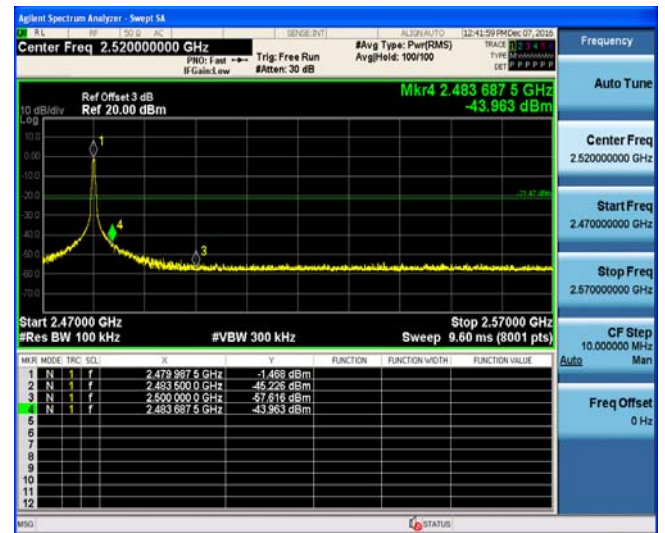Band-edge Measurements for RF Conducted Emissions:**GFSK**

Left Band edge hopping off

Right Band edge hopping off




Left Band edge hopping on

Right Band edge hopping on


 $\pi/4$ DQPSK

Left Band edge hopping off

Right Band edge hopping off

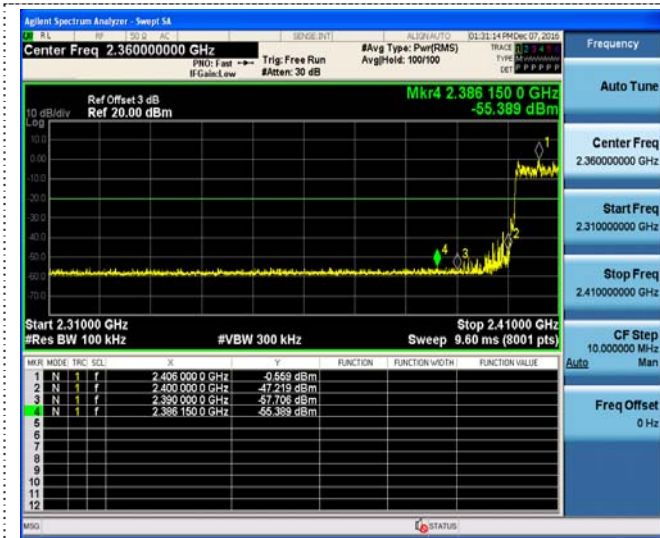

Left Band edge hopping on

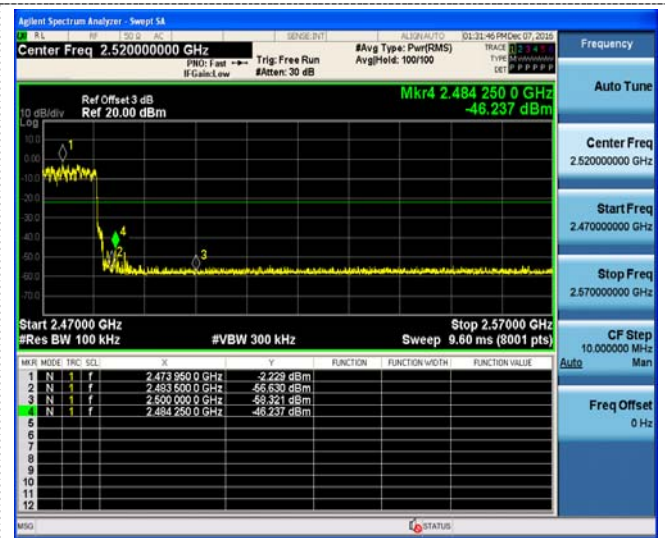


Right Band edge hopping on

8DPSK



Left Band edge hopping off

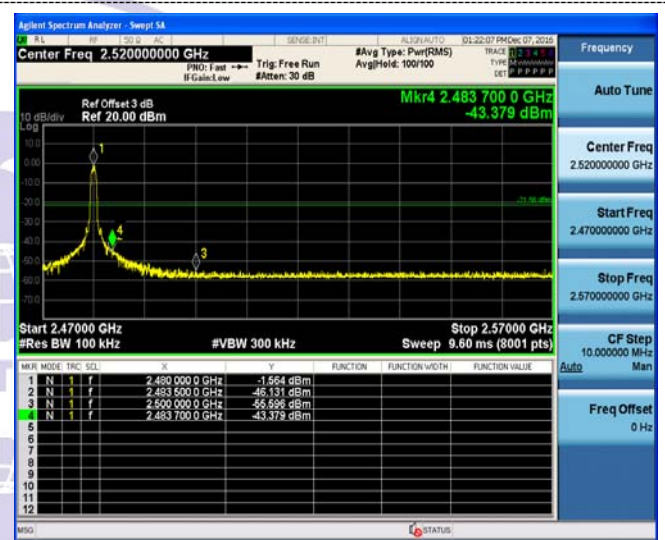

Right Band edge hopping off



Left Band edge hopping on



Right Band edge hopping on

3.9. Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

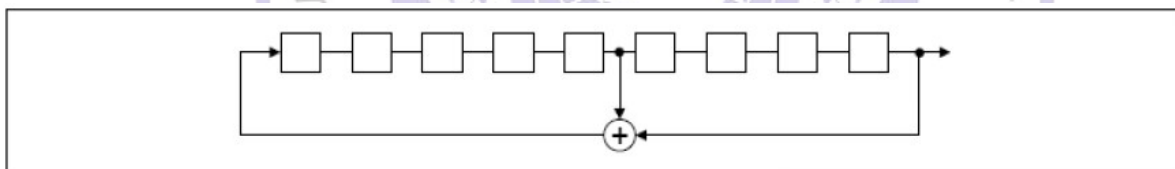

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

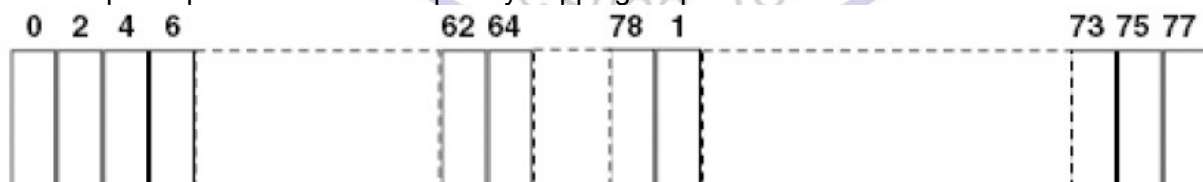

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

3.10. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The maximum gain of antenna was 0dBi.

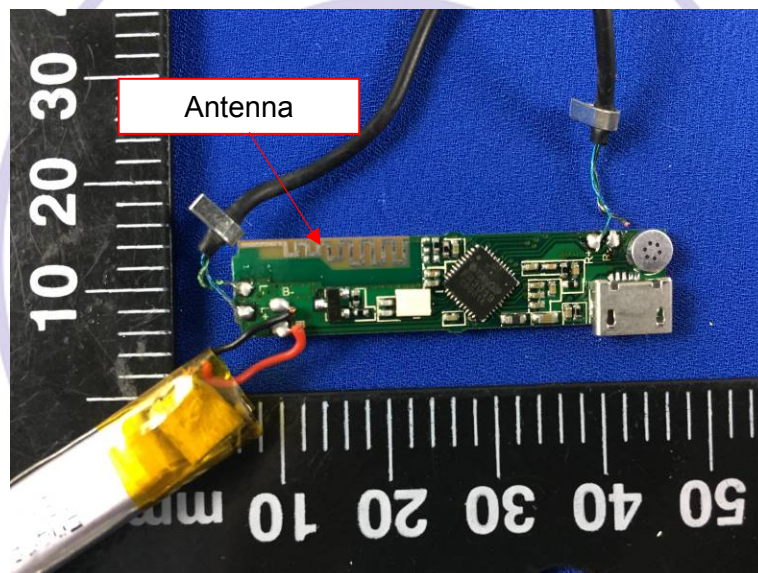




4. Test Setup Photos of the EUT

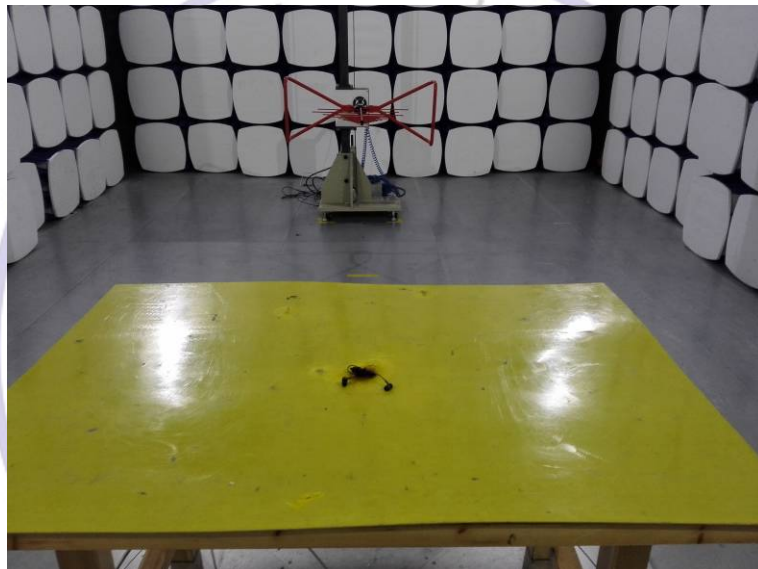


5. Photos of the EUT



External photos

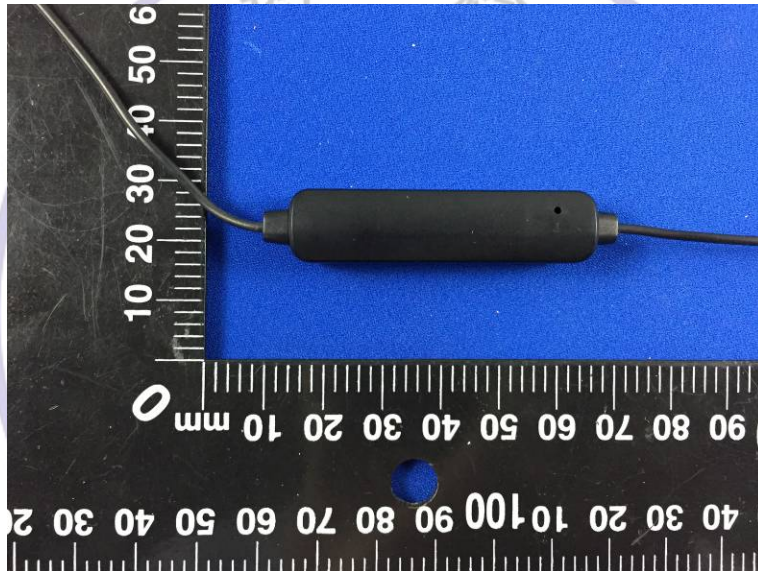

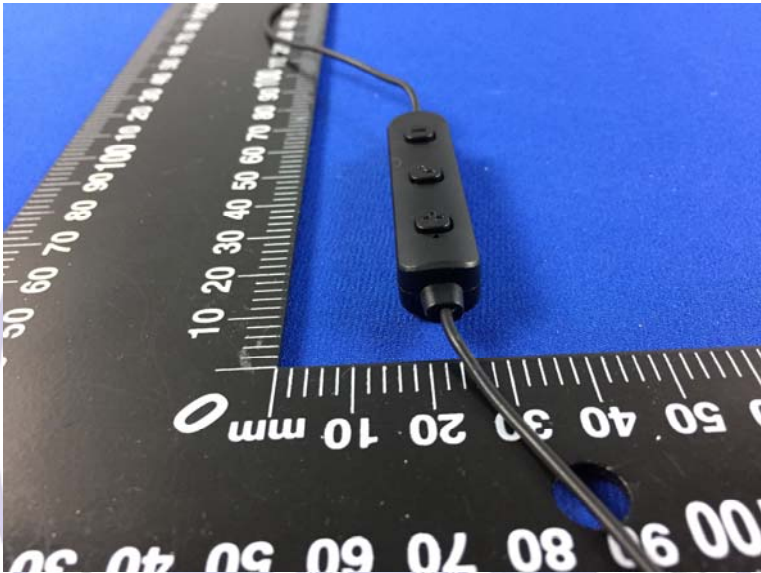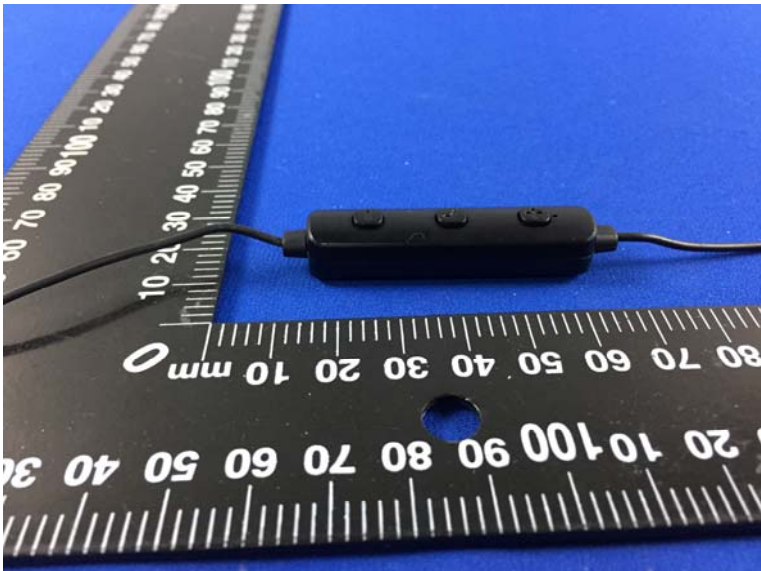


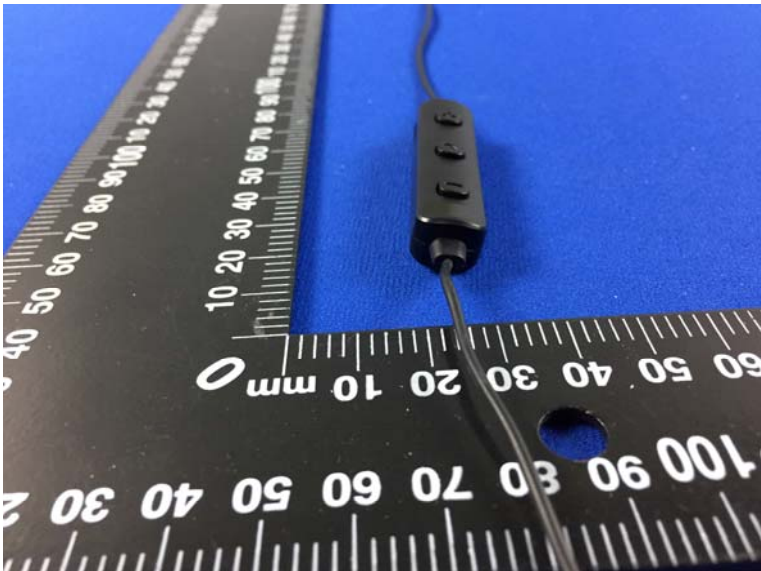


Internal photos

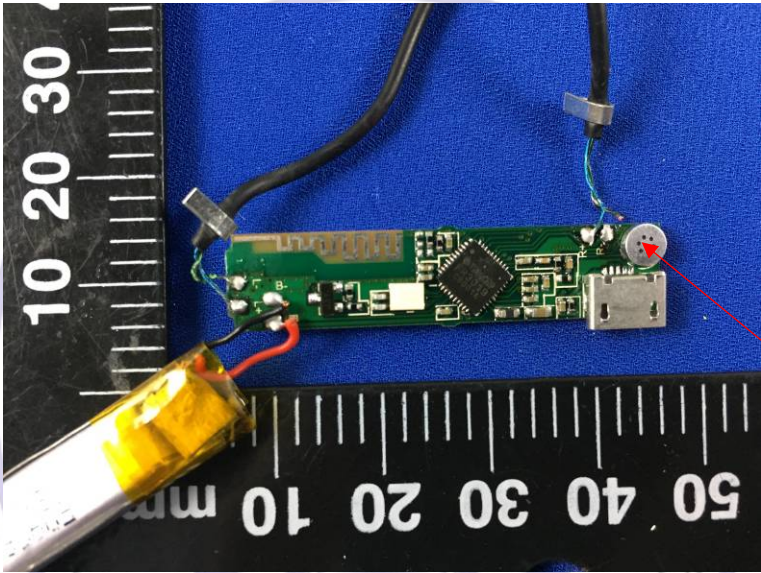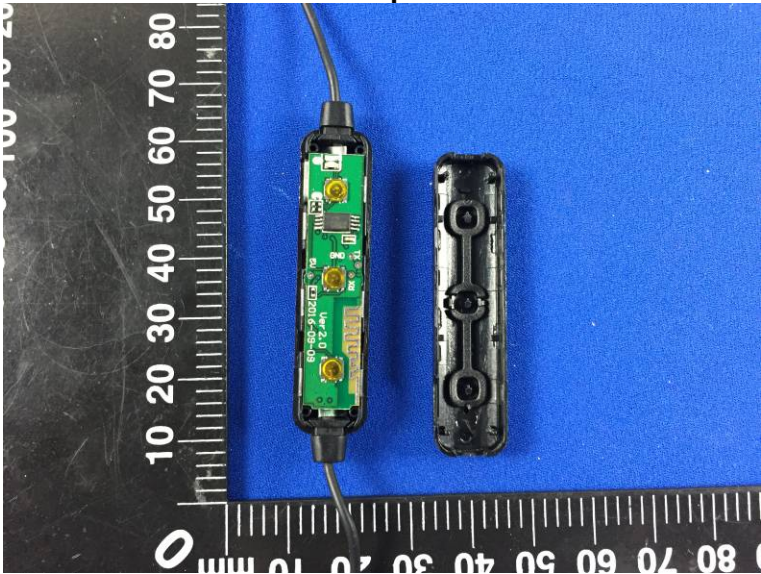

antenna

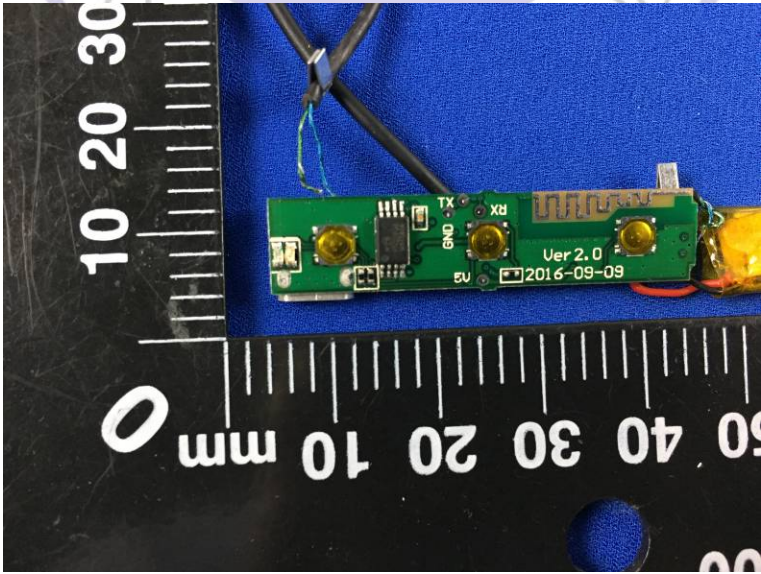

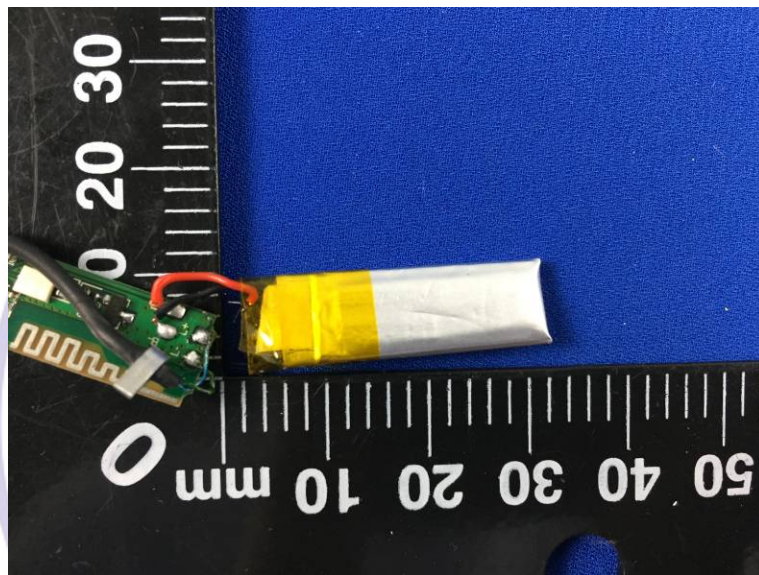

***** End of Report *****

