

FCC 47 CFR PART 15 SUBPART C CERTIFICATION TEST REPORT

For

Self-balancing Scooter

MODEL NUMBER: K3

FCC ID: 2AJ4RJOMOK3

REPORT NUMBER: 4788108581-3

ISSUE DATE: August 30, 2017

Prepared for

Dongguan Jomo Electronics Co., Ltd.
Block1, No.1 ChiTian East Road, BaiShigang Village, ChangPing Town, Dongguan,
GuangDong

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch Room 101, Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

> Tel: +86 769 33871725 Fax: +86 769 33871725 Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
	08/30/2017	Initial Issue	

REPORT NO: 4788108581-3 FCC ID: 2AJ4RJOMOK3

	Summary of Test Results					
Clause	Test Items	FCC Rules	Test Results			
1	6db DTS Bandwidth	FCC 15.247 (a) (2)	Complied			
2	Peak Conducted Power	FCC 15.247 (b) (3)	Complied			
3	Power Spectral Density	FCC 15.247 (e)	Complied			
4	Conducted Band edge And Spurious emission	FCC 15.247 (d)	Complied			
5	Radiated Band edges and Spurious emission	FCC 15.247 (d) FCC 15.209 FCC 15.205	Complied			
6	Conducted Emission Test For AC Power Port	FCC 15.207	Complied			
7	Antenna Requirement	FCC 15.203	Complied			

DATE: August 30, 2017

MODEL: K3

TABLE OF CONTENTS

DATE: August 30, 2017

MODEL: K3

1. AT	TTESTATION OF TEST RESULTS	6
2. TE	ST METHODOLOGY	7
3. FA	ACILITIES AND ACCREDITATION	7
4. C	ALIBRATION AND UNCERTAINTY	8
4.1.	MEASURING INSTRUMENT CALIBRATION	8
4.2.	MEASUREMENT UNCERTAINTY	8
5. EG	QUIPMENT UNDER TEST	9
5.1.	DESCRIPTION OF EUT	
5.2.	MAXIMUM OUTPUT POWER	9
5.3.	CHANNEL LIST	9
5.4.	TEST CHANNEL CONFIGURATION	10
5.5.	THE WORSE CASE POWER SETTING PARAMETER	10
5.6.	DESCRIPTION OF AVAILABLE ANTENNAS	10
5.7.	WORST-CASE CONFIGURATIONS	10
5.8.	TEST ENVIRONMENT	10
5.9.	DESCRIPTION OF TEST SETUP	11
5.10	. MEASURING INSTRUMENT AND SOFTWARE USED	12
6. ME	EASUREMENT METHODS	13
7. AN	NTENNA PORT TEST RESULTS	14
7.1.	ON TIME AND DUTY CYCLE	14
7.2.	6 dB DTS BANDWIDTH	15
7.3.	PEAK CONDUCTED OUTPUT POWER	18
7.4.	POWER SPECTRAL DENSITY	21
7.5.	CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	24
8. RA	ADIATED TEST RESULTS	28
8.1.	RESTRICTED BANDEDGE	33
8.2.	SPURIOUS EMISSIONS (1~18GHz)	37
8.3.	SPURIOUS EMISSIONS 18G ~ 26GHz	43
8.4.	SPURIOUS EMISSIONS 30M ~ 1 GHz	45
8.5.	SPURIOUS EMISSIONS BELOW 30M	47
9. AC	POWER LINE CONDUCTED EMISSIONS	51

10.	ANTENNA REQUIREMENTS	54
FCC II	D: 2AJ4RJOMOK3	MODEL: K3
REPO	RT NO: 4788108581-3	DATE: August 30, 2017

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Dongguan Jomo Electronics Co., Ltd.

Address: Block1, No.1 ChiTian East Road, BaiShigang Village, ChangPing

Town, Dongguan, GuangDong

Manufacturer Information

Company Name: Dongguan Jomo Electronics Co., Ltd.

Address: Block1, No.1 ChiTian East Road, BaiShigang Village, ChangPing

Town, Dongguan, GuangDong

EUT Description

Product Name Self-balancing Scooter

Brand Name

KOOWHEEL

Model Name K3

Date Tested August 21, 2017 ~ August 29, 2017

APPLICABLE STANDARDS

STANDARD TEST RESULTS

Shanny lier

CFR 47 Part 15 Subpart C PASS

Tested By: Checked By:

Kebo Zhang Shawn Wen

Engineer Laboratory Leader

Approved By:

kelo. Thurs

Stephen Guo

Laboratory Manager

Sephenbus

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB414788 D01 Radiated Test Site v01,ANSI C63.10-2013, 558074 D01 DTS Meas Guidance v04, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

Test Location	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
Address	Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
Accreditation Certificate	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. The Certificate Registration Number is 4102.01. UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The Designation Number is CN1187. UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. EMC Laboratory has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.

Note: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.90dB
Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.52dB
Uncertainty for Radiation Emission test	5.04dB(1-6GHz)
(1GHz to 26GHz)(include Fundamental	5.30dB (6GHz-18Gz)
emission)	5.23dB (18GHz-26Gz)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Equipment	Self-balancing Scooter		
Model Name	K3		
	Operation Frequency	2402 MHz ~ 2480 MHz	
Product Description	Modulation Type		Data Rate
	GFSK		1Mbps
Adapter	Input:100-240VAC,50/60Hz,1.5A Output: 29.4V/1550mA		
Battery	29.4V,4300mAh		
Bluetooth Version	BT 4.0		

5.2. MAXIMUM OUTPUT POWER

Bluetooth Mode	Frequency (MHz)	Channel Number	Max Output Power (dBm)
BLE	2402-2480	0-39[40]	-1.912

5.3. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460		
8	2418	19	2440	30	2462		
9	2420	20	2442	31	2464		
10	2422	21	2444	32	2468		

5.4. TEST CHANNEL CONFIGURATION

Test Mode Test Channel		Frequency	
GFSK	CH 00, CH 19, CH 39	2402MHz, 2440MHz, 2480MHz	

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software SmartRF Studio 7				
Modulation Type	Transmit Antenna Test Channel			
Woddiation Type	Number	CH 00	CH 19	CH 39
GFSK	1	0	0	0

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2402-2480	PCB Antenna	1.6

Test Mode	Transmit and Receive Mode	Description
GFSK	⊠1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

5.7. WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)	
BLE	DTS	GFSK	1Mbit/s	

5.8. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests			
Relative Humidity	55 ~ 65%			
Atmospheric Pressure:	1025Pa			
Temperature	TN	23 ~ 28°C		
	VL	N/A		
Voltage :	VN	DC 29.4V/AC 120V 60Hz		
	VH	N/A		

Note: VL= Lower Extreme Test Voltage

VN= Nominal Voltage, AC 120V from Adapter, DC 29.4V from battery.

VH= Upper Extreme Test Voltage

TN= Normal Temperature

5.9. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	ThinkPad	T460S	SL10K24796 JS

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	N/A	N/A	N/A	N/A	N/A


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	CC debugger	N/A	N/A	N/A

TEST SETUP

The EUT can work in an engineer mode with a software through a Laptop.

SETUP DIAGRAM FOR TEST

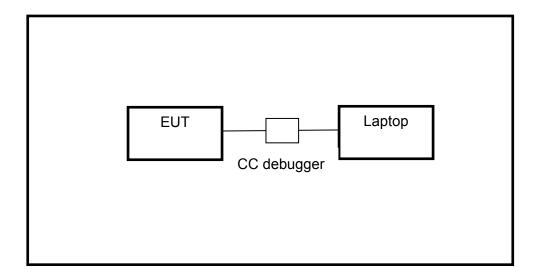

REPORT NO: 4788108581-3 FCC ID: 2AJ4RJOMOK3

5.10. MEASURING INSTRUMENT AND SOFTWARE USED

DATE: August 30, 2017

MODEL: K3

5.10. MEASURING INSTRUMENT AND SOFTWARE USED									
Conducted Emissions									
			Insti	rum	ent				
Used	Equipment	Manufacturer	Мо	Model No.			al No.	Last Cal.	Next Cal.
	EMI Test Receiver	R&S	E	ESR3			1961	Dec.20, 2016	Dec.19, 2017
V	Two-Line V- Network	R&S	EI	NV2	216	101	1983	Dec.20, 2016	Dec.19, 2017
V	Artificial Mains Networks	Schwarzbeck	NSI	LK	8126	812	6465	Feb.10, 2017	Feb.10, 2018
			Sof	ftwa	are				
Used	Des	cription			Manu	ıfactu	irer	Name	Version
$\overline{\checkmark}$	Test Software for C	Conducted distu	rbanc	е	F	arad		EZ-EMC	Ver. UL-3A1
		Rad	iated	En	nissio	ns			
			Insti	rum	ent	1			
Used	Equipment	Manufacturer	Мо	del	No.		al No.	Last Cal.	Next Cal.
V	MXE EMI Receiver	KESIGHT	N	903	88A		6400 36	Feb. 24, 2017	Feb. 24, 2018
V	Hybrid Log Periodic Antenna	TDK	HLF	P-3(003C		960	Jan.09, 2016	Jan.09, 2019
V	Preamplifier	HP	8	8447	7D		A090 99	Feb. 13, 2017	Feb. 13, 2018
V	EMI Measurement Receiver	R&S	Ш	SR	26	101	1377	Dec. 20, 2016	Dec. 20, 2017
V	Horn Antenna	TDK	HR	N-C	0118	130	939	Jan. 09, 2016	Jan. 09, 2019
V	High Gain Horn Antenna	Schwarzbeck	BBI	HA-	9170		91	Jan.06, 2016	Jan.06, 2019
V	Preamplifier	TDK	PA-	02-	0118	00	-305- 066	Jan. 14, 2017	Jan. 14, 2018
V	Preamplifier	TDK	P	A-0	2-2		-307- 003	Dec. 20, 2016	Dec. 20, 2017
V	Loop antenna	Schwarzbeck	1	519	9B	00	800	Mar. 26, 2016	Mar. 26, 2019
			Sof	ftwa	are				
Used	Descr	iption		Ма	nufact	urer Name		Name	Version
V	Test Software for Ra	adiated disturba	nce		Farac	I		EZ-EMC	Ver. UL-3A1
Other instruments									
Used	Equipment	Manufacturer	Model No.		No.		al No.	Last Cal.	Next Cal.
V	Spectrum Analyzer	Keysight	N9030A		5	5410 12	Dec. 20, 2016	Dec. 20, 2017	
V	Power Meter	Keysight	N	903	31A	0	5416 24	Feb. 13, 2017	Feb. 13, 2018
V	Power Sensor	Keysight	N	932	23A		5440 13	Feb. 13, 2017	Feb. 13, 2018

Page 12 of 54

6. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6 dB Bandwidth	KDB 558074 D01 DTS Meas Guidance v04	8.0
2	Peak Output Power	KDB 558074 D01 DTS Meas Guidance v04	9.1.1
3	Power Spectral Density	KDB 558074 D01 DTS Meas Guidance v04	10.2
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 DTS Meas Guidance v04	11.0
5	Out-of-band emissions in restricted bands	KDB 558074 D01 DTS Meas Guidance v04	12.1
6	Band-edge	KDB 558074 D01 DTS Meas Guidance v04	13.3.2
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	7.3

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP



RESULTS


Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (KHz)
BLE	100	100	1	100	0	0.01

Note: Duty Cycle Correction Factor=10log(1/x).

Where: x is Duty Cycle(Linear)

Where: T is On Time (transmit duration)

ON TIME AND DUTY CYCLE MID CH

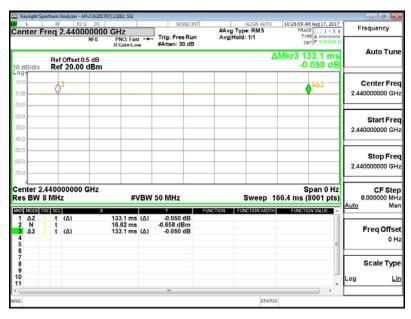

7.2. 6 dB DTS BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C RSS-247 ISSUE 2					
Section	Limit	Frequency Range (MHz)			
FCC 15.247(a)(2)	6dB Bandwidth	>= 500KHz	2400-2483.5		


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100K
VBW	≥3 × RBW
Trace	Max hold
Sweep	Auto couple


Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


TEST SETUP




RESULTS

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2402	0.650	500	Pass
Middle	2440	0.656	500	Pass
High	2480	0.670	500	Pass

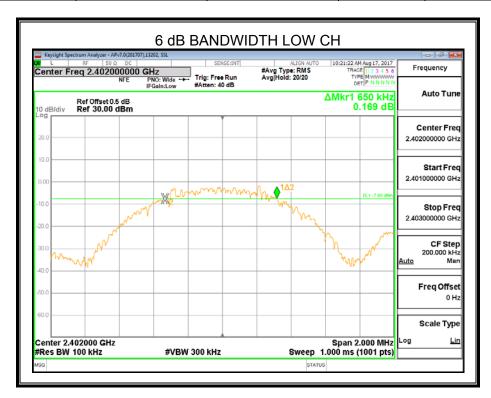

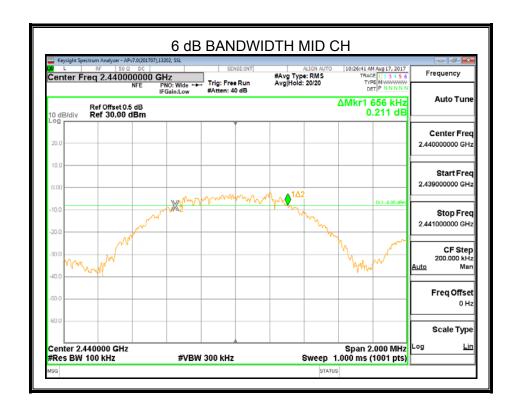

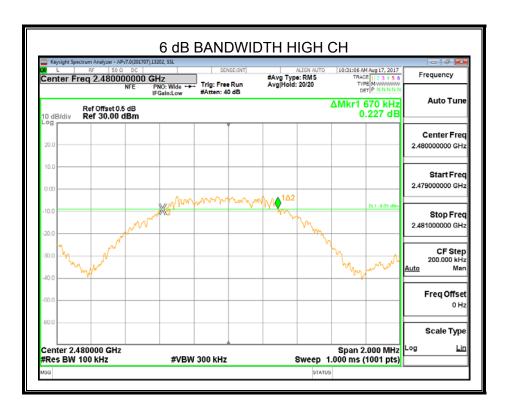

7.3. PEAK CONDUCTED OUTPUT POWER

LIMITS

FCC Part15 (15.247) Subpart C RSS-247 ISSUE 2				
Section Test Item Limit Frequency Range (MHz)				
FCC 15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	

DATE: August 30, 2017

MODEL: K3


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	≥DTS bandwidth(e.g. 1 MHz for BLE)
VBW	≥3 × RBW
Span	3 x RBW
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use peak marker function to determine the peak amplitude level.

TEST SETUP



RESULTS

Test Channel Frequency (MHz)		Maximum Conducted Output Power(PK)	LIMIT
		(dBm)	dBm
CH00	2402	-1.912	30
CH19	2440	-2.300	30
CH39	2480	-2.779	30

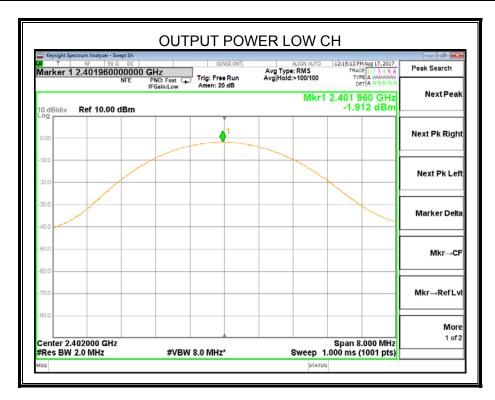

REPORT NO: 4788108581-3 FCC ID: 2AJ4RJOMOK3

> Center 2.440000 GHz #Res BW 2.0 MHz

OUTPUT POWER MID CH

| Keysight Spectrum Analyzer - Swept SA | School | Sc

#VBW 8.0 MHz*


DATE: August 30, 2017

Mkr→RefLvl

Span 8.000 MHz Sweep 1.000 ms (1001 pts)

STATUS

More 1 of 2 MODEL: K3

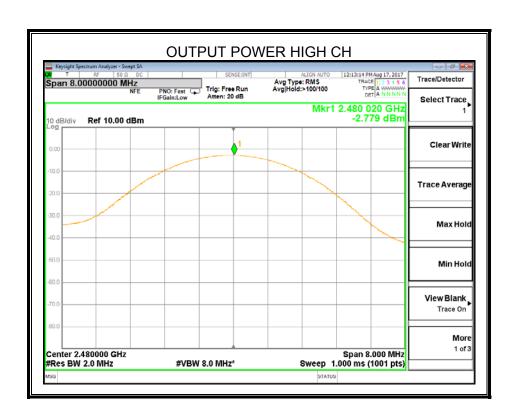

7.4. POWER SPECTRAL DENSITY

LIMITS

FCC Part15 (15.247) Subpart C RSS-247 ISSUE 2				
Section Test Item Limit Frequency Range (MHz)				
FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5	

DATE: August 30, 2017

MODEL: K3

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	3 kHz ≤ RBW ≤ 100 kHz
VBW	≥3 × RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.


If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


TEST SETUP




RESULTS

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402 MHz	-14.040	8	PASS
2440 MHz	-12.998	8	PASS
2480 MHz	-14.090	8	PASS

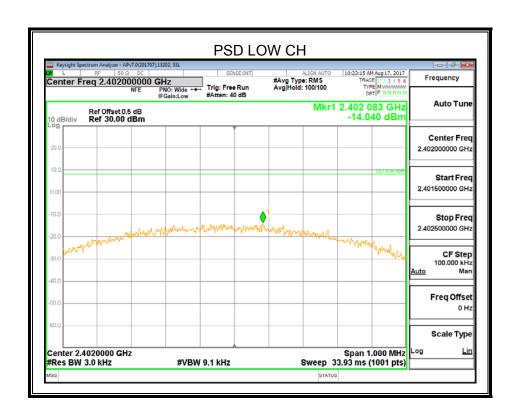

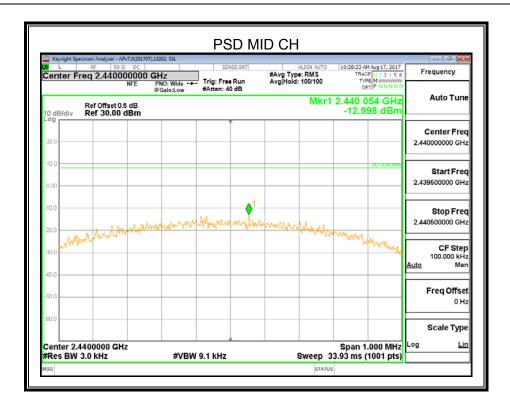

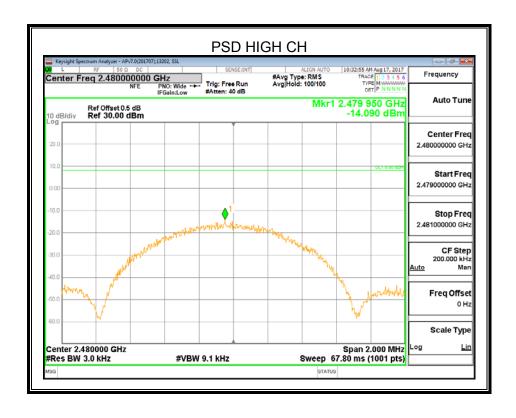

7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

DATE: August 30, 2017

MODEL: K3

LIMITS

FCC Part15 (15.247) Subpart C RSS-247 ISSUE 2				
Section	Test Item Limit			
FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power		

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100K
VBW	≥3 × RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Use the peak marker function to determine the maximum PSD level.

2090	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100K
VBW	≥3 × RBW
measurement points	≥span/RBW
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.


TEST SETUP




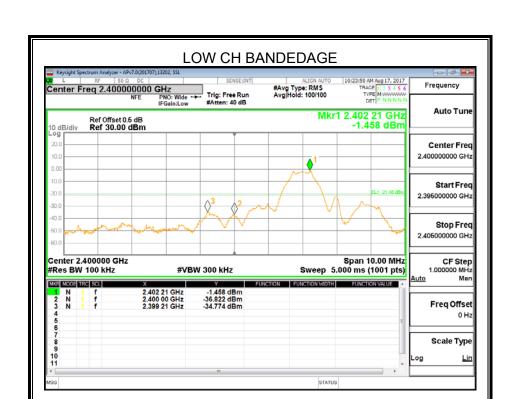



DATE: August 30, 2017


MODEL: K3

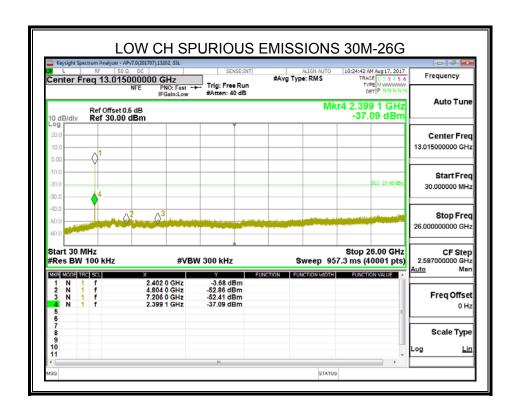

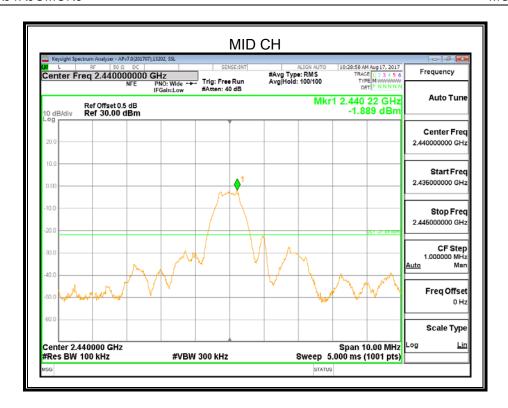

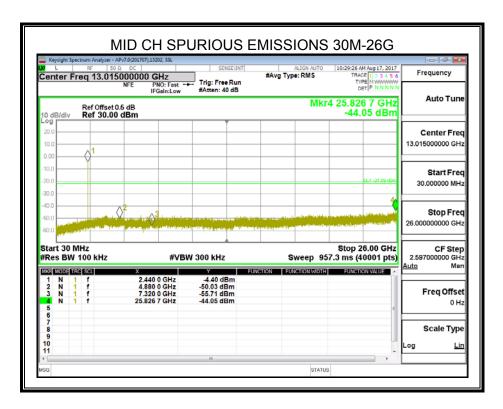

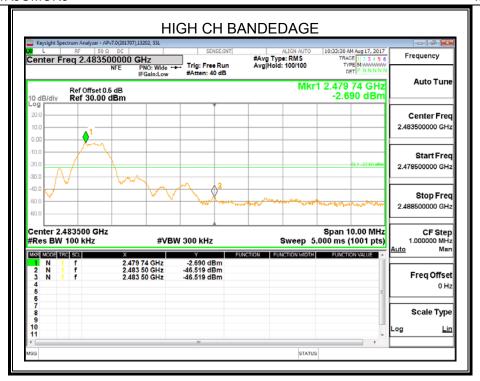

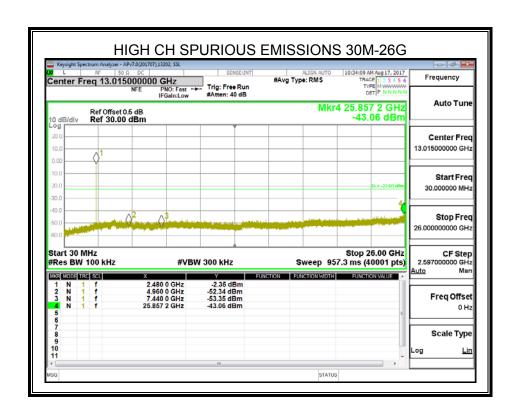

8. RADIATED TEST RESULTS

LIMITS

Please refer to FCC §15.205 and §15.209

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

	(
Frequency	Field Strength	Measurement Distance			
(MHz)	(microvolts/meter)	(meters)			
0.009~0.490	2400/F(KHz)	300			
0.490~1.705	24000/F(KHz)	30			
1.705~30.0	30	30			
30~88	100	3			
88~216	150	3			
216~960	200	3			
960~1000	500	3			

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)		
Frequency (MHZ)	Peak	Average	
Above 1000	74	54	


Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: 1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. 2 Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

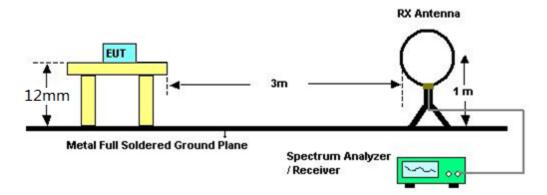

DATE: August 30, 2017


MODEL: K3

The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013
- 2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 12mm above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
- 6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode remeasured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
- 7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G and above 30MHz

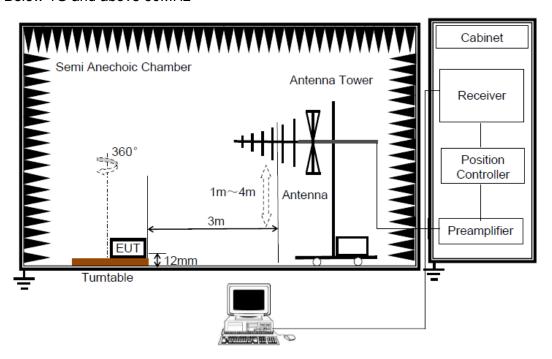

DATE: August 30, 2017


MODEL: K3

The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 12mm above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- 6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

Above 1G

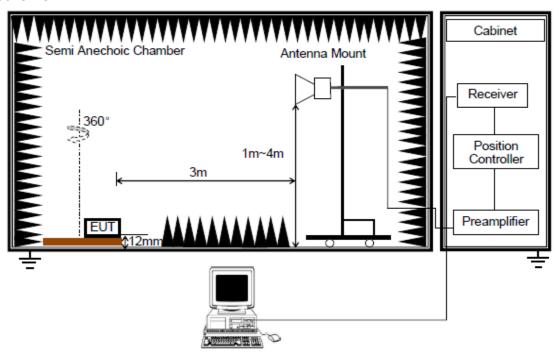

DATE: August 30, 2017


MODEL: K3

The setting of the spectrum analyser

RBW	1M
	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 12mm above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
- 6. For average power measurement, set the detector to RMS, while maintaining all of the other instrument settings, if the duty cycle of the EUT is less than 98%, the Duty Cycle Correction Factor shall be added to the measured emission levels. For the Duty Cycle and Correction Factor please refer to clause 7.1.ON TIME AND DUTY CYCLE
- 7. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)


X axis, Y axis, Z axis positions:



Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

8.1. RESTRICTED BANDEDGE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

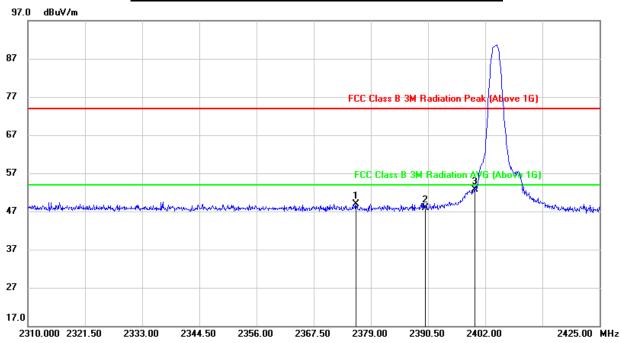

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2376.010	15.60	33.24	48.84	74.00	-25.16	peak
2	2390.000	14.67	33.14	47.81	74.00	-26.19	peak
3	2400.000	19.57	33.07	52.64	74.00	-21.36	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Duty cycle factor was taking into account.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

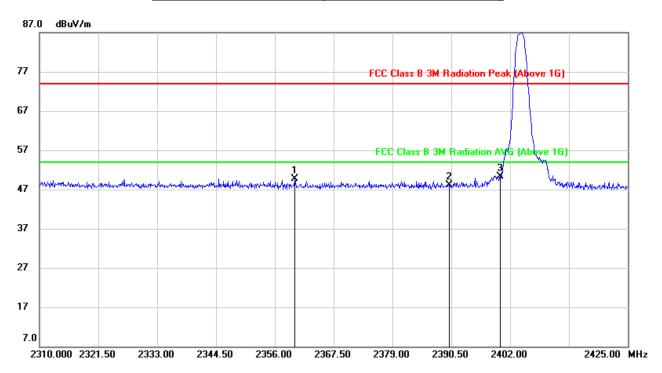


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2359.910	16.24	33.46	49.70	74.00	-24.30	peak
2	2390.000	14.91	33.24	48.15	74.00	-25.85	peak
3	2400.000	17.15	33.17	50.32	74.00	-23.68	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Duty cycle factor was taking into account.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

DATE: August 30, 2017

MODEL: K3

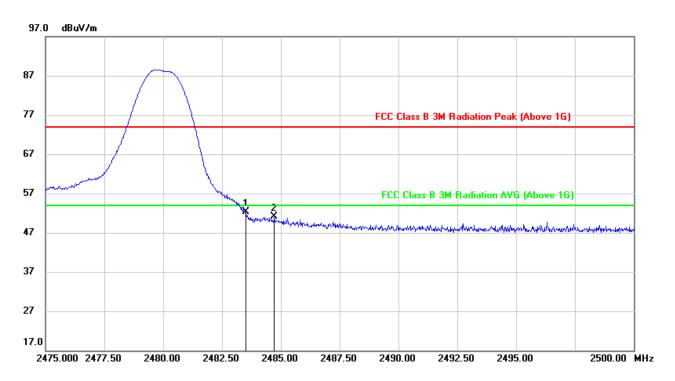


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	19.52	32.78	52.30	74.00	-21.70	peak
2	2484.725	18.23	32.78	51.01	74.00	-22.99	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Duty cycle factor was taking into account.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

MODEL: K3

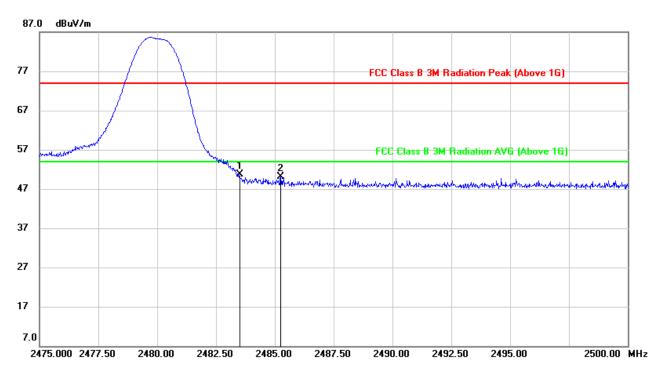


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	17.73	32.88	50.61	74.00	-23.39	peak
2	2485.250	17.14	32.89	50.03	74.00	-23.97	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Duty cycle factor was taking into account.

8.2. SPURIOUS EMISSIONS (1~18GHz)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

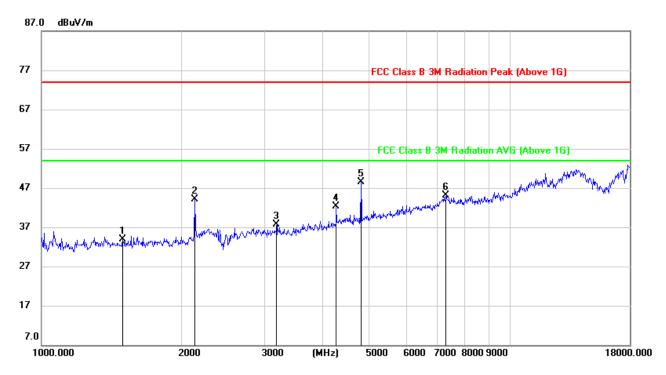


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	1490.142	46.60	-12.68	33.92	74.00	-40.08	peak
2	2132.462	53.82	-9.78	44.04	74.00	-29.96	peak
3	3186.869	44.02	-6.41	37.61	74.00	-36.39	peak
4	4254.921	45.59	-3.31	42.28	74.00	-31.72	peak
5	4804.110	50.19	-1.76	48.43	74.00	-25.57	peak
6	7305.122	39.25	5.92	45.17	74.00	-28.83	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Duty cycle factor was taking into account.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

DATE: August 30, 2017


MODEL: K3

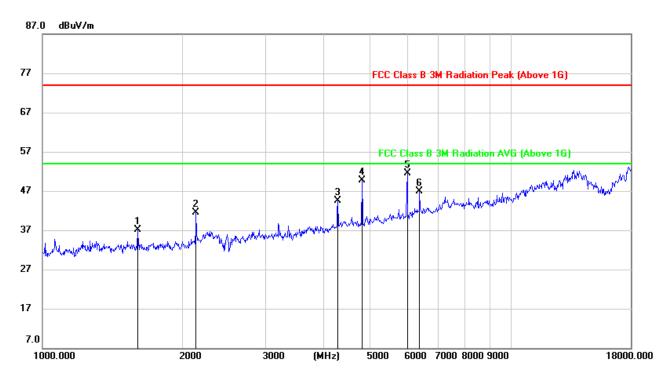

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	1597.181	49.87	-12.70	37.17	74.00	-36.83	peak
2	2132.462	51.33	-9.88	41.45	74.00	-32.55	peak
3	4267.237	47.62	-3.14	44.48	74.00	-29.52	peak
4	4804.110	51.44	-1.67	49.77	74.00	-24.23	peak
5	6001.626	49.43	2.10	51.53	74.00	-22.47	peak
6	6377.195	43.89	3.08	46.97	74.00	-27.03	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Duty cycle factor was taking into account.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

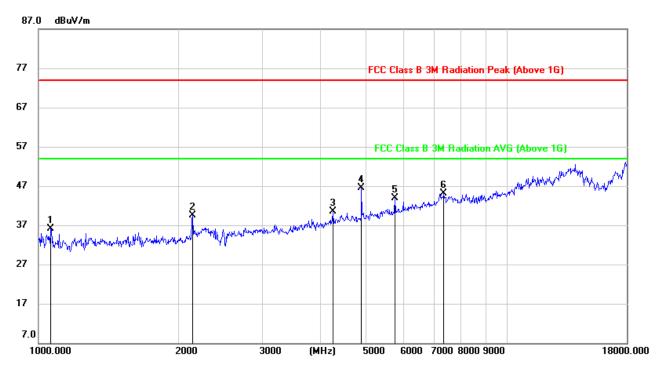


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	1062.578	50.11	-14.07	36.04	74.00	-37.96	peak
2	2138.635	49.26	-9.71	39.55	74.00	-34.45	peak
3	4242.641	43.80	-3.37	40.43	74.00	-33.57	peak
4	4888.151	47.27	-0.79	46.48	74.00	-27.52	peak
5	5763.617	42.69	1.14	43.83	74.00	-30.17	peak
6	7326.267	39.39	5.70	45.09	74.00	-28.91	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Duty cycle factor was taking into account.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

DATE: August 30, 2017

MODEL: K3

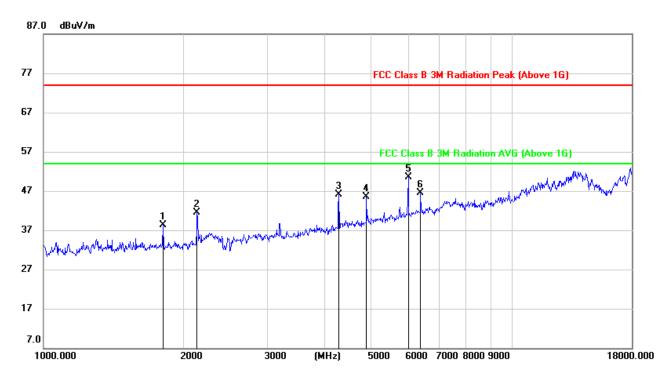


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	1798.127	50.05	-11.77	38.28	74.00	-35.72	peak
2	2132.462	51.29	-9.88	41.41	74.00	-32.59	peak
3	4267.237	49.21	-3.14	46.07	74.00	-27.93	peak
4	4888.151	46.31	-0.86	45.45	74.00	-28.55	peak
5	6001.626	48.33	2.10	50.43	74.00	-23.57	peak
6	6377.195	43.50	3.08	46.58	74.00	-27.42	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Duty cycle factor was taking into account.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

MODEL: K3

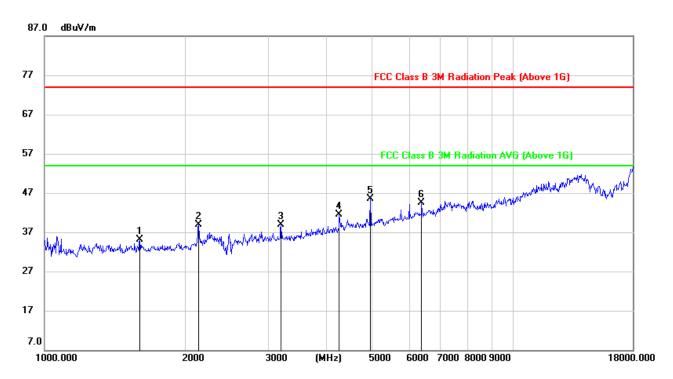


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	1597.181	47.83	-12.70	35.13	74.00	-38.87	peak
2	2138.635	48.69	-9.71	38.98	74.00	-35.02	peak
3	3196.094	45.35	-6.36	38.99	74.00	-35.01	peak
4	4254.921	44.76	-3.31	41.45	74.00	-32.55	peak
5	4959.307	46.21	-0.78	45.43	74.00	-28.57	peak
6	6377.195	41.38	3.03	44.41	74.00	-29.59	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Duty cycle factor was taking into account.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

DATE: August 30, 2017

MODEL: K3

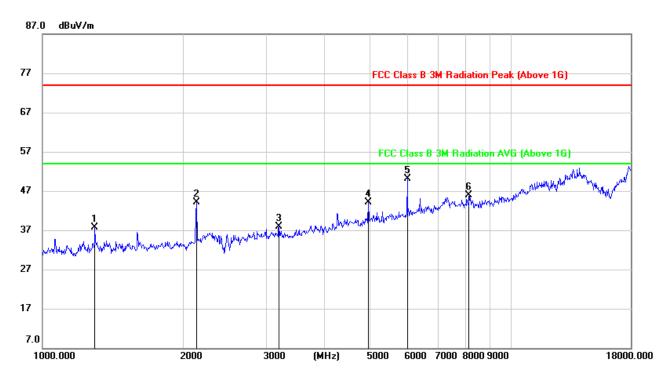


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	1297.103	50.67	-13.03	37.64	74.00	-36.36	peak
2	2138.635	53.89	-9.81	44.08	74.00	-29.92	peak
3	3196.094	44.25	-6.35	37.90	74.00	-36.10	peak
4	4959.307	44.77	-0.76	44.01	74.00	-29.99	peak
5	6001.626	47.97	2.10	50.07	74.00	-23.93	peak
6	8153.195	38.95	6.86	45.81	74.00	-28.19	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Duty cycle factor was taking into account.

8.3. SPURIOUS EMISSIONS 18G ~ 26GHz


SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

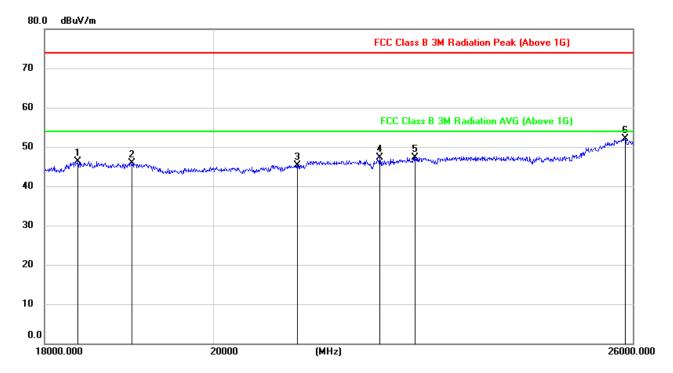

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	18381.267	51.65	-5.40	46.25	74.00	-27.75	peak
2	19013.757	51.12	-5.23	45.89	74.00	-28.11	peak
3	21083.556	50.18	-4.84	45.34	74.00	-28.66	peak
4	22197.394	51.49	-4.27	47.22	74.00	-26.78	peak
5	22692.588	51.04	-3.74	47.30	74.00	-26.70	peak
6	25876.006	53.02	-0.84	52.18	74.00	-21.82	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Duty cycle factor was taking into account.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

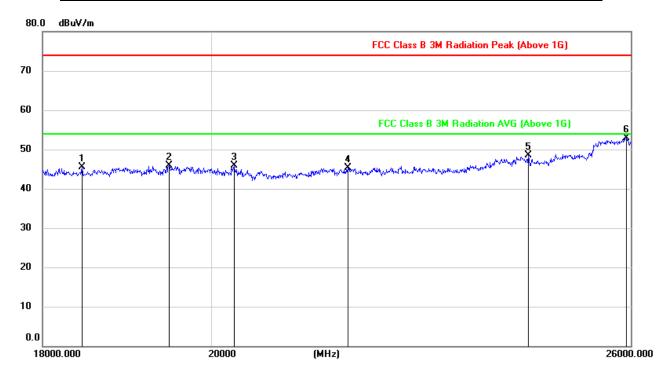


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	18448.984	50.77	-5.32	45.45	74.00	-28.55	peak
2	19480.863	51.40	-5.56	45.84	74.00	-28.16	peak
3	20292.473	51.45	-5.57	45.88	74.00	-28.12	peak
4	21784.984	49.67	-4.34	45.33	74.00	-28.67	peak
5	24388.518	51.05	-2.55	48.50	74.00	-25.50	peak
6	25923.625	53.80	-0.92	52.88	74.00	-21.12	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Duty cycle factor was taking into account.

8.4. SPURIOUS EMISSIONS 30M ~ 1 GHz

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

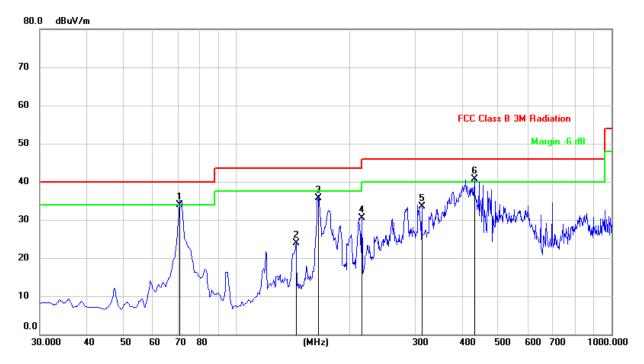


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	70.7400	50.88	-16.99	33.89	40.00	-6.11	QP
2	144.4600	37.93	-13.95	23.98	43.50	-19.52	QP
3	165.8000	49.01	-13.35	35.66	43.50	-7.84	QP
4	216.2400	43.46	-12.91	30.55	46.00	-15.45	QP
5	312.2700	45.32	-11.83	33.49	46.00	-12.51	QP
6	431.5800	50.29	-9.54	40.75	46.00	-5.25	QP

Note: 1. Result Level = Read Level + Correct Factor.

- 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

REPORT NO: 4788108581-3 DATE: August 30, 2017 FCC ID: 2AJ4RJOMOK3 MODEL: K3

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

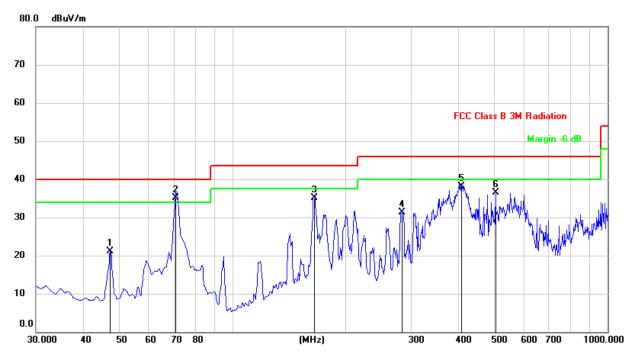

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	47.4600	37.05	-16.00	21.05	40.00	-18.95	QP
2	70.8600	52.02	-17.00	35.02	40.00	-4.98	QP
3	165.8000	48.52	-13.35	35.17	43.50	-8.33	QP
4	284.1400	43.61	-12.35	31.26	46.00	-14.74	QP
5	408.3000	48.06	-9.96	38.10	46.00	-7.90	QP
6	504.3300	44.36	-7.77	36.59	46.00	-9.41	QP


Note: 1. Result Level = Read Level + Correct Factor.


2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

8.5. SPURIOUS EMISSIONS BELOW 30M

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)




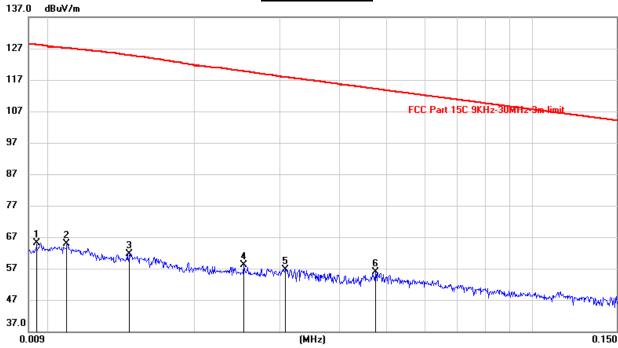

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(KHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	0.0094	44.90	20.26	65.16	128.06	-62.90	peak
2	0.0108	44.74	20.22	64.96	127.12	-62.16	peak
3	0.0146	41.34	20.26	61.60	124.83	-63.23	peak
4	0.0252	37.79	20.31	58.10	119.75	-61.65	peak
5	0.0308	36.32	20.31	56.63	117.86	-61.23	peak
6	0.0473	35.53	20.31	55.84	114.14	-58.30	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

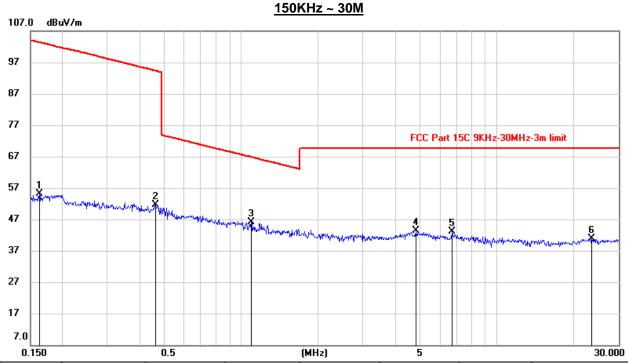


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	0.1621	34.61	20.41	55.02	103.41	-48.39	peak
2	0.4611	31.40	20.26	51.66	94.37	-42.71	peak
3	1.0939	25.73	20.41	46.14	66.83	-20.69	peak
4	4.8224	22.62	20.86	43.48	69.54	-26.06	peak
5	6.6977	22.21	20.90	43.11	69.54	-26.43	peak
6	23.6356	19.58	21.42	41.00	69.54	-28.54	peak

Note: 1. Measurement = Reading Level + Correct Factor.

^{2.} If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

0.09KHz~ 150KHz

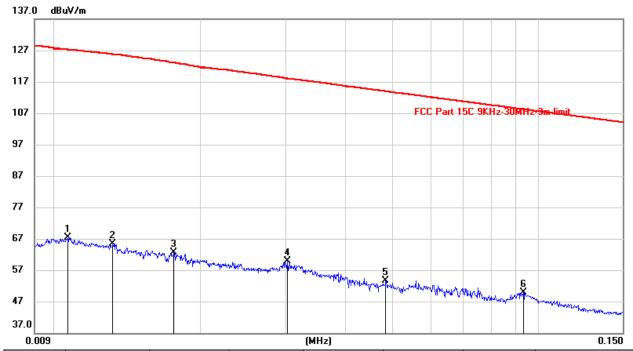

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(KHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	0.0106	47.04	20.22	67.26	127.24	-59.98	peak
2	0.0131	45.25	20.24	65.49	125.73	-60.24	peak
3	0.0175	42.26	20.28	62.54	123.08	-60.54	peak
4	0.0302	39.46	20.31	59.77	118.01	-58.24	peak
5	0.0483	33.40	20.31	53.71	113.95	-60.24	peak
6	0.0932	29.73	20.25	49.98	108.23	-58.25	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

150KHz ~ 30M

DATE: August 30, 2017

MODEL: K3

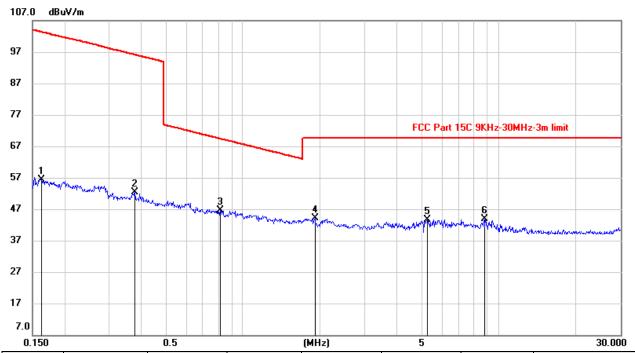

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	0.1621	36.06	20.41	56.47	103.41	-46.94	peak
2	0.3769	32.15	20.28	52.43	96.14	-43.71	peak
3	0.8173	26.25	20.36	46.61	69.36	-22.75	peak
4	1.9072	23.35	20.70	44.05	69.54	-25.49	peak
5	5.2769	22.86	20.84	43.70	69.54	-25.84	peak
6	8.8688	22.94	21.01	43.95	69.54	-25.59	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.


9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a).

FREQUENCY (MHz)	Class A	(dBuV)	Class B (dBuV)		
FREQUENCT (IVII IZ)	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	
0.50 -5.0	73.00	60.00	56.00	46.00	
5.0 -30.0	73.00	60.00	60.00	50.00	

TEST SETUP AND PROCEDURE

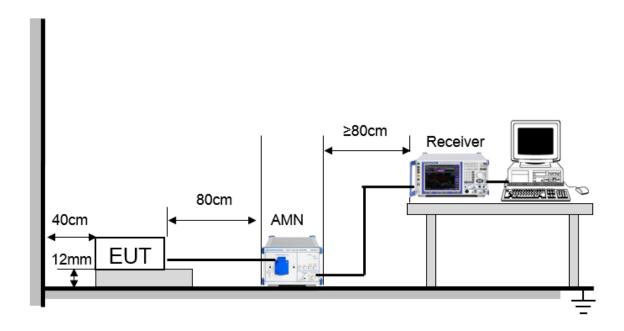


The EUT is put on a table of non-conducting material that is 12mm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2003.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

LINE N RESULTS

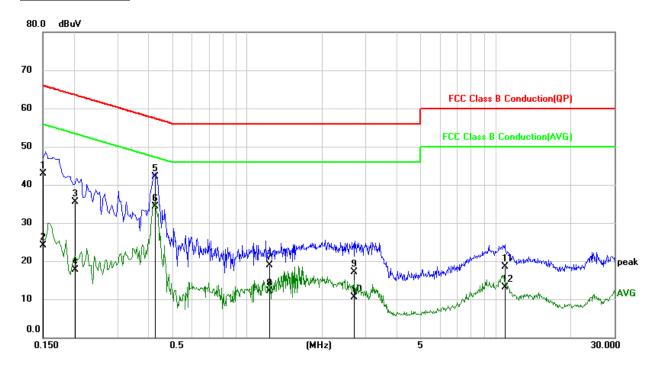


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	dB	(dBuV)	(dBuV)	(dB)	
1	0.1505	33.29	9.65	42.94	65.97	-23.03	QP
2	0.1505	14.44	9.65	24.09	55.97	-31.88	AVG
3	0.2025	25.86	9.64	35.50	63.51	-28.01	QP
4	0.2025	8.04	9.64	17.68	53.51	-35.83	AVG
5	0.4225	32.36	9.65	42.01	57.40	-15.39	QP
6	0.4225	24.58	9.65	34.23	47.40	-13.17	AVG
7	1.2345	9.29	9.67	18.96	56.00	-37.04	QP
8	1.2345	2.35	9.67	12.02	46.00	-33.98	AVG
9	2.6831	7.50	9.69	17.19	56.00	-38.81	QP
10	2.6831	0.81	9.69	10.50	46.00	-35.50	AVG
11	10.8109	8.80	9.80	18.60	60.00	-41.40	QP
12	10.8109	3.30	9.80	13.10	50.00	-36.90	AVG

Note: 1. Result = Reading +Correct Factor.

- 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
- 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

LINE L RESULTS

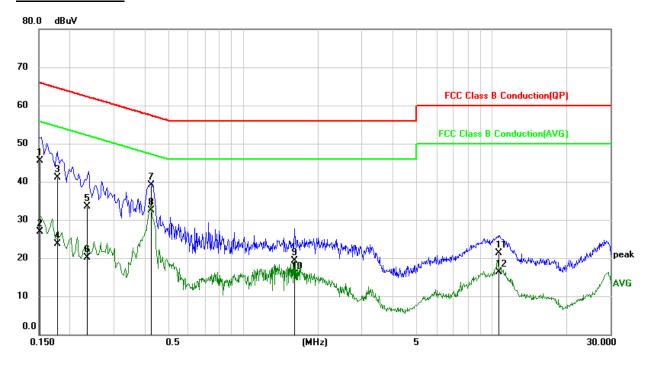

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	dB	(dBuV)	(dBuV)	(dB)	
1	0.1515	35.80	9.66	45.46	65.92	-20.46	QP
2	0.1515	17.31	9.66	26.97	55.92	-28.95	AVG
3	0.1776	31.46	9.66	41.12	64.60	-23.48	QP
4	0.1776	14.08	9.66	23.74	54.60	-30.86	AVG
5	0.2344	23.85	9.65	33.50	62.29	-28.79	QP
6	0.2344	10.40	9.65	20.05	52.29	-32.24	AVG
7	0.4242	29.40	9.65	39.05	57.37	-18.32	QP
8	0.4242	22.79	9.65	32.44	47.37	-14.93	AVG
9	1.6006	9.70	9.68	19.38	56.00	-36.62	QP
10	1.6006	6.02	9.68	15.70	46.00	-30.30	AVG
11	10.6517	11.47	9.79	21.26	60.00	-38.74	QP
12	10.6517	6.48	9.79	16.27	50.00	-33.73	AVG

Note: 1. Result = Reading +Correct Factor.

- 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
- 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All the modulation and channels had been tested, but only the worst data recorded in the report.

REPORT NO: 4788108581-3 DATE: August 30, 2017 FCC ID: 2AJ4RJOMOK3 MODEL: K3

10. ANTENNA REQUIREMENTS

Applicable requirements

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector

EUT has a PCB antenna without antenna connector.

Antenna Gain

The antenna gain of EUT is less than 6 dBi.

END OF REPORT