

源创星电子（深圳）有限公司

Yuanchuangxing electronics (Shenzhen) CO., LTD.

Customer Name: 乐为

Customer Moder:

Customer P/N:

Customer Describe:

YCX P/N: YCX09N-B791-60B

Customer Describe: 5G brass tube antenna (φ4.4*12.5) 1.13cable Length=60mm

PRODUCT SPECIFICATION

Signature and seal of confirmation					
YCX Approved			Customer Approved		
Sample	audit	approved	validation	audit	approved
zouyc					
YCX Approved By			Customer Approved By		
Date	2023-6-6		Date	2023-6-6	

源创星电子（深圳）有限公司

Yuanchuangxing electronics (Shenzhen) CO., LTD

File for amendment/revocation/resume

[illegible]

Yuanchuangxing Electronics (Shenzhen) Co., Ltd

Room 303, Building A, No. 164 Junxin Road, NiuHu Community, Guanlan Street, Longhua District,
Shenzhen

3、Directory

1、directory.....	1
2、File for amendment/revocation/resume.....	2
3、directory.....	3
4、Product drawings.....	4
5、Passive performance test paramete.....	5
6、2D、3D Performance figure.....	6
7、Electrical performance test report.....	7

源创星电子（深圳）有限公司

Yuanchuangxing electronics (Shenzhen)CO.,LTD.

4、Product drawings


		7	6	5	4	3	2	1		
							REV. A1	CHANGE DESCRIPTION New	DATE 2023.06.06	SIGNATURE zyc
△ 60±3										
Technical requirements: 1. Electrical parameters: 1.1 Impedance : 50 Ω 1.2 Frequency :5150-5850Mhz 1.3 VSWR : < 2.0 1.4 Peak Gain : 2.85dBi 1.5 Polarization : Linear 1.6 Radiation Patten: Omni directional 2. All material must meet ROHS request										
⑥						TOLERANCE		源创星电子（深圳）有限公司		
⑤						. XXX ±0.05		Yuanchuangxing electronics (Shenzhen)CO.,LTD.		
④	connect	1.13 IPEX	1	PCS		. XX ±0.1		DRAWN BY	zyc	
③	Cable	1.13 Black	1	PCS		. X ±0.2		PART NO. : YCX09N-B791-60B		
②	Brass Tube	Φ4.4*12.5 Nickel plating	1	PCS		X. ±0.25		CHECKED BY	Mike	
①	Heat Tube	Black	1	PCS		XX. ±1		TITLE:		
NO.		PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	QTY	UNIT	MATERIAL	AS DIMENSION	APPROVED BY	Sky	
								SCALE : 1 : 1	CAD FILE:	
									DWG TYPE: PRODUCT DRAWING	

源创星电子（深圳）有限公司

Yuanchuangxing electronics (Shenzhen) CO., LTD.

5、Passive performance test parameters

Frequency(MHz)	5150	5500	5850	
VSWR	1.43	1.54	1.83	

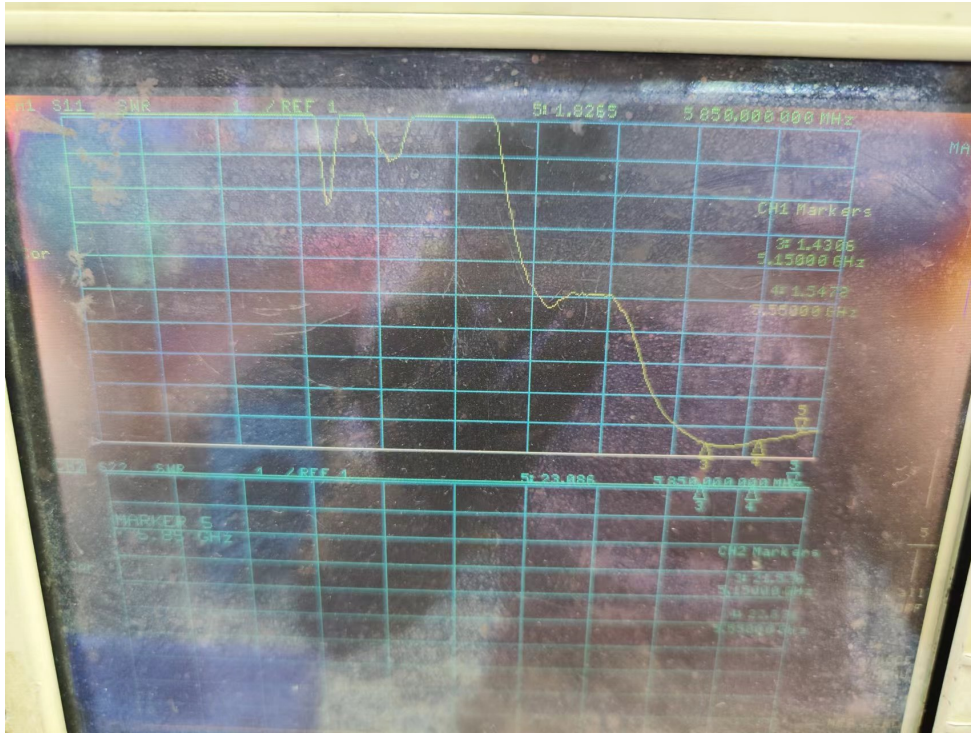


源创星电子（深圳）有限公司

Yuanchuangxing electronics (Shenzhen) CO., LTD.


6、2D、3D Performance figure

Passive Test				
Freq (MHz)	Effi (%)	Gain (dBi)		
5150	66	2.66		
5500	63	2.73		
5850	64	2.85		


5150.000MHz H

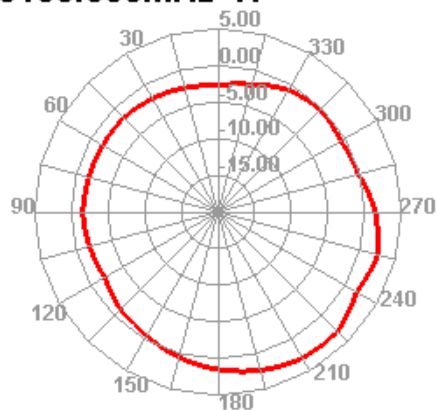


5150.000MHz E1

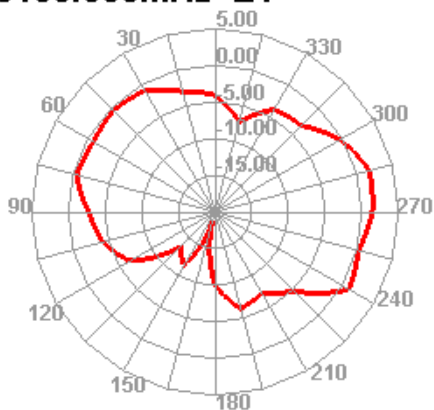


5150.000MHz E2

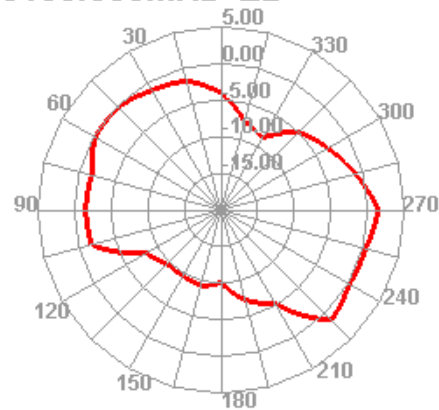


5500.000MHz H

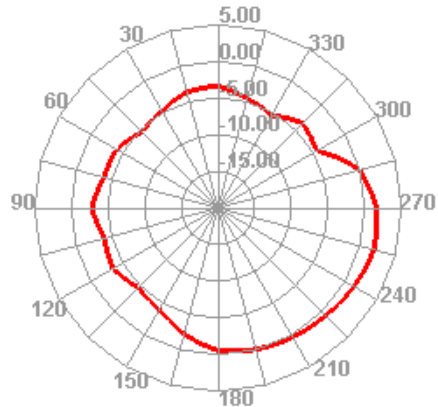


5500.000MHz E1

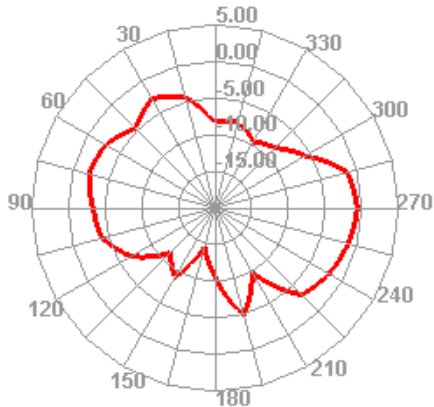


5500.000MHz E2

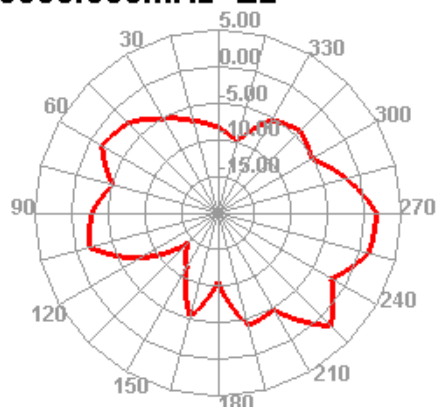


5850.000MHz H

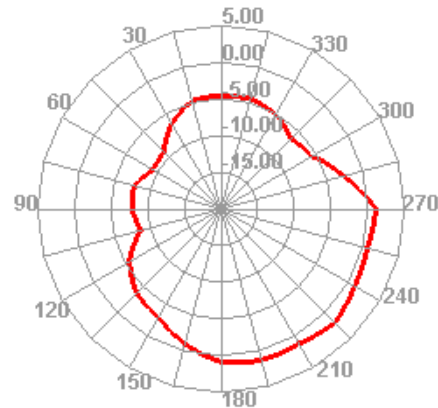

5850.000MHz E1

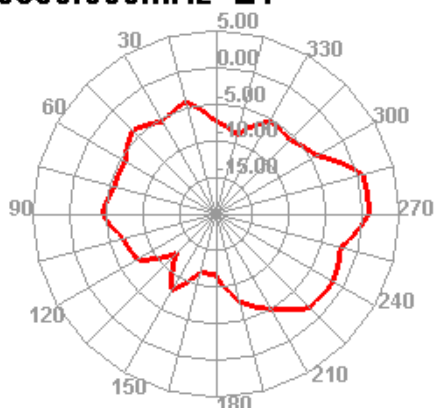

5850.000MHz E2

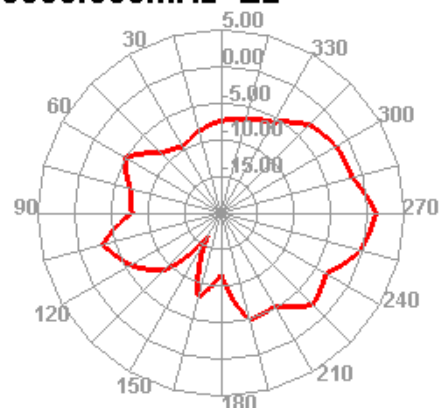

源创星电子（深圳）有限公司

Yuanchuangxing electronics (Shenzhen) CO., LTD.

7、Electrical performance test report

Electrical parameters	
Frequency range	5150-5850Mhz
input impedance	50Ω
VSWR	<2.0
Gain	2.85dBi MAX
Polarization mode	Vertical polarization
Radiation direction	omnidirectional
connection method	IPEX
Mechanical parameters	
Cable	
Salt spray test	
Environmental parameters	
Working temperature	-20~65℃