



cetecom
advanced

TEST REPORT

Test Report No.: 1-2295-21-02-07_TR1-R04



Deutsche
Akkreditierungsstelle
D-PL-12047-01-00

Testing Laboratory

cetecom advanced GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken/Germany

Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <https://www.cetecomadvanced.com>
e-mail: mail@cetecomadvanced.com

Accredited Test Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12047-01-00.

Applicant

EUCHNER GmbH + Co. KG
Kohlhammerstraße 16
70771 Leinfelden-Echterdingen/GERMANY

Phone: +49 711 7597-0
Contact: Tobias Lehmann
e-mail: tobias.lehmann@euchner.de
Phone: +49 711 7597-145
Fax: +49 711 753316

Manufacturer

EUCHNER GmbH + Co. KG
Kohlhammerstraße 16
70771 Leinfelden-Echterdingen/GERMANY

Test Standard/s

KDB 447498D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
KDB 680106 D01v04	Equipment Authorization of Wireless Power Transfer devices
IEC PAS 63184	Assessment methods of the human exposure to electric and magnetic fields from wireless power transfer systems – Models, instrumentation, measurement and numerical methods and procedures (frequency range of 1 kHz to 30 MHz)

CFR 47 – Part 1, §1.1310 RF exposure limits (100 kHz to 6 GHz) for SAR (BR)

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	Electronic-Key-System EKS modular
Device type:	Fixed device
Model name:	Electronic-Key-System EKS modular
FCC ID:	2AJ58-16
Serial number:	16
Hardware / Software status:	V1.0.0
Frequency:	125 kHz RFID
Antenna:	Integrated antenna
Battery option:	24 V DC by external power supply
Accessories:	TAG
Test sample status:	identical prototype
Exposure category:	general population / uncontrolled environment

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test Report authorised:



Alexander Hnatovskiy
Lab Manager
Radio Lab

Test performed:



Marco Scigliano
Testing Manager
Radio Lab

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Statement of compliance	3
3	Test standard/s:	4
3.1	RF exposure limits according CFR 47 – Part 1, §1.1310	5
4	Reporting statements of conformity – decision rule	6
5	Summary of Measurement Results	6
6	Test Environment	6
7	Test Set-up	7
7.1	Measurement system	7
7.1.1	Measurement with MAGPy-H3D probe / DASY 8 WPT-System	7
7.1.1.1	Workflow for Tier-4 Compliance Testing of IEC PAS 63184:2021	8
7.1.1.2	Compatibility with IEC PAS 63184:2021	8
7.1.1.3	MAGPy-Probes	9
7.1.1.4	MAGPy-DAS: Data Acquisition System	11
7.1.2	Uncertainties	12
7.1.2.1	Typical uncertainty of Module WPT	12
7.1.3	Definition of test position and distances	18
7.1.3.1	System Check and Validation	19
7.2	Test results	20
7.2.1	System Check 400kHz source	20
7.2.2	cDASY8 Module WPT Measurement Report (new version)	21
7.2.3	Incident fields and induced quantities in the anatomical model	22
8	Test equipment and ancillaries used for tests	23
9	Observations	23
Annex A:	Photo documentation	23
Annex B:	Detailed test results from system WPT	23
Annex C:	Calibration parameters	23
Annex D:	Document History	24
Annex E:	Further Information	24

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

2.2 Application details

Date of receipt of order:	2023-07-31
Date of receipt of test item:	2023-08-18
Start of test:	2023-08-22
End of test:	2024-05-27

2.3 Statement of compliance

The EMF values found for the Electronic-Key-System EKS modular Electronic-Key-System EKS modular are below the maximum allowed levels according to the standards listed in section 3.

3 Test standard/s:

Test Standard	Version	Test Standard Description
IEEE Std. C95-3	2021	IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave
IEC PAS 63184	May 2021	Assessment methods of the human exposure to electric and magnetic fields from wireless power transfer systems – Models, instrumentation, measurement and numerical methods and procedures (frequency range of 1 kHz to 30 MHz)
IEC TR 62905	01.02.2018	IEC/TR 62905:2018(E) is a Technical Report. It describes general exposure assessment methods for wireless power transfer (WPT) at frequency up to 10 MHz considering thermal and stimulus effects. Exposure assessment procedures and experimental results are shown as examples such as electric vehicles (EVs) and mobile devices.

FCC KDBs:

KDB 865664D01v01	August 7, 2015	FCC OET SAR measurement requirements 100 MHz to 6 GHz
KDB 865664D02v01	October 23, 2015	RF Exposure Compliance Reporting and Documentation Considerations
KDB 447498D01v06	October 23, 2015	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
KDB 680106 D01v04	October 24, 2023	Equipment Authorization of Wireless Power Transfer devices

APPLICATION NOTE:

Testing WPT Devices with DASY8/6 Modules WPT and SAR for Compliance with FCC KDB 447498/680106 (Chapter 5 Test System and Procedures for Frequencies from 100 kHz to 4 MHz, by SPEAG, R2, 05/24)

3.1 RF exposure limits according CFR 47 – Part 1, §1.1310

RF Exposure levels according CFR 47 – Part 1, §1.1310:

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain and Trunk)	1.60 W/kg	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 1: RF exposure limits (100 kHz to 6 GHz)

The limit applied in this test report is shown in bold letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.


Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

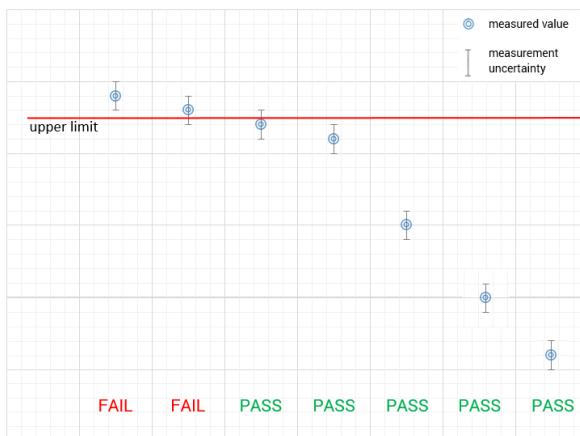

5 Summary of Measurement Results

<input checked="" type="checkbox"/>	No deviations from the technical specifications ascertained	
<input type="checkbox"/>	Deviations from the technical specifications ascertained	
Maximum SAR value (W/kg)		
	reported	limit
body worn 0 mm distance for 1g	0.000	1.6
extremity 0 mm distance for 10g	0.000	4.0

6 Test Environment

Ambient temperature: 20 – 24 °C

Relative humidity content: 40 – 50 %


Air pressure: not relevant for this kind of testing

Power supply: 230 V / 50 Hz

7 Test Set-up

7.1 Measurement system

7.1.1 Measurement with MAGPy-H3D probe / DASY 8 WPT-System

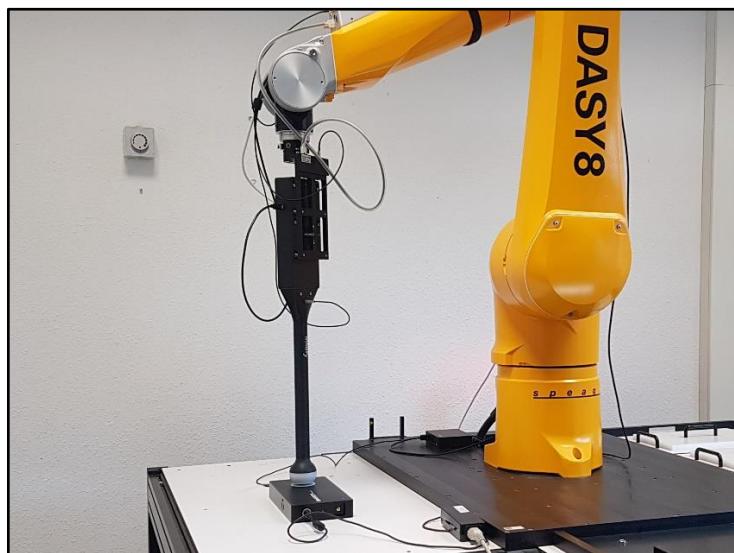

The DASY8 WPT-System is a complete high precision robot-based evaluation platform for demonstrating compliance of wireless power transfer (WPT) devices according to IEC PAS 63184:2021(Chapter 8 "Measurement and numerical combination methods") and enables fully automated compliance testing. [1]

It is composed of the isotropic probe MAGPy-8H3D+E3D V2, the reference amplitude and phase probe (MAGPy-RA φ V2), and the data acquisition system (MAGPy-DAS V2) mounted to the DASY8 robot via the emergency stop (MAGPy-ES). The induced electric (E-) fields and specific absorption rate (SAR) are assessed with Sim4Life's Quasi-Static EM Solver (P-EM-QS) using only the measured data. The dedicated graphical user interface (GUI) fully automates the testing workflow.

This allows for Laboratory evaluation of WPT devices and any other local electromagnetic source not requiring magnetic (H-) field volume scans exceeding 2000 x 1000 x 1500 mm³ with a precision of $\pm 2.0\text{mm}$.

The H-field distributions can be analyzed directly, and the values are compared to the reference level, or they are converted into Maxwell field and used as excitations for determining the basic restriction quantities for further dosimetric analysis with the Magneto Quasi-Static (MQS) solver [2].

This specific solution is optimized for:

- Evaluation of E & H-field (3 kHz – 10 MHz)
- Demonstration of compliance (3 kHz and 4 MHz) according to IEC PAS 63184:2021 [3]

References:

[1] Assessment methods of the human exposure to electric and magnetic fields from wireless power transfer systems. Models, instrumentation, measurement and numerical methods and procedures (frequency range of 1 kHz to 30MHz), IEC PAS 63184:2021.

[2] The MQS conditions are violated above 4MHz and SPEAG recommends to use IEC/IEEE 62209-1528 for the frequency range above 4 MHz.

[3] Sim4Life, V7.2, ZMT Zurich MedTech AG, Zurich, Switzerland.

7.1.1.1 Workflow for Tier-4 Compliance Testing of IEC PAS 63184:2021

Compliance testing according to Tier-4 of IEC PAS 63184:2021 is the most accurate method ensuring no overestimation of the exposure. The workflow implemented in DASY8 Module WPT consists of the following steps:

1. probe alignment,
2. teaching of the DUT position,
3. 3D scan with automated grid optimization,
4. vector potential reconstruction (Sim4Life),
5. solving the MQS equation in the muscle half-space,
6. applying coverage factors (pre-determined by the IT'IS Foundation),
7. advanced evaluations in various posed Sim4Life ViP phantoms.

Additionally, the system performance is routinely verified using the standard verification sources as DUT's.

7.1.1.2 Compatibility with IEC PAS 63184:2021

DASY8 Module WPT is fully compliant with IEC PAS 63184:2021 and evaluates the reference values and basic restrictions according to:

- ICNIRP 2020
- ICNIRP 2010
- ICNIRP 1998
- IEEE 2019
- CFR 47 – Part 1, §1.1310
- FCC 2020
- FCC KDB 680106 D01
- FCC KDB 447498 D01
- HC Code 6
- ISED SPR-002 ISSUE 2

7.1.1.3 MAGPy-Probes

MAGPy-8H3D+E3D V2

The MAGPy-8H3D+E3D V2 probe consists of eight isotropic H-field subprobes and one isotropic E-field subprobe that are all integrated inside the probe head with a flat tip. Each isotropic H-field subprobe is comprised of three concentric orthogonal loop coil sensors. The isotropic E-field subprobe is composed of three orthogonal sensors (x and y sensors are dipoles, and the sensor measuring the z component is a monopole).

In total, the MAGPy-8H3D+E3D V2 probe contains 27 sensors that measure in the time domain. The specifications of the probe are provided in the table below.


The MAGPy-8H3D+E3D V2 probe measures the isotropic H-field and E-field, and is compatible with DASY8 Module WPT V2.2 and MAGPy V2.2.



Probe design	
Probe head diameter	60mm
H-field sub-probes	8 isotropic H-field sub-probes Concentric loops of 1 cm ² arranged at the corners of a 22mm cube
E-field sub-probes	1 isotropic E-field sub-probe Orthogonal dipole/monopole (arm length: 50mm)
Temperature range	0–40 °C
Dimensions	110mmx635mmx35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
H-field measurement specifications	
Frequency range	3 kHz–10MHz
Dynamic range	0.1–3200A/m (0.12 µT–4 mT)
E-field measurement specifications	
Frequency range	3 kHz–10MHz
Dynamic range	0.08–2000V/m

The sensor offset, i.e., the distance from the outer surface (tip) of the probe to the center of the closest H-field sensors inside, is 7.5 mm. The distance to the virtual measuring point is 19 mm (The center of the 8 sub-field probes)

The following picture shows The MAGPy-8H3D+E3D V2 probe with the probe-head cap removed, showing the eight isotropic H-field sub-probes and one isotropic E-field sub-probe:

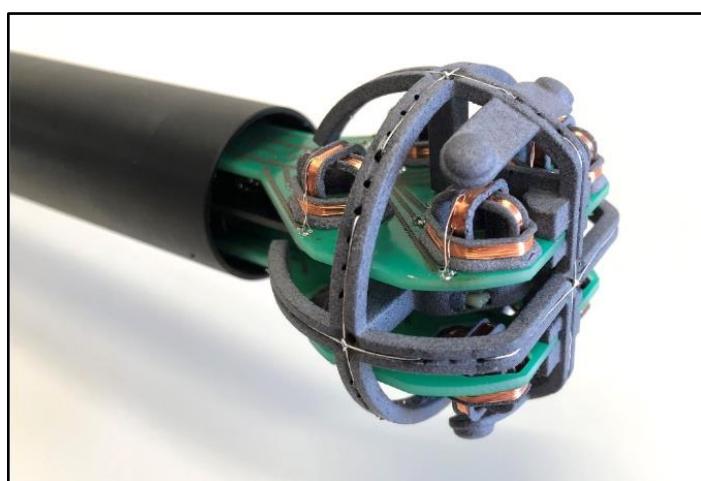

MAGPy-RA ϕ V2

The MAGPy-RA ϕ V2 probe is a pick-up coil to serve as a phase and amplitude reference, composed of one loop with the specifications shown in following table.

It is connected to the MAGPy-8H3D+E3D V2 probe and should be placed near the DUT during the spatial scan to ensure a sufficient signal-to-noise ratio.



Frequency range	3 kHz - 10 MHz
Dynamic range	0.1 – 3200 A/m (0.12 μ T – 4 mT)
Loop coil size	50 x 50mm ²


7.1.1.4 MAGPy-DAS: Data Acquisition System

Description of MAGPy-DAS V2

The MAGPy-DAS V2 is a speed-optimized unit that can process up to 27 input channels in real-time with a sampling rate of 25 MHz. The specifications of the MAGPy-DAS are:

- 27 x 14 Bit ADC Channels with 25 MSPs
- peak detection stage
- hardware supervising unit
- data transfer to backend
- 22 tap FIR filter

The following graphic shows the schematic of the system:

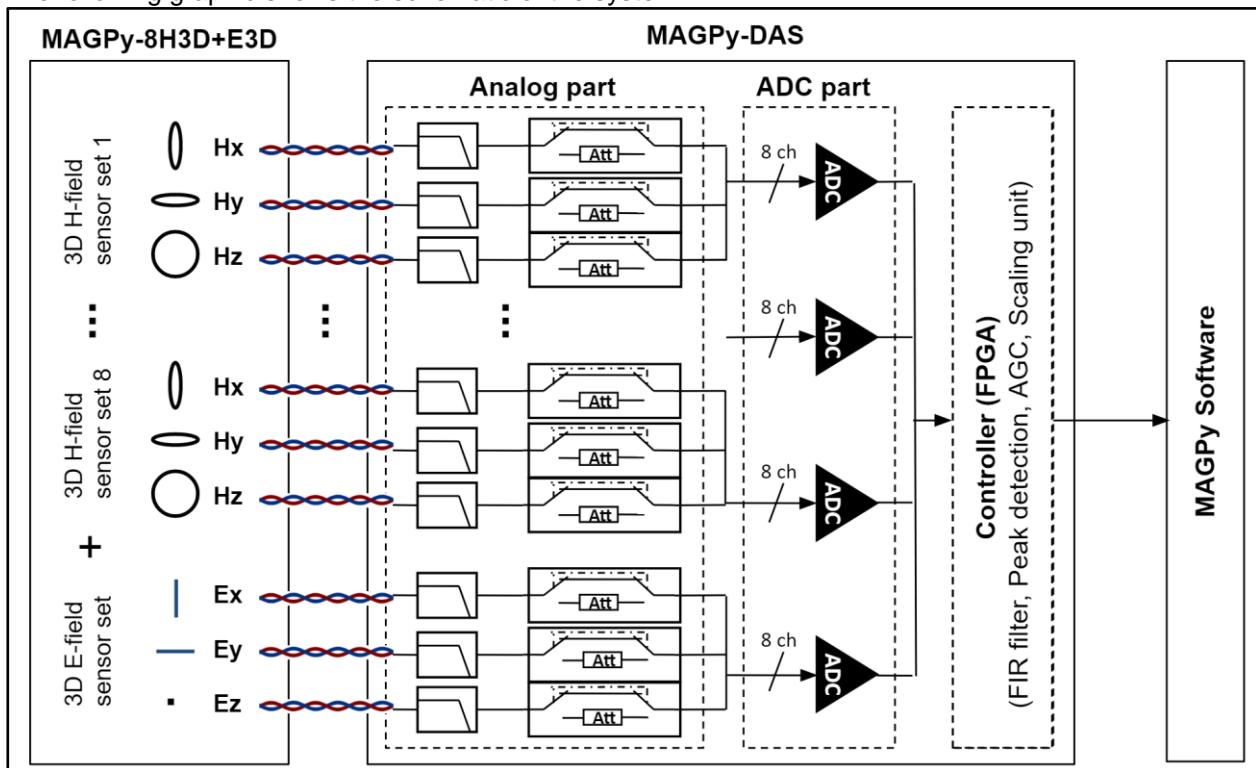

The measured analog signals from the MAGPy probes are firstly transferred to the analog input stage, which comprises filters, amplifiers, and attenuators. The analog signal is then transformed into a digital signal through the analog to digital converter (ADC) and treated in the field programmable gate arrays (FPGA) controller. The FPGA firmware consists of:

- FIR filter
- peak detection
- AGC (Automatic gain control unit)
- scaling unit

The controller communicates with the MAGPy software installed on the desktop or tablet PC across USB 2.0.

7.1.2 Uncertainties

The probe uncertainties stated by the manufacturer are considered to be the main relevant and dominant issues.

7.1.2.1 Typical uncertainty of Module WPT

DASY8 Uncertainty Budget for Peak <i>H</i> -field according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (\pm dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (\pm dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Gradient uncertainty	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E-field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.10
12	Surface field reconstruction	0.3	N	1	1	0.3
Combined uncertainty ($k = 1$)						0.59
Expanded uncertainty ($k = 2$)						1.33 (16.6%)

Uncertainty budget for peak incident H-field measured with DASY8 Module WPT assessed according to IEC/IEEE 63184

DASY8 Uncertainty Budget for Incident <i>E</i> -field according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (\pm dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (\pm dB)
Measurement system						
1	Amplitude calibration uncertainty	0.53	N	1	1	0.53
2	Probe anisotropy	0.8	R	$\sqrt{3}$	1	0.46
3	Probe dynamic linearity	1	R	$\sqrt{3}$	1	0.58
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Parasitic H-field sensitivity	0.2	R	$\sqrt{3}$	1	0.12
7	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
8	Readout electronics	0	N	1	1	0
9	Repeatability	0.1	N	1	1	0.10
Combined uncertainty ($k = 1$)						0.95
Expanded uncertainty ($k = 2$)						1.89 (24.4%)

Uncertainty budget for incident E-field measured with DASY8 Module WPT with linear gradients across the probe.

DASY8 Uncertainty Budget for Peak $2 \times 2 \times 2 \text{ mm}^3$ Cube-Average E_{ind} according to IEC/IEEE 63184						
Item	Error Description	Unc. Value ($\pm \text{dB}$)	Probab. Distr.	Div.	(c_i)	Std. Unc. ($\pm \text{dB}$)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.3	N	1	1	0.3
Numerical simulations						
13	Grid resolution	0.18	R	$\sqrt{3}$	1	0.10
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.24	N	1	1	0.24
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.72
Expanded uncertainty ($k = 2$)						1.44 (18.0%)

Uncertainty budget for peak $2 \times 2 \times 2 \text{ mm}^3$ cube-average induced E -field measured with DASY8 Module WPT
assessed according to IEC/IEEE 63184.

DASY8 Uncertainty Budget for Peak 5 mm Line-Average E_{ind} according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.3	N	1	1	0.3
Numerical simulations						
13	Grid resolution	0.25	R	$\sqrt{3}$	1	0.14
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.27	N	1	1	0.27
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.74
Expanded uncertainty ($k = 2$)						1.48 (18.5%)

Uncertainty budget for peak 5 mm line-average induced E-field measured with DASY8 Module WPT assessed according to IEC/IEEE 63184.

DASY8 Uncertainty Budget for Peak Local E_{ind} according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (\pm dB)	Probab. Distr.	Div. (c_i)	Std. Unc. (\pm dB)	
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.3	N	1	1	0.3
Numerical simulations						
13	Grid resolution	0.09	R	$\sqrt{3}$	1	0.05
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.27	N	1	1	0.27
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.73
Expanded uncertainty ($k = 2$)						1.45 (18.2%)

Uncertainty budget for peak local (i.e., not spatial averaged) induced E -field measured with DASY8 Module WPT assessed according to IEC/IEEE 63184.

DASY8 Uncertainty Budget for Peak 1 cm ² Area-Average J _{ind} according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div. (c _i)		Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E-field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.3	N	1	1	0.3
Numerical simulations						
13	Grid resolution	0.12	R	$\sqrt{3}$	1	0.07
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.1	N	1	1	0.1
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty (k = 1)						0.68
Expanded uncertainty (k = 2)						1.36 (17.0%)

Uncertainty budget for peak 1 cm² area-average induced current density measured with DASY8 Module WPT assessed according to IEC/IEEE 63184.

DASY8 Uncertainty Budget for psSAR1 g according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (\pm dB)	Probab. Distr.	Div. (c_i)	Std. Unc. (\pm dB)	
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.2	N	1	1	0.2
Numerical simulations						
13	Grid resolution	0.02	R	$\sqrt{3}$	1	0.01
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.09	N	1	1	0.09
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.63
Expanded uncertainty ($k = 2$)						1.27 (33.9%)

Uncertainty budget for peak 1 gram mass-average induced SAR measured with DASY8 Module WPT
assessed according to IEC/IEEE 63184.

DASY8 Uncertainty Budget for psSAR10 g according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (\pm dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (\pm dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic <i>E</i> -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.2	N	1	1	0.2
Numerical simulations						
13	Grid resolution	0	R	$\sqrt{3}$	1	0
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.04	N	1	1	0.04
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.63
Expanded uncertainty ($k = 2$)						1.25 (33.4%)

Uncertainty budget for peak 10 gram mass-average induced SAR measured with DASY8 Module WPT
assessed according to IEC/IEEE 63184.

7.1.3 Definition of test position and distances

In absence of an equipment specific regulation with given test distances, all not further noted test positions were measured in “touched” mode, the probe radome touching the DUT at the defined test position. Due to the mechanical concept of the used probe a distance between DUT surface and electrical centre of the probe antennas remains.

Probe type	Maximum distance (cm)	
	Magnetic Field	Electrical Field
MAGPy-8H3D+E3D V2	0.85 (Sub @ lowest plane)	5.0

7.1.3.1 System Check and Validation


Overview

Verification and Validation (V&V) sources are designed as well-defined sources with target values to verify that the system works within its specification. A system check is typically performed prior to any compliance evaluation.

For the DASY8 Module WPT, a set of four system validation sources (3 kHz, 85 kHz, 400 kHz and 6.78 MHz) are available. These sources consist of series resonant spiral coils, fed with an integrated current source. The current source consists of an oscillator and an amplifier at the appropriate frequency.

A monitoring port in the form of a SMB connector is available on the device to monitor the current through the coil. The port offers the voltage across a 1 Ohm resistor connected in series with the coil, therefore the current I corresponds to the measured voltage $V_{testport}$ ($I = V_{testport}$). The voltage on the port can thus be monitored with an oscilloscope and this should be equal to the current through the coil.

Target values ($H_{inc,max}$, $E_{ind,max}$, $J_{ind,max}$) for each source have been determined for several distances through simulations using the MQS solver in Sim4Life. The details of the evaluation are available at Application Notes, for each source.

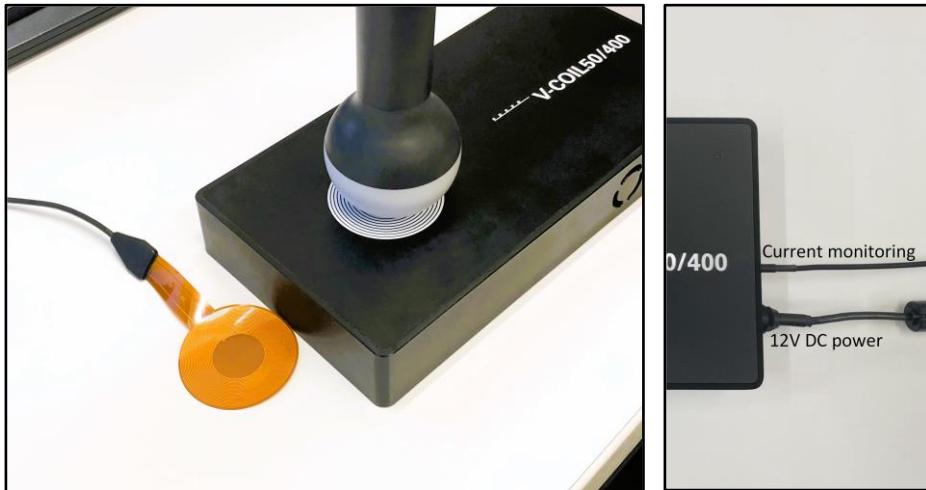

The picture above shows a 400 kHz system check and validation device, with the power cable and the current monitoring cable connected.

Specifications

The specifications of the sources are as follows:

Item	V-Coil500/3	V-Coil350/85	V-Coil50/400	V-Coil25/6780
Frequency (kHz)	3	85	400	6780
Coil Dimension (mm)	500 x 500	350 x 200	50 x 50	25 x 25
No. of Turns	11	13	11	10
Current Source	I500/3	I350/85	I50/400	I25/6780
Current Monitor Port	SMB	SMB	SMB	SMB
Device Dimensions (mm)	500 x 500 x 35	250 x 500 x 35	125 x 250 x 35	125 x 250 x 35

7.2 Test results

7.2.1 System Check 400kHz source

WPT 2.6 - measurement - 27/05/2024		Peak Eind (V/m, rms)		Peak Jind (A/m ² , rms)	psSAR (mW/kg)	
Spacing (mm)	Peak Hinc (A/m, rms)	Cube avg.	Line avg.	Surface avg.	1g avg.	10g avg.
0	256	52.5	4.21	2.49	5.96	3.08

target values		Peak Eind (V/m, rms)		Peak Jind (A/m ² , rms)	psSAR (mW/kg)	
Spacing (mm)	Peak Hinc (A/m, rms)	Cube avg.	Line avg.	Surface avg.	1g avg.	10g avg.
0	280	4.42	4.53	2.79	7.67	3.79

Comparison (in dB)		Peak Eind (V/m, rms)		Peak Jind (A/m ² , rms)	psSAR (mW/kg)	
Spacing (mm)	Peak Hinc (A/m, rms)	Cube avg.	Line avg.	Surface avg.	1g avg.	10g avg.
0	-0.78	21.49	-0.64	-0.99	-2.19	-1.80

7.2.2 cDASY8 Module WPT Measurement Report (new version)

Device under test

- Model / Manufacturer: Euchner
- Serial number: 16
- Dimensions: 40 x 30 x 40 mm
- Measurement scenario: centre of EUT at worst case side touch (use case)

Hardware setup

- DASY version DASY8 Module WPT 2.6.0.5002
- Software version: 2.0.61, backend: 2.2.22
- Probe model, serial no. and configuration date: MAGPy-8H3D+E3Dv2, WP000009, 2023/11/02

Scan setup

- Center location: X: -10.00 mm, Y: 0.00 mm, Z: 168.00 mm
- Dimensions: X: 124.7 mm, Y: 124.7 mm, Z: 36.0 mm
- Resolution: X: 7.33 mm, Y: 7.33 mm, Z: 7.33 mm
- Completed on: 2024/05/27 16:35:03


Measurement results

- Maximum H-field_[RMS]: 2.42 A/m
X: 501.77 mA/m, Y: 757.43 mA/m, Z: 2.24 A/m
- Maximum H-Field location relative to DUT: X: 3.67 mm, Y: 3.67 mm, Z: 8.50 mm
- Maximum E-field_[RMS]: 83.00 V/m
X: 663.30 mV/m, Y: 307.79 mV/m, Z: 83.00 V/m
- Maximum E-field location relative to DUT: X: 0.00 mm, Y: 0.00 mm, Z: 0.00 mm
- Distance to -20.0 dB boundary: 41.48 mm
- Offset relative to DUT: X: 0.00 mm, Y: 0.00 mm, Z: 1.00 mm


H-field magnitude at maximum, H-field magnitude at lowest plane, Post-processing setup

- Sim4Life version: 8.0.1.15446
- Sim4Life solver: Low Frequency Magneto Quasi Static
- Conductivity: 0.750 S/m
- Tissue density: 1000 kg/m³
- Frequency: 124.73 kHz
- Resolution: X: 1.00 mm, Y: 1.00 mm, Z: 1.00 mm
- Simulation date: 2024/05/27 17:01:18

H-field magnitude [RMS] at maximum location

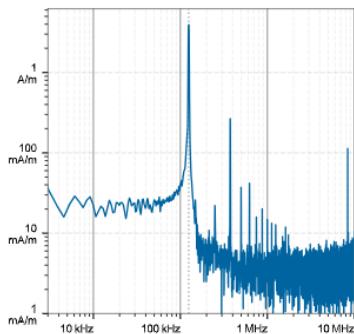

H-field magnitude [RMS] at lowest plane

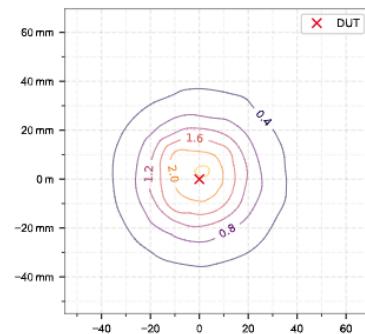

7.2.3 Incident fields and induced quantities in the anatomical model

$f = 124.73 \text{ kHz}$, $\sigma = 0.750 \text{ S/m}$, tissue density = $1,000 \text{ kg/m}^3$

			Peak E_{ind} (V/m, rms)	Peak J_{ind} (A/m 2 , rms)	psSAR (mW/kg, rms)		H-field extent	
Distance (mm)	Peak H_{inc} (A/m, rms)	Peak E_{inc} (V/m, rms)	Cube avg.	Line avg.	Surface avg.	LIMIT: 1600 1g avg.	Limit: 4000 10g avg.	-20 dB radius (mm)
0.0	5.18	83.0	0.020	0.021	0.013	0.000	0.000	37.2
2.0	4.47	77.3.	0.017	0.018	0.011	0.000	0.000	38.1
5.0	3.46	60.3	0.014	0.014	0.009	0.000	0.000	40.0

NOTE: Detailed test results are shown in the additional document: 1-2295-21-02-07_TR1-A201-R04.

8 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

Equipment	Type	Manufacturer	Serial No.	Last Calibration	Frequency (months)
E / H Field Probe	MAGPy-8H3D+E3D V2	Schmid & Partner Engineering AG	3079	Oct 24, 2023	12
MAGPy FPGA Board	WP	Schmid & Partner Engineering AG	000009	Oct 24, 2023	12
Data Acquisition System	MAGPy-DAS V2	Schmid & Partner Engineering AG	1023	Oct 24, 2023	12
Pick up coil for phase and amplitude reference	MAGPy-RAφ V2	Schmid & Partner Engineering AG	7635	Oct 24, 2023	12
400 kHz Reference source	V-Coil50/400	Schmid & Partner Engineering AG	1021	Nov 02, 2023	12
DASY8 Module WPT (2.6) software	SW – Version 2.6.0.5002	Schmid & Partner Engineering AG	---	N/A	--
Notebook Jupyter v2.6.07	SW – Version 2.0.61, backend: 2.2.22	Schmid & Partner Engineering AG	---	N/A	--
Sim4Life V Simulation Software (+Plug In)	SW – Version 8.0.1.15446	Schmid & Partner Engineering AG / ZMT Zurich MedTech AG	---	N/A	--

9 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A: Photo documentation

Photo documentation is described in the additional document: **1-2295-21-02-07_TR1-A101-R04**

Annex B: Detailed test results from system WPT

Detailed test results from WPT System are in the additional document: **1-2295-21-02-07_TR1-A201-R04**

Annex C: Calibration parameters

Detailed test results from WPT System are in the additional document: **1-2295-21-02-07_TR1-A301-R04**

Annex D: Document History

Version	Applied Changes	Date of Release
	Initial Release	2024-04-29
-R01 to -R04	Editorial changes.	2024-06-07

Annex E: Further Information

Glossary

DUT	- Device under Test
EUT	- Equipment under Test
FCC	- Federal Communication Commission
FCC ID	- Company Identifier at FCC
HW	- Hardware
ISED	- Innovation, Science and Economic Development Canada
N/A	- not applicable
S/N	- Serial Number
SW	- Software