



**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2**

**CERTIFICATION TEST REPORT**

*For*

**2.4GHz Module Small E01C**

**MODEL NUMBER: EM00556**

**FCC ID: 2AJ5SEM00556**

**IC: 22061-EM00556**

**REPORT NUMBER: 4790049084.2-1**

**ISSUE DATE: April 13, 2022**

*Prepared for*

**MOTION S.P.A.  
Via Biondini 27, 47121 Forlì(FC), Italy**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881  
Fax: +86 769 33244054  
Website: [www.ul.com](http://www.ul.com)**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	4/13/2022	Initial Issue	

Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
2	Peak Conducted Output Power	FCC Part 15.247 (b) (3) RSS-247 Clause 5.4 (d)	Pass
3	Power Spectral Density	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d) RSS-247 Clause 5.5	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
6	Conducted Emission Test for AC Power Port	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
7	Antenna Requirement	FCC Part 15.203 RSS-GEN Clause 6.8	Pass

Note:

1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.
2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >< ISED RSS-247 > when <Accuracy Method> decision rule is applied.

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>6</b>
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	8
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	8
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	9
5.2. <i>CHANNEL LIST</i> .....	9
5.3. <i>MAXIMUM PEAK OUTPUT POWER</i> .....	10
5.4. <i>TEST CHANNEL CONFIGURATION</i> .....	10
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i> .....	10
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	10
5.7. <i>DESCRIPTION OF TEST SETUP</i> .....	11
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED .....</b>	<b>12</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>14</b>
7.1. <i>ON TIME AND DUTY CYCLE</i> .....	14
7.2. <i>6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH</i> .....	15
7.3. <i>CONDUCTED OUTPUT POWER</i> .....	17
7.4. <i>POWER SPECTRAL DENSITY</i> .....	18
7.5. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS</i> .....	20
<b>8. RADIATED TEST RESULTS.....</b>	<b>22</b>
8.1. <i>RESTRICTED BANDEDGE</i> .....	28
8.1.1. <i>GFSK(1Mbps) MODE</i> .....	28
8.1.2. <i>GFSK(2Mbps) MODE</i> .....	32
8.1.3. <i>GFSK(250Kbps) MODE</i> .....	36
8.2. <i>SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)</i> .....	40
8.2.1. <i>GFSK(250Kbps) MODE</i> .....	40
8.3. <i>SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)</i> .....	46
8.3.1. <i>GFSK(1Mbps) MODE</i> .....	46
8.3.2. <i>GFSK(2Mbps) MODE</i> .....	52
8.3.1. <i>GFSK(250Kbps) MODE</i> .....	58
8.4. <i>SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)</i> .....	64
8.4.1. <i>GFSK(2Mbps) MODE</i> .....	64

8.5. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz) .....	66
8.5.1. GFSK(2Mbps) MODE .....	66
8.6. SPURIOUS EMISSIONS BELOW 30 MHz .....	68
8.6.1. GFSK(2Mbps) MODE .....	68
<b>9. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>71</b>
9.1. GFSK(2Mbps) MODE .....	72
<b>10. ANTENNA REQUIREMENTS .....</b>	<b>74</b>
<b>11. Appendix .....</b>	<b>75</b>
11.1. Appendix A: DTS Bandwidth .....	75
11.1.1. Test Result .....	75
11.1.2. Test Graphs .....	76
11.2. Appendix B: Occupied Channel Bandwidth .....	79
11.2.1. Test Result .....	79
11.2.1. Test Graphs .....	80
11.3. Appendix C: Maximum conducted output power .....	83
11.3.1. Test Result - Peak .....	83
11.3.2. Test Result – Average .....	83
11.4. Appendix D: Maximum power spectral density .....	84
11.4.1. Test Result .....	84
11.4.2. Test Graphs .....	85
11.5. Appendix E: Band edge measurements .....	88
11.5.1. Test Result .....	88
11.5.2. Test Graphs .....	89
11.6. Appendix F: Conducted Spurious Emission .....	91
11.6.1. Test Result .....	91
11.6.2. Test Graphs .....	92
11.7. Appendix G: Duty Cycle .....	101
11.7.1. Test Result .....	101
11.7.2. Test Graphs .....	102

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: MOTION S.P.A.  
Address: Via Biondini 27, 47121 Forlì(FC), Italy

### Manufacturer Information


Company Name: MOTION S.P.A.  
Address: Via Biondini 27, 47121 Forlì(FC), Italy

### EUT Information

EUT Name: 2.4GHz Module Small E01C  
Model: EM00556  
Sample Received Date: January 13, 2022  
Sample Status: Normal  
Sample ID: 4445778  
Date of Tested: January 13, 2022 ~ April 13, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:



---

Kebo Zhang  
Project Engineer

Checked By:



---

Shawn Wen  
Laboratory Leader

Approved By:



---

Stephen Guo  
Laboratory Manager

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz) 5.23 dB (18 GHz ~ 26 GHz)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	2.4GHz Module Small E01C		
Model Name	EM00556		
Product Description	Operation Frequency		2402 MHz ~ 2480 MHz
	Modulation Type		Data Rate
	GFSK	1Mbps	
	GFSK	2Mbps	
	GFSK	250Kbps	
Power Supply	DC 2.0 ~ 3.6 V		

Note: Only the worst test case test voltage (3.3 Vdc) recorded in this report.

### 5.2. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency(MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	22	2424	44	2446	66	2468
1	2403	23	2425	45	2447	67	2469
2	2404	24	2426	46	2448	68	2470
3	2405	25	2427	47	2449	69	2471
4	2406	26	2428	48	2450	70	2472
5	2407	27	2429	49	2451	71	2473
6	2408	28	2430	50	2452	72	2474
7	2409	29	2431	51	2453	73	2475
8	2410	30	2432	52	2454	74	2476
9	2411	31	2433	53	2455	75	2477
10	2412	32	2434	54	2456	76	2478
11	2413	33	2435	55	2457	77	2479
12	2414	34	2436	56	2458	78	2480
13	2415	35	2437	57	2459	/	/
14	2416	36	2438	58	2460	/	/
15	2417	37	2439	59	2461	/	/
16	2418	38	2440	60	2462	/	/
17	2419	39	2441	61	2463	/	/
18	2420	40	2442	62	2464	/	/
19	2421	41	2443	63	2465	/	/
20	2422	42	2444	64	2466	/	/
21	2423	43	2445	65	2467	/	/

### 5.3. MAXIMUM PEAK OUTPUT POWER

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)
GFSK(1Mbps)	2402 ~ 2480	0-78[79]	2.08
GFSK(2Mbps)	2402 ~ 2480	0-78[79]	3.18
GFSK(250Kbps)	2402 ~ 2480	0-78[79]	-2.23

### 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK(1Mbps)	LCH, MCH, HCH/CH0, CH40, CH78	2402MHz, 2442MHz, 2480MHz
GFSK(2Mbps)	LCH, MCH, HCH/CH0, CH40, CH78	2402MHz, 2442MHz, 2480MHz
GFSK(250Kbps)	LCH, MCH, HCH/CH0, CH40, CH78	2402MHz, 2442MHz, 2480MHz

### 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software Version		UartAssist		
Modulation Type	Antenna Number	Test Channel		
		CH 0	CH 40	CH 78
GFSK(1Mbps)	1	03	03	03
GFSK(2Mbps)	1	04	04	04
GFSK(250Kbps)	1	02	02	02

### 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna-L	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	PCB	3.3

Test Mode	Transmit and Receive Mode	Description
GFSK(1Mbps)	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
GFSK(2Mbps)	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
GFSK(250Kbps)	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

## 5.7. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	Lenovo	E14	/
2	UART	/	/	/

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/

### ACCESSORIES


Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

Note: The cable is provided by customer.

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

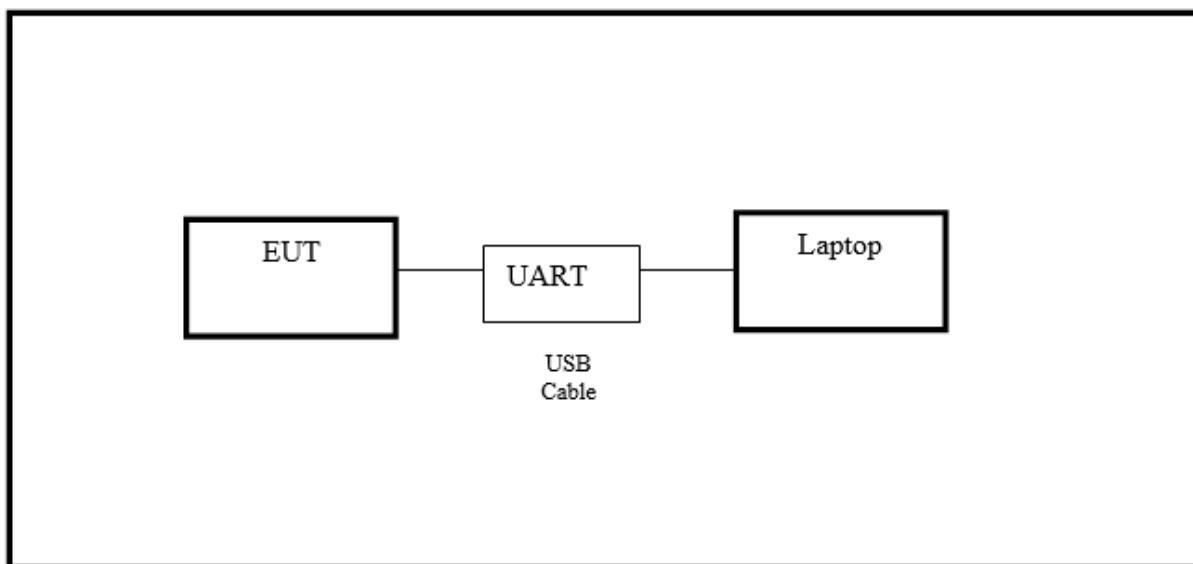

## 6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.30, 2021	Oct.29, 2022
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.30, 2021	Oct.29, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
EMI Measurement Receiver	R&S	ESR26	101377	Oct.30, 2021	Oct.29, 2022
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.30, 2021	Oct.29, 2022
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.31, 2021	Oct.30, 2022
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.31, 2021	Oct.30, 2022
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13,2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Dec.14, 2021	Dec.13, 2024
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.31, 2021	Oct.30, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	R&S	FSV40	101117	Oct.31, 2021	Oct.30, 2022
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Oct.30, 2021	Oct.29, 2022
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Oct.30, 2021	Oct.29, 2022

## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only.

#### PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

#### TEST SETUP

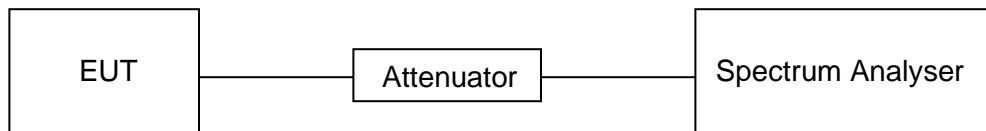

#### TEST ENVIRONMENT

Temperature	23.9 °C	Relative Humidity	63.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

#### RESULTS

Please refer to appendix G.

## 7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

### LIMITS

CFR 47FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	$\geq 500$ kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

- Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### TEST SETUP

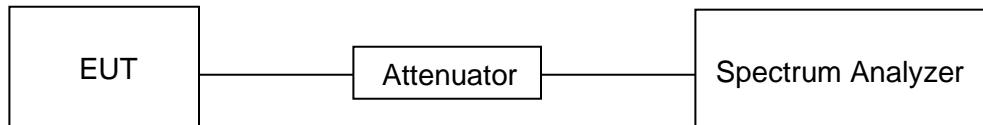

**TEST ENVIRONMENT**

Temperature	23.9 °C	Relative Humidity	63.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**

Please refer to appendix A & B.

### 7.3. CONDUCTED OUTPUT POWER

#### LIMITS


CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	Peak Conducted Output Power	1 watt or 30 dBm	2400-2483.5

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	23.9 °C	Relative Humidity	63.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

#### RESULTS

Please refer to appendix C.

## 7.4. POWER SPECTRAL DENSITY

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	3 kHz ≤ RBW ≤ 100 kHz
VBW	≥3 × RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST SETUP



### TEST ENVIRONMENT

Temperature	23.9 °C	Relative Humidity	63.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

## RESULTS

Please refer to appendix D.

## 7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	$\geq$ span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

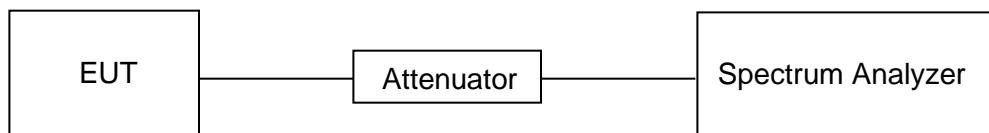**TEST SETUP****TEST ENVIRONMENT**

Temperature	23.9 °C	Relative Humidity	63.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**

Please refer to appendix E & F.

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ( $\mu$ A/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands <sup>Notes 1</sup>		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3280 - 3287	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5380 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## TEST SETUP AND PROCEDURE

Below 30 MHz

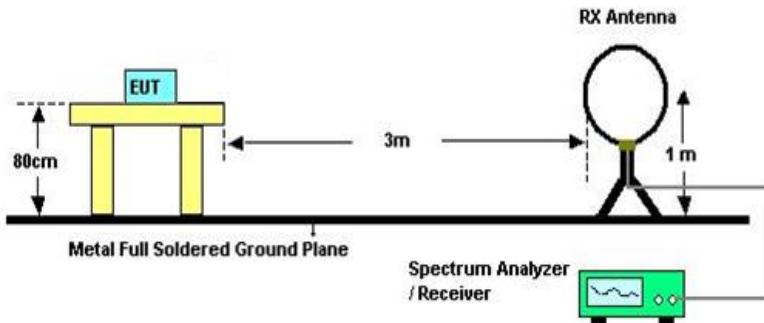


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377 \Omega$ ; For example, the measurement frequency  $X$  kHz resulted in a level of  $Y$  dB $V/m$ , which is equivalent to  $Y - 51.5 = Z$  dB $uA/m$ , which has the same margin,  $W$  dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

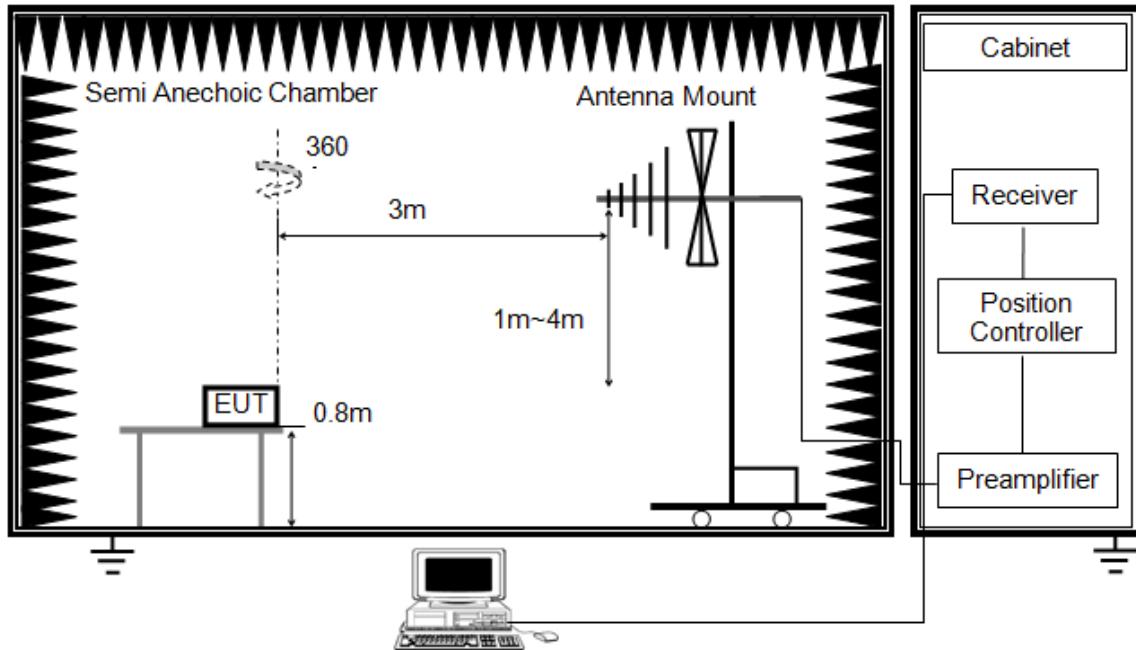


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1GHz

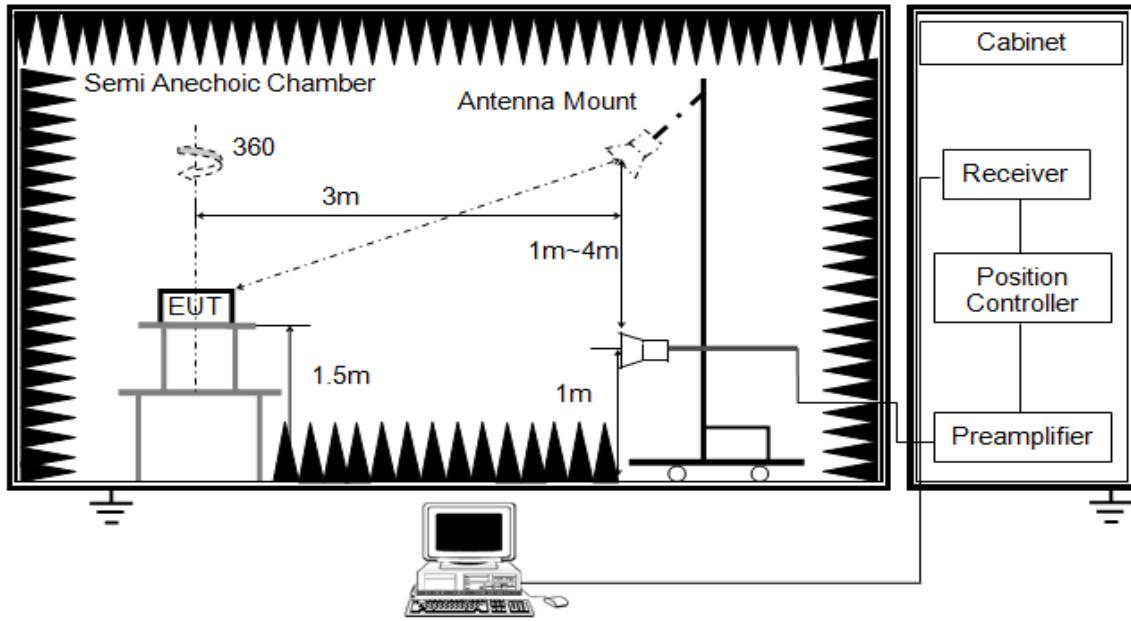


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

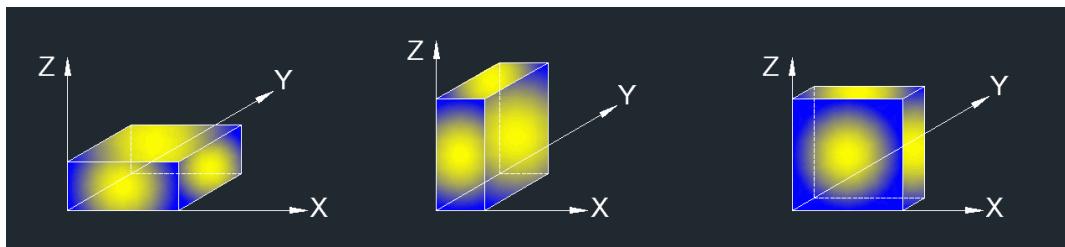

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

#### TEST ENVIRONMENT

Temperature	21.8 °C	Relative Humidity	54.6 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V


#### RESULTS

## 8.1. RESTRICTED BANDEDGE

### 8.1.1. GFSK(1Mbps) MODE

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

##### PEAK

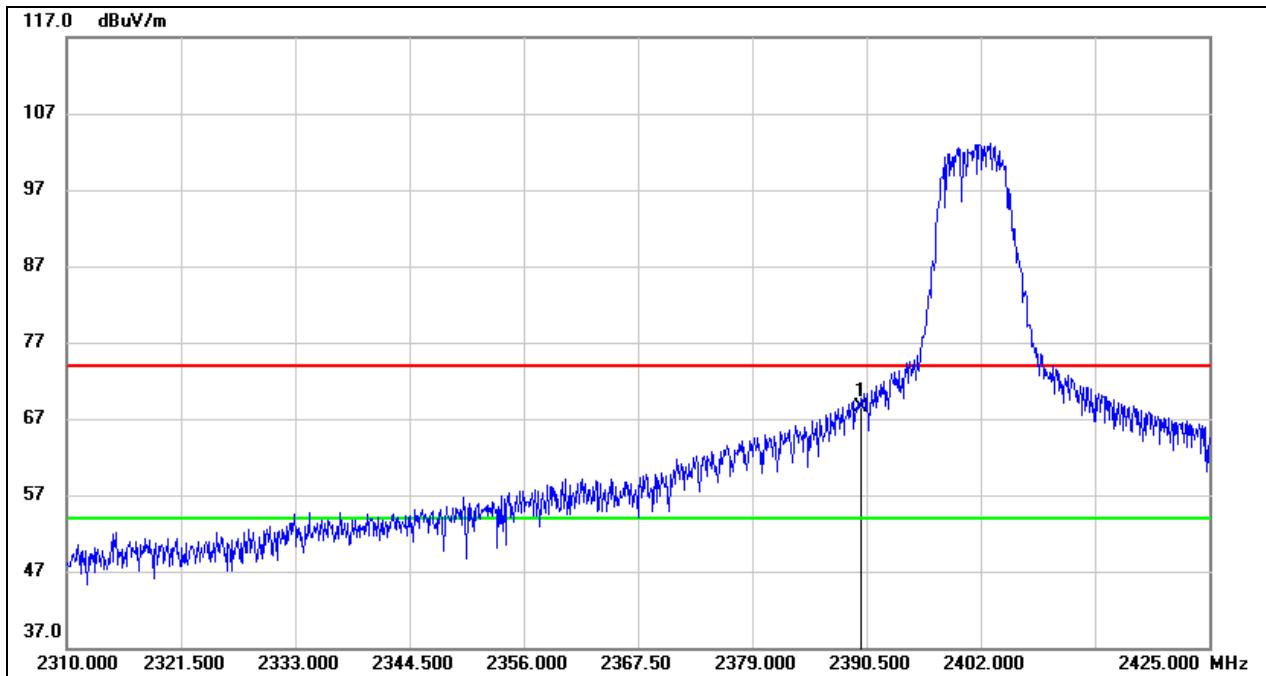

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	35.83	32.66	68.49	74.00	-5.51	peak


Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.015	8.97	32.63	41.60	54.00	-12.40	AVG
2	2390.000	4.65	32.66	37.31	54.00	-16.69	AVG


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

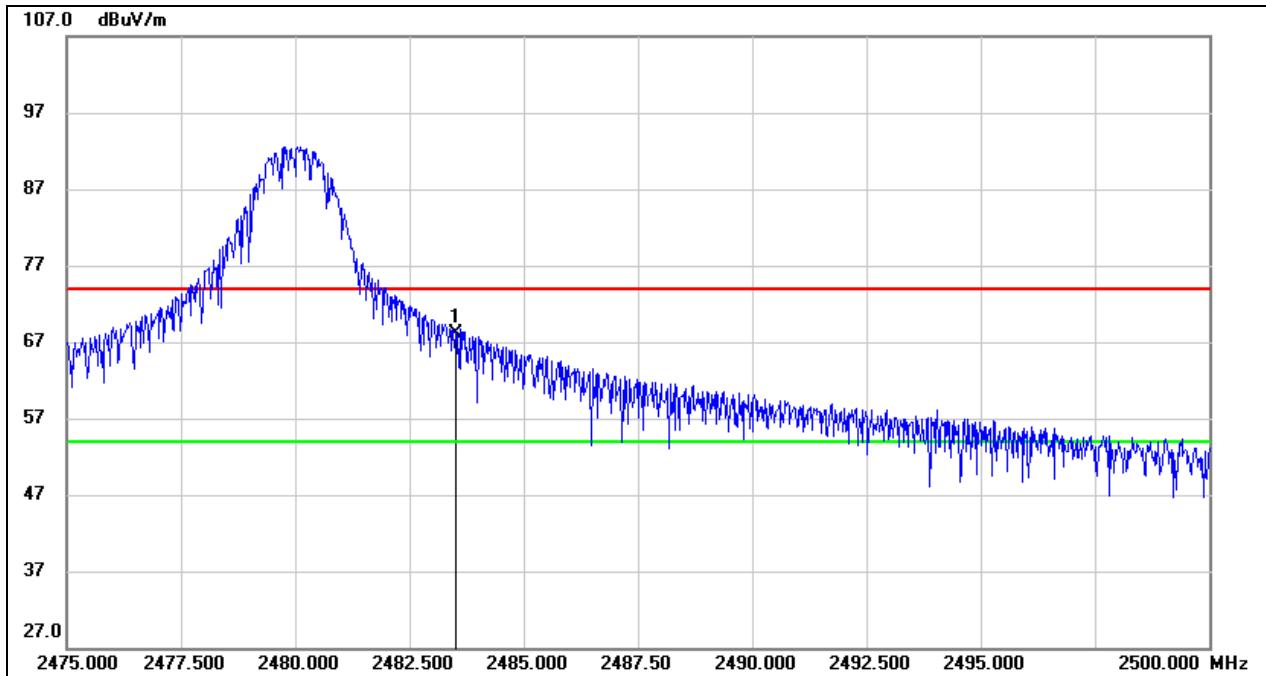RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)PEAK

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.00	33.10	68.10	74.00	-5.90	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

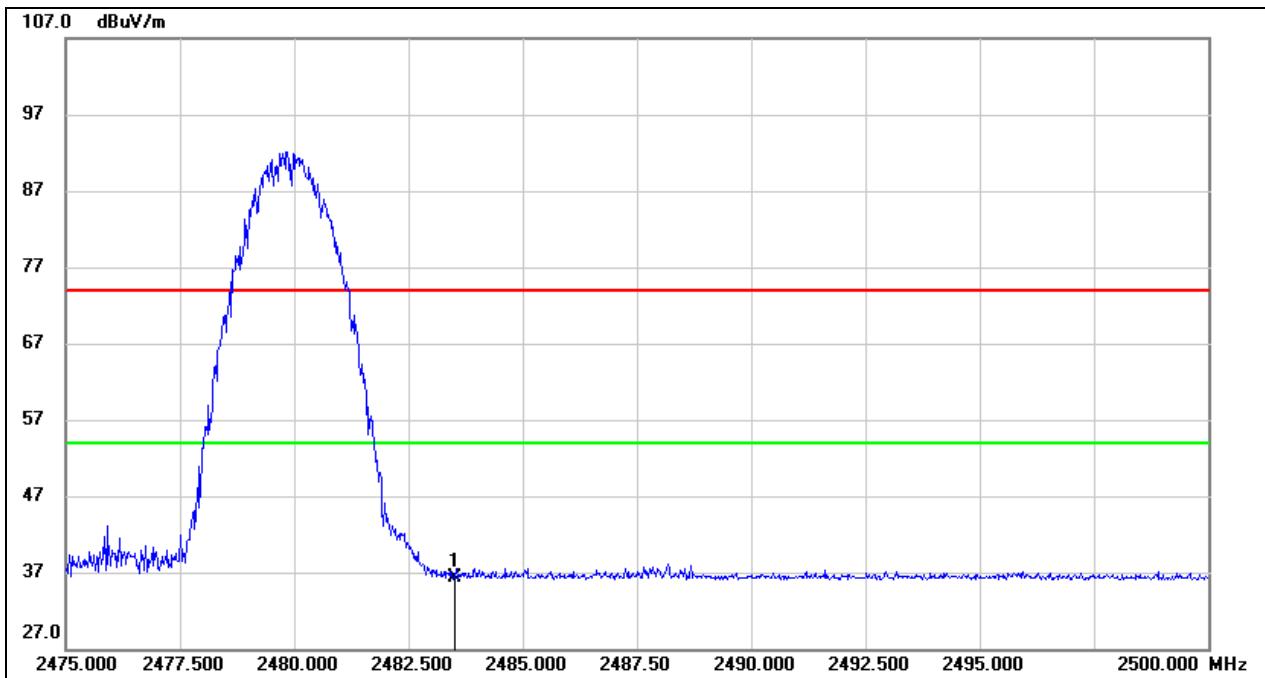AVG

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	3.27	33.10	36.37	54.00	-17.63	AVG


Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.  
4. For the transmitting duration, please refer to clause 7.1.  
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

### 8.1.2. GFSK(2Mbps) MODE

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


##### PEAK

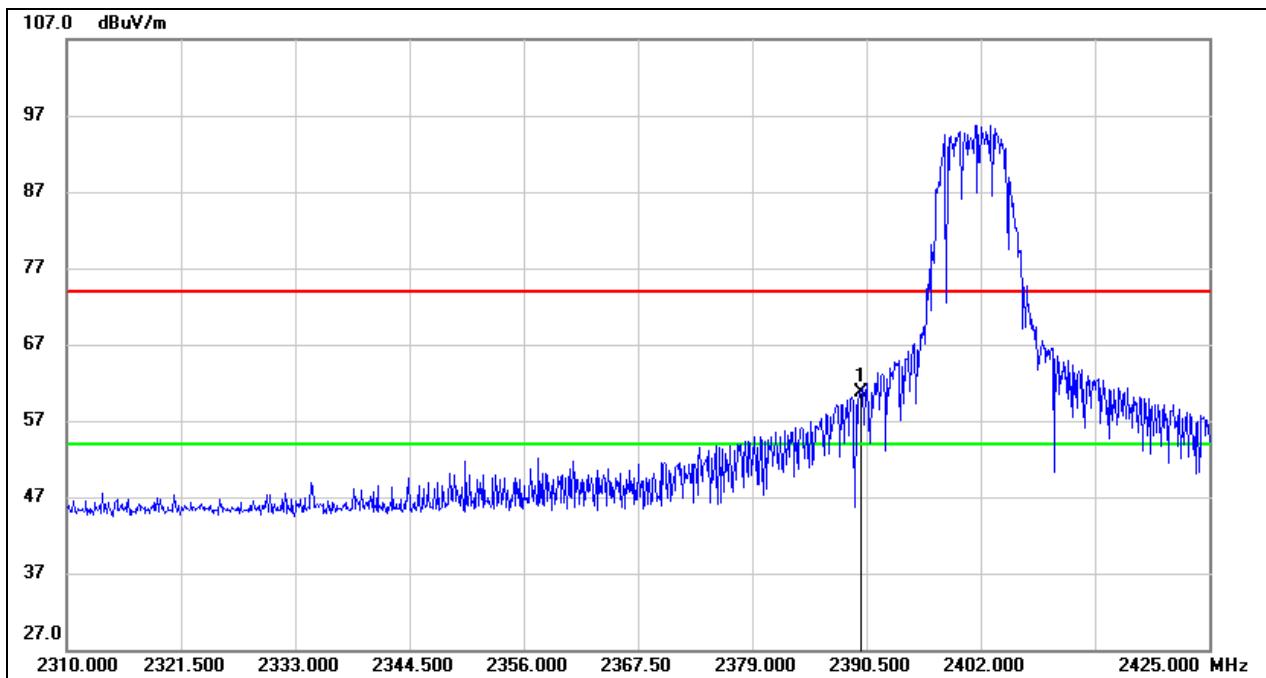

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.07	32.66	60.73	74.00	-13.27	peak

Note:


1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

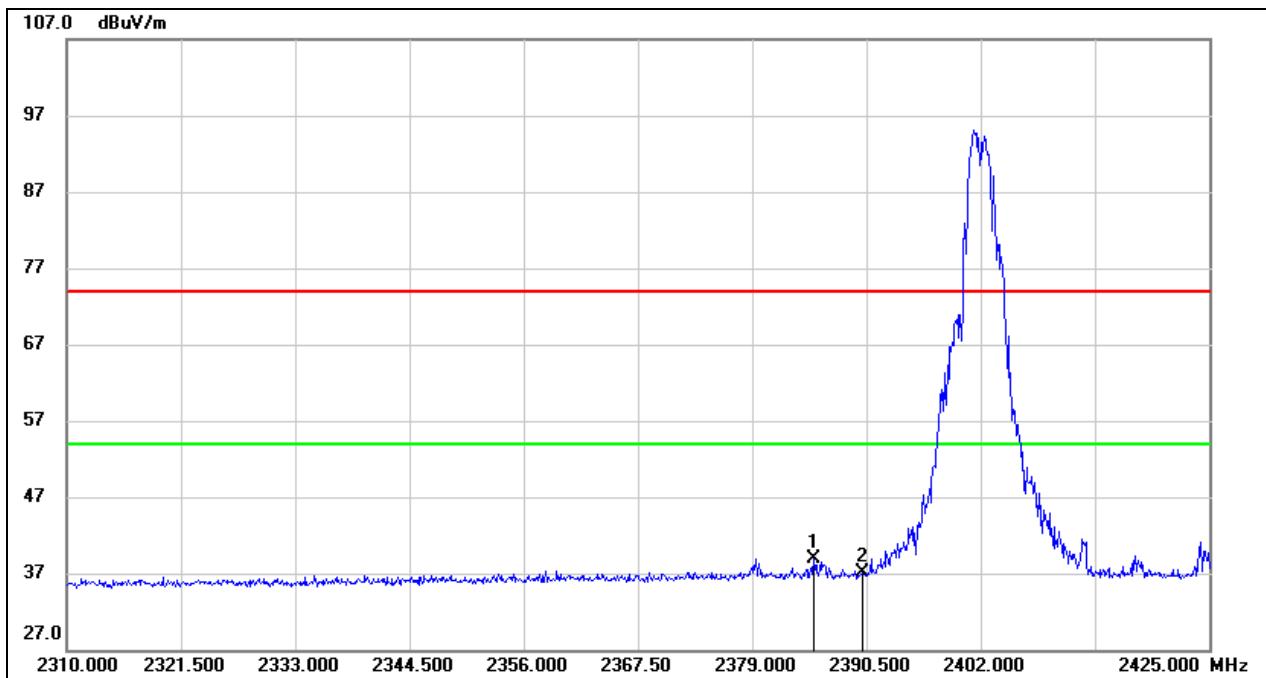AVG

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.210	6.28	32.62	38.90	54.00	-15.10	AVG
2	2390.000	4.43	32.66	37.09	54.00	-16.91	AVG


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

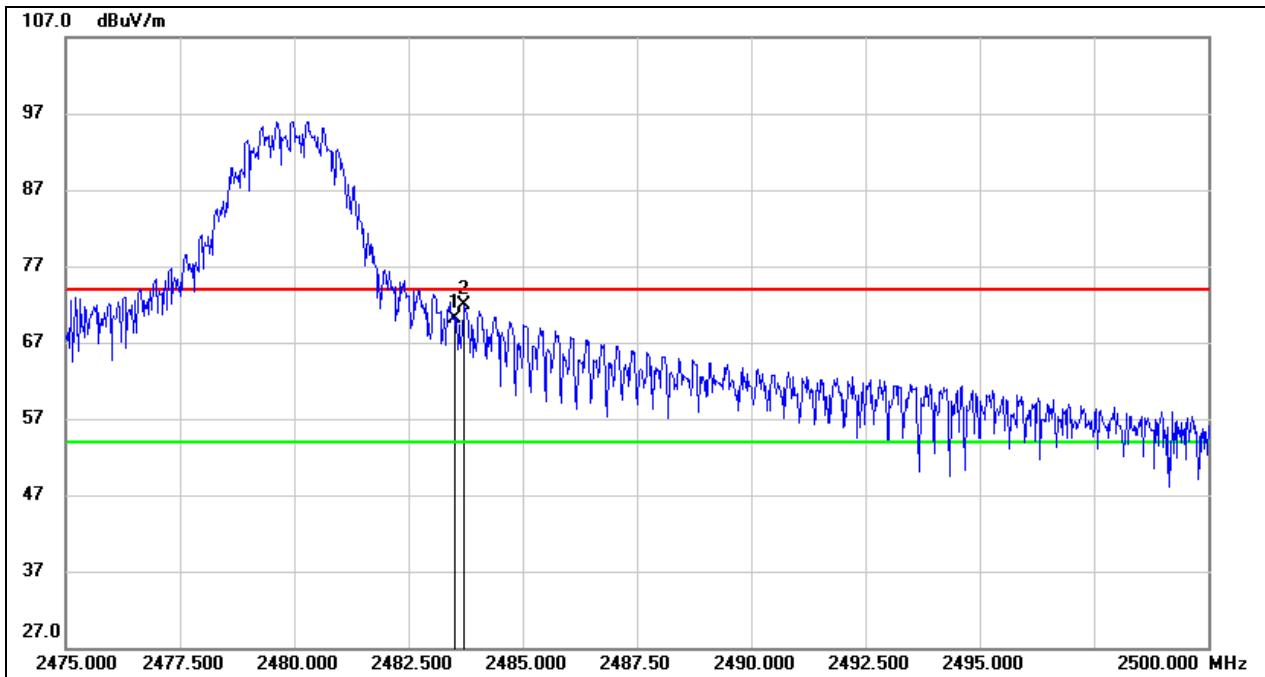RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)PEAK

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.95	33.10	70.05	74.00	-3.95	peak
2	2483.725	38.84	33.10	71.94	74.00	-2.06	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

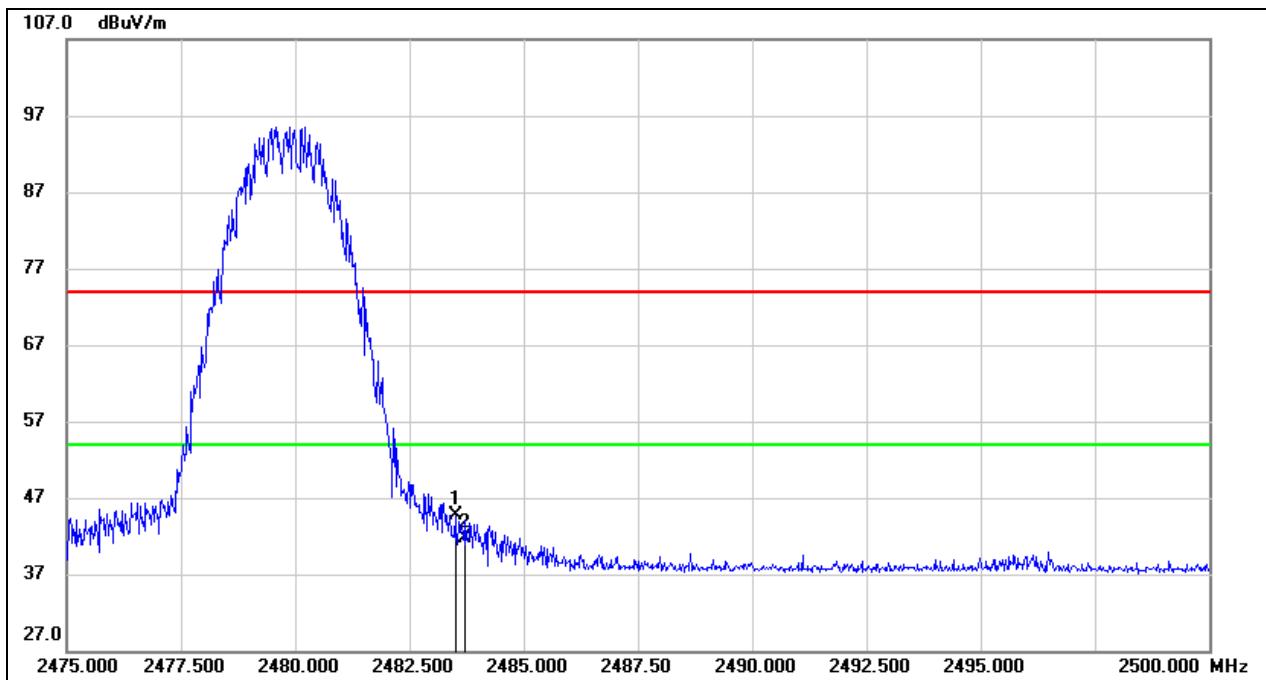AVG

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	11.69	33.10	44.79	54.00	-9.21	AVG
2	2483.725	8.65	33.10	41.75	54.00	-12.25	AVG


Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
4. For the transmitting duration, please refer to clause 7.1.  
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

### 8.1.3. GFSK(250Kbps) MODE


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

##### PEAK

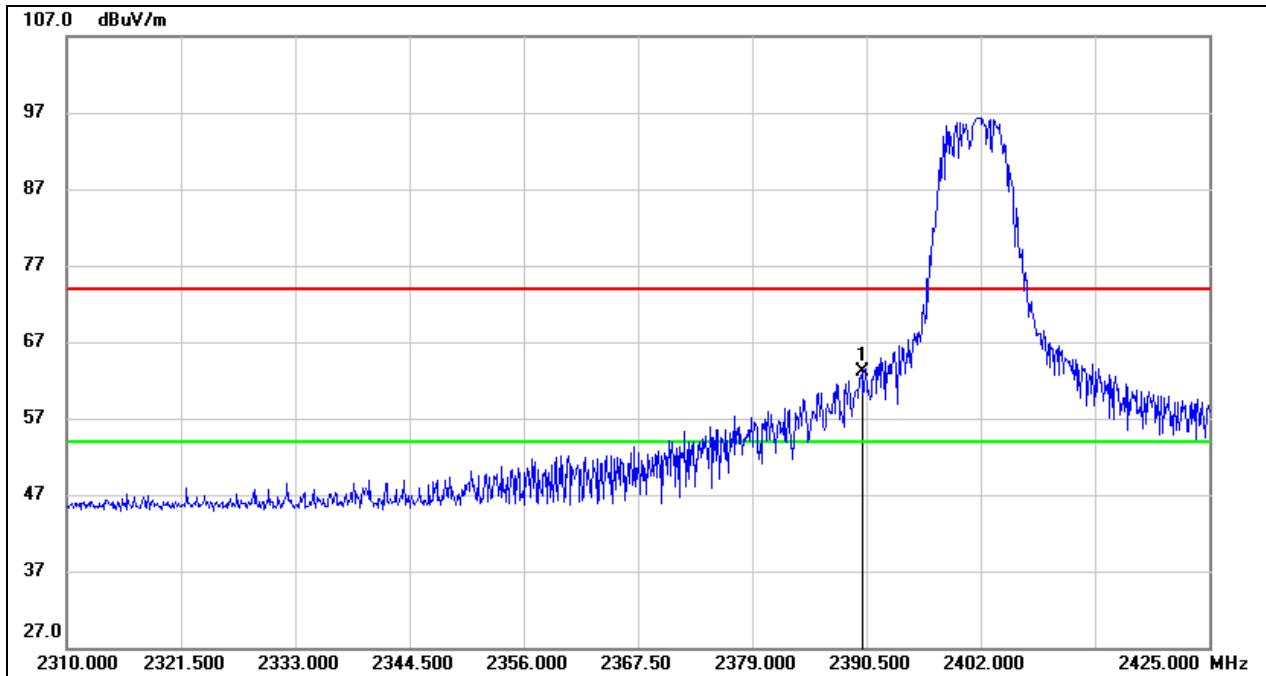


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	30.43	32.66	63.09	74.00	-10.91	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

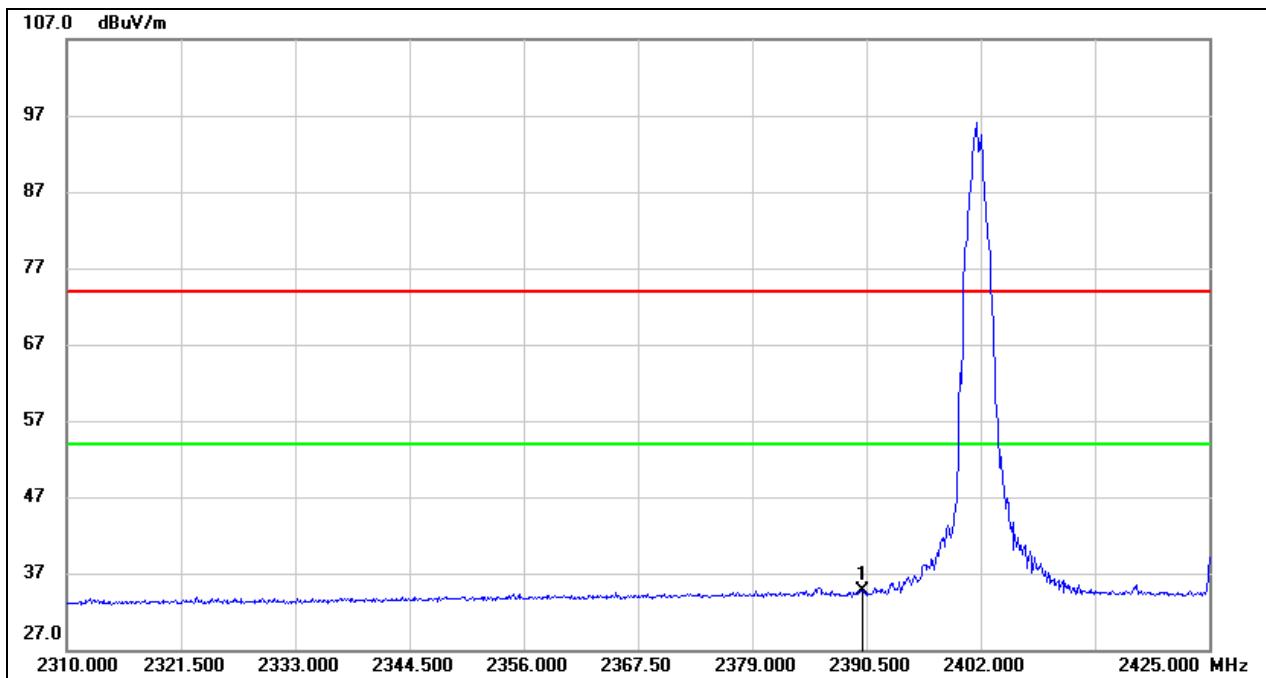AVG


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	2.00	32.66	34.66	54.00	-19.34	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
4. For the transmitting duration, please refer to clause 7.1.  
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

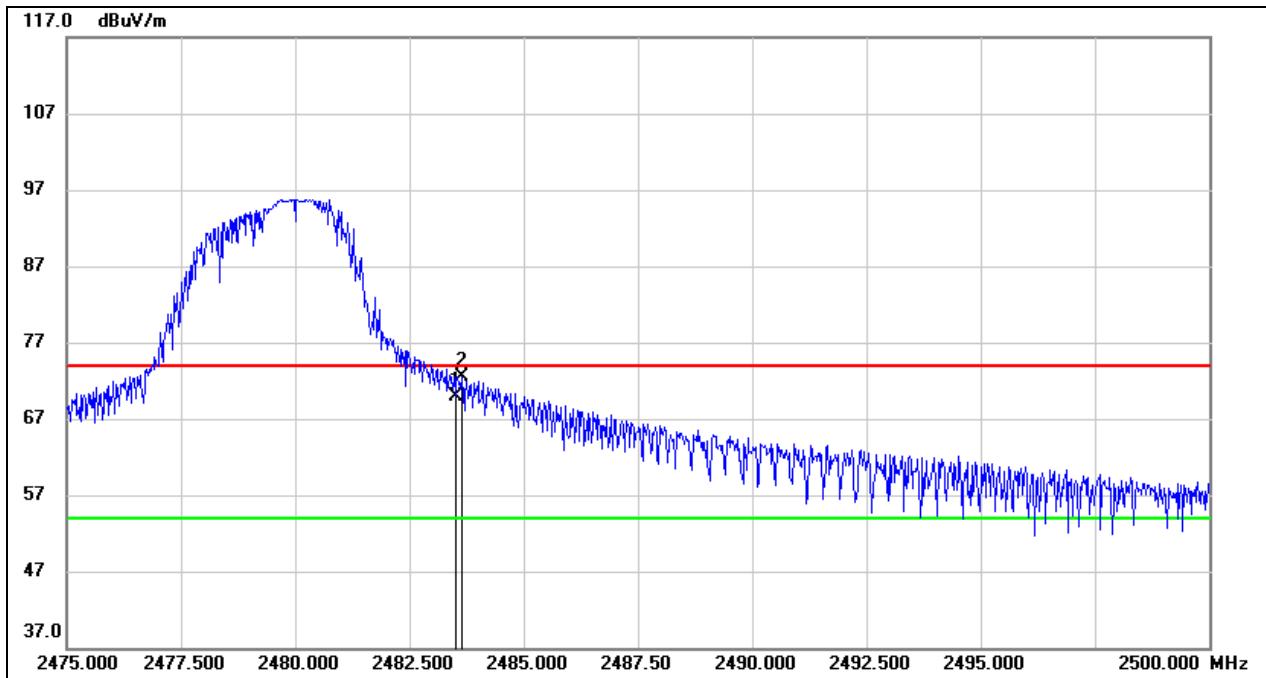**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.73	33.10	69.83	74.00	-4.17	peak
2	2483.650	39.43	33.10	72.53	74.00	-1.47	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

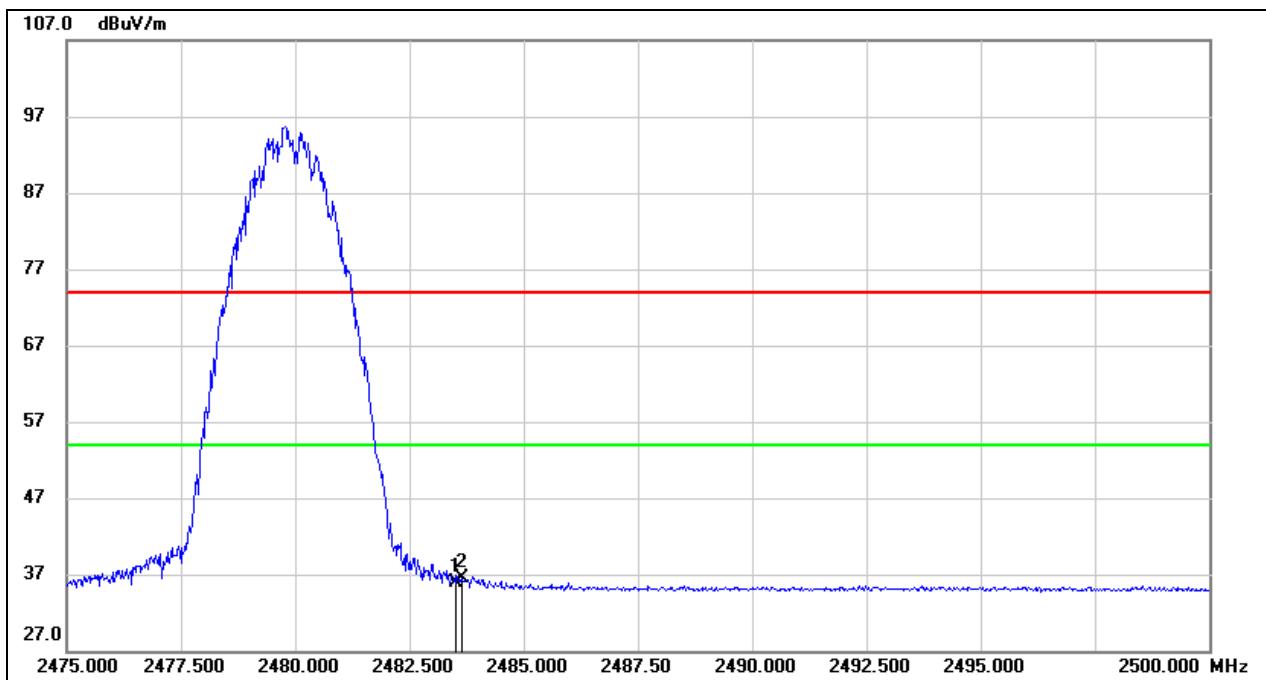AVG

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	2.78	33.10	35.88	54.00	-18.12	AVG
2	2483.650	3.36	33.10	36.46	54.00	-17.54	AVG


Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

## 8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

### 8.2.1. GFSK(250Kbps) MODE


#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

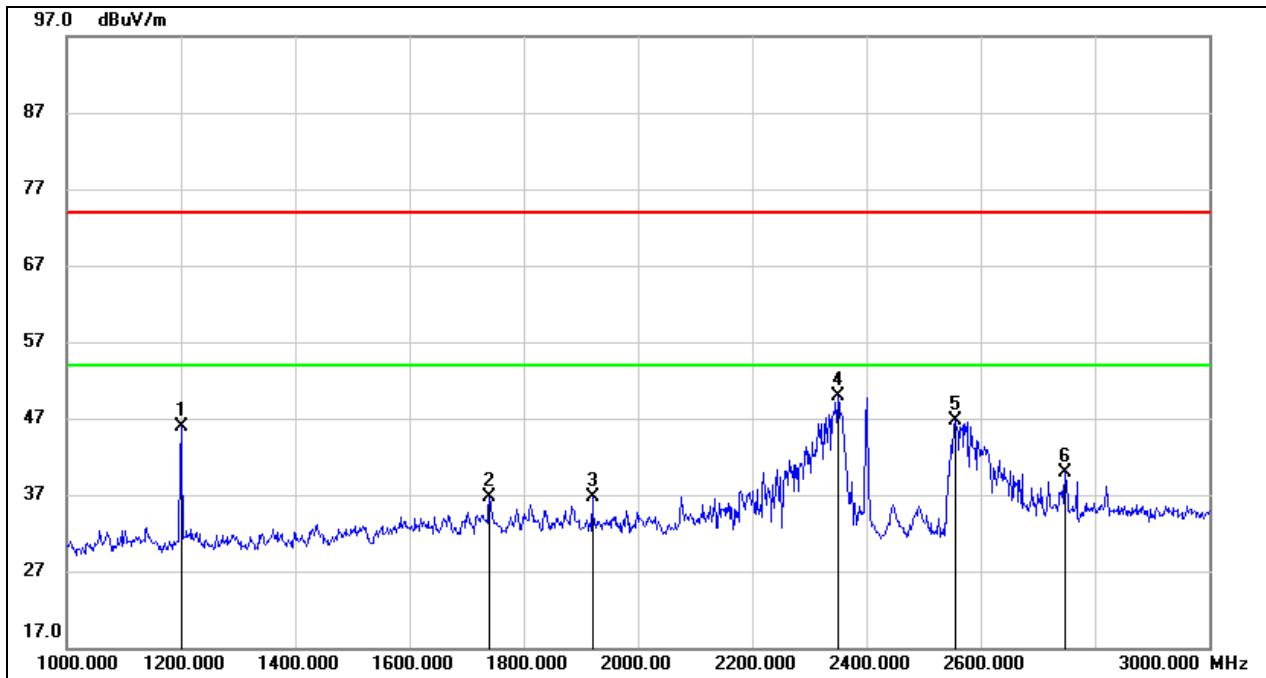

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	59.67	-13.71	45.96	74.00	-28.04	peak
2	1740.000	47.72	-10.96	36.76	74.00	-37.24	peak
3	1920.000	47.44	-10.81	36.63	74.00	-37.37	peak
4	2350.000	58.99	-9.14	49.85	74.00	-24.15	peak
5	2556.000	55.26	-8.64	46.62	74.00	-27.38	peak
6	2748.000	47.82	-7.90	39.92	74.00	-34.08	peak


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

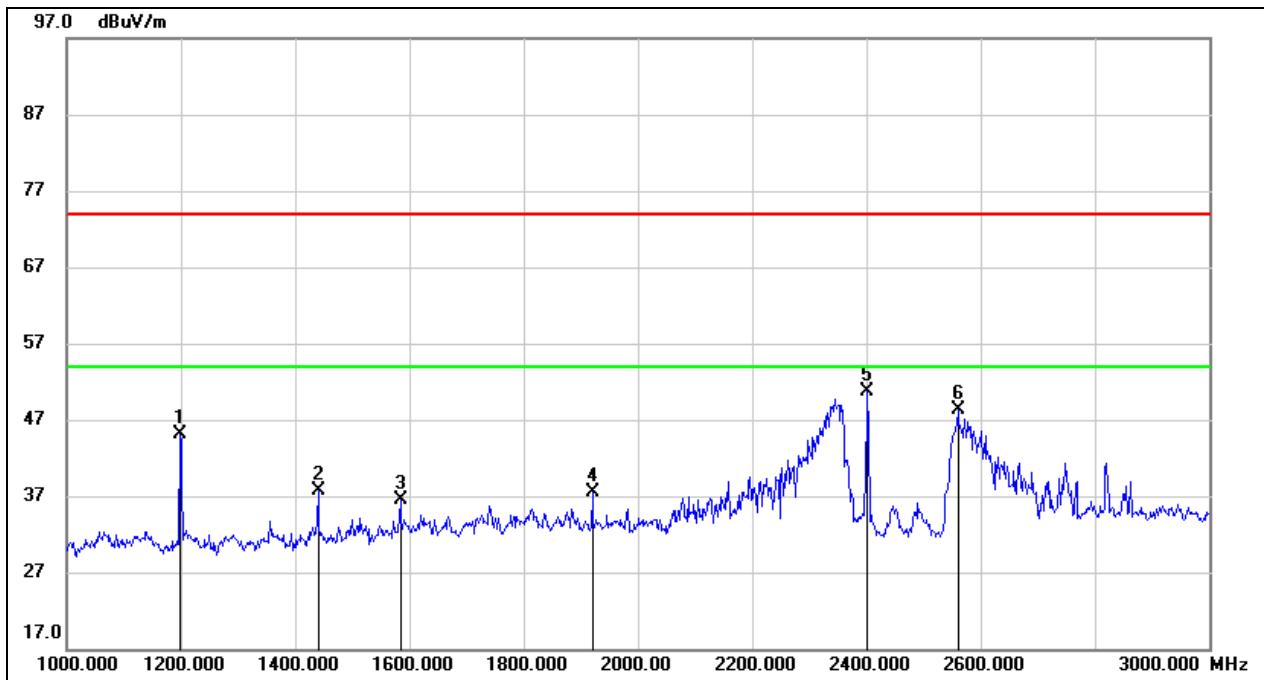HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	58.91	-13.73	45.18	74.00	-28.82	peak
2	1440.000	50.49	-12.79	37.70	74.00	-36.30	peak
3	1584.000	48.43	-11.94	36.49	74.00	-37.51	peak
4	1920.000	48.27	-10.81	37.46	74.00	-36.54	peak
5	2402.000	59.64	-8.94	50.70	74.00	-23.30	peak
6	2560.000	56.99	-8.63	48.36	74.00	-25.64	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

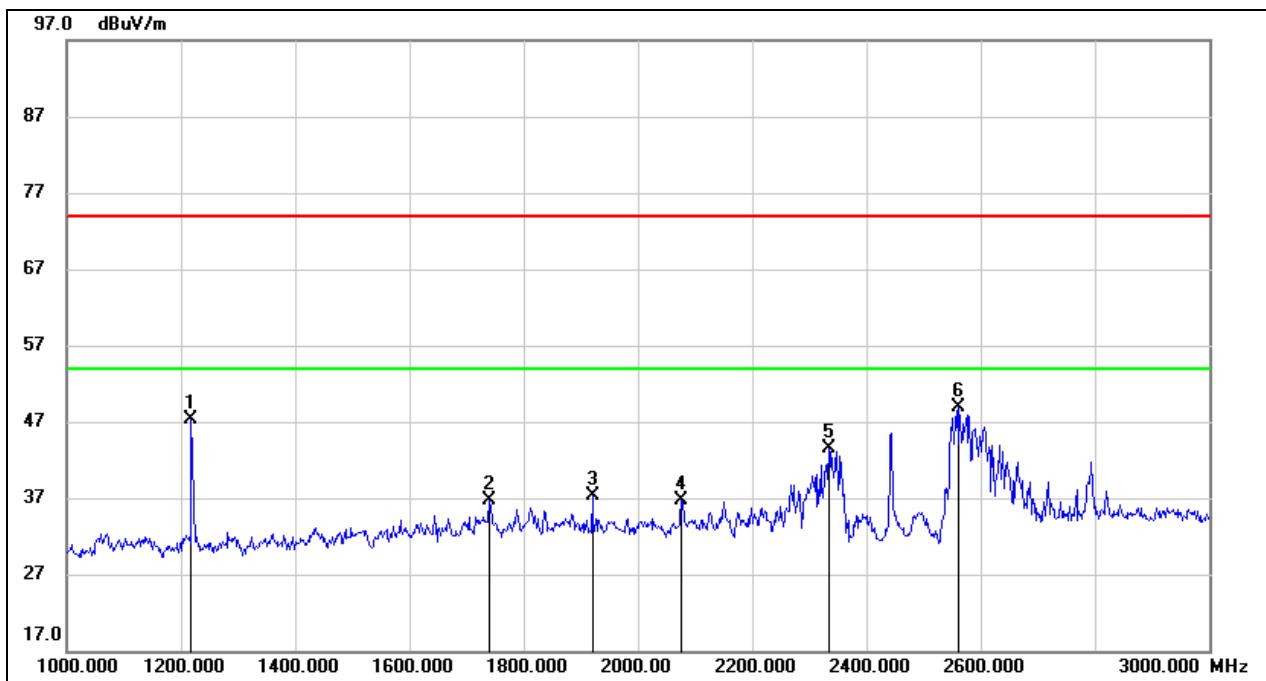HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1218.000	61.02	-13.65	47.37	74.00	-26.63	peak
2	1740.000	47.62	-10.96	36.66	74.00	-37.34	peak
3	1920.000	48.15	-10.81	37.34	74.00	-36.66	peak
4	2076.000	47.20	-10.49	36.71	74.00	-37.29	peak
5	2334.000	52.80	-9.20	43.60	74.00	-30.40	peak
6	2562.000	57.48	-8.63	48.85	74.00	-25.15	peak


Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

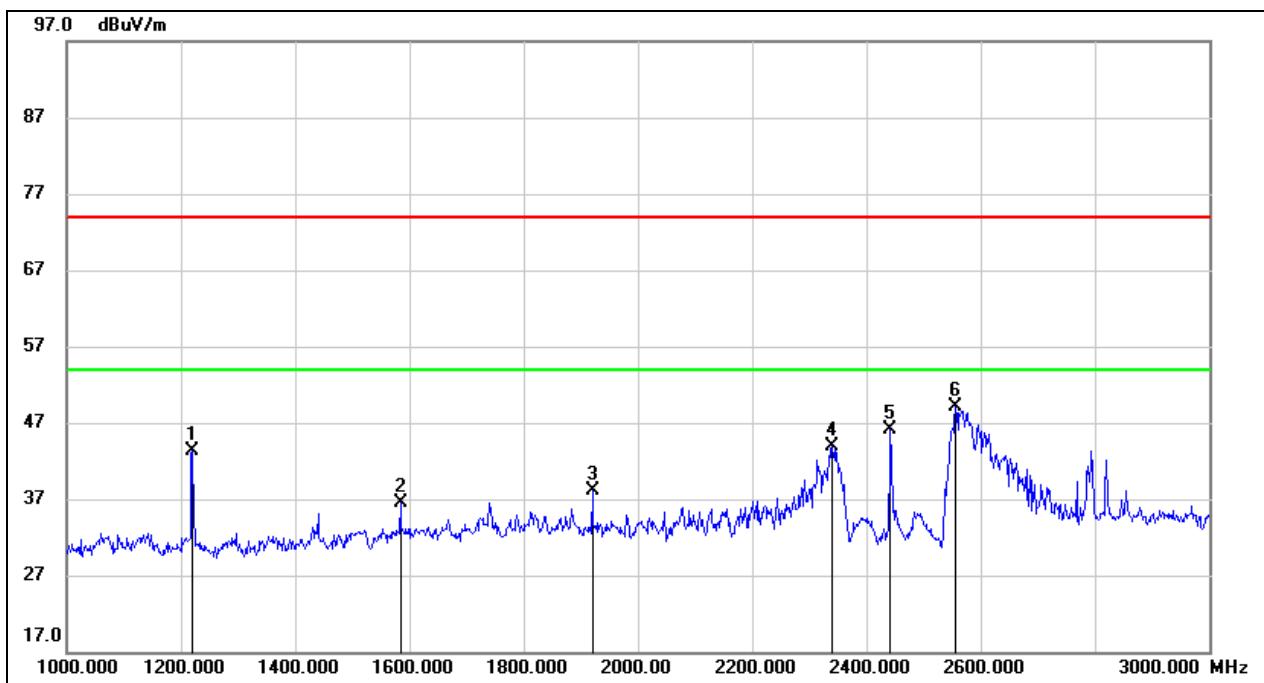HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1220.000	56.87	-13.64	43.23	74.00	-30.77	peak
2	1584.000	48.45	-11.94	36.51	74.00	-37.49	peak
3	1920.000	48.82	-10.81	38.01	74.00	-35.99	peak
4	2340.000	52.99	-9.18	43.81	74.00	-30.19	peak
5	2442.000	54.88	-8.85	46.03	74.00	-27.97	peak
6	2556.000	57.77	-8.64	49.13	74.00	-24.87	peak


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

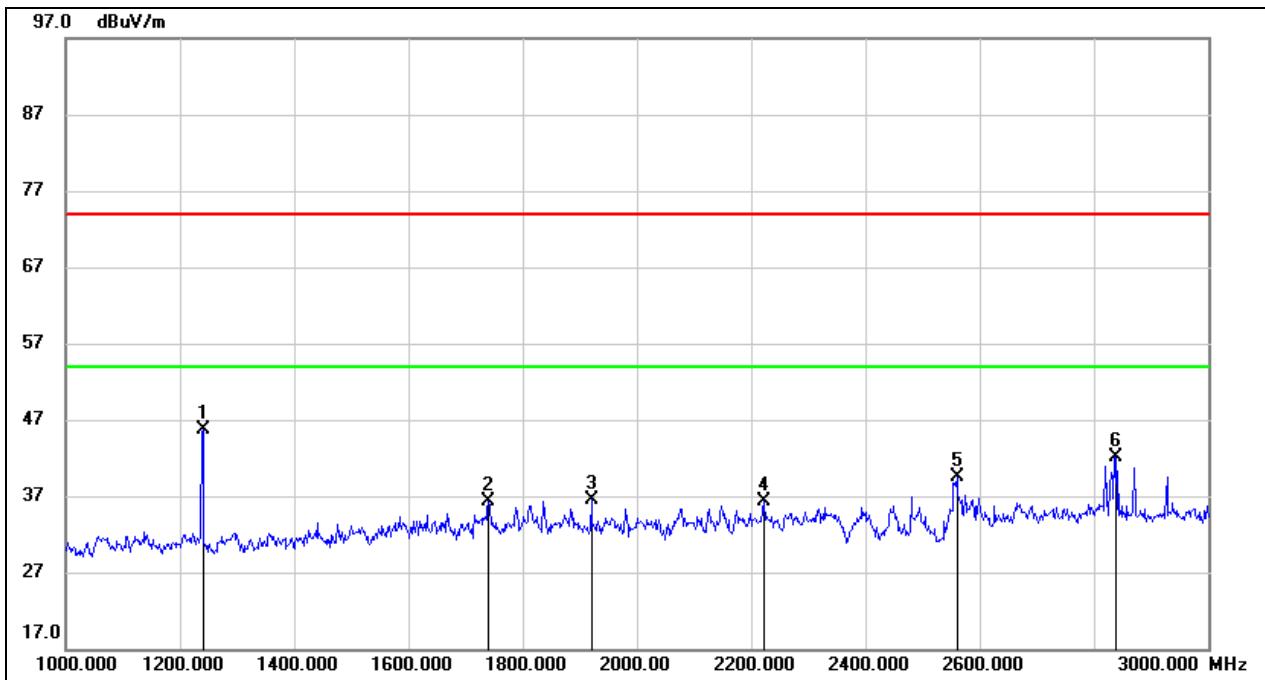HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1240.000	59.36	-13.58	45.78	74.00	-28.22	peak
2	1740.000	47.30	-10.96	36.34	74.00	-37.66	peak
3	1920.000	47.27	-10.81	36.46	74.00	-37.54	peak
4	2222.000	45.93	-9.62	36.31	74.00	-37.69	peak
5	2560.000	48.04	-8.63	39.41	74.00	-34.59	peak
6	2838.000	49.72	-7.56	42.16	74.00	-31.84	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

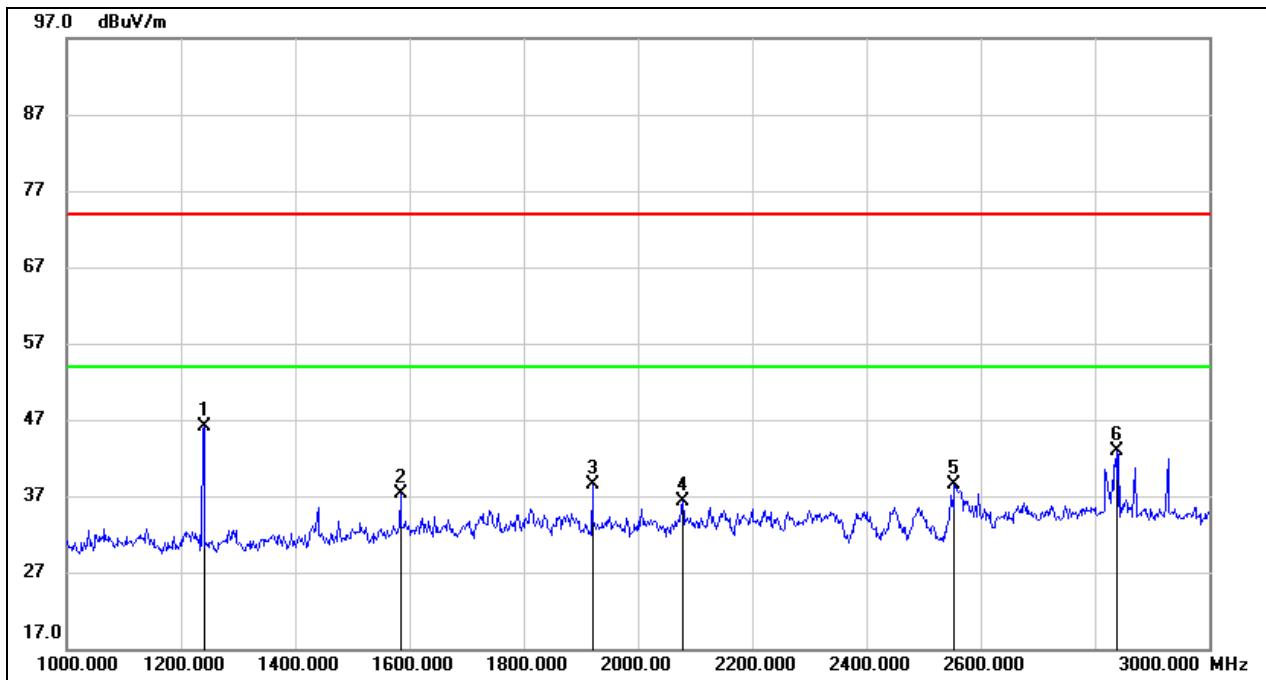HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1240.000	59.75	-13.58	46.17	74.00	-27.83	peak
2	1584.000	49.24	-11.94	37.30	74.00	-36.70	peak
3	1920.000	49.34	-10.81	38.53	74.00	-35.47	peak
4	2078.000	46.80	-10.48	36.32	74.00	-37.68	peak
5	2554.000	47.21	-8.63	38.58	74.00	-35.42	peak
6	2838.000	50.43	-7.56	42.87	74.00	-31.13	peak


Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

### 8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

#### 8.3.1. GFSK(1Mbps) MODE


##### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

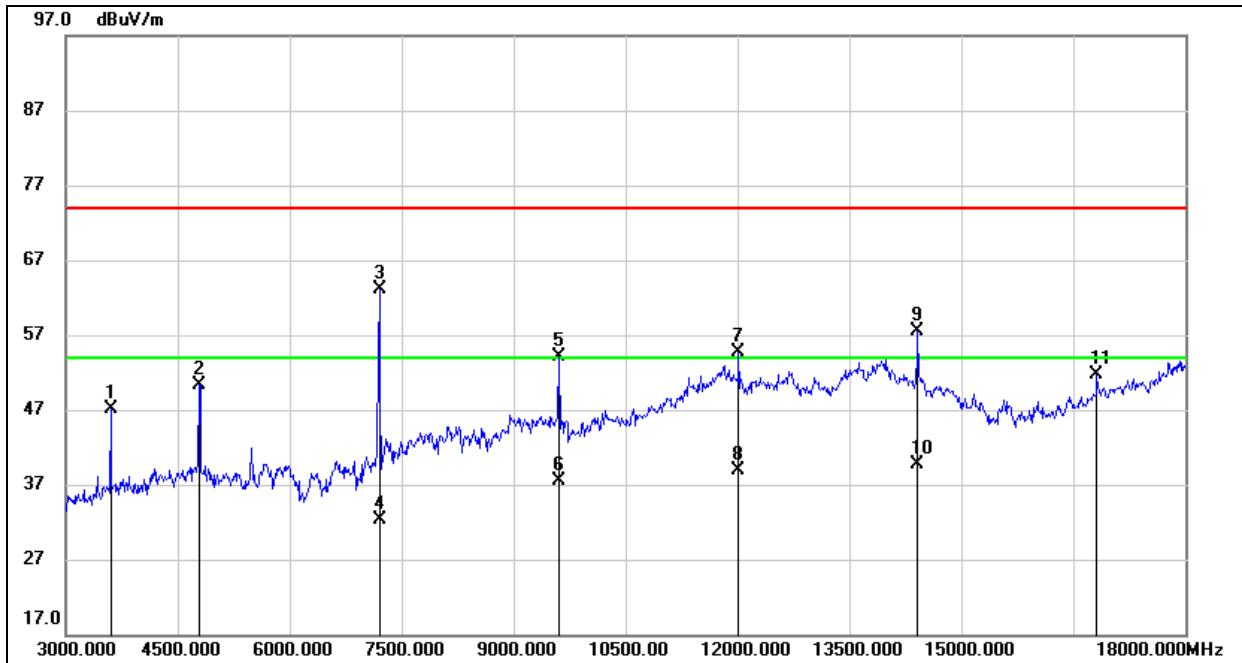

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3600.000	52.43	-5.28	47.15	74.00	-26.85	peak
2	4785.000	51.48	-1.20	50.28	74.00	-23.72	peak
3	7200.000	57.94	5.10	63.04	74.00	-10.96	peak
4	7200.000	27.27	5.10	32.37	54.00	-21.63	AVG
5	9600.000	43.91	10.13	54.04	74.00	-19.96	peak
6	9600.000	27.45	10.13	37.58	54.00	-16.42	AVG
7	12015.000	37.62	17.08	54.70	74.00	-19.30	peak
8	12015.000	21.89	17.08	38.97	54.00	-15.03	AVG
9	14415.000	38.62	18.86	57.48	74.00	-16.52	peak
10	14415.000	20.80	18.86	39.66	54.00	-14.34	AVG
11	16815.000	33.37	18.32	51.69	74.00	-22.31	peak

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

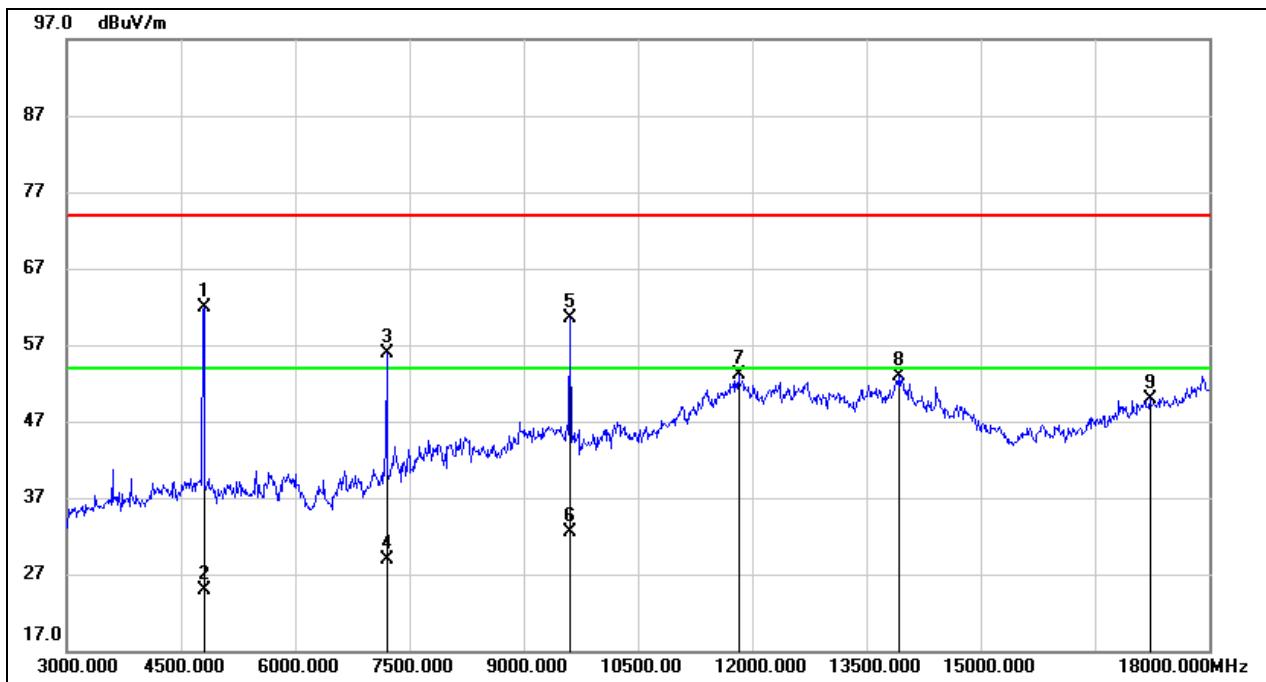HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	63.04	-1.14	61.90	74.00	-12.10	peak
2	4800.000	26.03	-1.14	24.89	54.00	-29.11	AVG
3	7200.000	50.88	5.10	55.98	74.00	-18.02	peak
4	7200.000	23.75	5.10	28.85	54.00	-25.15	AVG
5	9600.000	50.32	10.13	60.45	74.00	-13.55	peak
6	9600.000	22.36	10.13	32.49	54.00	-21.51	AVG
7	11820.000	35.92	17.21	53.13	74.00	-20.87	peak
8	13920.000	32.27	20.58	52.85	74.00	-21.15	peak
9	17220.000	29.76	20.16	49.92	74.00	-24.08	peak

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

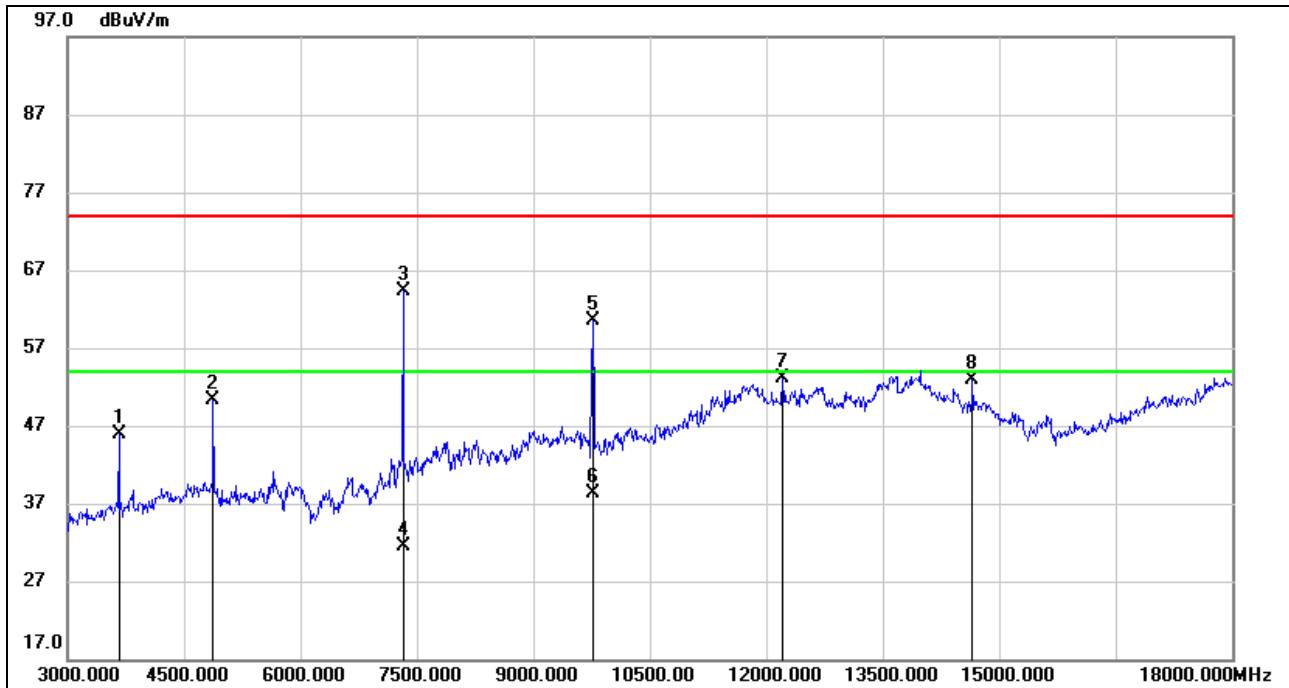HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	50.85	-4.99	45.86	74.00	-28.14	peak
2	4875.000	51.53	-1.13	50.40	74.00	-23.60	peak
3	7320.000	58.75	5.52	64.27	74.00	-9.73	peak
4	7320.000	25.97	5.52	31.49	54.00	-22.51	AVG
5	9765.000	50.53	10.02	60.55	74.00	-13.45	peak
6	9765.000	28.18	10.02	38.20	54.00	-15.80	AVG
7	12210.000	36.33	16.77	53.10	74.00	-20.90	peak
8	14655.000	35.27	17.61	52.88	74.00	-21.12	peak

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

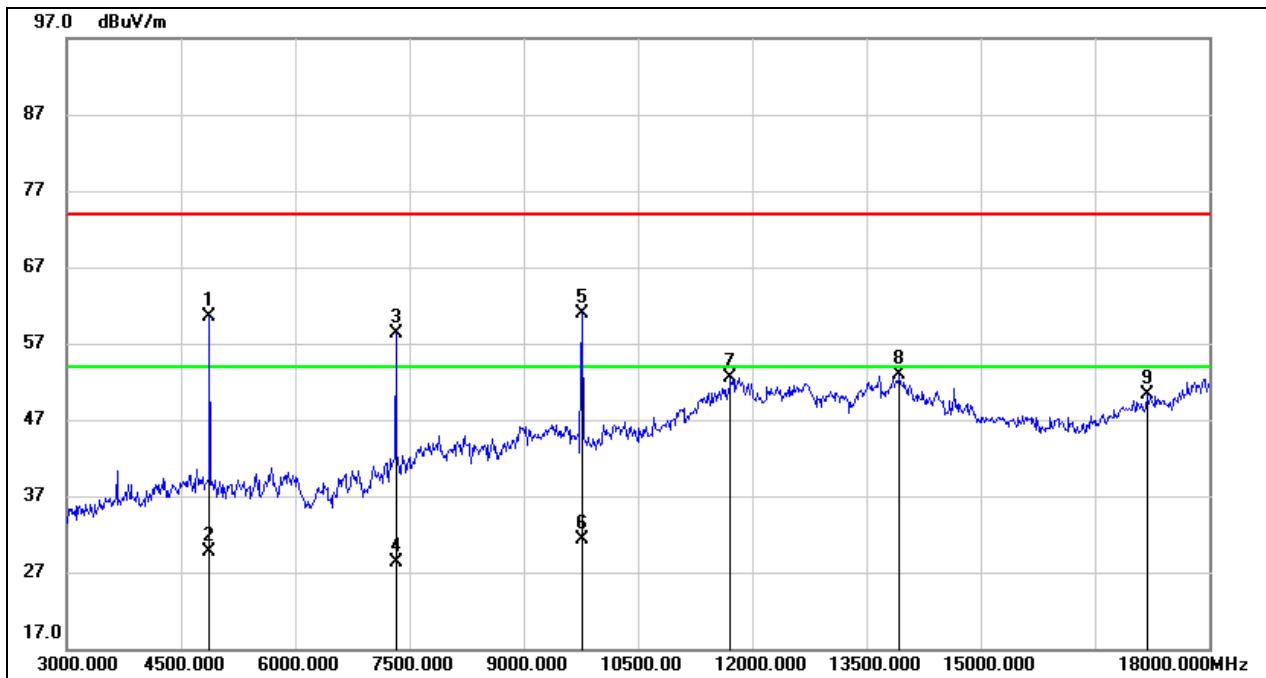HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	61.63	-1.13	60.50	74.00	-13.50	peak
2	4875.000	30.90	-1.13	29.77	54.00	-24.23	AVG
3	7320.000	52.71	5.52	58.23	74.00	-15.77	peak
4	7320.000	22.80	5.52	28.32	54.00	-25.68	AVG
5	9765.000	50.98	10.02	61.00	74.00	-13.00	peak
6	9765.000	21.20	10.02	31.22	54.00	-22.78	AVG
7	11715.000	35.88	16.68	52.56	74.00	-21.44	peak
8	13935.000	32.36	20.59	52.95	74.00	-21.05	peak
9	17190.000	30.17	20.09	50.26	74.00	-23.74	peak

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

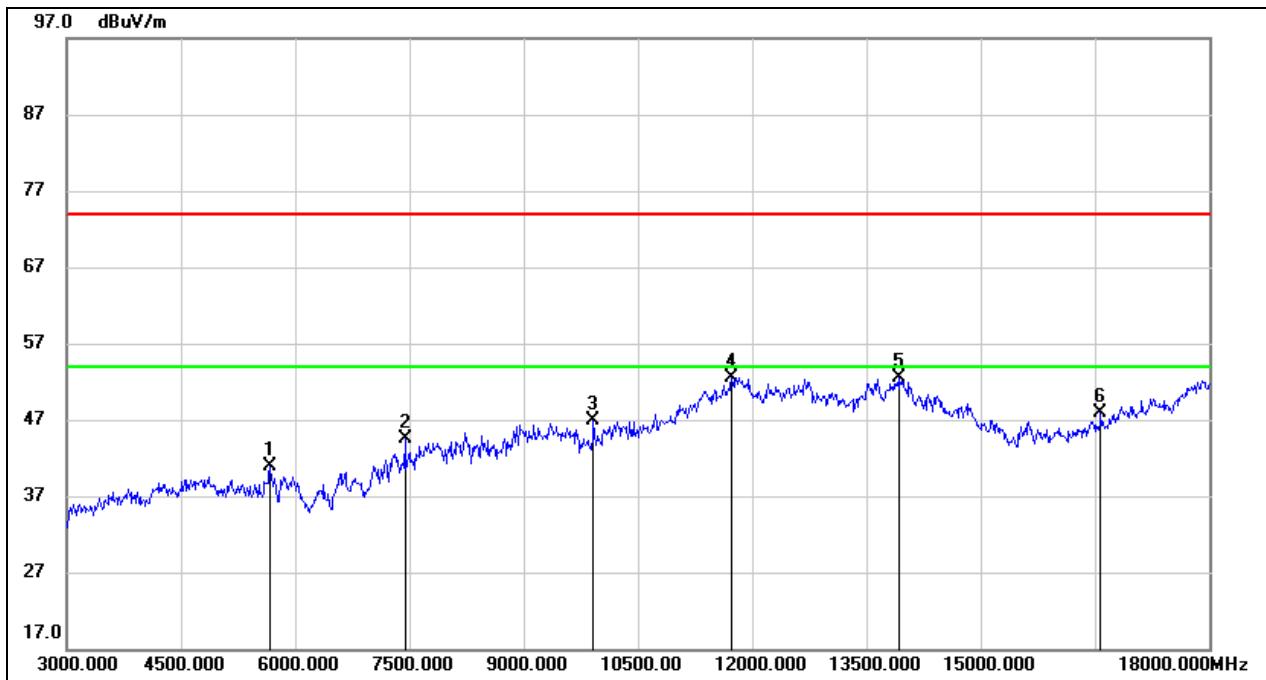HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5670.000	40.18	0.68	40.86	74.00	-33.14	peak
2	7440.000	38.67	5.75	44.42	74.00	-29.58	peak
3	9915.000	36.46	10.35	46.81	74.00	-27.19	peak
4	11730.000	35.81	16.77	52.58	74.00	-21.42	peak
5	13920.000	31.92	20.58	52.50	74.00	-21.50	peak
6	16575.000	30.10	17.74	47.84	74.00	-26.16	peak

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

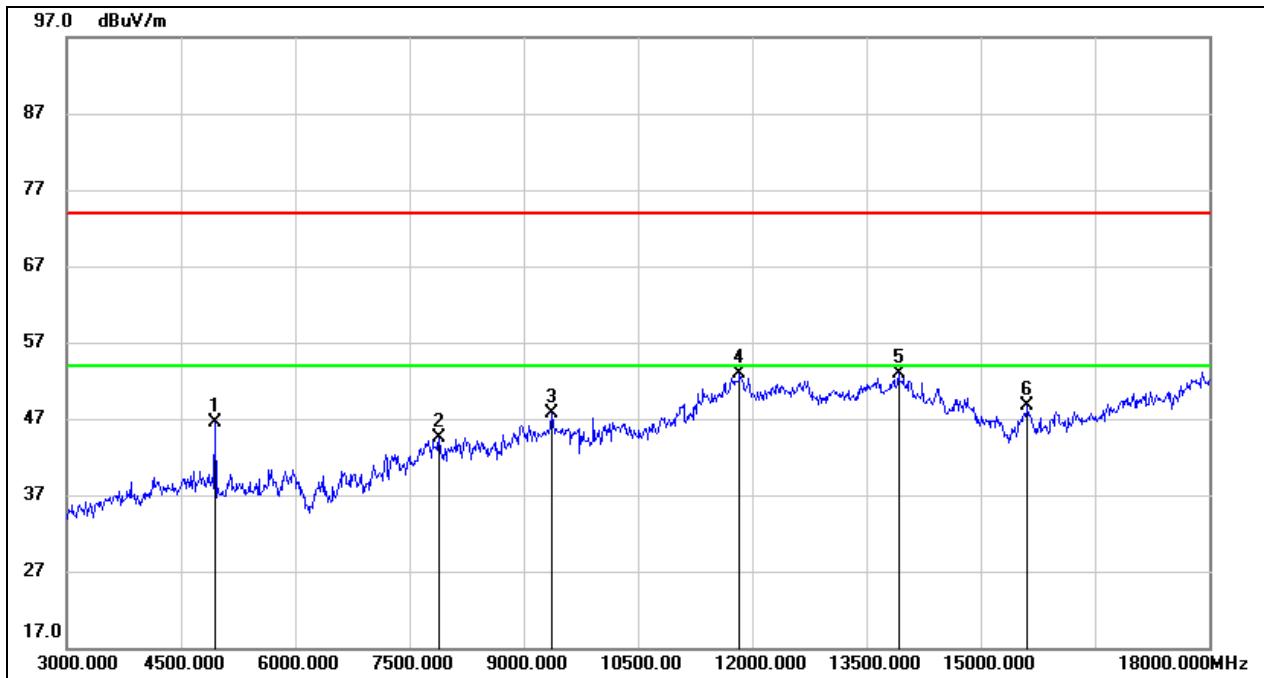
HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	47.71	-1.12	46.59	74.00	-27.41	peak
2	7890.000	38.76	5.75	44.51	74.00	-29.49	peak
3	9360.000	38.18	9.43	47.61	74.00	-26.39	peak
4	11835.000	35.61	17.20	52.81	74.00	-21.19	peak
5	13920.000	32.23	20.58	52.81	74.00	-21.19	peak
6	15615.000	33.26	15.41	48.67	74.00	-25.33	peak

Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


### 8.3.2. GFSK(2Mbps) MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

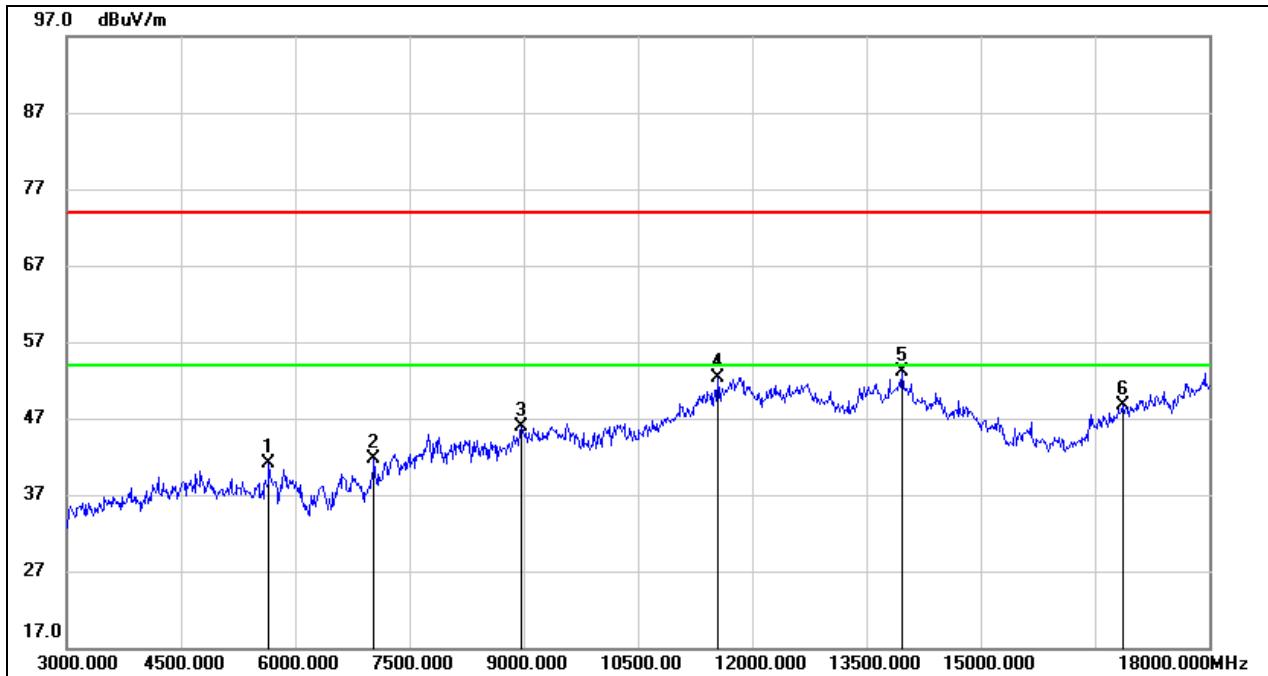

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	40.45	0.69	41.14	74.00	-32.86	peak
2	7035.000	37.33	4.46	41.79	74.00	-32.21	peak
3	8970.000	36.68	9.17	45.85	74.00	-28.15	peak
4	11550.000	36.54	15.83	52.37	74.00	-21.63	peak
5	13965.000	32.51	20.61	53.12	74.00	-20.88	peak
6	16860.000	30.19	18.48	48.67	74.00	-25.33	peak


Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

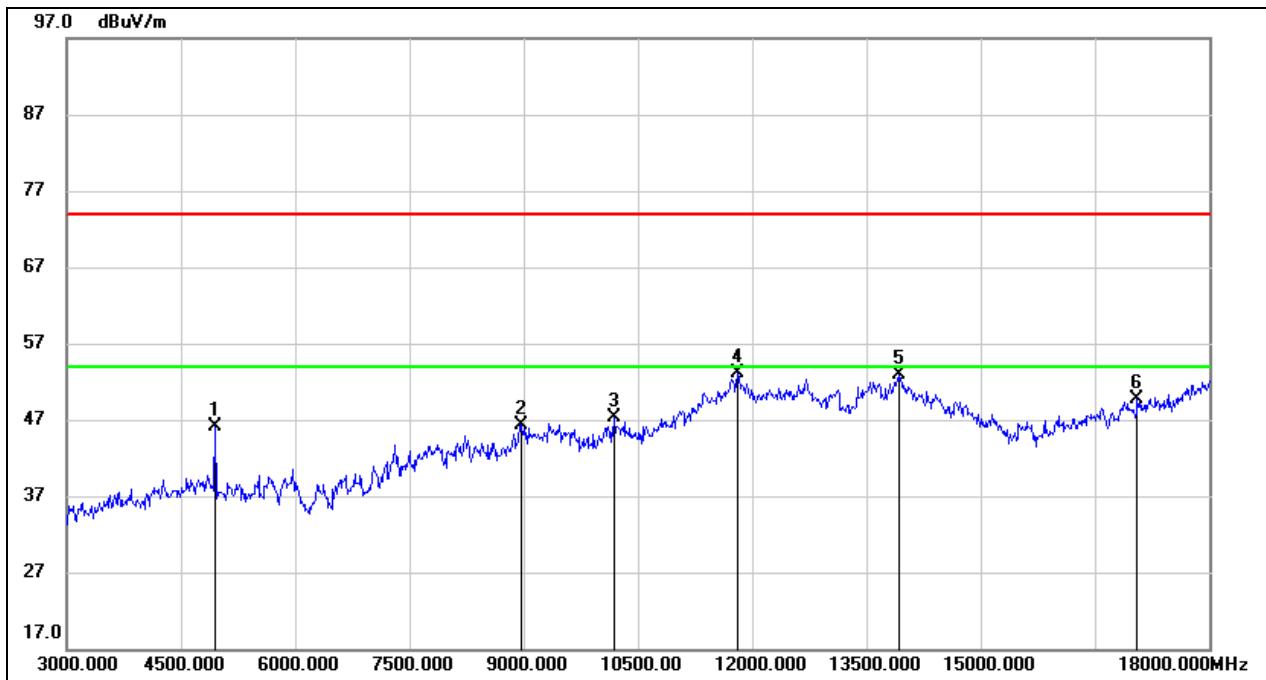HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	47.18	-1.12	46.06	74.00	-27.94	peak
2	8970.000	37.19	9.17	46.36	74.00	-27.64	peak
3	10185.000	36.47	10.90	47.37	74.00	-26.63	peak
4	11805.000	35.91	17.21	53.12	74.00	-20.88	peak
5	13920.000	32.24	20.58	52.82	74.00	-21.18	peak
6	17055.000	30.41	19.28	49.69	74.00	-24.31	peak

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

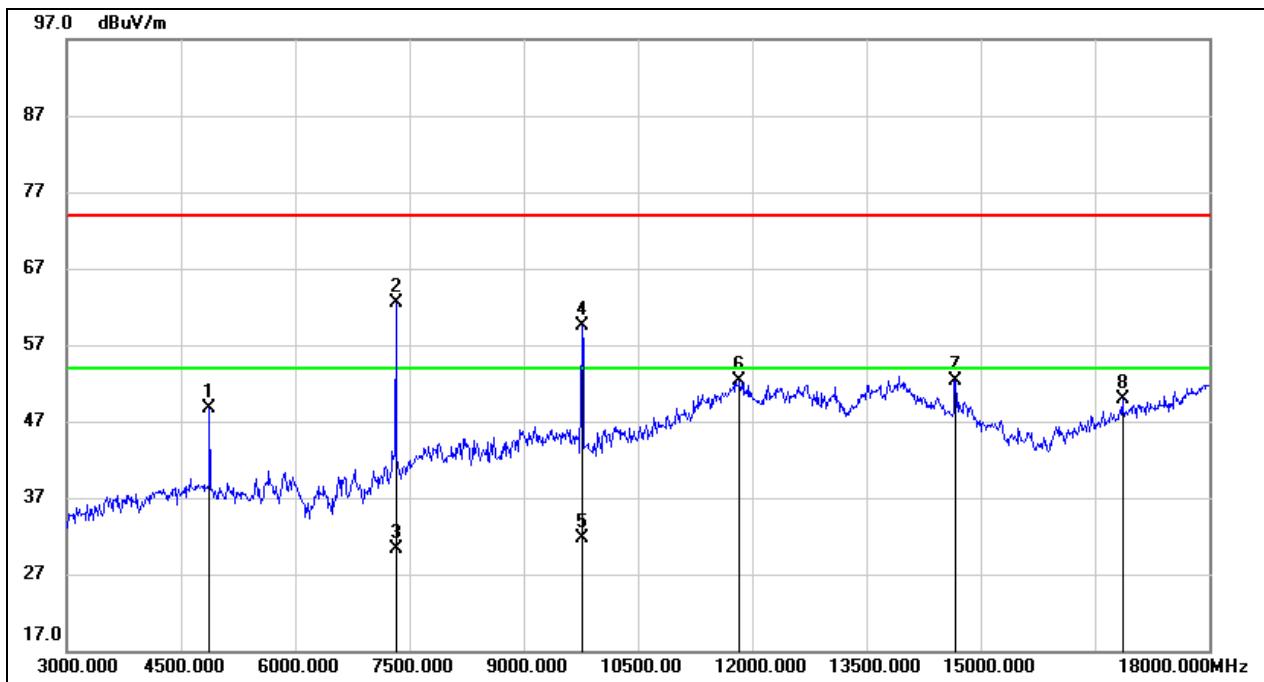HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	49.91	-1.13	48.78	74.00	-25.22	peak
2	7320.000	56.91	5.52	62.43	74.00	-11.57	peak
3	7320.000	24.77	5.52	30.29	54.00	-23.71	AVG
4	9765.000	49.51	10.02	59.53	74.00	-14.47	peak
5	9765.000	21.75	10.02	31.77	54.00	-22.23	AVG
6	11835.000	35.16	17.20	52.36	74.00	-21.64	peak
7	14670.000	34.80	17.58	52.38	74.00	-21.62	peak
8	16860.000	31.50	18.48	49.98	74.00	-24.02	peak

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

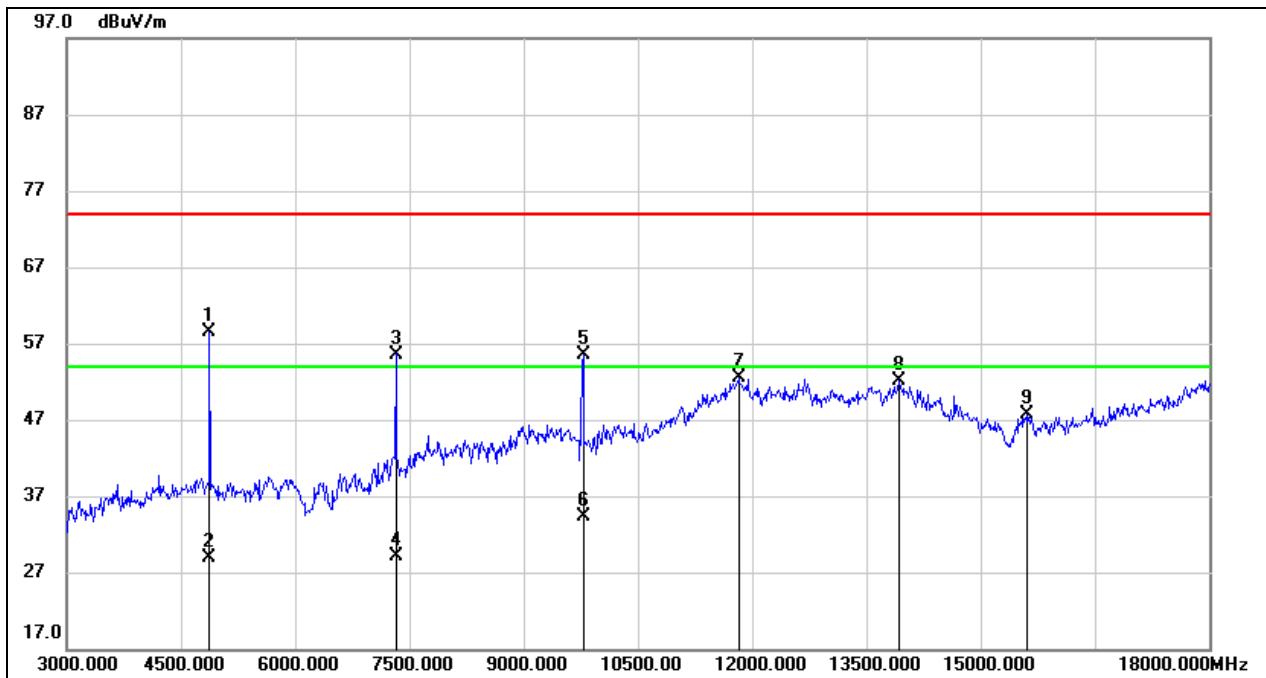**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	59.68	-1.13	58.55	74.00	-15.45	peak
2	4875.000	30.10	-1.13	28.97	54.00	-25.03	AVG
3	7320.000	50.08	5.52	55.60	74.00	-18.40	peak
4	7320.000	23.61	5.52	29.13	54.00	-24.87	AVG
5	9780.000	45.53	9.99	55.52	74.00	-18.48	peak
6	9780.000	24.30	9.99	34.29	54.00	-19.71	AVG
7	11820.000	35.33	17.21	52.54	74.00	-21.46	peak
8	13920.000	31.54	20.58	52.12	74.00	-21.88	peak
9	15615.000	32.39	15.41	47.80	74.00	-26.20	peak

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

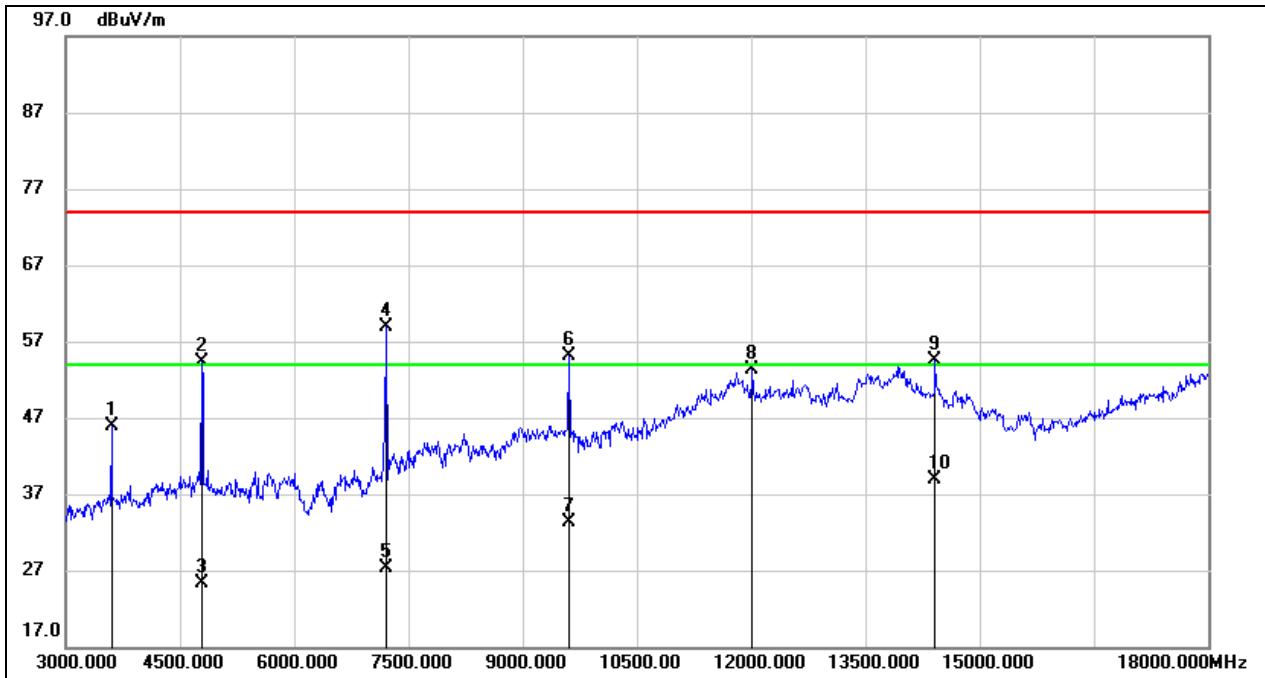HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3600.000	51.24	-5.28	45.96	74.00	-28.04	peak
2	4785.000	55.57	-1.20	54.37	74.00	-19.63	peak
3	4785.000	26.56	-1.20	25.36	54.00	-28.64	AVG
4	7215.000	53.83	5.16	58.99	74.00	-15.01	peak
5	7215.000	22.19	5.16	27.35	54.00	-26.65	AVG
6	9600.000	44.92	10.13	55.05	74.00	-18.95	peak
7	9600.000	23.08	10.13	33.21	54.00	-20.79	AVG
8	12015.000	36.17	17.08	53.25	74.00	-20.75	peak
9	14415.000	35.64	18.86	54.50	74.00	-19.50	peak
10	14415.000	20.07	18.86	38.93	54.00	-15.07	AVG

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

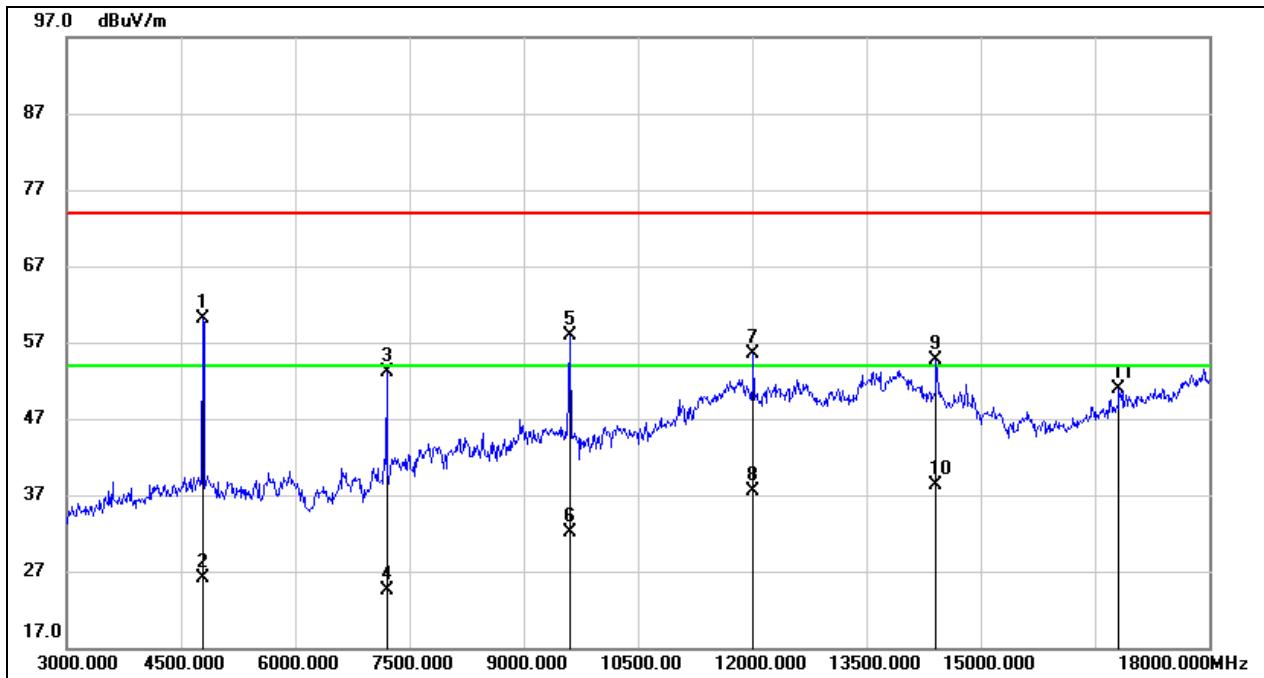HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	61.32	-1.20	60.12	74.00	-13.88	peak
2	4785.000	27.37	-1.20	26.17	54.00	-27.83	AVG
3	7200.000	47.93	5.10	53.03	74.00	-20.97	peak
4	7200.000	19.48	5.10	24.58	54.00	-29.42	AVG
5	9600.000	47.77	10.13	57.90	74.00	-16.10	peak
6	9600.000	22.05	10.13	32.18	54.00	-21.82	AVG
7	12015.000	38.34	17.08	55.42	74.00	-18.58	peak
8	12015.000	20.39	17.08	37.47	54.00	-16.53	AVG
9	14415.000	35.75	18.86	54.61	74.00	-19.39	peak
10	14415.000	19.36	18.86	38.22	54.00	-15.78	AVG
11	16815.000	32.61	18.32	50.93	74.00	-23.07	peak

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### 8.3.1. GFSK(250Kbps) MODE


#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

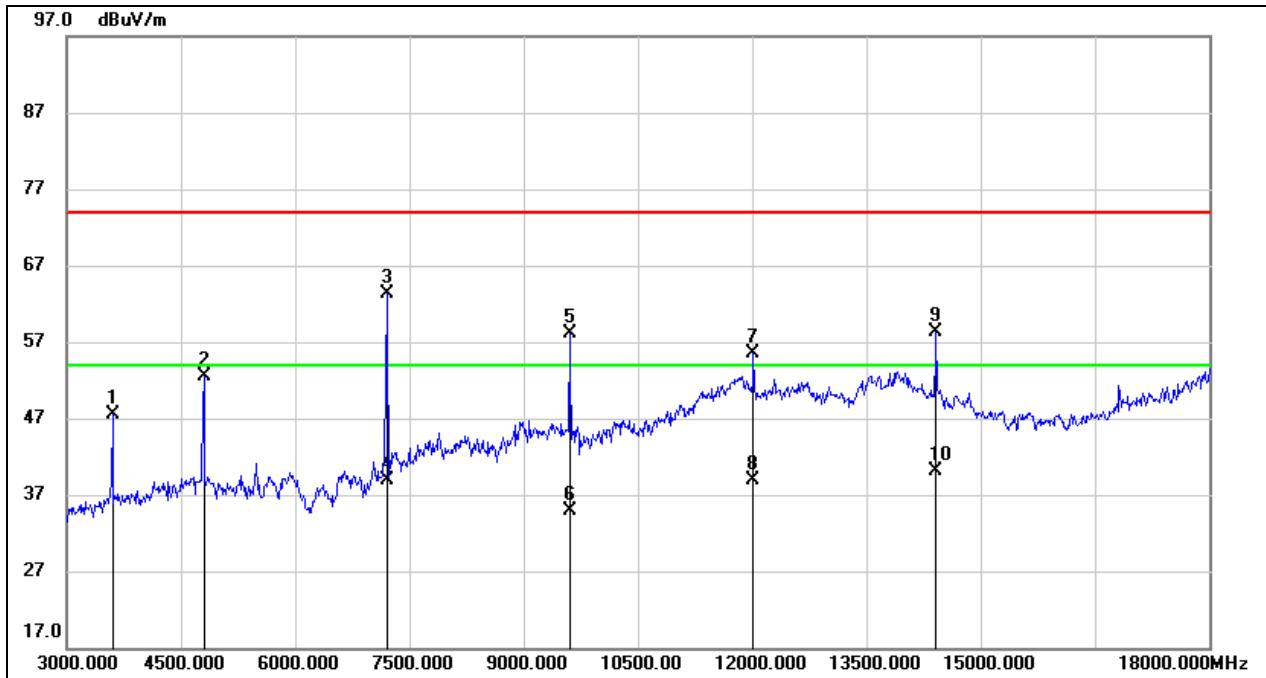

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3600.000	52.72	-5.28	47.44	74.00	-26.56	peak
2	4800.000	53.59	-1.14	52.45	74.00	-21.55	peak
3	7200.000	58.27	5.10	63.37	74.00	-10.63	peak
4	7200.000	33.87	5.10	38.97	54.00	-15.03	AVG
5	9600.000	47.93	10.13	58.06	74.00	-15.94	peak
6	9600.000	24.75	10.13	34.88	54.00	-19.12	AVG
7	12015.000	38.37	17.08	55.45	74.00	-18.55	peak
8	12015.000	21.74	17.08	38.82	54.00	-15.18	AVG
9	14415.000	39.42	18.86	58.28	74.00	-15.72	peak
10	14415.000	21.31	18.86	40.17	54.00	-13.83	AVG


Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

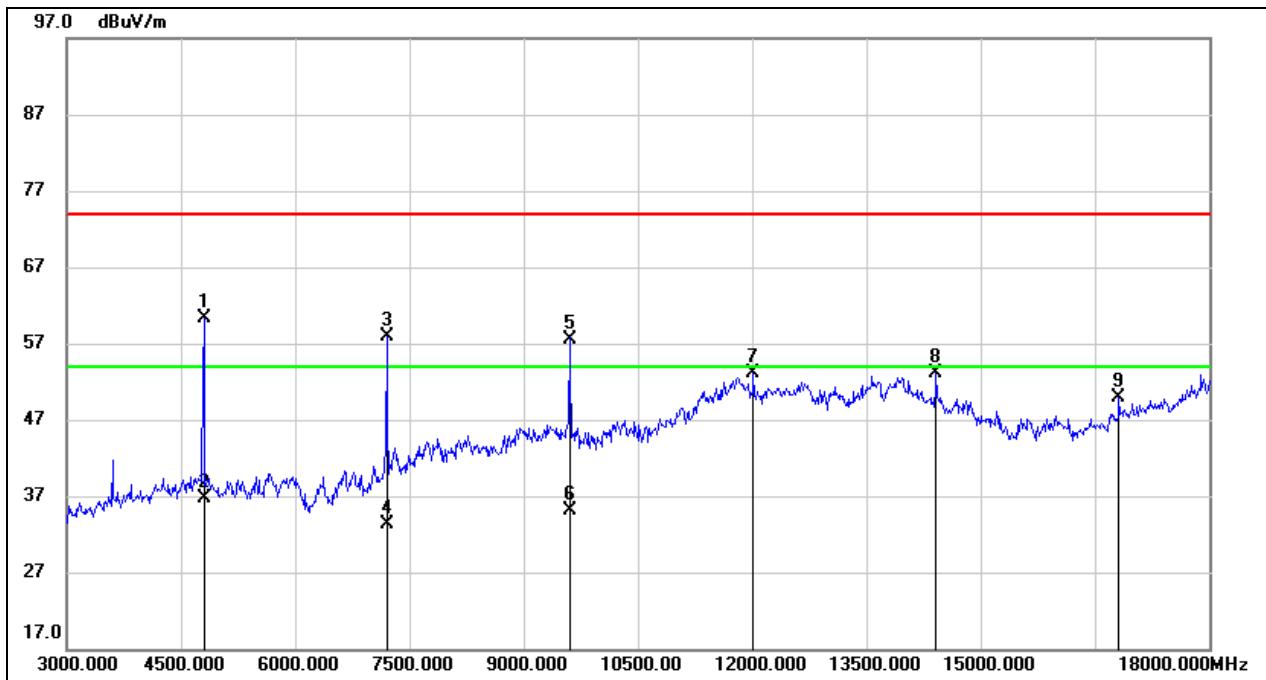HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	61.45	-1.14	60.31	74.00	-13.69	peak
2	4800.000	37.89	-1.14	36.75	54.00	-17.25	AVG
3	7200.000	52.89	5.10	57.99	74.00	-16.01	peak
4	7200.000	28.17	5.10	33.27	54.00	-20.73	AVG
5	9600.000	47.47	10.13	57.60	74.00	-16.40	peak
6	9600.000	24.99	10.13	35.12	54.00	-18.88	AVG
7	12015.000	36.04	17.08	53.12	74.00	-20.88	peak
8	14415.000	34.21	18.86	53.07	74.00	-20.93	peak
9	16815.000	31.59	18.32	49.91	74.00	-24.09	peak


Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 4. For the transmitting duration, please refer to clause 7.1.  
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

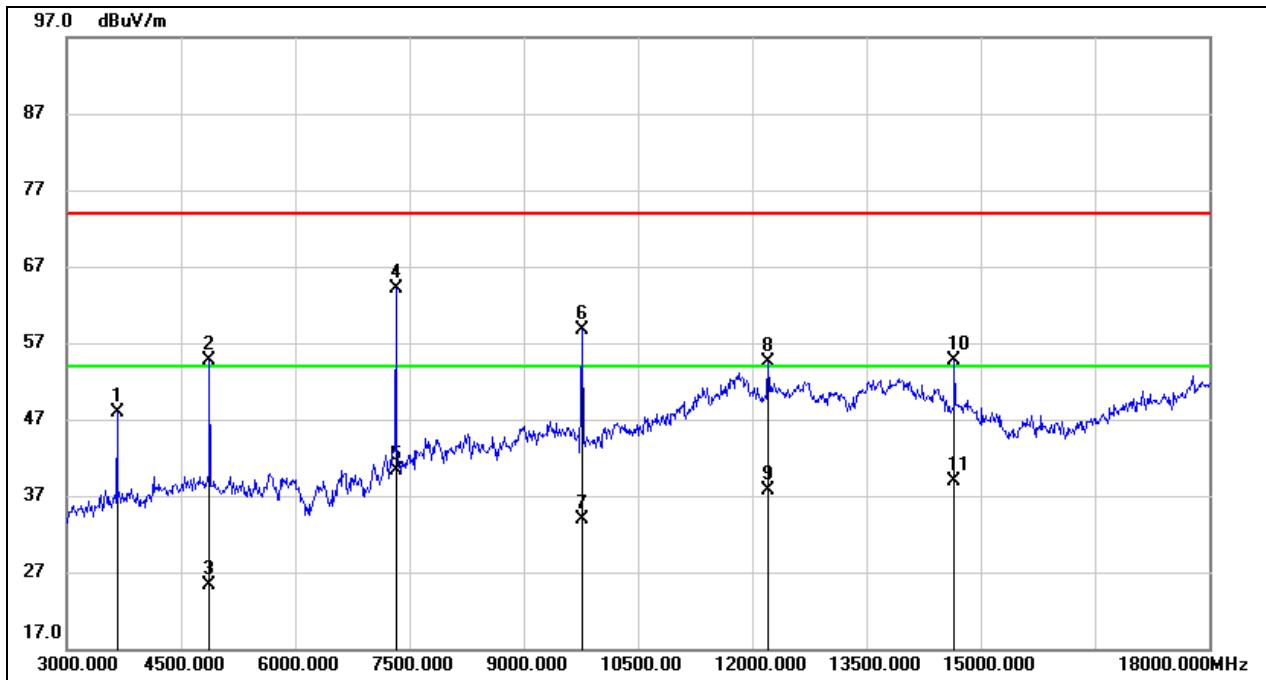HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	52.90	-4.99	47.91	74.00	-26.09	peak
2	4875.000	55.76	-1.13	54.63	74.00	-19.37	peak
3	4875.000	26.40	-1.13	25.27	54.00	-28.73	AVG
4	7320.000	58.56	5.52	64.08	74.00	-9.92	peak
5	7320.000	34.70	5.52	40.22	54.00	-13.78	AVG
6	9765.000	48.64	10.02	58.66	74.00	-15.34	peak
7	9765.000	23.87	10.02	33.89	54.00	-20.11	AVG
8	12210.000	37.66	16.77	54.43	74.00	-19.57	peak
9	12210.000	20.95	16.77	37.72	54.00	-16.28	AVG
10	14655.000	37.06	17.61	54.67	74.00	-19.33	peak
11	14655.000	21.27	17.61	38.88	54.00	-15.12	AVG

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

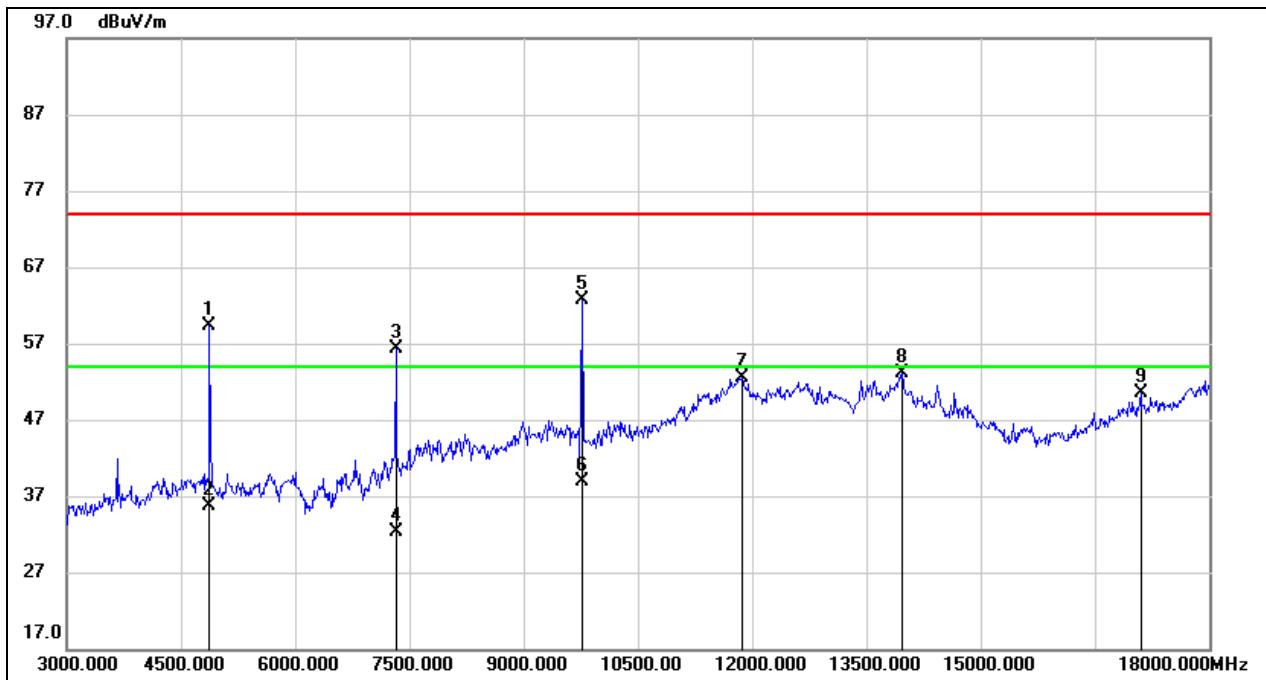HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	60.43	-1.13	59.30	74.00	-14.70	peak
2	4875.000	36.82	-1.13	35.69	54.00	-18.31	AVG
3	7320.000	50.73	5.52	56.25	74.00	-17.75	peak
4	7320.000	26.80	5.52	32.32	54.00	-21.68	AVG
5	9765.000	52.67	10.02	62.69	74.00	-11.31	peak
6	9765.000	28.87	10.02	38.89	54.00	-15.11	AVG
7	11865.000	35.30	17.18	52.48	74.00	-21.52	peak
8	13965.000	32.51	20.61	53.12	74.00	-20.88	peak
9	17100.000	31.00	19.56	50.56	74.00	-23.44	peak

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

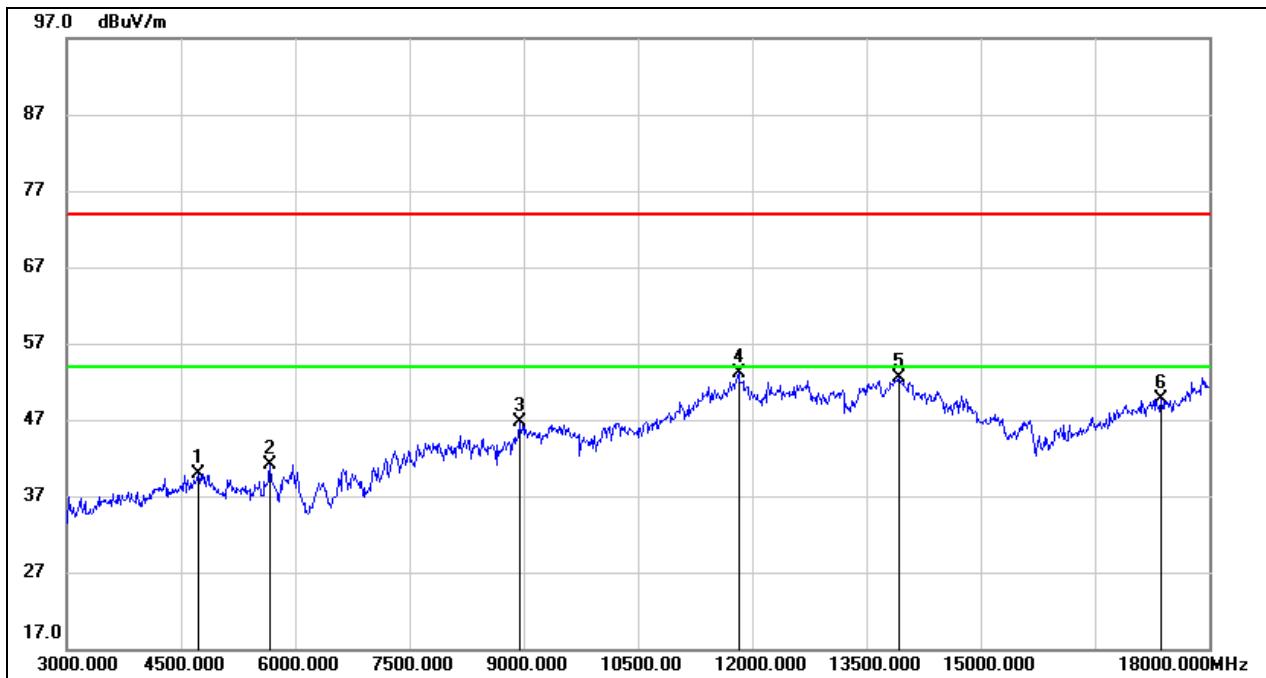HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4725.000	41.35	-1.46	39.89	74.00	-34.11	peak
2	5670.000	40.37	0.68	41.05	74.00	-32.95	peak
3	8940.000	37.92	8.80	46.72	74.00	-27.28	peak
4	11820.000	35.90	17.21	53.11	74.00	-20.89	peak
5	13920.000	31.93	20.58	52.51	74.00	-21.49	peak
6	17370.000	29.55	20.20	49.75	74.00	-24.25	peak

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

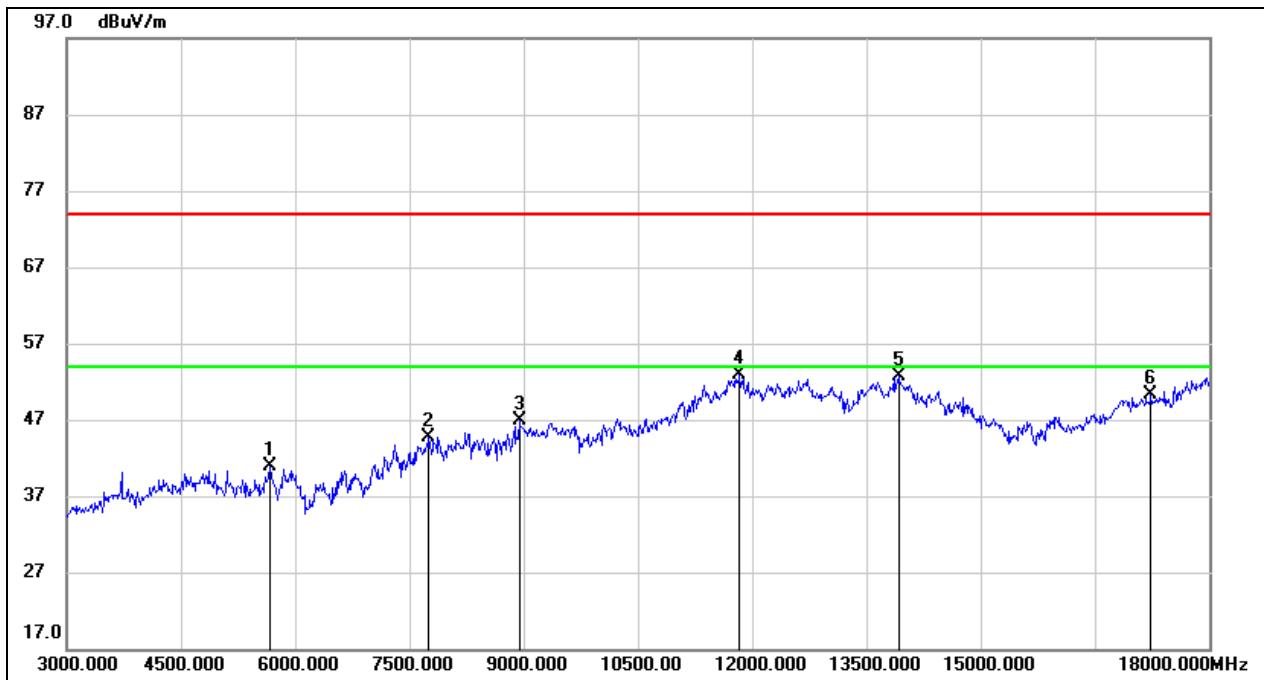HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5670.000	40.16	0.68	40.84	74.00	-33.16	peak
2	7755.000	38.86	5.93	44.79	74.00	-29.21	peak
3	8940.000	38.01	8.80	46.81	74.00	-27.19	peak
4	11835.000	35.68	17.20	52.88	74.00	-21.12	peak
5	13920.000	32.18	20.58	52.76	74.00	-21.24	peak
6	17235.000	30.10	20.17	50.27	74.00	-23.73	peak

Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

## 8.4. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

### 8.4.1. GFSK(2Mbps) MODE

#### SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

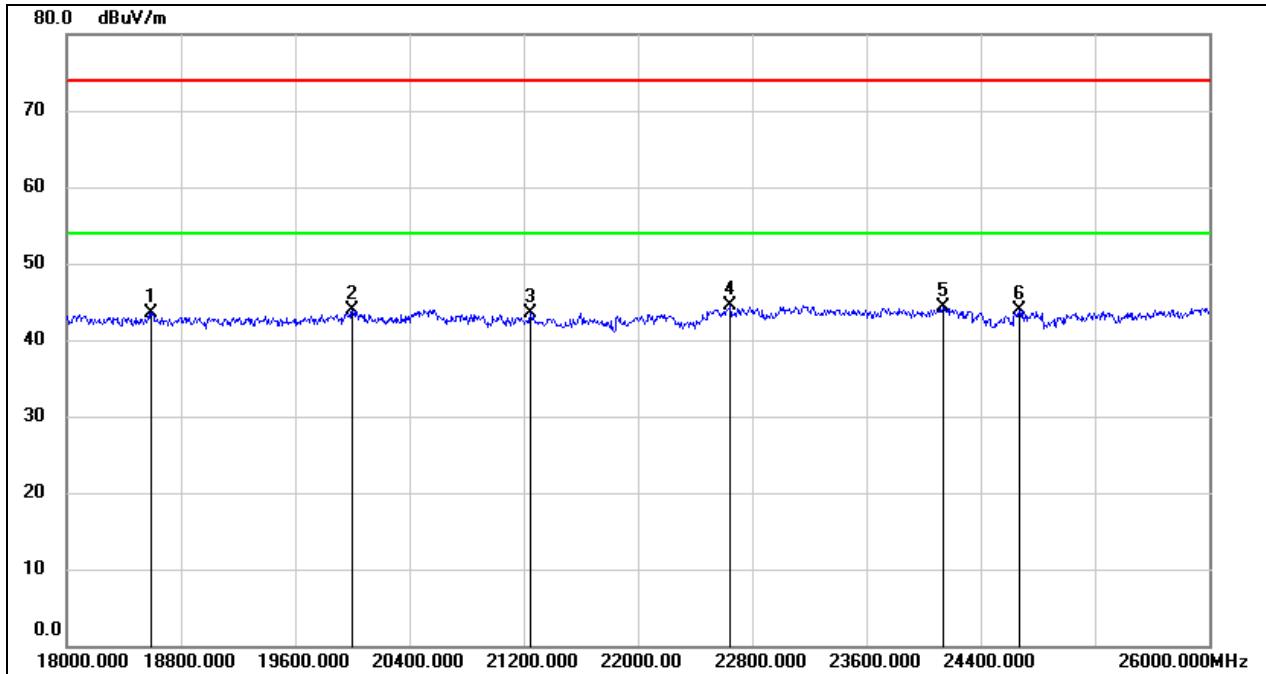


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18592.000	48.75	-5.31	43.44	74.00	-30.56	peak
2	20000.000	49.31	-5.45	43.86	74.00	-30.14	peak
3	21248.000	48.29	-4.77	43.52	74.00	-30.48	peak
4	22648.000	48.26	-3.77	44.49	74.00	-29.51	peak
5	24136.000	47.08	-2.79	44.29	74.00	-29.71	peak
6	24672.000	46.22	-2.33	43.89	74.00	-30.11	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

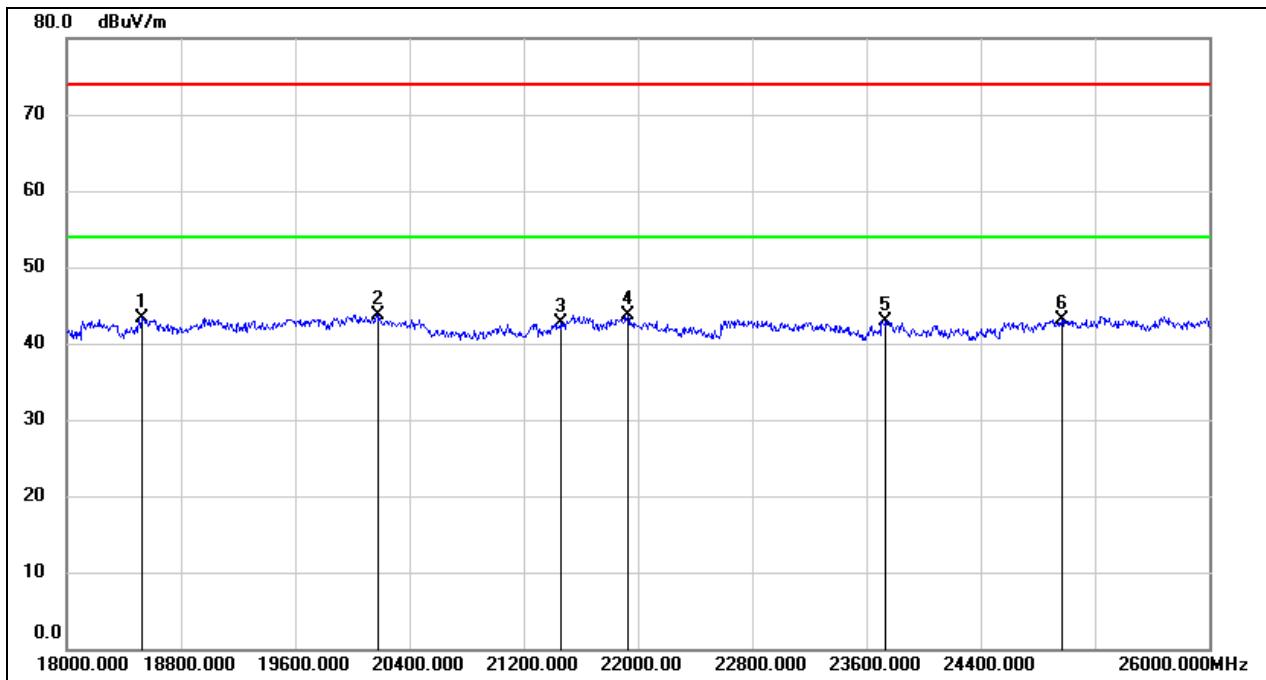**SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18528.000	48.61	-5.26	43.35	74.00	-30.65	peak
2	20176.000	49.21	-5.56	43.65	74.00	-30.35	peak
3	21456.000	47.35	-4.70	42.65	74.00	-31.35	peak
4	21928.000	48.05	-4.43	43.62	74.00	-30.38	peak
5	23736.000	46.19	-3.19	43.00	74.00	-31.00	peak
6	24968.000	45.26	-2.14	43.12	74.00	-30.88	peak


Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 8.5. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)


### 8.5.1. GFSK(2Mbps) MODE

#### SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

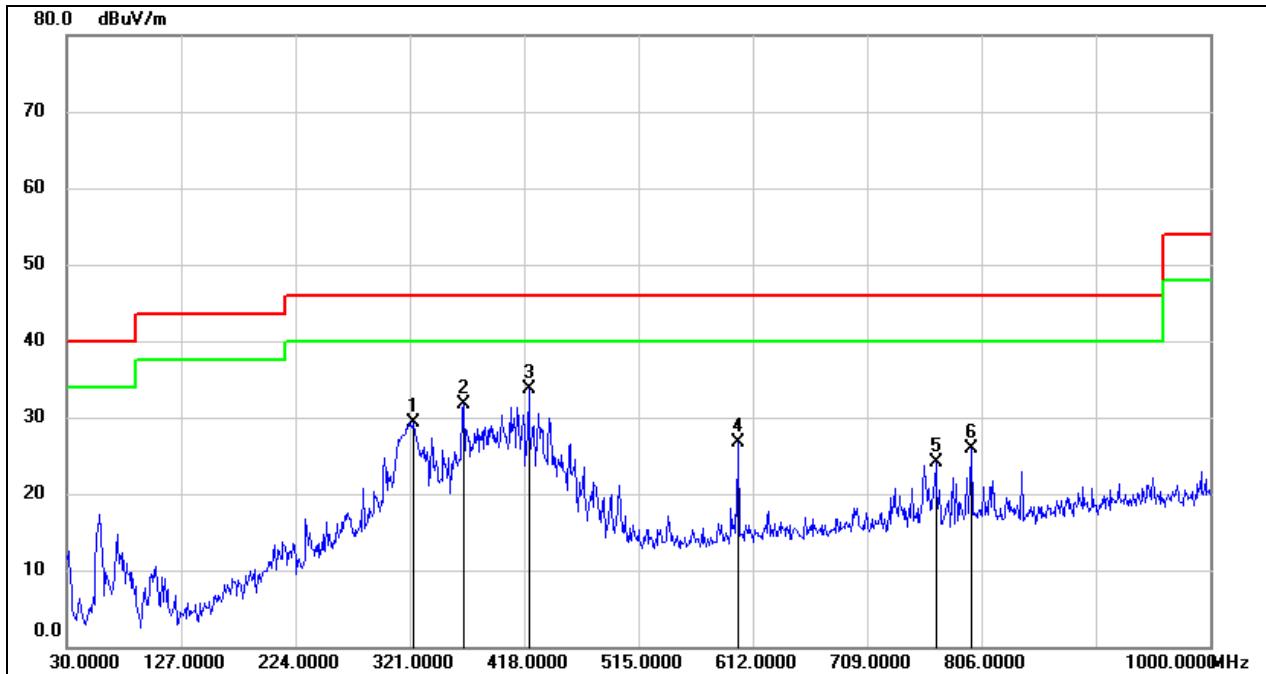

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	323.9100	44.13	-14.74	29.39	46.00	-16.61	QP
2	366.5900	45.73	-14.01	31.72	46.00	-14.28	QP
3	421.8800	46.74	-12.94	33.80	46.00	-12.20	QP
4	599.3900	36.20	-9.56	26.64	46.00	-19.36	QP
5	767.2000	31.65	-7.63	24.02	46.00	-21.98	QP
6	797.2700	33.24	-7.35	25.89	46.00	-20.11	QP

Note: 1. Result Level = Read Level + Correct Factor.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

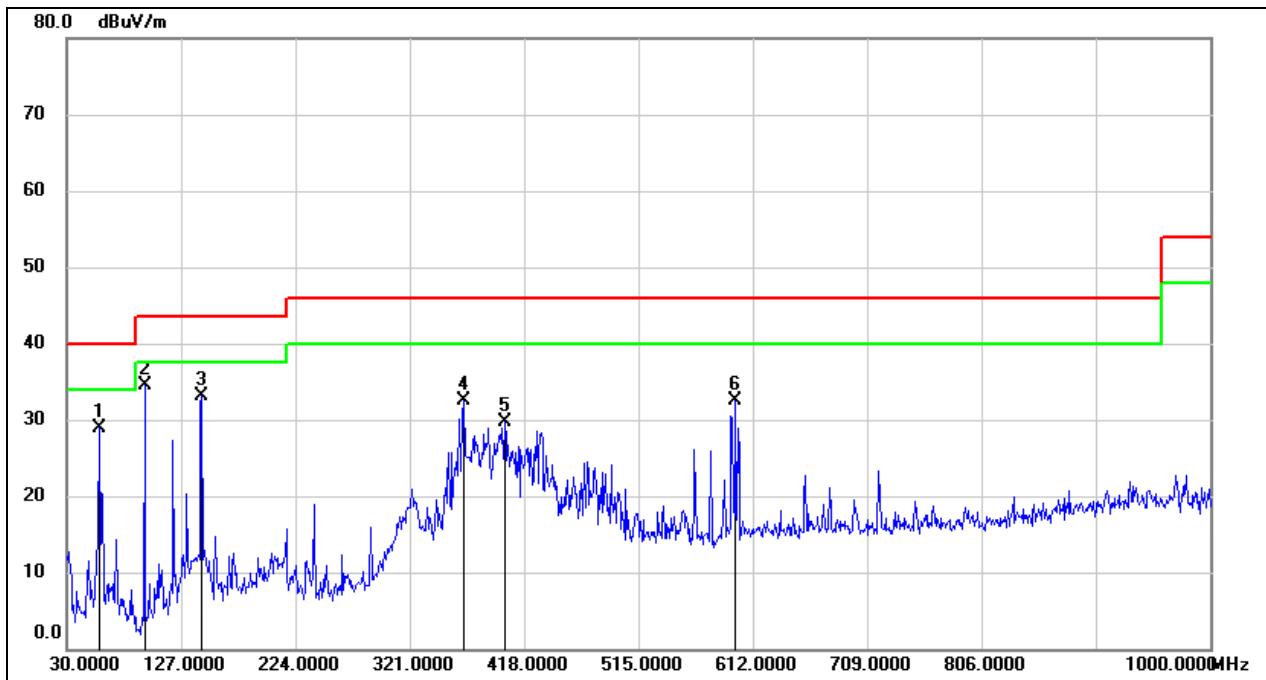SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	57.1600	49.56	-20.58	28.98	40.00	-11.02	QP
2	95.9600	55.89	-21.44	34.45	43.50	-9.05	QP
3	144.4600	51.66	-18.60	33.06	43.50	-10.44	QP
4	366.5900	46.56	-14.01	32.55	46.00	-13.45	QP
5	401.5100	43.00	-13.33	29.67	46.00	-16.33	QP
6	597.4500	42.07	-9.61	32.46	46.00	-13.54	QP

Note: 1. Result Level = Read Level + Correct Factor.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes have been tested, only the worst data was recorded in the report.

## 8.6. SPURIOUS EMISSIONS BELOW 30 MHz

### 8.6.1. GFSK(2Mbps) MODE

#### SPURIOUS EMISSIONS (LOW CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz ~ 150 kHz

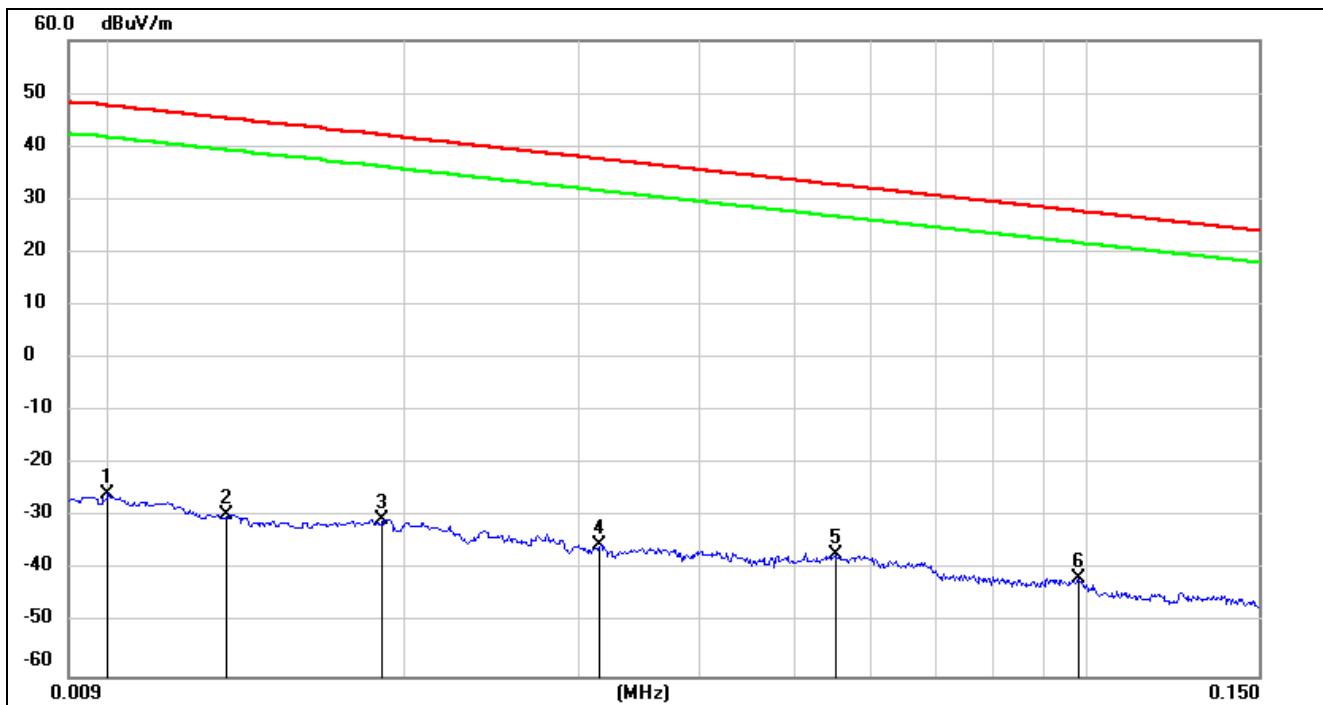


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	75.72	-101.40	-25.68	47.60	-73.28	peak
2	0.0131	71.95	-101.38	-29.43	45.25	-74.68	peak
3	0.0189	70.99	-101.35	-30.36	42.07	-72.43	peak
4	0.0316	66.24	-101.40	-35.16	37.61	-72.77	peak
5	0.0551	64.45	-101.50	-37.05	32.78	-69.83	peak
6	0.0981	60.27	-101.78	-41.51	27.77	-69.28	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

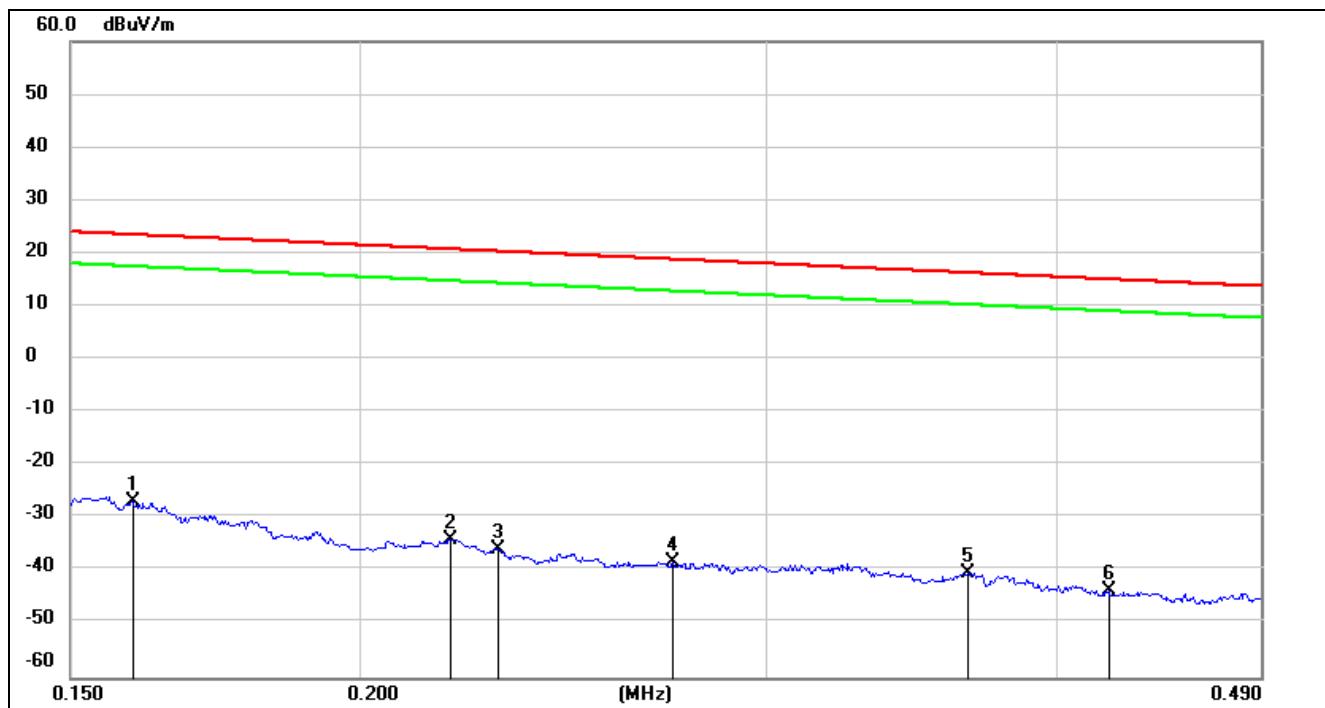
150 kHz ~ 490 kHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1595	74.86	-101.65	-26.79	23.55	-50.34	peak
2	0.2190	67.77	-101.75	-33.98	20.79	-54.77	peak
3	0.2295	66.04	-101.77	-35.73	20.38	-56.11	peak
4	0.2731	63.50	-101.83	-38.33	18.87	-57.20	peak
5	0.3662	61.58	-101.93	-40.35	16.33	-56.68	peak
6	0.4213	58.25	-101.98	-43.73	15.11	-58.84	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m-  $20\log_{10}[120\pi]$  = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

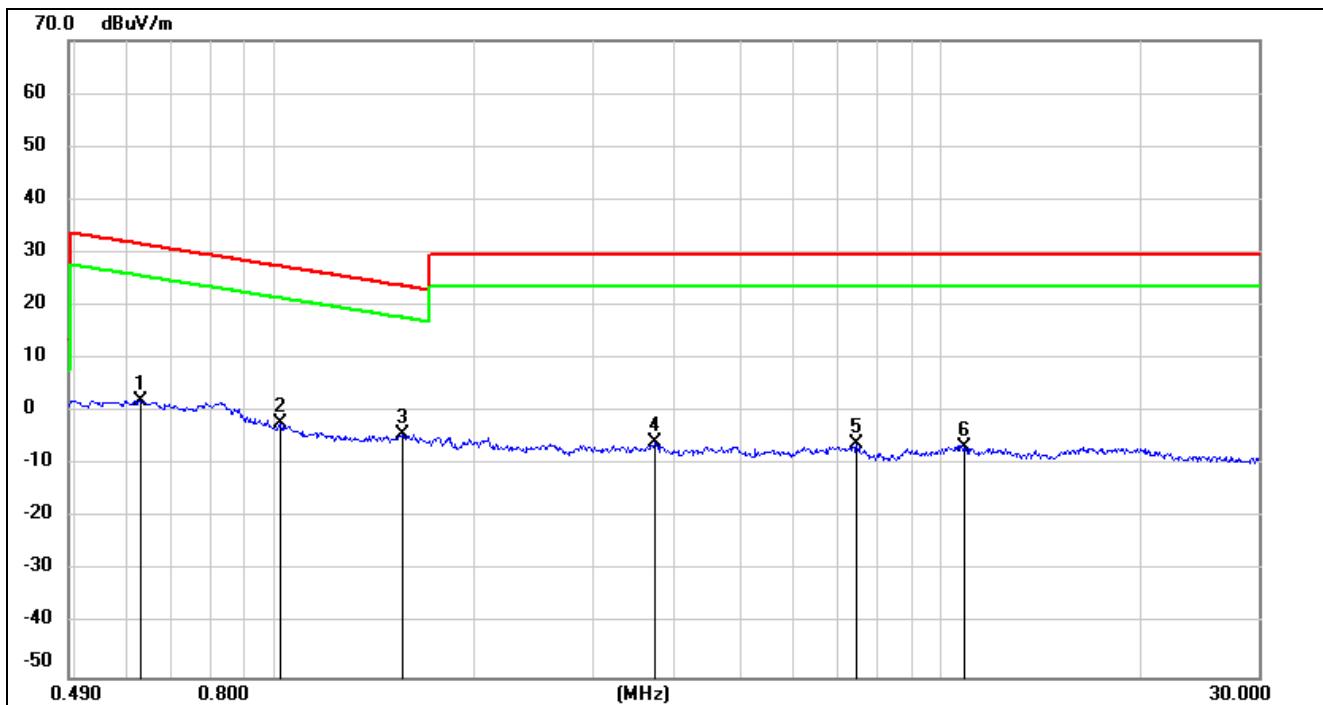490 kHz ~ 30 MHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.6298	64.17	-62.09	2.08	31.62	-29.54	peak
2	1.0212	59.99	-62.25	-2.26	27.42	-29.68	peak
3	1.5564	57.68	-62.02	-4.34	23.76	-28.10	peak
4	3.7100	55.70	-61.41	-5.71	29.54	-35.25	peak
5	7.4839	54.97	-61.15	-6.18	29.54	-35.72	peak
6	10.8772	54.24	-60.84	-6.60	29.54	-36.14	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m-  $20\log_{10}[120\pi]$  = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 9. AC POWER LINE CONDUCTED EMISSIONS


### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

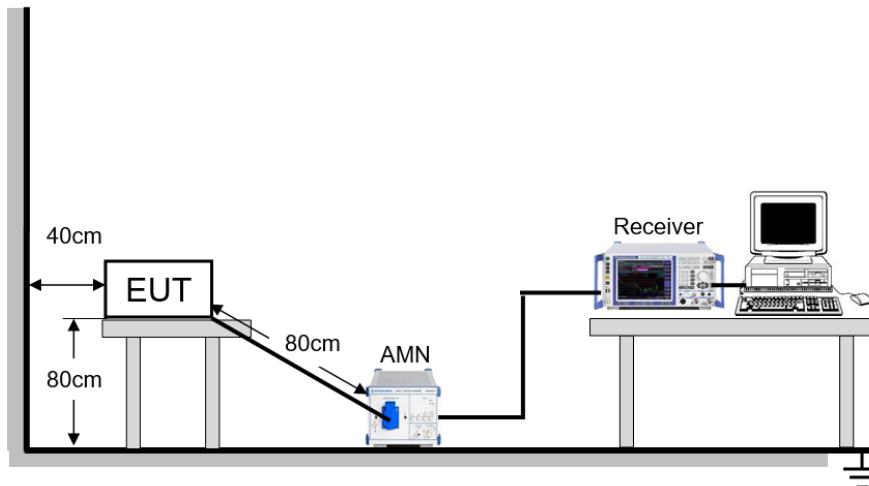

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.


### TEST ENVIRONMENT

Temperature	20.6 °C	Relative Humidity	62.1 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V/60 Hz

## RESULTS


### 9.1. GFSK(2Mbps) MODE

#### LINE L RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

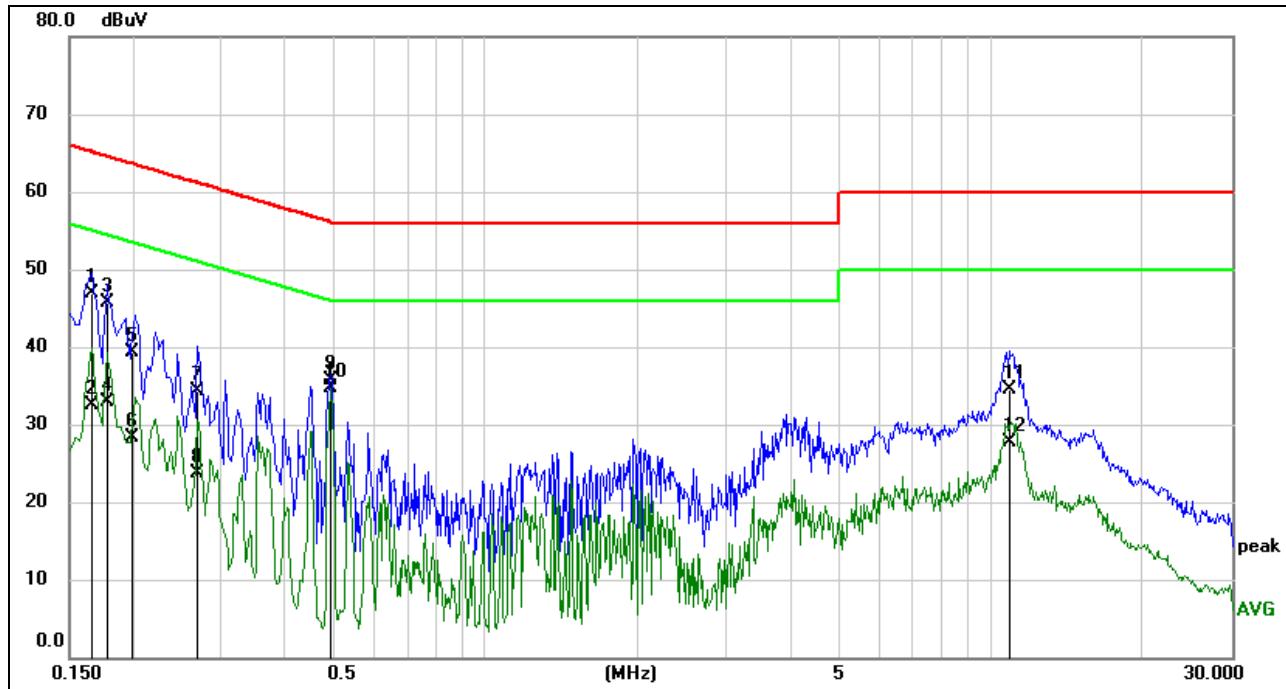

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1652	37.39	9.59	46.98	65.20	-18.22	QP
2	0.1652	23.01	9.59	32.60	55.20	-22.60	AVG
3	0.1785	36.09	9.59	45.68	64.56	-18.88	QP
4	0.1785	23.23	9.59	32.82	54.56	-21.74	AVG
5	0.1986	29.76	9.59	39.35	63.67	-24.32	QP
6	0.1986	18.74	9.59	28.33	53.67	-25.34	AVG
7	0.2695	24.74	9.52	34.26	61.13	-26.87	QP
8	0.2695	14.19	9.52	23.71	51.13	-27.42	AVG
9	0.4955	26.39	9.30	35.69	56.08	-20.39	QP
10	0.4955	25.45	9.30	34.75	46.08	-11.33	AVG
11	10.8848	24.83	9.73	34.56	60.00	-25.44	QP
12	10.8848	18.05	9.73	27.78	50.00	-22.22	AVG

Note: 1. Result = Reading + Correct Factor.  
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).  
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

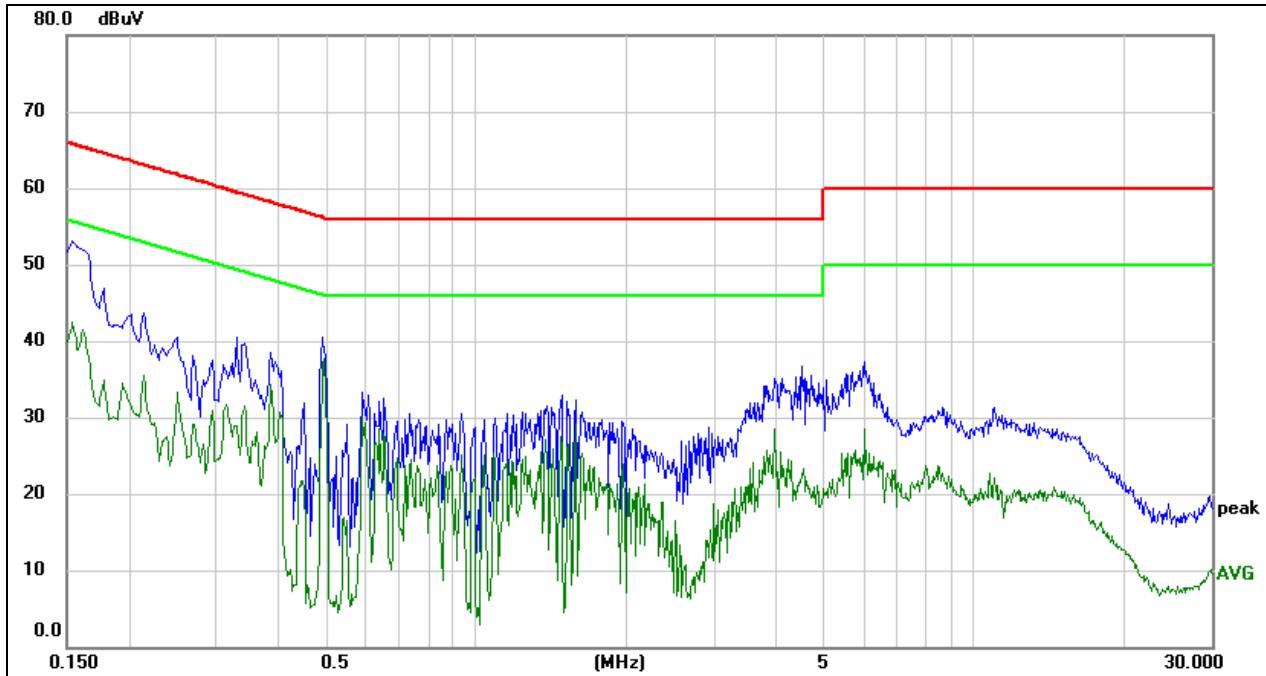**LINE N RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1496	18.64	9.50	28.14	66.02	-37.88	QP
2	0.1496	10.90	9.50	20.40	56.02	-35.62	AVG
3	0.2183	28.55	9.58	38.13	62.88	-24.75	QP
4	0.2183	19.23	9.58	28.81	52.88	-24.07	AVG
5	0.2484	27.91	9.57	37.48	61.81	-24.33	QP
6	0.2484	17.37	9.57	26.94	51.81	-24.87	AVG
7	0.4920	29.49	9.50	38.99	56.13	-17.14	QP
8	0.4920	27.82	9.50	37.32	46.13	-8.81	AVG
9	4.4888	15.78	9.51	25.29	56.00	-30.71	QP
10	4.4888	5.90	9.51	15.41	46.00	-30.59	AVG
11	5.9739	22.54	9.25	31.79	60.00	-28.21	QP
12	5.9739	10.46	9.25	19.71	50.00	-30.29	AVG

Note: 1. Result = Reading + Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies

## 11. Appendix


### 11.1. Appendix A: DTS Bandwidth


#### 11.1.1. Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
1M	Ant1	2402	0.52	2401.75	2402.27	0.5	PASS
		2442	0.65	2441.76	2442.41	0.5	PASS
		2480	0.66	2479.71	2480.37	0.5	PASS
2M	Ant1	2402	0.63	2401.50	2402.13	0.5	PASS
		2442	0.81	2441.51	2442.32	0.5	PASS
		2480	0.81	2479.58	2480.38	0.5	PASS
250K	Ant1	2402	0.57	2401.74	2402.30	0.5	PASS
		2442	0.57	2441.74	2442.31	0.5	PASS
		2480	0.58	2479.76	2480.34	0.5	PASS

## 11.1.2. Test Graphs



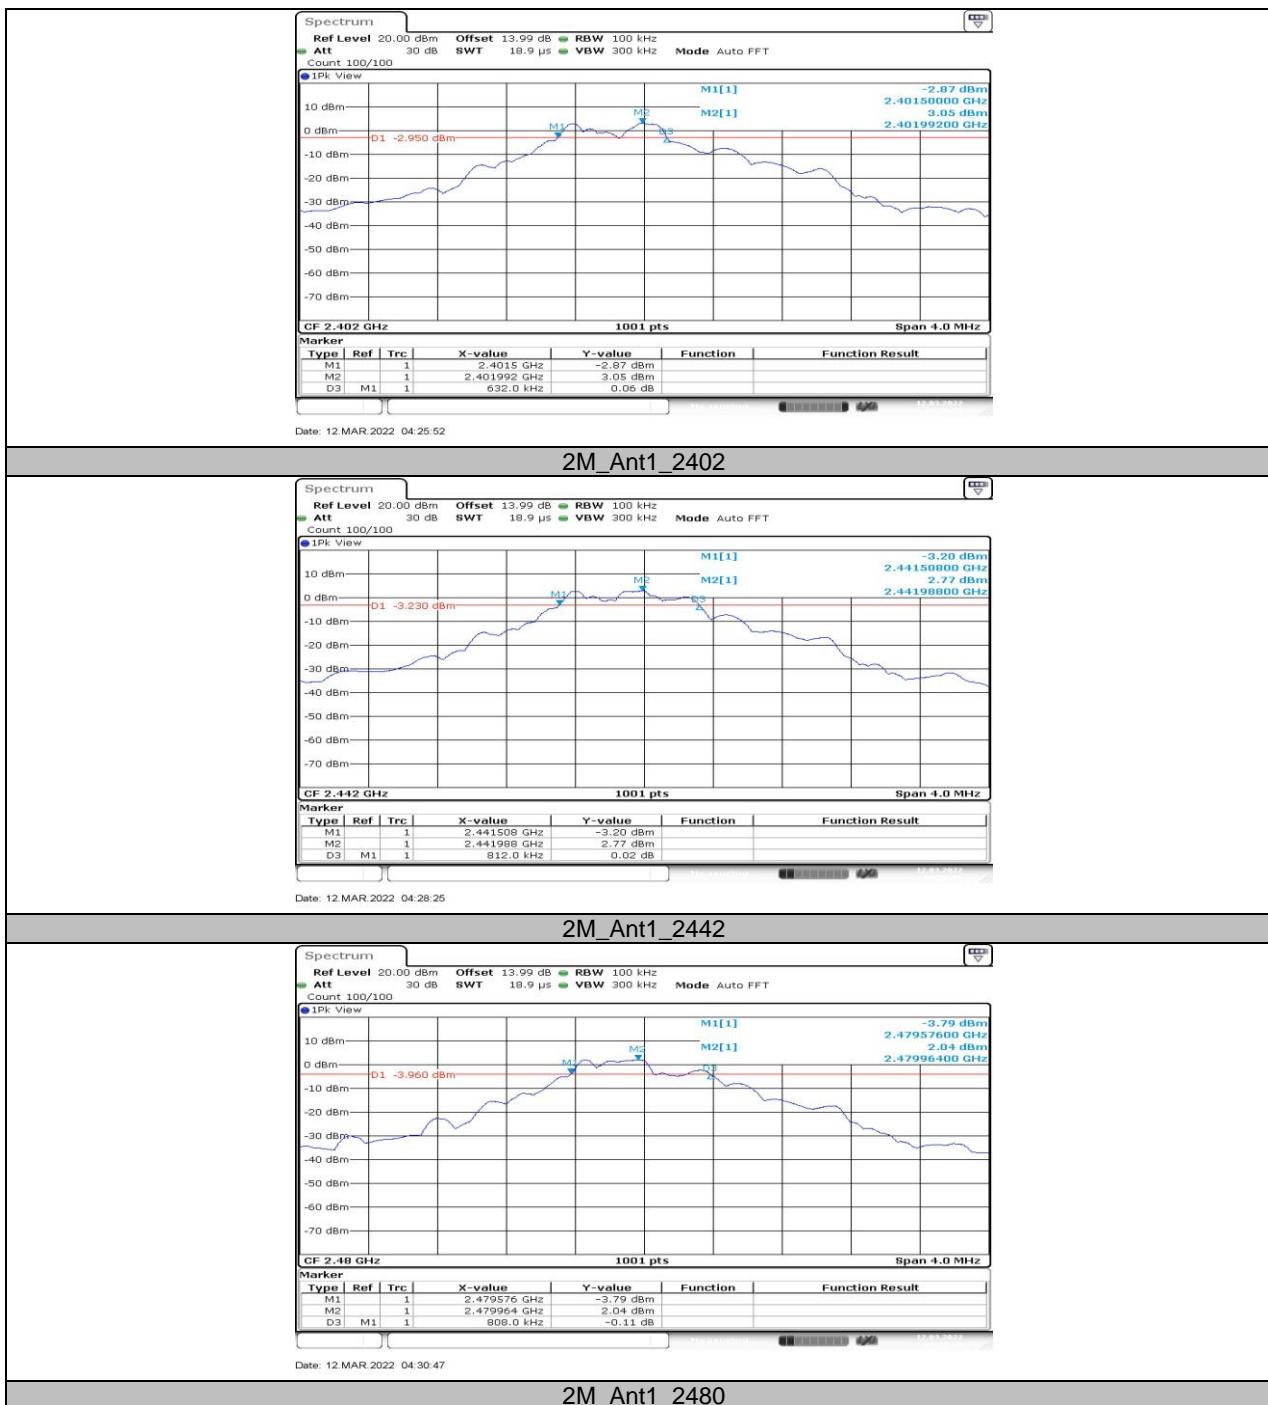

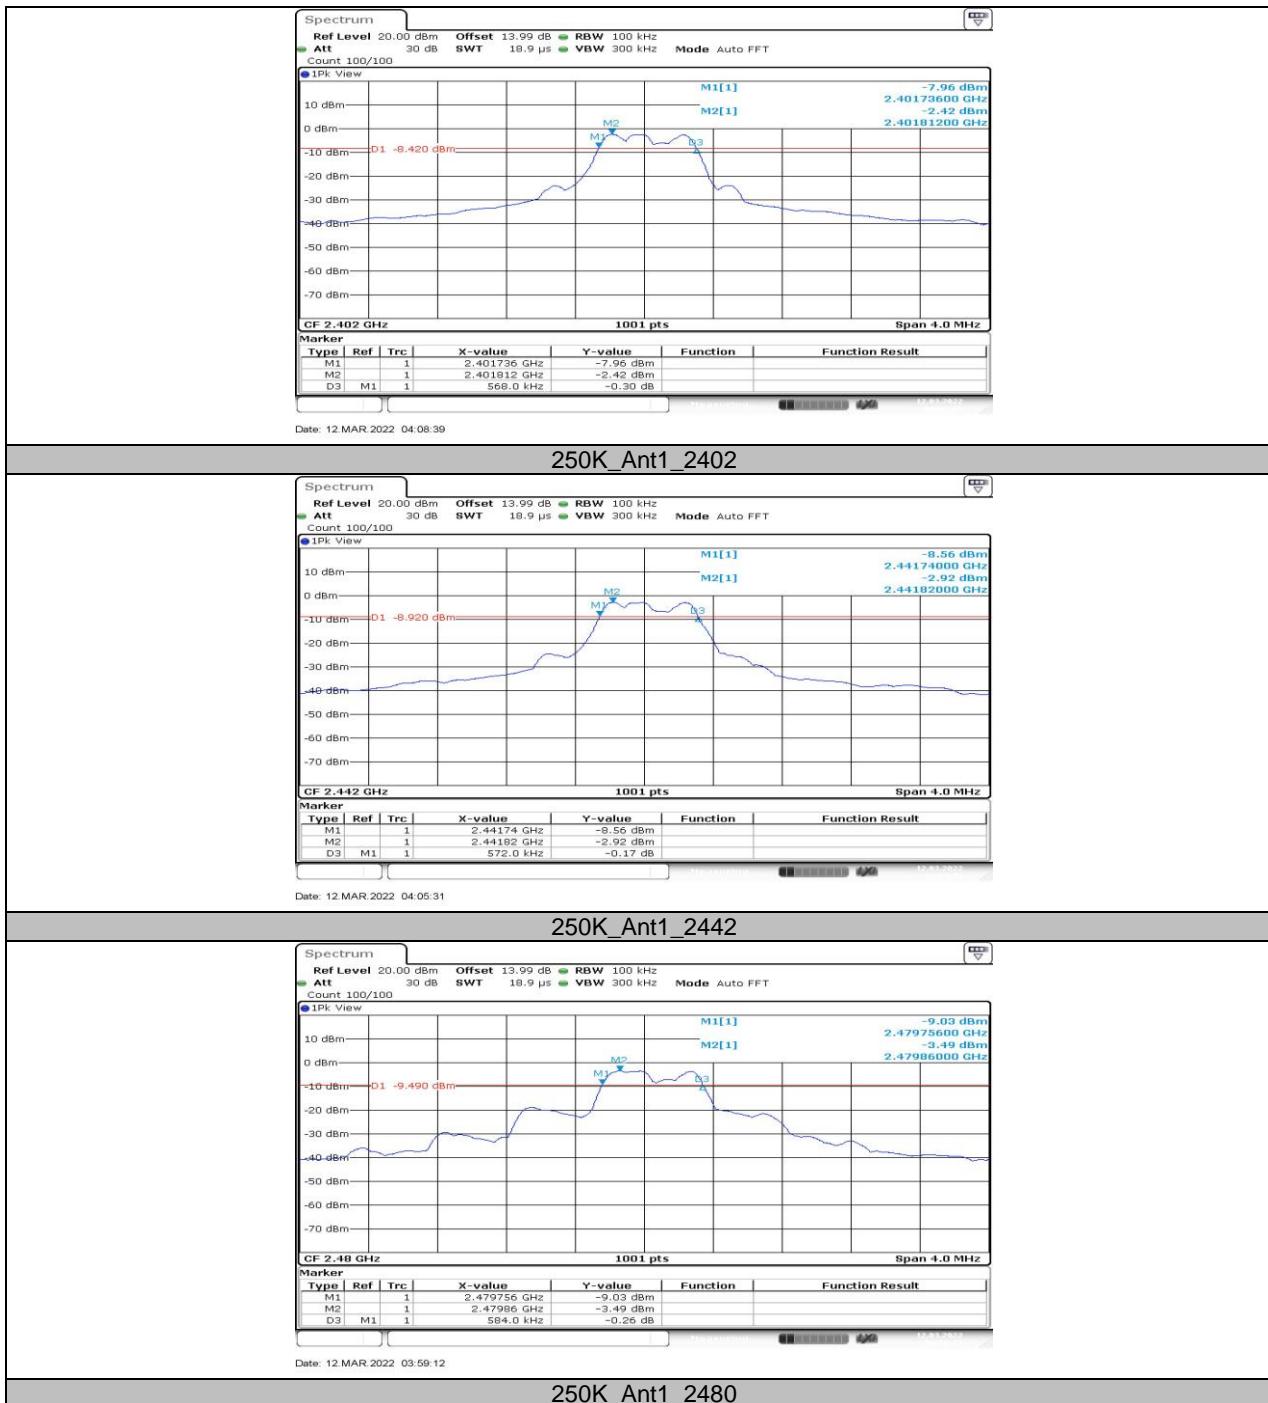



## 11.2. Appendix B: Occupied Channel Bandwidth


### 11.2.1. Test Result

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
1M	Ant1	2402	1.019	2401.504	2402.523	PASS
		2442	1.107	2441.449	2442.555	PASS
		2480	1.443	2479.285	2480.727	PASS
2M	Ant1	2402	1.646	2401.149	2402.795	PASS
		2442	1.634	2441.169	2442.803	PASS
		2480	1.642	2479.197	2480.839	PASS
250K	Ant1	2402	0.541	2401.750	2402.292	PASS
		2442	0.585	2441.728	2442.314	PASS
		2480	0.557	2479.774	2480.332	PASS

## 11.2.1. Test Graphs

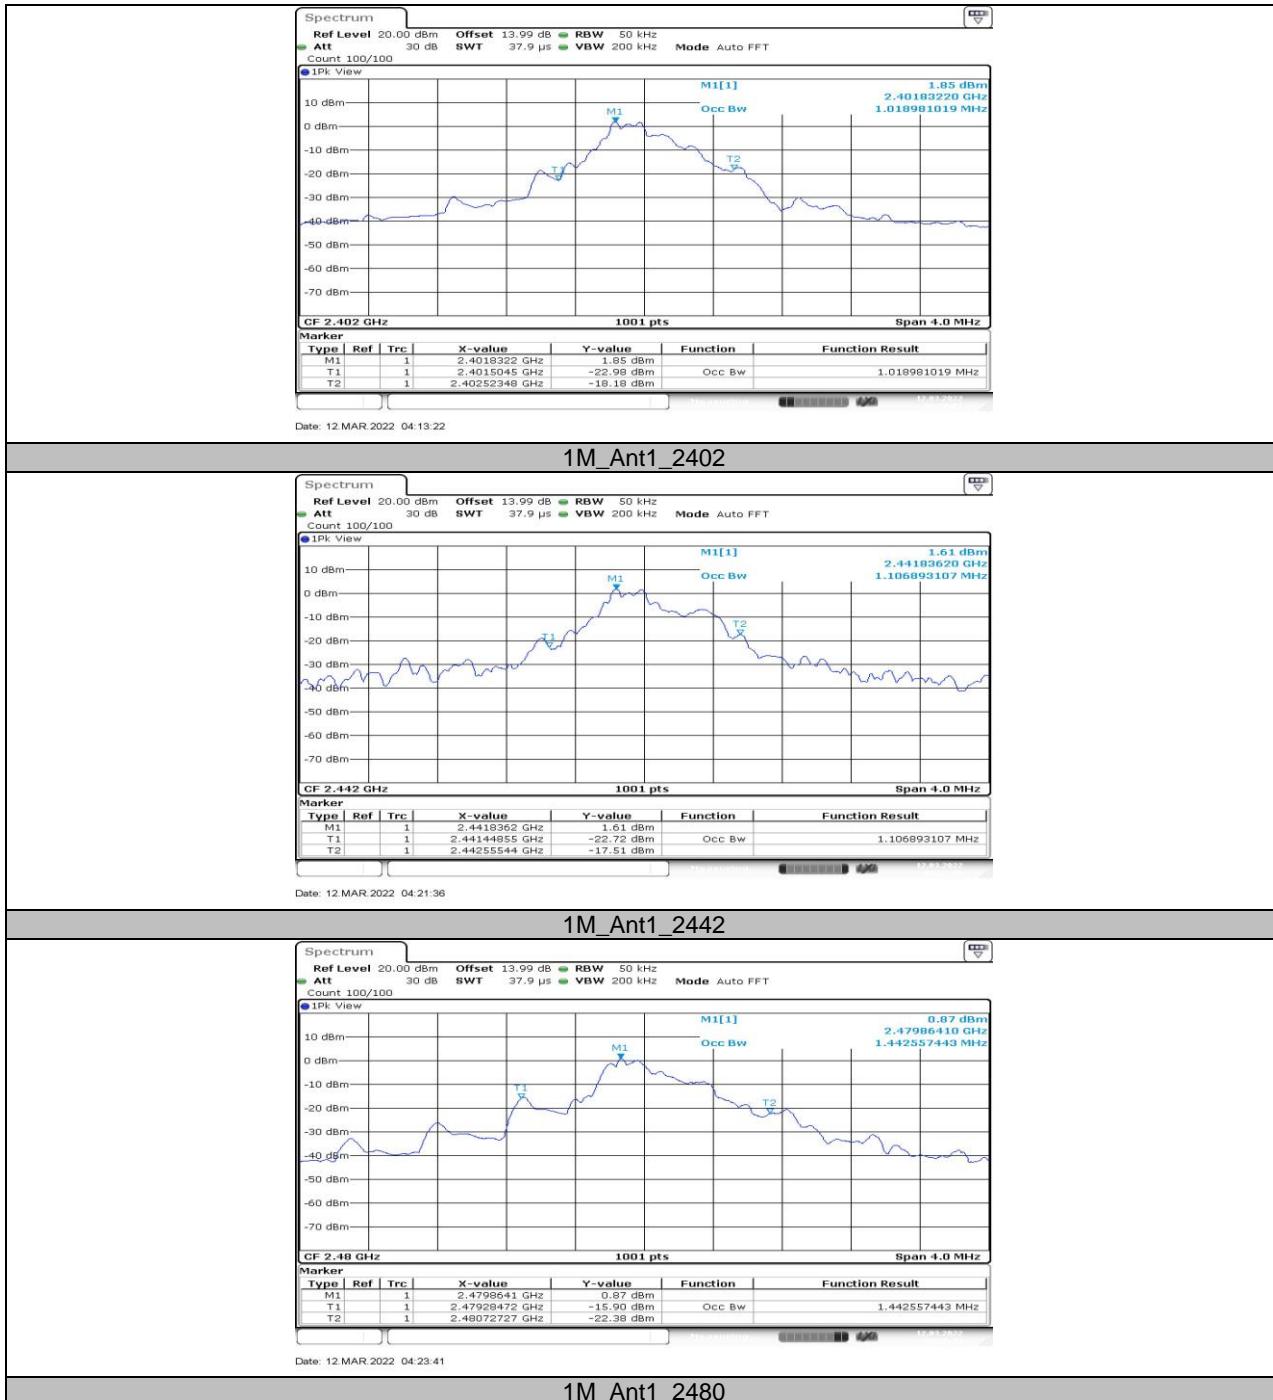

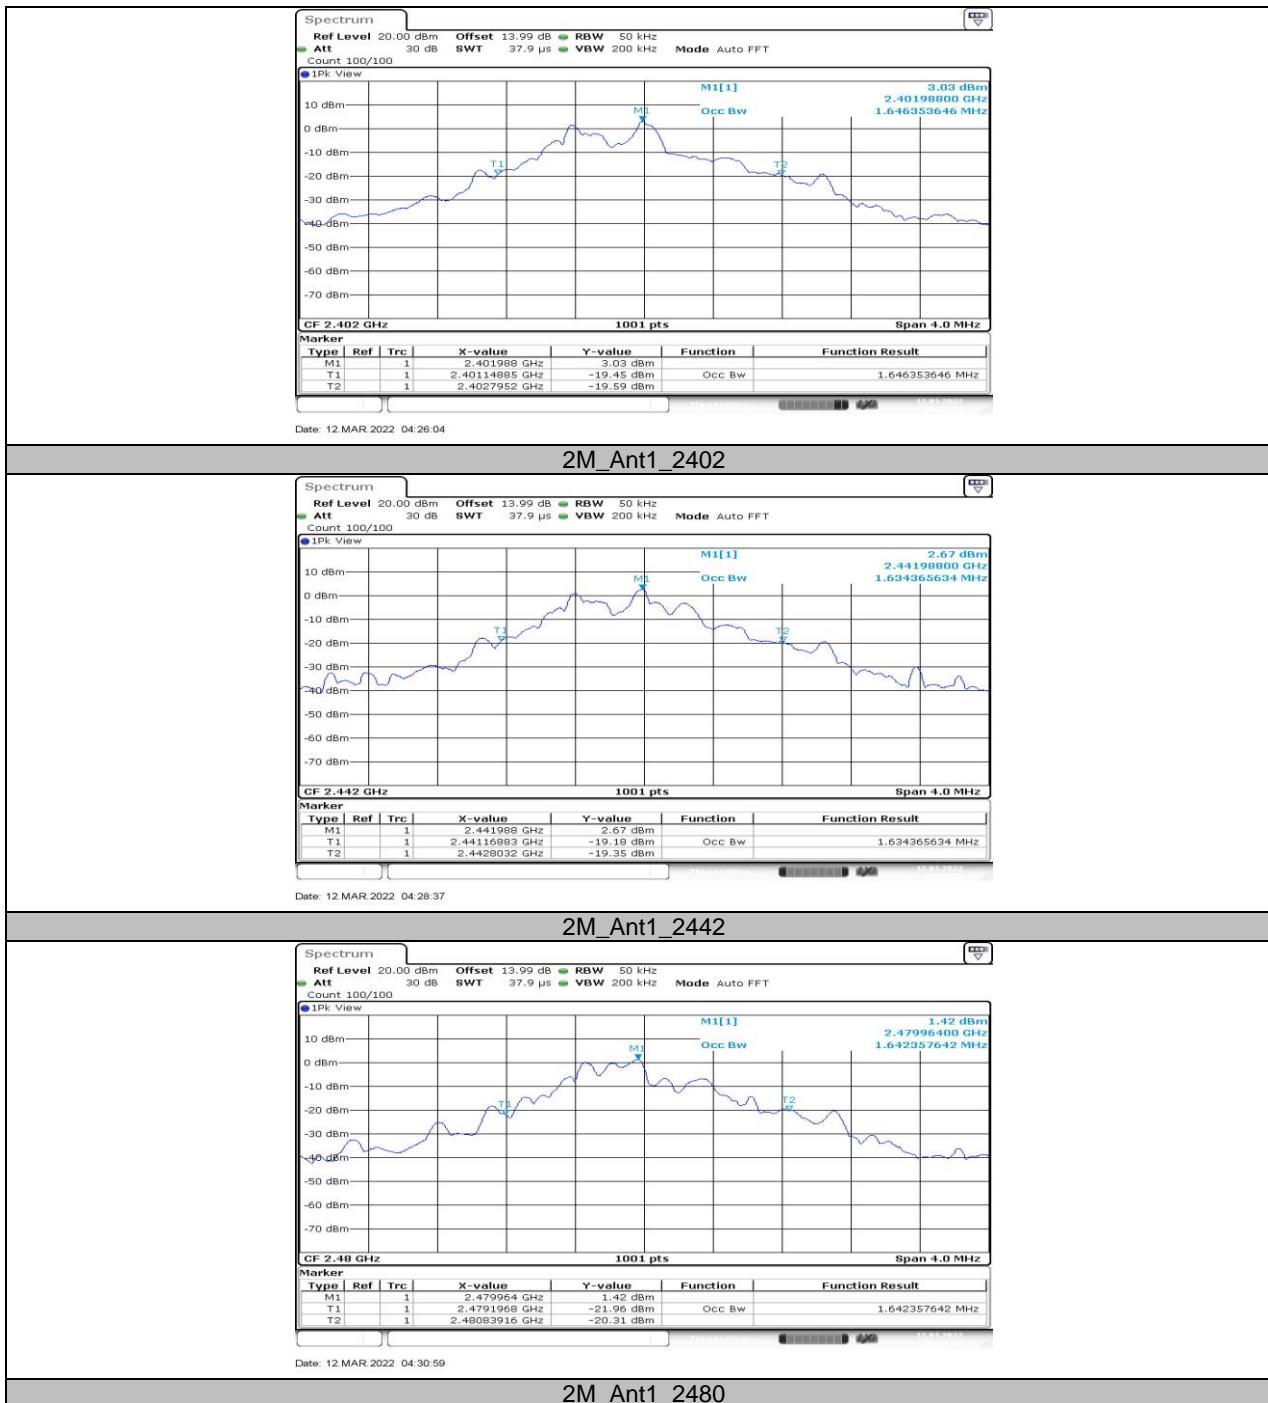

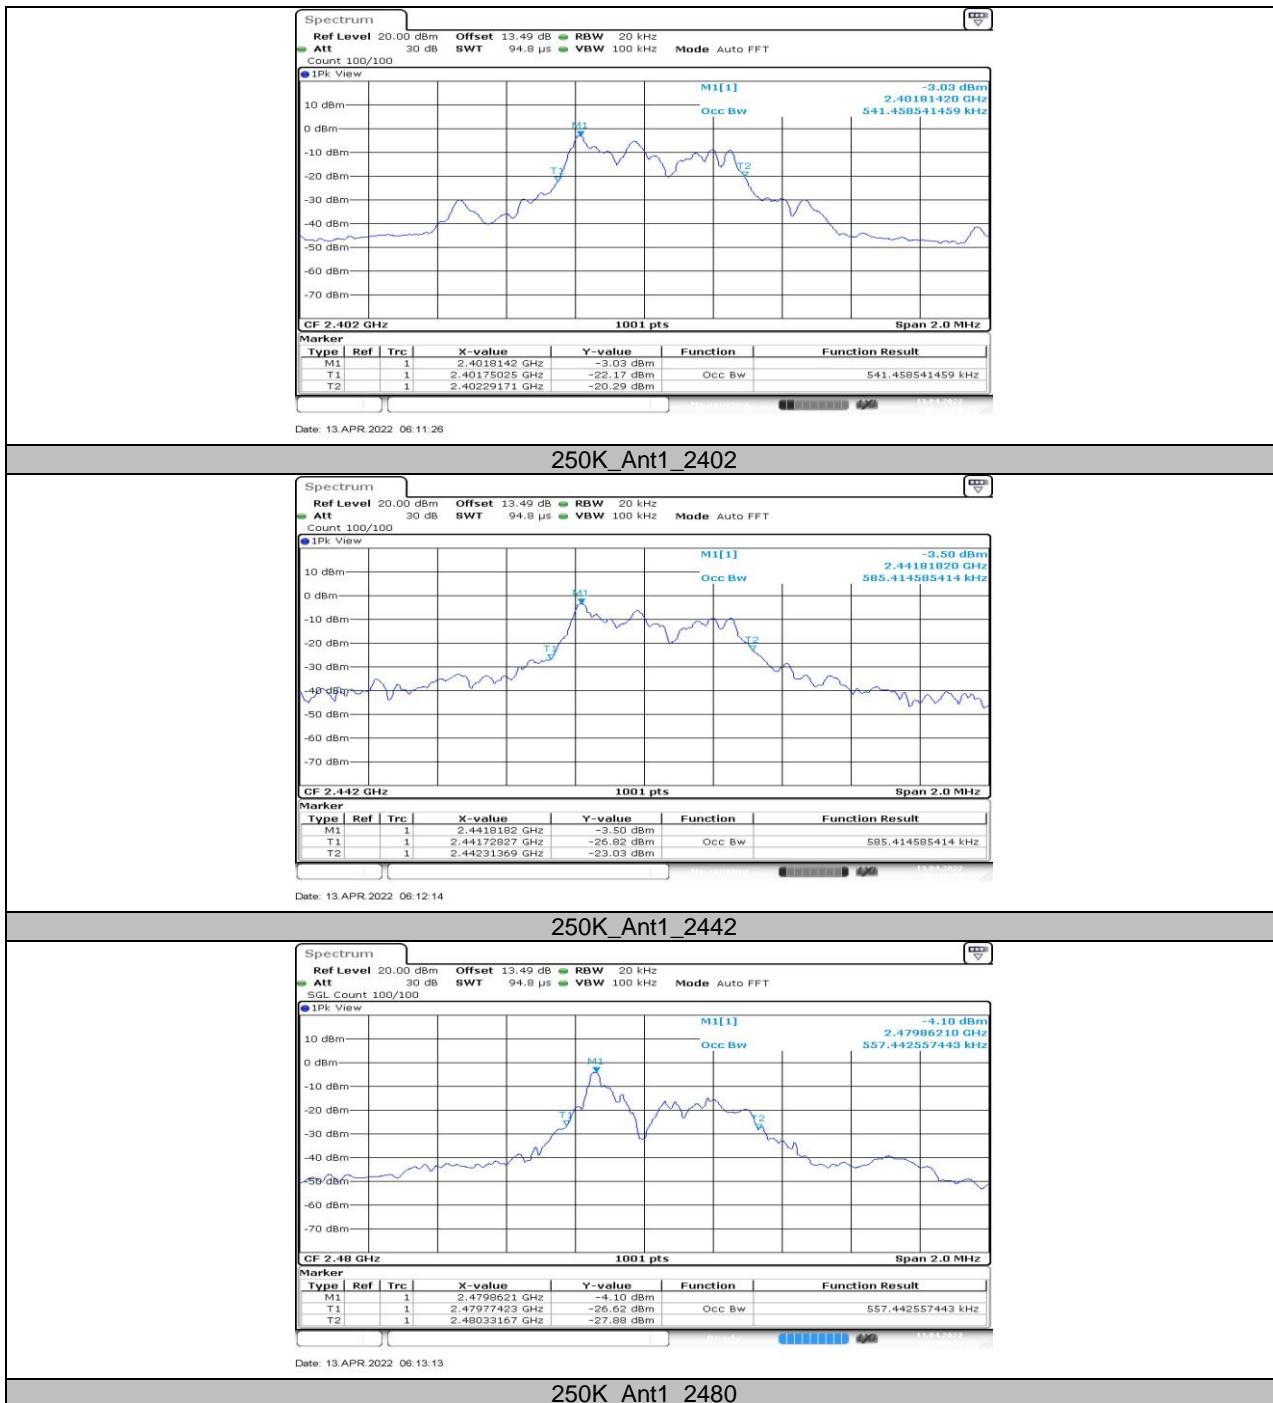

### 11.3. Appendix C: Maximum conducted output power

#### 11.3.1. Test Result - Peak

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
1M	Ant1	2402	2.08	≤30	PASS
		2442	1.88	≤30	PASS
		2480	1.08	≤30	PASS
2M	Ant1	2402	3.18	≤30	PASS
		2442	2.88	≤30	PASS
		2480	2.21	≤30	PASS
250K	Ant1	2402	-2.23	≤30	PASS
		2442	-2.72	≤30	PASS
		2480	-3.24	≤30	PASS

#### 11.3.2. Test Result – Average


Test Mode	Antenna	Channel	Result[dBm]
1M	Ant1	2402	1.29
		2442	1.12
		2480	0.42
2M	Ant1	2402	2.37
		2442	2.07
		2480	1.5
250K	Ant1	2402	-3.06
		2442	-3.53
		2480	-4.01


## 11.4. Appendix D: Maximum power spectral density


### 11.4.1. Test Result

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
1M	Ant1	2402	-12.95	≤8.00	PASS
		2442	-13.34	≤8.00	PASS
		2480	-13.30	≤8.00	PASS
2M	Ant1	2402	-12.98	≤8.00	PASS
		2442	-13.17	≤8.00	PASS
		2480	-15.78	≤8.00	PASS
250K	Ant1	2402	-7.74	≤8.00	PASS
		2442	-8.54	≤8.00	PASS
		2480	-8.98	≤8.00	PASS

### 11.4.2. Test Graphs

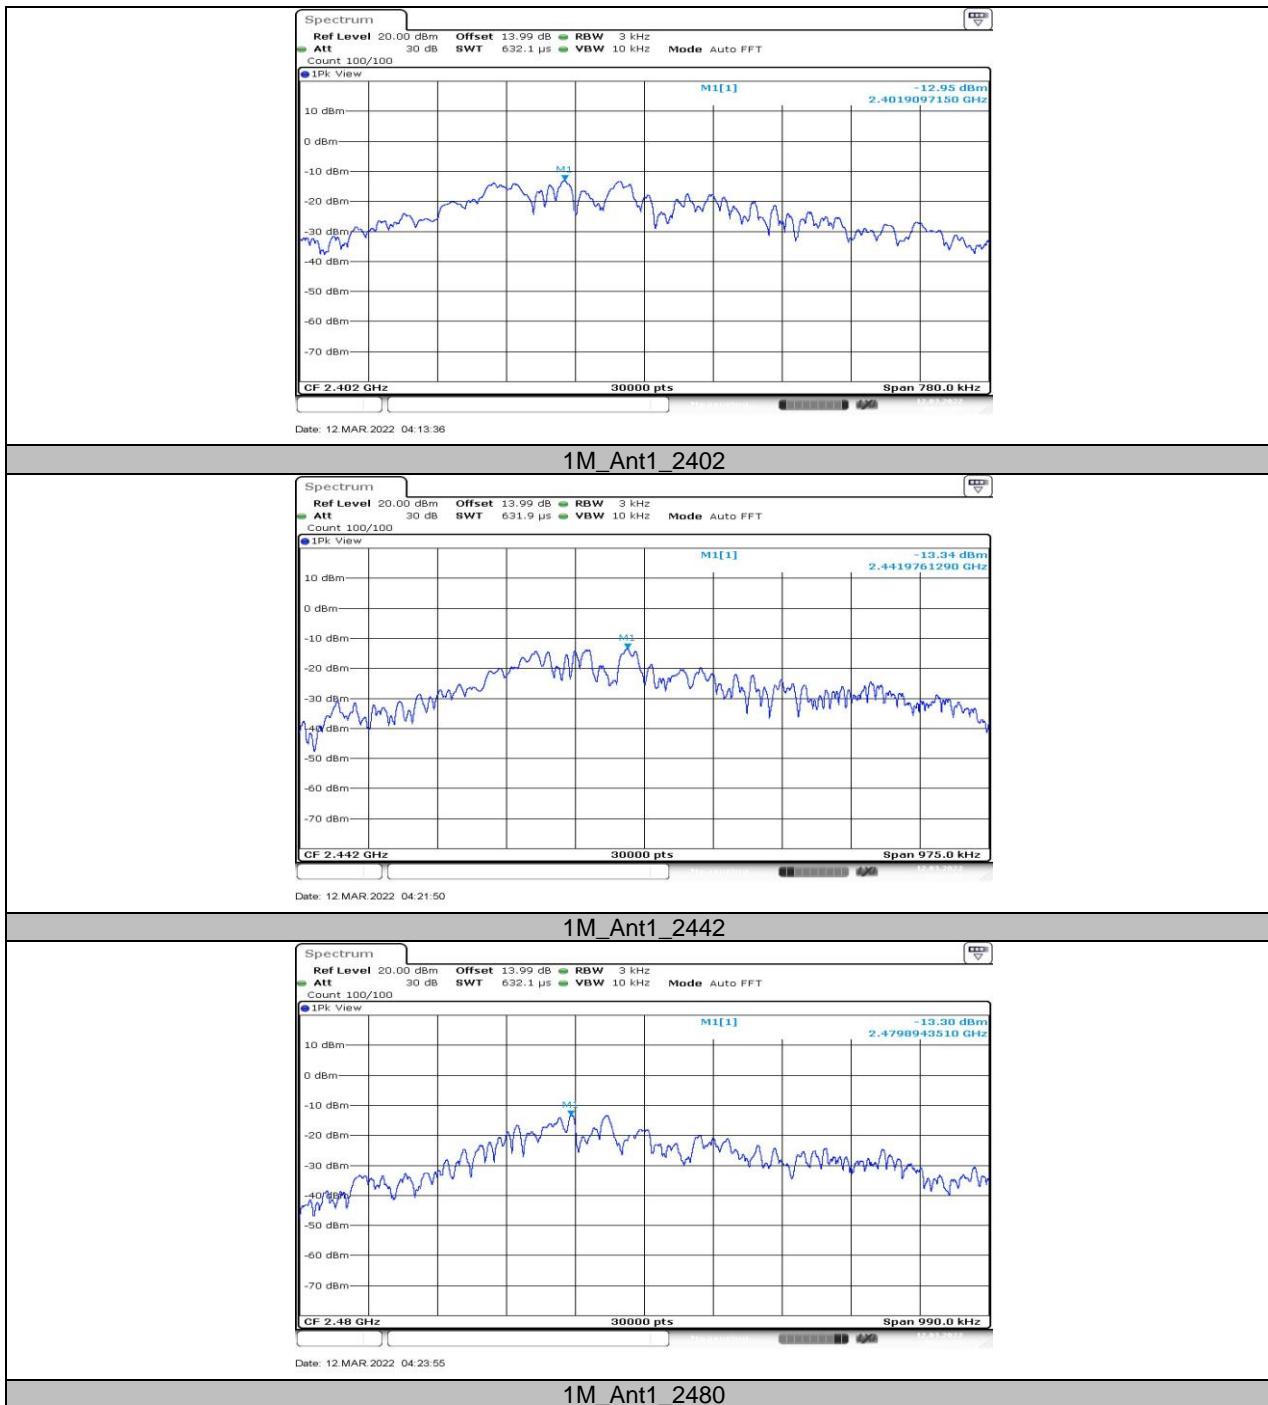

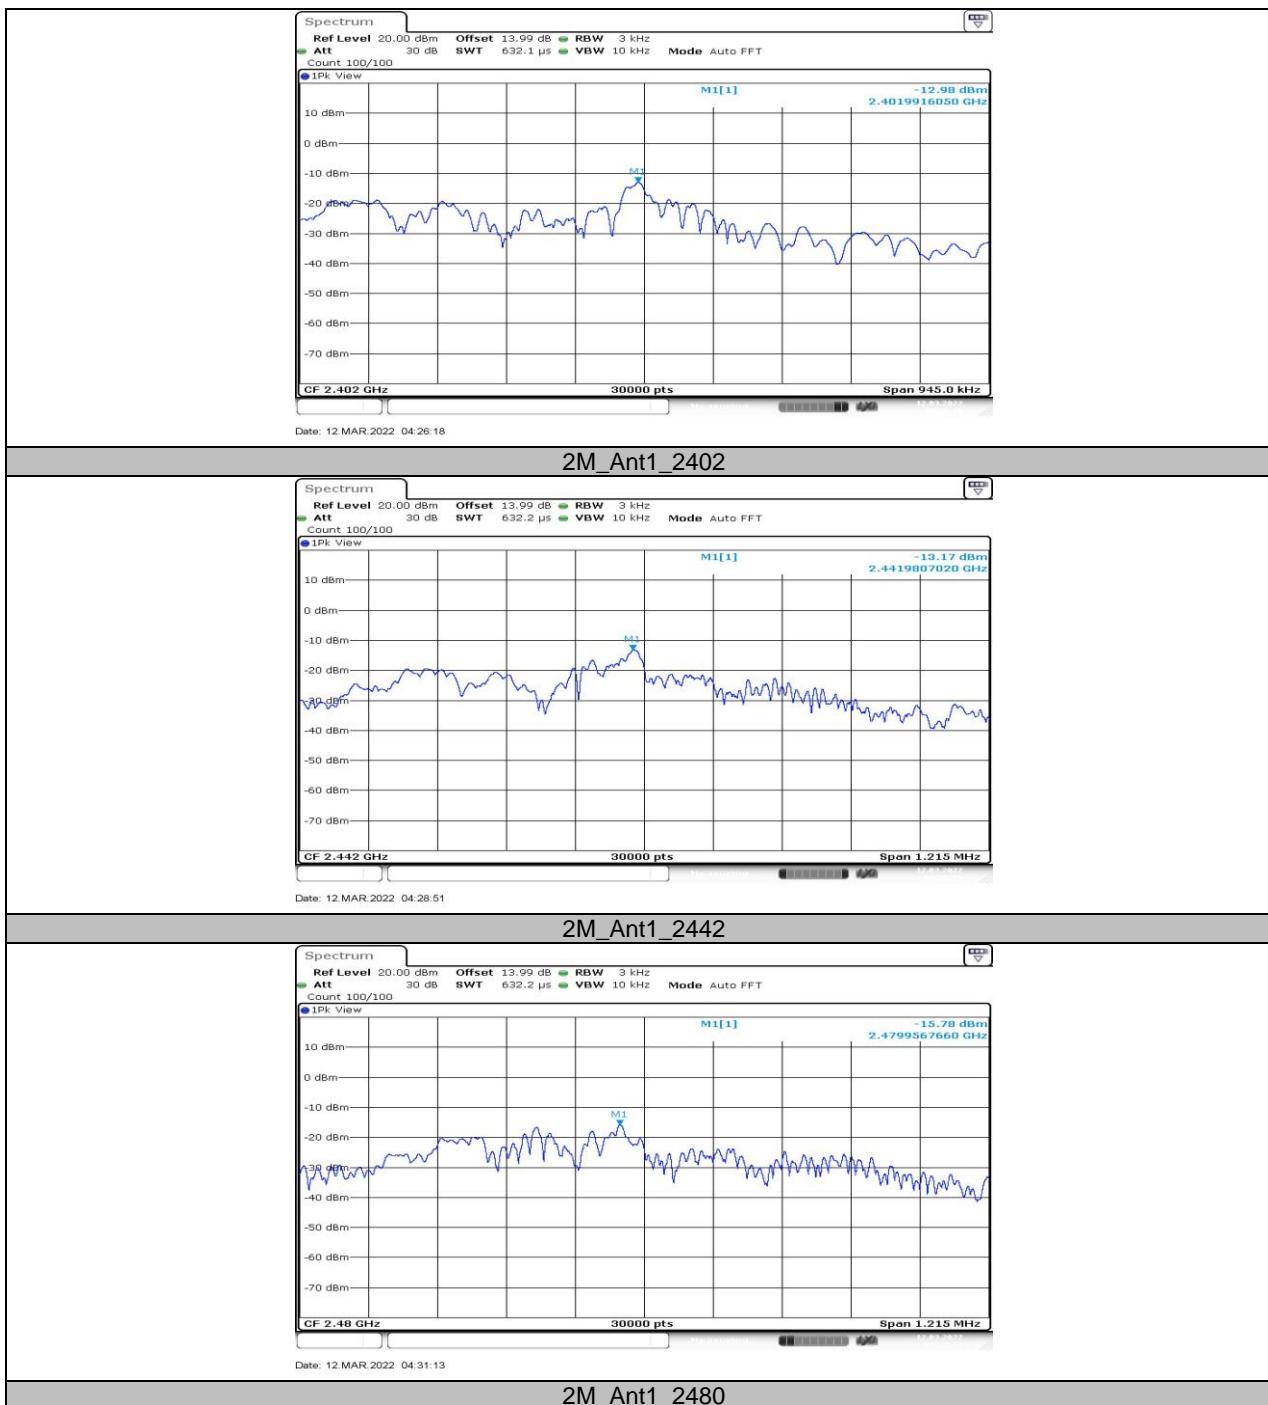

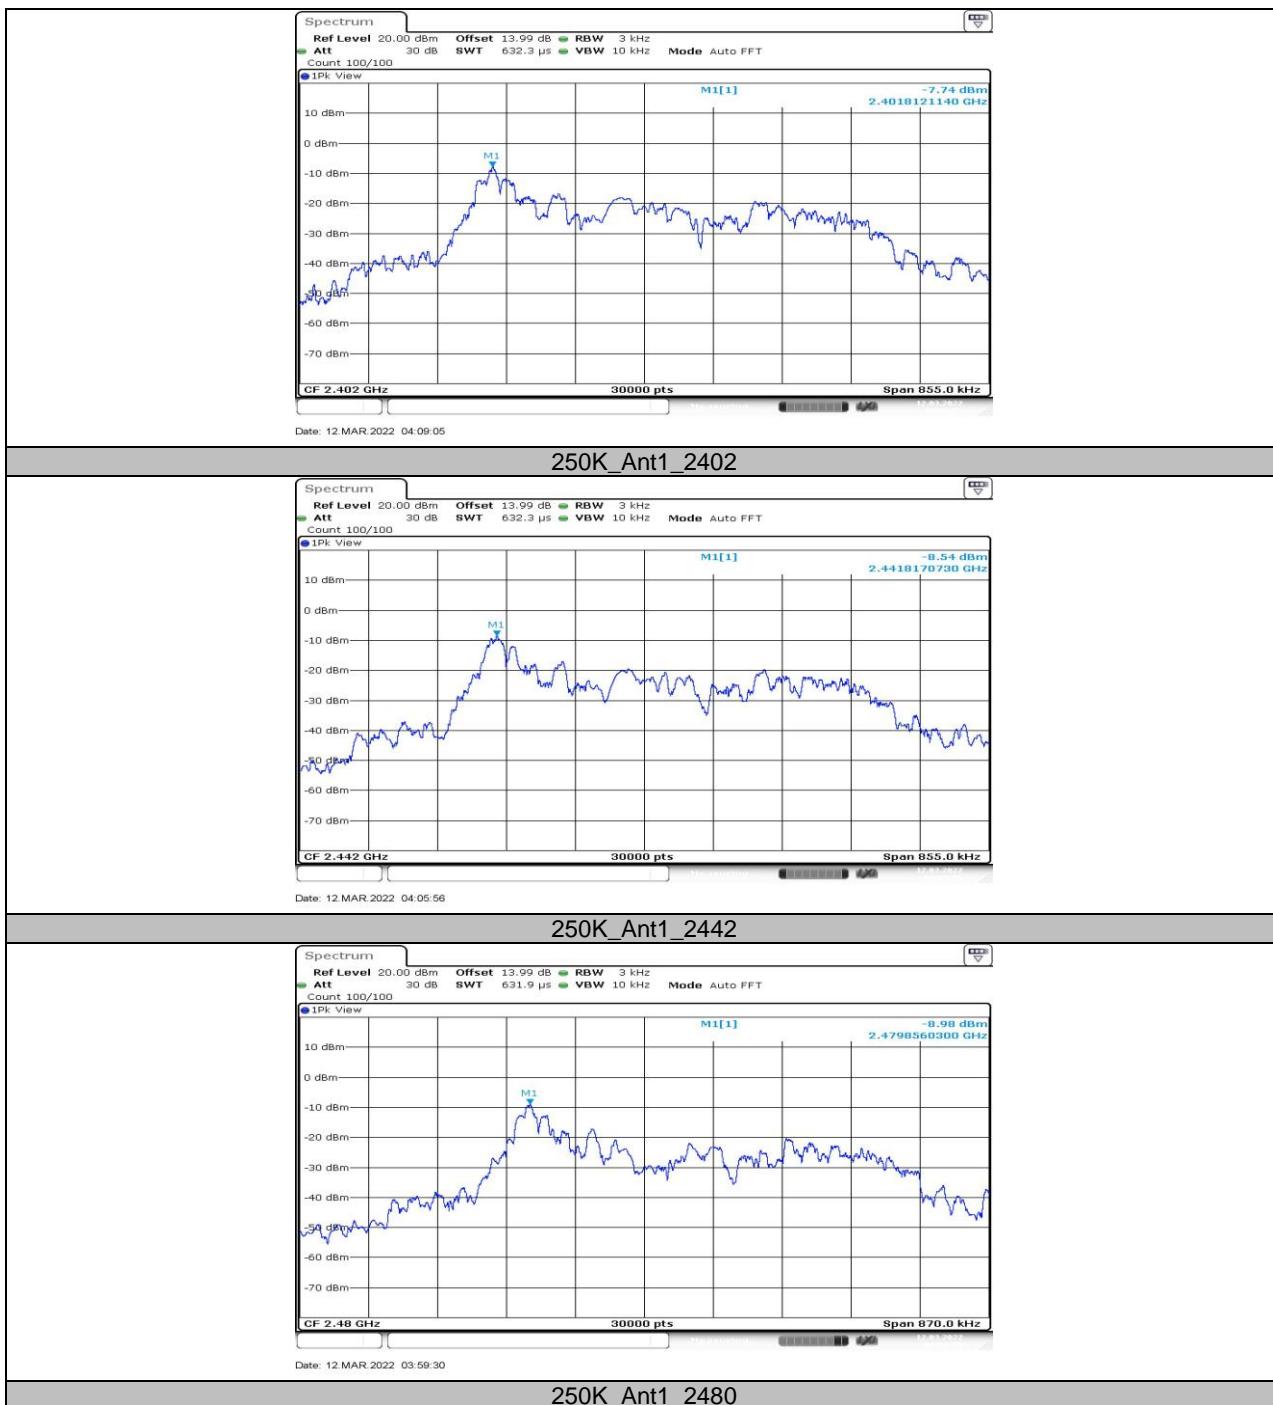



## 11.5. Appendix E: Band edge measurements

### 11.5.1. Test Result

Test Mode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
1M	Ant1	Low	2402	6.13	-32.63	≤-13.87	PASS
		High	2480	0.83	-40.73	≤-19.17	PASS
2M	Ant1	Low	2402	3.02	-41.36	≤-16.98	PASS
		High	2480	1.92	-39.23	≤-18.08	PASS
250K	Ant1	Low	2402	-2.41	-44.59	≤-22.41	PASS
		High	2480	-3.51	-44.07	≤-23.51	PASS

## 11.5.2. Test Graphs

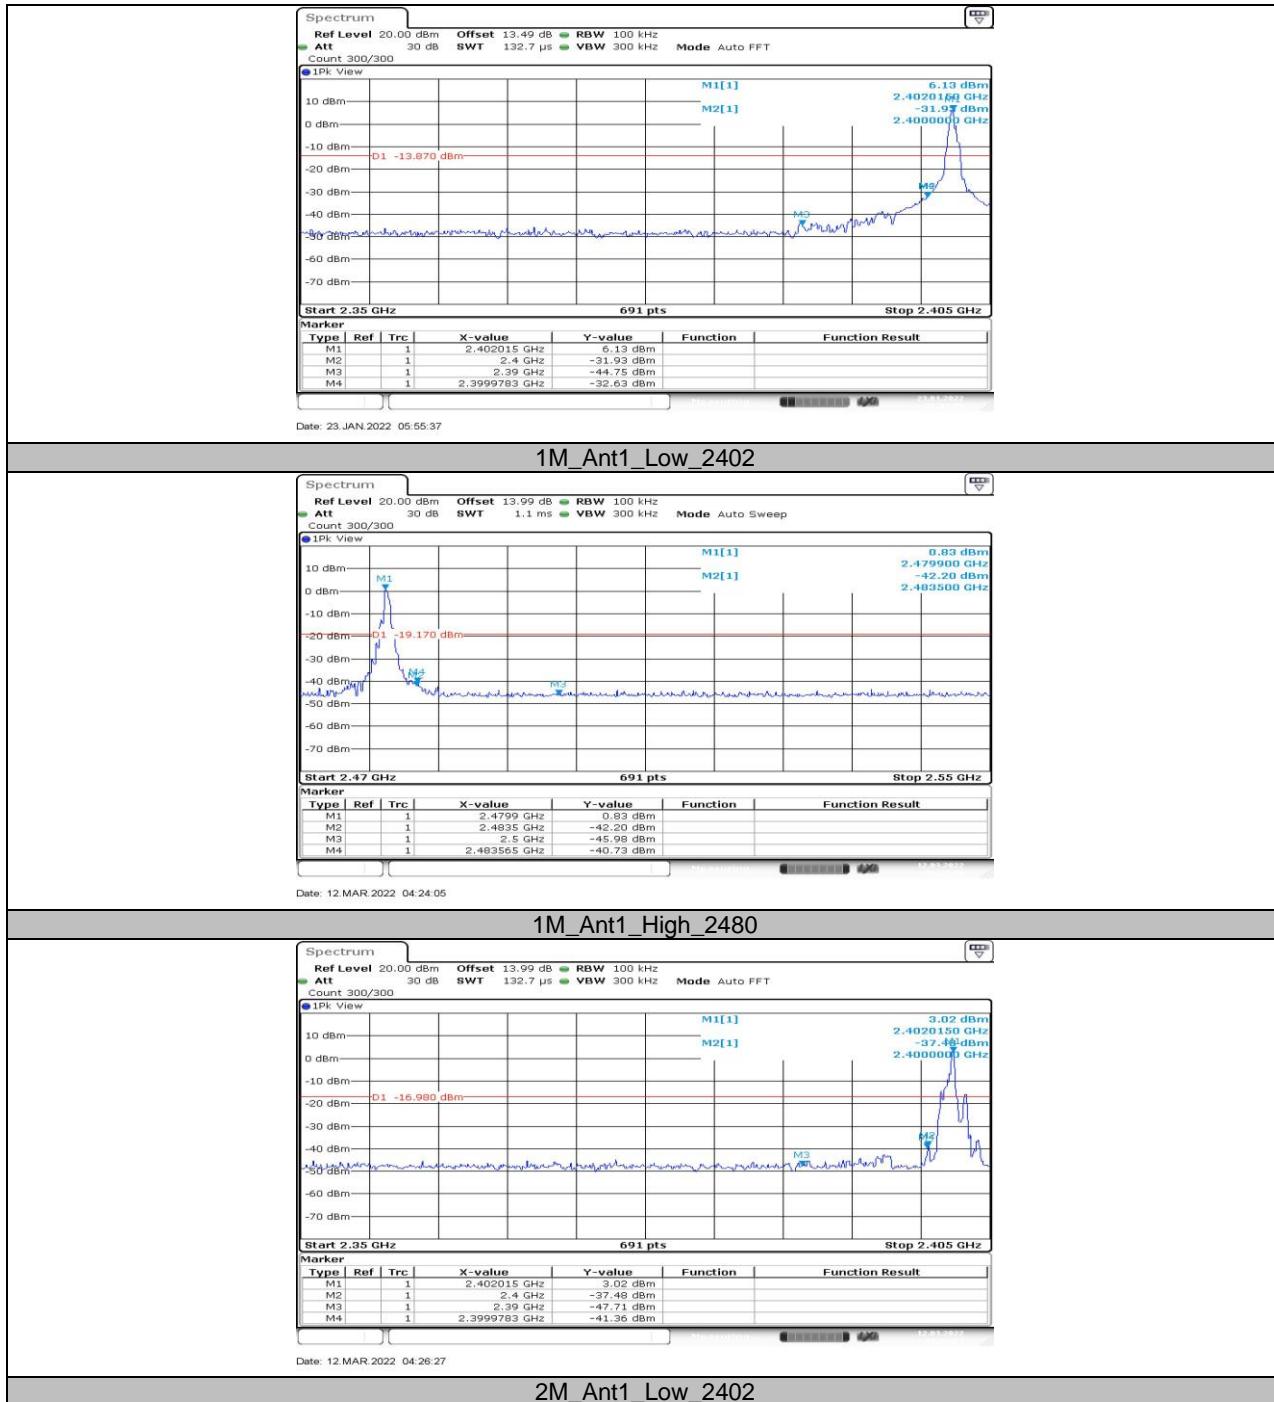

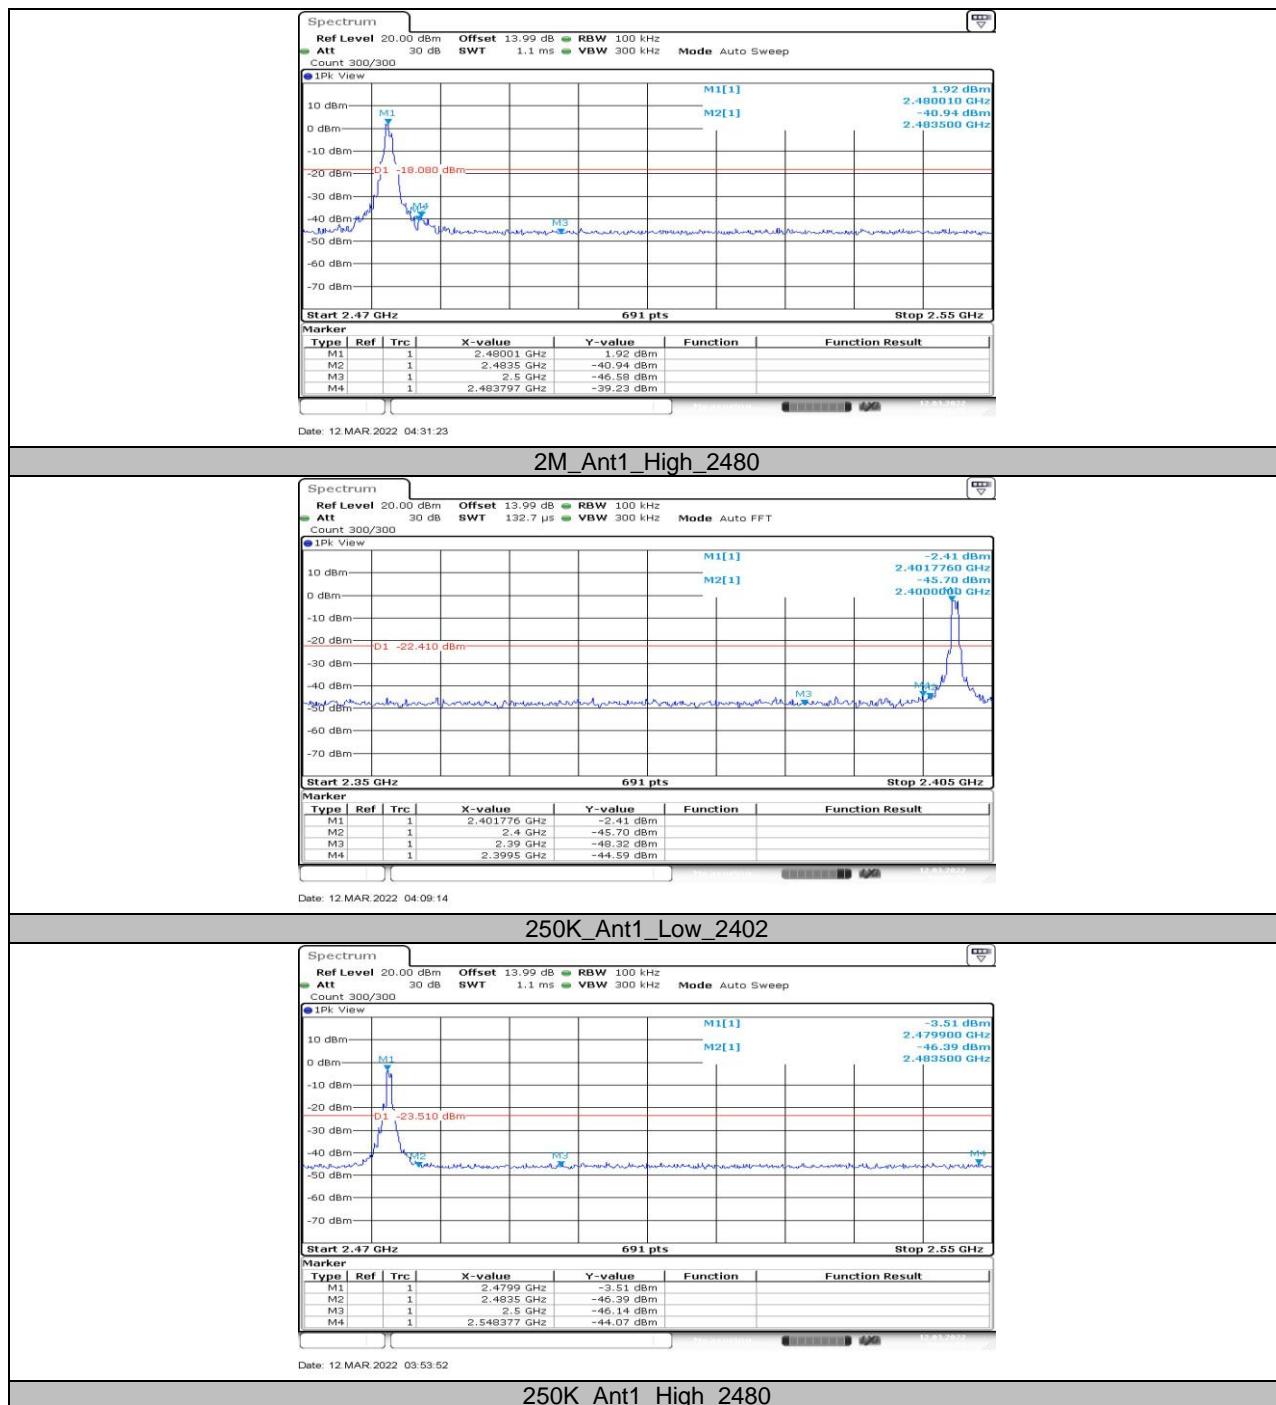



## 11.6. Appendix F: Conducted Spurious Emission


### 11.6.1. Test Result


Test Mode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
1M	Ant1	2402	Reference	1.96	1.96	---	PASS
			30~1000	1.96	-53.81	≤-18.04	PASS
			1000~26500	1.96	-48.49	≤-18.04	PASS
		2442	Reference	1.75	1.75	---	PASS
			30~1000	1.75	-53.99	≤-18.25	PASS
			1000~26500	1.75	-48.59	≤-18.25	PASS
		2480	Reference	0.92	0.92	---	PASS
			30~1000	0.92	-53.89	≤-19.08	PASS
			1000~26500	0.92	-43.25	≤-19.08	PASS
2M	Ant1	2402	Reference	3.04	3.04	---	PASS
			30~1000	3.04	-53.99	≤-16.96	PASS
			1000~26500	3.04	-46.68	≤-16.96	PASS
		2442	Reference	2.77	2.77	---	PASS
			30~1000	2.77	-53.8	≤-17.23	PASS
			1000~26500	2.77	-34.68	≤-17.23	PASS
		2480	Reference	2.01	2.01	---	PASS
			30~1000	2.01	-53.61	≤-17.99	PASS
			1000~26500	2.01	-36.74	≤-17.99	PASS
250K	Ant1	2402	Reference	-2.43	-2.43	---	PASS
			30~1000	-2.43	-52.14	≤-22.43	PASS
			1000~26500	-2.43	-35.64	≤-22.43	PASS
		2442	Reference	-2.91	-2.91	---	PASS
			30~1000	-2.91	-53.82	≤-22.91	PASS
			1000~26500	-2.91	-36.27	≤-22.91	PASS
		2480	Reference	-3.46	-3.46	---	PASS
			30~1000	-3.46	-53.68	≤-23.46	PASS
			1000~26500	-3.46	-36.78	≤-23.46	PASS


## 11.6.2. Test Graphs

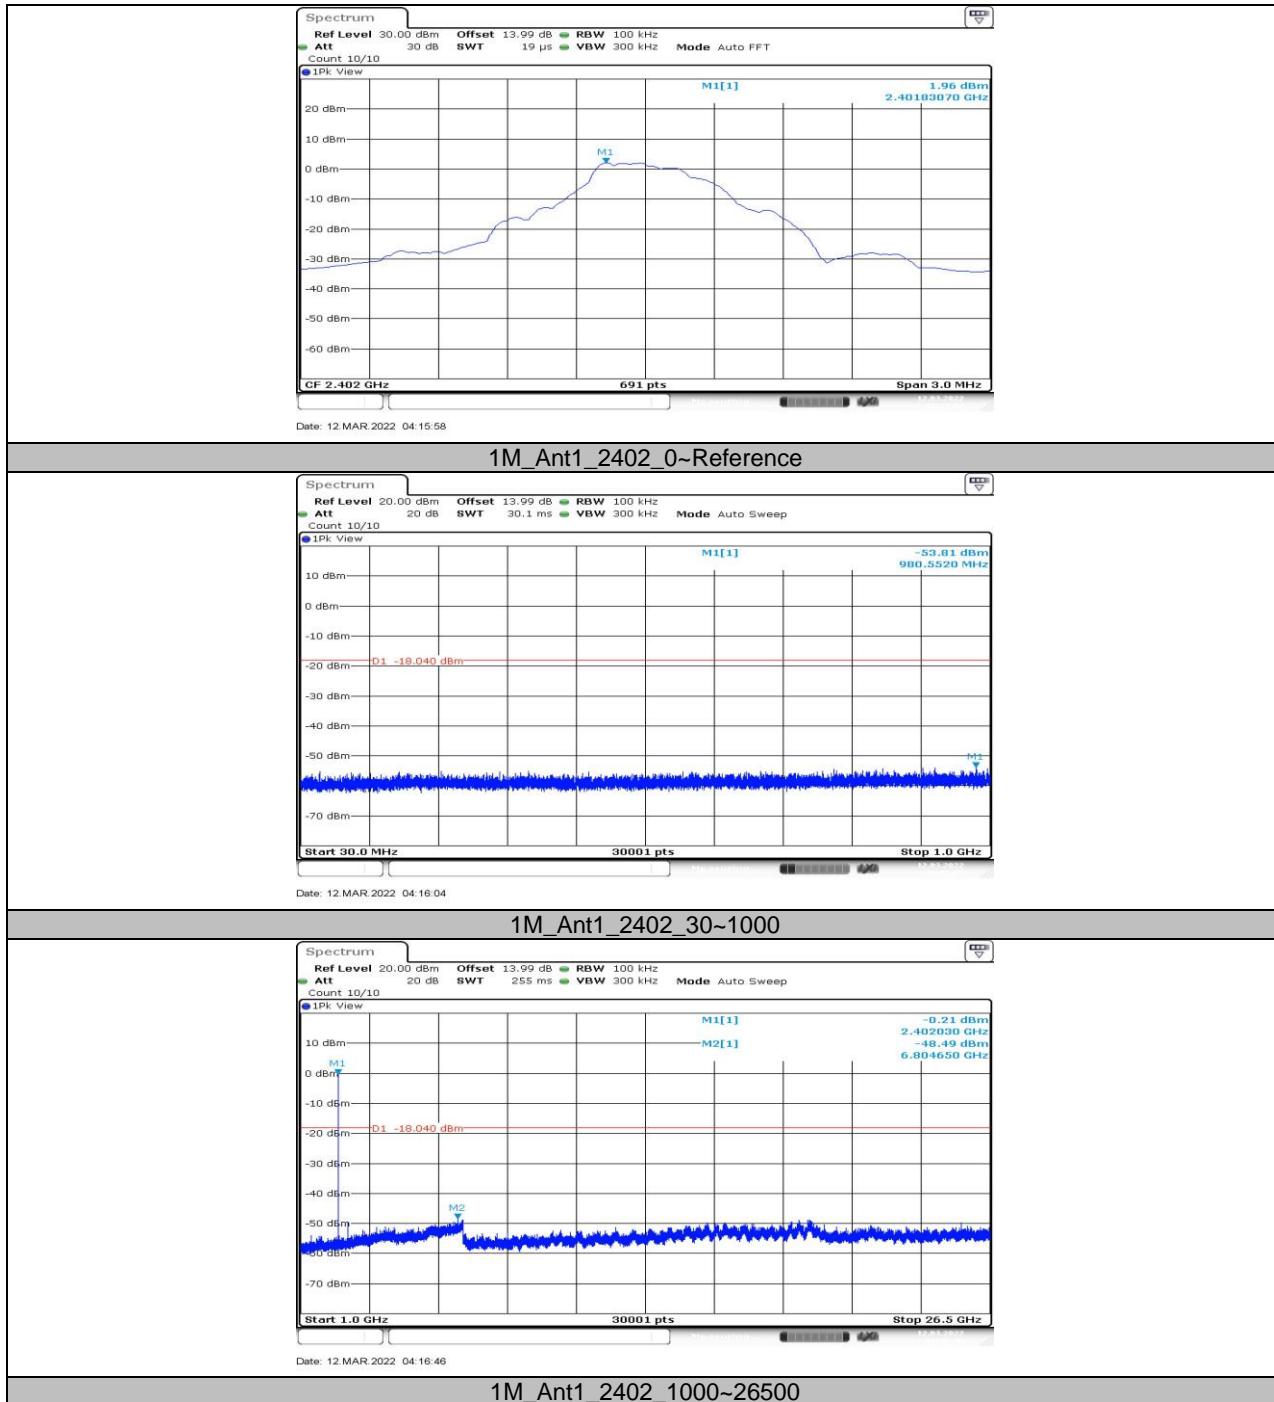


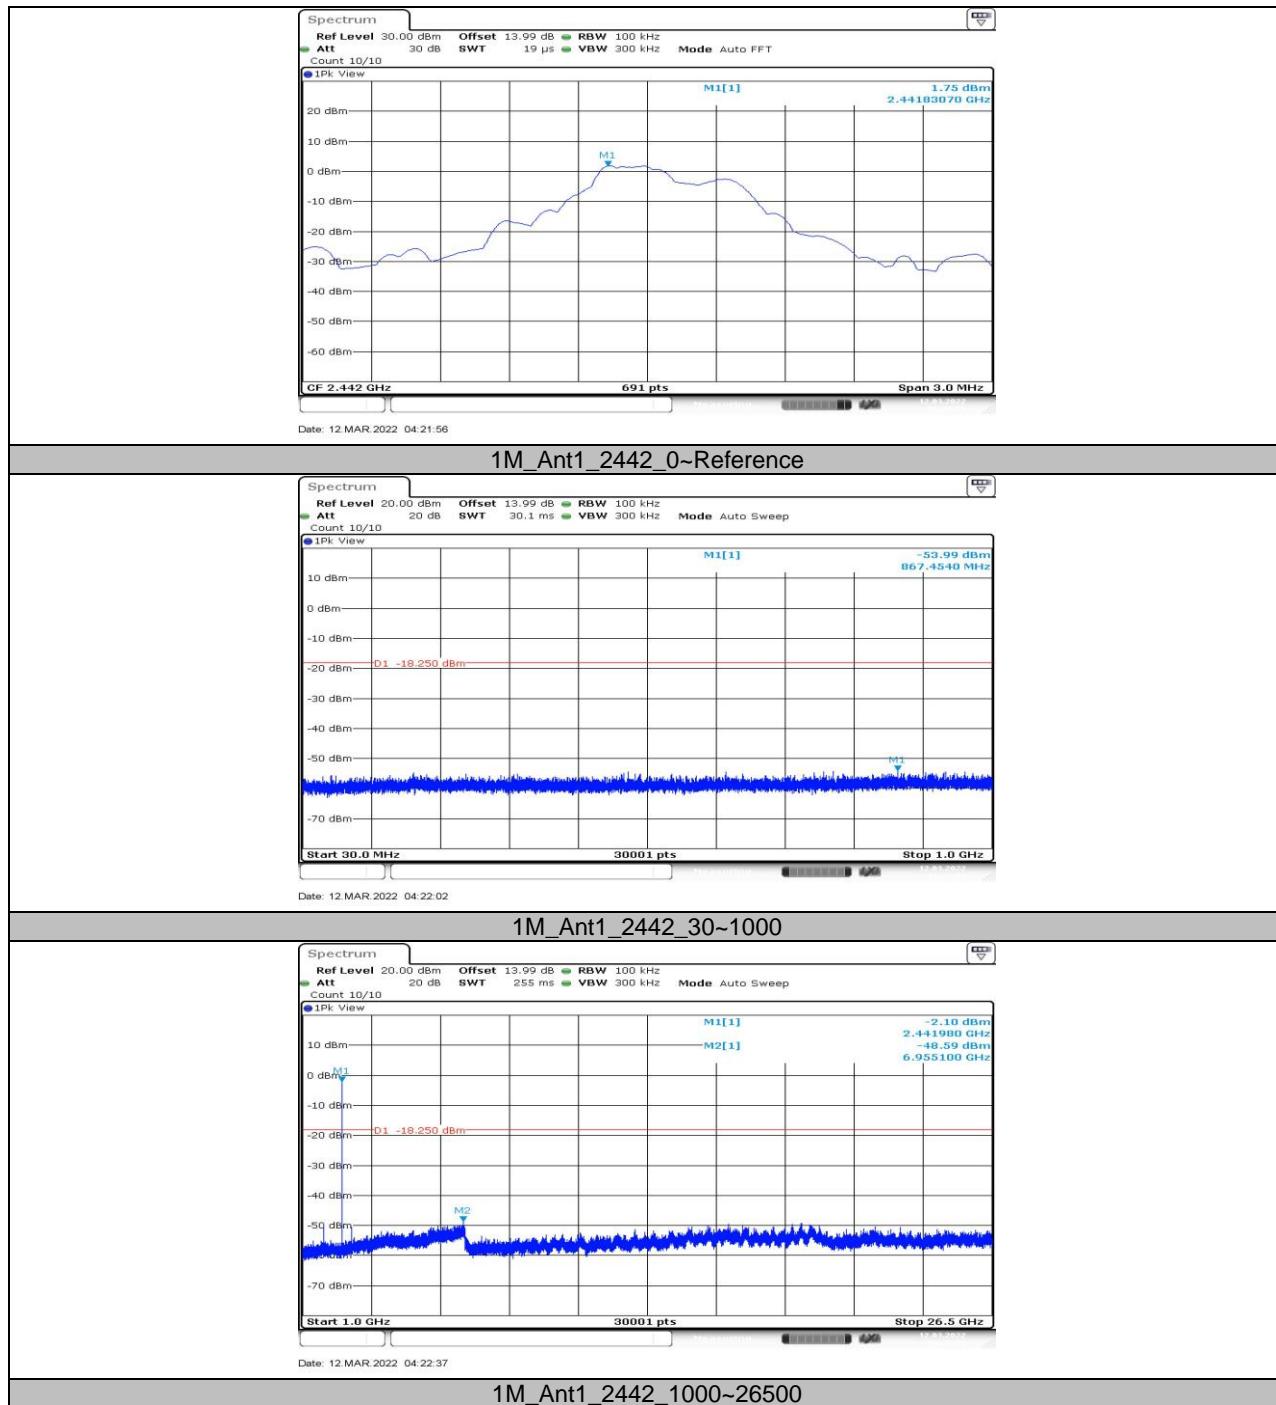


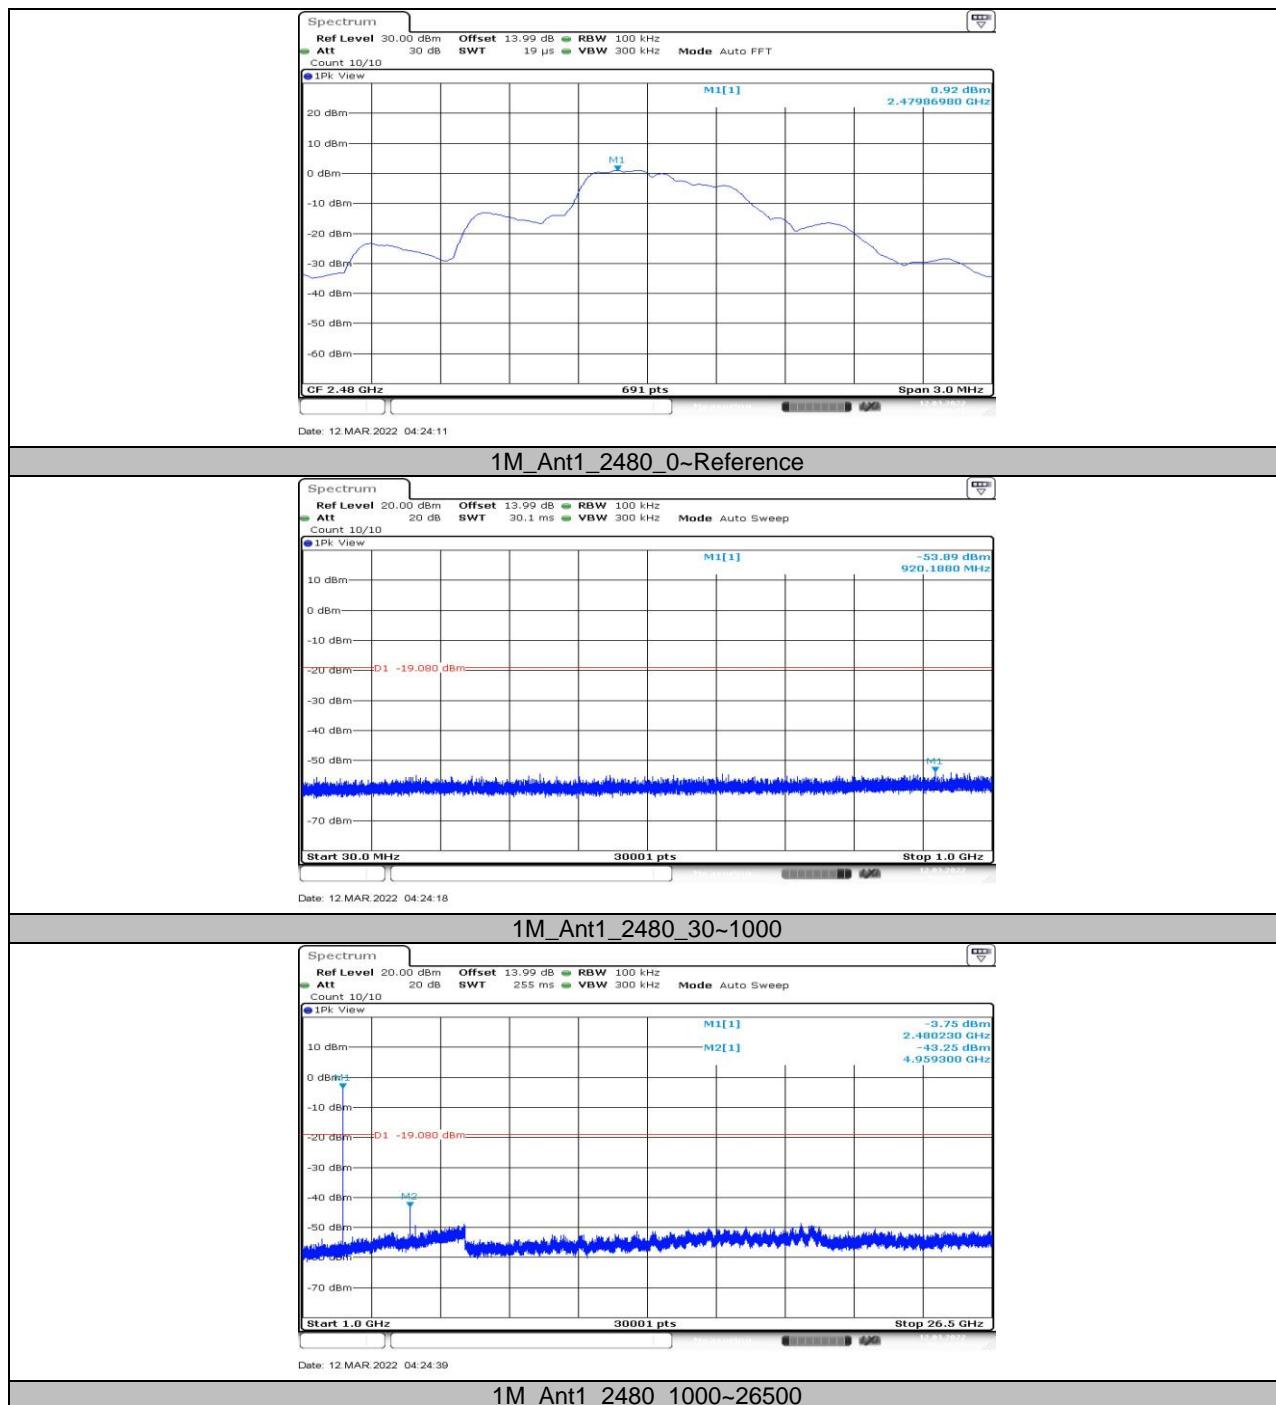


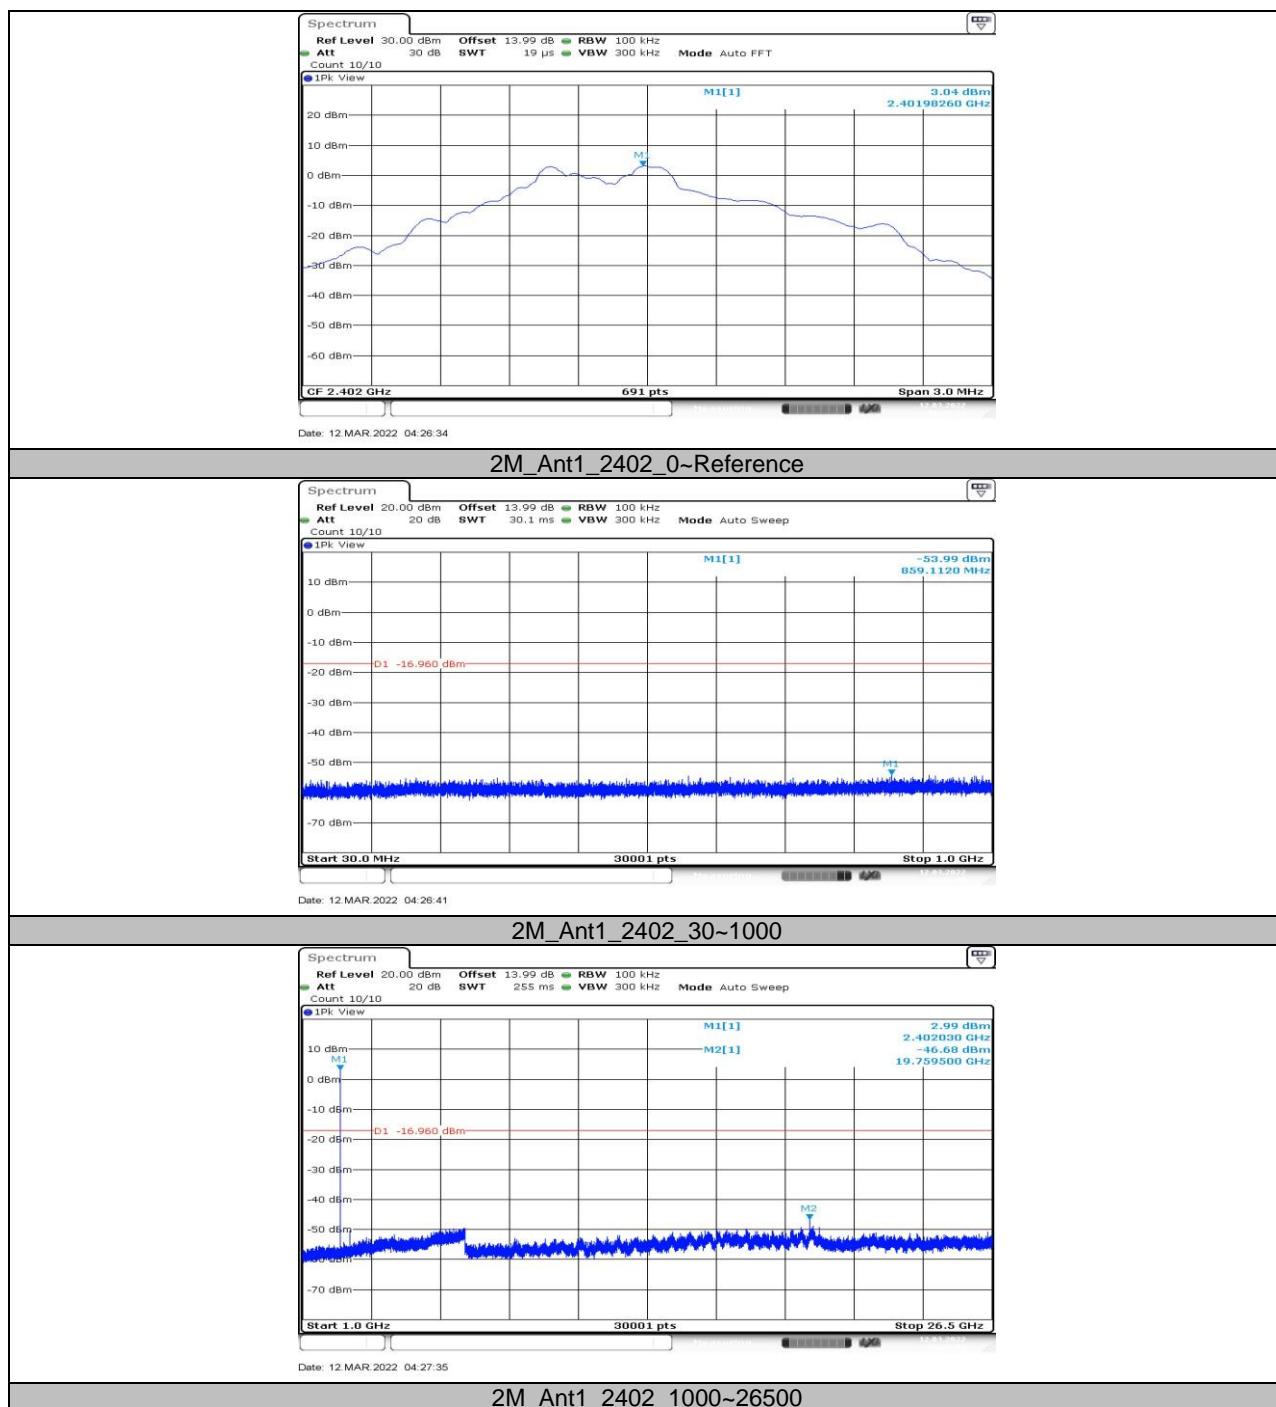


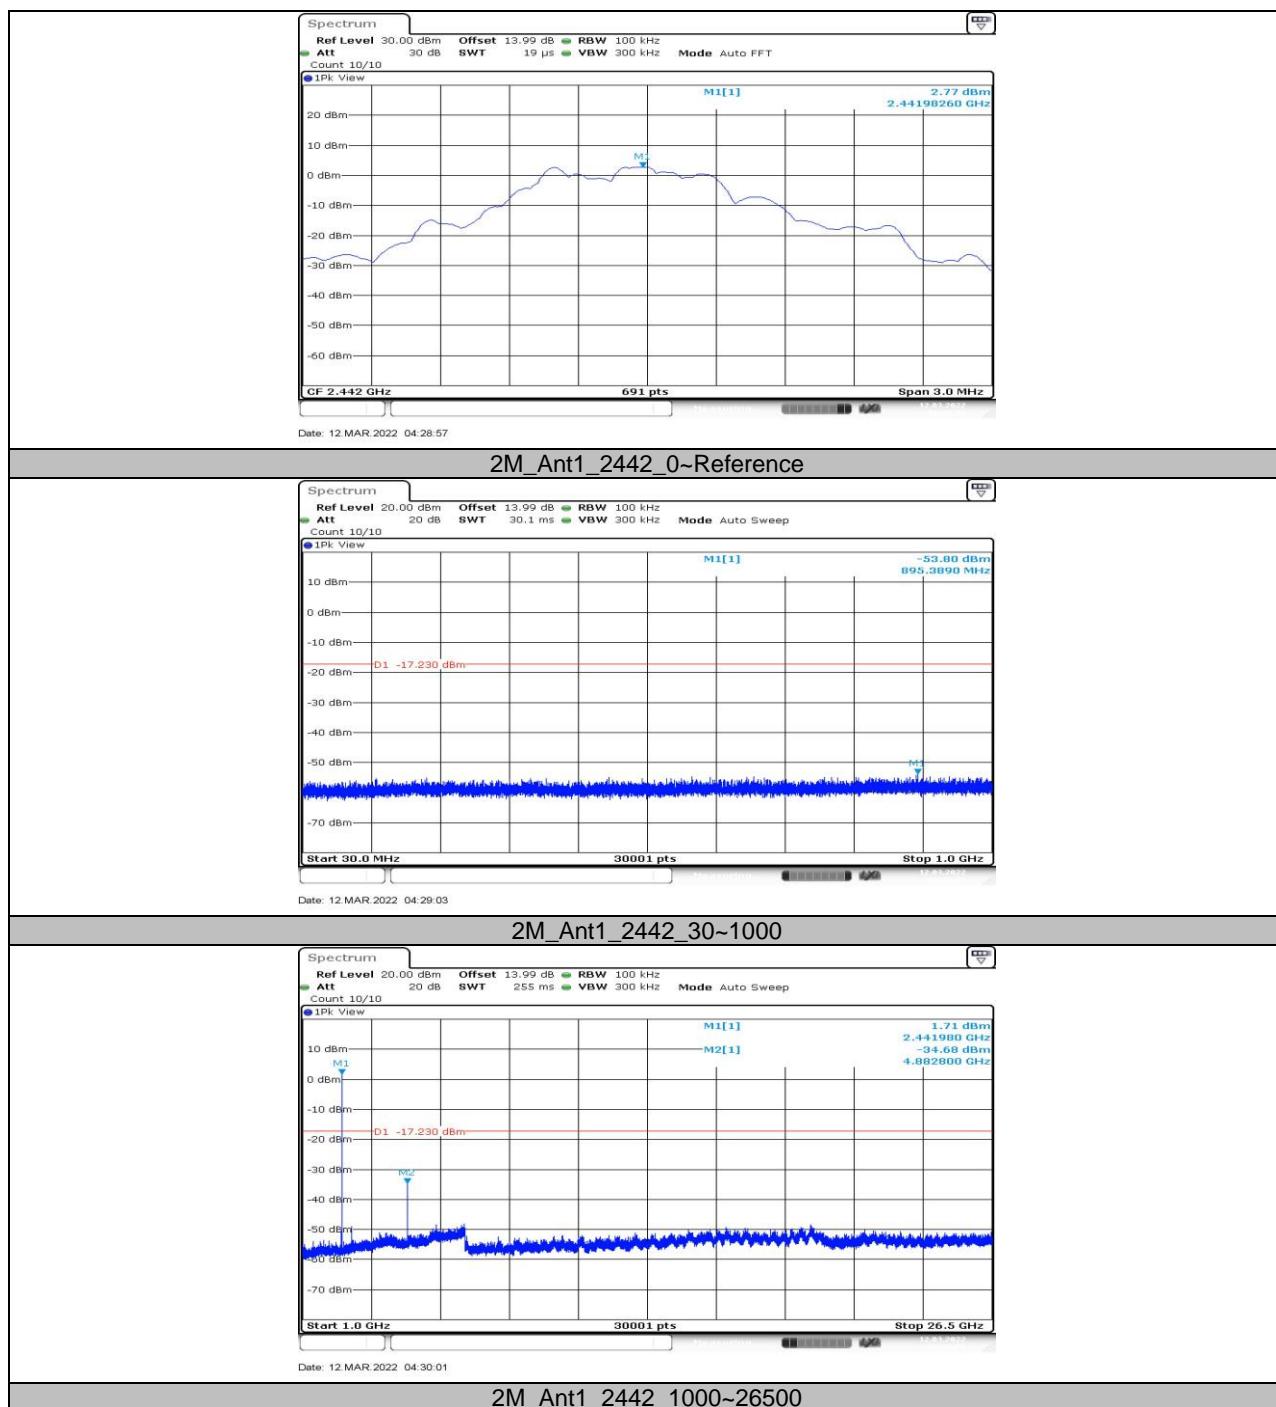

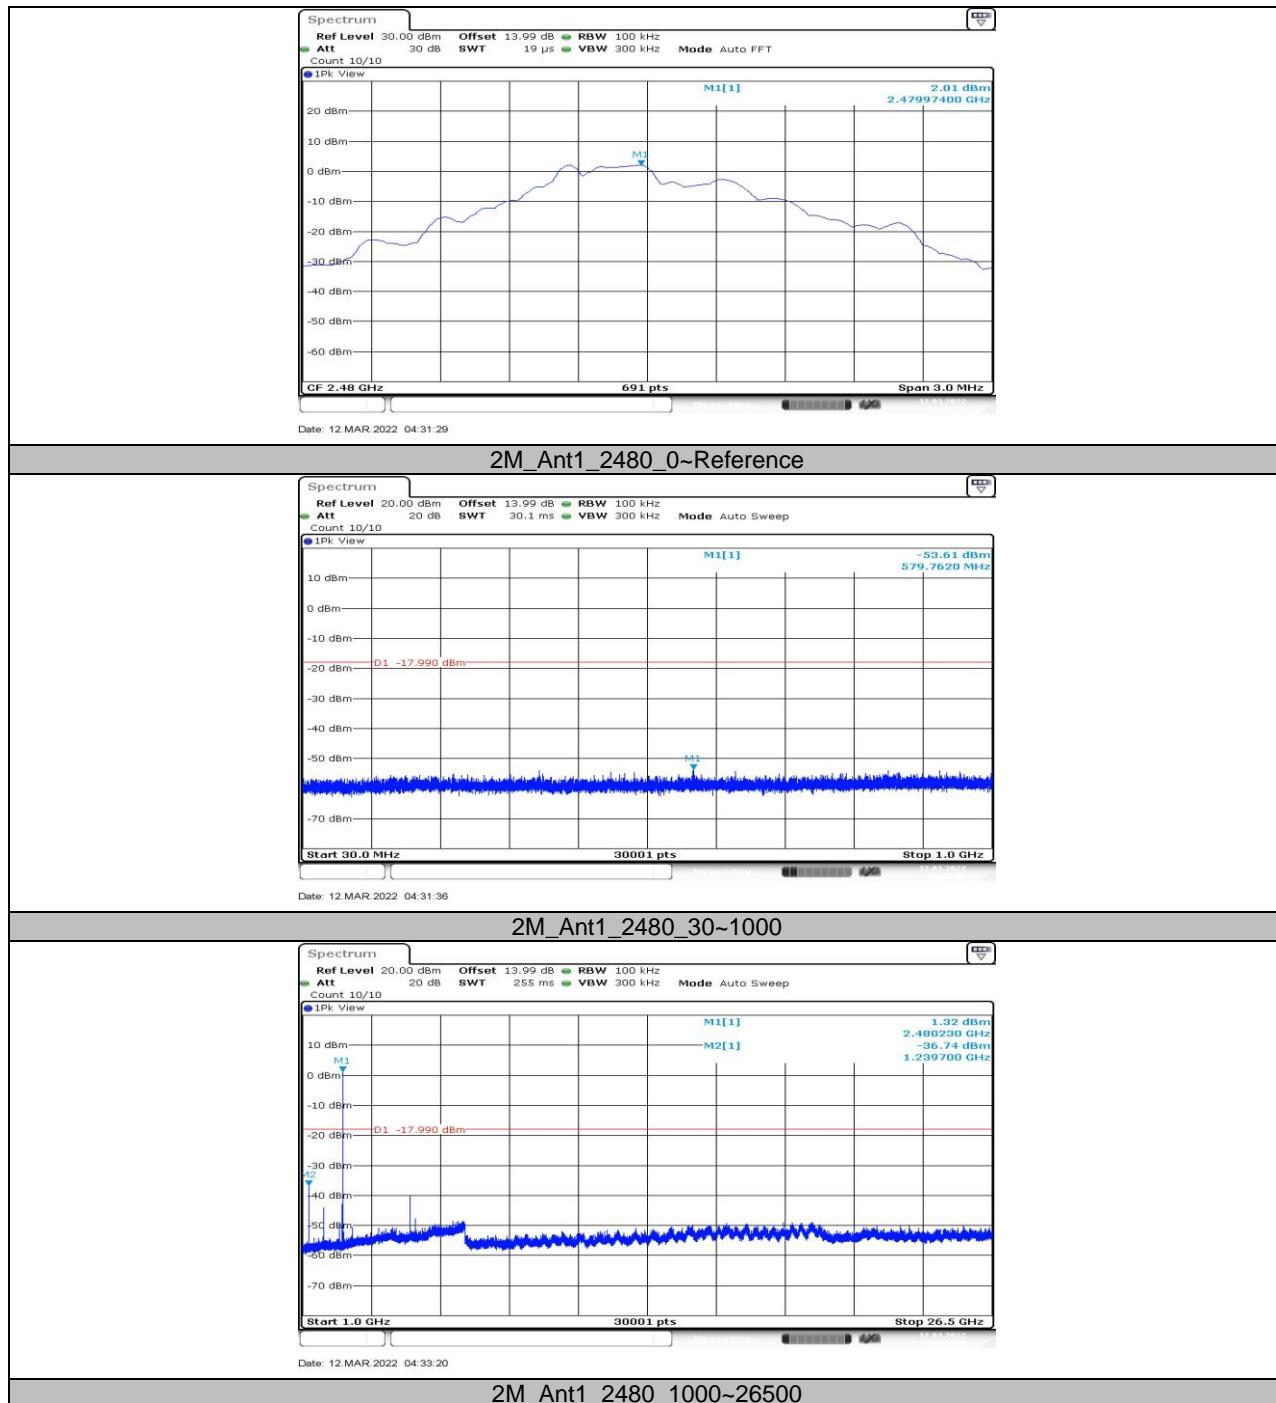

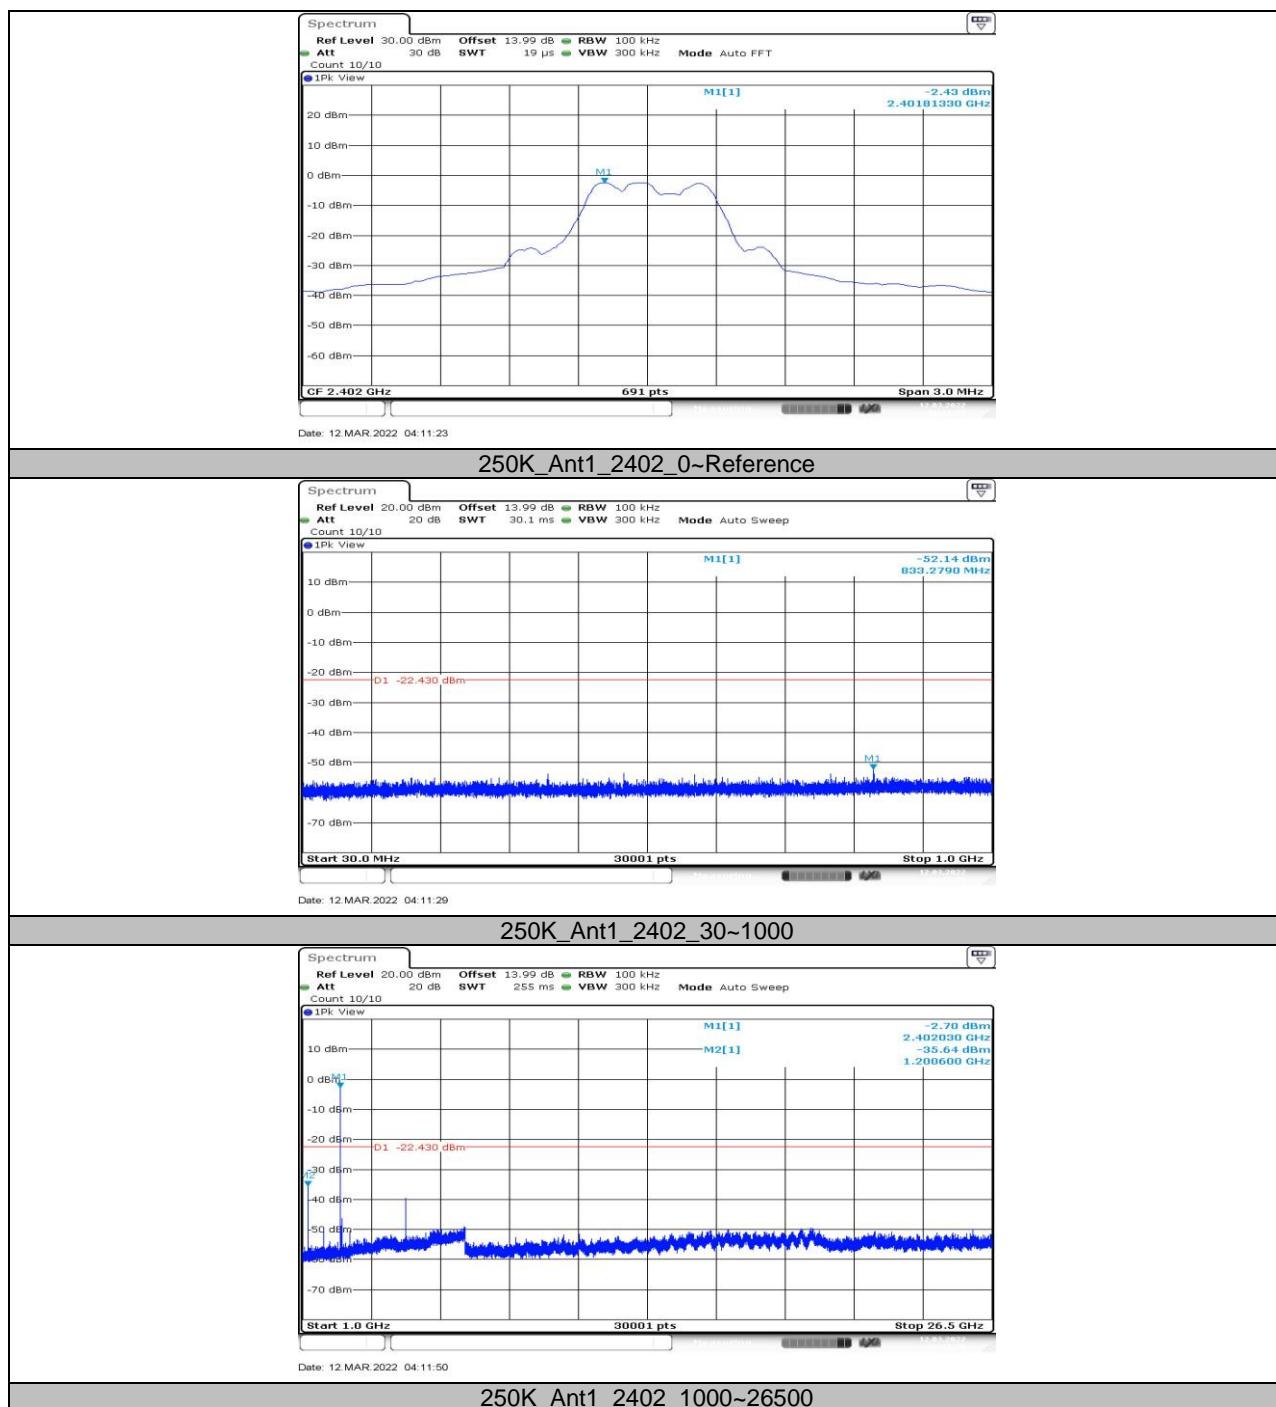

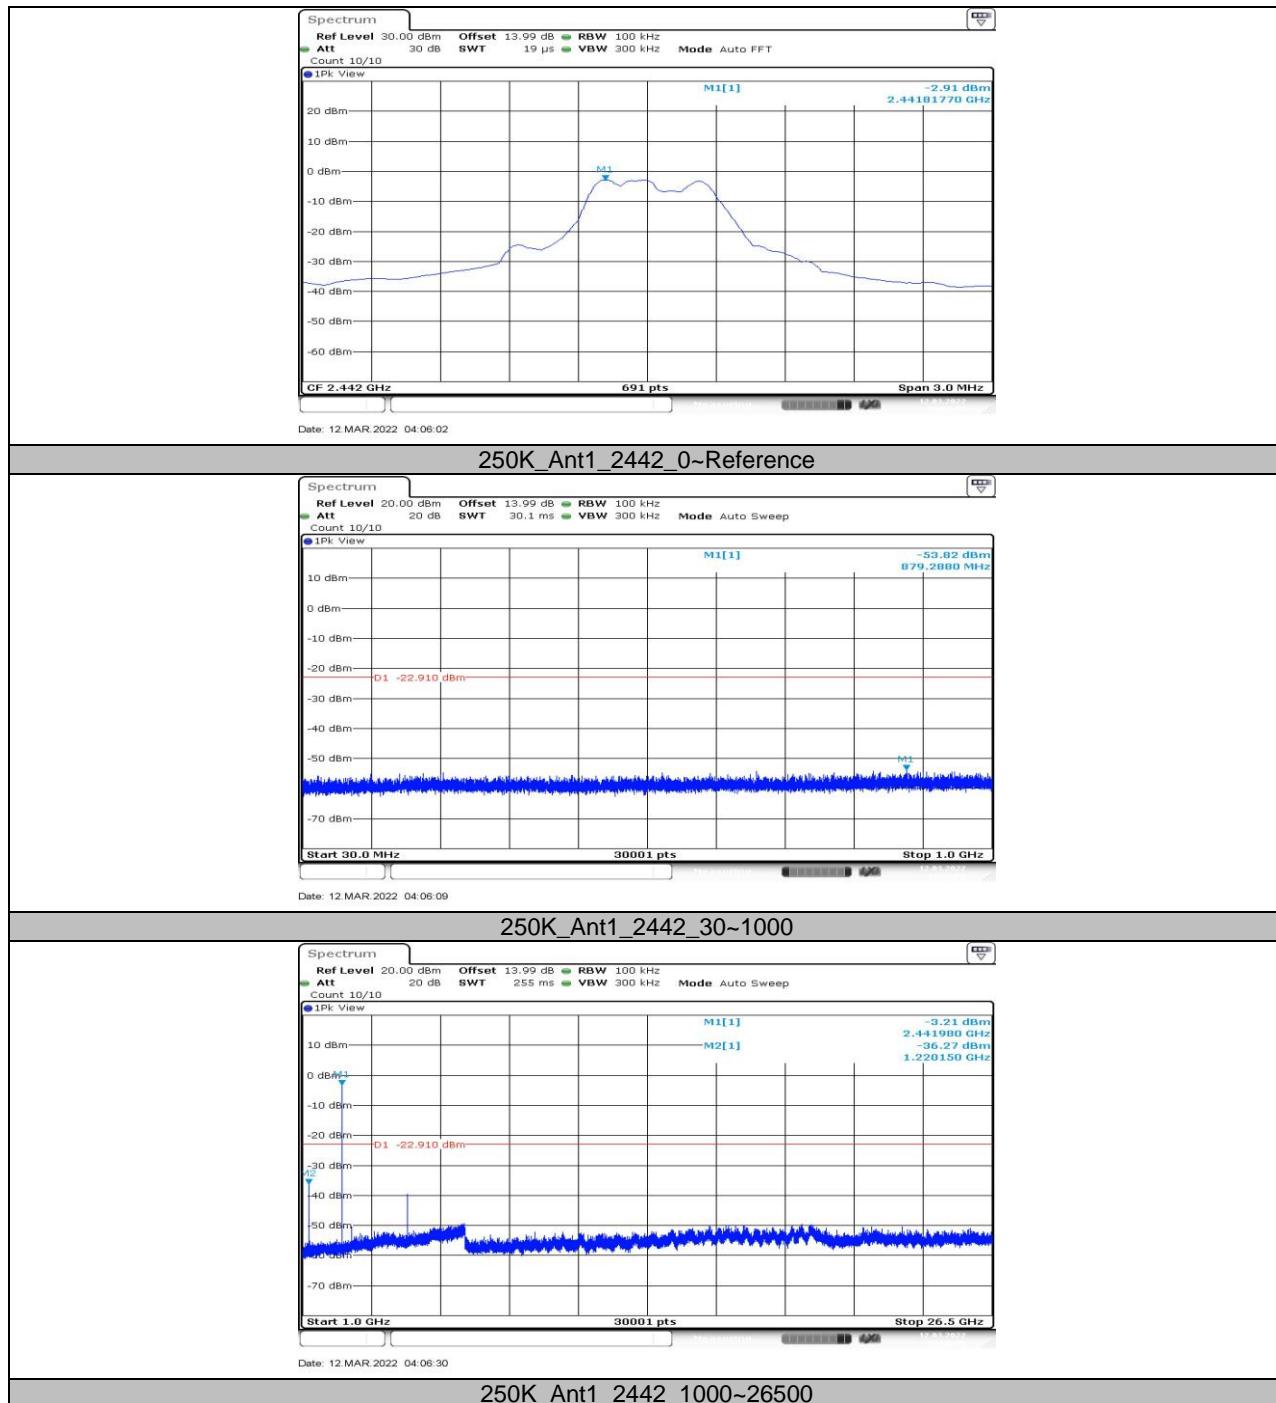

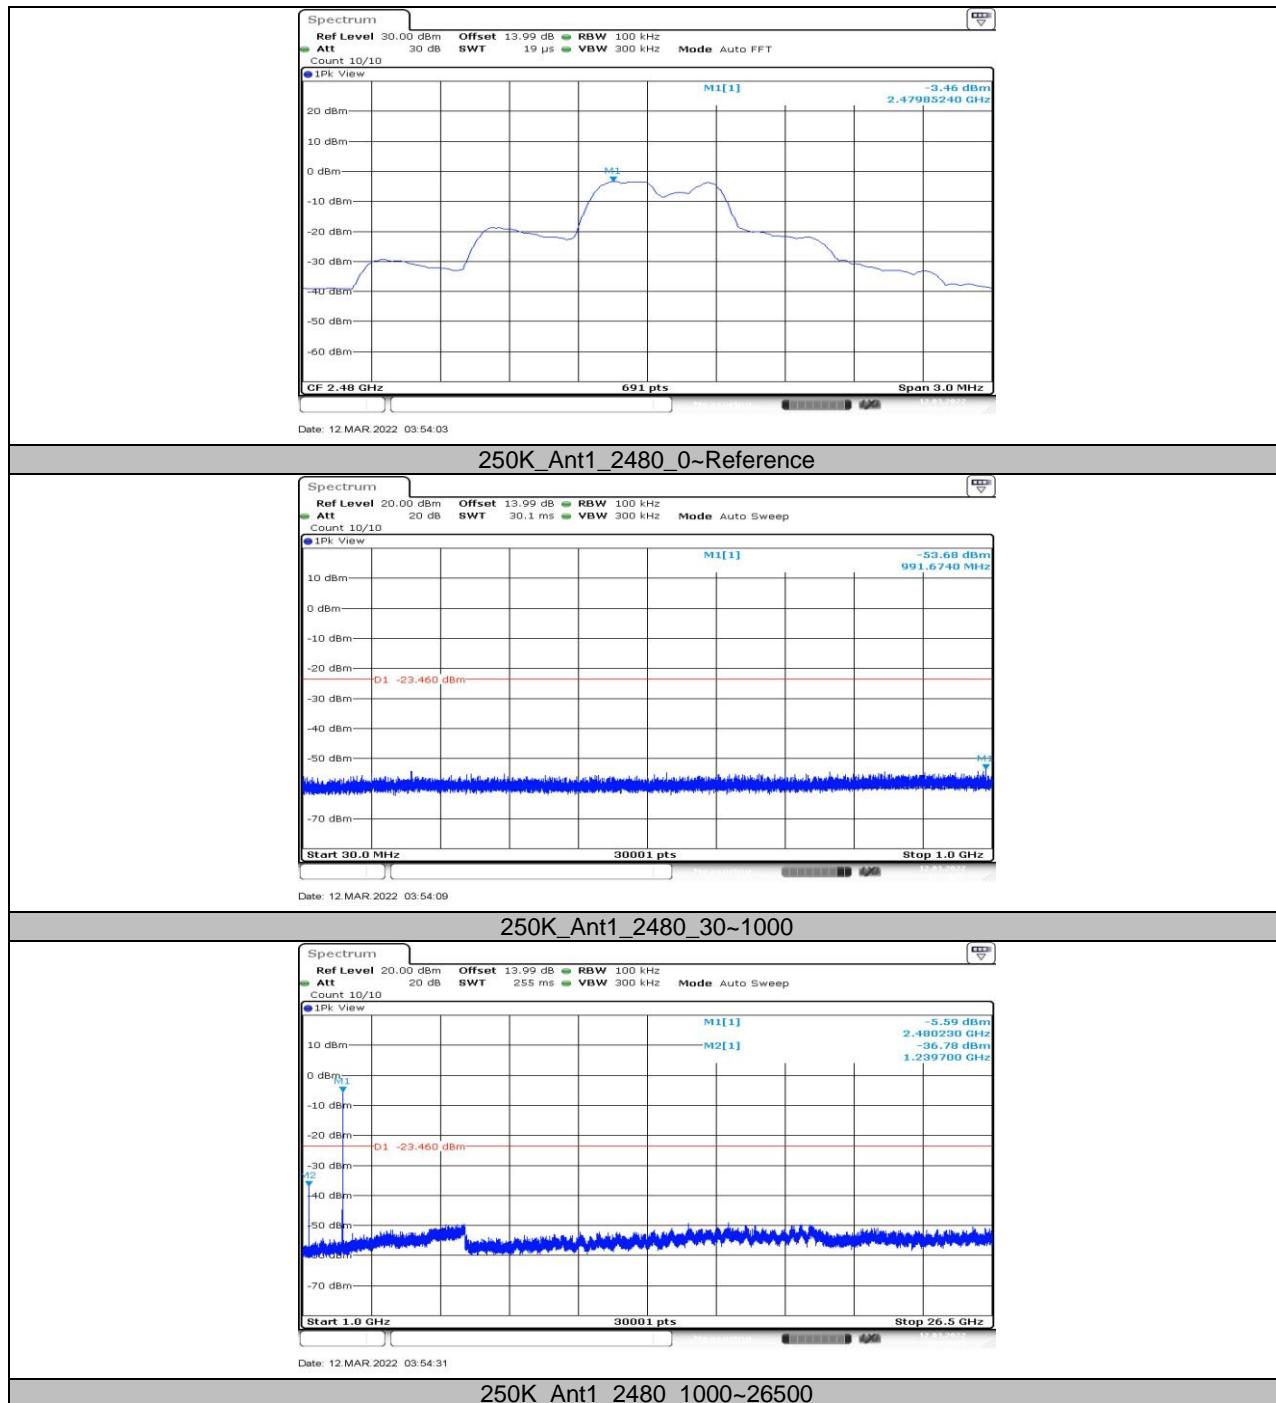

## 11.7. Appendix G: Duty Cycle

### 11.7.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
1M	0.16	4.19	0.0382	3.82	14.18	6.25	7
2M	0.10	4.13	0.0242	2.42	16.16	10.00	11
250K	0.44	4.47	0.0984	9.84	10.07	2.27	3

Note:


Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

## 11.7.2. Test Graphs

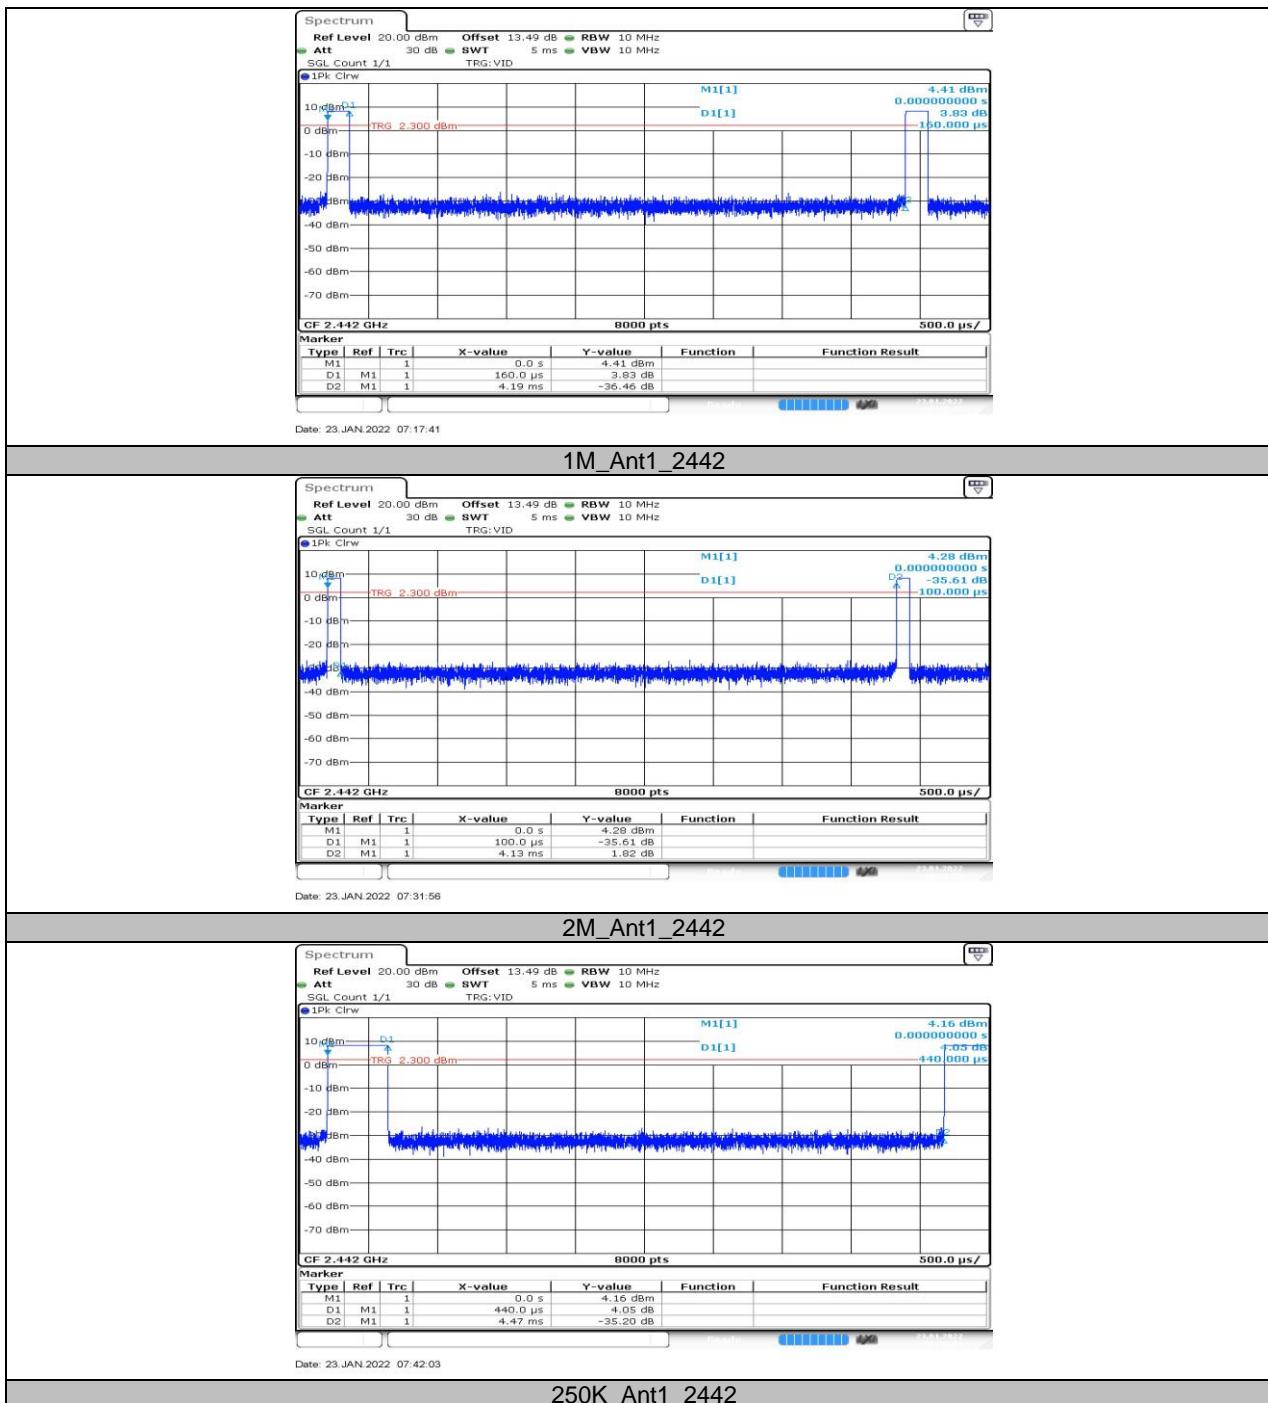

**END OF REPORT**