

RADIO TEST REPORT FCC ID: 2AJ7E-HTP601-B

Product: Wireless Touch Switch

Trade Mark: N/A

Model No.: HTP601-B

Serial Model: HTP501-B,HTP501-BM,HTP601-BM

Report No.: NTEK-2016NT09138954F

Issue Date: 02 Nov. 2016

Prepared for

Shenzhen HOMA Technology Co.,Ltd.
4th Floor, A Buliding, Baoshi Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China..

Prepared by

NTEK TESTING TECHNOLOGY CO., LTD.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599 Website:http://www.ntek.org.cn



TABLE OF CONTENTS

	3
SUMMARY OF TEST RESULTS	4
FACILITIES AND ACCREDITATIONS	5
3.1 FACILITIES	5
GENERAL DESCRIPTION OF EUT	6
DESCRIPTION OF TEST MODES	8
SETUP OF EQUIPMENT UNDER TEST	9
6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	9 10
TEST REQUIREMENTS	13
7.1 CONDUCTED EMISSIONS TEST	
3 3 6 6 6 7 7 7 7	FACILITIES AND ACCREDITATIONS 1.1 FACILITIES



1 TEST RESULT CERTIFICATION

Shenzhen HOMA Technology Co.,Ltd.		
4th Floor, A Buliding, Baoshi Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China		
Shenzhen HOMA Technology Co.,Ltd.		
4th Floor, A Buliding, Baoshi Technology Park, Baoshi Road, Bao'a District, Shenzhen, Guangdong, China		
Wireless Touch Switch		
HTP601-B		
HTP501-B,HTP501-BM,HTP601-BM		

Measurement Procedure Used:

APPLICABLE STANDARDS				
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT			
FCC 47 CFR Part 2, Subpart J:2016				
FCC 47 CFR Part 15, Subpart C:2016				
KDB 174176 D01 Line Conducted FAQ v01r01	Complied			
ANSI C63.10-2013				
FCC KDB 558074 D01 DTS Meas Guidance v03r05				

This device described above has been tested by NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK Testing Technology Co., Ltd., this document may be altered or revised by NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

:	13 Sep. 2016 ~ 02 Nov. 2016
:	Shu lin
	(Allen Liu)
:	Jason chen
	(Jason Chen)
	Sam. Chen
:	
	(Sam Chen)
	:_



2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C					
Standard Section	Test Item	Verdict	Remark		
15.207	Conducted Emission PASS				
15.247 (a)(2)	6dB Bandwidth	PASS			
15.247 (b)	Peak Output Power	PASS			
15.247 (c)	Radiated Spurious Emission	PASS			
15.247 (d)	Power Spectral Density	PASS			
15.205	Band Edge Emission	PASS			
15.203	Antenna Requirement	PASS			

- "N/A" denotes test is not applicable in this Test Report.
 All test items were verified and recorded according to the standards and without any deviation during the test.



3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2014.09.04

The certificate is valid until 2017.09.03

The Laboratory has been assessed and proved to be in compliance with

CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L5516.

Accredited by Industry Canada, August 29, 2012 The Certificate Registration Number is 9270A-1.

Accredited by FCC, September 6, 2013

The Certificate Registration Number is 238937.

Name of Firm : NTEK Testing Technology Co., Ltd

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang

Street, Bao'an District, Shenzhen P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.


No.	Item	Uncertainty	
1	Conducted Emission Test	±1.38dB	
2	RF power, conducted	±0.16dB	
3	Spurious emissions, conducted	±0.21dB	
4	All emissions, radiated(<1G)	±4.68dB	
5	All emissions, radiated(>1G)	±4.89dB	
6	Temperature	±0.5°C	
7	Humidity	±2%	



4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification				
Equipment	Wireless Touch Switch			
Trade Mark	N/A			
FCC ID	2AJ7E-HTP601-B			
Model No.	HTP601-B			
Serial Model	HTP501-B,HTP501-BM,HTP601-BM			
Model Difference	All the models are identical except model No and class color			
Operating Frequency	2402MHz~2480MHz			
Modulation	GFSK			
Number of Channels	40 Channels			
Bluetooth Version	BT V4.0(BLE)			
Antenna Type	PCB Antenna			
Antenna Gain	1 dBi			
Power supply				
Tower suppry	☐Adapter supply			
HW Version	N/A			
SW Version	N/A			

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.





Revision History

Report No.	Version	Description	Issued Date
NTEK-2016NT09138954F	Rev.01	Initial issue of report	Nov 02, 2016
	<u> </u>		



5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Page 8 of 39

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Channel	Frequency(MHz)
0	2402
1	2404
	•••
19	2440
20	2442
	•••
38	2478
39	2480

Note: $fc=2402MHz+k\times2MHz$ k=0 to 39

The following summary table is showing all test modes to demonstrate in compliance with the standard.

The following summary table is showing all test modes to demonstrate in compliance with the standard.				
Test Cases				
Test Item	Data Rate/ Modulation			
rest item	Bluetooth 4.0_LE / GFSK			
AC Conducted Emission	Mode 1: normal link mode			
	Mode 1: normal link mode			
Radiated Test	Mode 2: Bluetooth Tx Ch00_2402MHz_1Mbps			
Cases	Mode 3: Bluetooth Tx Ch19_2440MHz_1Mbps			
	Mode 4: Bluetooth Tx Ch39_2480MHz_1Mbps			
Conducted Test	Mode 2: Bluetooth Tx Ch00_2402MHz_1Mbps			
Conducted rest	Mode 3: Bluetooth Tx Ch19_2440MHz_1Mbps			
Cases	Mode 4: Bluetooth Tx Ch39_2480MHz_1Mbps			

Note:


- The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
- 2. AC power line Conducted Emission was tested under maximum output power.
- 3. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.
- 4. EUT is set to continuous transmission mode. duty cycle greater than 98%.




6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM




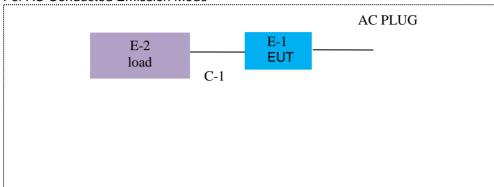

For Radiated Test Cases

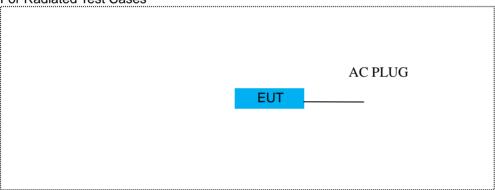

For Conducted Test Cases

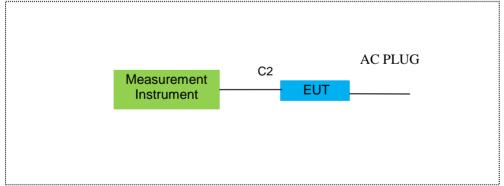

Note:The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

100101					
Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
E-1	Wireless Touch Switch	N/A	HTP601-B	2AJ7E-HTP601-B	EUT
E-2	Load	N/A	40Ω	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	Power Cable	NO	NO	0.5m
C-2	RF Cable	NO	NO	0.5m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in [Length] column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2016.07.06	2017.07.05	1 year
2	EMI Test Receiver	Agilent	N9038A	MY53227146	2016.06.06	2017.06.05	1 year
3	Test Receiver	R&S	ESPI	101318	2016.06.07	2017.06.06	1 year
4	Bilog Antenna	TESEQ	CBL6111D	31216	2016.07.06	2017.07.05	1 year
5	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.07	2017.06.06	1 year
6	Spectrum Analyzer	Agilent	N9020A	MY49100060	2016.06.07	2017.06.06	1 year
7	Horn Antenna	EM	EM-AH-1018 0	2011071402	2016.07.06	2017.07.05	1 year
8	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
9	Amplifier	EM	EM-30180	060538	2015.12.22	2016.12.21	1 year
10	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07	1 year
11	Test Cable (9KHz-30MHz)	N/A	R-04	N/A	2016.06.06	2017.06.05	1 year
12	Test Cable (30MHz-1GHz)	N/A	R-01	N/A	2016.07.06	2017.07.05	1 year
13	Test Cable (1-18GHz)	N/A	R-02	N/A	2016.07.06	2017.07.05	1 year
14	High Test Cable(18G-40 GHz)	N/A	R-03	N/A	2016.06.06	2017.06.05	1 year
15	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Page 11 of 39

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test And this temporary antenna connector is listed within the instrument list



Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2016.06.06	2017.06.05	1 year
2	LISN	R&S	ENV216	101313	2016.08.24	2017.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2016.08.24	2017.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.07	2017.06.06	1 year
7	Test Cable (9KHz-30MH z)	N/A	C01	N/A	2016.06.08	2017.06.07	1 year
8	Test Cable (9KHz-30MH z)	N/A	C02	N/A	2016.06.08	2017.06.07	1 year
9	Test Cable (9KHz-30MH z)	N/A	C03	N/A	2016.06.08	2017.06.07	1 year

	1	Attenuation	MCE	24-10-34	BN9258	2016.06.08	2017.06.07	1 year
--	---	-------------	-----	----------	--------	------------	------------	--------

Note: Each piece of equipment is scheduled for calibration once a year.



TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01

Page 13 of 39

7.1.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit				
Frequency(MHZ)	Quasi-peak	Average			
0.15-0.5	66-56*	56-46*			
0.5-5.0	56	46			
5.0-30.0	60	50			


Note: 1. *Decreases with the logarithm of the frequency

- 2. The lower limit shall apply at the transition frequencies
- 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 **Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 **Test Configuration**

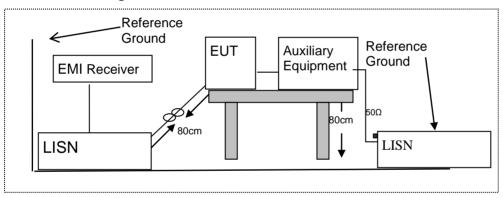

Test Procedure 7.1.5

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
- 2. The EUT was placed on a table which is 0.8m above ground plane.
- 3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- 4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
- 5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 6. LISN at least 80 cm from nearest part of EUT chassis.
- 7. The frequency range from 150KHz to 30MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
- 9. For the actual test configuration, please refer to the related Item -EUT Test Photos.




7.1.6 Test Results

EUT:	Wireless Touch Switch	Model Name:	HTP601-B
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Danasala
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.2939	30.88	10.14	41.02	60.41	-19.39	QP
0.2939	17.97	10.14	28.11	50.41	-22.3	AVG
0.3539	32.41	10.09	42.5	58.87	-16.37	QP
0.3539	16.26	10.09	26.35	48.87	-22.52	AVG
0.4779	39.6	9.86	49.46	56.38	-6.92	QP
0.4779	15.58	9.86	25.44	46.38	-20.94	AVG
0.902	32.61	9.85	42.46	56	-13.54	QP
0.902	14.3	9.85	24.15	46	-21.85	AVG
1.4419	31.16	9.82	40.98	56	-15.02	QP
1.4419	16.54	9.82	26.36	46	-19.64	AVG
4.4499	31.41	9.81	41.22	56	-14.78	QP
4.4499	17.34	9.81	27.15	46	-18.85	AVG

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

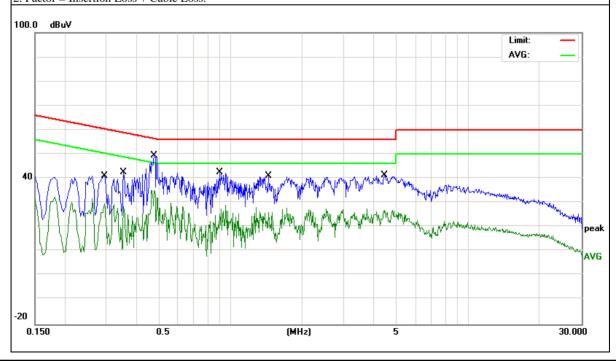




EUT:	Wireless Touch Switch	Model Name:	HTP601-B
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	N
<u>Test Voltage</u> :	AC 120V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	D I
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.2179	28.56	10.04	38.6	62.89	-24.29	QP
0.2179	14.98	10.04	25.02	52.89	-27.87	AVG
0.3498	31.23	10.09	41.32	58.97	-17.65	QP
0.3498	12.56	10.09	22.65	48.97	-26.32	AVG
0.466	34.79	9.91	44.7	56.58	-11.88	QP
0.466	19.44	9.91	29.35	46.58	-17.23	AVG
0.6139	28.77	9.82	38.59	56	-17.41	QP
0.6139	16.76	9.82	26.58	46	-19.42	AVG
0.922	32.62	9.87	42.49	56	-13.51	QP
0.922	18.35	9.87	28.22	46	-17.78	AVG
2.1579	27.35	9.78	37.13	56	-18.87	QP
2.1579	17.67	9.78	27.45	46	-18.55	AVG

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Insertion Loss + Cable Loss.

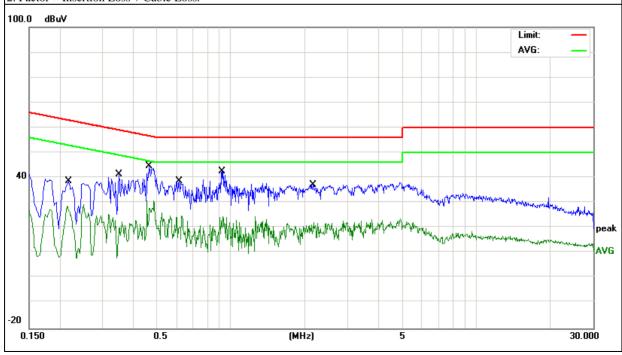




EUT:	Wireless Touch Switch	Model Name:	HTP601-B
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	L
Test Voltage :	AC 240V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	D 1
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.4859	40.79	9.84	50.63	56.24	-5.61	QP
0.4859	30.18	9.84	40.02	46.24	-6.22	AVG
0.8299	35.75	9.82	45.57	56	-10.43	QP
0.8299	26.38	9.82	36.2	46	-9.8	AVG
0.9979	37.31	9.87	47.18	56	-8.82	QP
0.9979	25.25	9.87	35.12	46	-10.88	AVG
1.4539	37.06	9.82	46.88	56	-9.12	QP
1.4539	25.59	9.82	35.41	46	-10.59	AVG
1.814	35.44	9.78	45.22	56	-10.78	QP
1.814	23.43	9.78	33.21	46	-12.79	AVG
4.4579	35.42	9.81	45.23	56	-10.77	QP
4.4579	20.6	9.81	30.41	46	-15.59	AVG

- All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

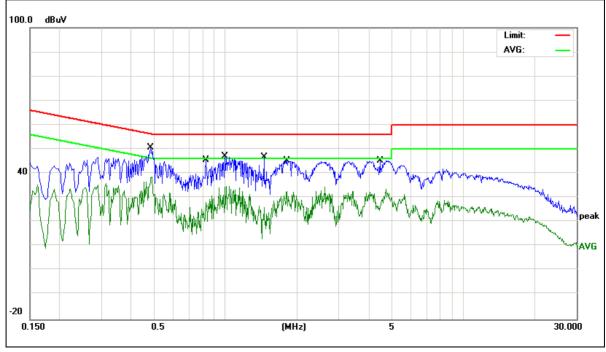




EUT:	Wireless Touch Switch	Model Name:	HTP601-B
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	N
Test Voltage :	AC 240V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	D I
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Remark
0.446	35.46	9.95	45.41	56.95	-11.54	QP
0.446	19.27	9.95	29.22	46.95	-17.73	AVG
0.4819	39.12	9.87	48.99	56.31	-7.32	QP
0.4819	21.38	9.87	31.25	46.31	-15.06	AVG
0.9779	35.7	9.89	45.59	56	-10.41	QP
0.9779	20.16	9.89	30.05	46	-15.95	AVG
1.826	33.94	9.8	43.74	56	-12.26	QP
1.826	21.67	9.8	31.47	46	-14.53	AVG
3.398	34.54	9.78	44.32	56	-11.68	QP
3.398	23.87	9.78	33.65	46	-12.35	AVG
4.9898	34.07	9.8	43.87	56	-12.13	QP
4.9898	24.22	9.8	34.02	46	-11.98	AVG

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Insertion Loss + Cable Loss.

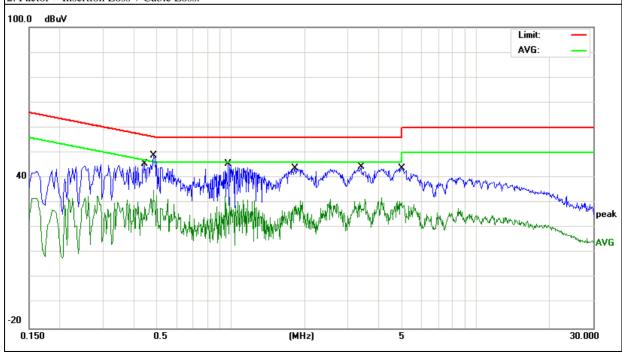



7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). According to FCC Part15.205. Restricted bands

7 tooording to 1 00 1 dit 10.20	teedfallig to 1 00 1 at 10.200, restricted barids						
MHz	MHz	MHz	GHz				
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15				
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46				
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75				
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5				
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2				
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5				
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7				
6.26775-6.26825	123-138	2200-2300	14.47-14.5				
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2				
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4				
8.37625-8.38675	5-8.38675 156.7-156.9 2690-2900		22.01-23.12				
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0				
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8				
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5				
12.57675-12.57725	322-335.4	3600-4400	(2)				
13.36-13.41							

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M) PEAK AVERAGE				
i requericy(ivii iz)					
Above 1000	74	54			

Remark :1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.




7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

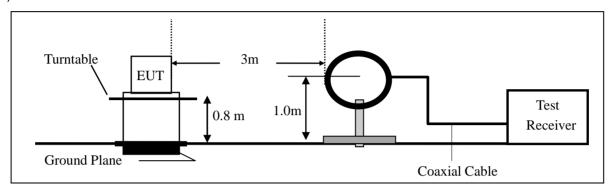

(b) For radiated emissions from 30MHz to 1000MHz

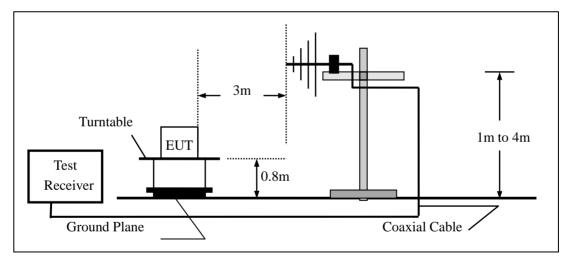

(c) For radiated emissions above 1000MHz

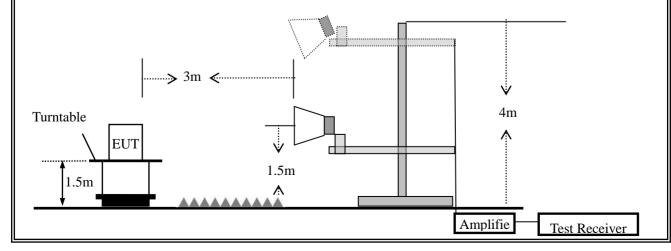



7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For the radiated emission test above 1GHz:
 - Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported



During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 4000	Peak	1 MHz	1 MHz
Above 1000	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	Wireless Touch Switch	Model No.:	HTP601-B
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Freq.	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK AV ´		PK	AV	PK	AV

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor




■ Spurious Emission below 1GHz (30MHz to 1GHz)
All the modulation modes have been tested, and the worst result was report as below:

EUT:	Wireless Touch Switch	Model Name:	HTP601-B			
Temperature:	20 ℃	Relative Humidity:	48%			
Pressure:	1010hPa	Test Mode:	Mode 1			
Test Voltage :	AC 120V/60Hz					

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	41.567	15.38	13.83	29.21	40	-10.79	peak
V	56.5929	20.99	6.87	27.86	40	-12.14	peak
V	71.5806	17.94	7.58	25.52	40	-14.48	peak
V	91.1746	22.23	10.84	33.07	43.5	-10.43	peak
V	112.1303	12.88	12.87	25.75	43.5	-17.75	peak
V	312.1794	13.21	16.65	29.86	46	-16.14	peak

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

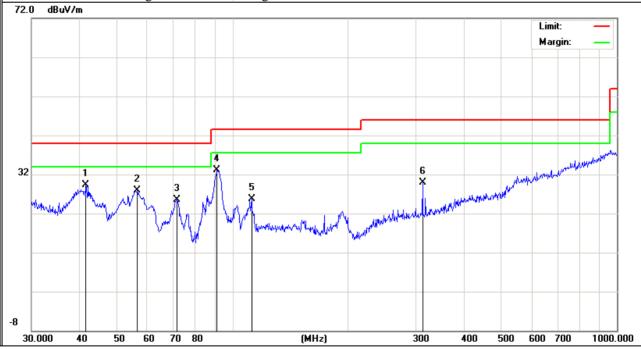



Polar (H/V) H H H H H	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Н	76.7806	12.13	8.22	20.35	40	-19.65	peak
Н	91.8163	11.76	10.94	22.7	43.5	-20.8	peak
Н	110.5687	9.98	12.66	22.64	43.5	-20.86	peak
Н	133.6186	8.61	13.19	21.8	43.5	-21.7	peak
Н	274.1939	11.53	15.61	27.14	46	-18.86	peak
Н	945.4399	7.13	31.24	38.37	46	-7.63	peak

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

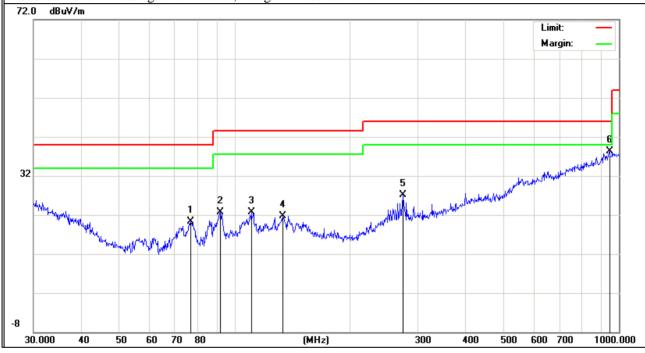



■ Spurious Emission Above 1GHz (1GHz to 25GHz)

EUT:	Wireless Touch Switch	Model No.:	HTP601-B
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Frequenc	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBµV)	(dB)	dB/m	(dB)	\	(dBµV/m)	(dB)		
			Low	Channel (2	402 MHz)-	Above 1G			-
4804.125	60.33	5.21	35.59	44.30	56.83	74.00	-17.17	Pk	Vertical
4804.125	39.52	5.21	35.59	44.30	36.02	54.00	-17.98	AV	Vertical
7206.335	60.54	6.48	36.27	44.60	58.69	74.00	-15.31	Pk	Vertical
7206.335	42.25	6.48	36.27	44.60	40.40	54.00	-13.60	AV	Vertical
4804.128	61.02	5.21	35.55	44.30	57.48	74.00	-16.52	Pk	Horizontal
4804.128	43.33	5.21	35.55	44.30	39.79	54.00	-14.21	AV	Horizontal
7206.559	61.05	6.48	36.27	44.52	59.28	74.00	-14.72	Pk	Horizontal
7206.559	41.35	6.48	36.27	44.52	39.58	54.00	-14.42	AV	Horizontal
			Mid	Channel (2	440 MHz)-	Above 1G			
4882.025	62.05	5.21	35.66	44.20	58.72	74.00	-15.28	Pk	Vertical
4882.025	41.69	5.21	35.66	44.20	38.36	54.00	-15.64	AV	Vertical
7323.144	60.54	7.10	36.50	44.43	59.71	74.00	-14.29	Pk	Vertical
7323.144	45.22	7.10	36.50	44.43	44.39	54.00	-9.61	AV	Vertical
4882.054	59.36	5.21	35.66	44.20	56.03	74.00	-17.97	Pk	Horizontal
4882.054	43.36	5.21	35.66	44.20	40.03	54.00	-13.97	AV	Horizontal
7323.398	58.52	7.10	36.50	44.43	57.69	74.00	-16.31	Pk	Horizontal
7323.398	40.02	7.10	36.50	44.43	39.19	54.00	-14.81	AV	Horizontal
			High	Channel (2	480 MHz)-	Above 1G			
4960.547	60.35	5.21	35.52	44.21	56.87	74.00	-17.13	Pk	Vertical
4960.547	41.05	5.21	35.52	44.21	37.57	54.00	-16.43	AV	Vertical
7440.125	58.25	7.10	36.53	44.60	57.28	74.00	-16.72	Pk	Vertical
7440.125	42.25	7.10	36.53	44.60	41.28	54.00	-12.72	AV	Vertical
4960.185	63.02	5.21	35.52	44.21	59.54	74.00	-14.46	Pk	Horizontal
4960.185	43.15	5.21	35.52	44.21	39.67	54.00	-14.33	AV	Horizontal
7440.269	57.15	7.10	36.53	44.60	56.18	74.00	-17.82	Pk	Horizontal
7440.269	43.22	7.10	36.53	44.60	42.25	54.00	-11.75	AV	Horizontal

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz). (2) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor (3)All other emissions more than 20dB below the limit.



■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

EUT:	Wireless Touch Switch	Model No.:	HTP601-B
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Frequenc	Meter	Cable	Antenna	Preamp	Emission				
у	Reading	Loss	Factor	Factor	Level	Limits	Margin	Detector	Comment
(MHz)	(dBµV)	(dB)	dB/m	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	
				1M	bps				
2310.00	58.22	2.97	27.80	43.80	45.19	74	-28.81	Pk	Horizontal
2310.00	42.05	2.97	27.80	43.80	29.02	54	-24.98	AV	Horizontal
2310.00	59.36	2.97	27.80	43.80	46.33	74	-27.67	Pk	Vertical
2310.00	40.25	2.97	27.80	43.80	27.22	54	-26.78	AV	Vertical
2390.00	60.02	3.14	27.21	43.80	46.57	74	-27.43	Pk	Vertical
2390.00	42.15	3.14	27.21	43.80	28.70	54	-25.30	AV	Vertical
2390.00	61.02	3.14	27.21	43.80	47.57	74	-26.43	Pk	Horizontal
2390.00	40.33	3.14	27.21	43.80	26.88	54	-27.12	AV	Horizontal
2483.50	58.58	3.58	27.70	44.00	45.86	74	-28.14	Pk	Vertical
2483.50	40.69	3.58	27.70	44.00	27.97	54	-26.03	AV	Vertical
2483.50	59.41	3.58	27.70	44.00	46.69	74	-27.31	Pk	Horizontal
2483.50	43.25	3.58	27.70	44.00	30.53	54	-23.47	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.



■ Spurious Emission in Restricted Band 3260MMHz-18000MHz

EUT:	Wireless Touch Switch	Model No.:	HTP601-B
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Frequenc y	Readin g Level	Cable Loss	Antenn a Factor	Preamp Factor	Emission Level	Limits	Margin	Detecto r	Comment
(MHz)	(dBµV)	(dB)	dB/m	(dB)	(dBµ V/m)	(dBµ V/m)	(dB)	Туре	
3260	61.22	4.04	29.57	44.70	50.13	74	-23.87	Pk	Vertical
3260	53.35	4.04	29.57	44.70	42.26	54	-11.74	AV	Vertical
3260	62.25	4.04	29.57	44.70	51.16	74	-22.84	Pk	Horizontal
3260	56.15	4.04	29.57	44.70	45.06	54	-8.94	AV	Horizontal
3332	63.35	4.26	29.87	44.40	53.08	74	-20.92	Pk	Vertical
3332	52.15	4.26	29.87	44.40	41.88	54	-12.12	AV	Vertical
3332	61.25	4.26	29.87	44.40	50.98	74	-23.02	Pk	Horizontal
3332	51.35	4.26	29.87	44.40	41.08	54	-12.92	AV	Horizontal
17797	43.26	10.99	43.95	43.50	54.70	74	-19.30	Pk	Vertical
17797	30.25	10.99	43.95	43.50	41.69	54	-12.31	AV	Vertical
17788	45.11	11.81	43.69	44.60	56.01	74	-17.99	Pk	Horizontal
17788	32.32	11.81	43.69	44.60	43.22	54	-10.78	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.



7.3 6DB BANDWIDTH

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r05

7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows KDB 558074 DTS 01 Meas. Guidance v03r05

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

 $VBW \geq 3*RBW$

Sweep = auto

Detector function = peak


Trace = max hold

7.3.6 Test Results

EUT:	Wireless Touch Switch	Model No.:	HTP601-B
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu


Channel	Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
Low	2402	676.1	500	Pass
Middle	2440	676.6	500	Pass
High	2480	677.9	500	Pass



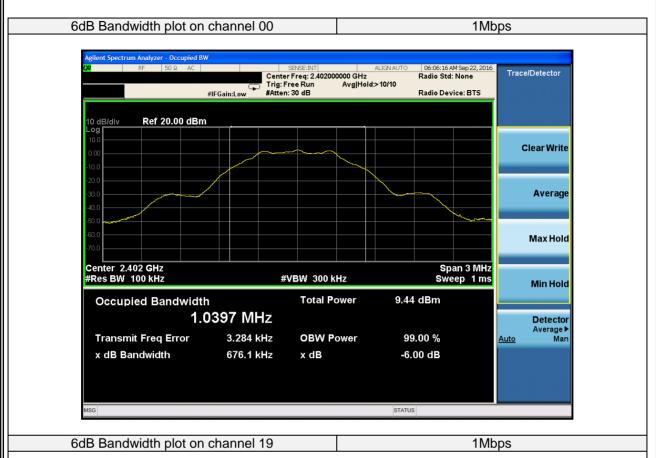





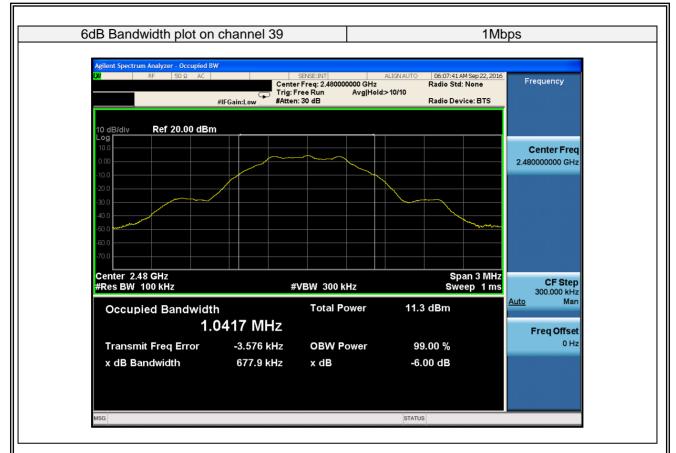



7.4 PEAK OUTPUT POWER

7.4.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v03r05

Page 30 of 39

7.4.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The testing follows KDB 558074 DTS 01 Meas. Guidance v03r05

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Set the RBW \geq DTS bandwidth(about 1MHz).

Set VBW = 3*RBW (about 3MHz)

Set the span ≥3*RBW

Set Sweep time = auto couple.

Set Detector = peak.

Set Trace mode = max hold.

Allow trace to fully stabilize.


Use peak marker function to determine the peak amplitude level.

7.4.6 Test Results

EUT:	Wireless Touch Switch	Model No.:	HTP601-B
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu


Test Channel	Frequency (MHz)	Power Setting	Peak Output Power (dBm)	LIMIT (dBm)	Verdict		
1Mbps							
00	2402	Default	2.921	30	PASS		
19	2440	Default	4.182	30	PASS		
39	2480	Default	4.862	30	PASS		



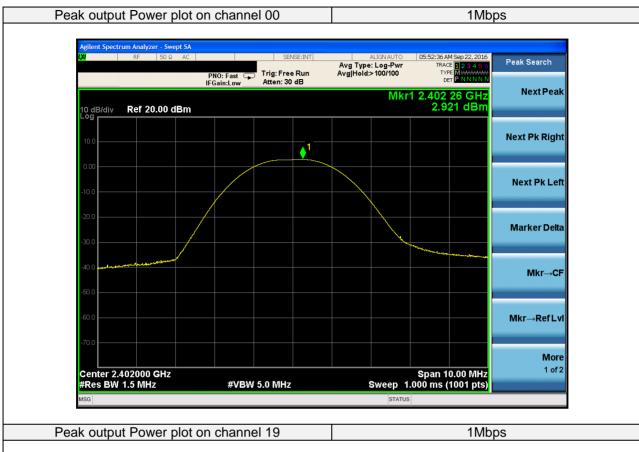





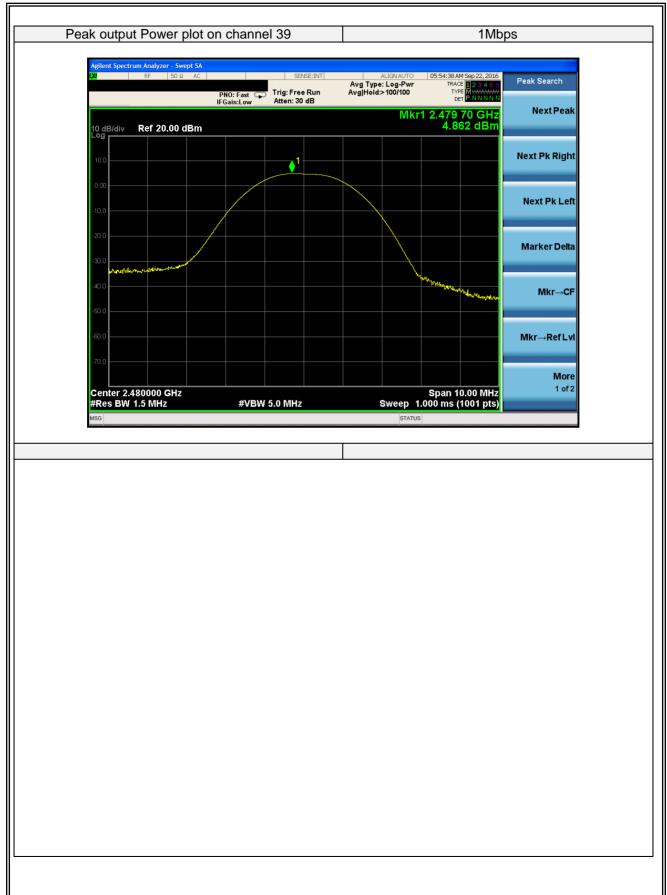



7.5 POWER SPECTRAL DENSITY

7.5.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v03r05

7.5.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows Measurement Procedure 10.3 Method AVGPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05

This procedure may be used when the maximum (average) conducted output power was used to demonstrate compliance to the output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has an RMS power averaging detector, it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously (duty cycle ≥ 98%); otherwise sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter off time is to be considered).

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \le \text{RBW} \le 100 \text{ kHz}$.
- d) Set VBW ≥3 x RBW.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing




7.5.6 Test Results

EUT:	Wireless Touch Switch	Model No.:	HTP601-B
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu


Test Channel	Frequency (MHz)	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Verdict				
	1Mbps							
00	2402	-13.097	8	PASS				
19	2440	-11.724	8	PASS				
39	2480	-10.739	8	PASS				



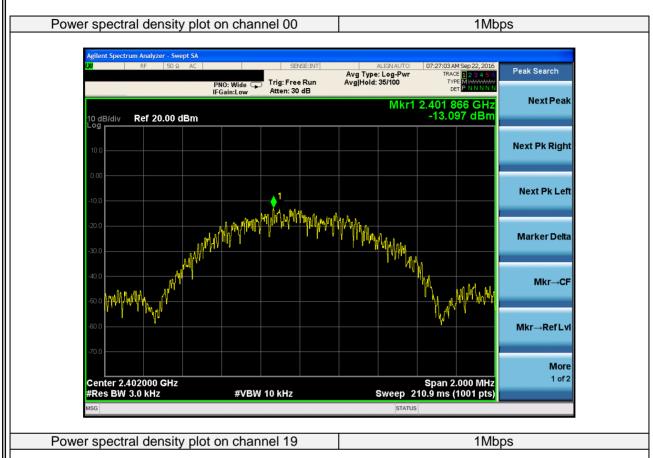





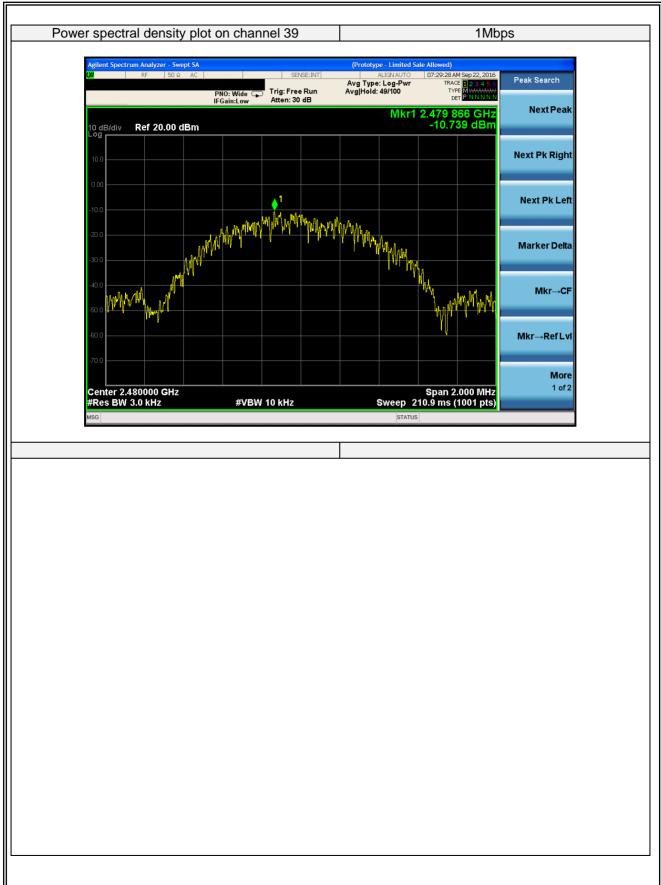



7.6 CONDUCTED BAND EDGE MEASUREMENT

7.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r05

7.6.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.


Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

7.6.6 Test Results

EUT:	Wireless Touch Switch	Model No.:	НТР601-В
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode4	Test By:	Allen Liu



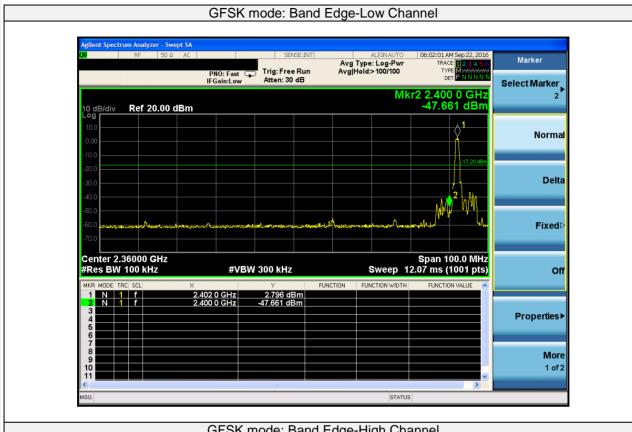







7.7 ANTENNA APPLICATION

7.7.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.7.2 **Result**

The EUT antenna is permanent attached PCB antenna. It comply with the standard requirement.

END OF REPORT