

承 認 書



SPECIFICATION FOR APPROVAL

客 戶:

CUSTOMER:

客 戶 料 號:

CUST P/N:

10.0110.1091

料 號:

FINE P/N:

G4511-6.8UH unicoil 0.08*24P*2*10TS

產 品 型 號:

DESC:

Φ 45MMX5.0MMX0.8MM

日 期:

DATE:

2022/08/13

版 本:

Version:

A.0

Dongguan City west united dry city technology Co., LTD

Factory address: 8th Floor, Building 2, Sanjia High-tech Industrial Park, No.123 Junfa Road, Dongkeng Town, Dongguan City

TEL: 0769-82989159


FAX: 0769-82989159

E-mail: aming198204@163.com

SPECIFICATION


產品型號: DESC	Φ20.5x40-6.8uH-0.08x24P-15mm	版本 Rev: A.0	客戶 CUST:	XXX
			客戶料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

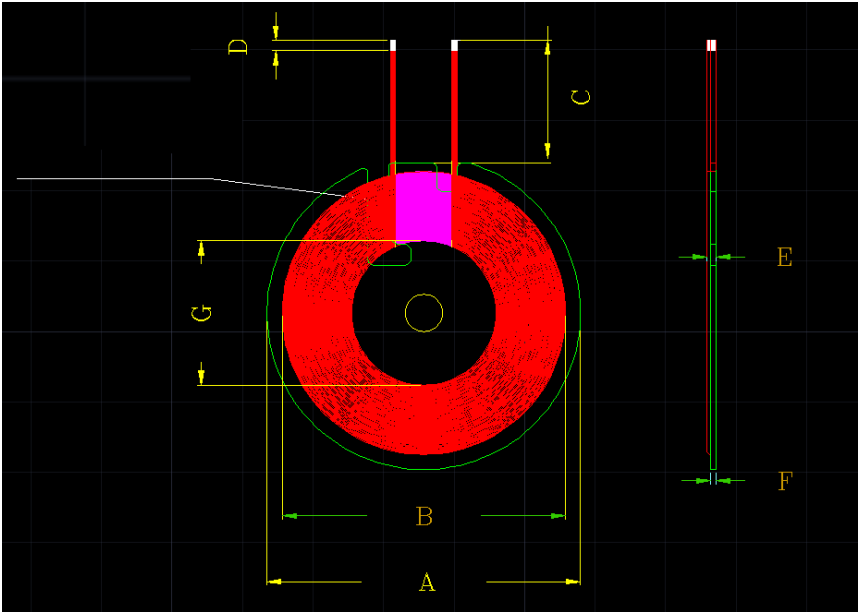

A	43.5±0.5
B	39±1.5
C	15±2
D	3±2
E	1.5±0.2
F	0.8±0.1
G	20.5±0.5

二、原理图 SCHEMATIC DIAGRAM:

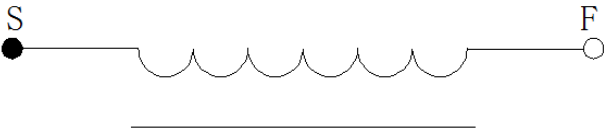

- Note:
- 1.Cross out wire;
 - 2.Wrap 9mm(ref) width high-temperature adhesive paper 1-2Ts around the outlet position;
 - 3.The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 43.5±1mm, the inner hole is 5.2mm, and the thickness is 0.8±0.1mm.

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	漆包线 0.08*24PX2	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10 ℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±20% Individual coil	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.8uH ±10% Magnetized sheet	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤90m Ω	100KHz/1.0V	LCZ METER 502B
4	Q	S-F	≥39	100KHz/1.0V	LCZ METER 502B