



Test Report

Applicant : ZONITH A/S

Address of Applicant : Gammel Kongevej 39E DK-1610 Copenhagen V
Denmark

Equipment Under Test : BT-ID-BADGE

Model Number : BT-ID-BADGE

Series : N/A

Matrix Test Laboratory
2F, No.146, Jian Yi Rd., Chung-Ho District,
New Taipei City, Taiwan, R.O.C.
TEL. : +886 2 2228-6610
FAX. : +886 2 2228-6580

Contents

1	General Description	6
1.1	Description of EUT	6
1.2	Test Instruments	8
1.3	Auxiliary Equipments	9
1.4	EUT SETUP	9
1.5	Identifying the Final Test Mode	9
1.6	Final Test Mode	10
1.7	Condition of Power Supply	10
1.8	EUT Configuration	10
1.9	Test Methodology	10
1.10	General Test Procedures	10
1.11	Modification	10
1.12	FCC Part 15.205 restricted bands of operations	11
1.13	Qualification of Test Facility	12
2	Power line Conducted Emission Measurement	13
2.1	Test Instruments	13
2.2	Test Arrangement and Procedure	13
2.3	Limit (§ 15.207)	13
2.4	Test Result	13
3	Radiated Emission Test	16
3.1	Test Instruments	16
3.2	Test Arrangement and Procedure	16
3.3	Limit (§ 15.205 & § 15.209)	17
3.4	Test Result	18
4	20 dB Bandwidth	39
4.1	Test Instruments	39
4.2	Test Arrangement and Procedure	39
4.3	Limit	39
4.4	Test Result	39
5	Hopping Frequency Separation	49
5.1	Test Instruments	49
5.2	Test Arrangement and Procedure	49
5.3	Limit (§ 15.247(a)(1))	49
5.4	Test Result	49

6 Number of Hopping Channels	54
6.1 Test Instruments	54
6.2 Test Arrangement and Procedure	54
6.3 Limit (§ 15.247(a)(1)(iii))	54
6.4 Test Result	54
7 Average Time of Occupancy	57
7.1 Test Instruments	57
7.2 Test Arrangement and Procedure	57
7.3 Limit (§ 15.247(a)(1)(iii))	57
7.4 Test Result	57
8 Peak Output Power	79
8.1 Test Instruments	79
8.2 Test Arrangement and Procedure	79
8.3 Limit (§ 15.247(b))	79
8.4 Test Result	79
9 100kHz Bandwidth of Band Edges	90
9.1 Test Instruments	90
9.2 Test Arrangement and Procedure	90
9.3 Limit (§ 15.247(d))	90
9.4 Test Result	90
10 Spurious RF Conducted Emissions	105
10.1 Test Instruments	105
10.2 Test Arrangement and Procedure	105
10.3 Limit (§ 15.247(d))	105
10.4 Test Result	105
11 Antenna requirement	109
11.1 Limit (§ 15.203)	109
11.2 Test Result	109
12 Information about the FHSS characteristics	110
12.1 Pseudorandom Frequency Hopping Sequence	110
12.2 Example of a 79 hopping sequence in data mode:	110
12.3 Equal Hopping Frequency Use	110
13 Photographs of the Tests	111
13.1 Conducted Disturbances Emission Test	111
13.2 Radiated Disturbances Emission Test	112
14 Photographs of the EUT	113

Test Result Certification

Applicant	: ZONITH A/S
Address of Applicant	: Gammel Kongevej 39E DK-1610 Copenhagen V Denmark
Manufacturer	: Mobility Sound Technology Ltd.
Address of Manufacturer	: 5F, No. 100, Jian 1 st Road, ZhongHe Dist., New Taipei City #235, Taiwan
Trade Name	: ZONITH A/S
Equipment Under Test	: BT-ID-BADGE
Model Number	: BT-ID-BADGE
Product Series	: N/A
FCC ID	: 2AJ8P- BT-ID-BADGE
Filing Type	: Certification
Sample Received Date	: 20-November-2016
Test Standard	:

FCC Part 15 Subpart C §15.247

Deviations from standard test methods & any other specifications : NONE

Remark:

1. This report details the results of the test carried out on one sample.
2. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in both ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.203, 15.207, 15.209, 15.247.
3. This report applies to the above sample only and shall not be reproduced in part without written approval of Matrix Test Laboratory
4. Test Location: HongAn Technology Co., Ltd., No.15-1 Cweishuh Keng, Cweipin Village, Linkou Dist., New Taipei City, Taiwan, R.O.C. FCC Designation No.: TW1071.


Documented by:



2016-11-25

Kay Wang / ADM. Dept Staff

Tested by:



2016-11-21

Eason Hsieh / ENG. Dept. Staff

Approved by:



Date: 2016-11-28

Peter Chin / Section Manager

Summary of Test Result

	Test Item	Applicable Standard	Test Result
1	Antenna Requirement	FCC part 15 subpart C §203	Compliance
2	Conducted limits	FCC part 15 subpart C §207	Compliance
3	Radiated emission limits	FCC part 15 subpart C §209	Compliance
4	20 dB Bandwidth	FCC part 15 subpart C §247(a)(1)	Compliance
5	Hopping Frequency Separation	FCC part 15 subpart C §247(a)(1)	Compliance
6	Number of Hopping Channels	FCC part 15 subpart C §247(a)(1)	Compliance
7	Average Time of Occupancy	FCC part 15 subpart C §247(a)(1)(iii)	Compliance
8	Peak Output Power	FCC part 15 subpart C §247(b)	Compliance
9	100kHz Bandwidth of Band Edges	FCC part 15 subpart C §247(d)	Compliance
10	Spurious RF Conducted Emissions	FCC part 15 subpart C §247(d)	Compliance

1 General Description

1.1 Description of EUT

Equipment Under Test	:	BT-ID-BADGE							
Model Number of EUT	:	BT-ID-BADGE							
Product Series	:	N/A							
Power Supply	:	Li-Polymer Battery DC 3.7 V							
Frequency Range	:	2402~2480 MHz							
Transmit Power	:	4.69 dBm							
Number of Channels	:	79 Channels							
Carrier Frequency of Each Channel	:	00	2402	20	2422	40	2442	60	2462
		01	2403	21	2423	41	2443	61	2463
		02	2404	22	2424	42	2444	62	2464
		03	2405	23	2425	43	2445	63	2465
		04	2406	24	2426	44	2446	64	2466
		05	2407	25	2427	45	2447	65	2467
		06	2408	26	2428	46	2448	66	2468
		07	2409	27	2429	47	2449	67	2469
		08	2410	28	2430	48	2450	68	2470
		09	2411	29	2431	49	2451	69	2471
		10	2412	30	2432	50	2452	70	2472
		11	2413	31	2433	51	2453	71	2473
		12	2414	32	2434	52	2454	72	2474
		13	2415	33	2435	53	2455	73	2475
		14	2416	34	2436	54	2456	74	2476
		15	2417	35	2437	55	2457	75	2477
		16	2418	36	2438	56	2458	76	2478
		17	2419	37	2439	57	2459	77	2479
		18	2420	38	2440	58	2460	78	2480
		19	2421	39	2441	59	2461	-	-
Antenna Specification	:	Chip-Ceramic Antenna/ Gain: 1.3 dBi							
Modulation Technique	:	Bluetooth 4.0 FHSS							
		Bluetooth : GFSK Bluetooth EDR : π/4-DQPSK, 8-DPSK (The EUT doesn't support LE function)							

Transmit Data Rate	: Bluetooth : 1Mbps, 2Mbps, 3Mbps
Specification	Dimensions : 9.2 cm (L) X 6.2 cm (W) X 1 cm (H) Weight : 40 g
	: Intended Function : The EUT is a BT badge for locating people who ever wears it. Product Variance : N/A.

1.2 Test Instruments

Instrument Name	Manufacturer Mode	Model Number	Serial Number	Last Cal. Date	Next Cal. Date
RF Amplifier	Schaffner	CPA9231A	0405	01-JUN-2016	31-MAY-2017
EMI Receiver	R&S	ESCI	100931	25-JUL-2016	24-JUL-2017
Spectrum Analyzer	R&S	FSV	101629	27-JAN-2016	26-JAN-2017
Preamplifier	HD	HD17187	004	01-JUN-2016	31-MAY-2017
Bilog Antenna	TESEQ	CBL6111D	38521	04-JUN-2016	03-JUN-2017
Double-Ridged Waveguide Horn	EMCO	3115	9912-5992	01-JUN-2016	31-MAY-2017
Horn Antenna (18-40GHz)	Com -Power	AH-840	101042	02-JUN-2016	01-JUN-2017
Microwave Preamplifier	Com -Power	PAM-840	461269	04-JUN-2016	03-JUN-2017
LOOP Antenna	EMCO	6512	00035867	01-OCT-2016	30-SEP-2017
Spectrum Analyzer	Rohde & Schwarz	FSP40	13054416-001	07-OCT-2016	06-OCT-2017
Temperature Chamber	MALLIER	MCT-2X-M	13490413-001	15-DEC-2016	14-DEC-2017
LISN	EMCO	3810/2NM	9702-1819	27-Jul-2016	27-Jul-2017
LISN	Rolf Heine Hochfrequenztechnik	NNB-4/32T	00001	09-Mar-2016	09-Mar-2017
EMI Receiver	R&S	ESCI	100931	25-Jul-2016	25-Jul-2017

※ The test equipments used are calibrated and can be traced to National ITRI and International Standards.

1.3 Auxiliary Equipments


1.3.1. Provided by Matrix Test Laboratory for Emission Test.

N/A

1.3.2. Provided by the Manufacturer

N/A

1.4 EUT SETUP

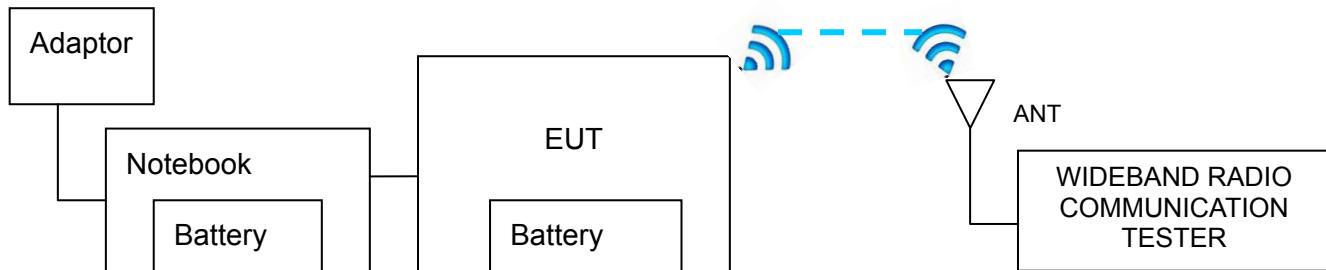

Note: Main Test Sample: BT-ID-BADGE

1.5 Identifying the Final Test Mode

1. Mode 1: TX BT mode (1Mbps) CH 00.
2. Mode 2: TX BT mode (1Mbps) CH 39.
3. Mode 3: TX BT mode (1Mbps) CH 78.
4. Mode 4: TX BT EDR mode (2Mbps) CH 00.
5. Mode 5: TX BT EDR mode (2Mbps) CH 39.
6. Mode 6: TX BT EDR mode (2Mbps) CH 78.
7. Mode 7: TX BT EDR mode (3Mbps) CH 00.
8. Mode 8: TX BT EDR mode (3Mbps) CH 39.
9. Mode 9: TX BT EDR mode (3Mbps) CH 78.

Note:

1. After pre-test, we identified that the TX (Packet type DH5 and X axis) was most likely to cause maximum disturbance and most likely to be susceptible to disturbance. Therefore, the Final Assessment was performed for the worst case.
2. The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.
3. Channel Low (2402 MHz), Mid (2441 MHz) and High (2480 MHz) were chosen for full testing.
4. According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

1.6 Final Test Mode

Conducted Emission: Mode 3.

Field Strength: All Mode.

Radiated Emission (30~1000 MHz): Mode 3.

Radiated Emission (1~26.5GHz): All Mode.

1.7 Condition of Power Supply

Li-Polymer Battery, DC 3.7 V

1.8 EUT Configuration

1. Setup the EUT as shown in Sec.1.4 Block Diagram.
2. Turn on the power of all equipments.
3. Activate the selected Final Test Mode.

1.9 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10 (2013) and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.203, 15.207, 15.209 and 15.247.

1.10 General Test Procedures

Conducted Emissions

The EUT is set according to the requirements in Section 6.2 of ANSI C63.10 (2013).

Radiated Emissions

The EUT is set according to the requirements in Section 6.3 of ANSI C63.10 (2013).

1.11 Modification

N/A

1.12 FCC Part 15.205 restricted bands of operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37635-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

1.13 Qualification of Test Facility

BSMI Certificate No.	: SL2-IS-E-0023, SL2-IN-E-0023, SL2-R1-E-0023, SL2-R2-E-0023, SL2-A1-E-0023, SL2-L1-E-0023.
FCC Designation No.	: TW1071
TAF Accreditation No.	: 1163
VCCI Certificate No.	: R-2156, C-2329, T-219

2 Power line Conducted Emission Measurement

2.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

2.2 Test Arrangement and Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

2.3 Limit (§ 15.207)

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency (MHz)	Limits (dBuV)	
	Q.P. (Quasi-Peak)	A.V. (Average)
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

2.4 Test Result


Compliance

The final test data are shown on the following page(s).

Power Line Conducted Test Data

Test Date : 2016-11-21
 Temperature : 24.4°C

Power Line : Line
 Humidity : 49%

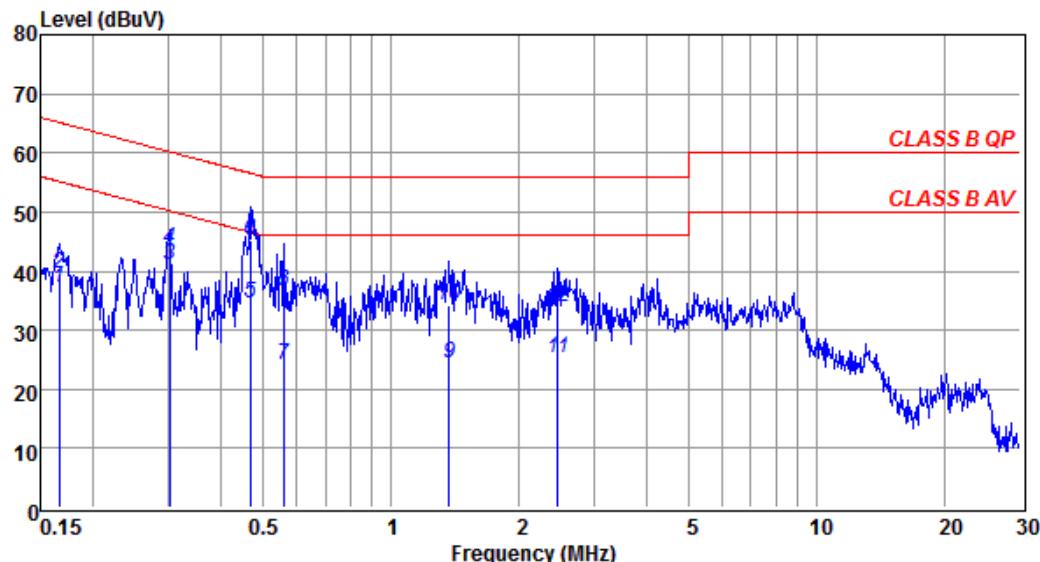


Freq MHz	Read QP	Read AV	C.F dB	Result QP	Result AV	Limit QP	Limit AV	Margin dB	Margin dB
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV		
0.17	39.12	36.68	0.41	39.53	37.09	65.16	55.16	-25.63	-18.07
0.30	43.19	40.55	0.42	43.61	40.97	60.19	50.19	-16.58	-9.22
0.47	44.88	34.04	0.42	45.30	34.46	56.58	46.58	-11.28	-12.12
0.56	36.15	23.67	0.43	36.58	24.10	56.00	46.00	-19.42	-21.90
1.37	33.75	23.82	0.47	34.22	24.29	56.00	46.00	-21.78	-21.71
2.46	33.38	24.78	0.51	33.89	25.29	56.00	46.00	-22.11	-20.71

Note1: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse limiter
 Note2: Margin = Result - Limit

Remark : All readings are Quasi-Peak and Average values.

Power Line Conducted Test Data

Test Date : 2016-11-21 Power Line : Neutral
 Temperature : 24.4°C Humidity : 49%

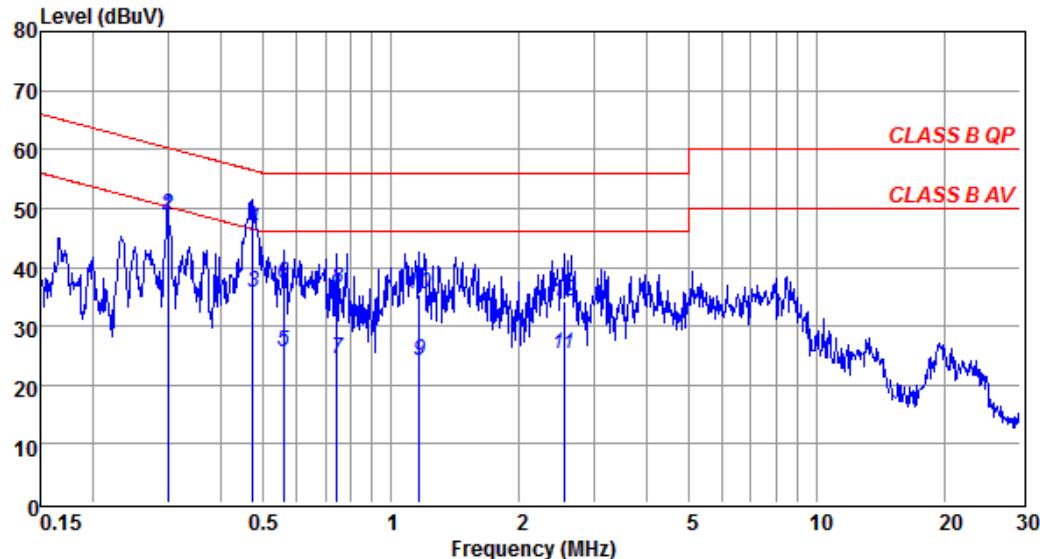

Freq MHz	Read QP dBuV	Read AV dBuV	C.F. dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
	Read QP dBuV	Read AV dBuV		Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV		
	Read QP dBuV	Read AV dBuV		Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV		
0.30	48.30	48.25	0.46	48.76	48.71	60.28	50.28	-11.52	-1.57
0.47	45.91	35.09	0.46	46.37	35.55	56.45	46.45	-10.08	-10.90
0.56	36.64	25.24	0.47	37.11	25.71	56.00	46.00	-18.89	-20.29
0.75	35.87	23.88	0.48	36.35	24.36	56.00	46.00	-19.65	-21.64
1.17	34.85	23.63	0.50	35.35	24.13	56.00	46.00	-20.65	-21.87
2.54	33.68	24.73	0.56	34.24	25.29	56.00	46.00	-21.76	-20.71

Note1: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse limiter

Note2: Margin = Result - Limit



Remark : All readings are Quasi-Peak and Average values.

3 Radiated Emission Test

3.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

3.2 Test Arrangement and Procedure

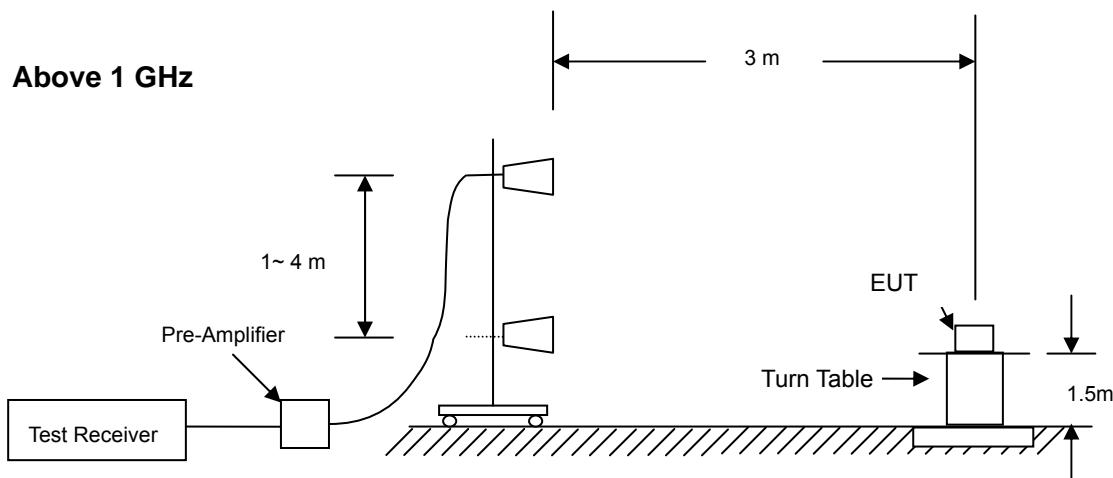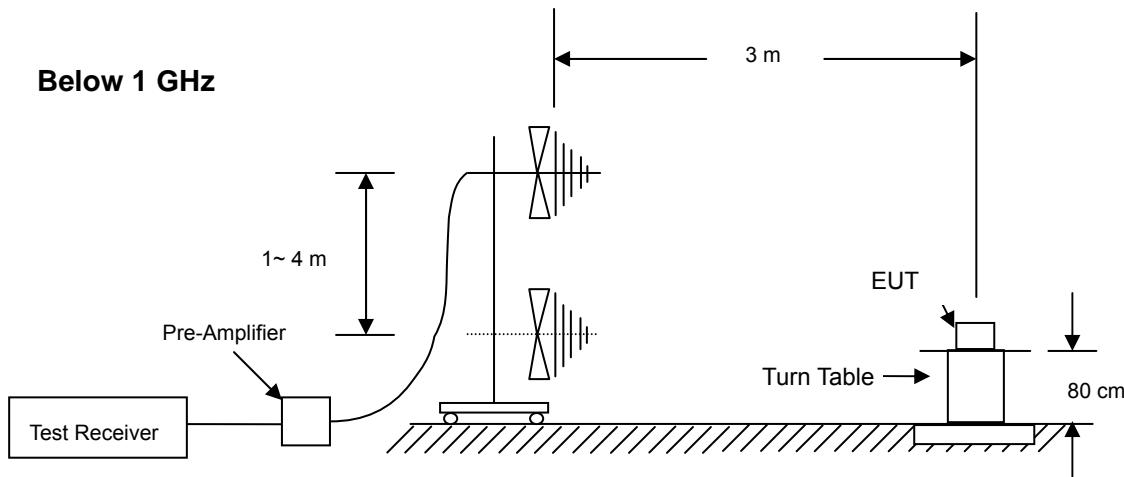

1. The EUT is placed on a turntable, which is 0.8 m (below 1GHz) and 1.5m (above 1GHz) above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
 - (a) Below 1 GHz: RBW =100 kHz/ VBW = 1 MHz/ Sweep = AUTO.

(b) Above 1 GHz: Peak: RBW = VBW = 1MHz/ Sweep = AUTO; Average: RBW = 1MHz/ VBW = 10Hz/ Sweep = AUTO.

7. Repeat above procedures until the measurements for all frequencies are complete.

3.3 Limit (§ 15.205 & § 15.209)

3.3.1. Limit of Restricted Band of Operation (§ 15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	
13.36-13.41			

3.3.2. Limit of Spurious Emission (§ 15.209)

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is lesser attenuation.

Frequency (MHz)	Field strength (microvolts/ meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.


3.4 Test Result

Compliance

The final test data are shown on the following page(s).

Radiated Emission Test Data (Below 1 GHz)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH78 (2480MHz)
EUT Position	: Vertical		

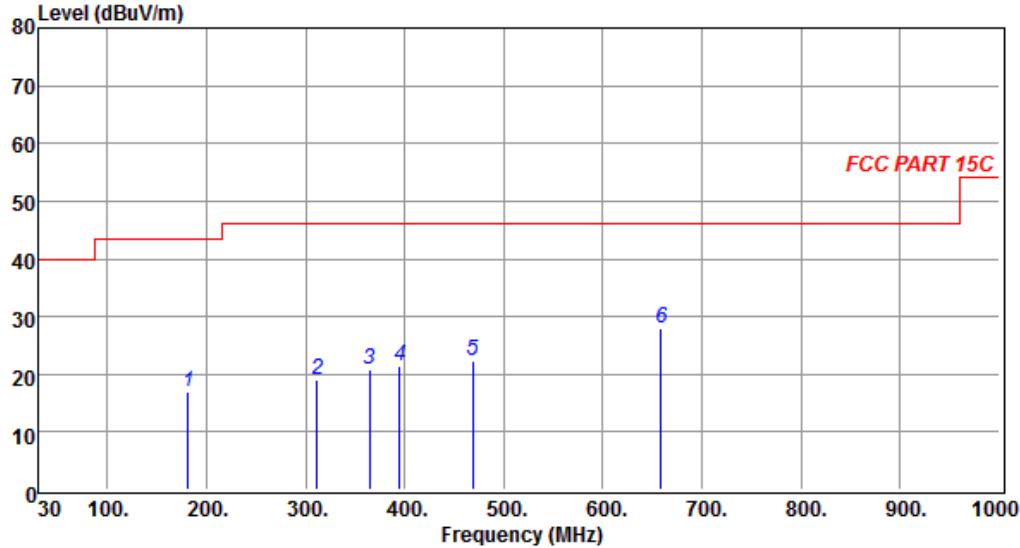

Freq	Reading	C.F	Result	Limit Margin		A/H	T/P	Polarity	Remark
				MHz	dBuV				
					dB	dBuV/m	dBuV/m	cm	deg
181.320	37.08	-20.11	16.97	43.50	-26.53	-----	-----	VERTICAL	Peak
311.300	38.91	-19.90	19.01	46.00	-26.99	-----	-----	VERTICAL	Peak
364.650	38.81	-17.91	20.90	46.00	-25.10	-----	-----	VERTICAL	Peak
394.720	38.66	-17.27	21.39	46.00	-24.61	-----	-----	VERTICAL	Peak
468.440	38.81	-16.65	22.16	46.00	-23.84	-----	-----	VERTICAL	Peak
658.560	40.23	-12.39	27.84	46.00	-18.16	-----	-----	VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 30 MHz to 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
4. All readings are Peak values. None of the peak value reading exceeds the Q.P. limit. Hence, Q.P. reading was not measured.
5. The IF bandwidth of SPA between 30 MHz to 1 GHz was 100 kHz.

Radiated Emission Test Data (Below 1 GHz)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH78 (2480MHz)
EUT Position	: Vertical		

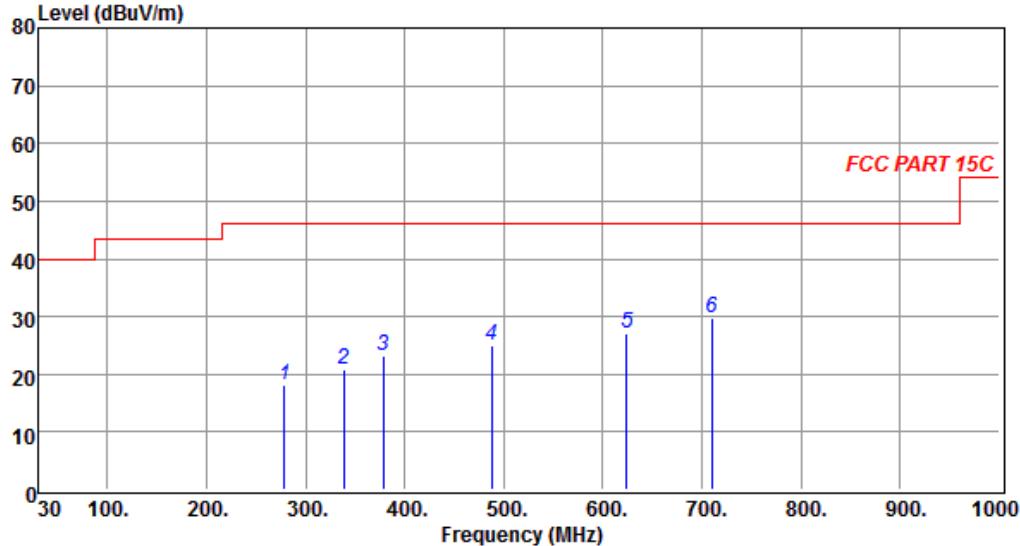

Freq	Reading	C.F	Result	Limit Margin		A/H	T/P	Polarity	Remark
				MHz	dBuV				
					dB	dBuV/m	dBuV/m	cm	deg
278.320	39.54	-21.34	18.20	46.00	-27.80	-----	-----	HORIZONTAL	Peak
338.460	39.04	-18.32	20.72	46.00	-25.28	-----	-----	HORIZONTAL	Peak
378.230	40.74	-17.49	23.25	46.00	-22.75	-----	-----	HORIZONTAL	Peak
487.840	40.66	-15.82	24.84	46.00	-21.16	-----	-----	HORIZONTAL	Peak
623.640	39.97	-13.02	26.95	46.00	-19.05	-----	-----	HORIZONTAL	Peak
709.970	41.00	-11.12	29.88	46.00	-16.12	-----	-----	HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit


Remark :

1. Measuring frequencies from 30 MHz to 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
4. All readings are Peak values. None of the peak value reading exceeds the Q.P. limit. Hence, Q.P. reading was not measured.
5. The IF bandwidth of SPA between 30 MHz to 1 GHz was 100 kHz.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature : 24.4°C
 Test Date : 21-Nov-2016
 Polarization : Vertical
 EUT Position : Vertical

Humidity : 49%
 Tested by : Eason Hsieh
 Channel : CH00 (2402MHz)

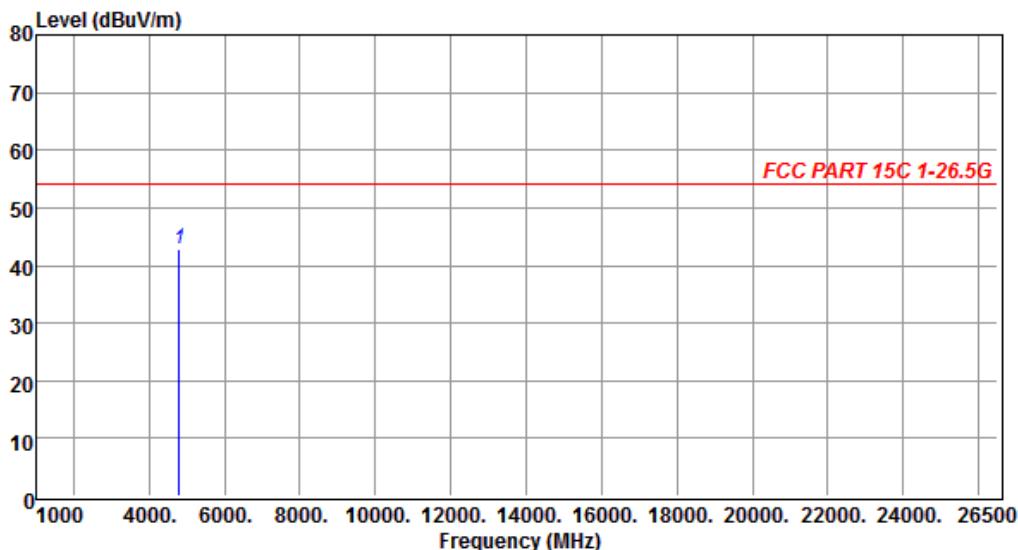

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4804.000	42.28	0.49	42.77	54.00	-11.23			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit


Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature : 24.4°C
 Test Date : 21-Nov-2016
 Polarization : Horizontal
 EUT Position : Vertical

Humidity : 49%
 Tested by : Eason Hsieh
 Channel : CH00 (2402MHz)

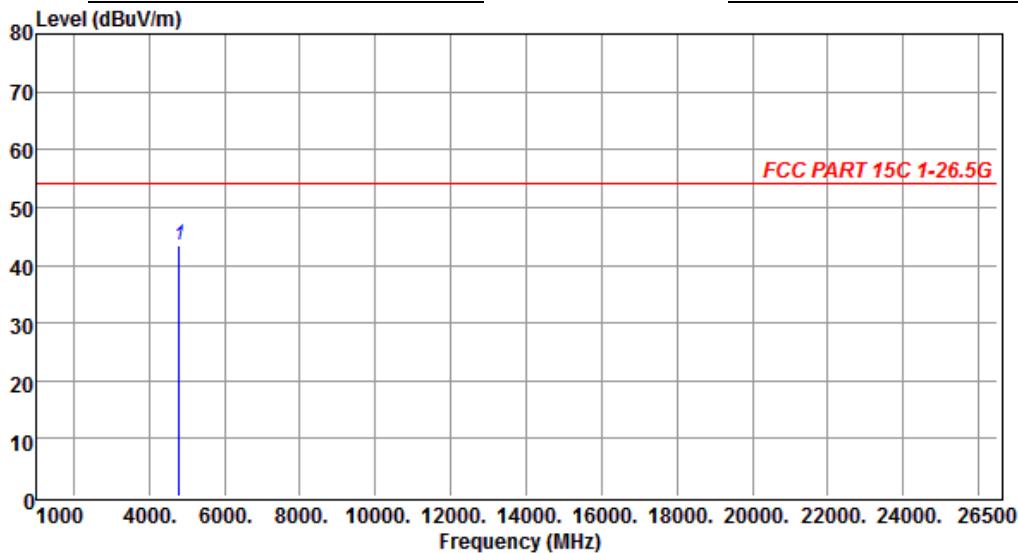

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4804.000	42.94	0.49	43.43	54.00	-10.57			HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit


Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature : 24.4°C
 Test Date : 21-Nov-2016
 Polarization : Vertical
 EUT Position : Vertical

Humidity : 49%
 Tested by : Eason Hsieh
 Channel : CH39 (2441MHz)

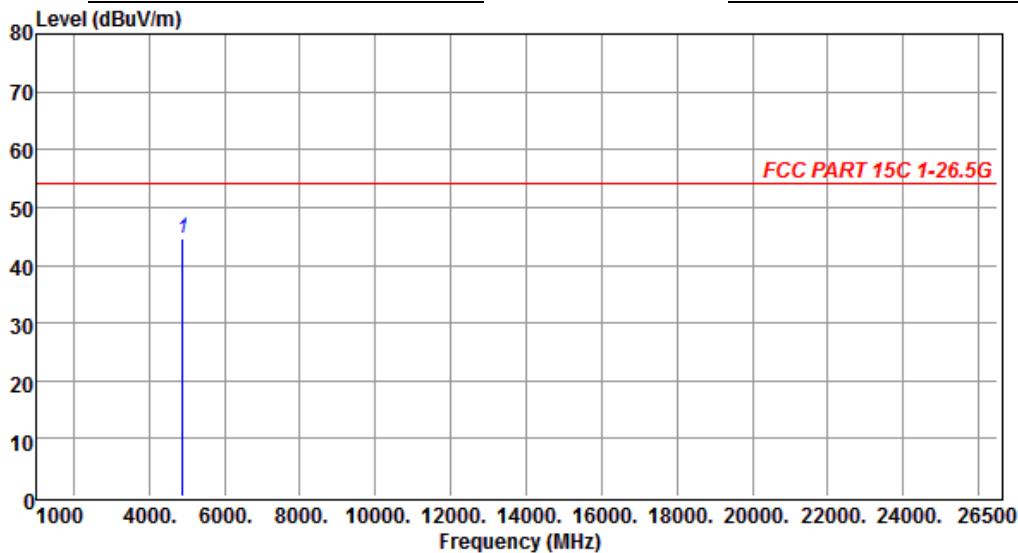

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4882.000	43.69	0.80	44.49	54.00	-9.51			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit


Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature : 24.4°C
 Test Date : 21-Nov-2016
 Polarization : Horizontal
 EUT Position : Vertical

Humidity : 49%
 Tested by : Eason Hsieh
 Channel : CH39 (2441MHz)

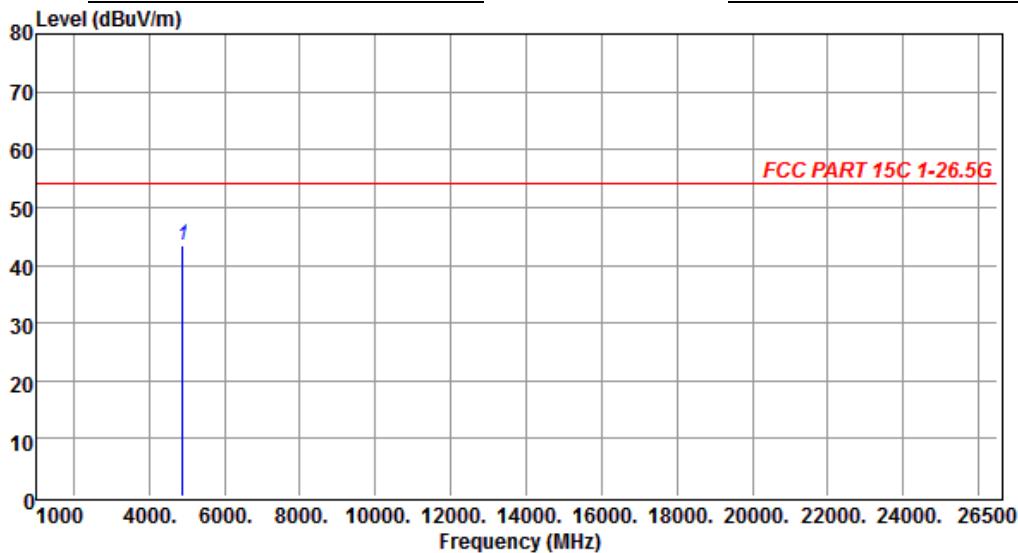

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4882.000	42.52	0.80	43.32	54.00	-10.68			HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit


Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature : 24.4°C
 Test Date : 21-Nov-2016
 Polarization : Vertical
 EUT Position : Vertical

Humidity : 49%
 Tested by : Eason Hsieh
 Channel : CH78 (2480MHz)

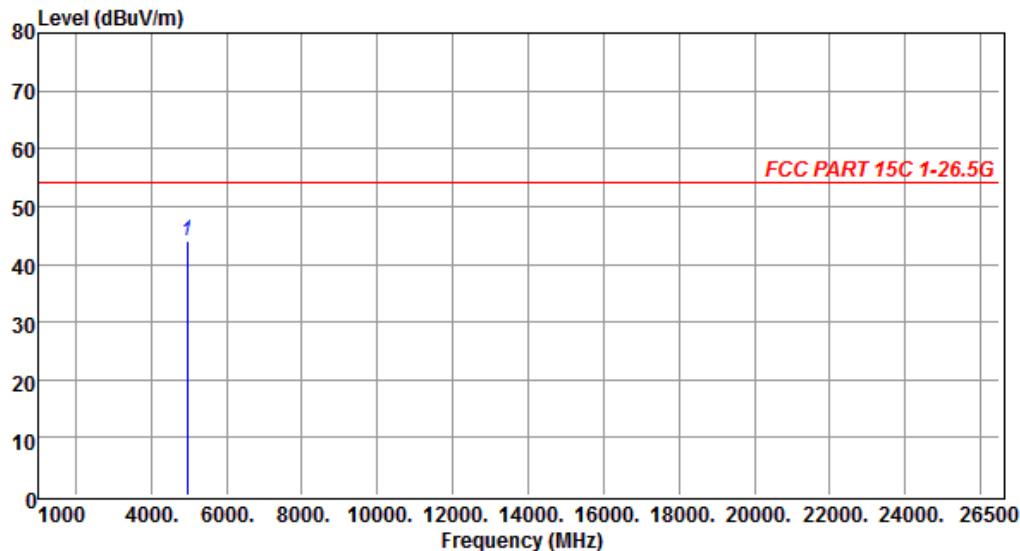

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4960.000	42.85	1.15	44.00	54.00	-10.00	-----	-----	VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Note2: Margin = Result - Limit


Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature : 24.4°C
 Test Date : 21-Nov-2016
 Polarization : Horizontal
 EUT Position : Vertical

Humidity : 49%
 Tested by : Eason Hsieh
 Channel : CH78 (2480MHz)

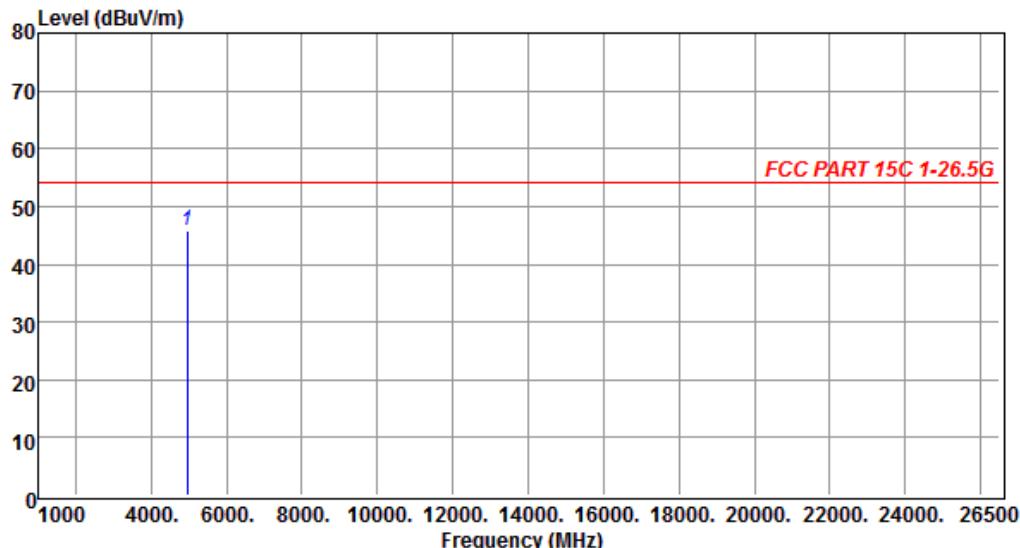

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4960.000	44.52	1.15	45.67	54.00	-8.33	-----	-----	HORIZONTAL	Peak


Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH00 (2402MHz) EDR 2Mbps
EUT Position	: Vertical		

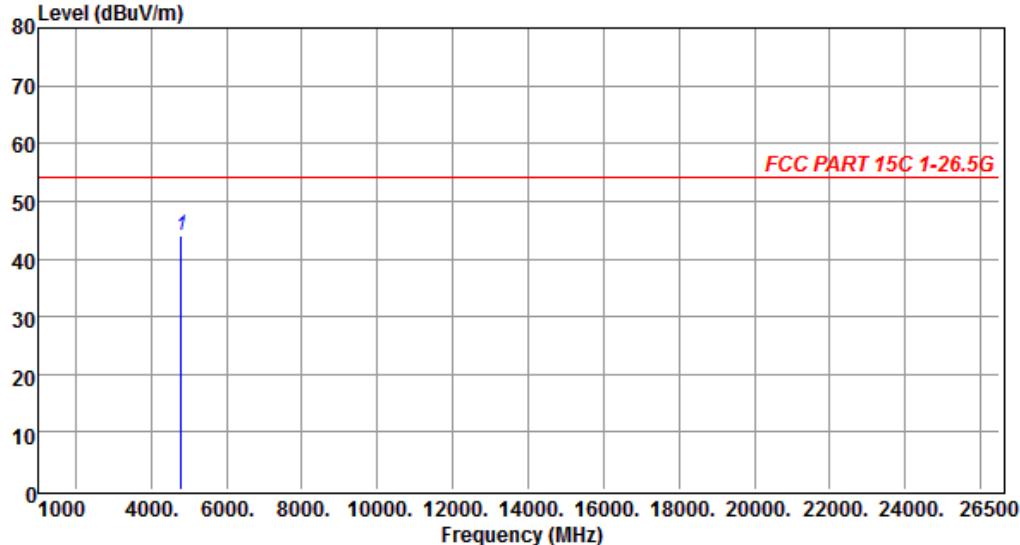

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV		dB	dBuV/m	dBuV/m	dB	cm	deg	
4804.000	43.58	0.49	44.07	54.00	-9.93			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH00 (2402MHz) EDR 2Mbps
EUT Position	: Vertical		

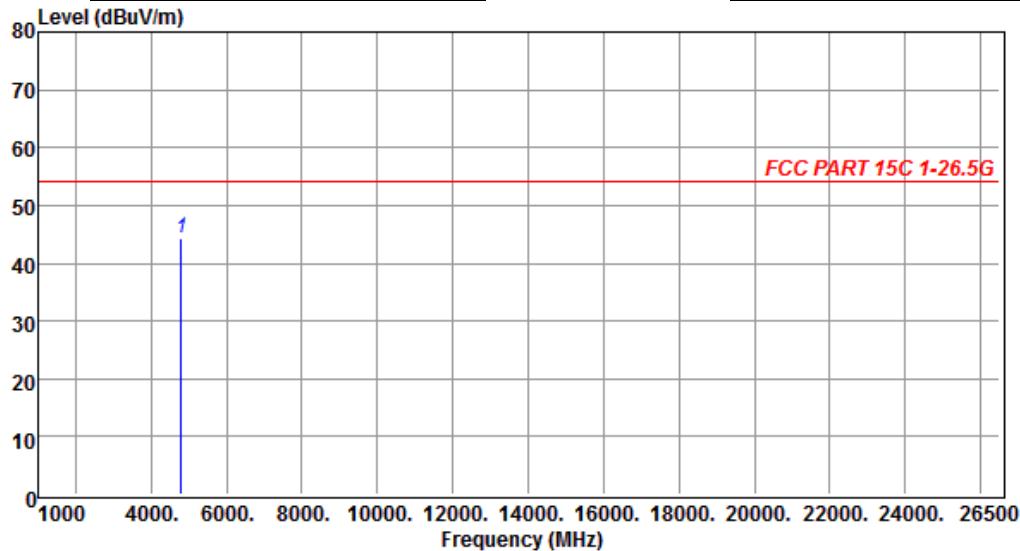

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4804.000	43.74	0.49	44.23	54.00	-9.77			HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH39 (2441MHz) EDR 2Mbps
EUT Position	: Vertical		

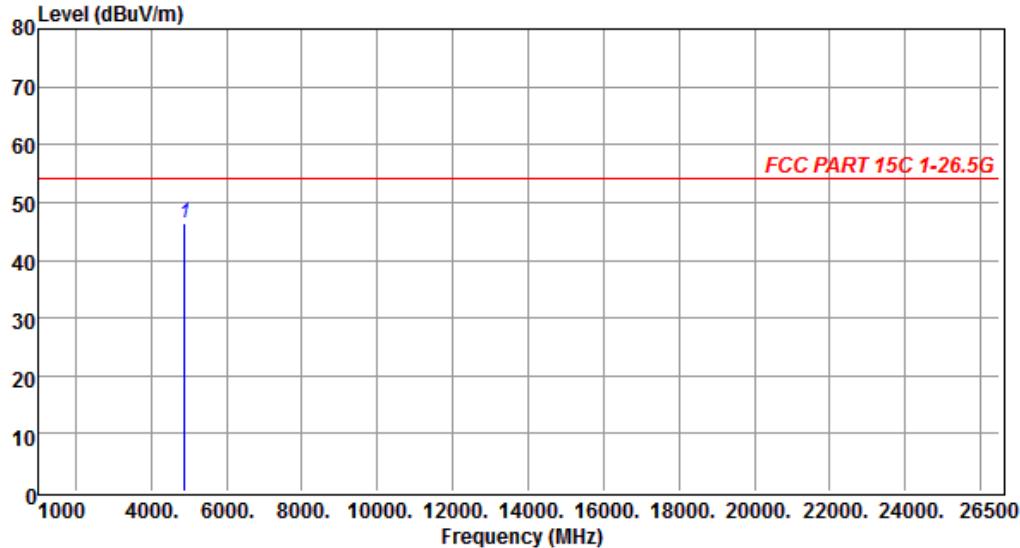

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4882.00	45.52	0.80	46.32	54.00	-7.68			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH39 (2441MHz) EDR 2Mbps
EUT Position	: Vertical		

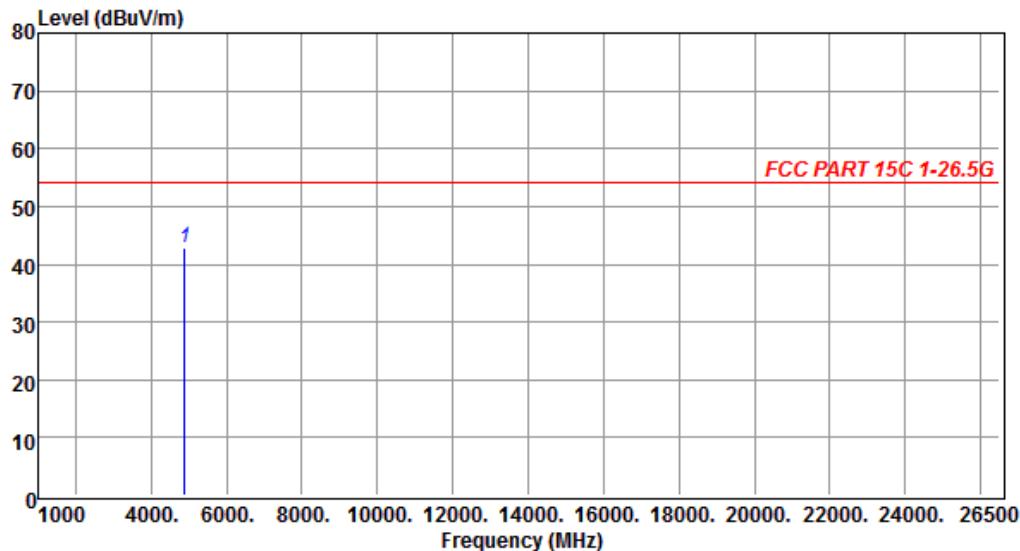

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4882.000	42.16	0.80	42.96	54.00	-11.04	-----	-----	HORIZONTAL	Peak


Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH78 (2480MHz) EDR 2Mbps
EUT Position	: Vertical		

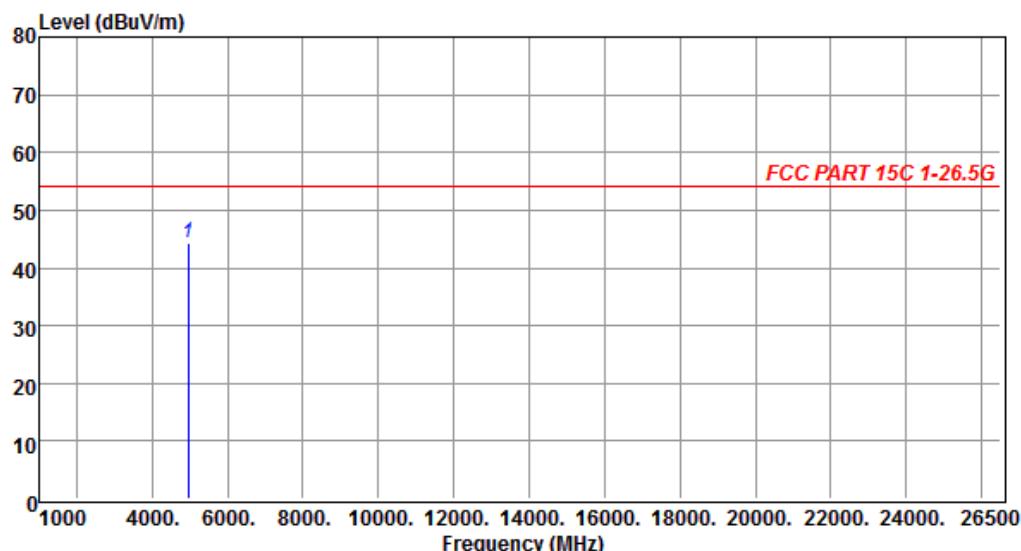

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4960.000	43.04	1.15	44.19	54.00	-9.81	-----	-----	VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH78 (2480MHz) EDR 2Mbps
EUT Position	: Vertical		

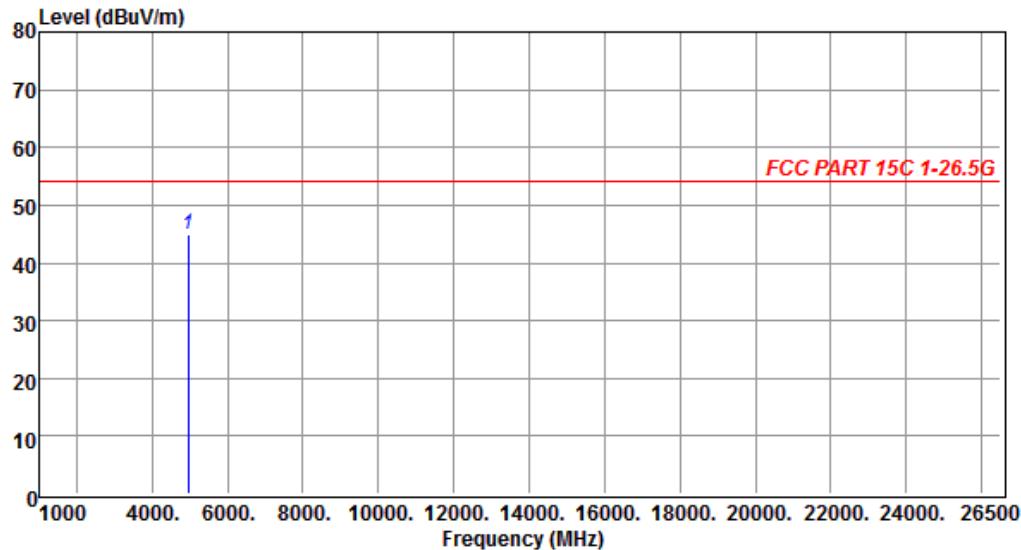

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4960.000	43.65	1.15	44.80	54.00	-9.20	-----	-----	HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH00 (2402MHz) EDR 3Mbps
EUT Position	: Vertical		

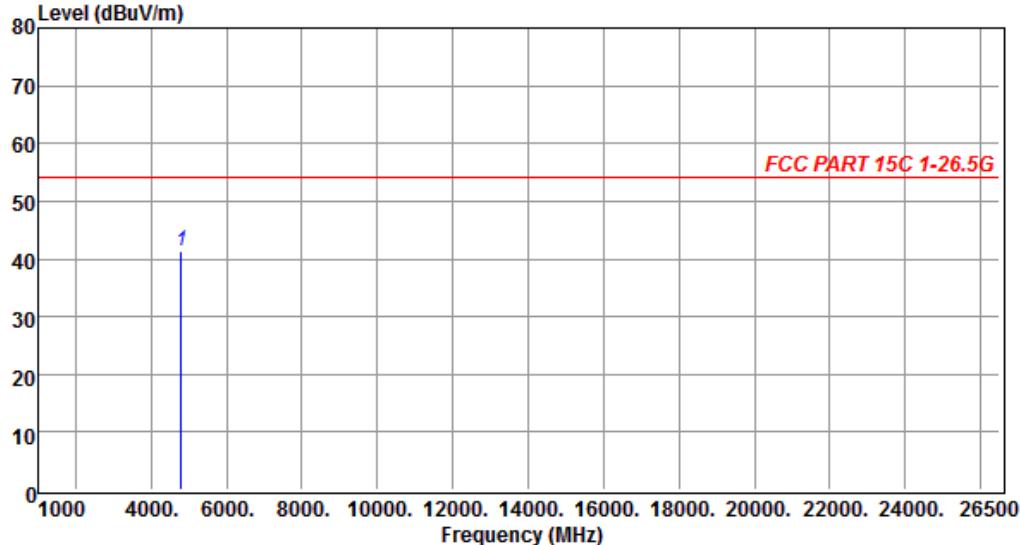

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV		dB	dBuV/m	dBuV/m	dB	cm	deg	
4804.000	40.99	0.49	41.48	54.00	-12.52			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH00 (2402MHz) EDR 3Mbps
EUT Position	: Vertical		

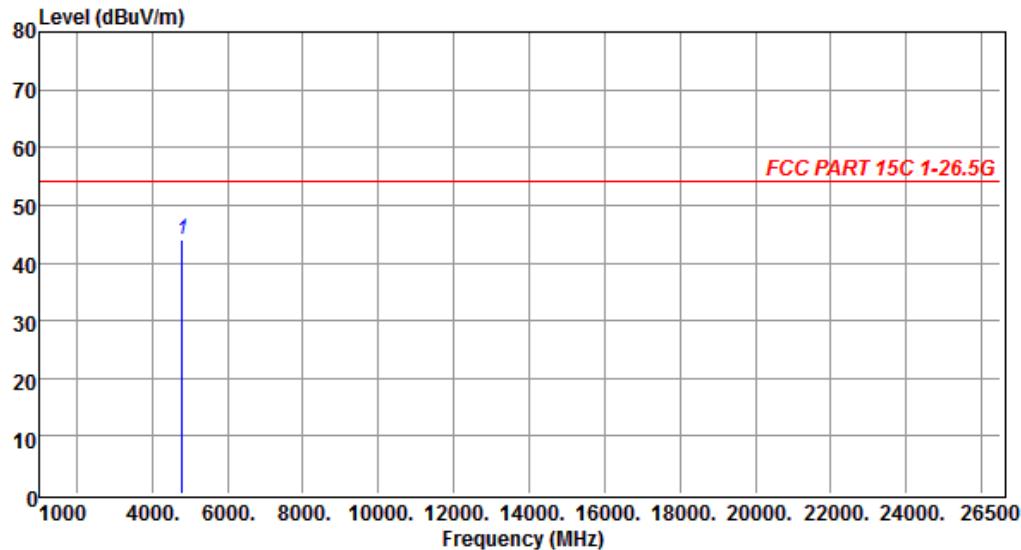

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV		dBuV/m	dBuV/m	dB	cm	deg		
4804.000	43.46	0.49	43.95	54.00	-10.05	-----	-----	HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH39 (2441MHz) EDR 3Mbps
EUT Position	: Vertical		

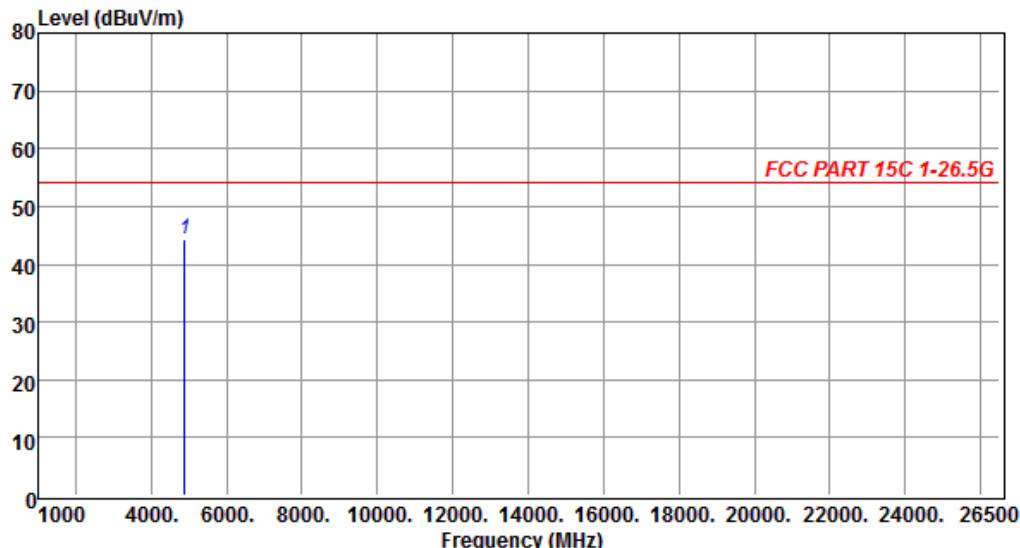

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4882.000	43.51	0.80	44.31	54.00	-9.69	-----	-----	VERTICAL	Peak


Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH39 (2441MHz) EDR 3Mbps
EUT Position	: Vertical		

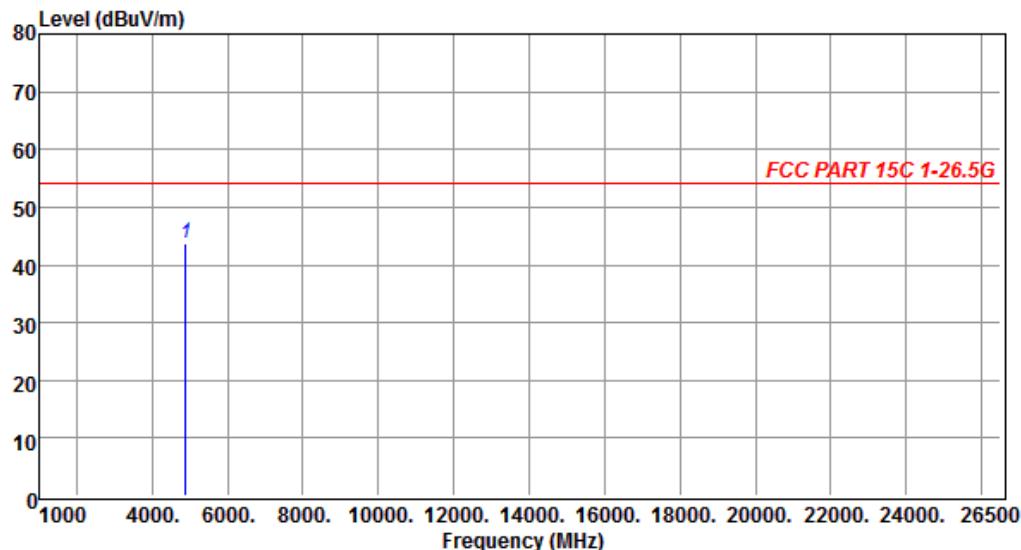

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV		dB	dBuV/m	dBuV/m	dB	cm	deg	
4882.00	42.84	0.80	43.64	54.00	-10.36	-----	-----	HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH78 (2480MHz) EDR 3Mbps
EUT Position	: Vertical		

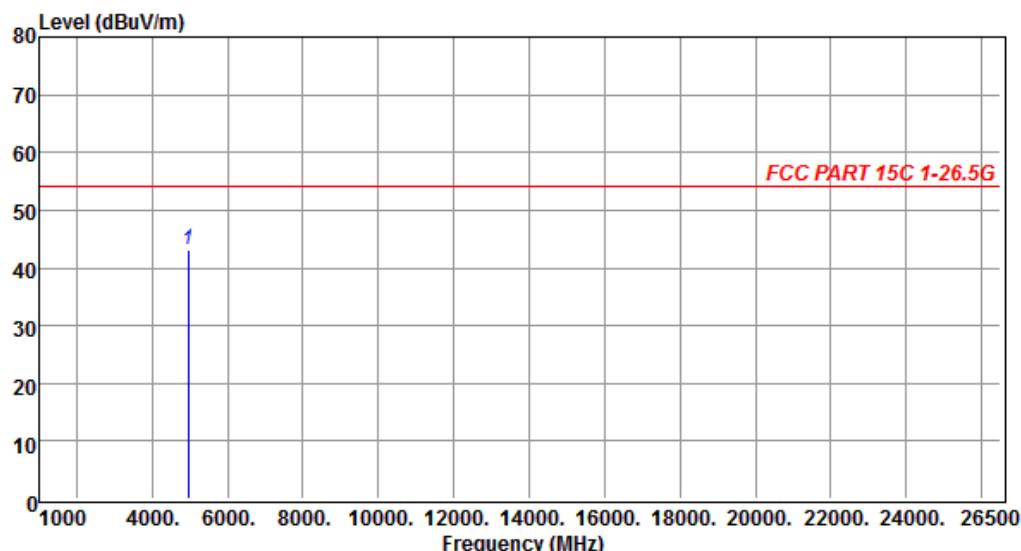

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV		dBuV/m	dBuV/m	dB	cm	deg		
4960.000	41.97	1.15	43.12	54.00	-10.88	-----	-----	VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)

Temperature	: 24.4°C	Humidity	: 49%
Test Date	: 21-Nov-2016	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH78 (2480MHz) EDR 3Mbps
EUT Position	: Vertical		

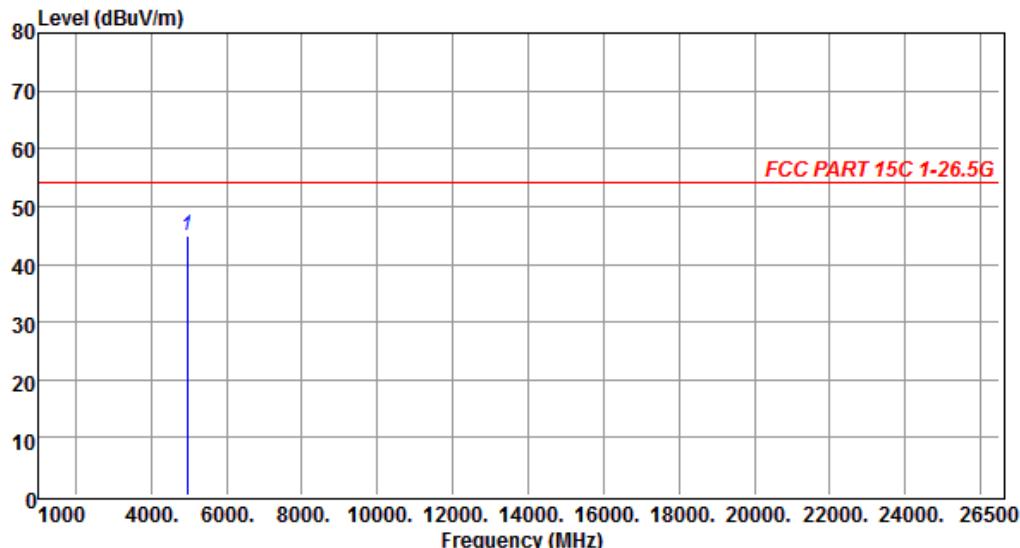

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4960.000	43.68	1.15	44.83	54.00	-9.17	-----	-----	HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Note2: Margin = Result - Limit

Remark :


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

4 20 dB Bandwidth

4.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

4.2 Test Arrangement and Procedure

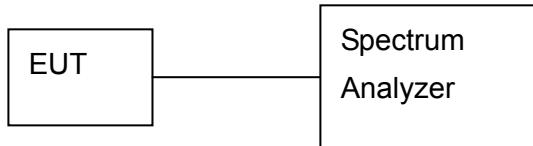

1. The transmitter output was connected to a spectrum analyzer (through an attenuator, if it's necessary).
2. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 300kHz VBW. Measured the -20 dB bandwidth and plotted the graph.

4.3 Limit

None; For report purpose only.

4.4 Test Result

No non-compliance noted.

The final test data are shown on the following page(s).


Bluetooth 1 Mbps		
Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	0.945
Middle	2441	0.943
High	2480	0.943

Bluetooth EDR 2 Mbps		
Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.272
Middle	2441	1.243
High	2480	1.243


Bluetooth EDR 3 Mbps		
Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.278
Middle	2441	1.261
High	2480	1.257

Temperature : 24.4°C
 Test Date : 21-Nov-2016
 Test Mode : BT (1 Mbps)

Humidity : 49%
 Tested by : Eason Hsieh
 Channel : 00

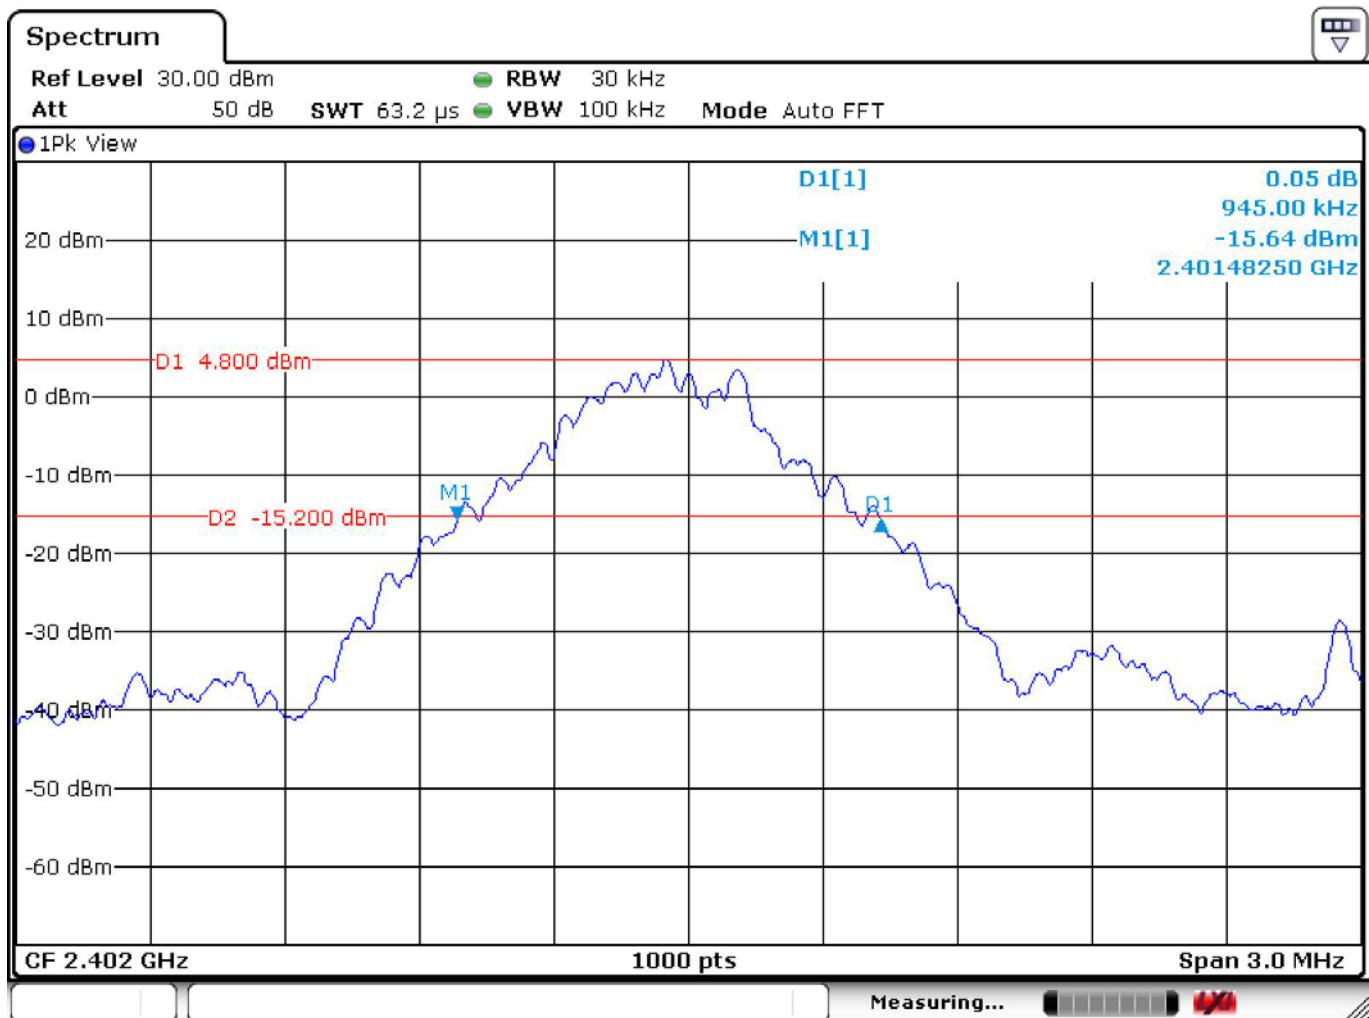


Test Mode : BT (1 Mbps) Channel : 39

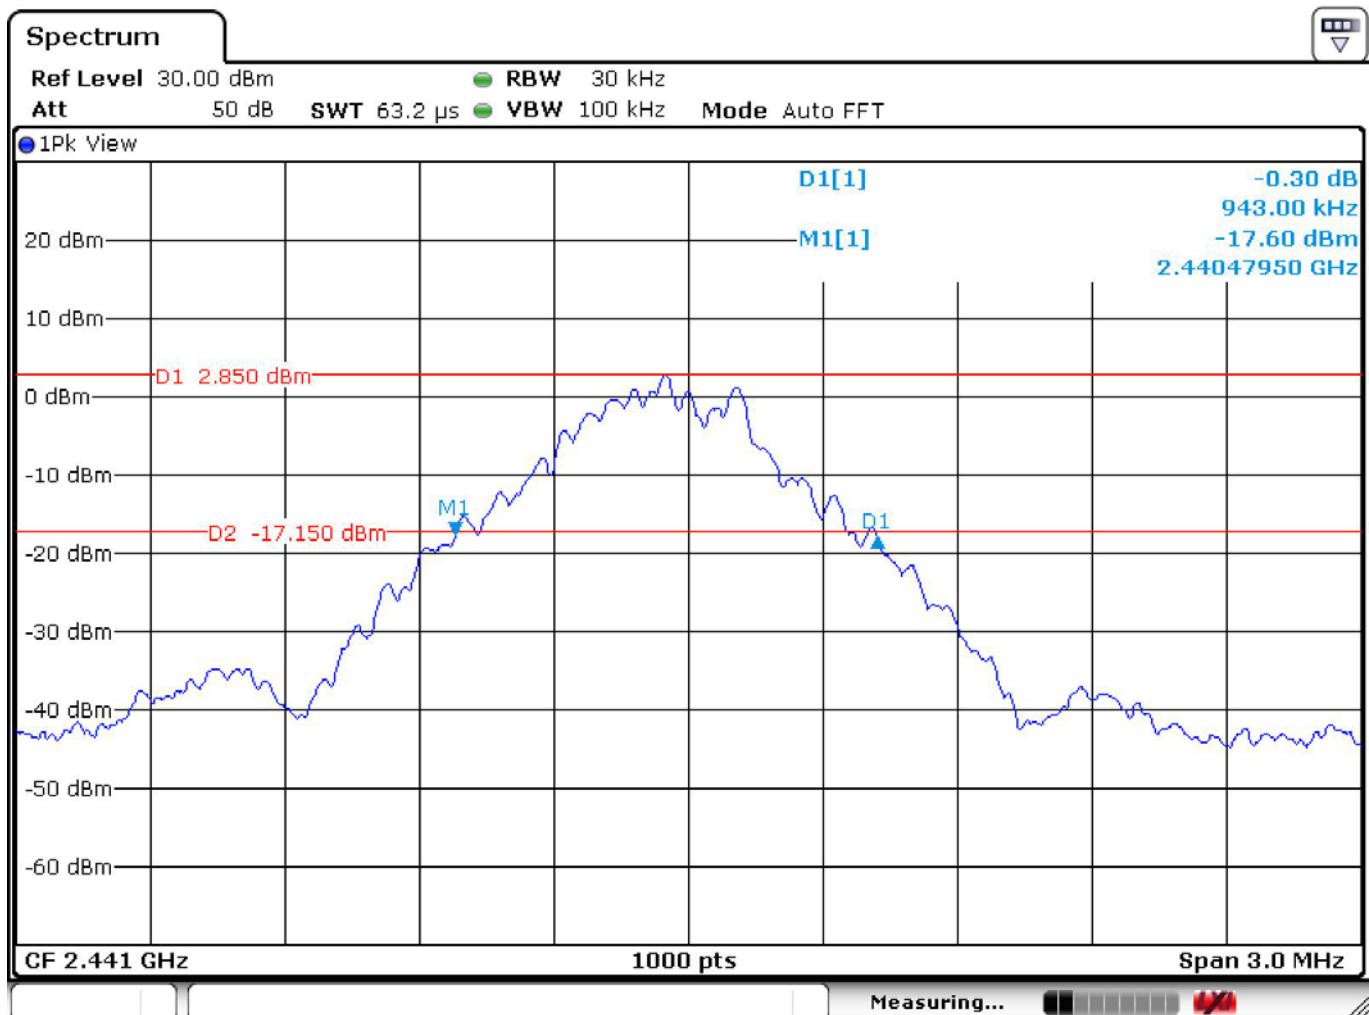


Test Mode : BT (1 Mbps)

Channel : 78

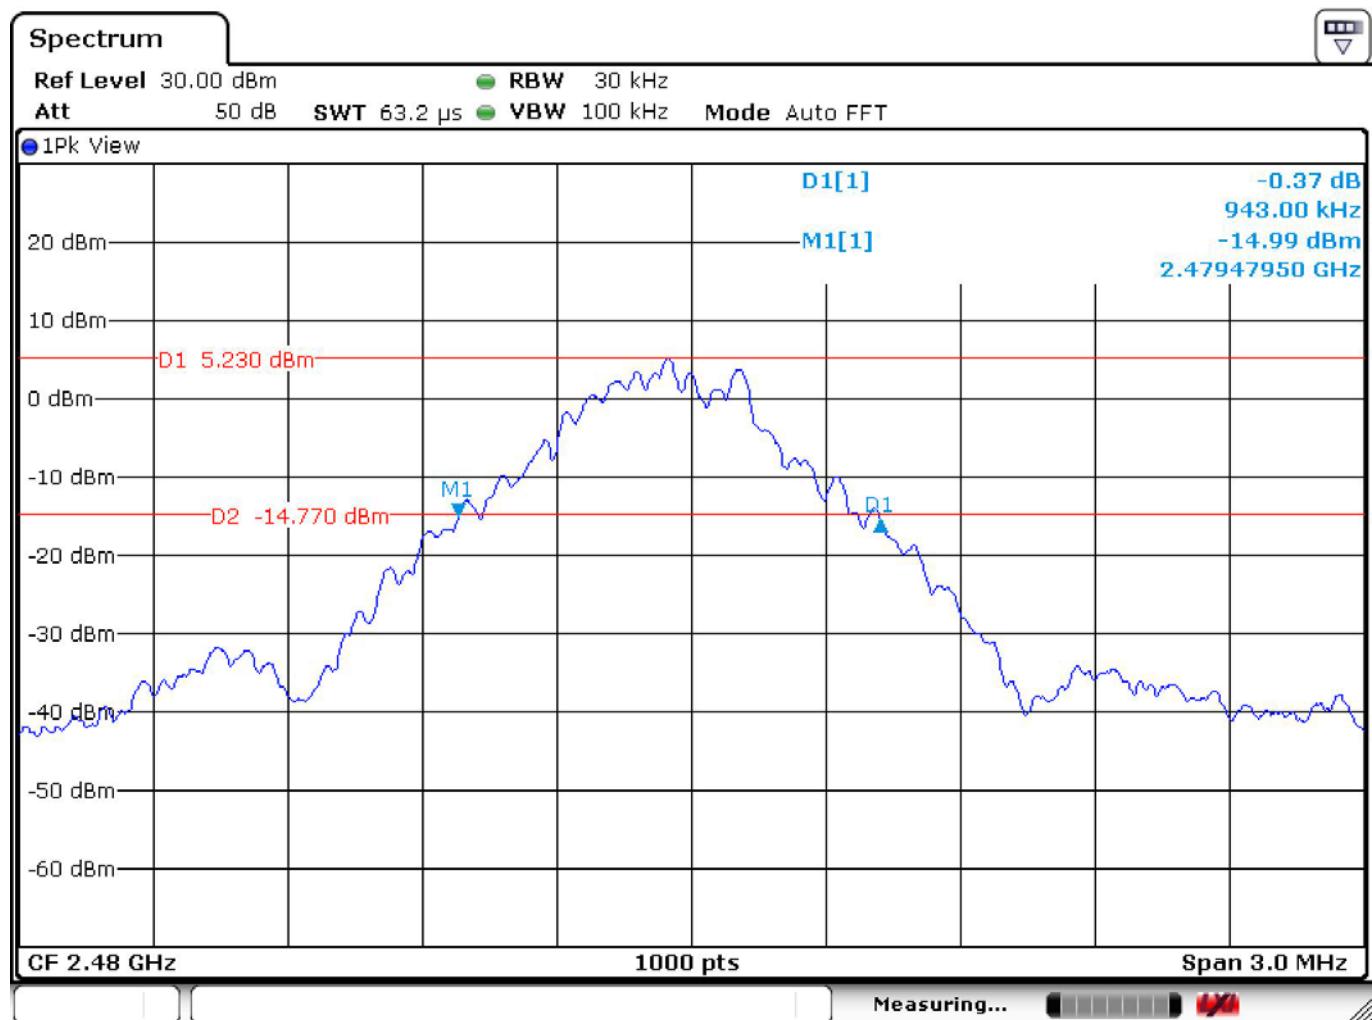


Test Mode : BT EDR (2 Mbps)


Channel : 00

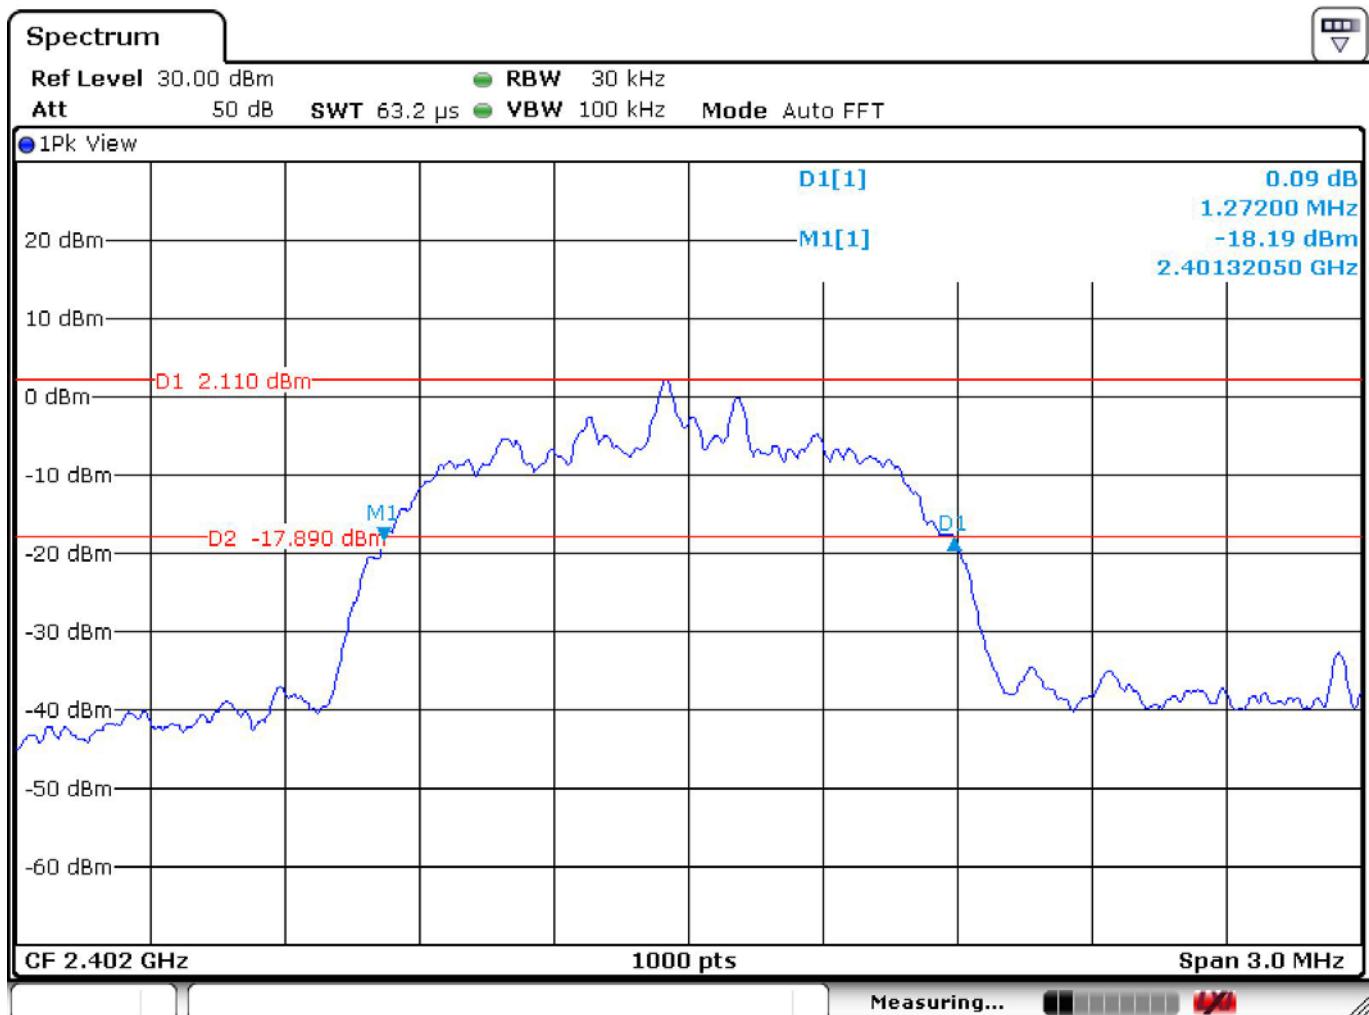


Test Mode : BT EDR (2 Mbps) Channel : 39

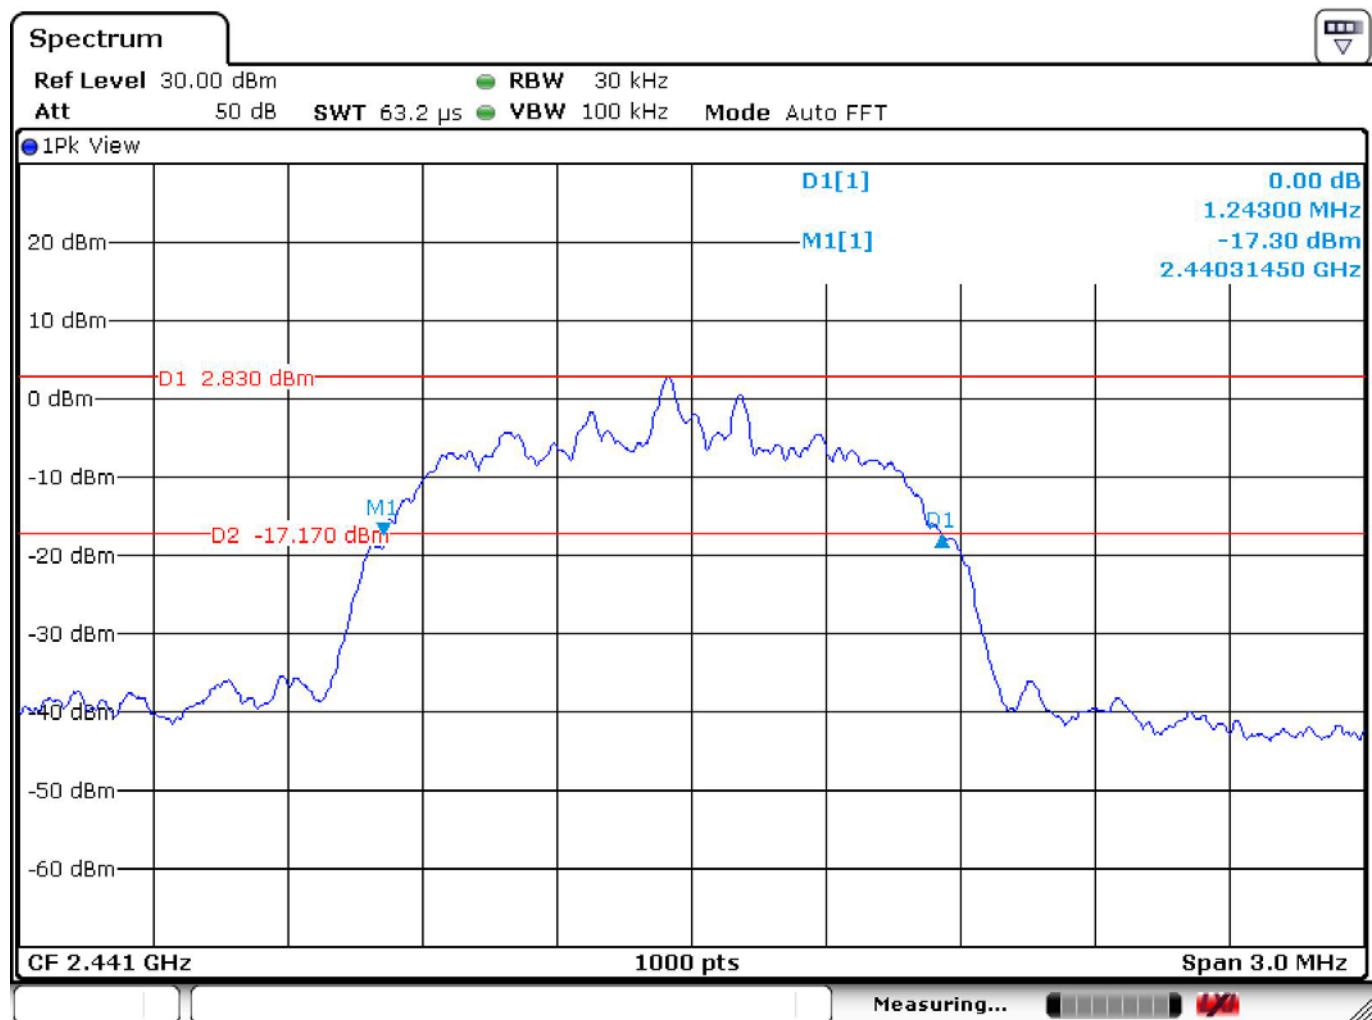


Test Mode : BT EDR (2 Mbps) Channel : 78

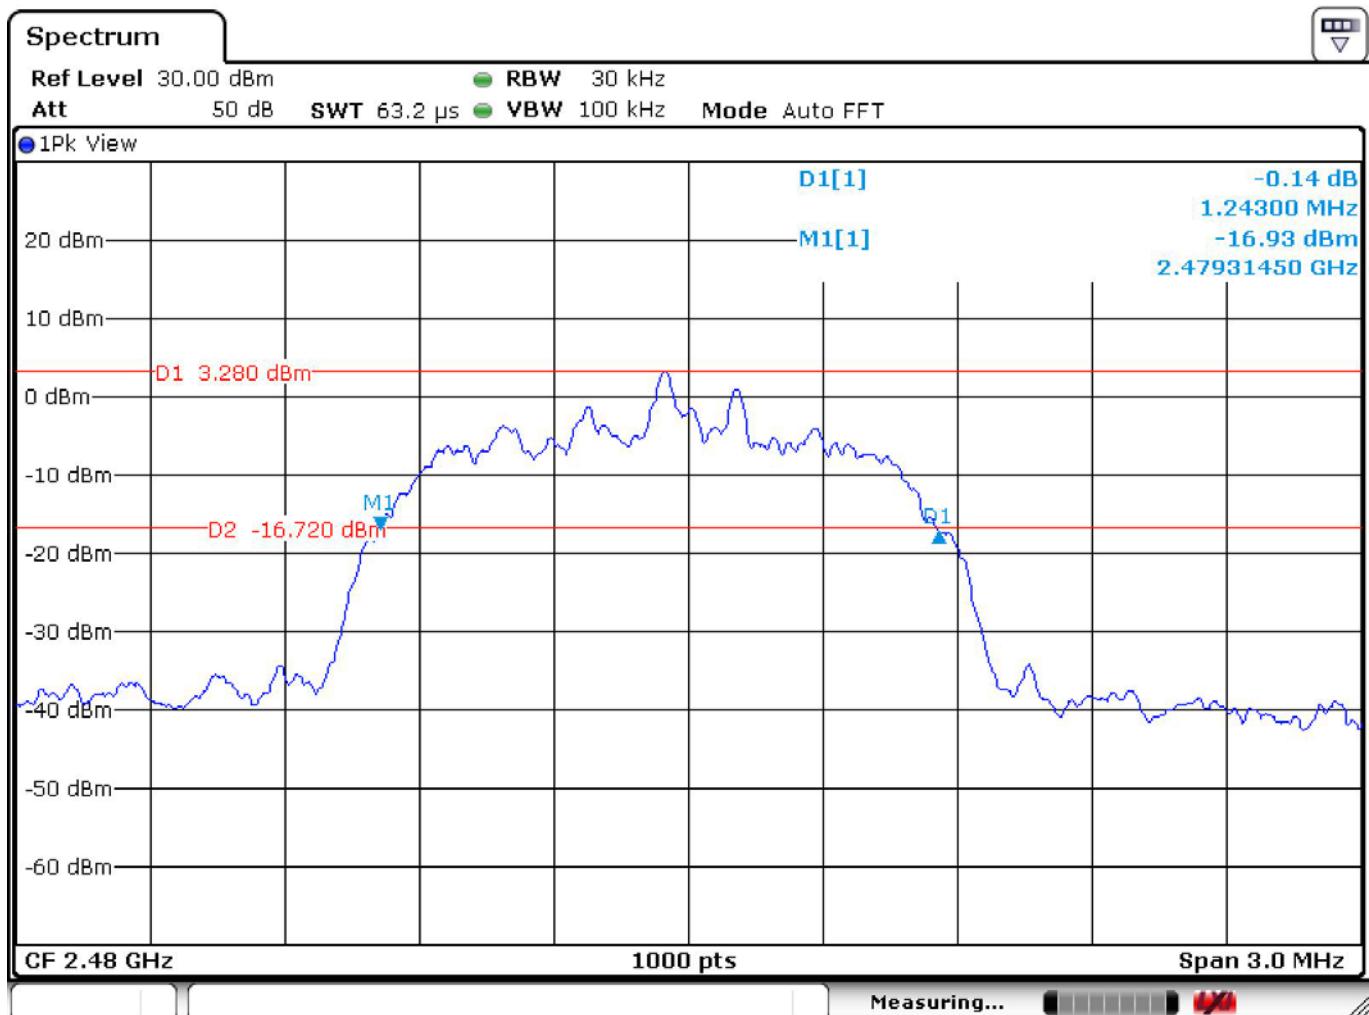


Test Mode : BT EDR (3 Mbps) Channel : 00

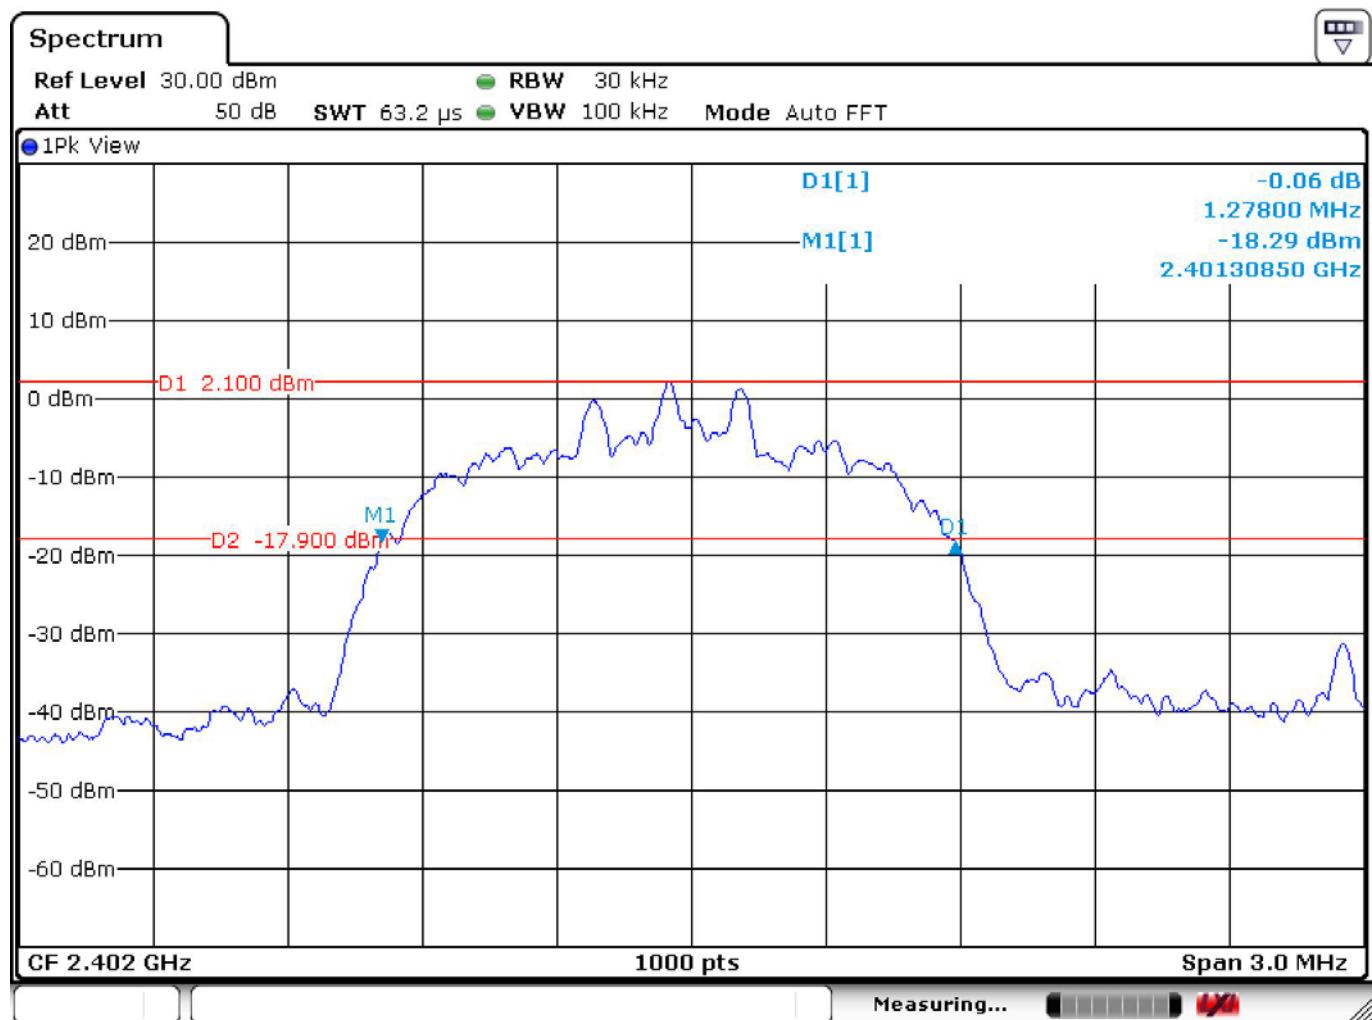

Test Mode : BT EDR (3 Mbps) Channel : 39

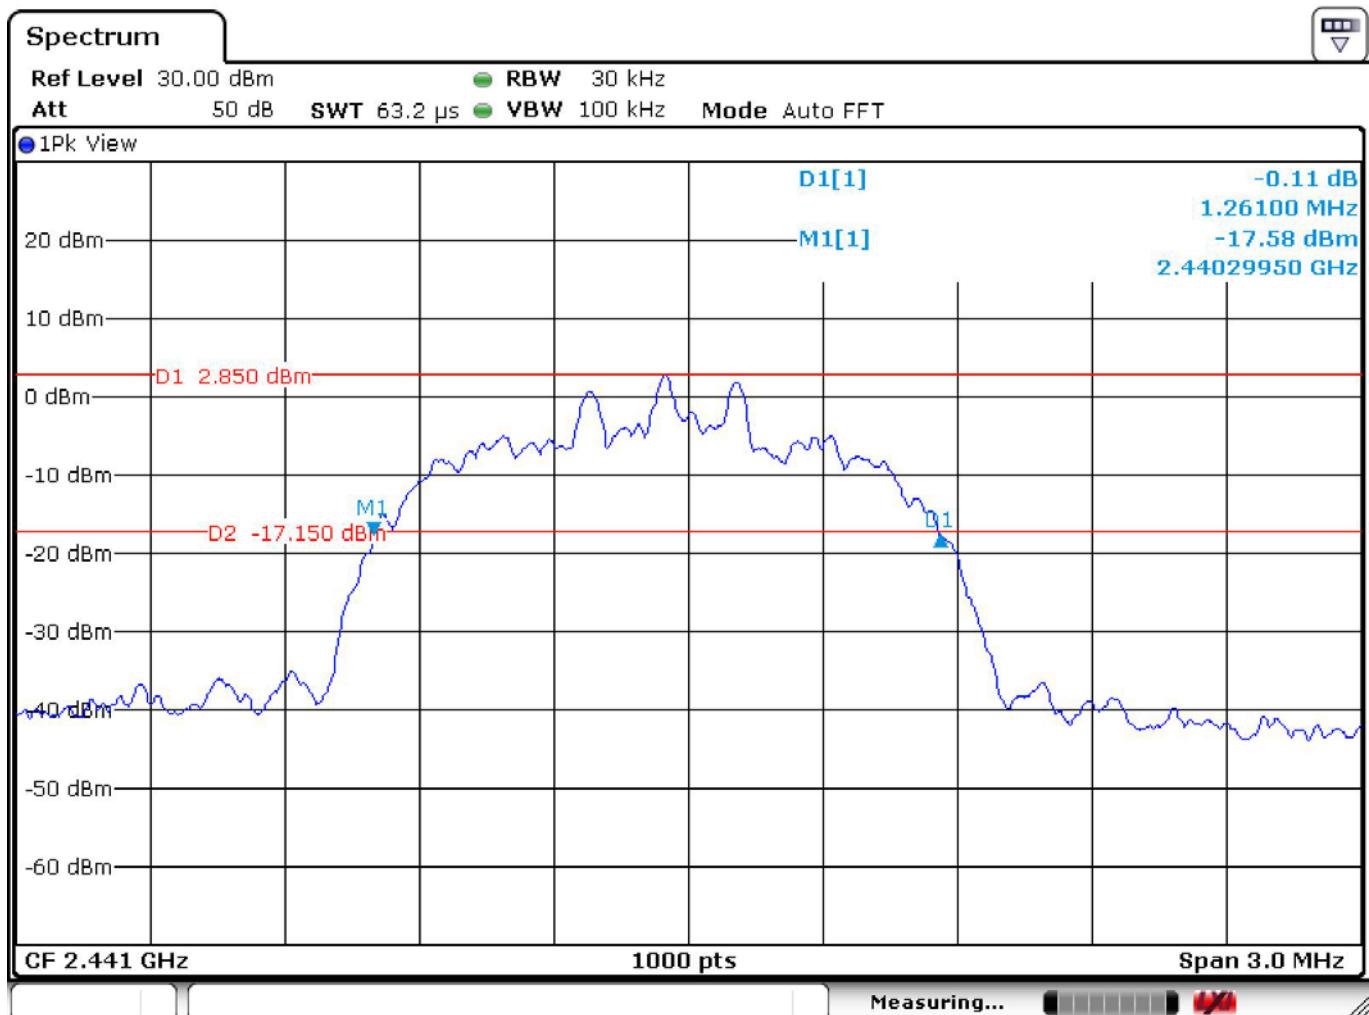

Test Mode : BT EDR (3 Mbps) Channel : 78

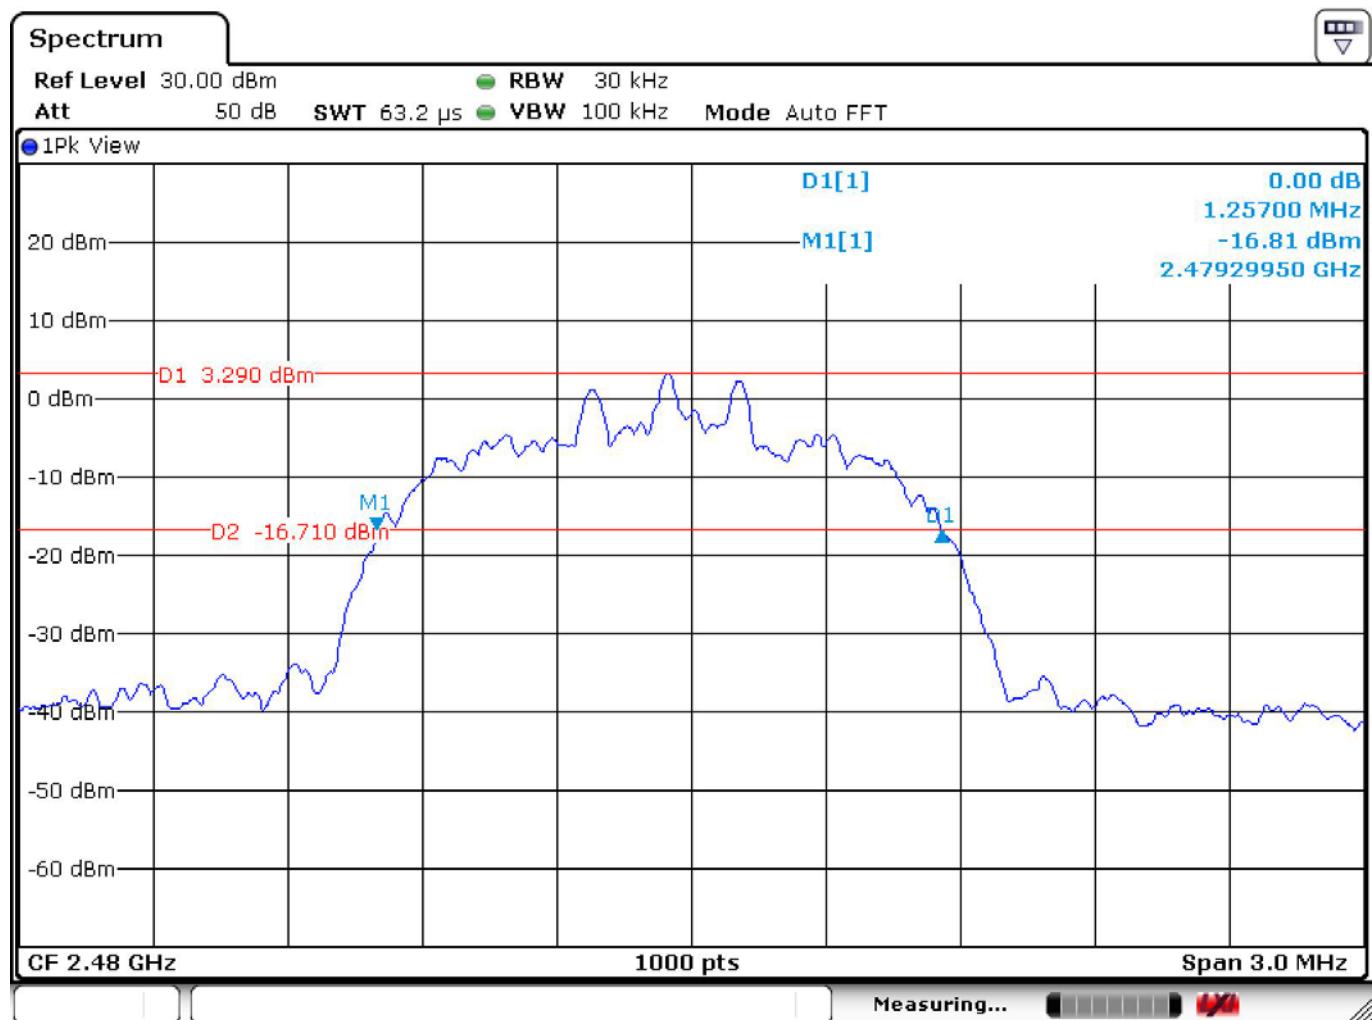


5 Hopping Frequency Separation

5.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

5.2 Test Arrangement and Procedure

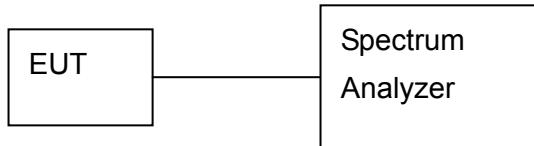

1. The transmitter output was connected to a spectrum analyzer (through an attenuator, if it's necessary).
2. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.
3. Mark the peak outputs of two adjacent channels. And, measured the separation between the marked peak outputs of two adjacent channels.

5.3 Limit (§ 15.247(a)(1))

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.4 Test Result

Compliance.


The final test data are shown on the following page(s).

Bluetooth EDR 3 Mbps


Channel	Frequency (MHz)	20 dB bandwidth (MHz)	Limit (2/3 of 20dB bandwidth) (MHz)	Result	Verdict
Low	2402	1.278	0.852	1.00	Pass
Middle	2441	1.261	0.840	1.00	Pass
High	2480	1.257	0.838	1.00	Pass

Temperature : 24.4°C
 Test Date : 21-Nov-2016
 Test Mode : BT EDR (3 Mbps)

Humidity : 49%
 Tested by : Eason Hsieh
 Channel : Low

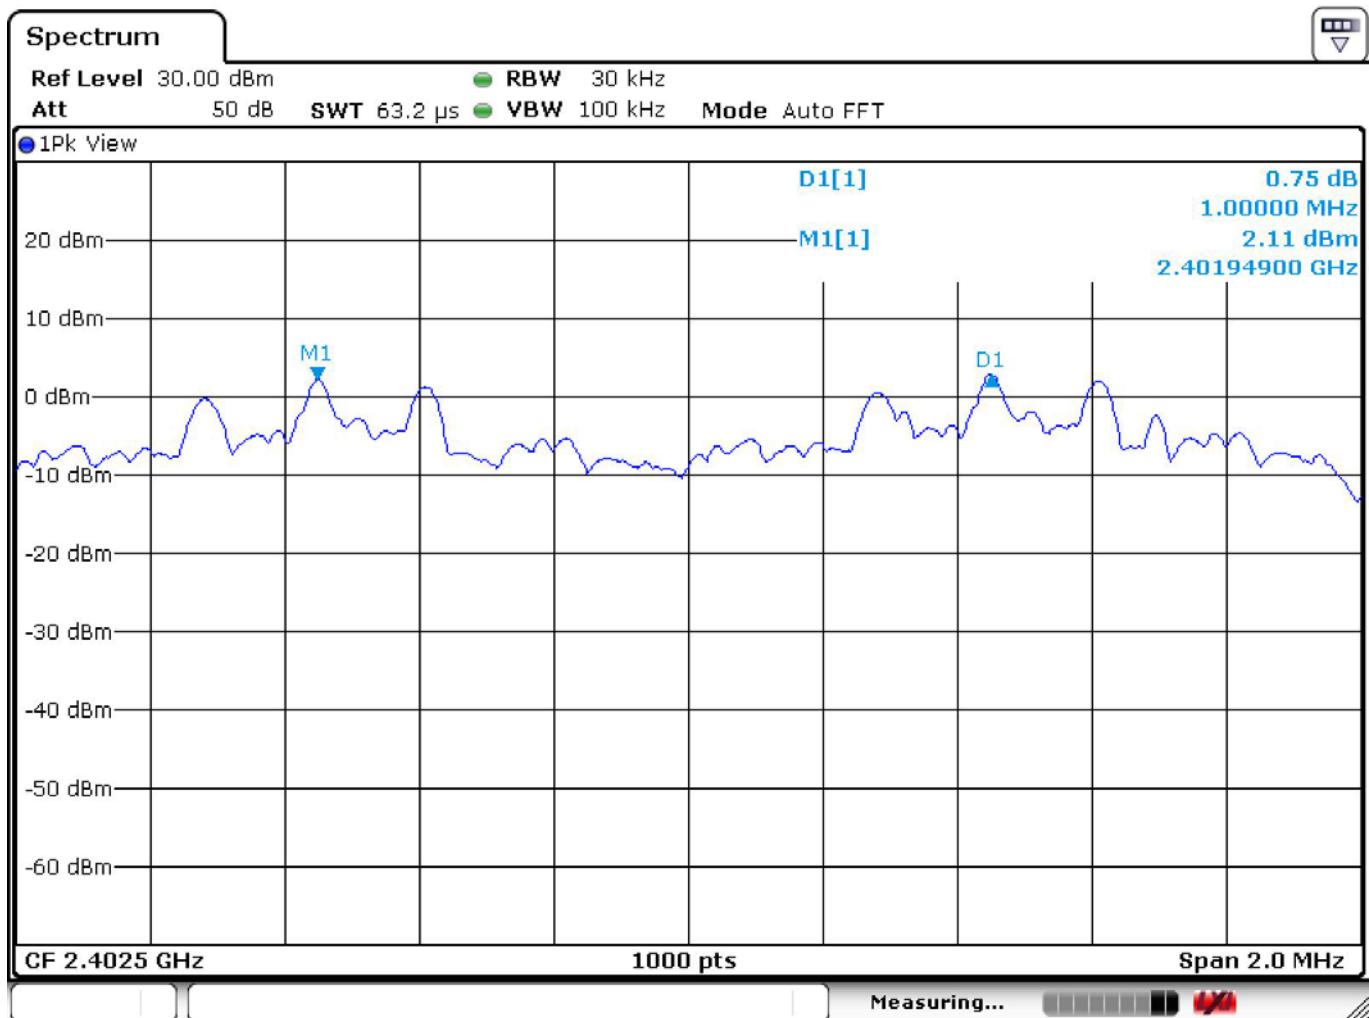


Test Mode : BT EDR (3 Mbps) Channel : Middle

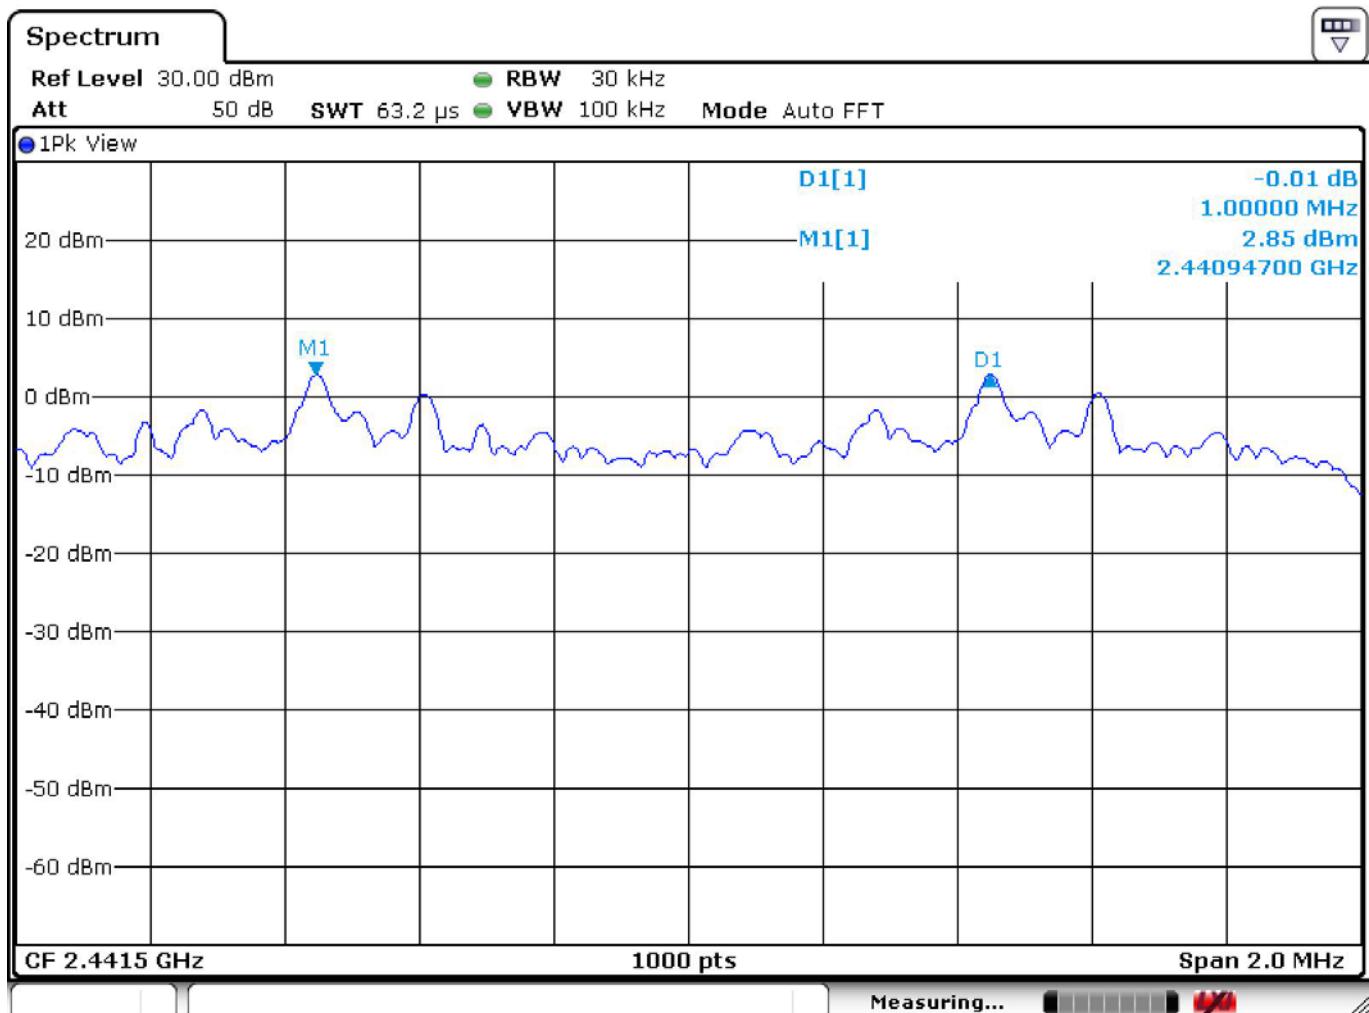

Test Mode : BT EDR (3 Mbps)

Channel : High

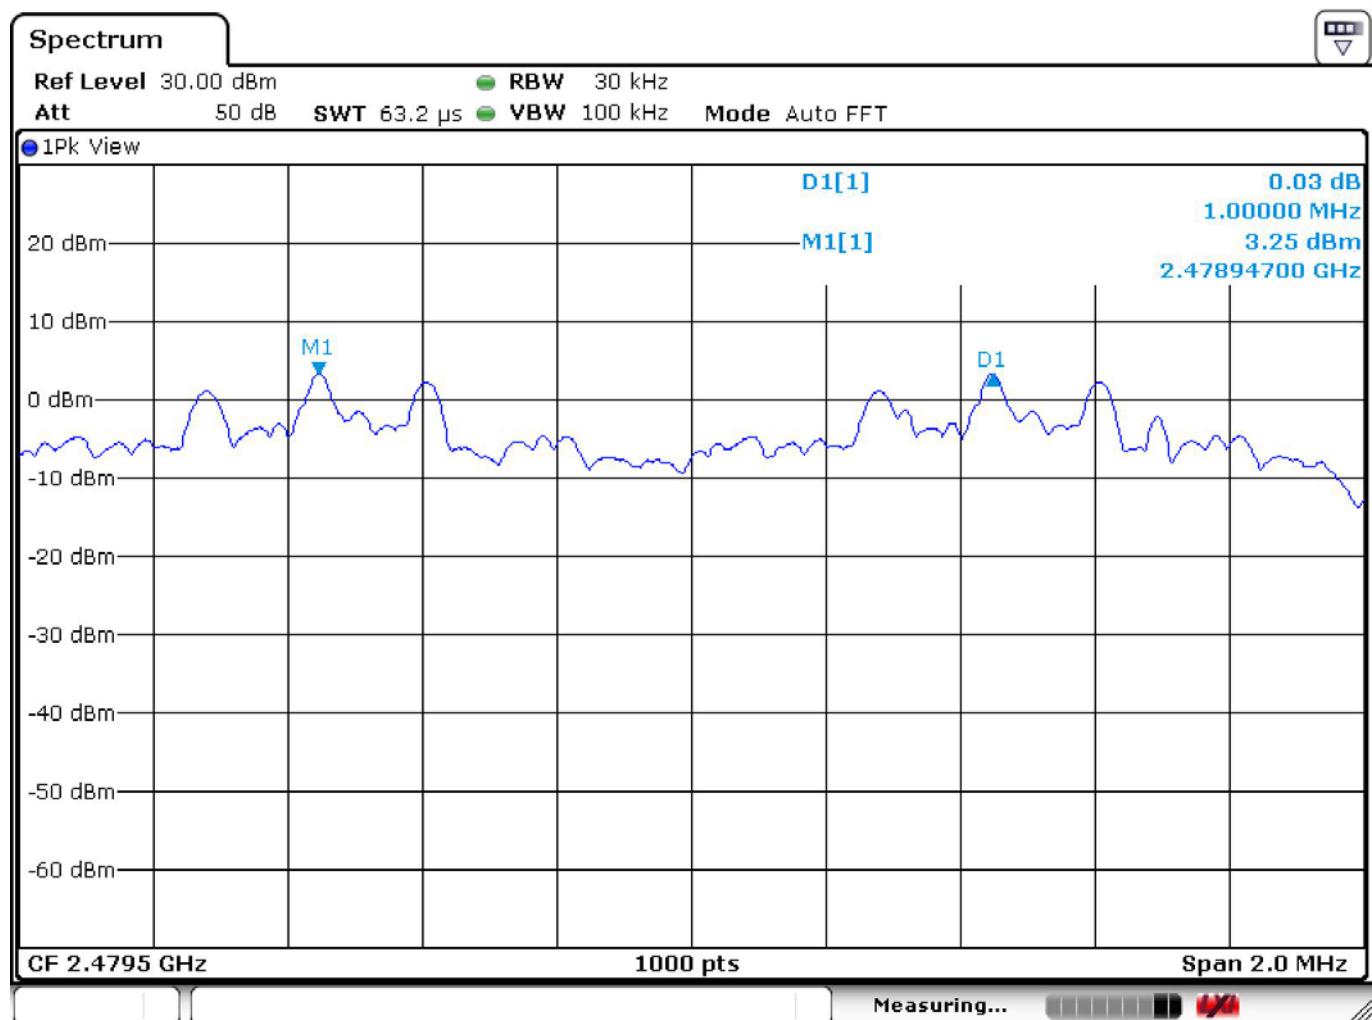

6 Number of Hopping Channels

6.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

6.2 Test Arrangement and Procedure



1. The transmitter output was connected to a spectrum analyzer (through an attenuator, if it's necessary).
2. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps.
3. The RBW is set to 1 MHz and VBW is set to 1 MHz .
4. Max Hold.

6.3 Limit (§ 15.247(a)(1)(iii))

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

6.4 Test Result


79 Channels have been used.

Compliance.


The final test data are shown on the following page(s).

Temperature : 24.4°C
 Test Date : 21-Nov-2016
 Test Mode : BT (1Mbps)

Humidity : 49%
 Tested by : Eason Hsieh

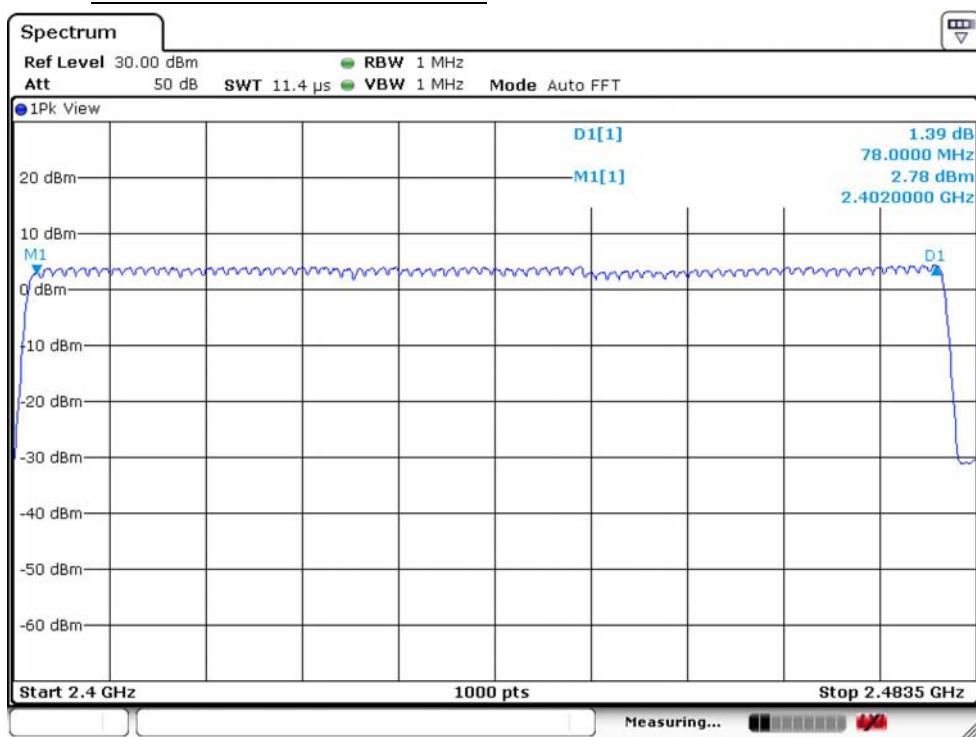

Test Mode : BT EDR (2Mbps)

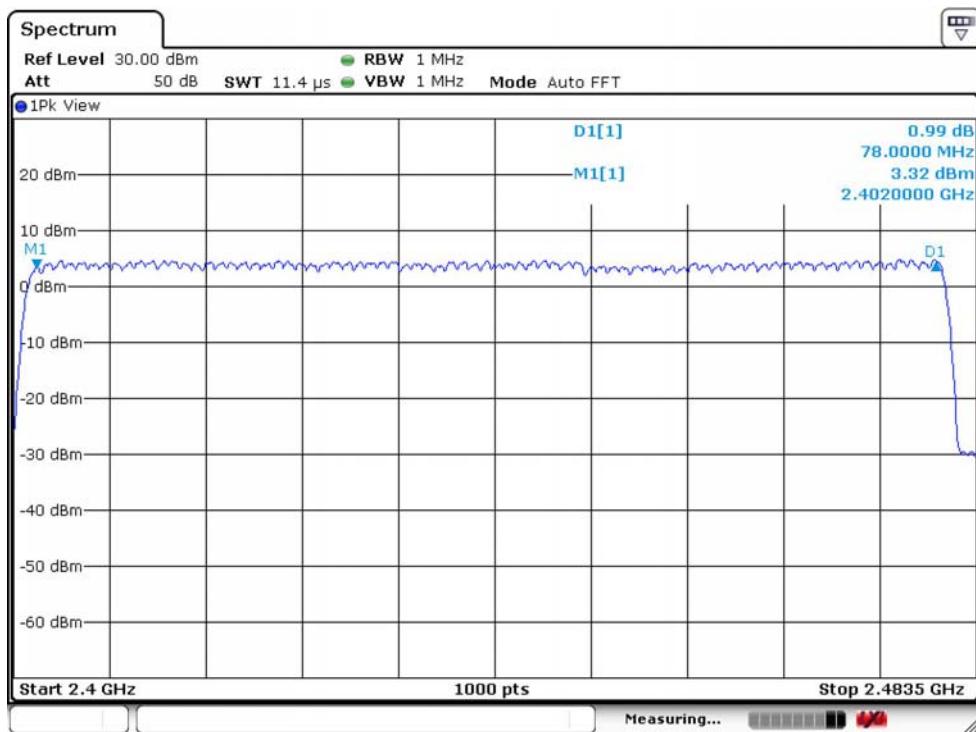

Test Mode

: BT EDR (3Mbps)

