

FCC – TEST REPORT

Report Number : **607922500401R01** Date of Issue: May 6, 2025

Model/HVIN : HG13298-US

Product Type : Kid's On-Ear Headphones

Applicant : Lidl US LLC

Address : 3500 S. Clark Street, Arlington Virginia 22202, United States.

Production Facility : SHENZHEN SHIKE KAM WAH ELECTRONIC CO., LTD.

Address : 1F, No #36, Langkou Industrial Park. Langkou Community, Dalang, Longhua District, Shenzhen, Guangdong, P.R .China.

Test Result : **n Positive** o Negative

Total pages including
Appendices : 69

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups	8
8	Systems Test Configuration.....	10
9	Technical Requirement.....	11
9.1	Conducted Emission	11
9.2	Conducted Peak Output Power & EIRP	14
9.3	20 dB Bandwidth.....	18
9.4	Carrier Frequency Separation.....	22
9.5	Number of Hopping Frequencies	24
9.6	Dwell Time	26
9.7	Spurious RF Conducted Emissions.....	36
9.8	Band Edge Testing.....	47
9.9	Spurious Radiated Emissions for Transmitter	54
10	Test Equipment List.....	68
11	System Measurement Uncertainty.....	69



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Nantou
Checkpoint Road 2, Nanshan District
Shenzhen 518052
P.R. China

Telephone: 86 755 8828 6998

Fax: 86 755 828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

3 Description of the Equipment Under Test

Description of the Equipment Under Test

Product:	Kid's On-Ear Headphones
Model no.:	HG13298-US
Brand name:	N/A
FCC ID:	2AJ9O-HG13298
Options and accessories:	N/A
Battery information:	Rechargeable Li-ion Battery 3.7 VDC 300 mAh
Rating:	5 VDC (USB C Port – Charging)
RF Transmission Frequency:	2402 – 2480 MHz
No. of Operated Channel:	79
Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type:	PCB Antenna
Antenna	Gain: 2.83 dBi
Description of the EUT:	The Equipment Under Test (EUT) is a Headphone which support Bluetooth Classic function operated at 2.4GHz.

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2023 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C			
Test Condition		Test Site	Test Result
§15.207	Conducted emission AC power port	Site 1	Pass
§15.247(b)(1)	Conducted peak output power	Site 1	Pass
§15.247(a)(1)	20dB bandwidth	Site 1	Pass
§15.247(a)(1)	Carrier channel frequency separation	Site 1	Pass
§15.247(a)(1)(iii)	Number of hopping frequencies	Site 1	Pass
§15.247(a)(1)(iii)	Dwell Time - Average Time of Occupancy	Site 1	Pass
§15.247(d)	Spurious RF conducted emissions	Site 1	Pass
§15.247(d)	Band edge	Site 1	Pass
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter	Site 1	Pass
§15.203	Antenna requirement	See note 2	Pass

Note 1: N/A=Not Applicable.

Note 2: The EUT uses a PCB Antenna, which gain is 2.83 dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AJ9O-HG13298, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules.

SUMMARY:

All tests according to the regulations cited on page 5 were

n - Performed

o - **Not** Performed

The Equipment Under Test

n - **Fulfills** the general approval requirements.

o - **Does not** fulfill the general approval requirements.

Sample Received Date: March 20, 2025

Testing Start Date: March 22, 2025

Testing End Date: April 30, 2025

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -


Reviewed by:

Prepared by:

Tested by:



Eric LI
Section Manager





Kevin DU
EMC Project Engineer




Carry Cai
Test Engineer

7 Test Setups


7.1 AC Power Line Conducted Emission test setups

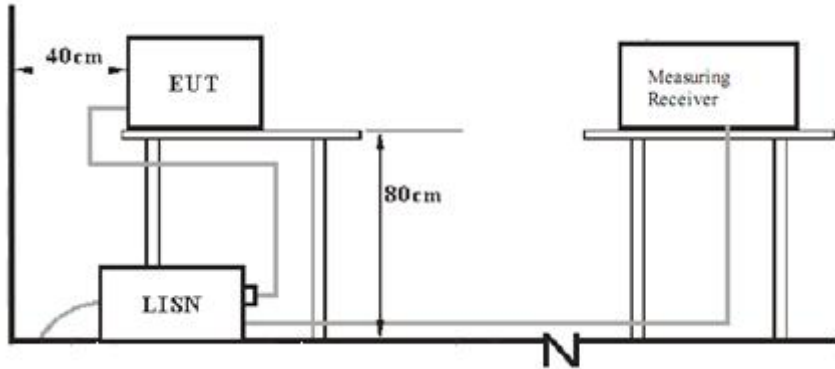

7.2 Radiated test setups 9KHz - 30MHz

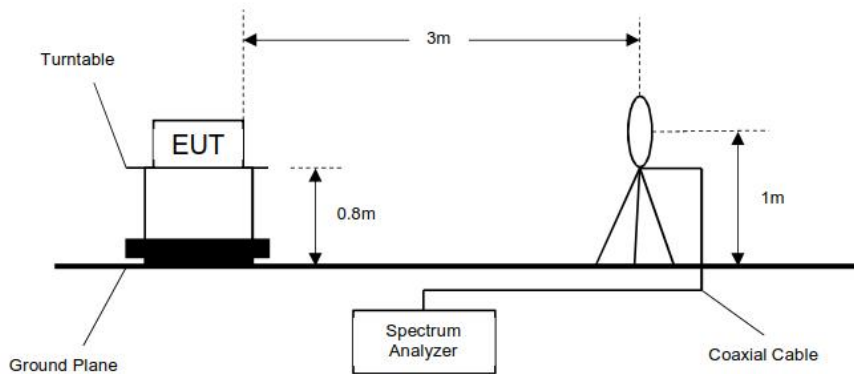


30MHz - 1GHz

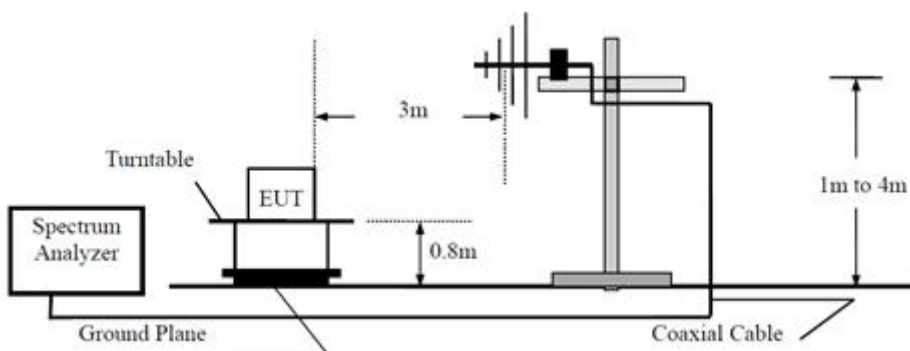




Above 1GHz

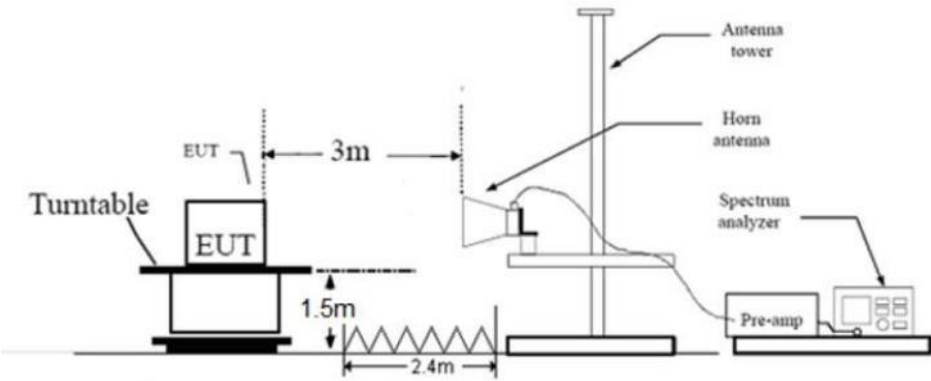

7.3 Conducted RF test setups



8 Systems Test Configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model NO.	S/N
Adapter	Apple	A1443	---
Notebook	LENOVO	X220	---

Cables Used During Test:

Cable	Length	Shielded/unshielded	With / without ferrite
---	---	---	---

Test software information:

Test Software Version	Broadcom BlueTool	
Modulation	Setting TX Power	Packet Type
GFSK	Default	PRBS9
$\pi/4$ -DQPSK	Default	PRBS9
8DPSK	Default	PRBS9

The system was configured to hopping mode and non-hopping mode.

Hopping mode: typical working mode (normal hopping status)

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.




Test result:

EUT: HG13298-US
Op Condition: USB Port Charging Mode
Test Specification: FCC 15.107
Comment: 120V AC 60Hz, L Line

Test Result

☒ Passed

☐ Not Passed

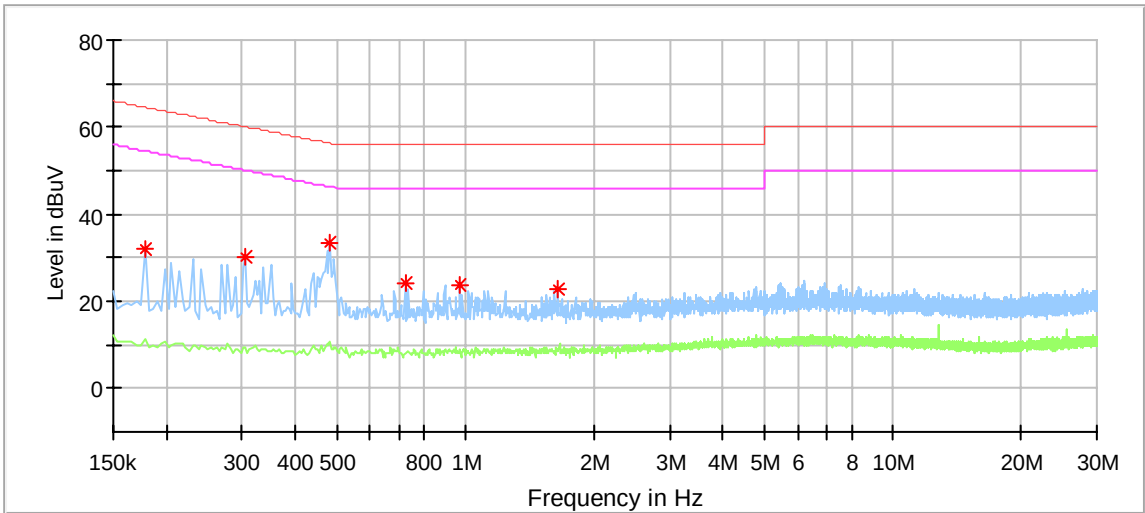

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.178000	32.06	---	64.58	32.51	L1	9.67
0.306000	30.37	---	60.08	29.71	L1	9.66
0.482000	33.41	---	56.31	22.90	L1	9.67
0.722000	24.17	---	56.00	31.83	L1	9.68
0.970000	23.60	---	56.00	32.40	L1	9.69
1.646000	22.66	---	56.00	33.34	L1	9.72




EUT: HG13298-US
Op Condition: USB Port Charging Mode
Test Specification: FCC 15.107
Comment: 120V AC 60Hz, N Line

Test Result

☒ Passed

☐ Not Passed

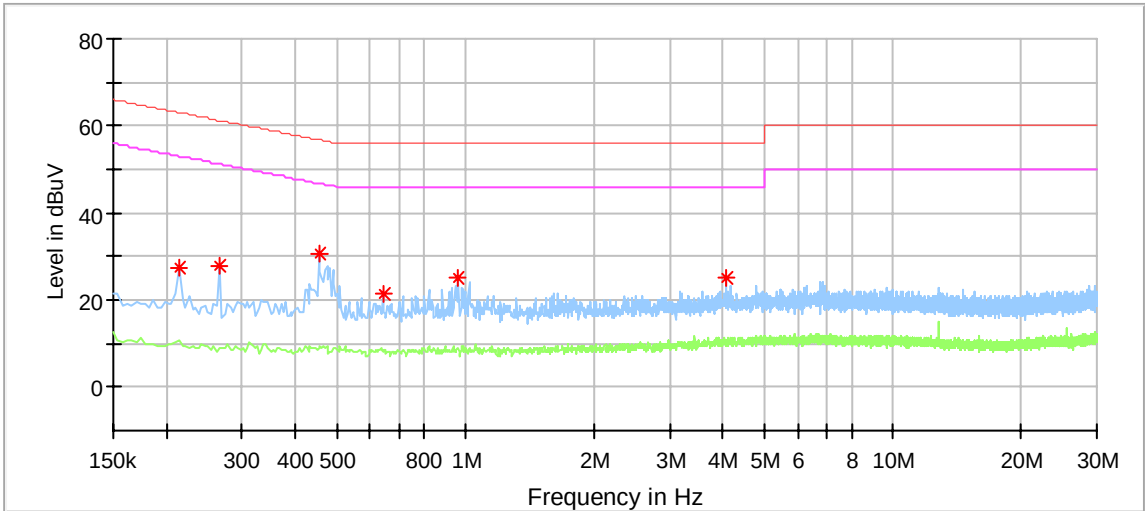

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.214000	27.49	---	63.05	35.56	N	9.66
0.266000	27.80	---	61.24	33.45	N	9.66
0.454000	30.72	---	56.80	26.08	N	9.67
0.642000	21.51	---	56.00	34.49	N	9.67
0.962000	25.19	---	56.00	30.81	N	9.67
4.074000	25.27	---	56.00	30.73	N	9.75

9.2 Conducted Peak Output Power & EIRP

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following test receiver settings:
Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel
RBW > the 20dB bandwidth of the emission being measured, VBW ≥ RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.

Limits


Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test result:


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	1.00	≤30	Pass
		2441	DH5	1.33	≤30	Pass
		2480	DH5	0.83	≤30	Pass
Pi/4DQPSK	SISO	2402	2DH5	1.81	≤30	Pass
		2441	2DH5	2.06	≤30	Pass
		2480	2DH5	1.59	≤30	Pass
8DPSK	SISO	2402	3DH5	1.77	≤30	Pass
		2441	3DH5	2.00	≤30	Pass
		2480	3DH5	1.50	≤30	Pass




DH5_Ant1_2402

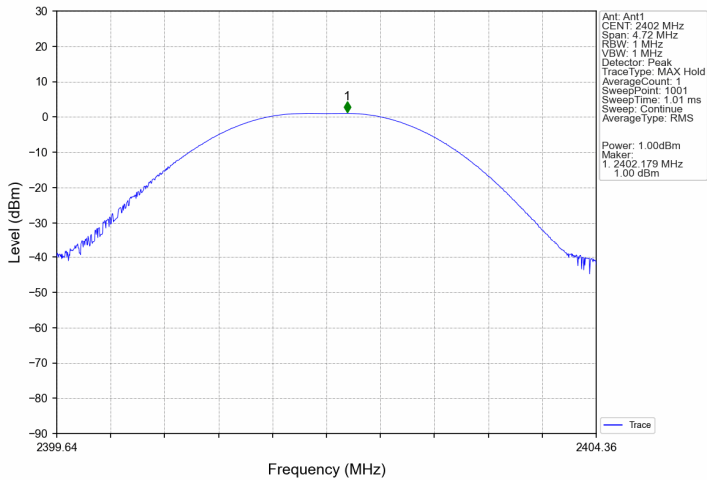



DH5_Ant1_2441

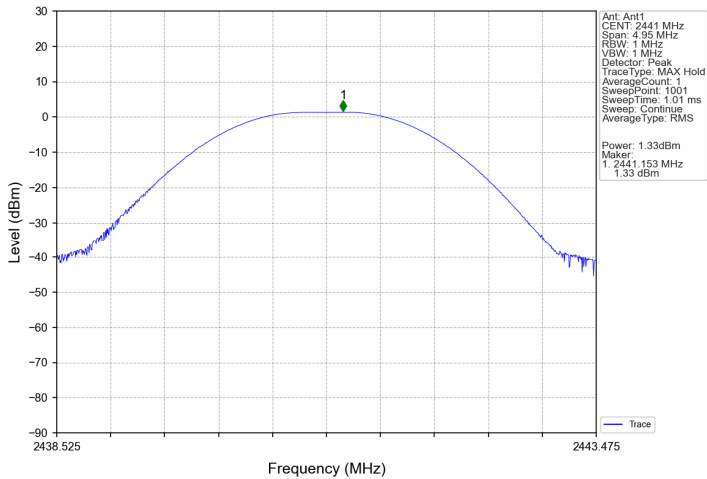

DH5_Ant1_2480

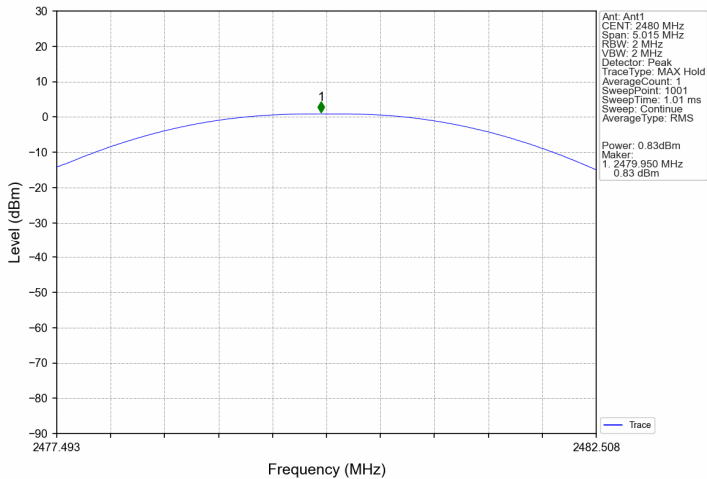

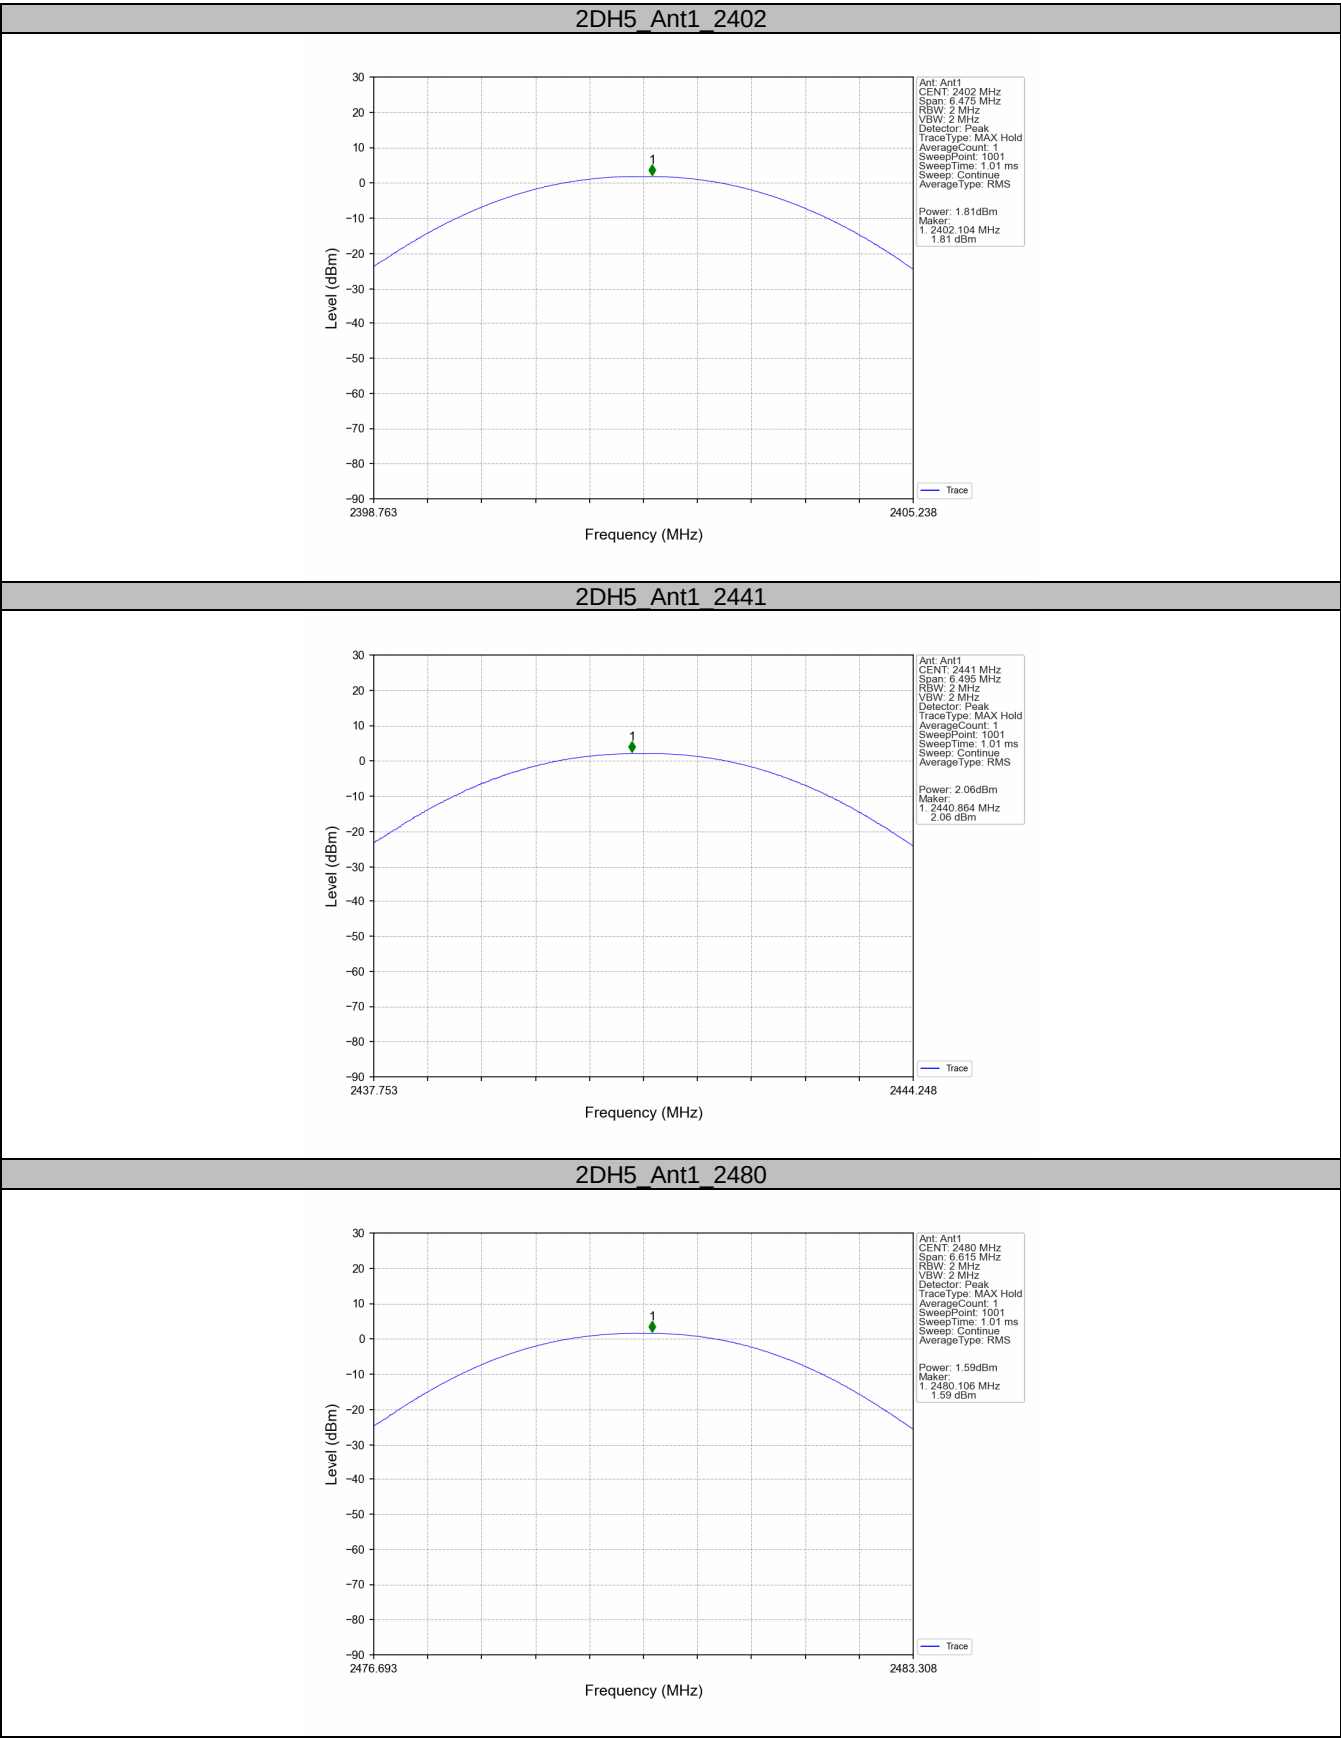

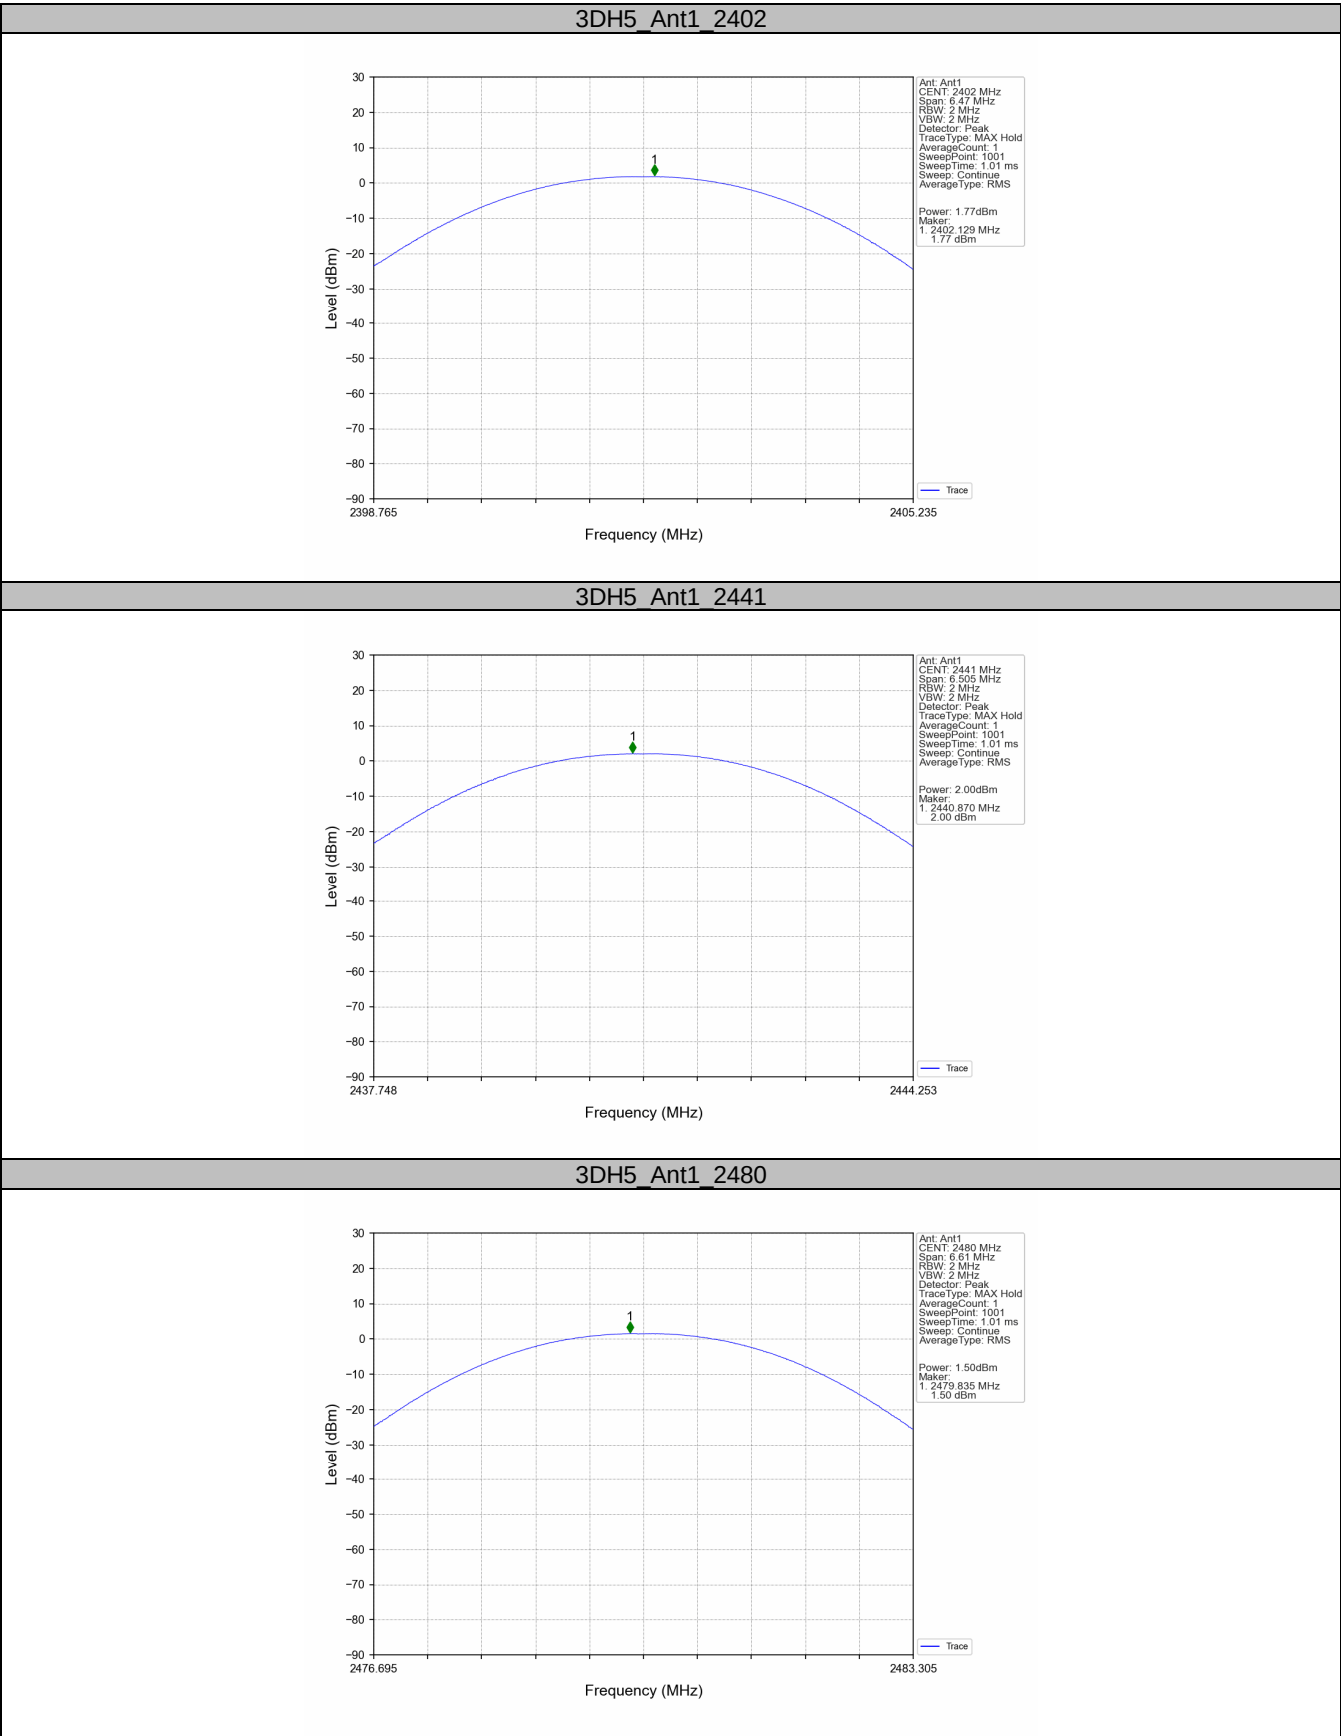

9.3 20 dB Bandwidth

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 1% to 5% of the 20 dB bandwidth/99% OBW, VBW $\geq$ 3RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Measure the frequency difference of two frequencies that were attenuated 20 dB/99% OBW from the reference level. Record the frequency difference as the emission bandwidth. Record the results.
5. Repeat above procedures until all frequencies measured were complete.

Limit


Limit [kHz]

N/A


Test result:

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.944	/	Pass
		2441	DH5	1	0.990	/	Pass
		2480	DH5	1	1.003	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.295	/	Pass
		2441	2DH5	1	1.299	/	Pass
		2480	2DH5	1	1.323	/	Pass
8DPSK	SISO	2402	3DH5	1	1.294	/	Pass
		2441	3DH5	1	1.301	/	Pass
		2480	3DH5	1	1.322	/	Pass


DH5_Ant1_2402

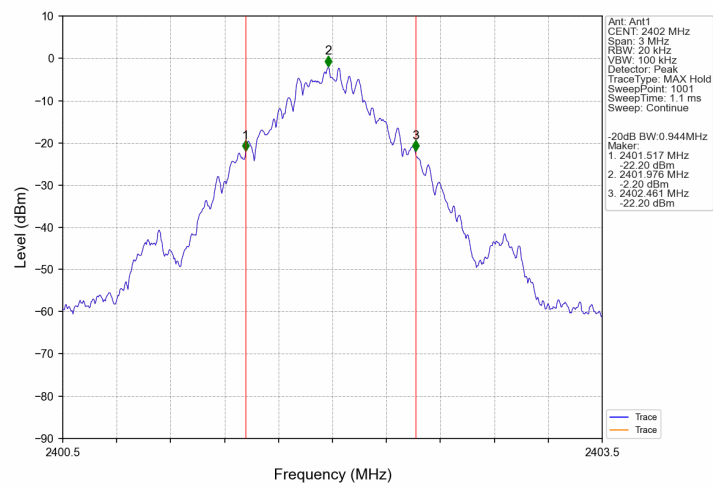



DH5_Ant1_2441

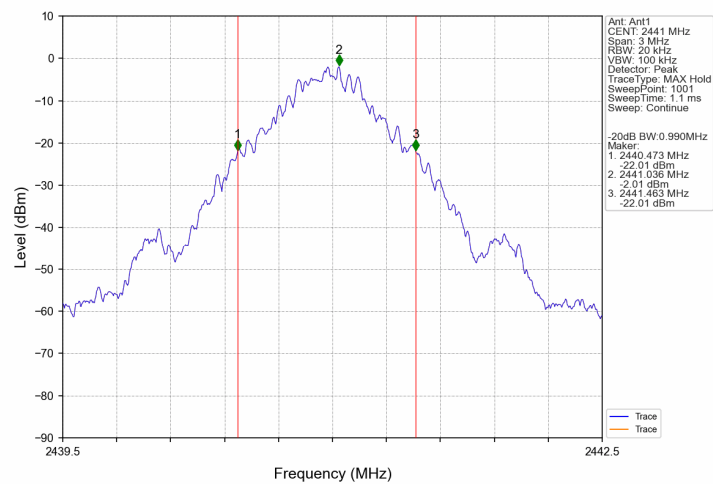

DH5_Ant1_2480

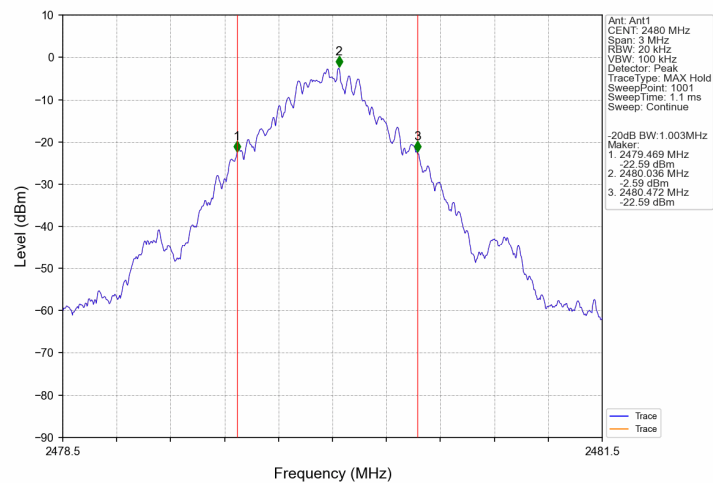

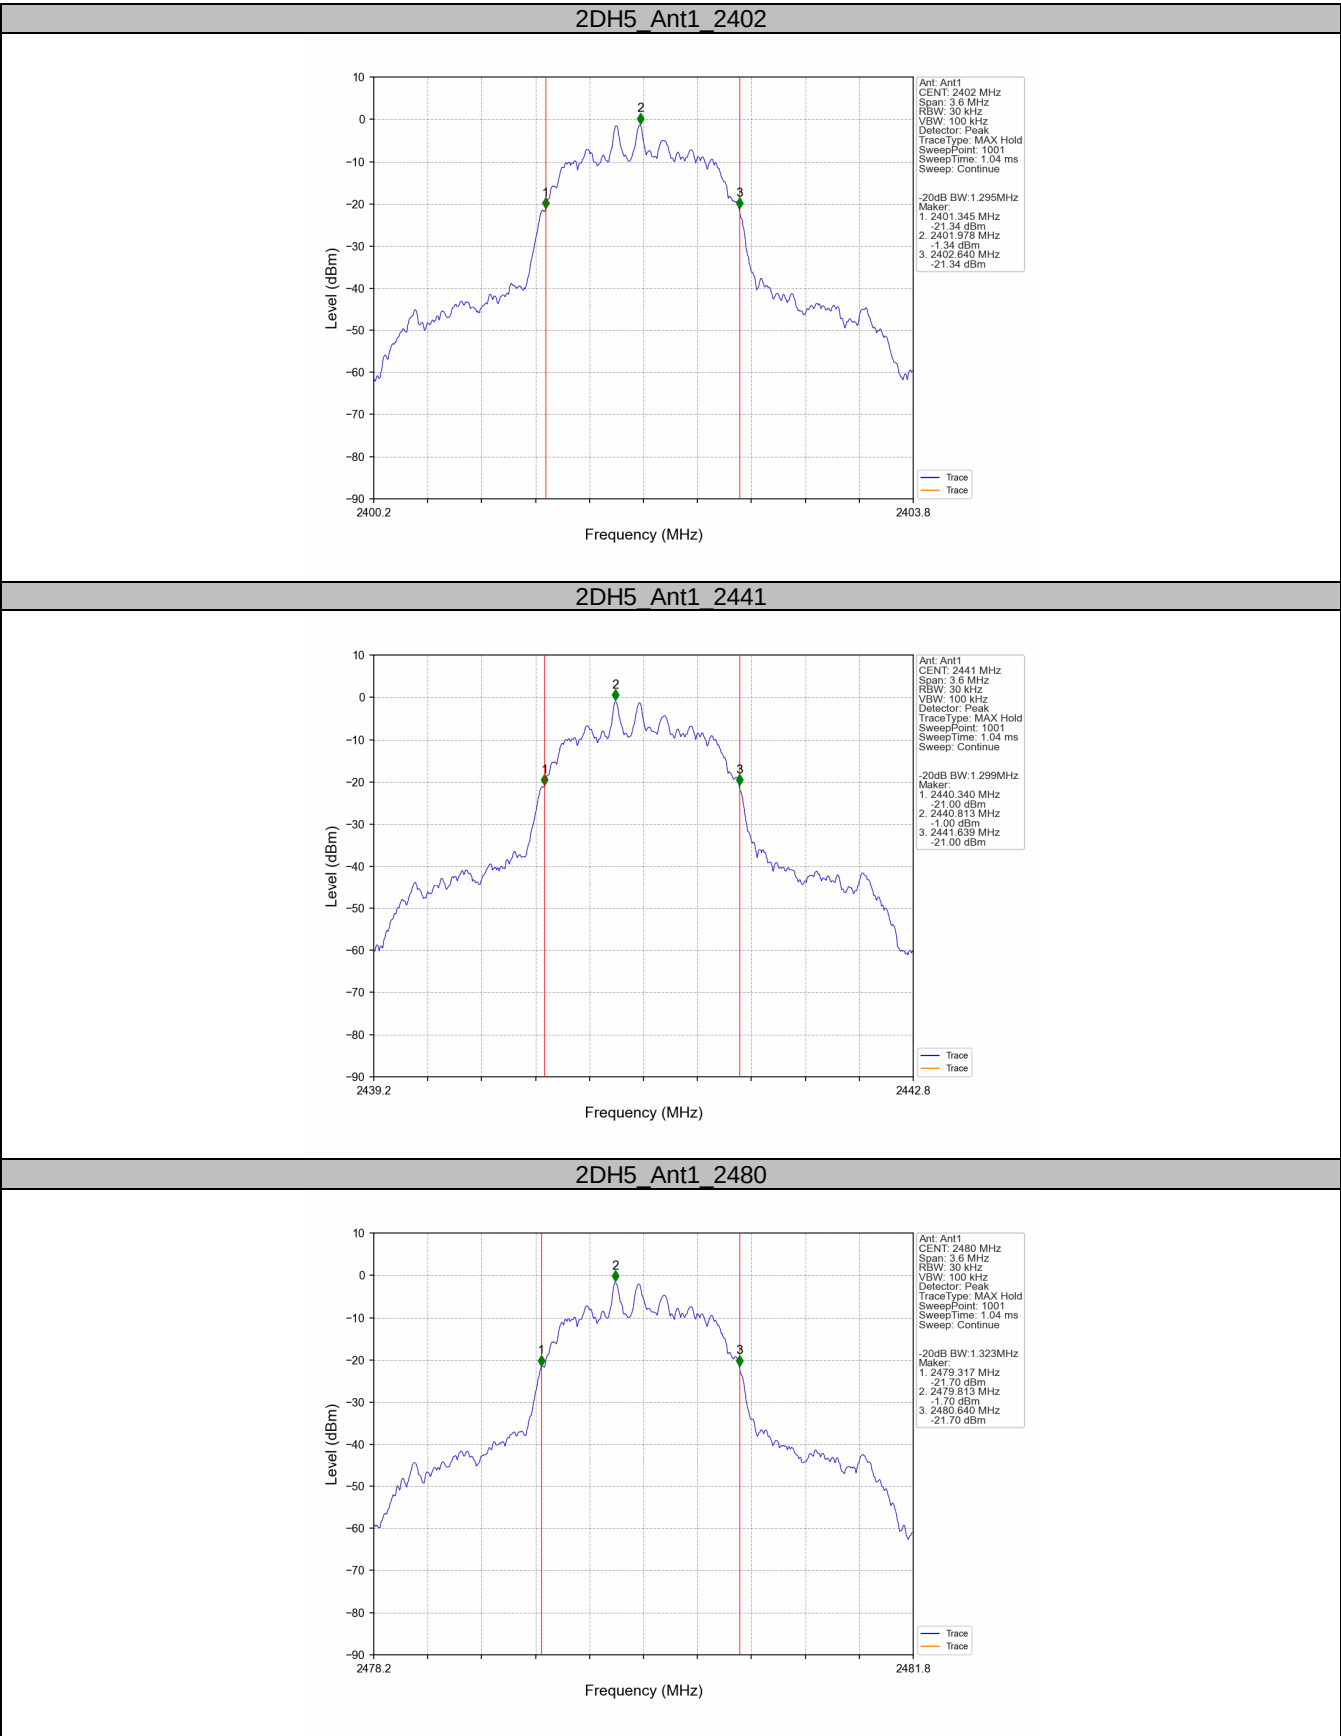

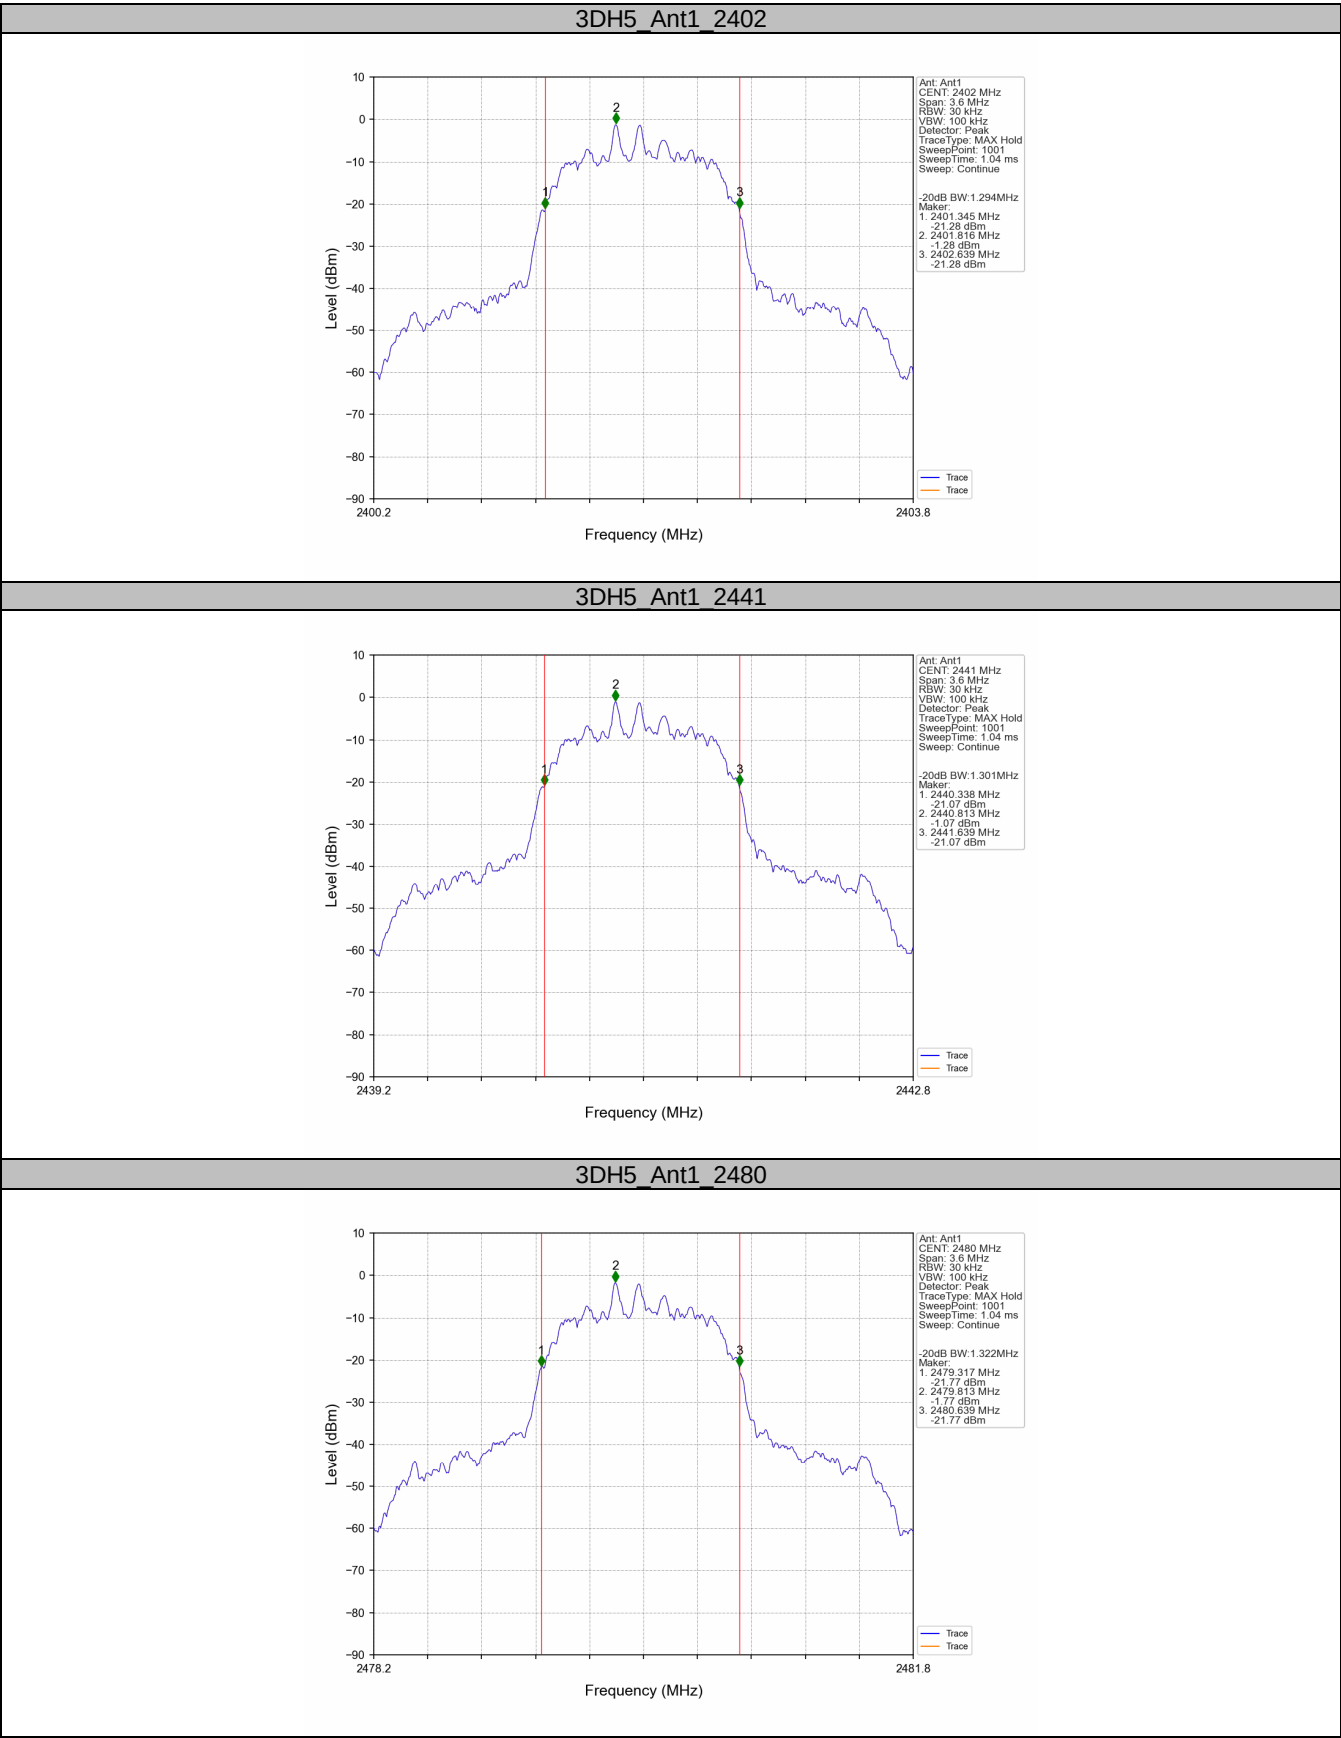

9.4 Carrier Frequency Separation

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit to hopping mode.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. VBW $\geq$ RBW, Sweep = auto, Detector function = peak.
4. By using the Max-Hold function record the separation of two adjacent channels.
5. Measure the frequency difference of these two adjacent channels by spectrum analyzer marker function. Record the results.
6. Repeat above procedures until all frequencies measured were complete.

Limit


Limit
kHz

$\geq 25\text{kHz}$ or 2/3 of the 20 dB bandwidth which is greater

Test result:

Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	1.003	≥ 0.669	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.323	≥ 0.882	Pass
8DPSK	SISO	HOPP	3DH5	1.006	1.322	≥ 0.881	Pass

- The measurement was performed with the typical configuration (normal hopping status).

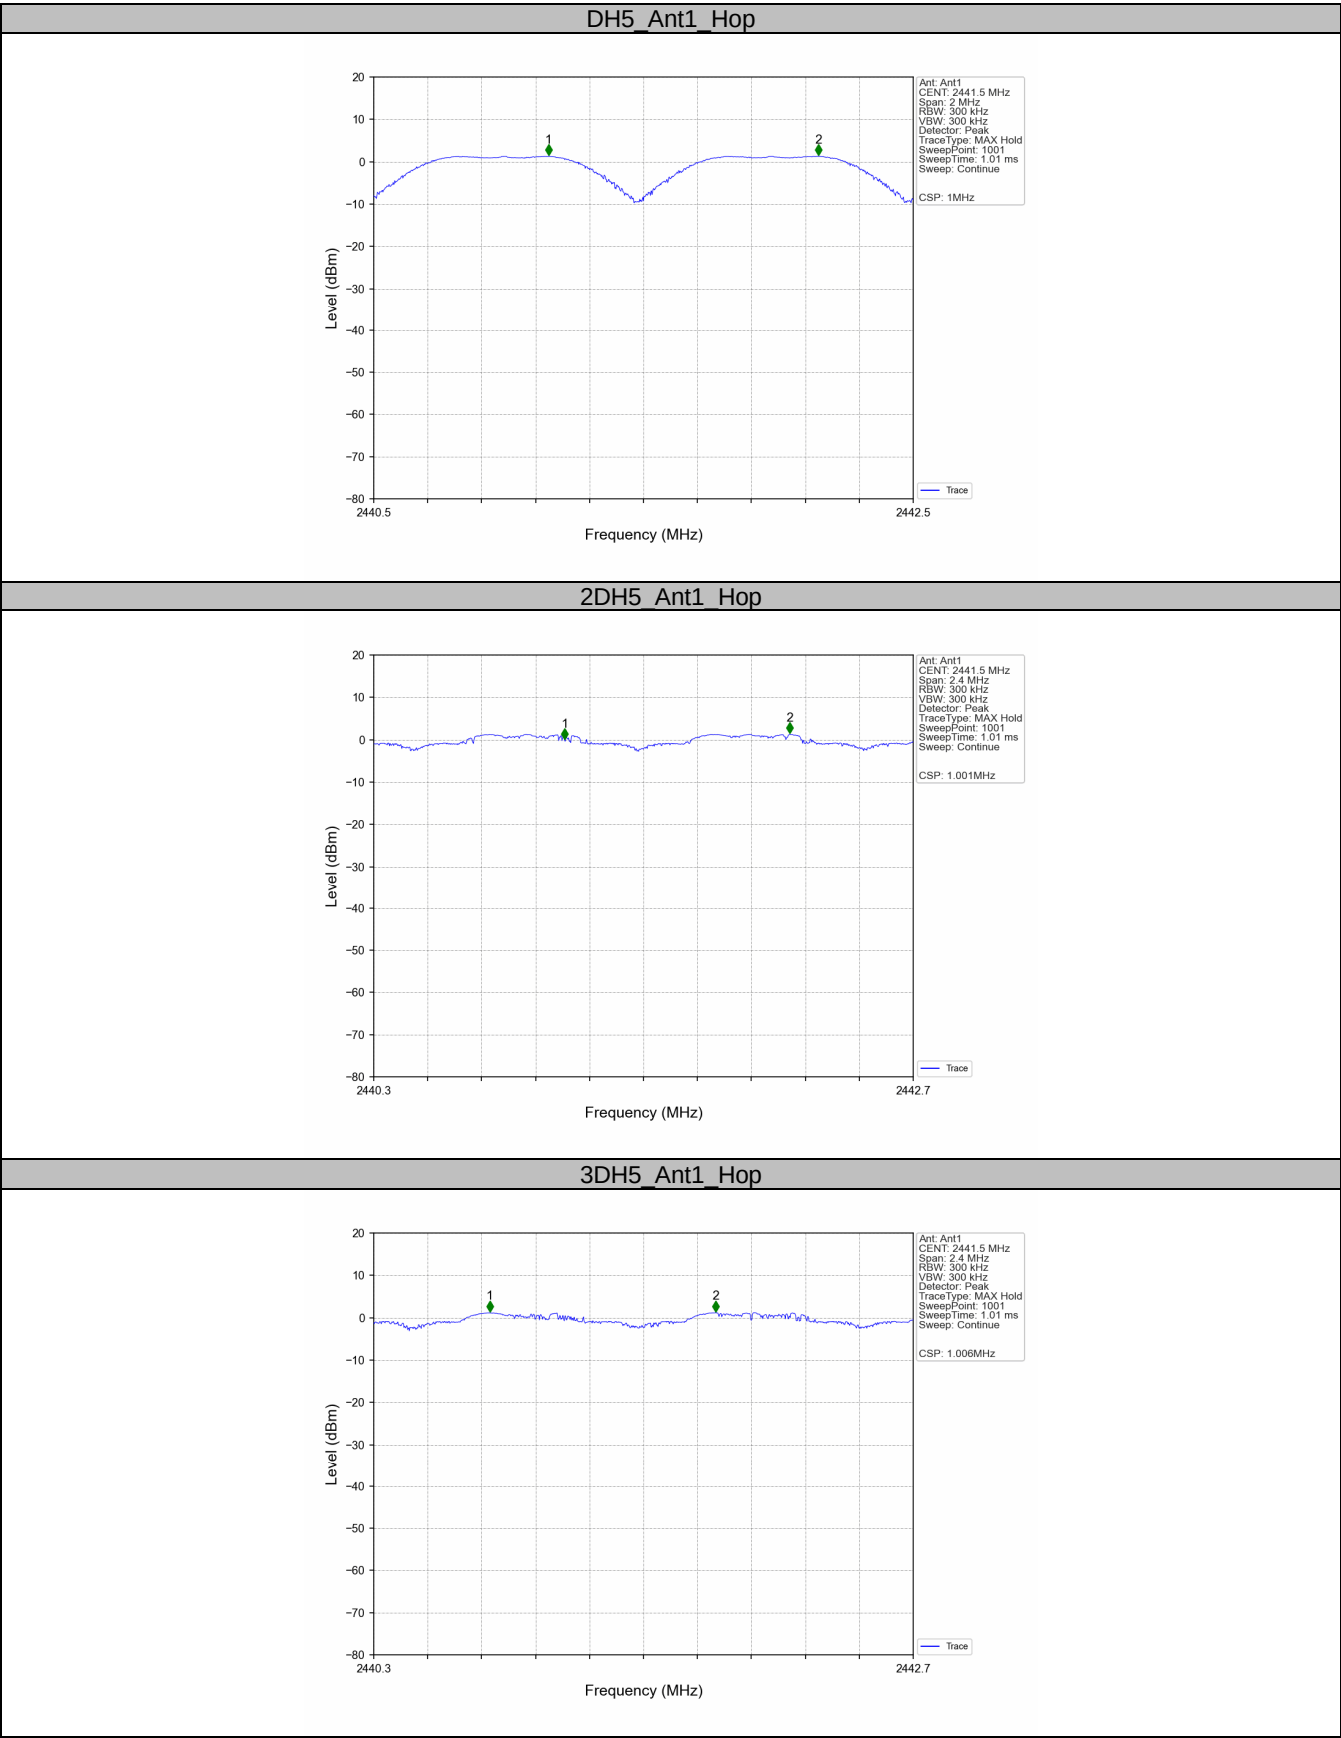

9.5 Number of Hopping Frequencies

Test Method


1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit to hopping mode.
3. Use the following spectrum analyzer settings:
Span = the frequency band of operation, RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace=Max hold.
4. Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

Limit

$$\frac{\text{Limit number}}{\geq 15}$$

Test result:

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass

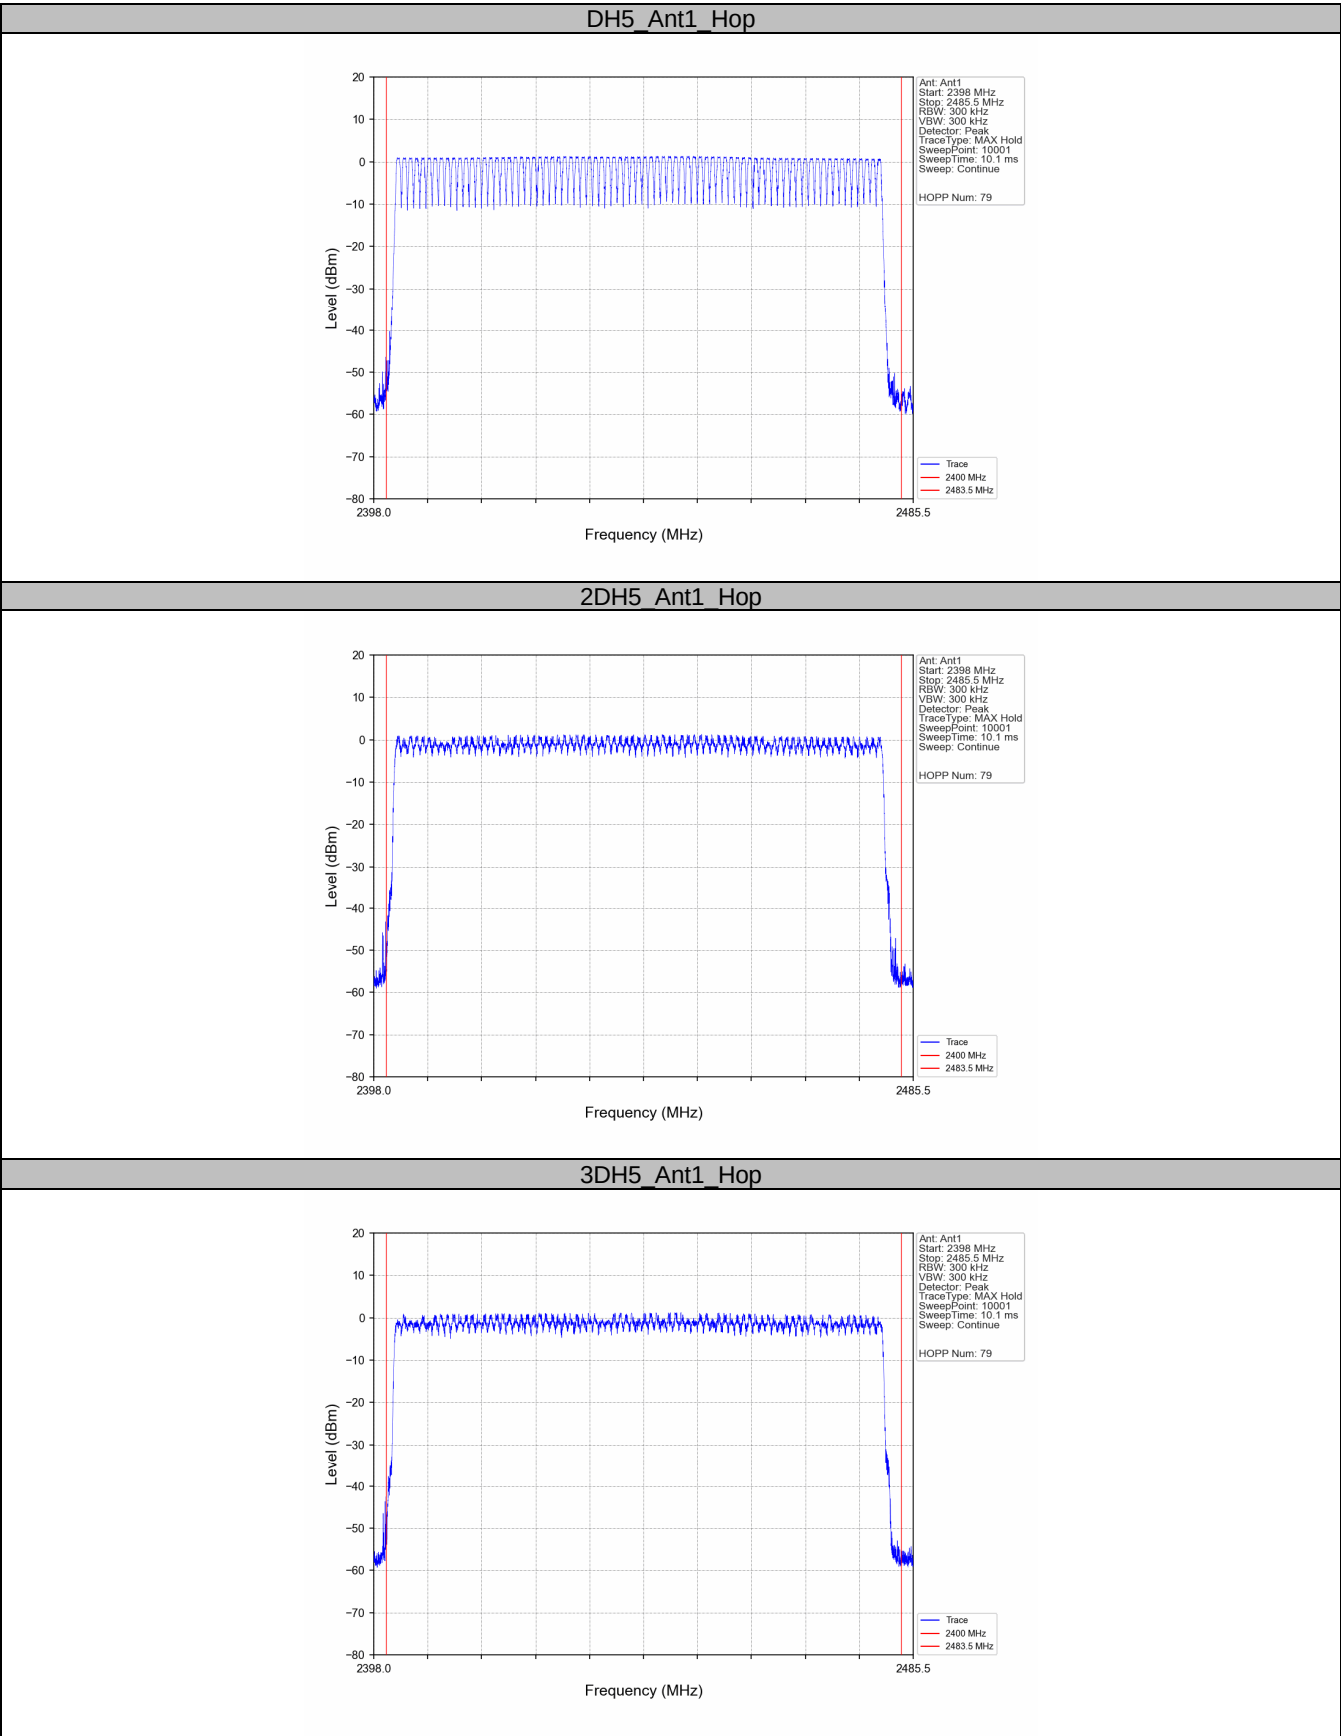

9.6 Dwell Time

Test Method


1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit to hopping mode.
3. Span: Zero span, centered on a hopping channel.
4. RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
5. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
6. Detector function: Peak.
7. Trace: Max hold. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.


Limit


The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


Test result:


Mode	Tx Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.390	31.600	320	124.800	≤ 400	Pass
			DH3	1.646	31.600	158	260.068	≤ 400	Pass
			DH5	2.896	31.600	103	298.288	≤ 400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.400	31.600	320	128.000	≤ 400	Pass
			2DH3	1.648	31.600	160	263.680	≤ 400	Pass
			2DH5	2.894	31.600	98	283.612	≤ 400	Pass
8DPSK	SISO	HOPP	3DH1	0.394	31.600	318	125.292	≤ 400	Pass
			3DH3	1.646	31.600	167	274.882	≤ 400	Pass
			3DH5	2.896	31.600	112	324.352	≤ 400	Pass

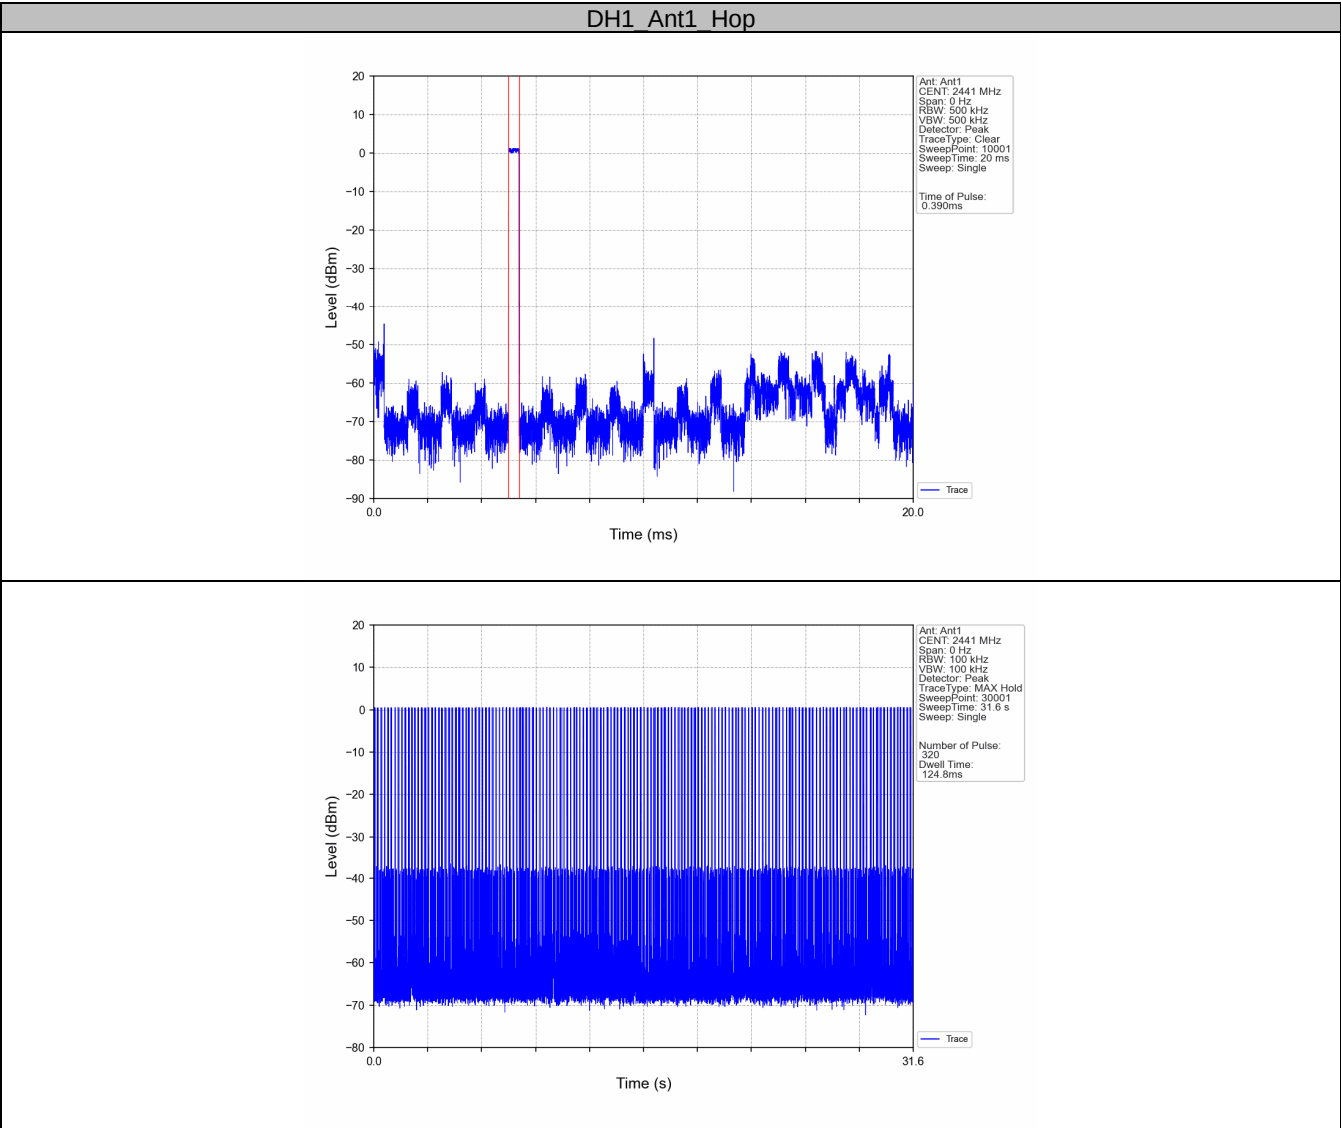


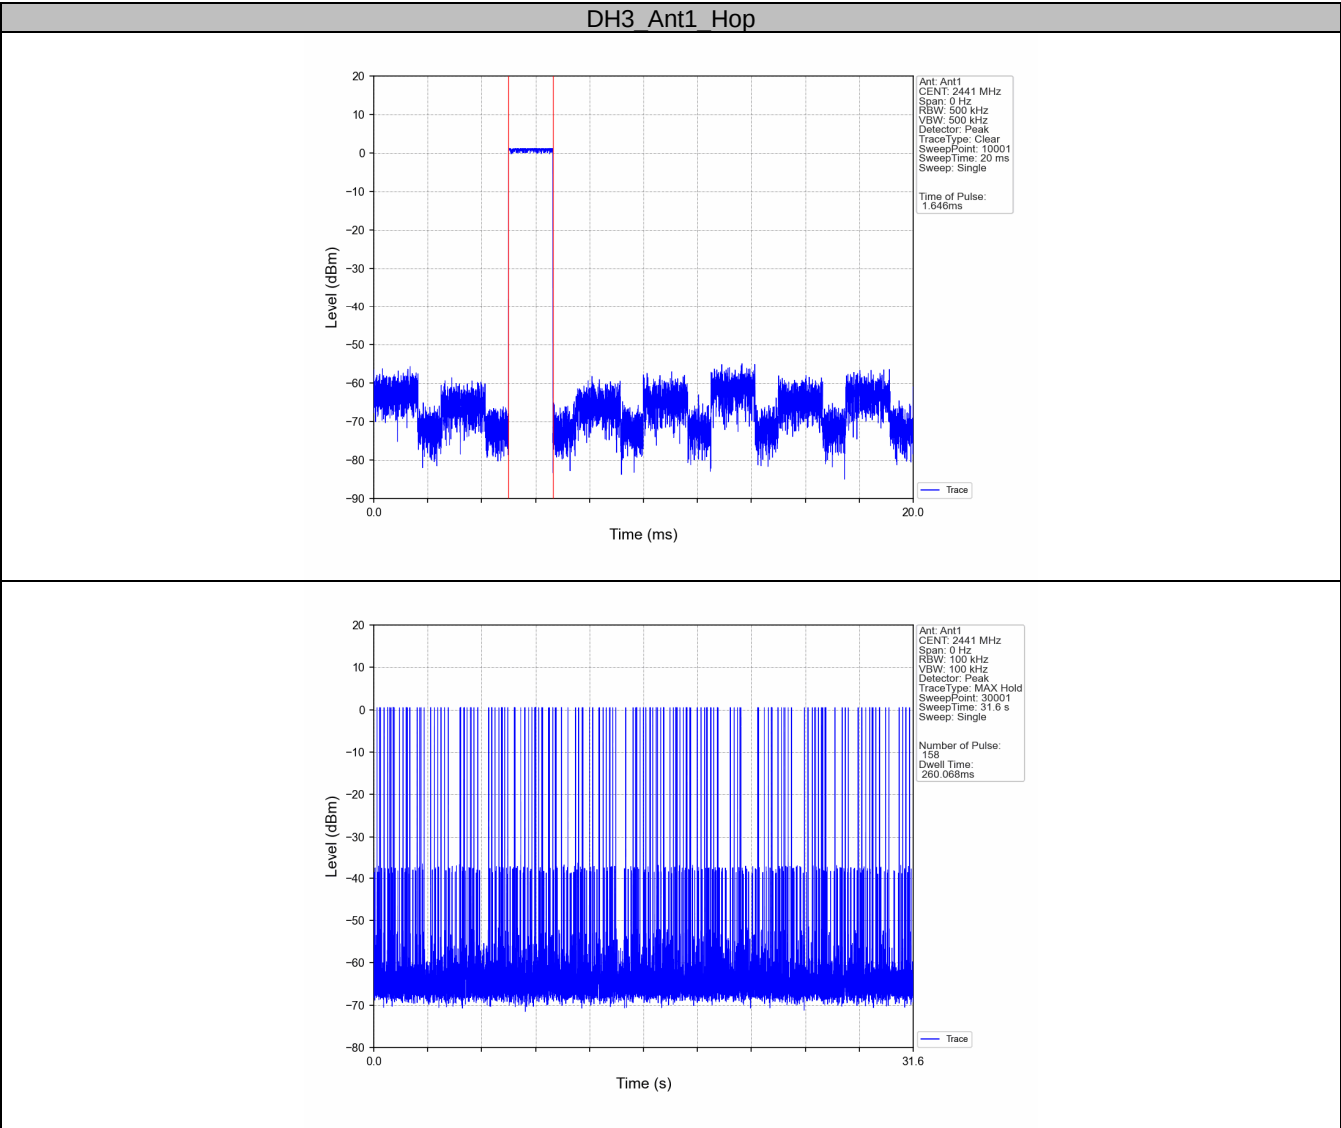


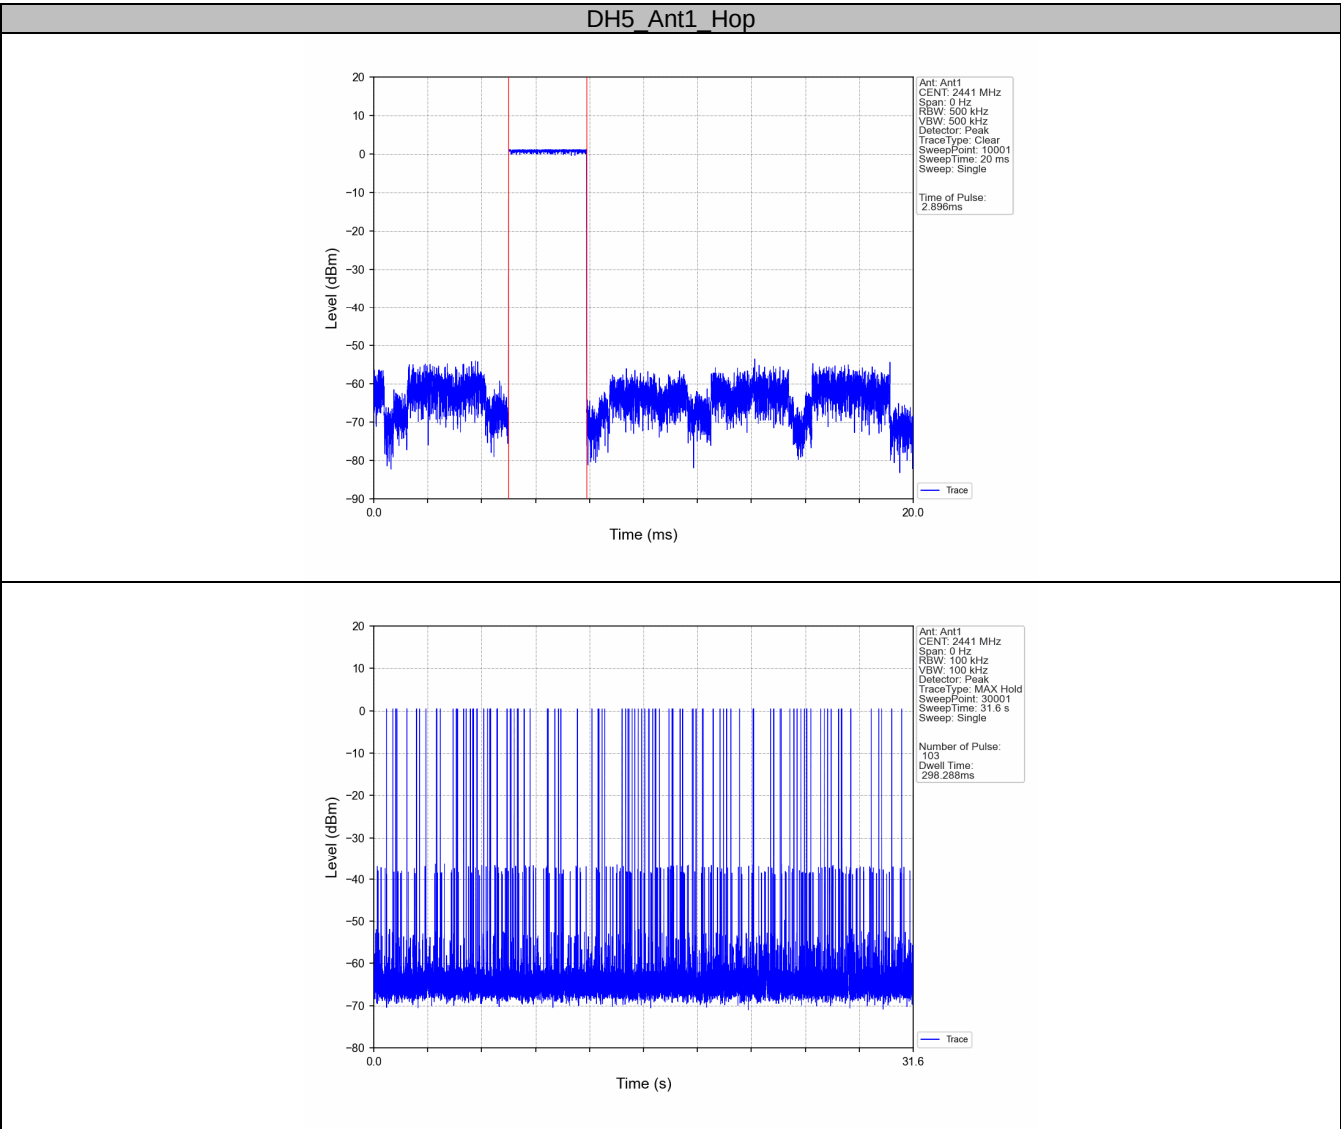


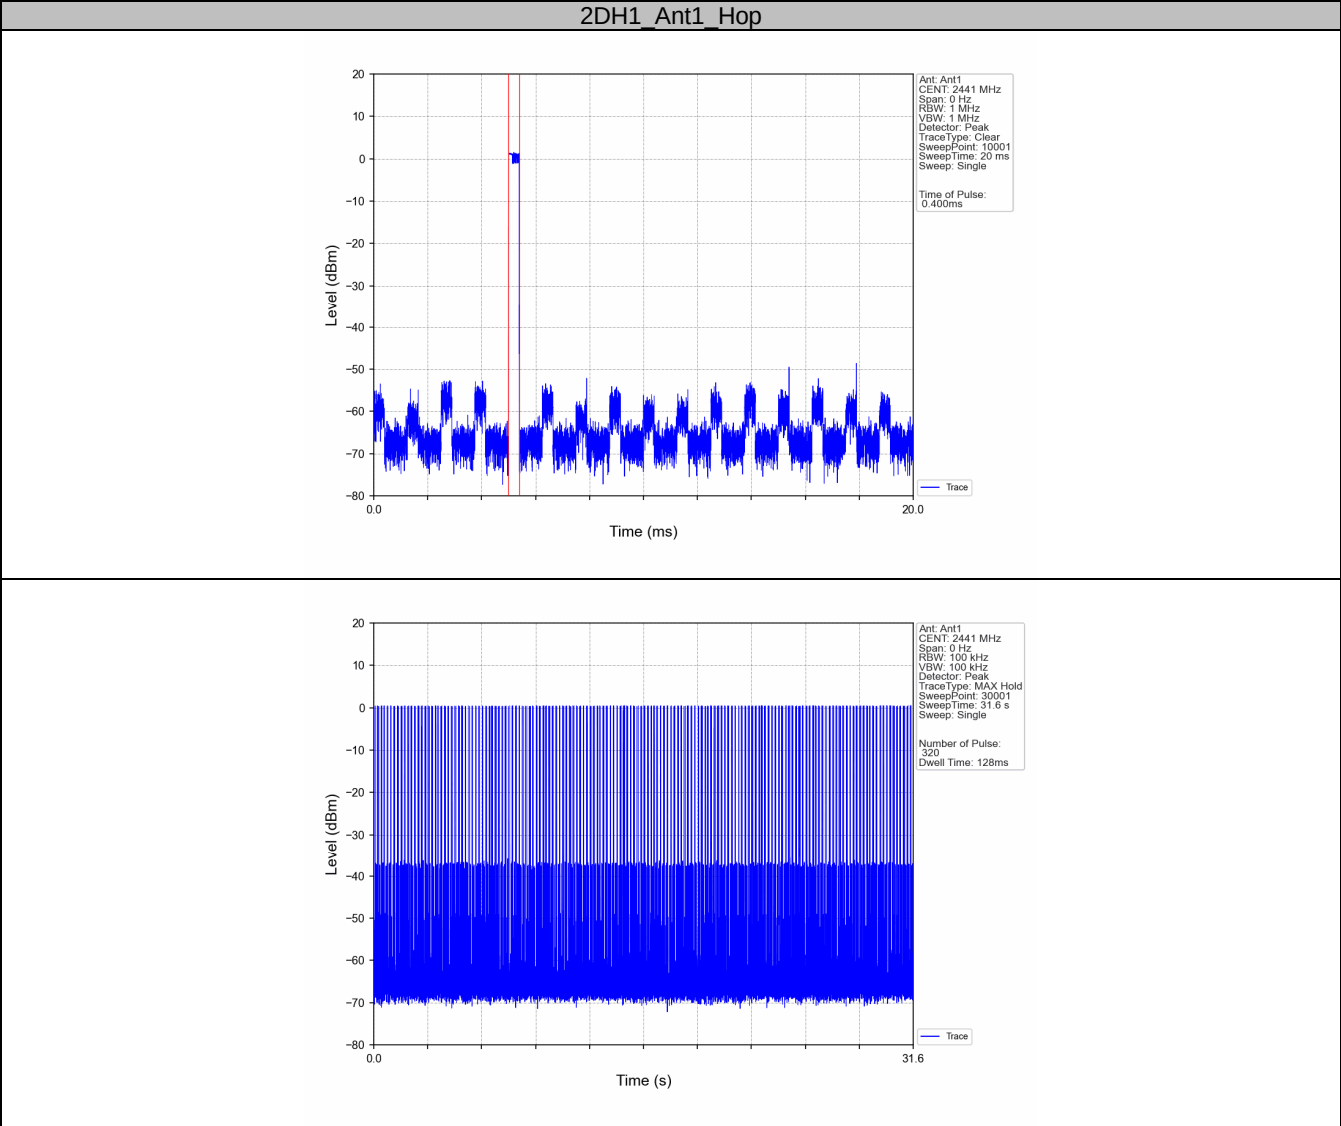


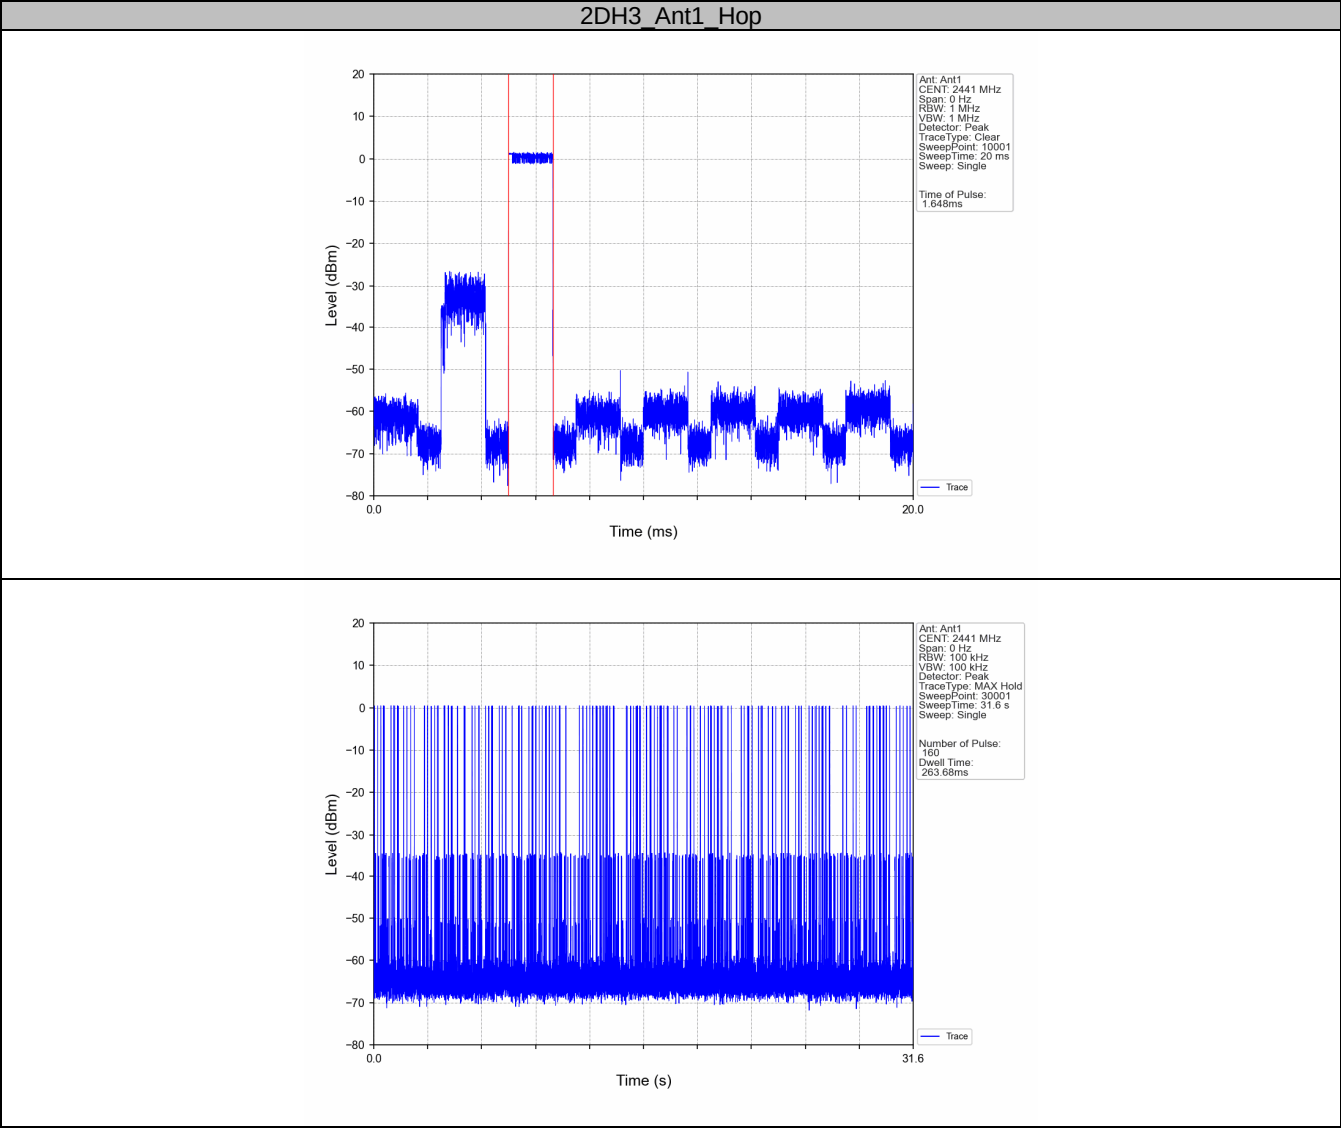

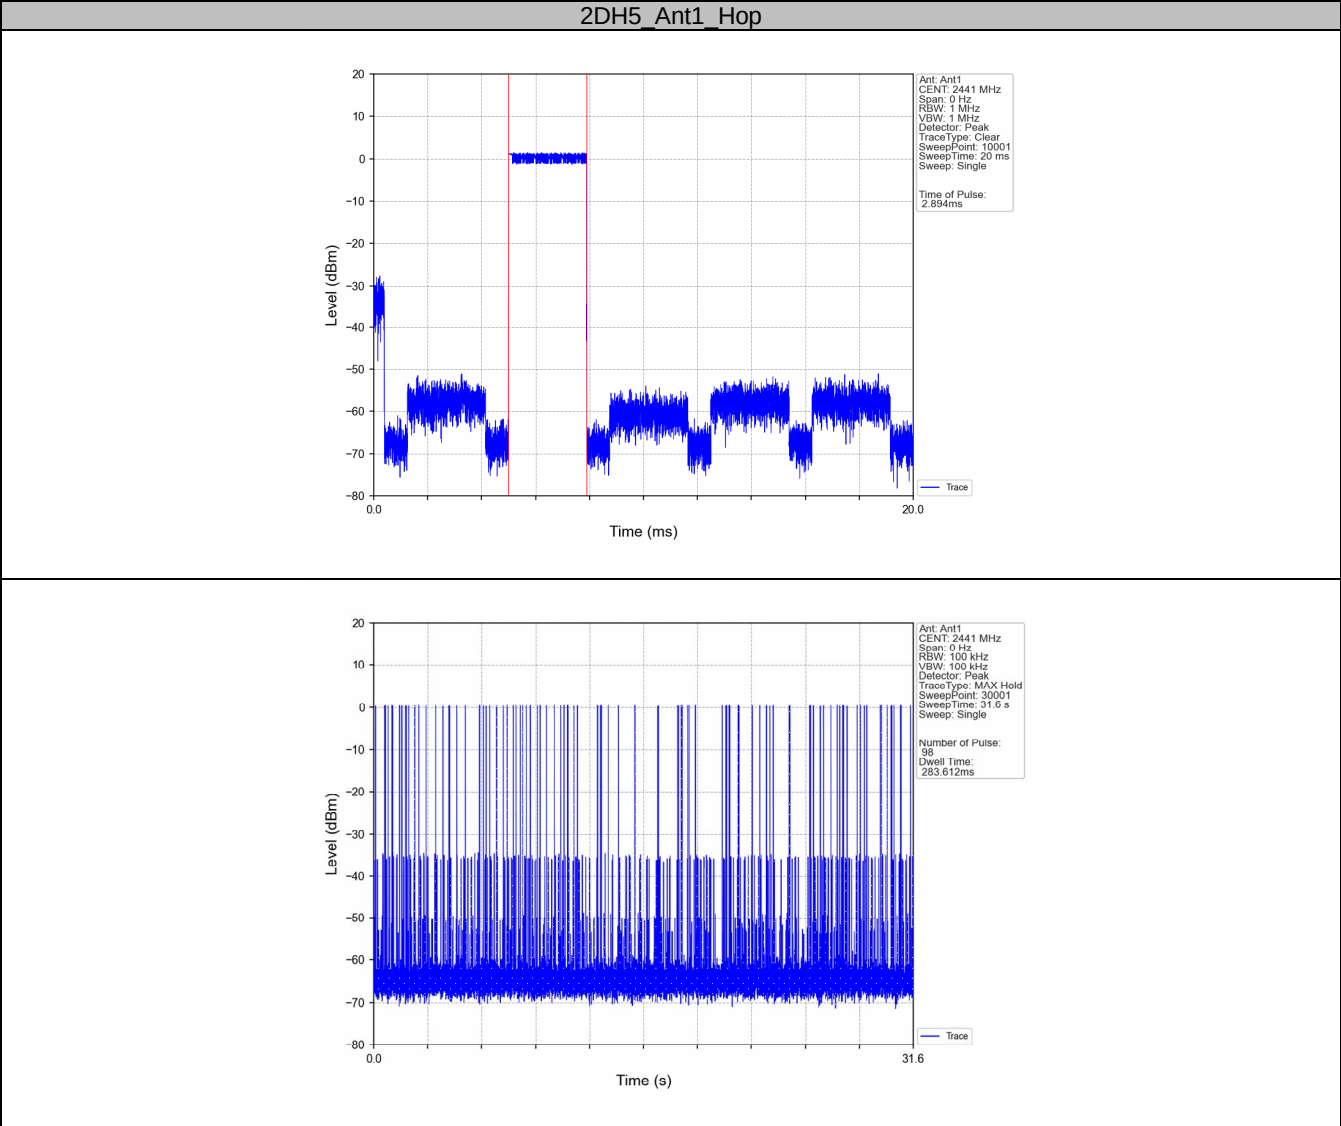

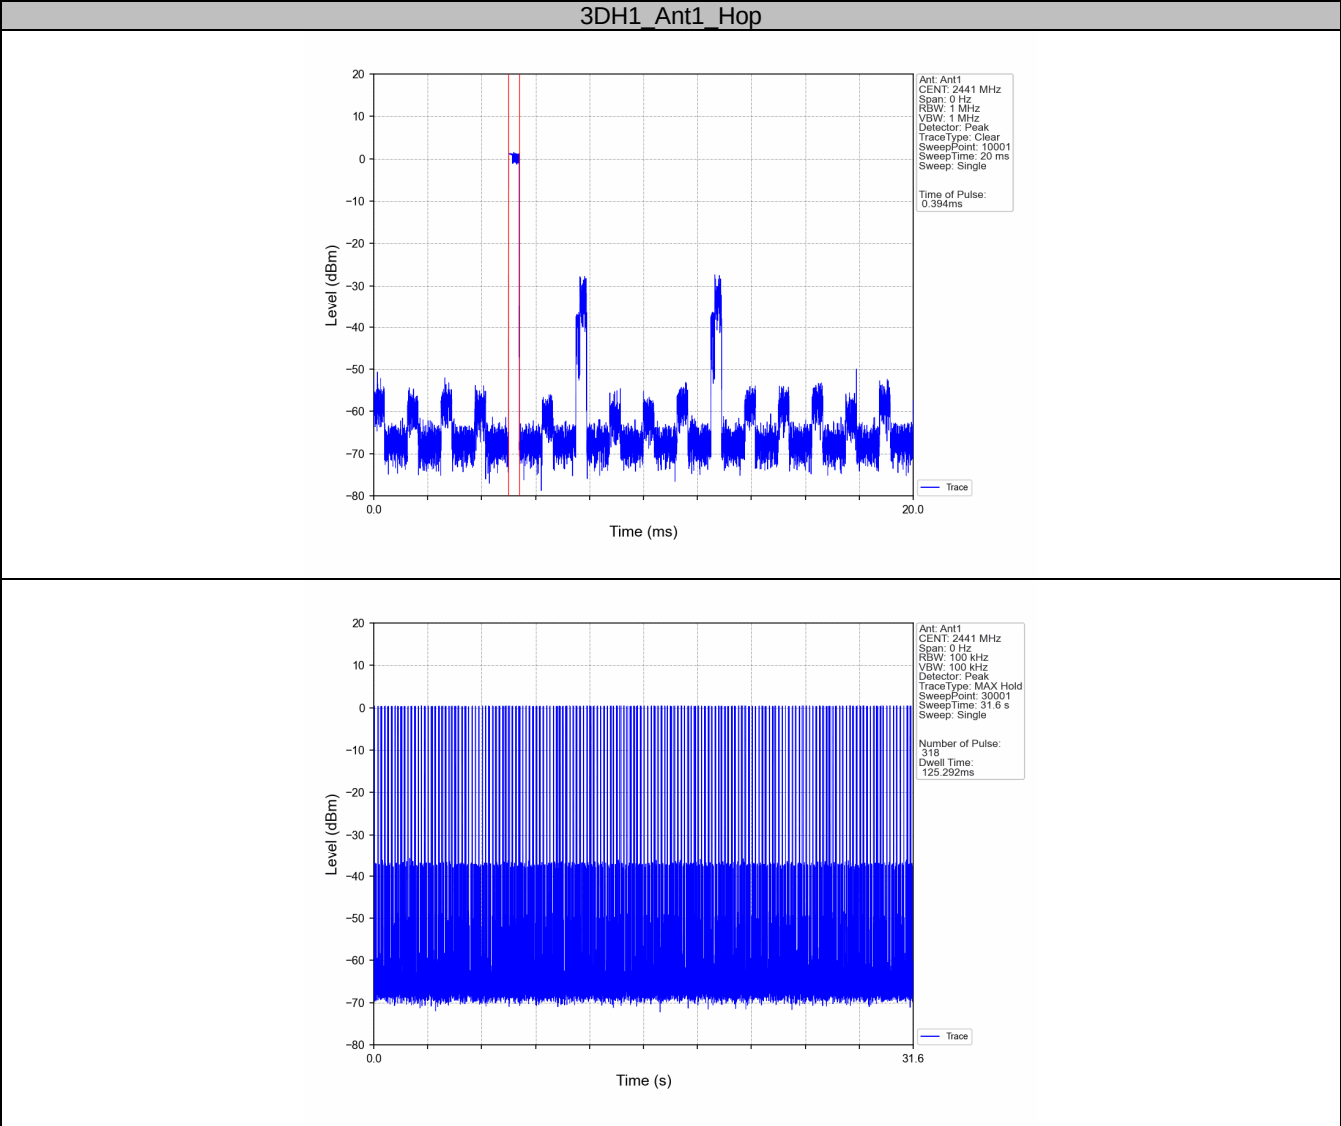

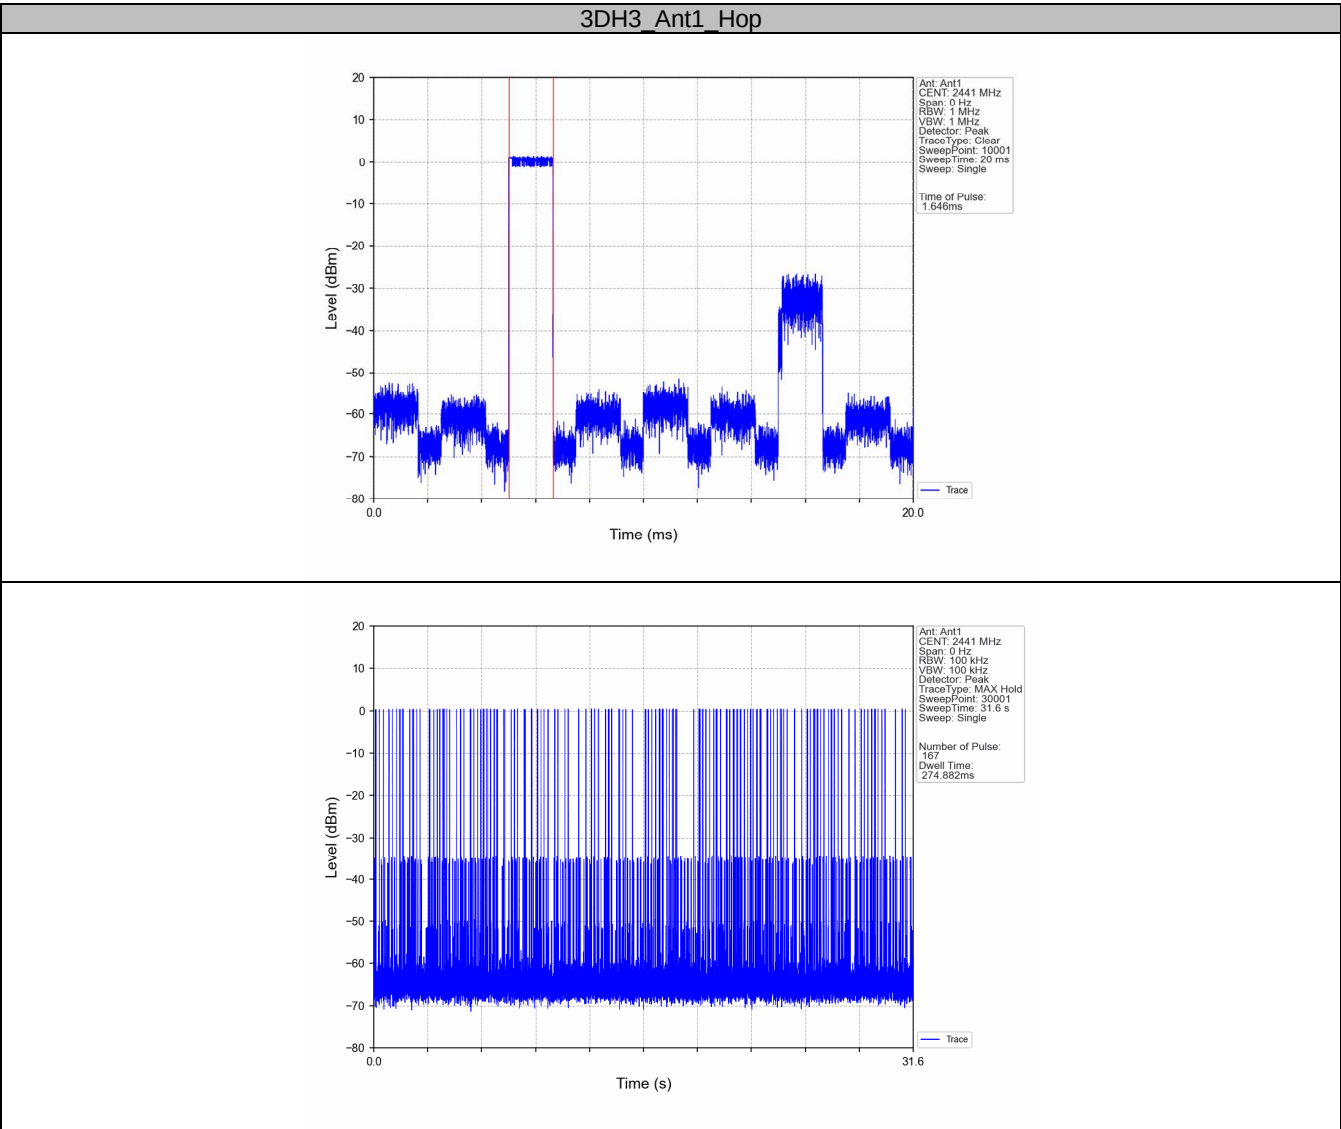

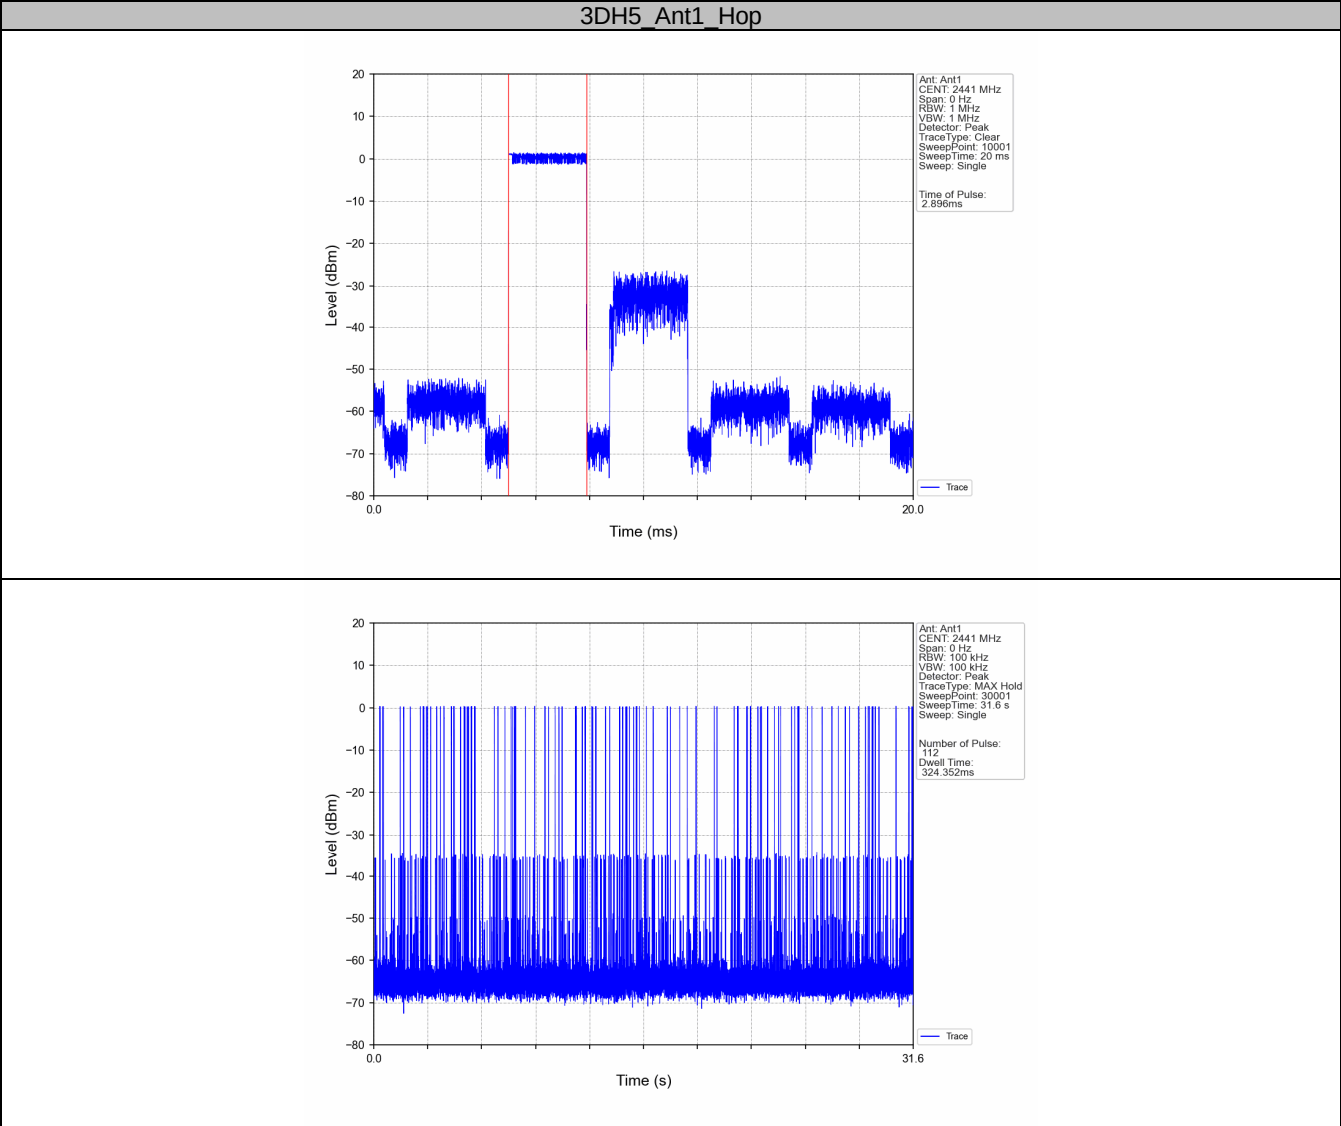

9.7 Spurious RF Conducted Emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector, Sweep = auto, Span = wide enough to capture the peak level of the in-band emission and all spurious emissions, Trace = max hold. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency

Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20

Test result:

Reference level:

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	0.86
		2441	DH5	1	1.16
		2480	DH5	1	0.63
		HOPP	DH5	1	1.15
					1.15
Pi/4DQPSK	SISO	2402	2DH5	1	0.91
		2441	2DH5	1	1.17
		2480	2DH5	1	0.63
		HOPP	2DH5	1	1.25
					1.25
8DPSK	SISO	2402	3DH5	1	0.85
		2441	3DH5	1	1.10
		2480	3DH5	1	0.55
		HOPP	3DH5	1	1.15
					1.15

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


Conducted spurious emissions:

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	0.86	-19.14	Pass
		2441	DH5	1	1.16	-18.84	Pass
		2480	DH5	1	0.63	-19.37	Pass
		HOPP	DH5	1	1.15	-18.85	Pass
					1.15	-18.85	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	0.91	-19.09	Pass
		2441	2DH5	1	1.17	-18.83	Pass
		2480	2DH5	1	0.63	-19.37	Pass
		HOPP	2DH5	1	1.25	-18.75	Pass
					1.25	-18.75	Pass
8DPSK	SISO	2402	3DH5	1	0.85	-19.15	Pass
		2441	3DH5	1	1.10	-18.90	Pass
		2480	3DH5	1	0.55	-19.45	Pass
		HOPP	3DH5	1	1.15	-18.85	Pass
					1.15	-18.85	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.




Reference level:

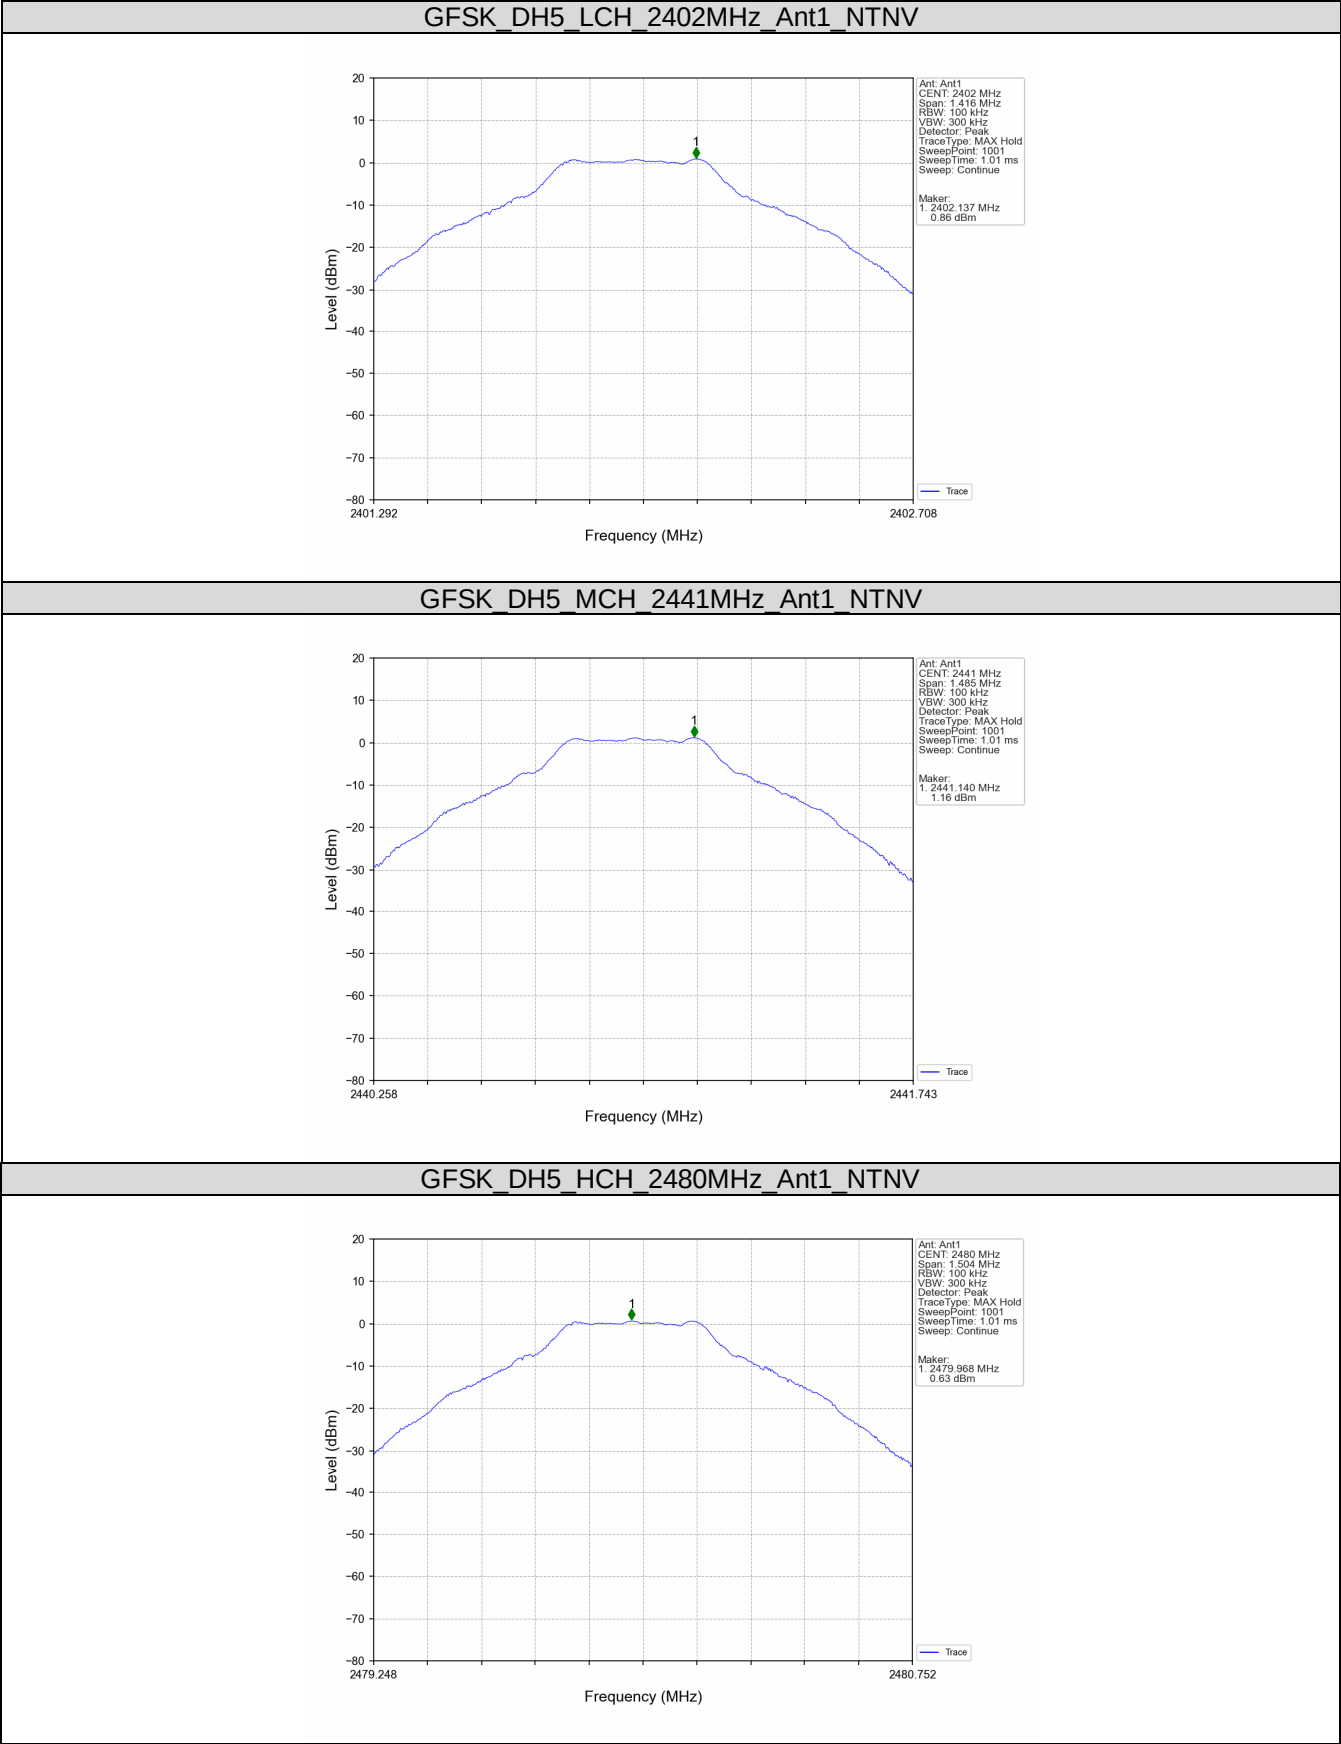




Reference level:

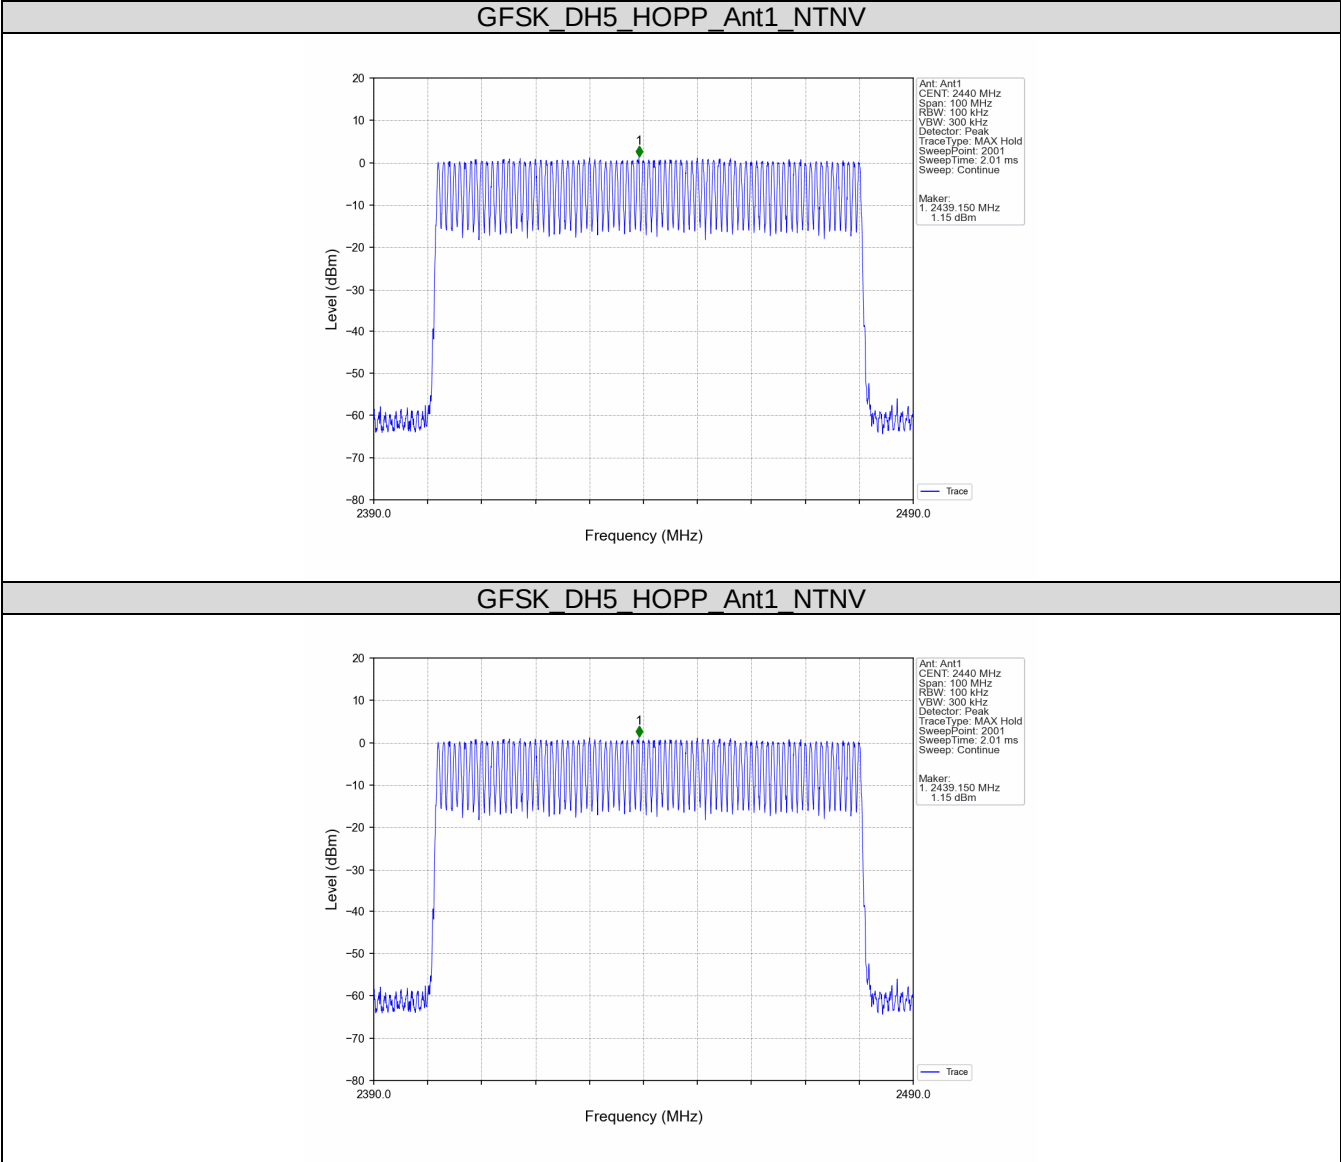




Reference level:

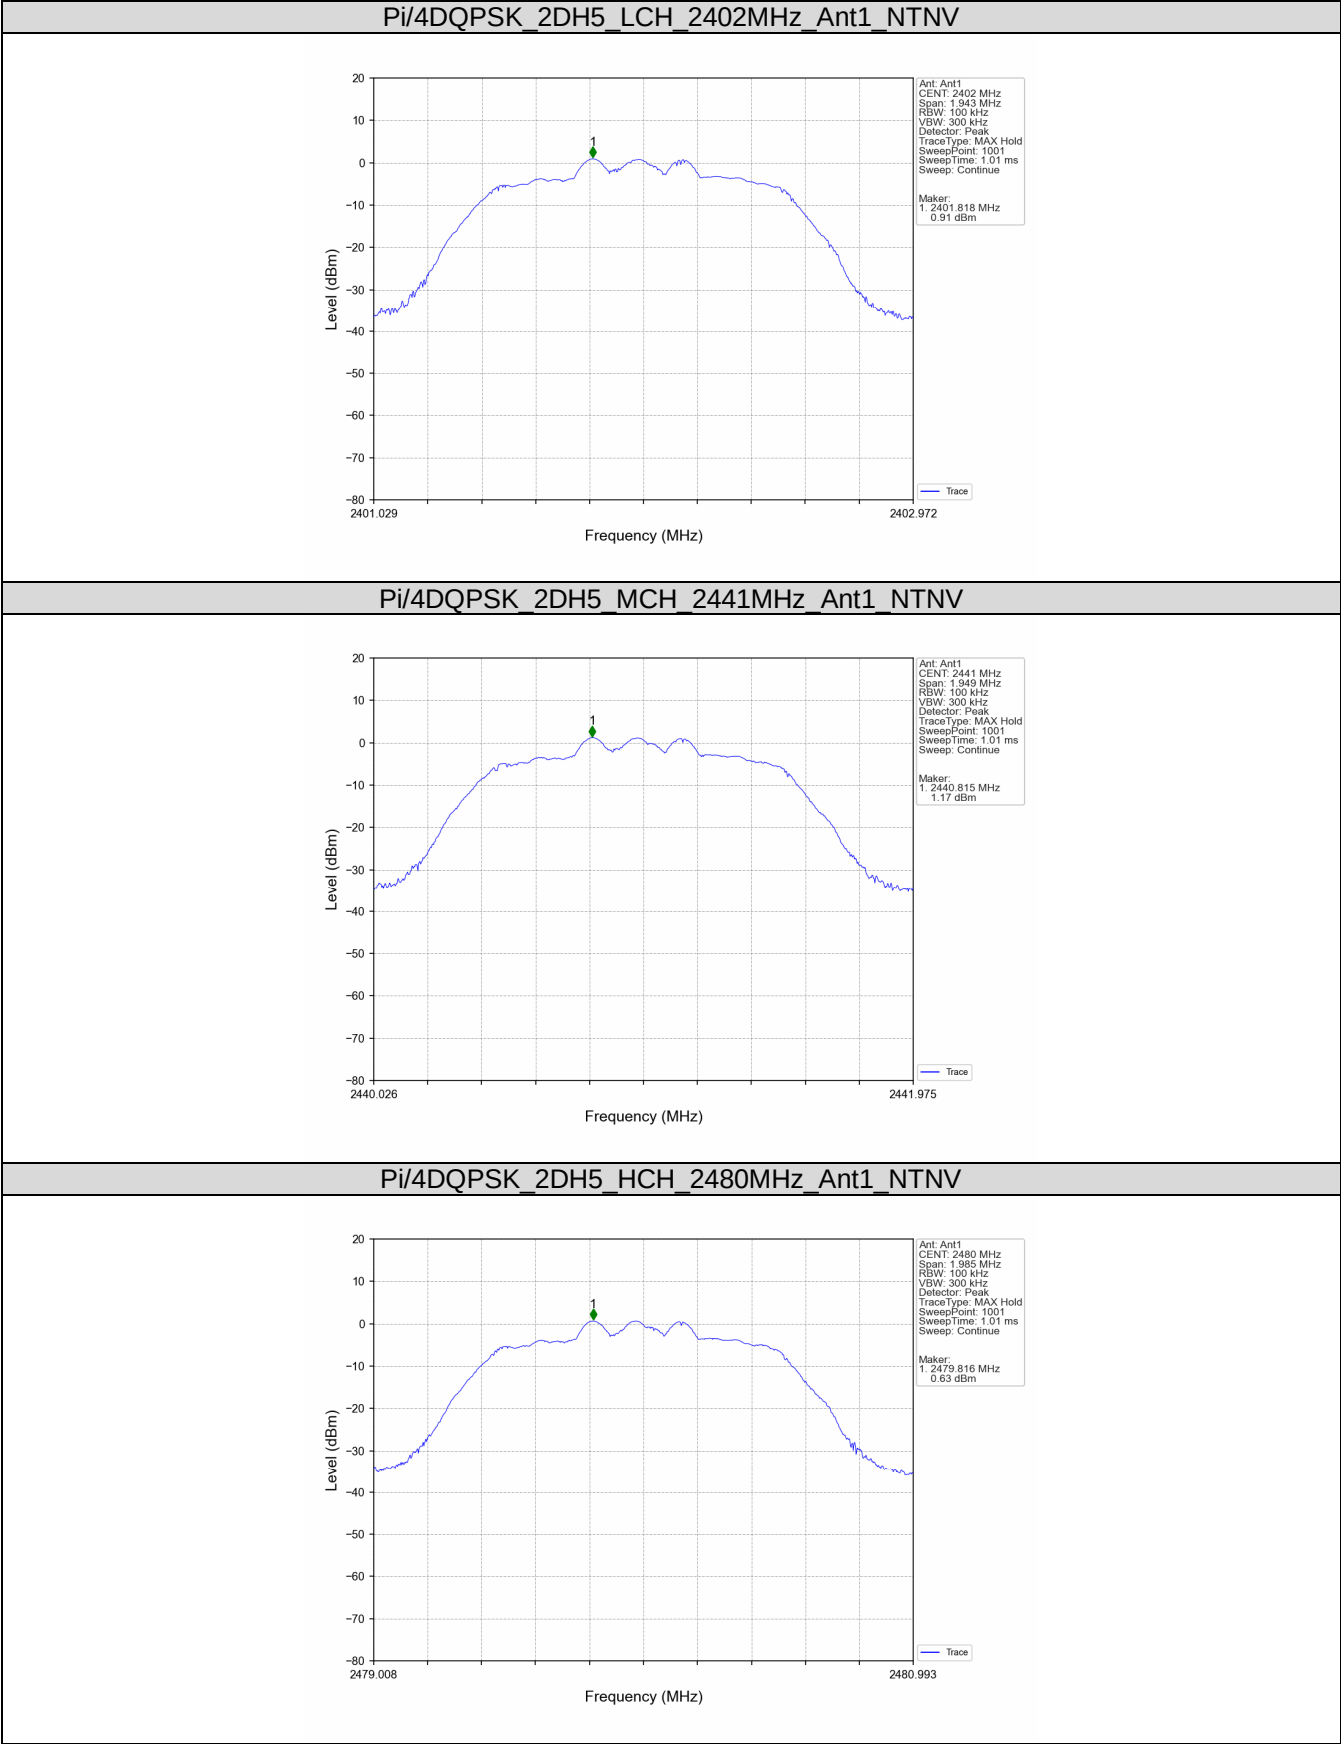




Reference level:

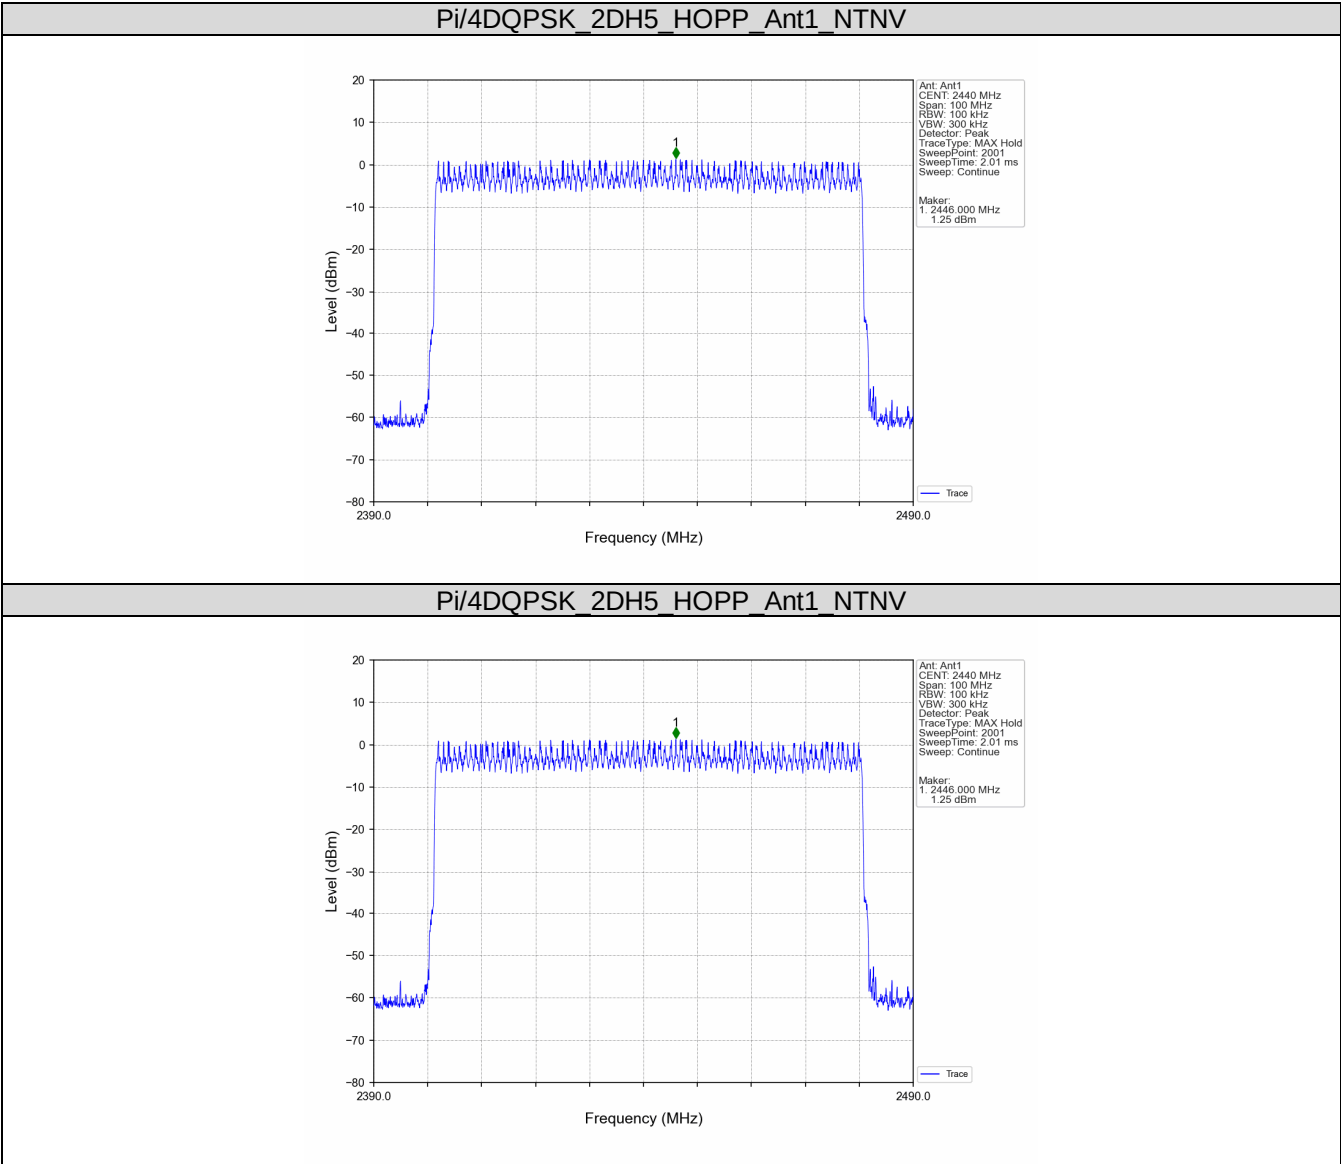




Reference level:

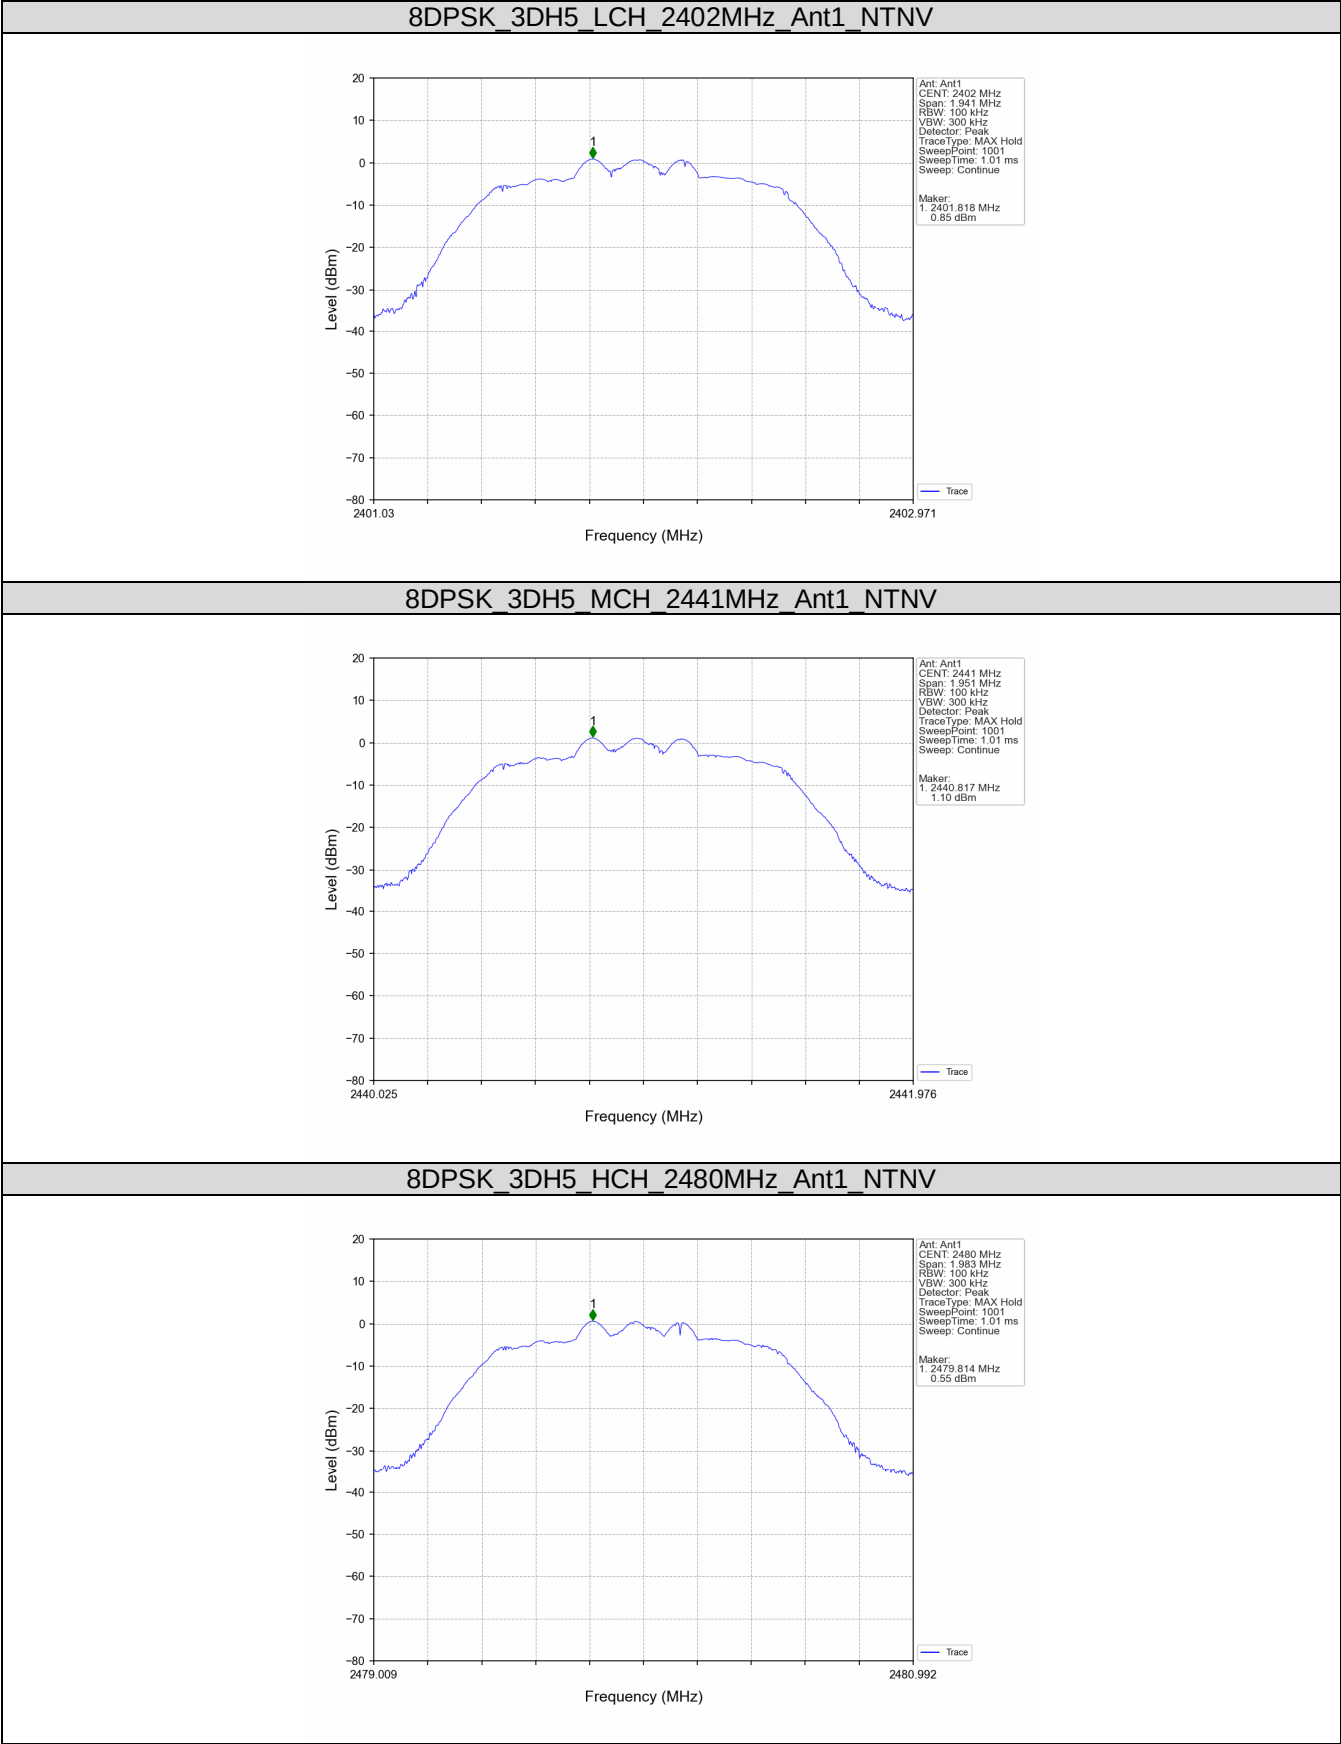




Reference level:

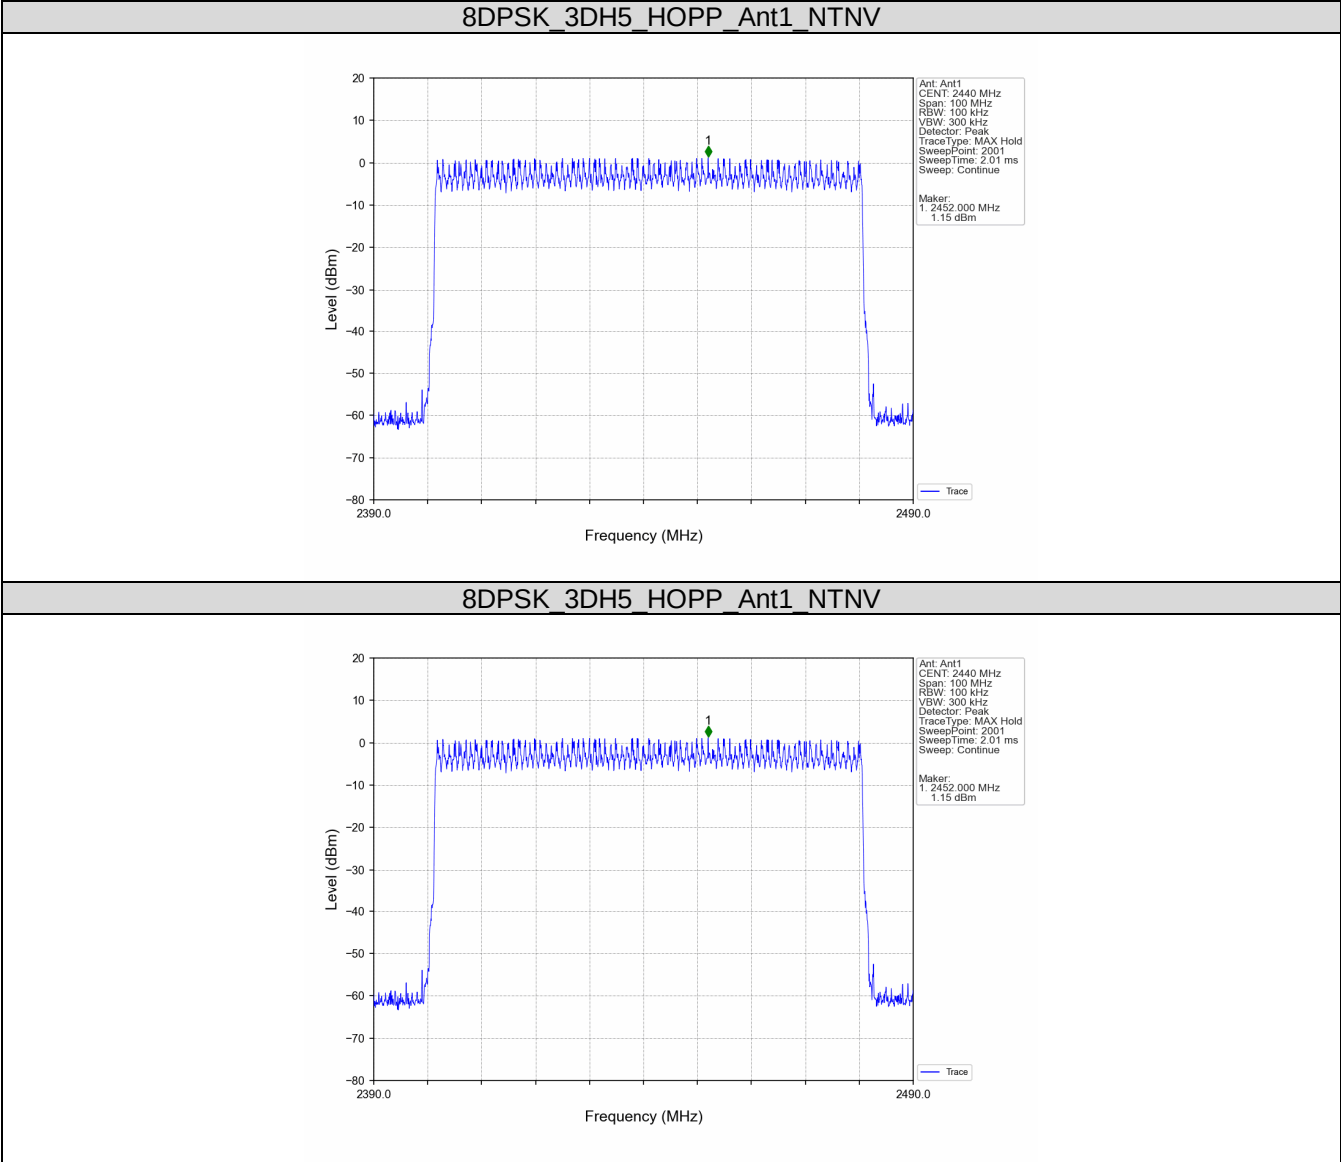




Conducted spurious emissions:

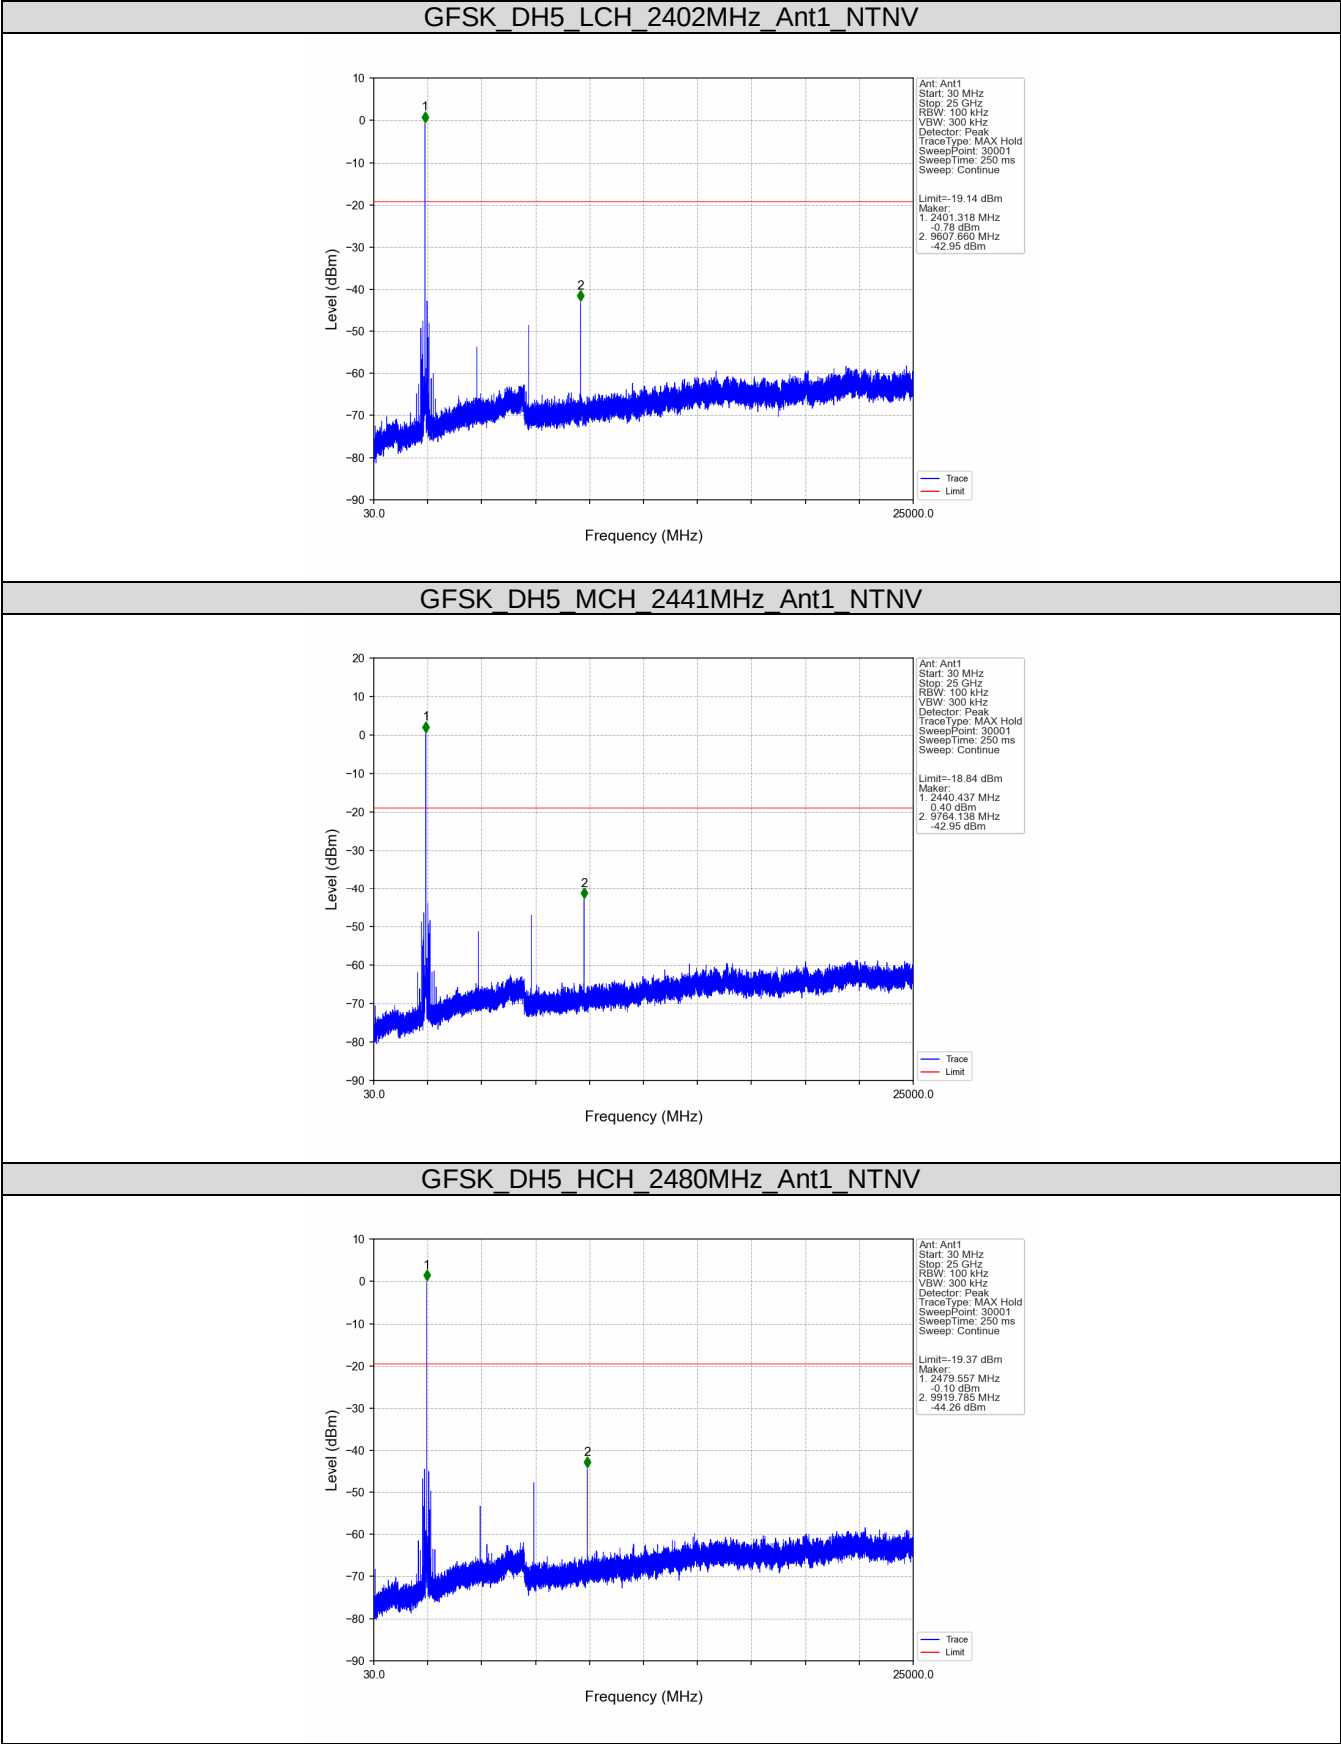




Conducted spurious emissions:

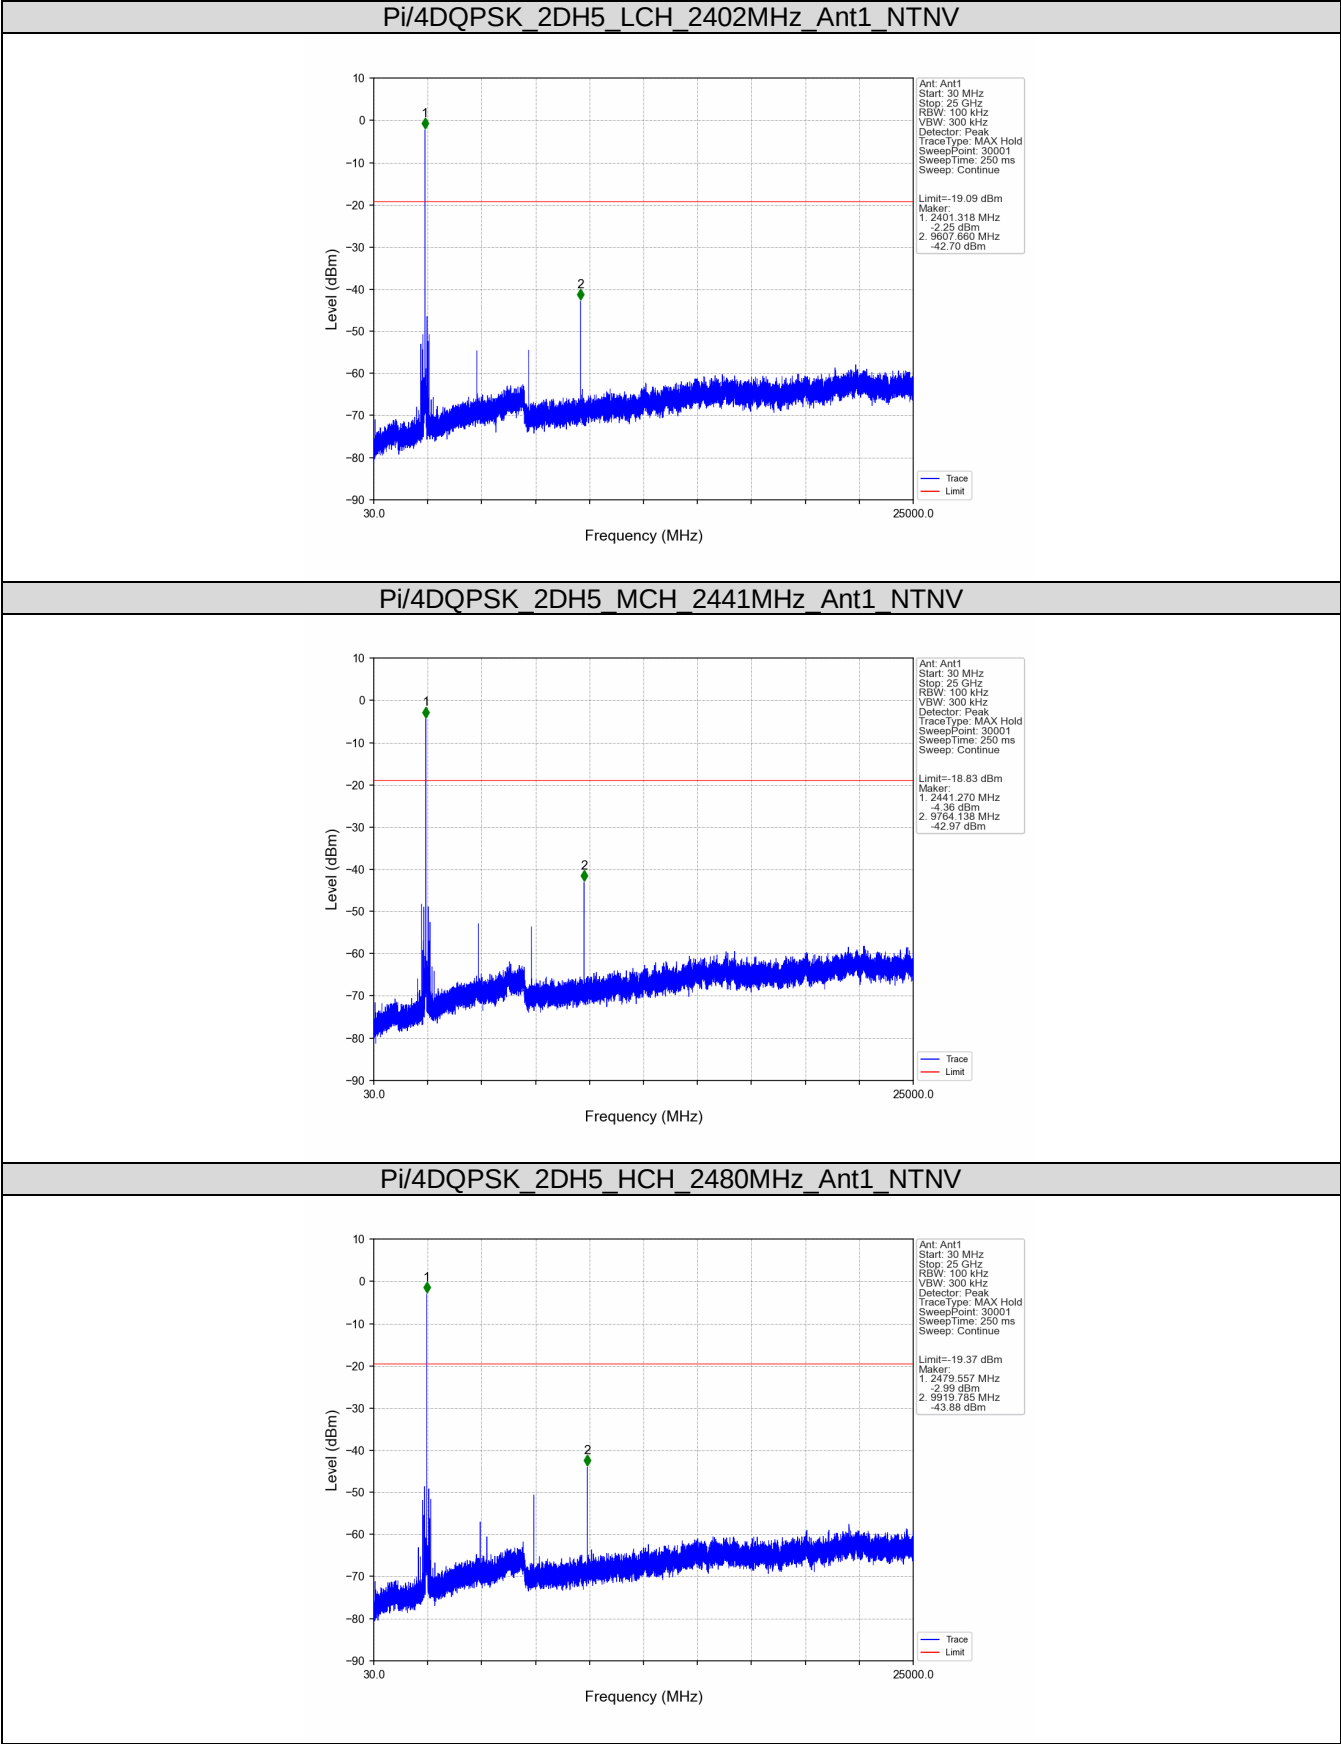



Conducted spurious emissions:

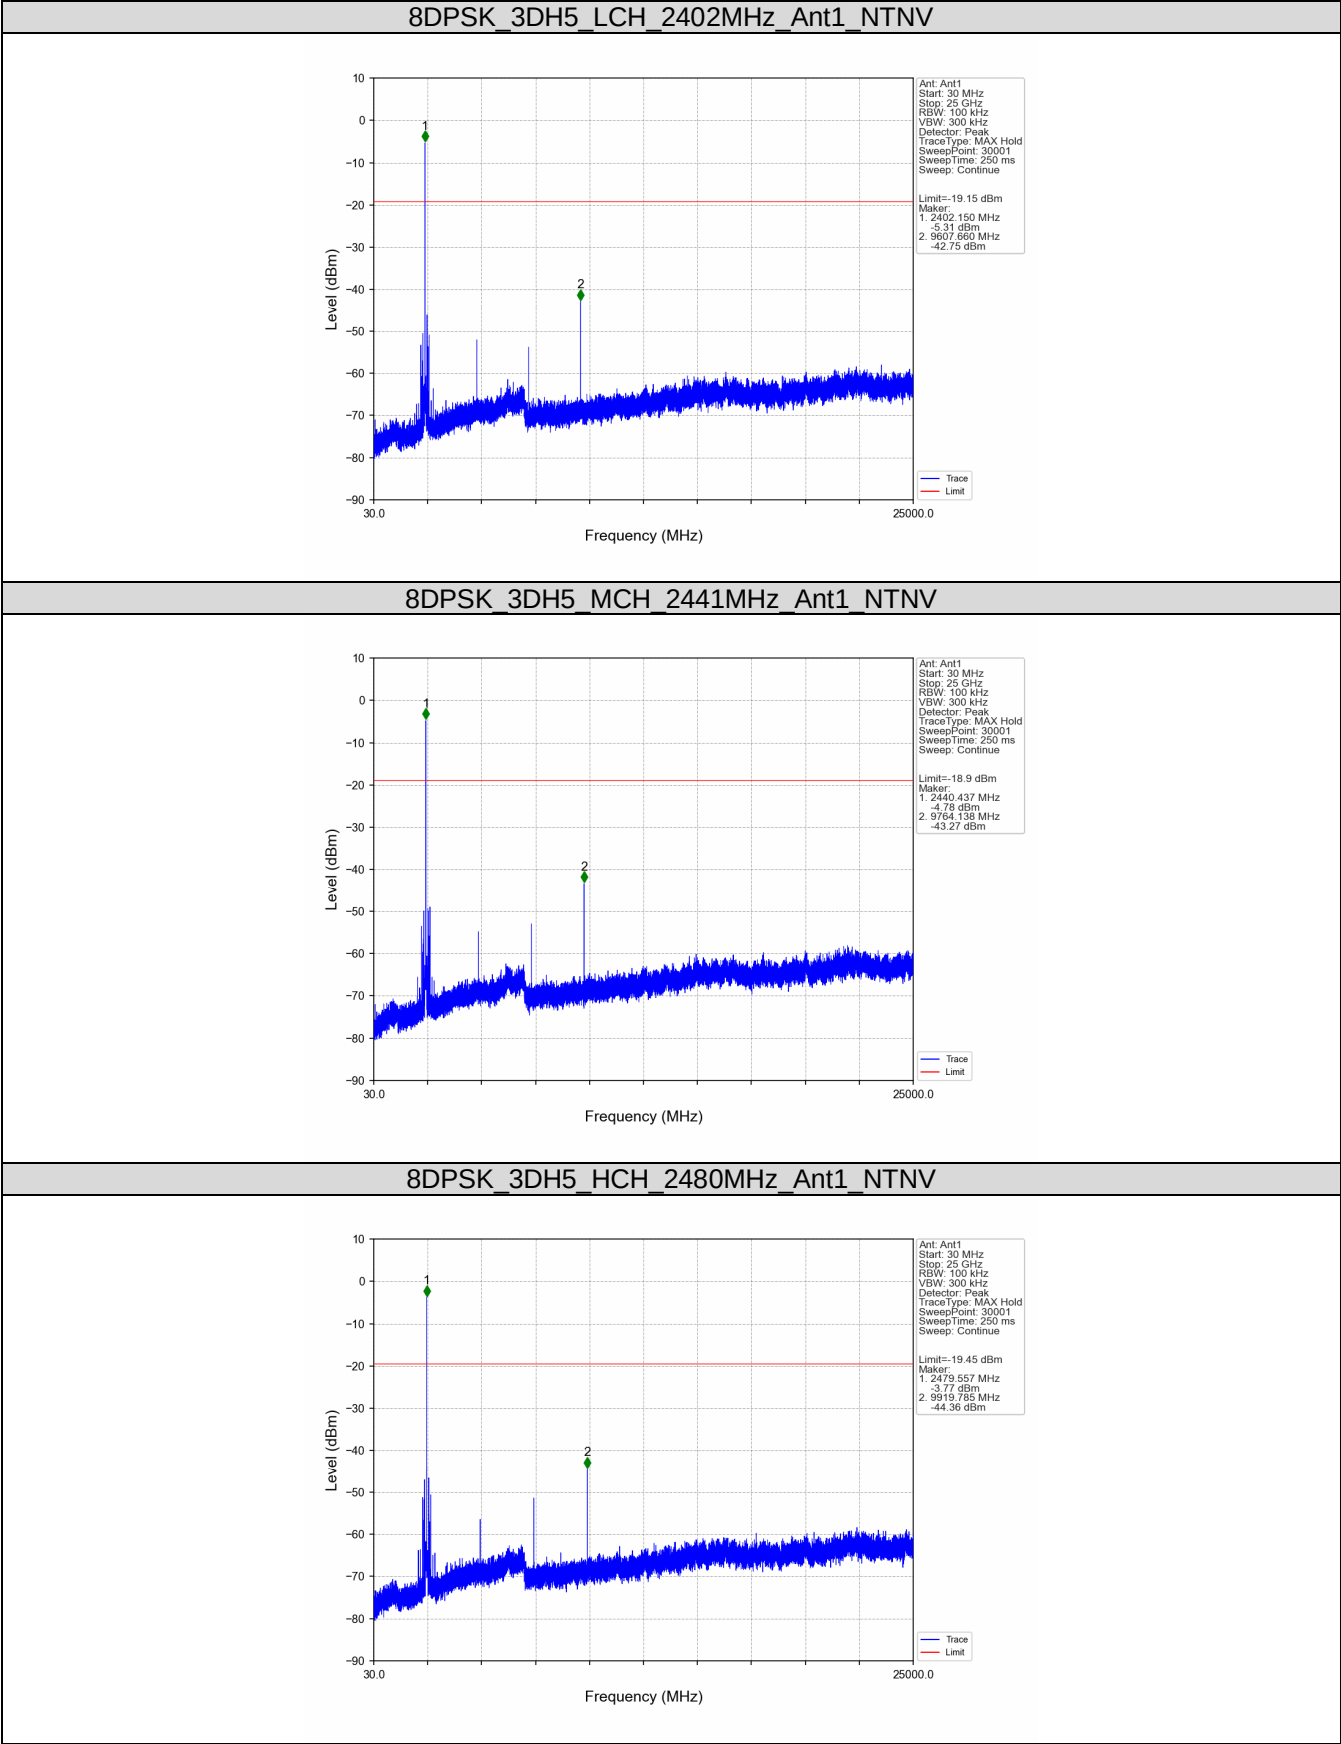

9.8 Band Edge Testing

Test Method

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously. Set the EUT to the lowest frequency channel.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector, Trace: Max hold, Sweep time: Coupled, Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation. Allow the trace to stabilize.
4. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.
5. Set the EUT to the highest frequency channel and repeat step 2) to 4)
6. Enable the EUT hopping mode, repeat the test.


Limit:


In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


Test result:


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	0.86	-19.14	Pass
		2441	DH5	1	1.16	-18.84	Pass
		2480	DH5	1	0.63	-19.37	Pass
		HOPP	DH5	1	1.15	-18.85	Pass
					1.15	-18.85	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	0.91	-19.09	Pass
		2441	2DH5	1	1.17	-18.83	Pass
		2480	2DH5	1	0.63	-19.37	Pass
		HOPP	2DH5	1	1.25	-18.75	Pass
					1.25	-18.75	Pass
8DPSK	SISO	2402	3DH5	1	0.85	-19.15	Pass
		2441	3DH5	1	1.10	-18.90	Pass
		2480	3DH5	1	0.55	-19.45	Pass
		HOPP	3DH5	1	1.15	-18.85	Pass
					1.15	-18.85	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

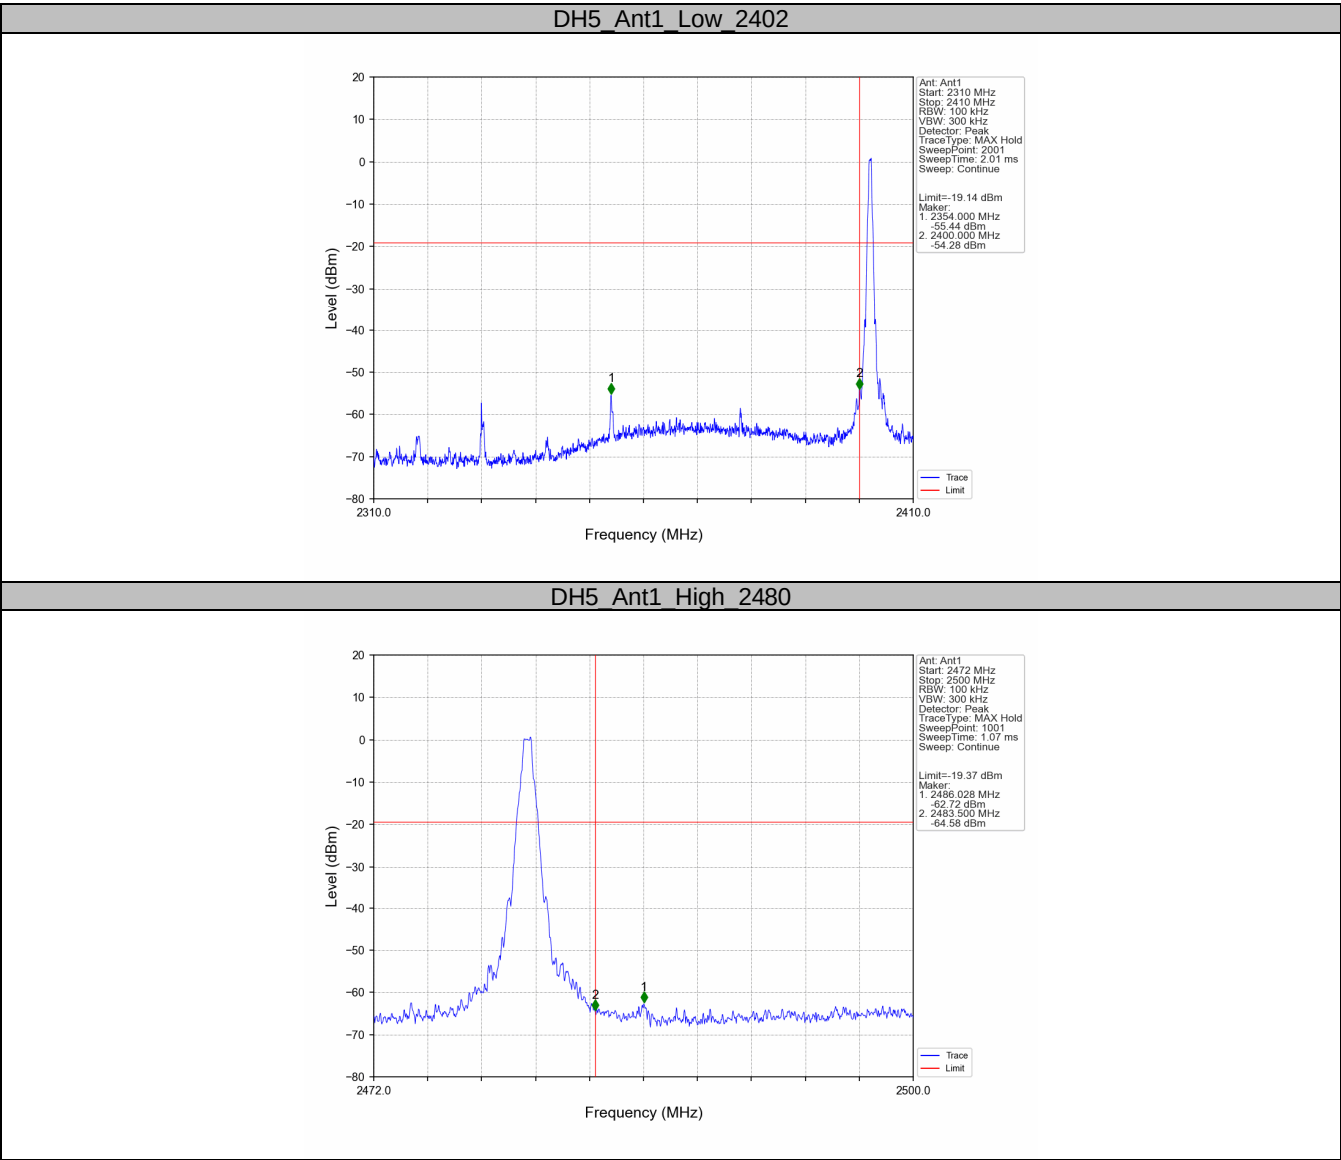


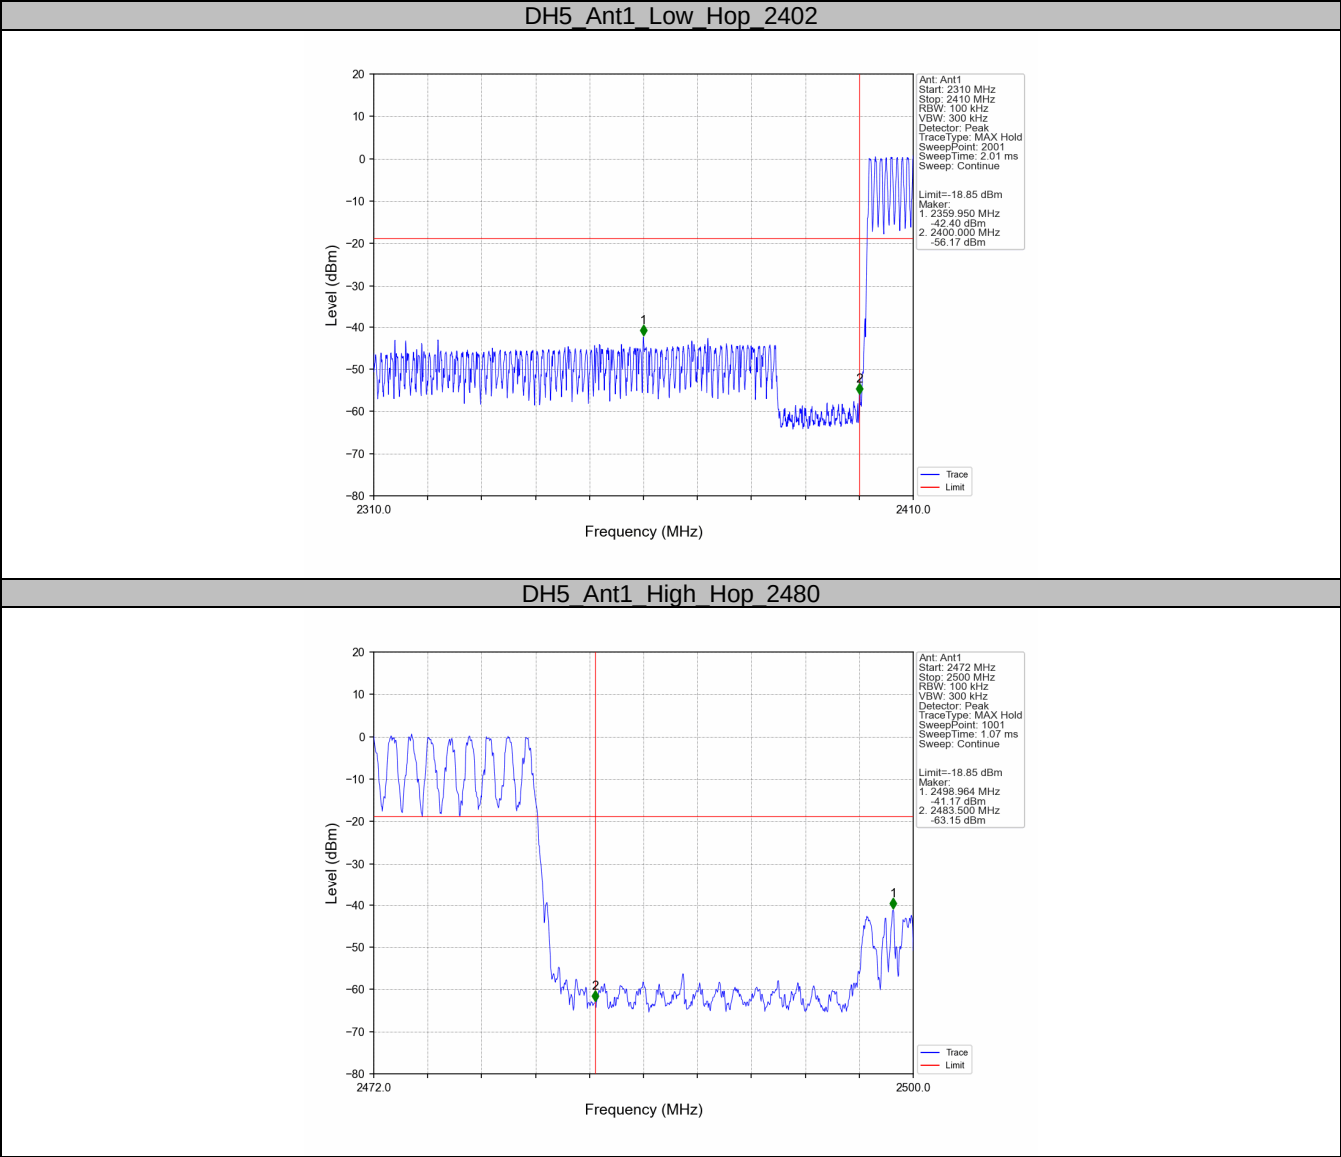

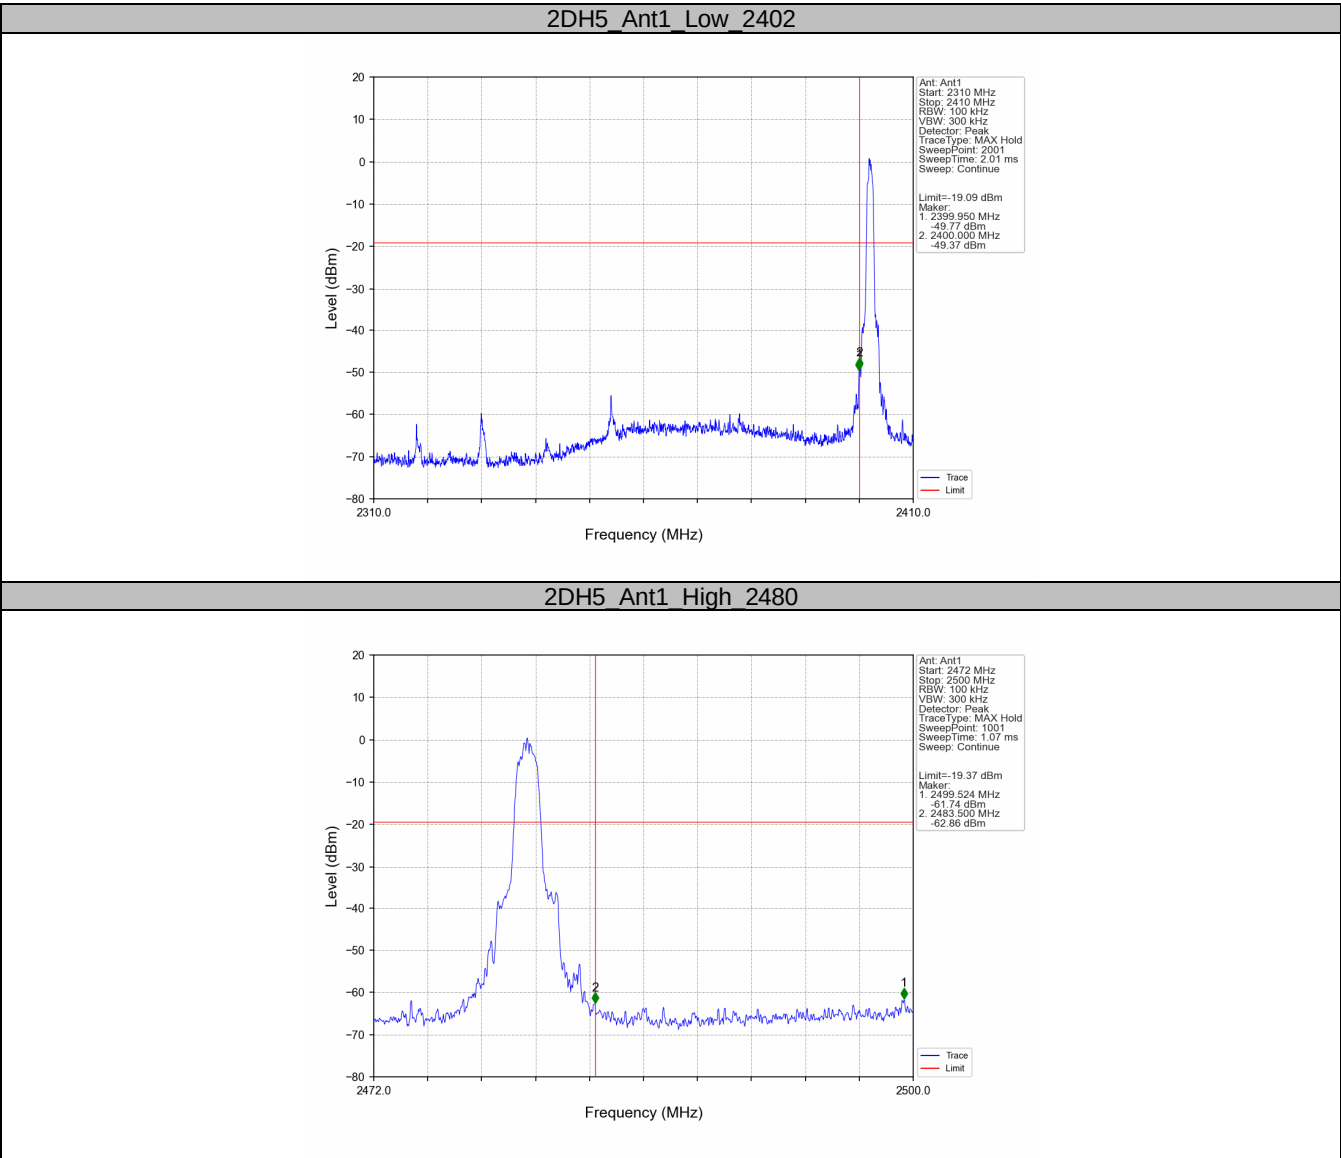

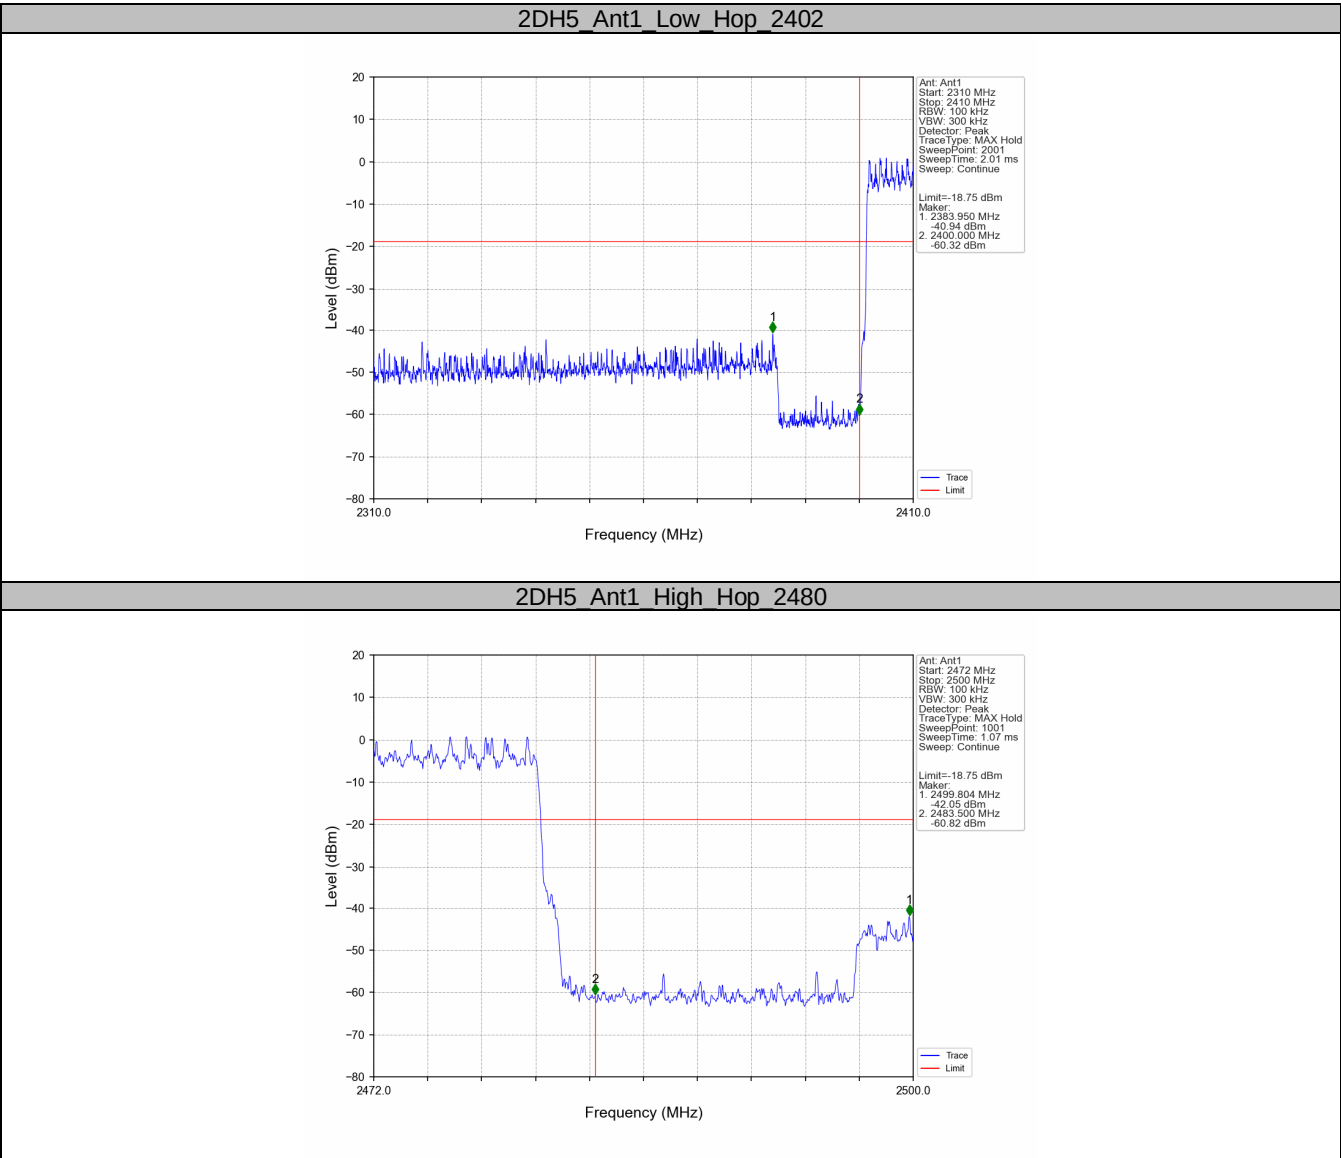

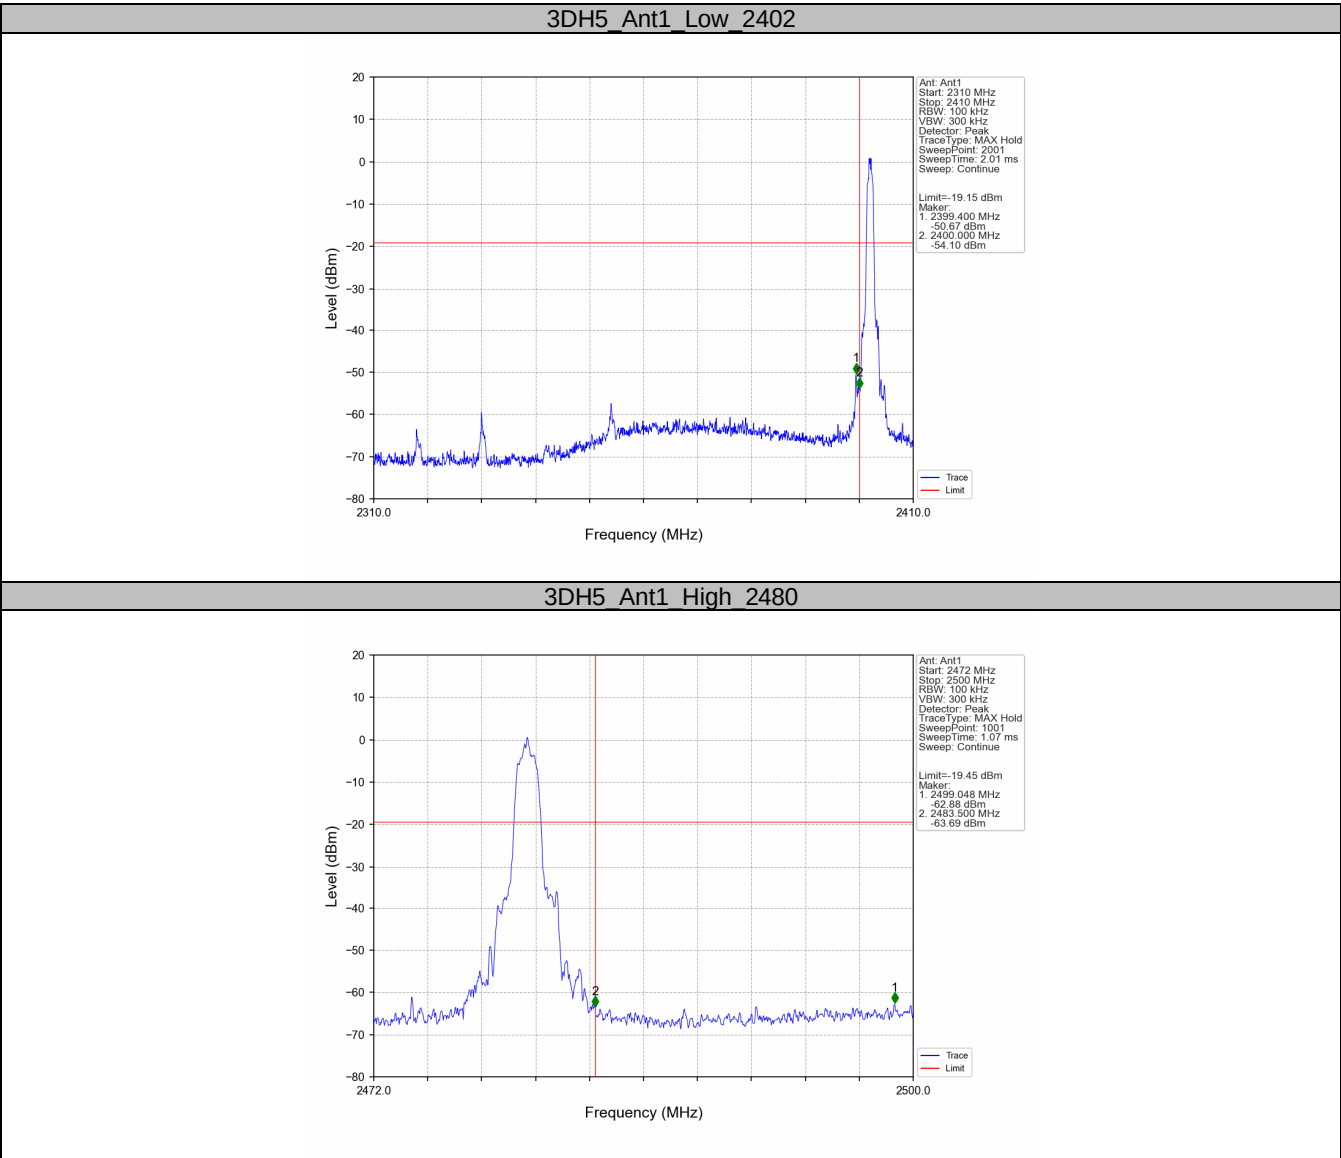

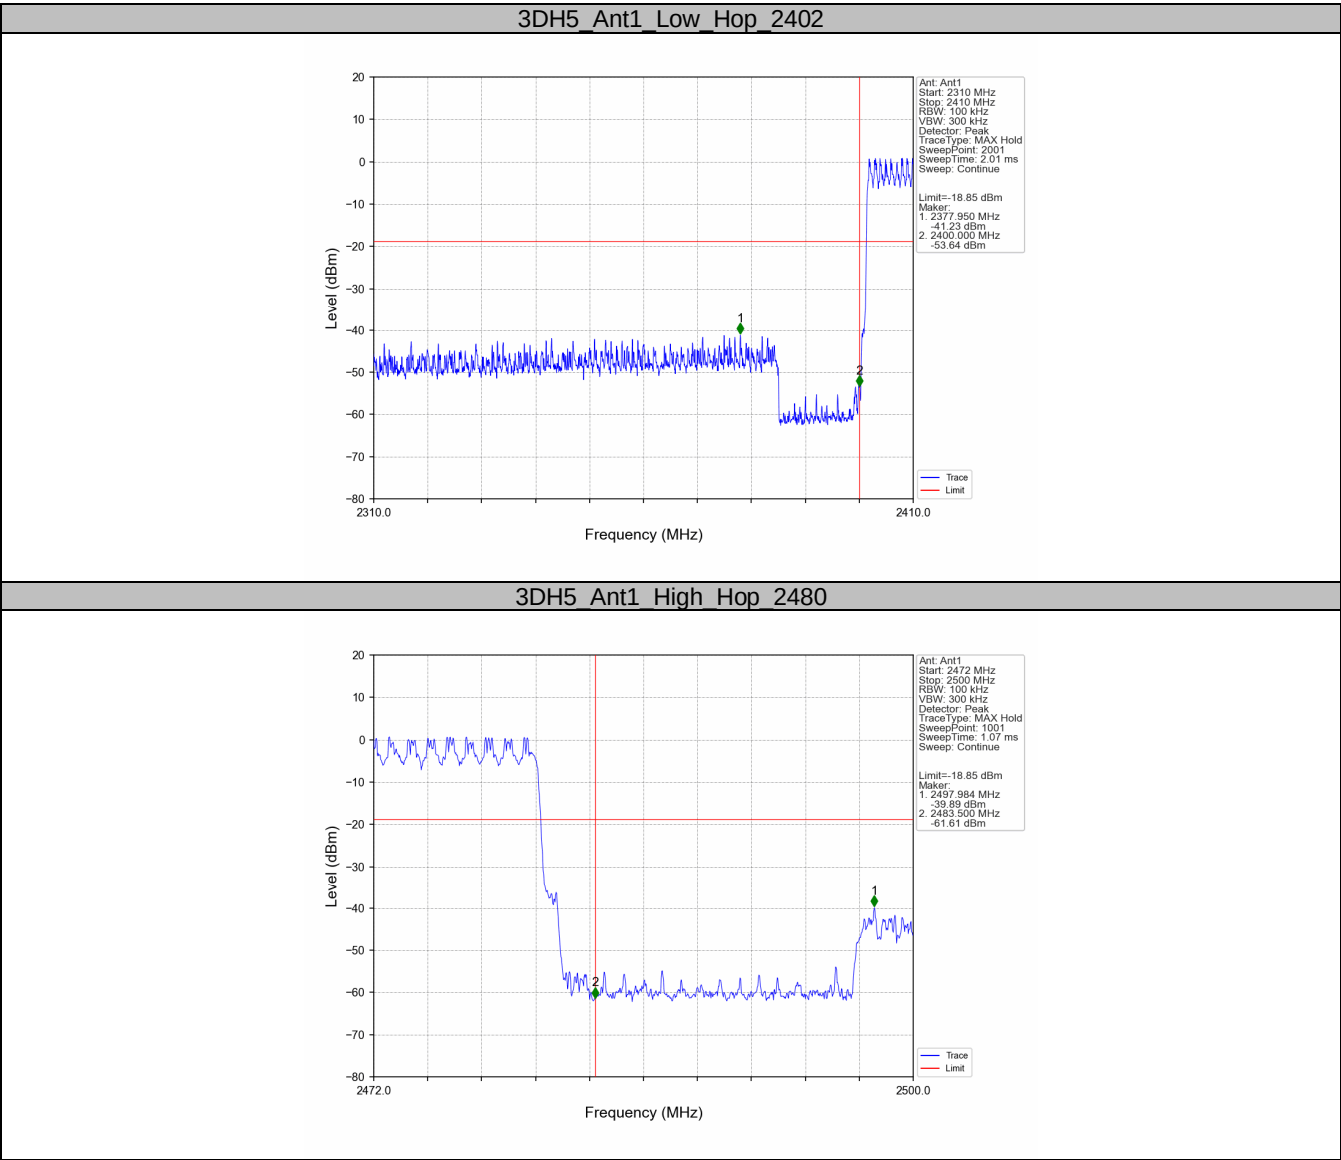

9.9 Spurious Radiated Emissions for Transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meters chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
4. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. Use the following test receiver settings According to C63.10:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz to 120KHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = QP; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.For average measurement:

The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($20\log(1/\text{duty cycle})$).

The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
7. Repeat above procedures until all frequencies measured were complete.

Spurious Radiated Emissions for Transmitter

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit 3m(dB $\mu\text{V/m}$)=Limit 300m(dB $\mu\text{V/m}$)+40Log(300m/3m) (Below 30MHz)

Note 2: Limit 3m(dB $\mu\text{V/m}$)=Limit 30m(dB $\mu\text{V/m}$)+40Log(30m/3m) (Below 30MHz)




Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

The only worse case test result is listed in the report.

Transmitting spurious emission test result as below:

Test data_9kHz to 30MHz
DH5_Low Channel:

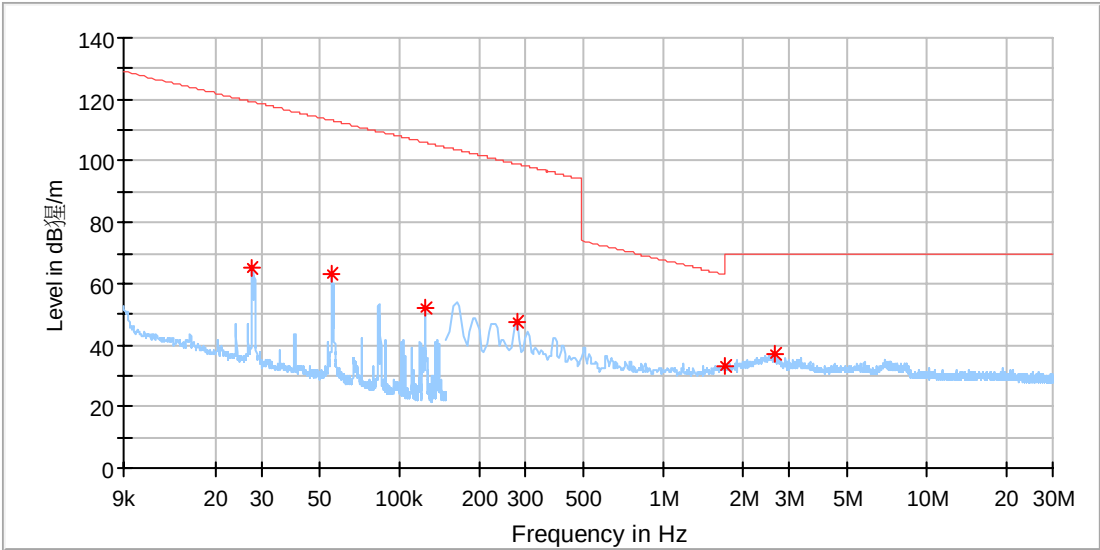


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.027706	64.90	119.15	54.25	H	117.0	19.88
0.055577	62.88	113.06	50.18	H	165.0	19.92
0.124620	51.79	105.99	54.20	H	277.0	19.92
0.279350	47.62	98.92	51.30	H	155.0	19.90
1.702200	33.17	63.01	29.84	H	1.0	20.02
2.642475	36.93	70.00	33.07	H	44.0	20.15



Test data_9kHz to 30MHz
DH5_Low Channel:

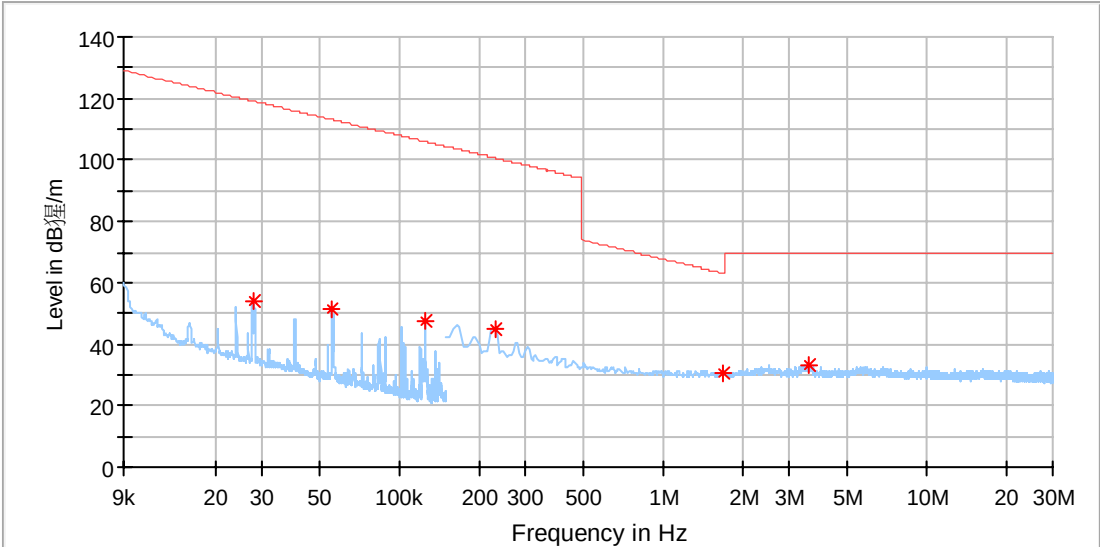


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.027753	53.99	119.14	65.15	V	150.0	19.88
0.055577	51.28	113.06	61.78	V	91.0	19.92
0.124573	47.32	105.99	58.68	V	352.0	19.92
0.229600	44.96	100.64	55.68	V	355.0	19.88
1.672350	30.45	63.17	32.72	V	73.0	20.02
3.582750	32.90	70.00	37.10	V	82.0	20.13




Test data_30MHz to 1000MHz
DH5_Low Channel:

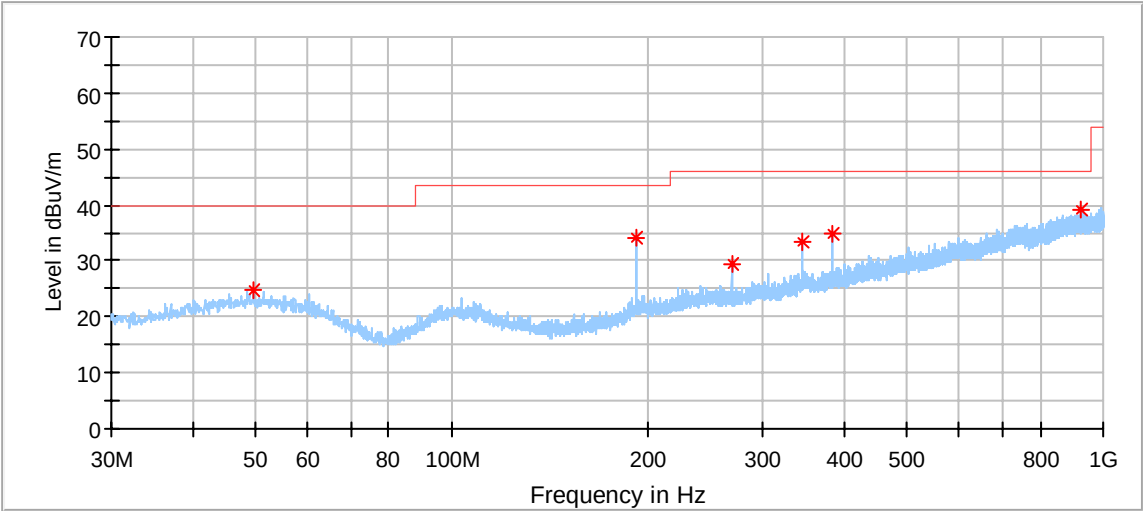

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.561667	24.69	40.00	15.31	100.0	H	205.0	18.24
191.990000	33.97	43.50	9.53	200.0	H	11.0	15.56
268.781667	29.49	46.00	16.51	100.0	H	20.0	17.76
345.573333	33.33	46.00	12.68	100.0	H	63.0	20.09
383.942222	34.83	46.00	11.17	100.0	H	260.0	20.85
926.010556	39.18	46.00	6.82	200.0	H	27.0	29.50

Test data_30MHz to 1000MHz
DH5_Low Channel:

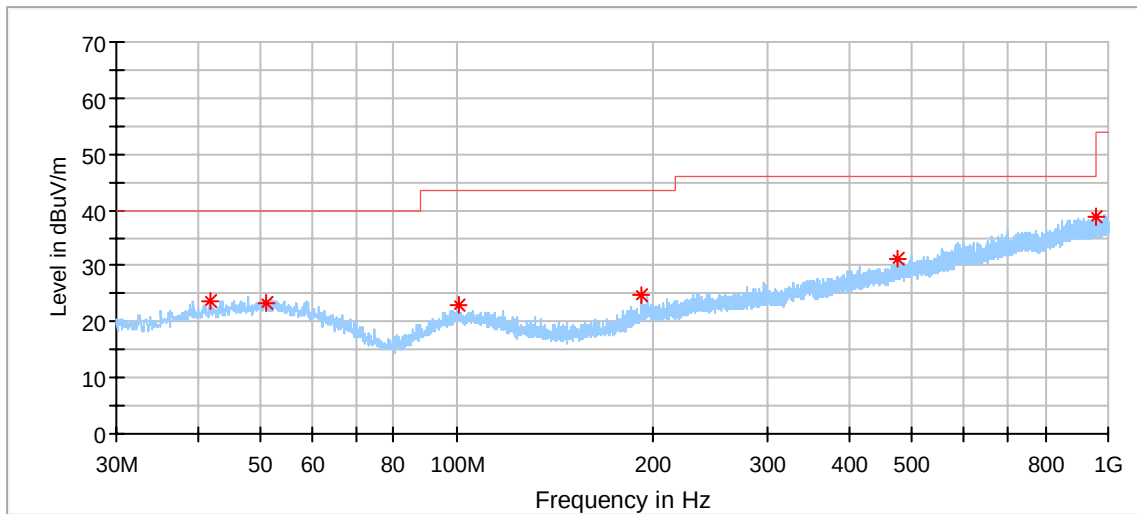


Critical Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.747778	23.56	40.00	16.44	200.0	V	266.0	17.28
51.178333	23.31	40.00	16.69	200.0	V	195.0	18.13
100.648333	22.95	43.50	20.55	100.0	V	214.0	15.88
191.990000	24.72	43.50	18.78	200.0	V	59.0	15.56
473.775000	31.22	46.00	14.78	200.0	V	289.0	22.40
957.697222	38.83	46.00	7.17	200.0	V	155.0	29.58

Remark:

- (1) We test Low channel, Middle channel and High channel separately, only the worst case recorded in this report.
- (2) Corrected Amplitude = Read level + Corrector factor
Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)

Test data 1GHz to 18GHz:
DH5_Low Channel:

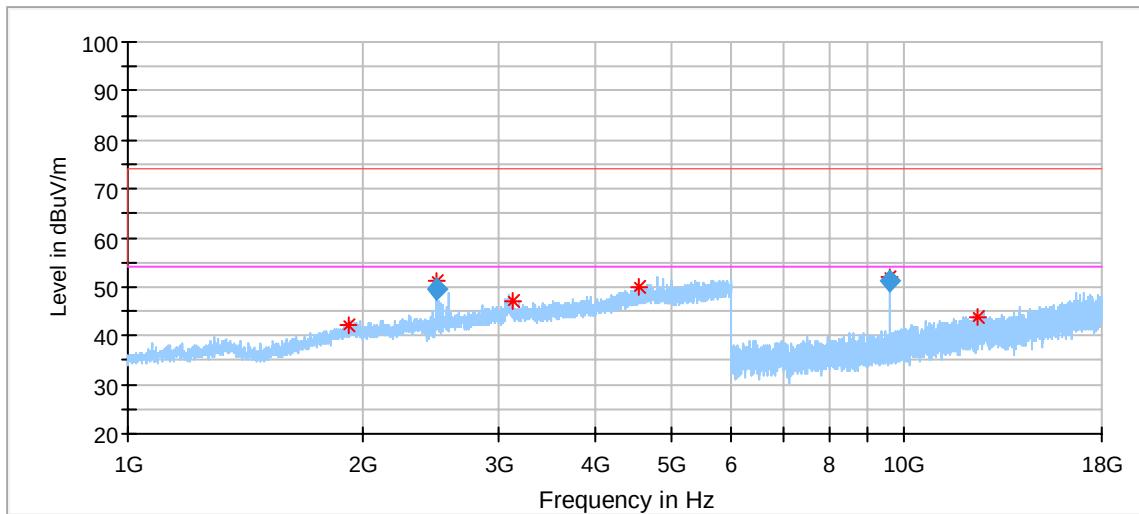

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1920.500000	42.08	74.00	31.92	150.0	H	225.0	-3.25
2497.500000	51.03	74.00	22.97	150.0	H	309.0	-1.47
3133.000000	47.12	74.00	26.88	150.0	H	237.0	1.47
4567.500000	49.82	74.00	24.18	150.0	H	141.0	5.41
9608.000000	51.93	74.00	22.07	150.0	H	230.0	12.40
12464.500000	43.94	74.00	30.06	150.0	H	31.0	16.28

Final Result

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2497.500000	49.37	54.00	4.63	150.0	H	309.0	-1.47
9608.000000	50.99	54.00	3.01	150.0	H	230.0	12.40




Test data 1GHz to 18GHz:
DH5_Low Channel:

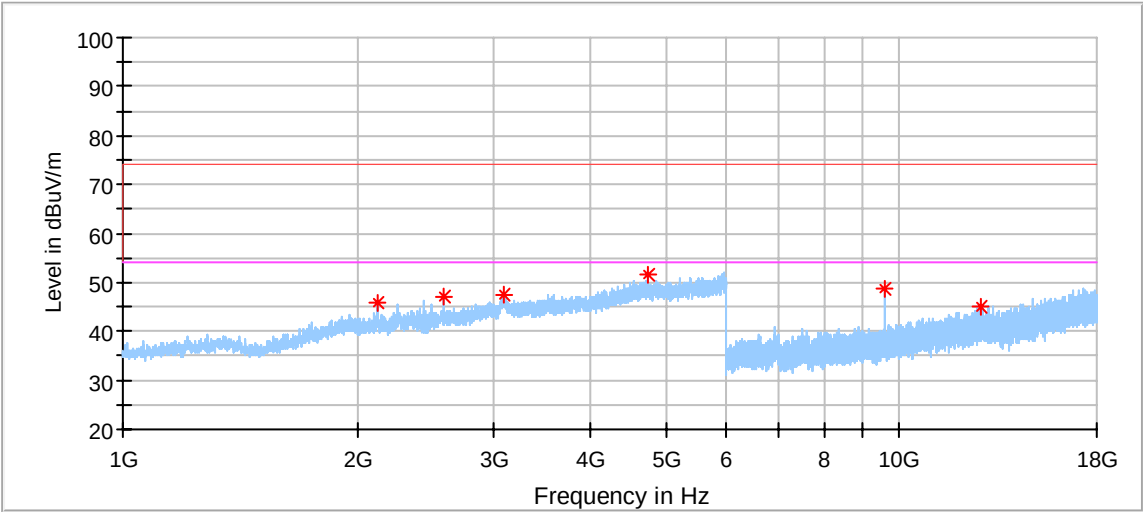

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2128.000000	45.66	74.00	28.34	150.0	V	261.0	-2.71
2593.500000	47.21	74.00	26.79	150.0	V	237.0	-1.02
3087.000000	47.65	74.00	26.35	150.0	V	162.0	2.28
4740.000000	51.63	74.00	22.37	150.0	V	309.0	5.94
9608.000000	48.62	74.00	25.38	150.0	V	82.0	12.40
12714.500000	44.90	74.00	29.10	150.0	V	255.0	16.35

Test data 1GHz to 18GHz:
DH5_Middle Channel:

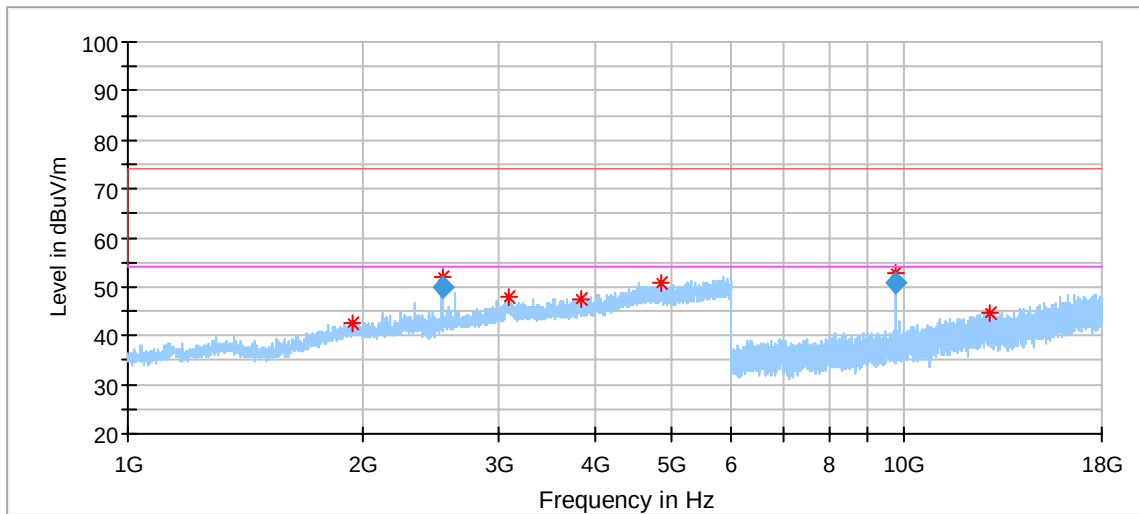

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1950.000000	42.48	74.00	31.52	150.0	H	189.0	-2.88
2536.500000	51.89	74.00	22.11	150.0	H	285.0	-1.41
3093.500000	47.85	74.00	26.15	150.0	H	117.0	2.47
3842.000000	47.62	74.00	26.39	150.0	H	93.0	2.54
4859.500000	50.86	74.00	23.14	150.0	H	201.0	5.95
9764.000000	52.85	74.00	21.15	150.0	H	230.0	12.63
12930.000000	44.82	74.00	29.18	150.0	H	157.0	16.58

Final Result

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2536.500000	50.01	54.00	3.99	150.0	H	285.0	-1.41
9764.000000	50.65	54.00	3.35	150.0	H	230.0	12.63



Test data 1GHz to 18GHz:
DH5_Middle Channel:

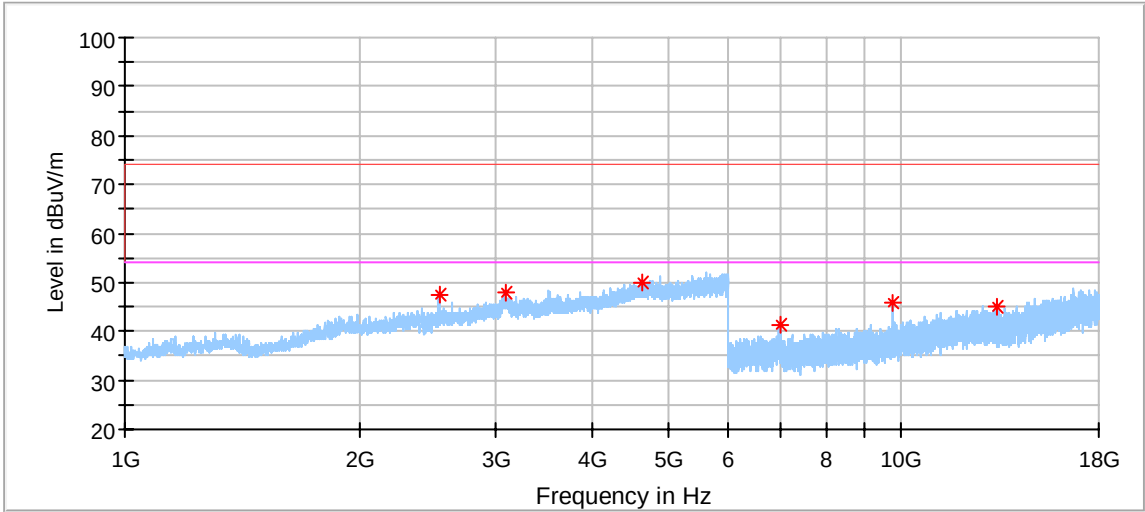


Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2536.500000	47.65	74.00	26.35	150.0	V	250.0	-1.41
3088.500000	47.88	74.00	26.12	150.0	V	203.0	2.32
4643.500000	49.76	74.00	24.24	150.0	V	274.0	5.68
6976.500000	41.35	74.00	32.65	150.0	V	56.0	9.11
9764.000000	45.68	74.00	28.32	150.0	V	82.0	12.63
13325.500000	44.84	74.00	29.16	150.0	V	282.0	16.24



Test data 1GHz to 18GHz:
DH5_Hight Channel:

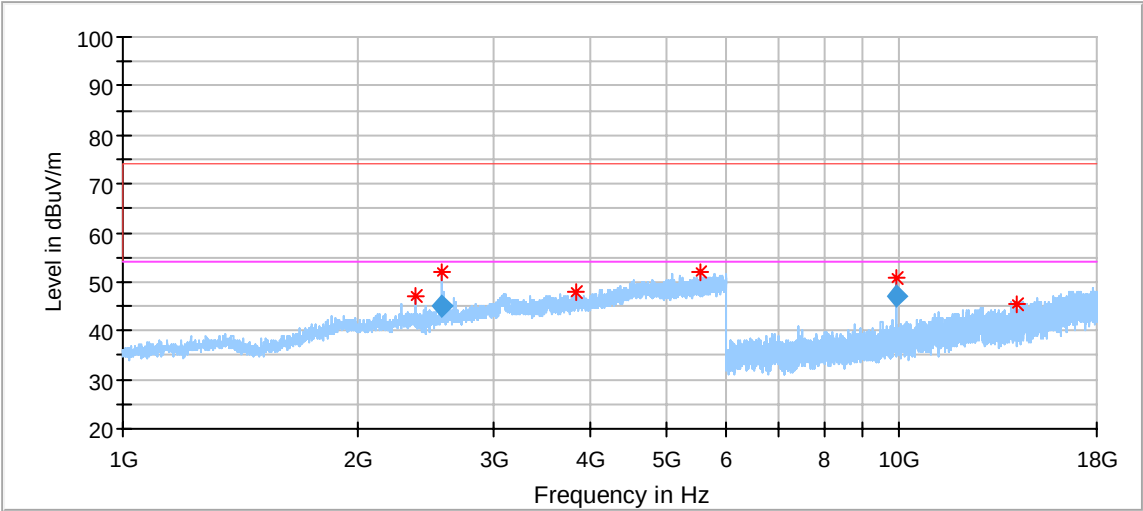

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2384.500000	47.04	74.00	26.96	150.0	H	310.0	-1.41
2575.500000	51.86	74.00	22.14	150.0	H	298.0	-1.07
3840.500000	48.00	74.00	26.00	150.0	H	250.0	2.53
5545.500000	51.86	74.00	22.14	150.0	H	107.0	7.15
9920.000000	50.85	74.00	23.15	150.0	H	260.0	12.74
14155.500000	45.41	74.00	28.59	150.0	H	58.0	16.90

Final Result

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2575.500000	45.21	54.00	8.79	150.0	H	298.0	-1.07
9920.000000	47.12	54.00	6.88	150.0	H	260.0	12.74



Test data 1GHz to 18GHz:
DH5_Hight Channel:

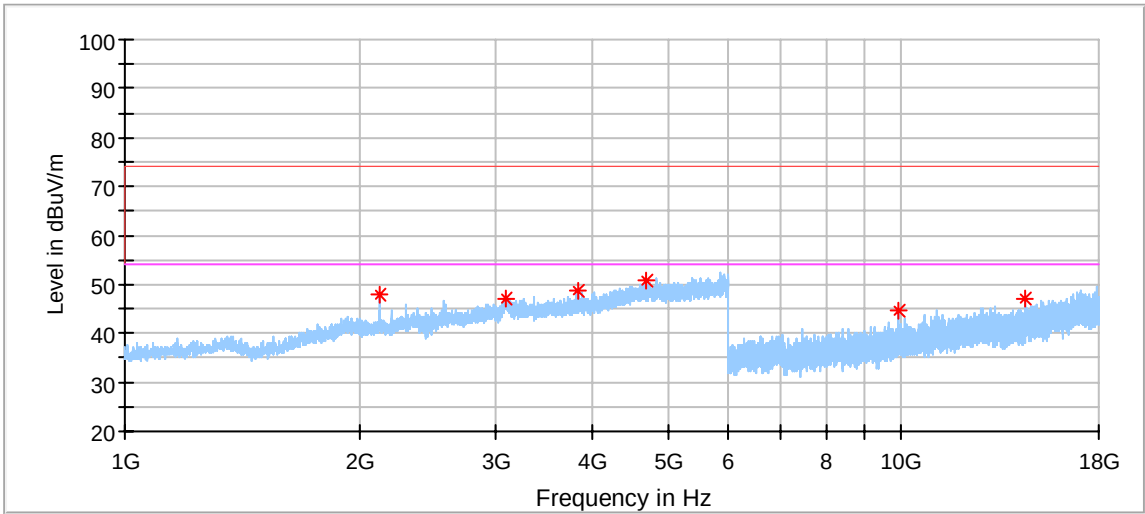


Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2127.500000	47.93	74.00	26.07	150.0	V	274.0	-2.71
3101.000000	47.16	74.00	26.84	150.0	V	298.0	2.63
3845.500000	48.68	74.00	25.32	150.0	V	12.0	2.57
4682.000000	50.94	74.00	23.06	150.0	V	23.0	5.80
9920.000000	44.53	74.00	29.47	150.0	V	82.0	12.74
14486.000000	46.90	74.00	27.10	150.0	V	328.0	17.51



Test data 18GHz to 40GHz:
DH5_Low Channel:

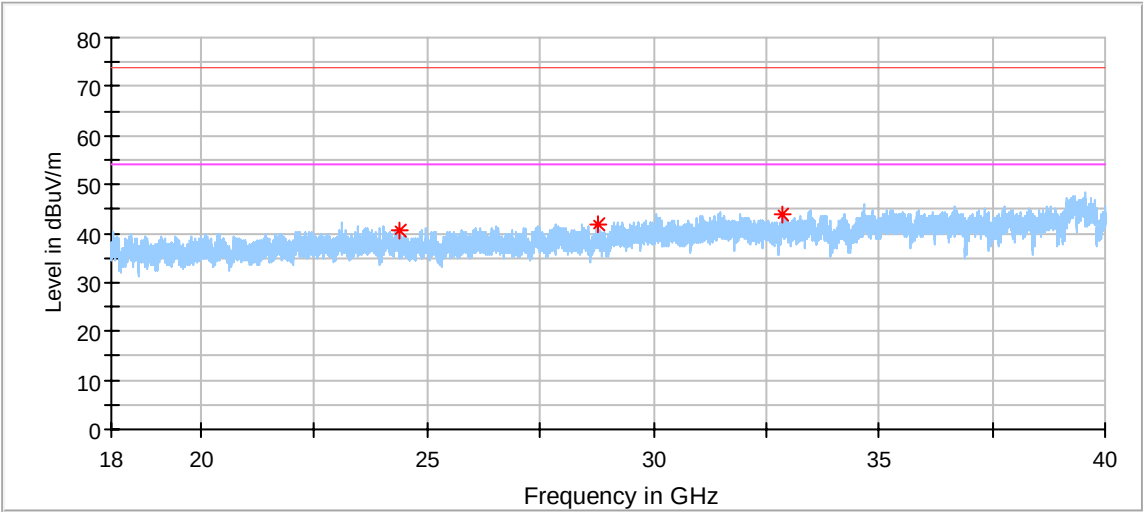


Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
24371.750000	40.63	74.00	33.37	150.0	H	4.0	-0.18	---
28756.625000	41.98	74.00	32.02	150.0	H	354.0	0.23	---
32880.250000	43.76	74.00	30.24	150.0	H	263.0	1.07	---



Test data 18GHz to 40GHz:
DH5_Low Channel:

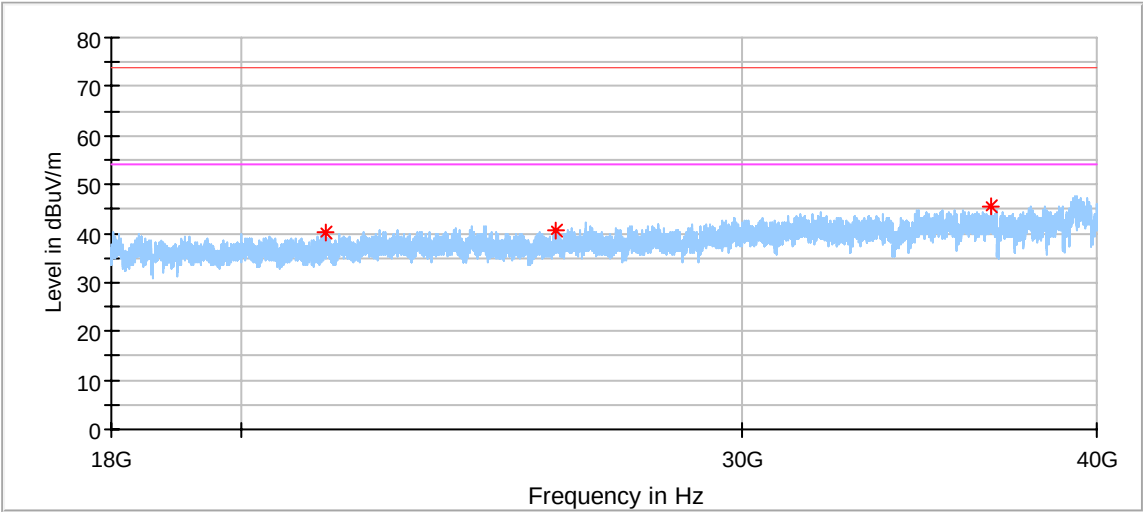

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
21420.312500	40.24	74.00	33.76	150.0	V	329.0	-2.04	---
25822.375000	40.56	74.00	33.44	150.0	V	356.0	0.87	---
36702.062500	45.66	74.00	28.34	150.0	V	93.0	2.36	---

- Remark:
- 1. We test Low channel, Middle channel and High channel separately, only the worst case recorded in this report.
 - 2. Corrected Amplitude = Read level + Corrector factor
Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)

10 Test Equipment List

Radiated Emission Test 1# (9kHz – 1GHz)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	2025-5-13
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	2026-2-11
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	2025-7-24
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	2025-5-11
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	2025-7-2
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	2025-7-17
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	2025-5-11
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A

Radiated Emission 2# Test (1GHz – 40GHz)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	2025-5-13
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	2026-3-10
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	2025-5-11
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	2025-7-2
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	2025-7-17
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	2025-5-11
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A

Conducted RF Test System

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	2025-5-11
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157W	68-4-93-14-003	101226/100929	2025-5-11
Power Splitter	Weinschel	1580	68-4-85-14-001	SC319	2025-5-11
10dB Attenuator	Weinschel	4M-10	68-4-81-14-003	43152	2025-5-11
10dB Attenuator	R&S	DNF	68-4-81-14-004	DNF-001	2025-5-11
10dB Attenuator	R&S	DNF	68-4-81-14-005	DNF-002	2025-5-11
10dB Attenuator	R&S	DNF	68-4-81-14-006	DNF-003	2025-5-11
10dB Attenuator	R&S	DNF	68-4-81-14-007	DNF-004	2025-5-11
Test software	Tonscend	System for BT/WIFI	68-4-74-14-006-A13	Version 2.6.77.0518	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	2025-10-15

Conducted Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 3	68-4-74-14-001	101782	2025-5-13
LISN	Rohde & Schwarz	ENV432	68-4-87-16-001	101318	2025-5-12
Test software	Rohde & Schwarz	EMC32	68-4-90-14-003-A10	Version9.15.00	N/A
Shielding Room	TDK	CSR #1	68-4-90-19-004	----	2025-10-15

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Conducted Emission 150kHz-30MHz (for test using AMN ENV432 or ENV4200)	3.57dB
Uncertainty for Radiated Emission in 3m chamber 9kHz-30MHz	4.70dB
Uncertainty for Radiated Emission in new 3m chamber 30MHz-1000MHz	Horizontal: 4.59dB; Vertical: 4.75dB
Uncertainty for Radiated Emission in new 3m 1000MHz-18000MHz	Horizontal: 5.08dB; Vertical: 5.09dB;
Uncertainty for Radiated Emission 18000MHz-40000MHz	Horizontal: 4.52dB; Vertical: 4.51dB
Uncertainty for Conducted RF test	RF Power Conducted: 1.31dB Frequency test involved: 0.6×10^{-8} or 1%

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3 and 4.3.4.

THE END