

TEST REPORT

Product Name : Smart Terminal
Model Number : NG-TC2
FCC ID : 2AJ9T-10601

Prepared for : ZKTECO CO., LTD.
Address : No.32, Pingshan Industrial Avenue, Tangxia Town,
Dongguan City, Guangdong Province, China 523728

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2411120146W00104R
Date(s) of Tests : November 19, 2024 to December 9, 2024
Date of issue : December 10, 2024

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	6
4	TEST METHODOLOGY	7
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4.2	MEASUREMENT EQUIPMENT USED	7
4.3	DESCRIPTION OF TEST MODES	8
5	FACILITIES AND ACCREDITATIONS	9
5.1	FACILITIES	9
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	9
6	TEST SYSTEM UNCERTAINTY	10
7	SETUP OF EQUIPMENT UNDER TEST	11
7.1	RADIO FREQUENCY TEST SETUP 1	11
7.2	RADIO FREQUENCY TEST SETUP 2	11
7.3	CONDUCTED EMISSION TEST SETUP	12
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	14
7.5	SUPPORT EQUIPMENT	14
8	TEST REQUIREMENTS	15
8.1	DTS (6DB) BANDWIDTH	15
8.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER	16
8.3	MAXIMUM POWER SPECTRAL DENSITY	26
8.4	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	35
8.5	RADIATED SPURIOUS EMISSION	40
8.6	CONDUCTED EMISSIONS TEST	54
8.7	ANTENNA APPLICATION	57

1 TEST RESULT CERTIFICATION

Applicant : ZKTECO CO., LTD.
Address : No.32, Pingshan Industrial Avenue, Tangxia Town, Dongguan City, Guangdong Province, China 523728
Manufacturer : ZKTECO CO., LTD.
Address : No.32, Pingshan Industrial Avenue, Tangxia Town, Dongguan City, Guangdong Province, China 523728
EUT : Smart Terminal
Model Name : NG-TC2
Trademark : 


Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 , Subpart J FCC 47 CFR Part 15 , Subpart C	PASS


The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Date of Test : November 19, 2024 to December 9, 2024

Prepared by : 
Guangjun Zhu/Editor

Reviewer : 
Joe Xia/Editor

Approve & Authorized Signer : 
Lisa Wang/Manager



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product	Smart Terminal
Model Number	NG-TC2
IEEE 802.11 WLAN Mode Supported	☒ 802.11b ☒ 802.11g ☒ 802.11n(20MHz channel bandwidth) ☒ 802.11n(40MHz channel bandwidth)
Data Rate	802.11 b:1,2,5.5,11Mbps; 802.11 g:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20): up to 72.2Mbps; 802.11n(HT40): up to 150Mbps;
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Operating Frequency Range	☒ 2412-2462MHz for 802.11b/g/n(HT20); ☒ 2422-2452MHz for 802.11n(HT40);
Number of Channels	☒ 11 channels for 802.11b/g n(HT20); ☒ 7 Channels for 802.11n(HT40);
Transmit Power Max	16.91 dBm
Antenna Type	FPC Antenna
Antenna Gain	2.21 dBi Note: The antenna information provided by the manufacturer will have a certain impact on the test results.
Power Supply	DC 12V from adapter
Test Voltage	AC 120V/60Hz
Adapter	MODEL:FJ-SW124S1201500E INPUT: 100-240V~, 50Hz/60Hz, 0.6A Max OUTPUT:12.0V, 1.5A, 18.0W
Temperature Range	0°C ~ +45°C

Note: for more details, please refer to the User's manual of the EUT.

Modified Information

Version	Report No.	Revision Date	Summary
Ver1.0	ENS2411120146W00104R	/	Original Report



3 SUMMARY OF TEST RESULT

FCC PartClause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted EmissionTest	PASS	
15.247(b)	Antenna Application	PASS	
NOTE1:N/A (Not Applicable)			
NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			
NOTE3: The time on the test data photo is wrong, The correct test time is as described on the report.If there is fraud, Our laboratory assumes full responsibility.			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AJ9T-10601 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:
 FCC 47 CFR Part 2, Subpart J
 FCC 47 CFR Part 15, Subpart C
 FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.
EMI Test Receiver	Rohde & Schwarz	ESCI	101045	2024/5/10
AMN	Schwarzbeck	NNLK 8129	8129203	2024/5/11
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100107	2024/5/10
Voltage Probe	Rohde & Schwarz	TK9416	N/A	2024/5/11
AMN	Rohde & Schwarz	ESH3-Z5	100191	2024/5/10

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	2024/5/10
Pre-Amplifier	HP	8447F	2944A07999	2024/5/11
Bilog Antenna	Schwarzbeck	VULB9163	141	2024/6/26
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2024/5/12
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1177	2024/5/12
Horn Antenna	Schwarzbeck	BBHA9170	9170-399	2024/5/12
Cable	Schwarzbeck	AK9513	ACRX1	2024/5/11
Cable	Rosenberger	N/A	FP2RX2	2024/5/11
Cable	Schwarzbeck	AK9513	CRPX1	2024/5/11
Cable	Schwarzbeck	AK9513	CRRX2	2024/5/11

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.
Signal Analyzer	Agilent	N9010A	MY53470879	2024/5/10
Vector Signal Generater	Agilent	N5182B	MY53050878	2024/5/10
Analog Signal Generator	Agilent	N5171B	MY53050553	2024/5/10
RF Control Unit(Power Meter)	Tonscend	JS0806-2	\	2024/5/10
Temperature&Humidity Chamber	ESPEC	EL-02KA	12107166	2024/5/10

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (☒ 802.11b:1 Mbps; ☒ 802.11g: 6 Mbps; ☒ 802.11n(HT20): MCS0; ☒ 802.11n(HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

☒ Frequency and Channel list for 802.11b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		

☒ Frequency and Channel list for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
		6	2437		
		7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432				

☒ Test Frequency and Channel for 802.11b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

☒ Test Frequency and channel for 802.11n (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: **Accredited by CNAS**

The Certificate Registration Number is L2291.

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

Accredited by FCC

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA

The Certificate Number is 4321.01.

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0008

Name of Firm

: EMTEK (SHENZHEN) CO., LTD.

Site Location

: Building 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antennaplane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

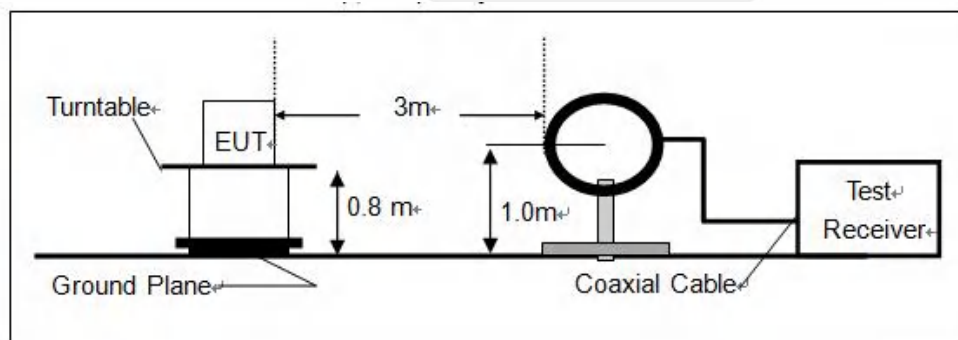

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

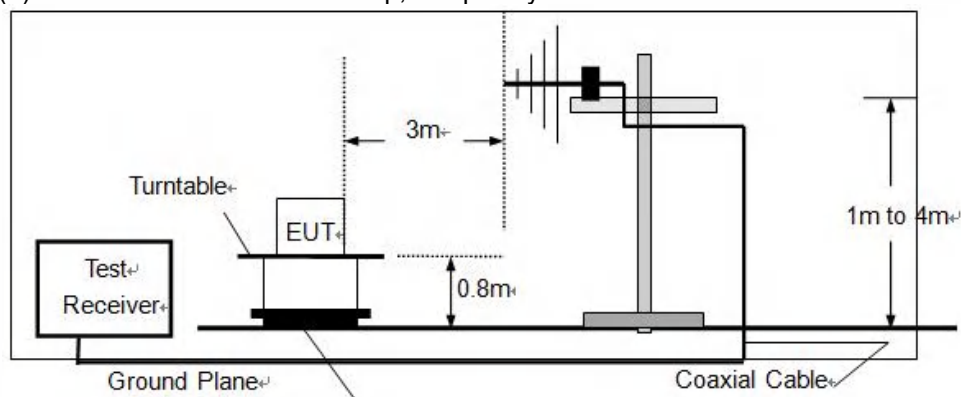

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

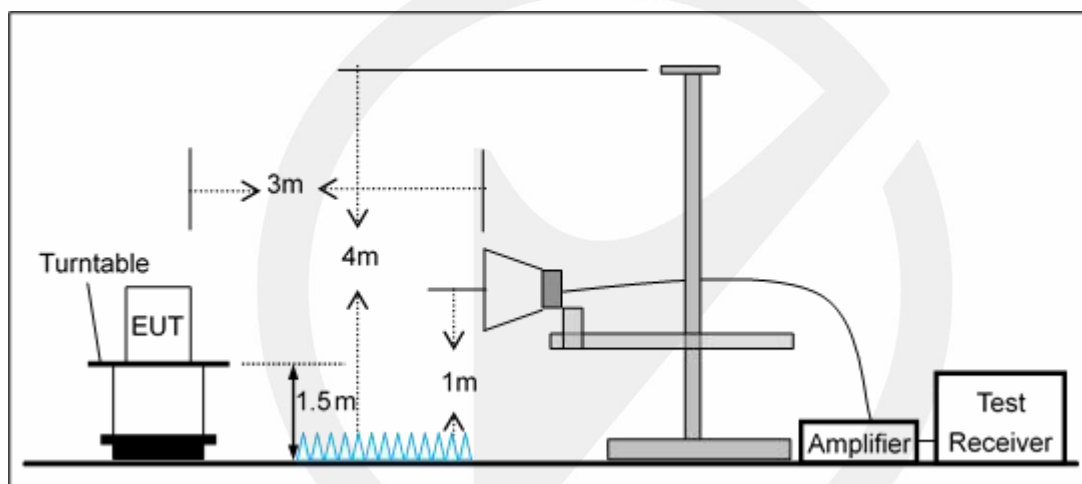


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

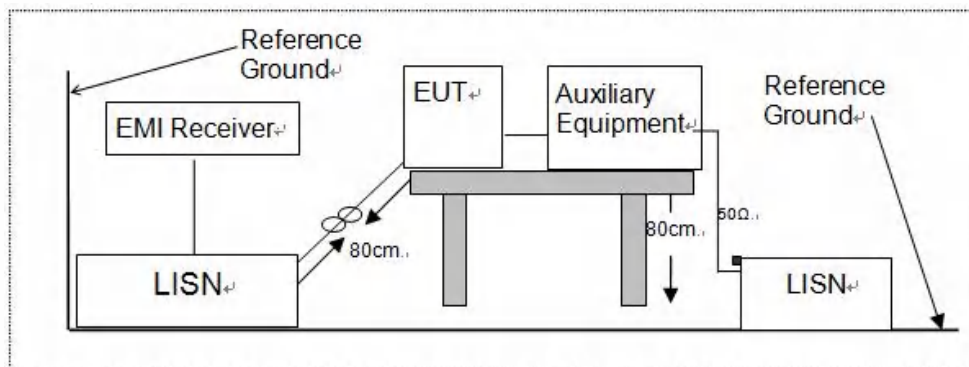

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

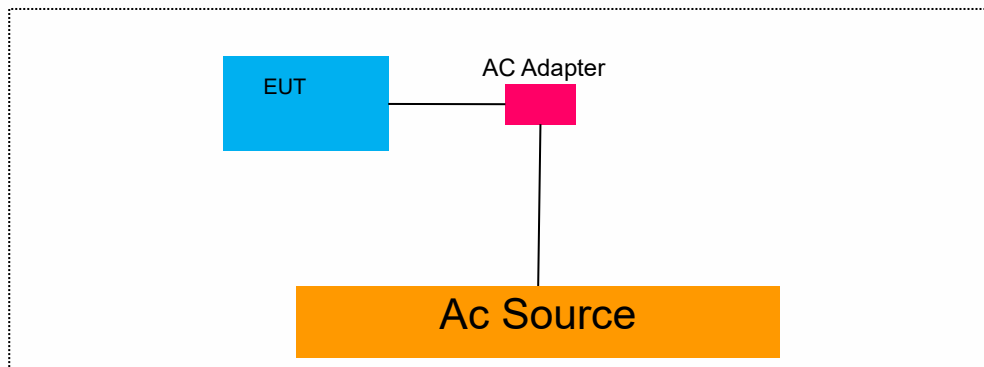

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment

8 TEST REQUIREMENTS

8.1 DTS (6DB) BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part15.247 (a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.


Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.


8.1.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.120	2406.920	2417.040	0.5	PASS
		2437	10.080	2431.960	2442.040	0.5	PASS
		2462	9.720	2456.960	2466.680	0.5	PASS
11G	Ant1	2412	16.320	2403.840	2420.160	0.5	PASS
		2437	16.320	2428.840	2445.160	0.5	PASS
		2462	16.360	2453.800	2470.160	0.5	PASS
11N20SISO	Ant1	2412	17.560	2403.200	2420.760	0.5	PASS
		2437	17.280	2428.240	2445.520	0.5	PASS
		2462	16.640	2453.520	2470.160	0.5	PASS
11N40SISO	Ant1	2422	35.360	2404.160	2439.520	0.5	PASS
		2437	34.640	2419.880	2454.520	0.5	PASS
		2452	34.240	2434.880	2469.120	0.5	PASS

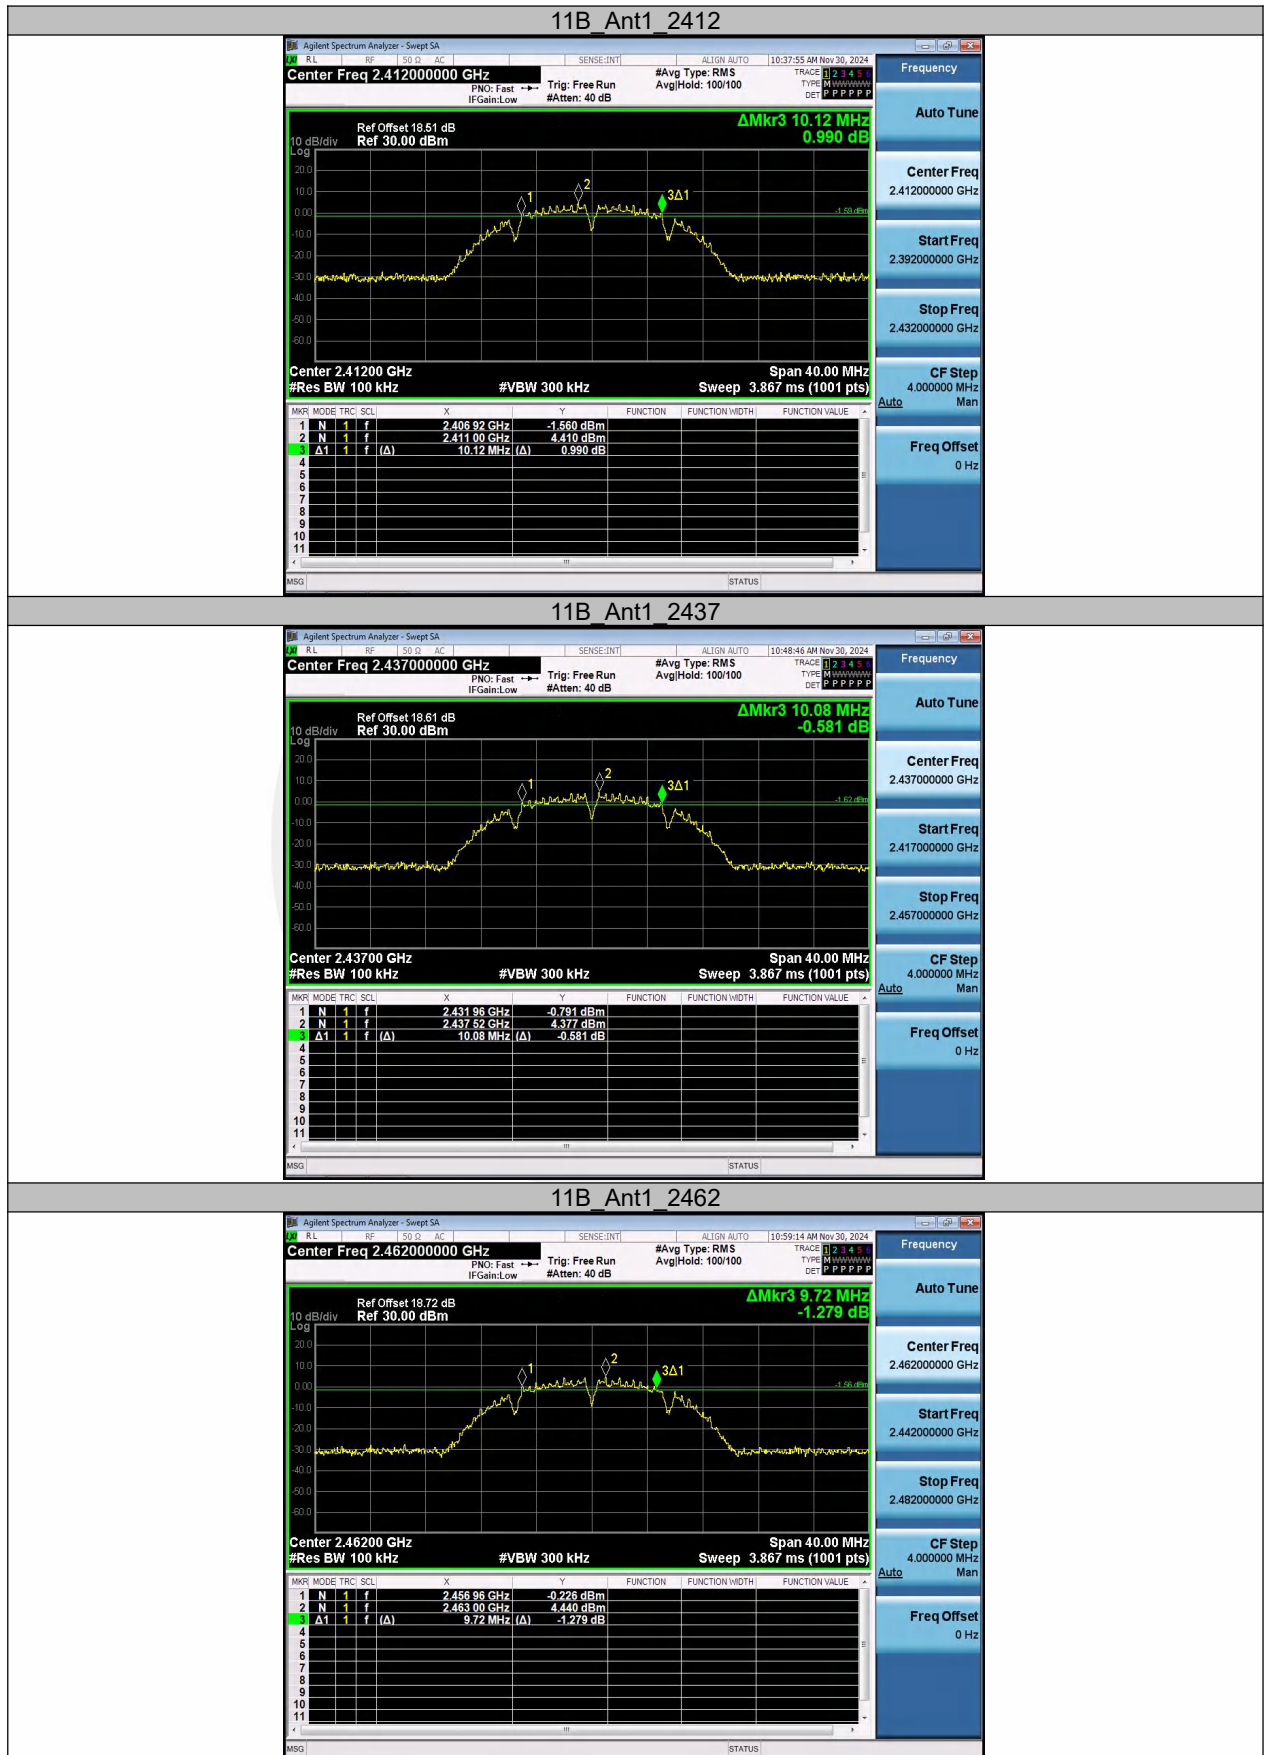


11G Ant1 2412

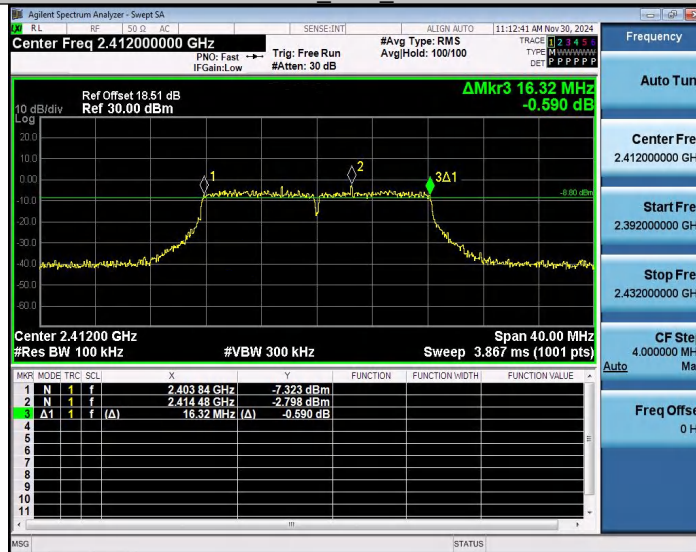

11G Ant1 2437

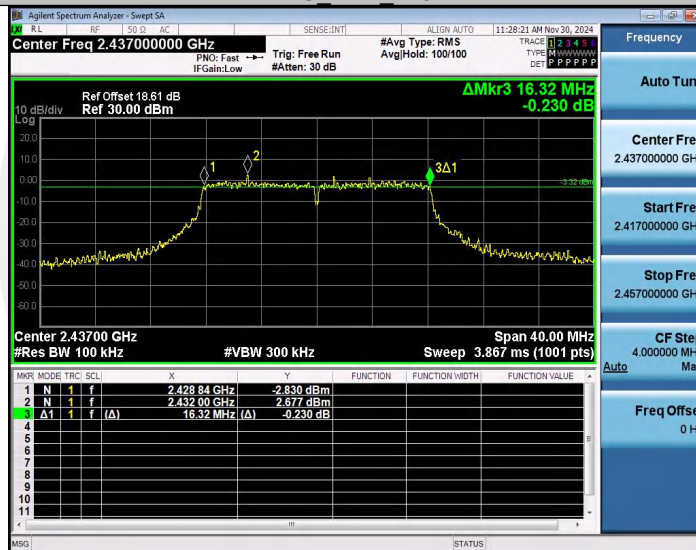

11G Ant1 2462

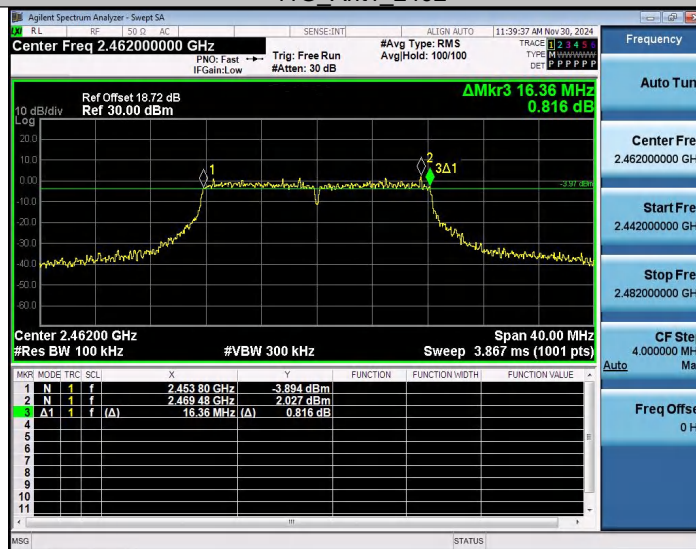

Agilent Spectrum Analyzer - Sweep SA

Center Freq 2.412000000 GHz

Ref Offset 18.51 dB
Ref 30.00 dBm

PNO: Fast → Trig: Free Run
IFGain: Low #Atten: 30 dB

#Avg Type: RMS
Avg/Hold: 100/100

01:04:43 PM Nov 30, 2024

TRACE 1 2 3 4 5
TYPE M W W W W W W W
DET P P P P P P

Frequency

Auto Tun

Center Freq
2.41200000 GHz

Start Freq
2.39200000 GHz

Stop Freq
2.43200000 GHz

CF Step
4.000000 MHz

Auto

Freq Offset
0 Hz

Center 2.412000 GHz
#Res BW 100 kHz #VBW 300 kHz Span 40.00 MHz
Sweep 3.867 ms (1001 pts)

MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.403 20 GHz	-6.190 dBm			
2	N	1	f	2.413 20 GHz	-6.667 dBm			
3	Δ1	1	f (Δ)	17.56 MHz (Δ)	0.343 dB			

Agilent Spectrum Analyzer - Swept SA

01:17:39 PM Nov 30, 2014

Center Freq 2.437000000 GHz Span 4.00 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 3.867 ms (1001 pts)

DMkr3 17.28 MHz 0.443 dB

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.428 24 GHz	-3.447 dBm			
2	N	1	f	2.439 48 GHz	2.359 dBm			
3	Δ1	1	f (Δ)	17.28 MHz (Δ)	0.443 dB			

Agilent Spectrum Analyzer - Swept SA

Center Freq 2.462000000 GHz

Ref Offset 18.72 dB
Ref 30.00 dBm

PMO: Fast →
IF Gain: Low

Trig: Free Run
#Atten: 30 dB

#Avg Type: RMS
Avg/Hold: 100/100

01:30:45 PM Nov 30, 2024

TRACE 1 2 3 4 5
TYPE M W W W W W W W
DET P P P P P P

Frequency

Auto Tun

Center Freq
2.462000000 GHz

Start Freq
2.442000000 GHz

Stop Freq
2.482000000 GHz


CF Stop
4.000000 MHz

Auto


Freq Offset
0 Hz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.453 52 GHz	-2.962 dBm			
2	N	1	f	2.463 24 GHz	2.364 dBm			
3	Δ1	1	f (Δ)	16.64 MHz (Δ)	-0.430 dB			


11N40SISO_Ant1_2422

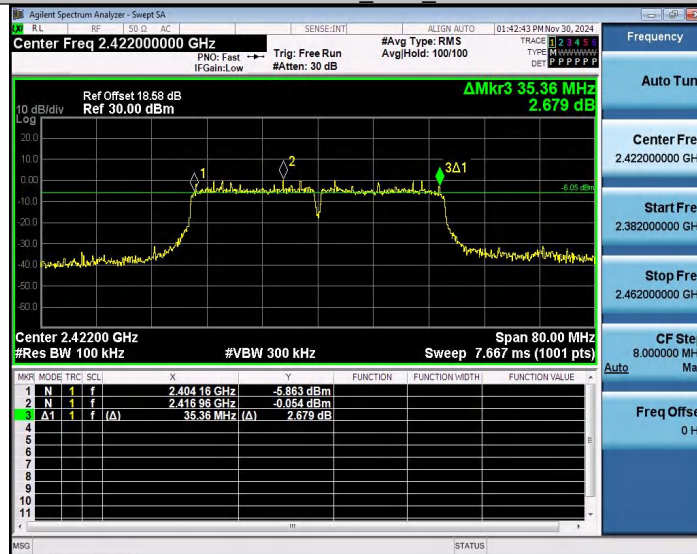

11N40SISO_Ant1_2437

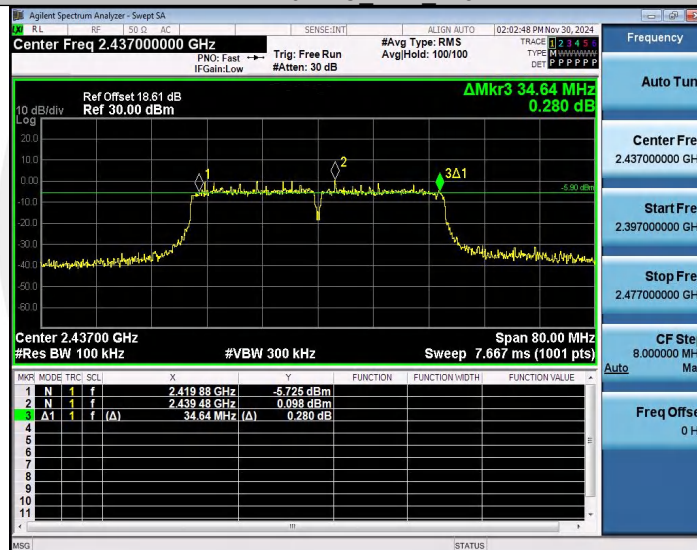

11N40SISO_Ant1_2452

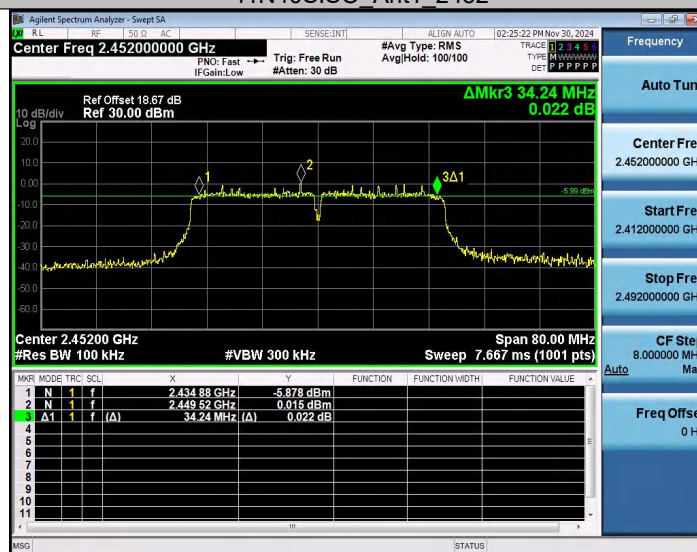

8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part15.247 (b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

■ According to FCC Part15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The testing follows FCC public Notice DA 00-705 Measurement Guidelines.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


Note: If antenna Gain exceeds 6 dBi, then Output power Limit=30-(Gain- 6)

8.2.5 Test Results


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

TestMode	Antenna	Frequen cy[MHz]	Peak Power[dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit[dBm]	Verdict
11B	Ant1	2412	14.11	≤30.00	16.32	≤36.00	PASS
		2437	13.69	≤30.00	15.90	≤36.00	PASS
		2462	13.87	≤30.00	16.08	≤36.00	PASS
11G	Ant1	2412	14.18	≤30.00	16.39	≤36.00	PASS
		2437	13.80	≤30.00	16.01	≤36.00	PASS
		2462	13.73	≤30.00	15.94	≤36.00	PASS
11N20SIS O	Ant1	2412	14.34	≤30.00	16.55	≤36.00	PASS
		2437	13.86	≤30.00	16.07	≤36.00	PASS
		2462	13.90	≤30.00	16.11	≤36.00	PASS
11N40SIS O	Ant1	2422	14.70	≤30.00	16.91	≤36.00	PASS
		2437	13.91	≤30.00	16.12	≤36.00	PASS
		2452	13.85	≤30.00	16.06	≤36.00	PASS




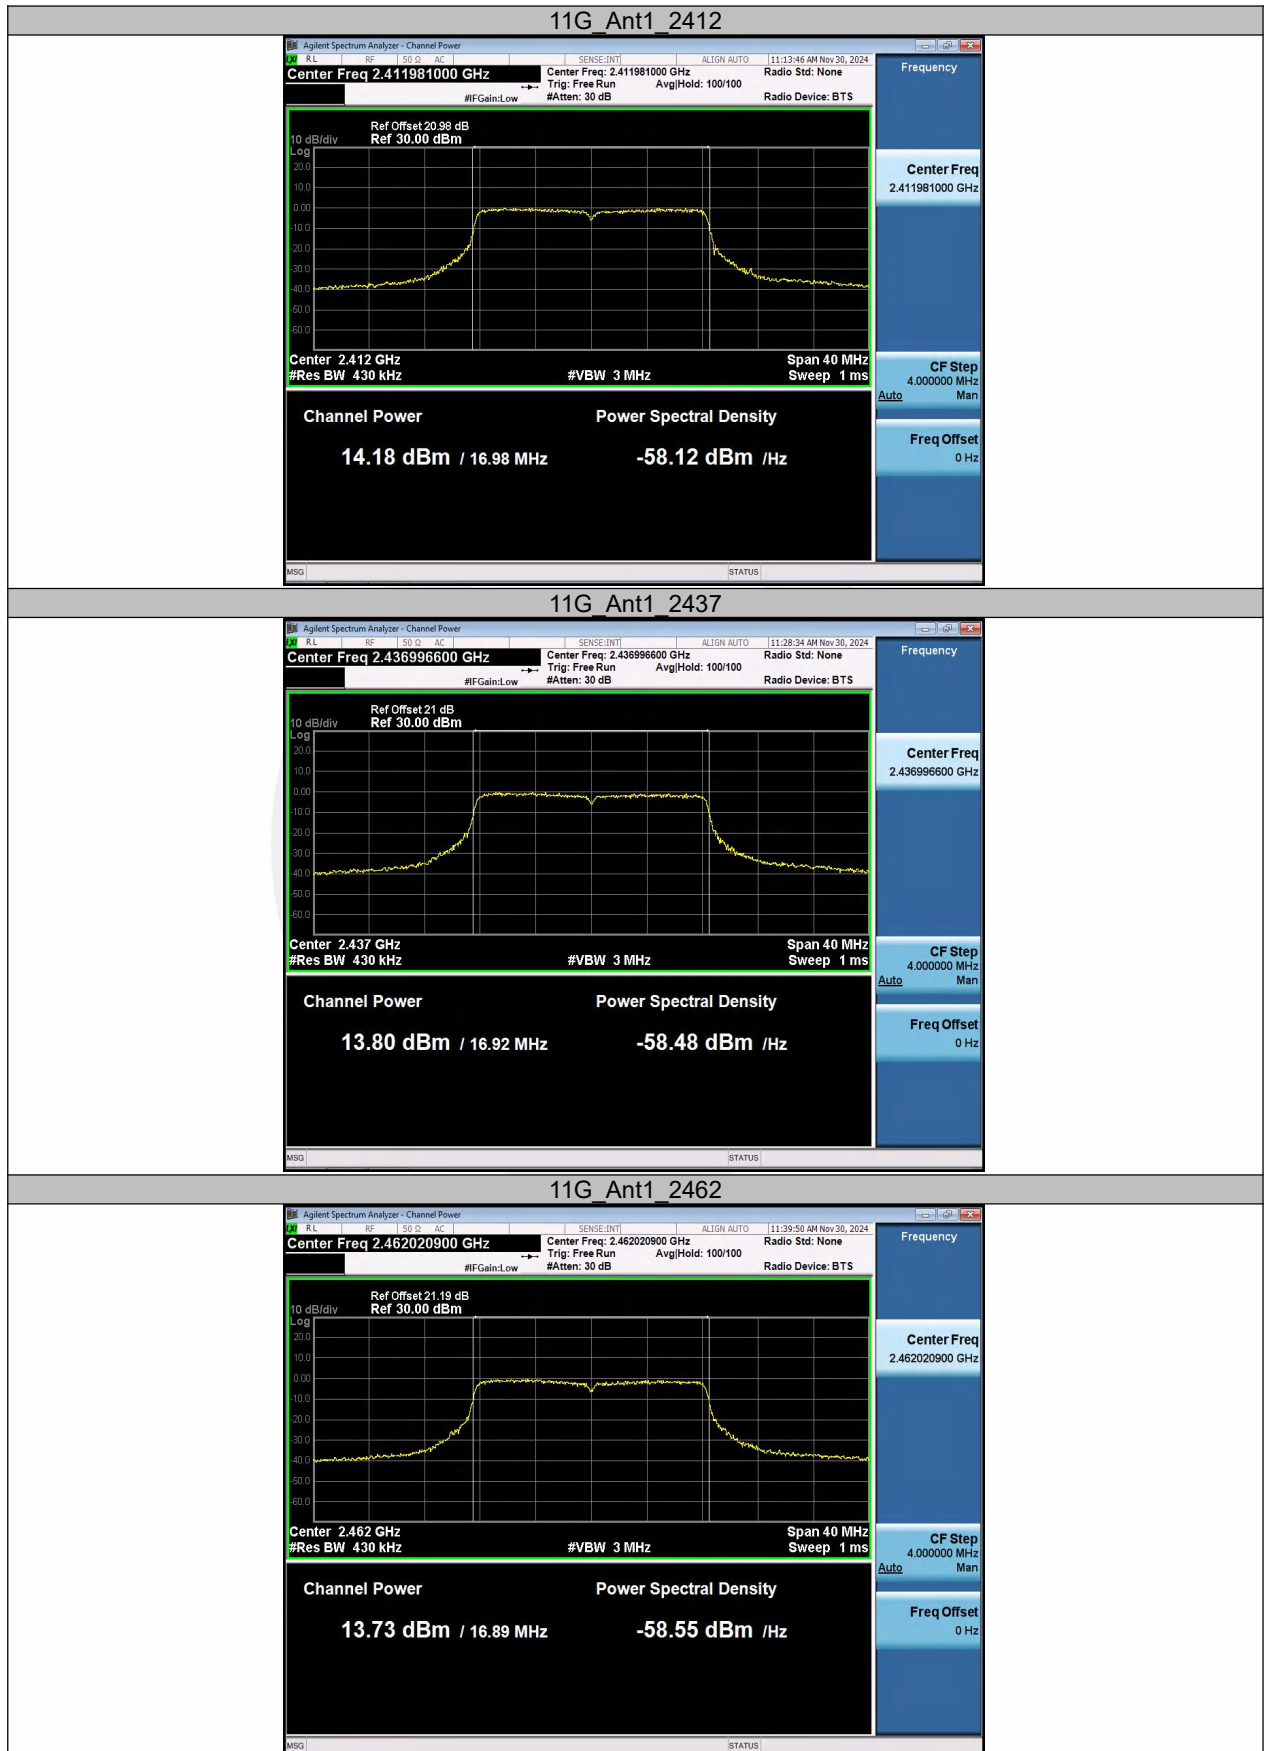


11N20SISO_Ant1_2412

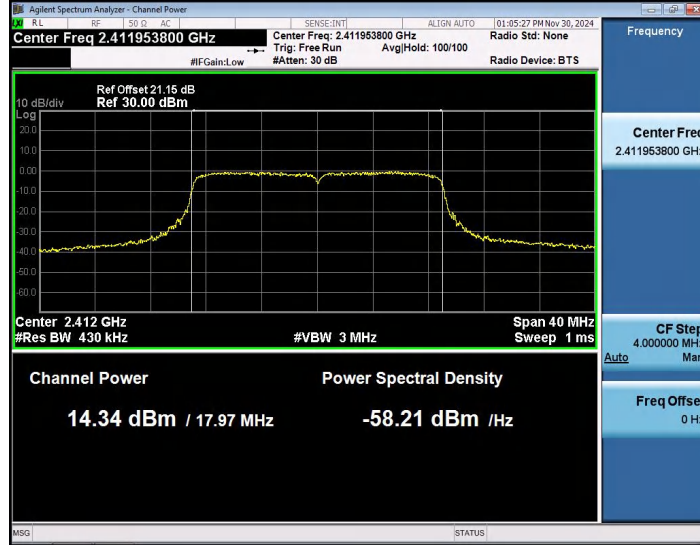


11N20SISO_Ant1_2437

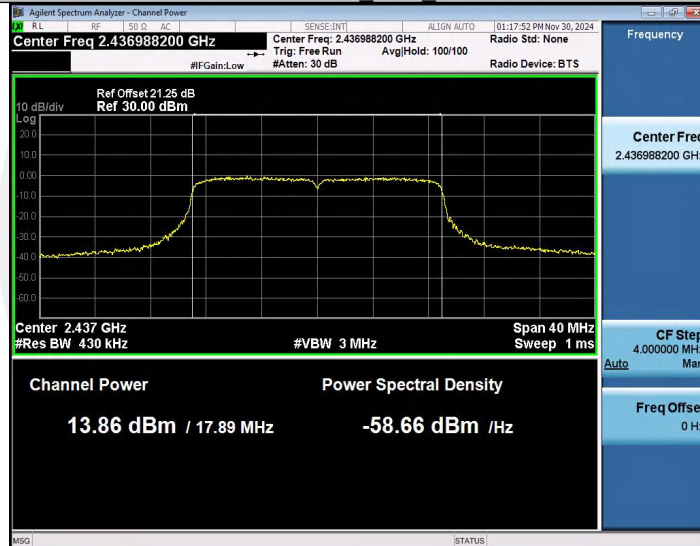


11N20SISO_Ant1_2462

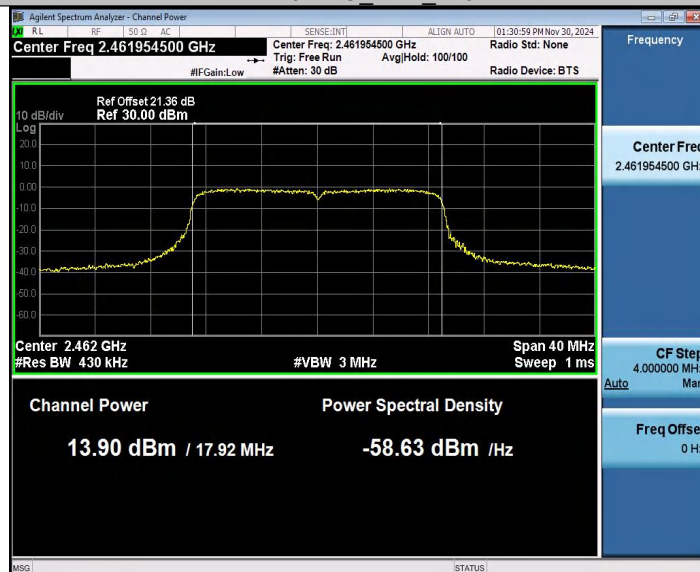


11N40SISO_Ant1_2422

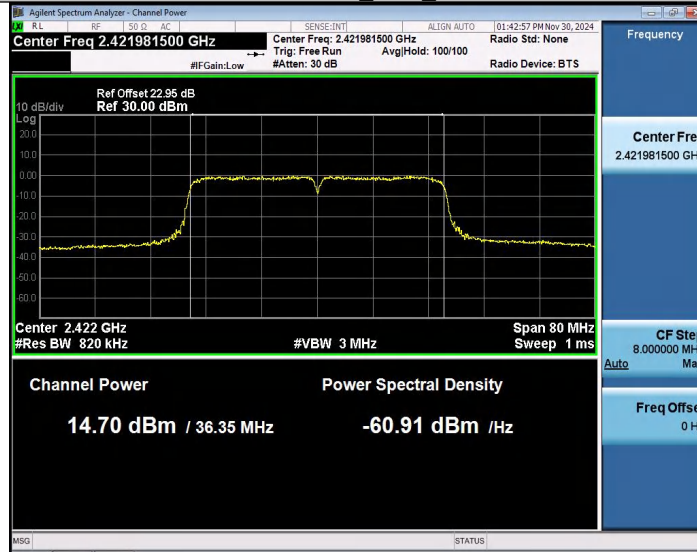

11N40SISO_Ant1_2437

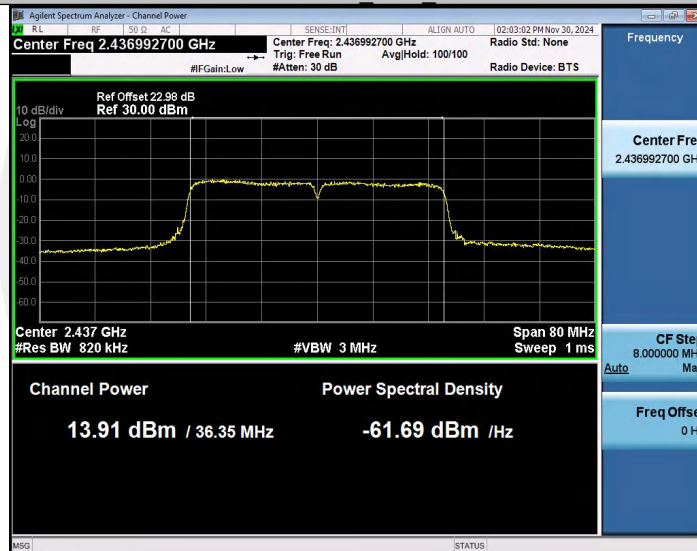


11N40SISO_Ant1_2452

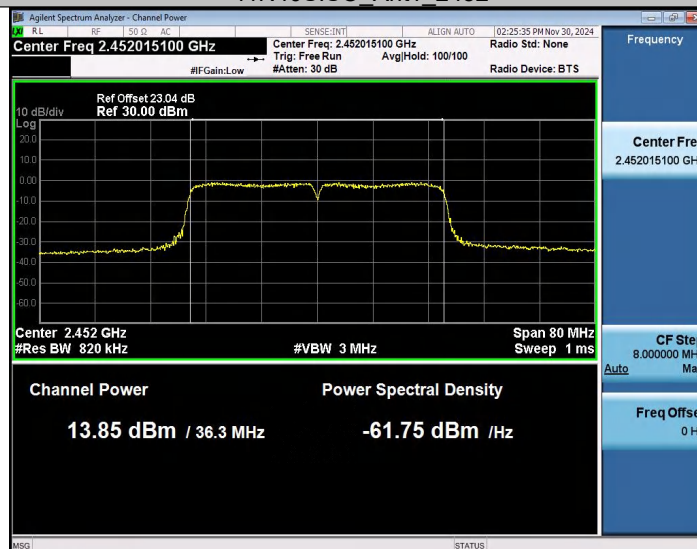


Duty Cycle

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11B	Ant1	2412	8.20	9.20	89.13	0.50
		2437	8.20	9.20	89.13	0.50
		2462	8.20	9.20	89.13	0.50
11G	Ant1	2412	1.36	2.40	56.67	2.47
		2437	1.36	2.36	57.63	2.39
		2462	1.36	2.40	56.67	2.47
11N20SISO	Ant1	2412	1.24	2.28	54.39	2.64
		2437	1.24	2.28	54.39	2.64
		2462	1.24	2.28	54.39	2.64
11N40SISO	Ant1	2422	0.60	1.64	36.59	4.37
		2437	0.60	1.64	36.59	4.37
		2452	0.60	1.64	36.59	4.37


11B_Ant1_2412

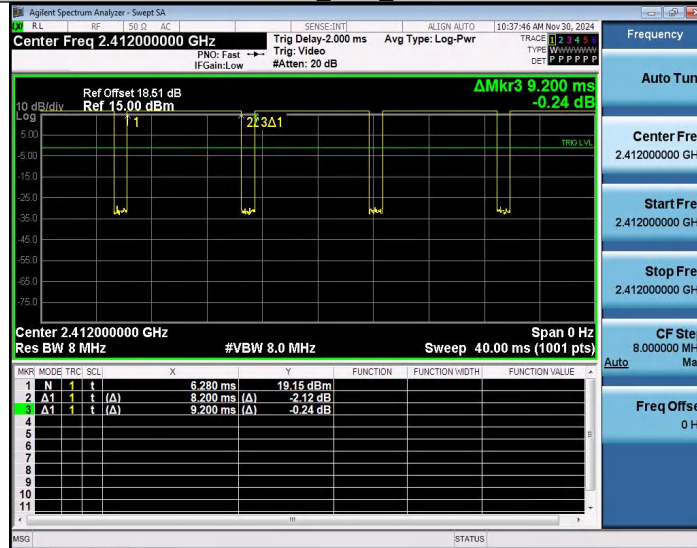


11B_Ant1_2437

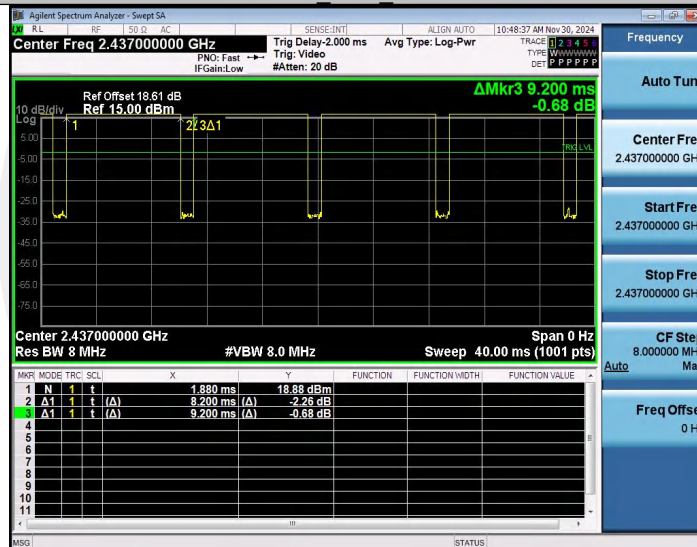


11B_Ant1_2462

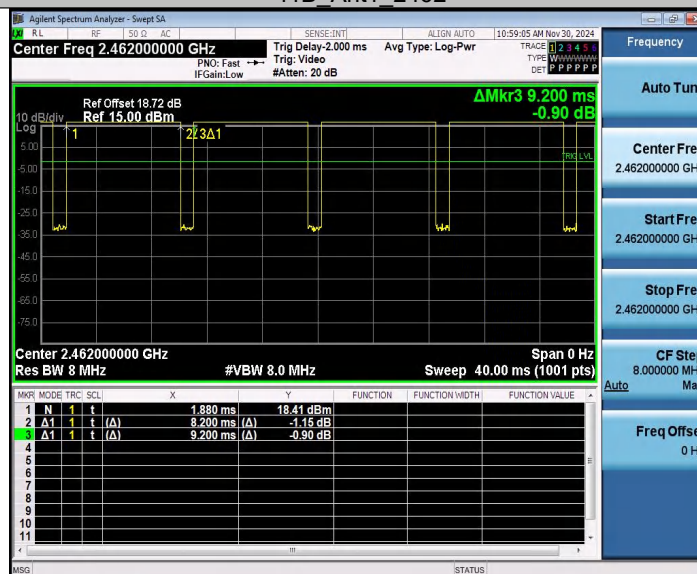


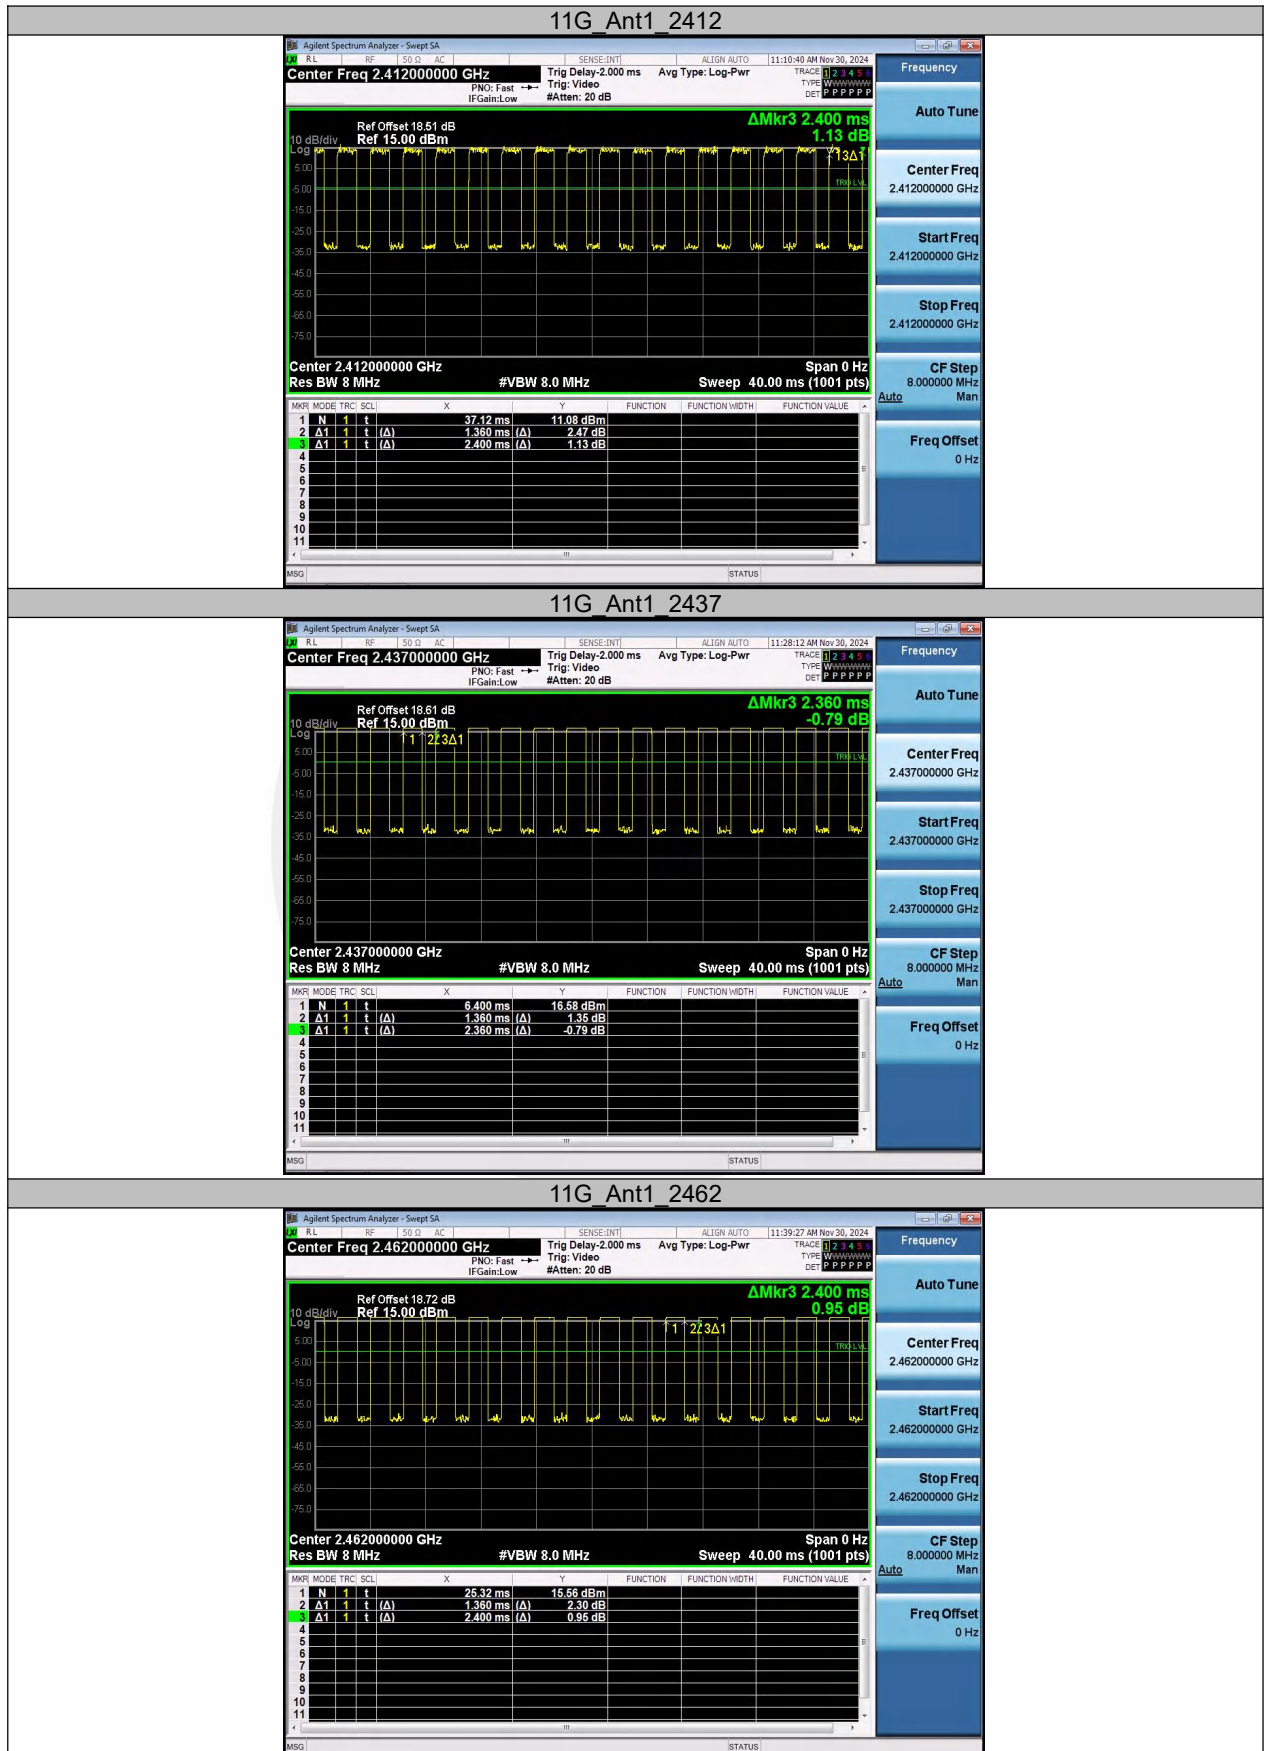


11N20SISO_Ant1_2412

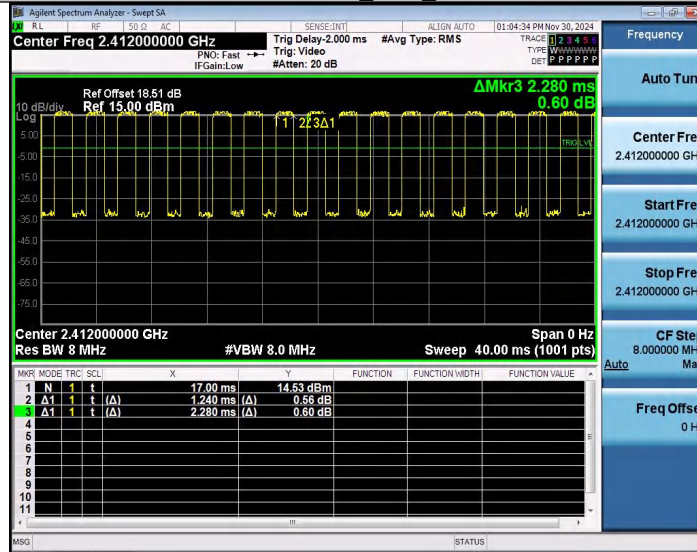


11N20SISO_Ant1_2437

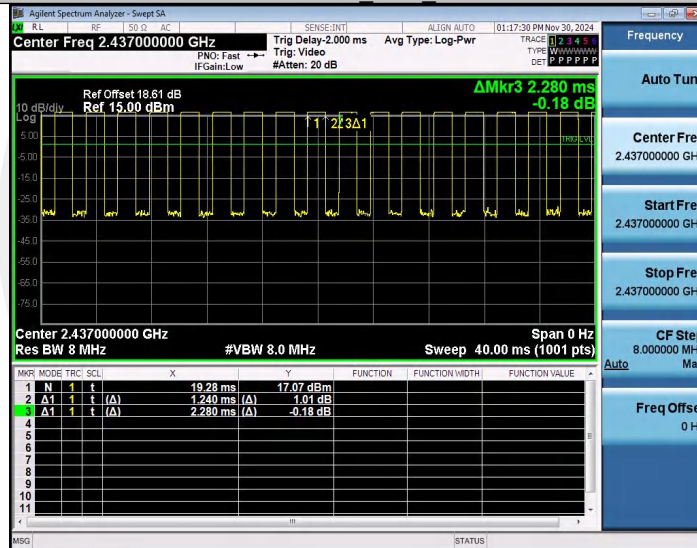


11N20SISO_Ant1_2462

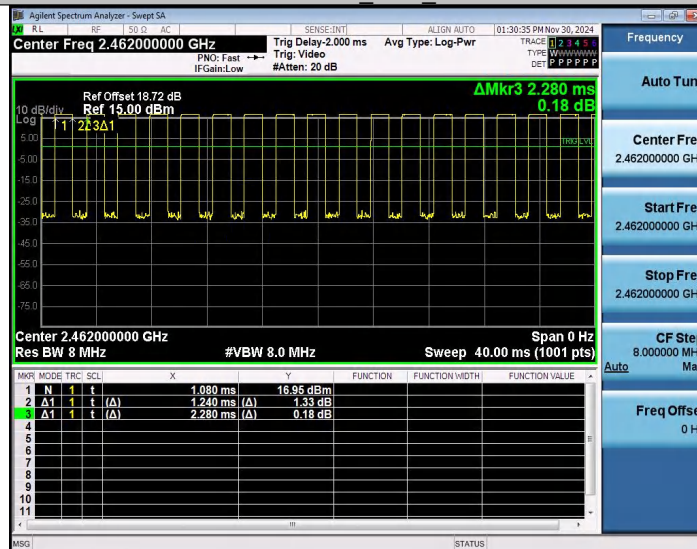

11N40SISO_Ant1_2422

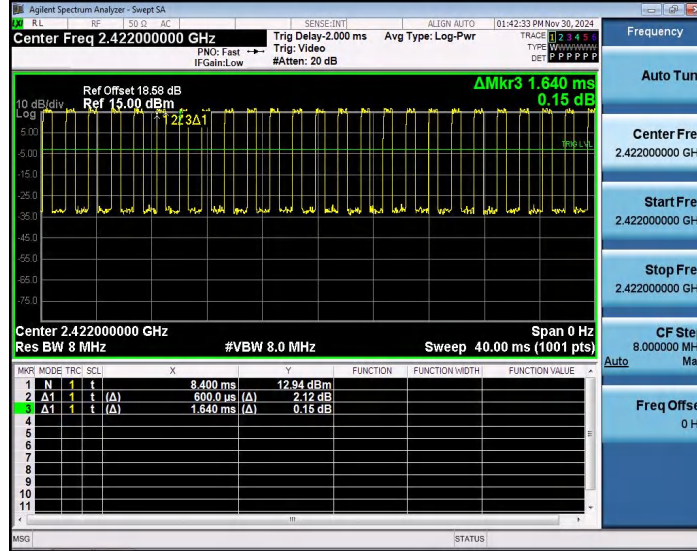

11N40SISO_Ant1_2437

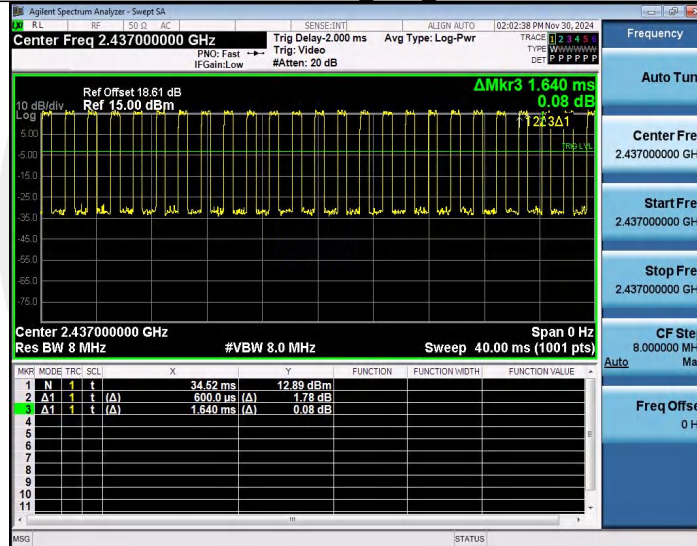

11N40SISO_Ant1_2452

