






11AC20SISO-Ant1-5260

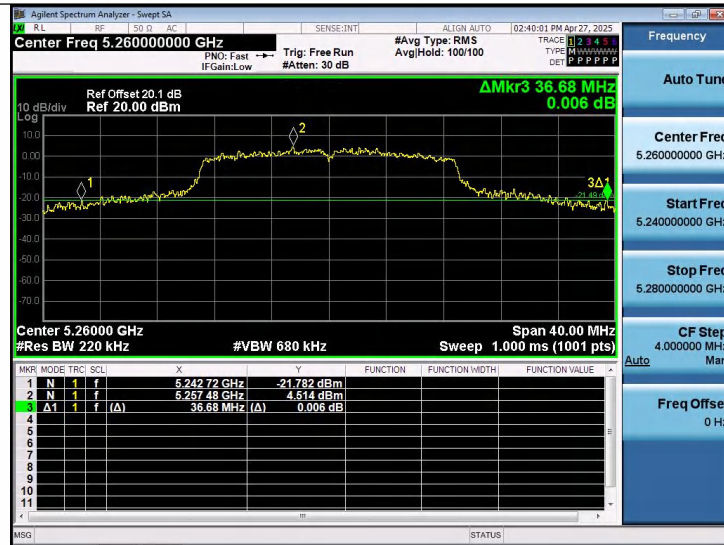


11AC20SISO-Ant1-5280

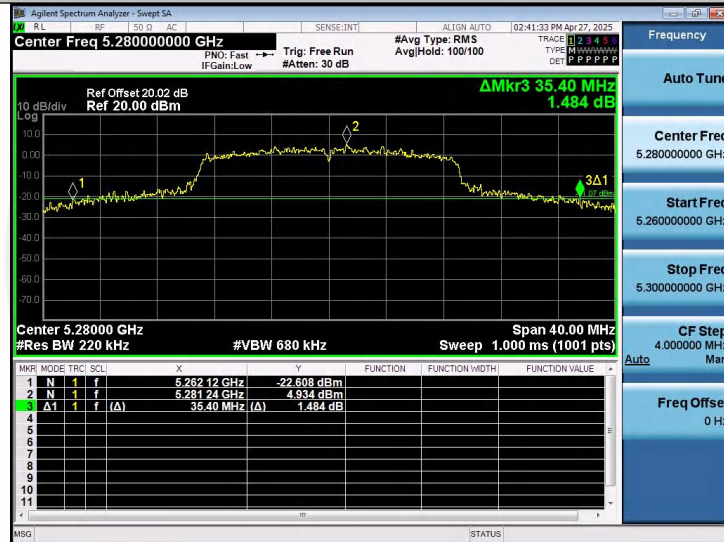


11AC20SISO-Ant1-5320

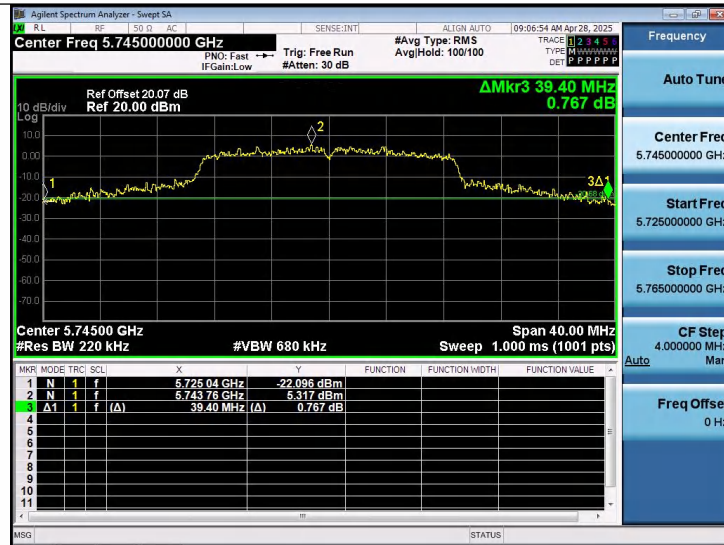


11AC20SISO-Ant1-5745

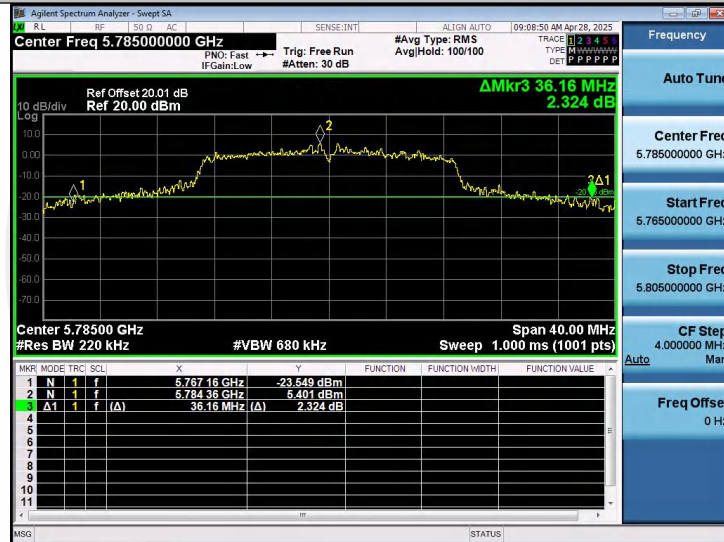

11AC20SISO-Ant1-5785

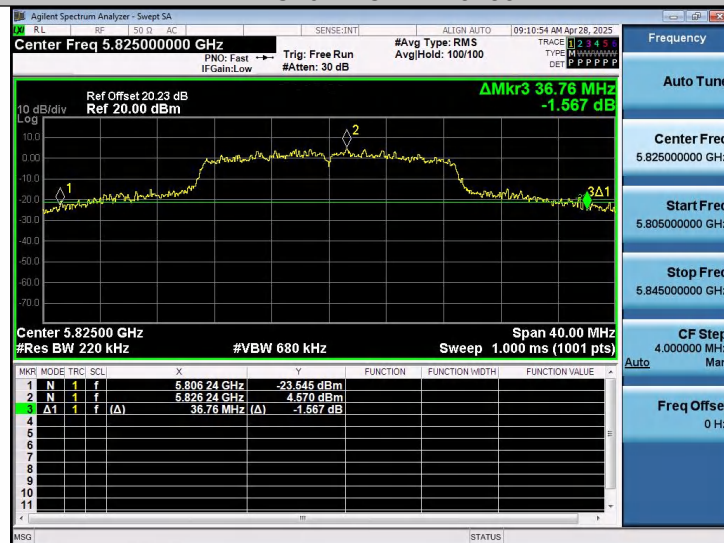


11AC20SISO-Ant1-5825

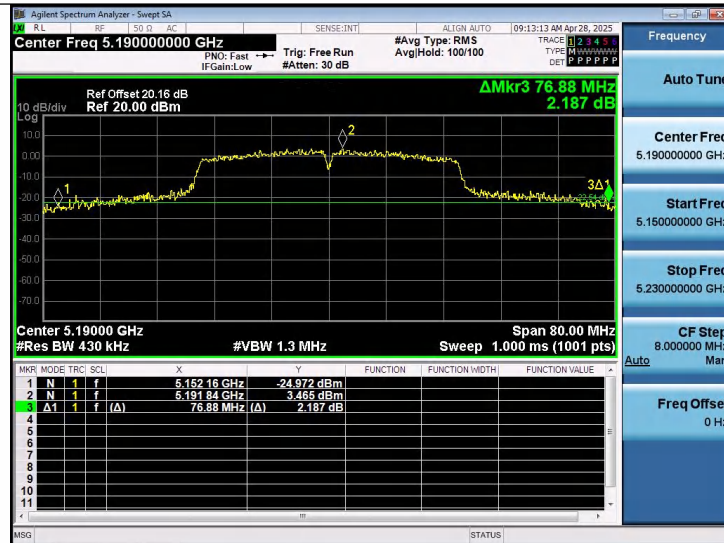


11AC40SISO-Ant1-5190




11AC40SISO-Ant1-5230

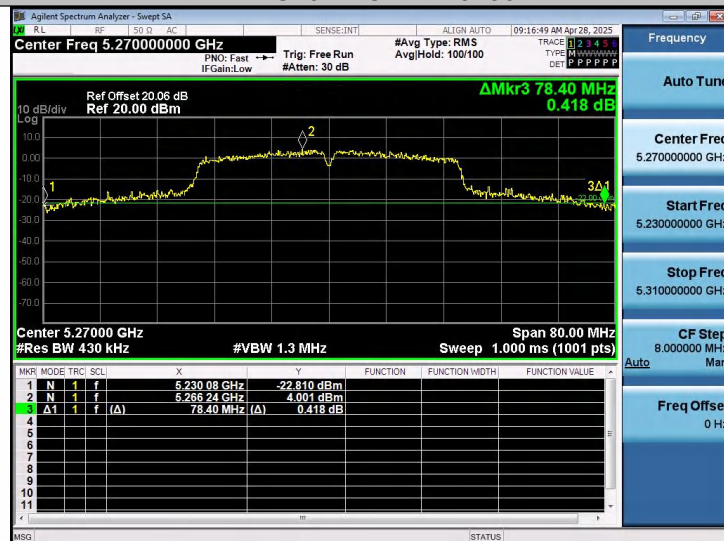

11AC40SISO-Ant1-5270

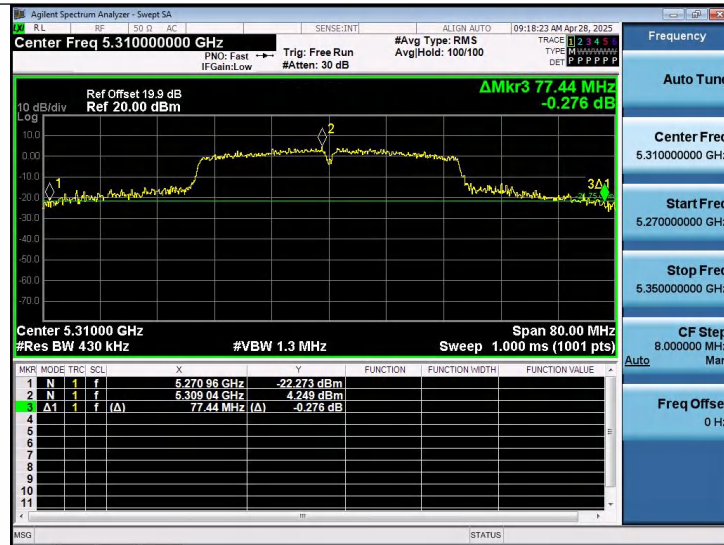


11AC40SISO-Ant1-5310

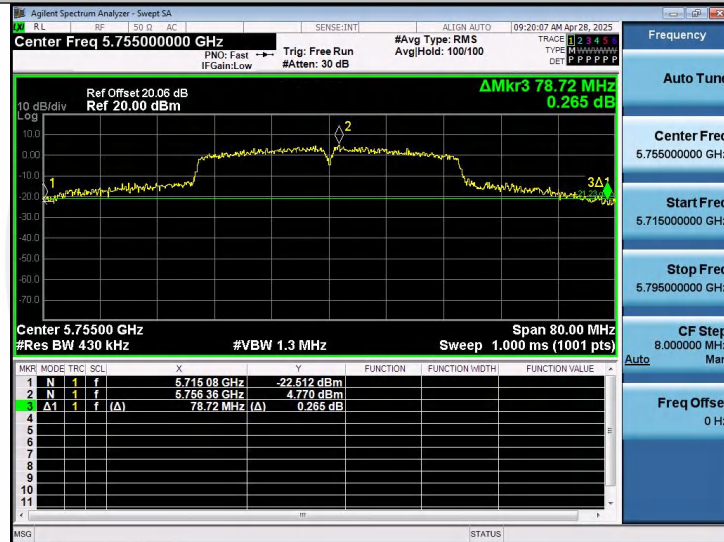


11AC40SISO-Ant1-5755




11AC40SISO-Ant1-5795

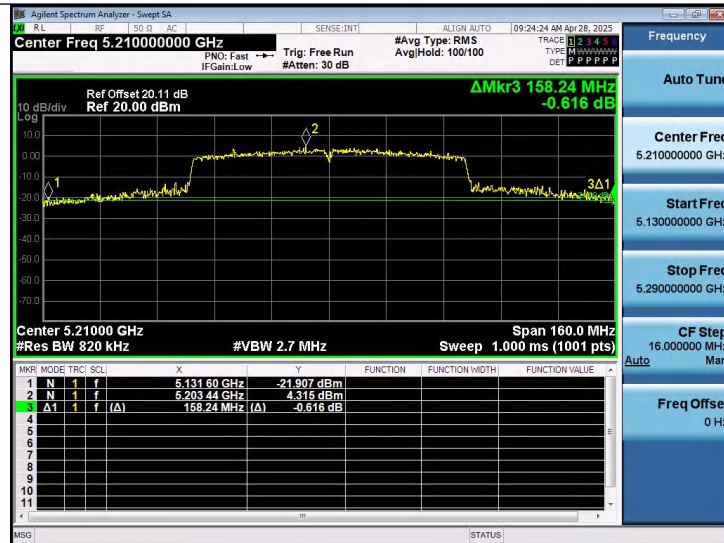

11AC80SISO-Ant1-5210

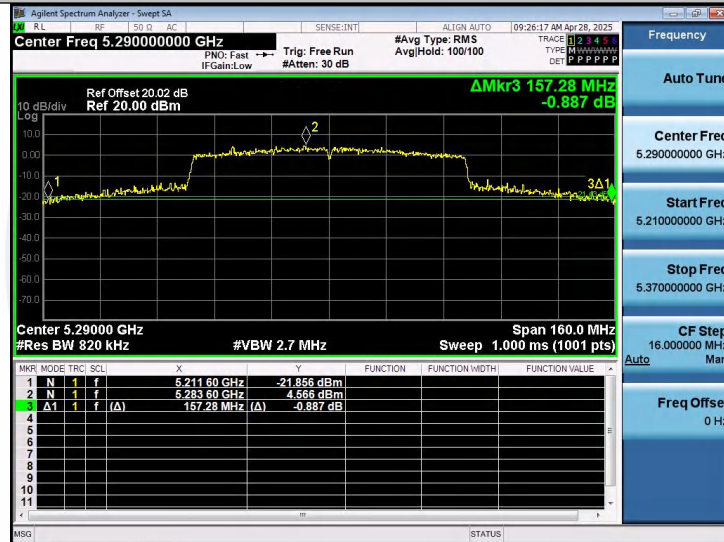

11AC80SISO-Ant1-5290

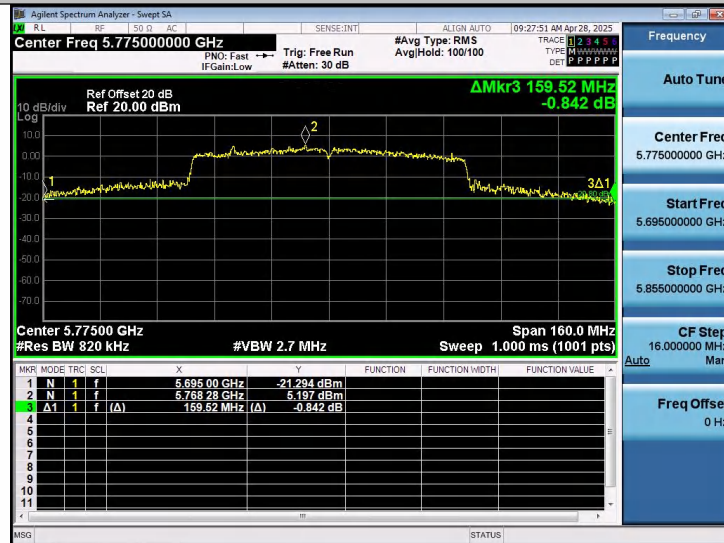

11AC80SISO-Ant1-5775

## Occupied channel bandwidth



11A-Ant1-5180



11A-Ant1-5200



11A-Ant1-5240



11A-Ant1-5260




11A-Ant1-5280



11A-Ant1-5320




11A-Ant1-5745

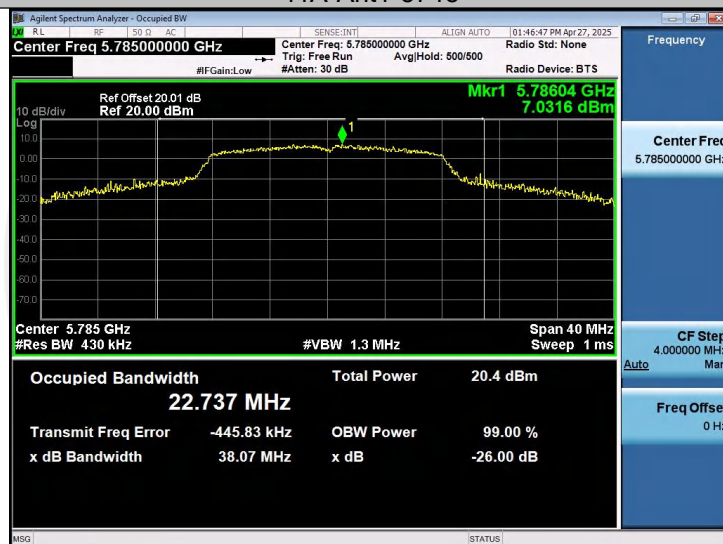

11A-Ant1-5785



11A-Ant1-5825

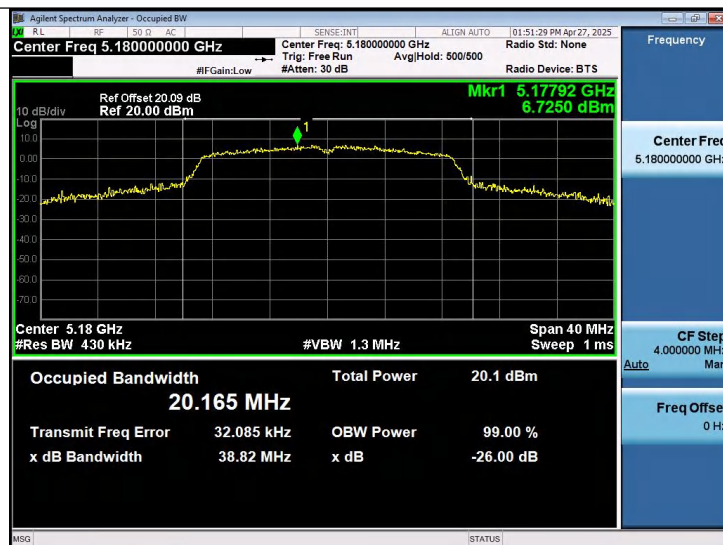

11N20SISO-Ant1-5180



11N20SISO-Ant1-5200




11N20SISO-Ant1-5240



11N20SISO-Ant1-5260



11N20SISO-Ant1-5280

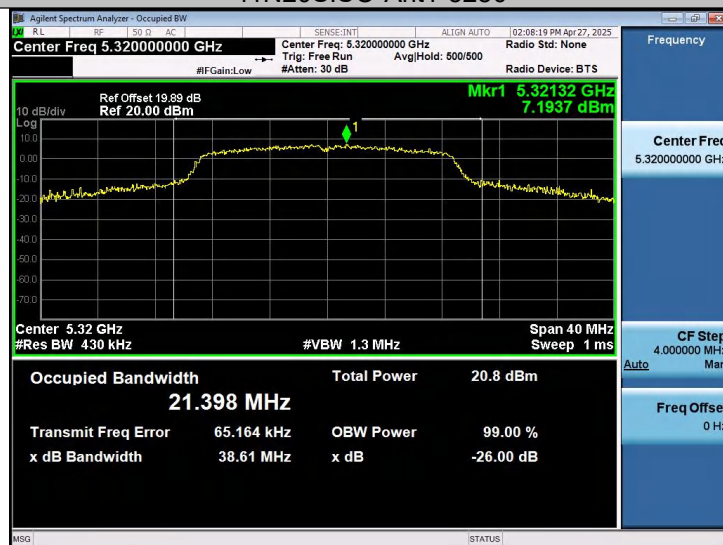

11N20SISO-Ant1-5320



11N20SISO-Ant1-5745




11N20SISO-Ant1-5785




11N20SISO-Ant1-5825




11N40SISO-Ant1-5190

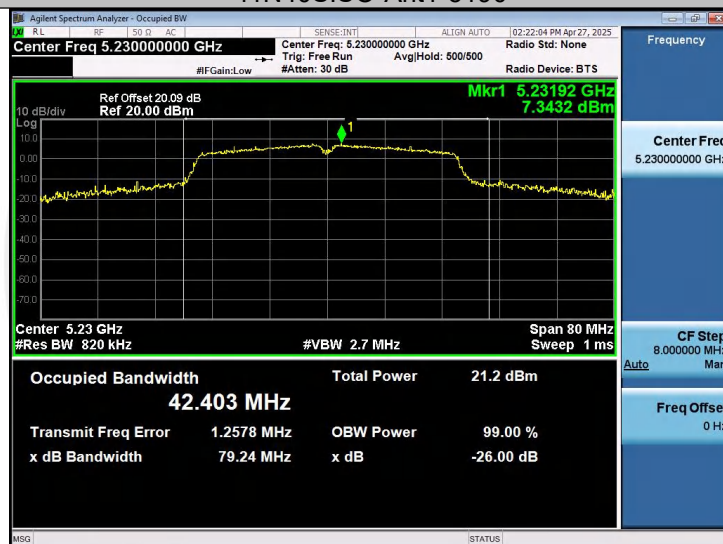


11N40SISO-Ant1-5230

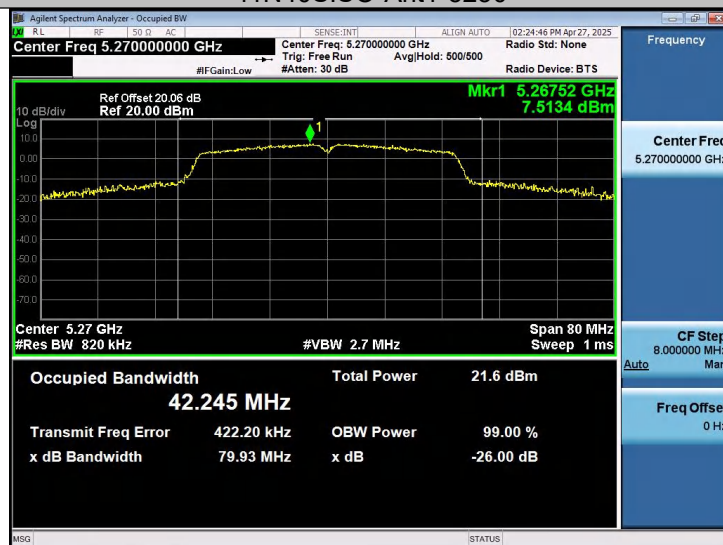

11N40SISO-Ant1-5270

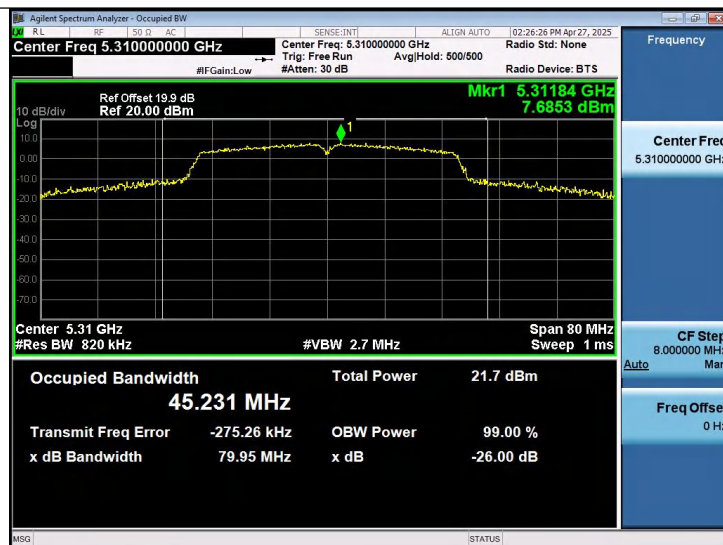


11N40SISO-Ant1-5310

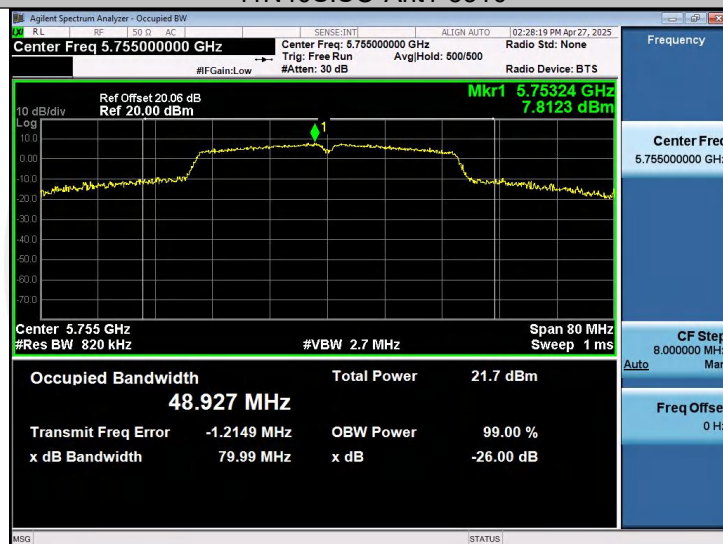

11N40SISO-Ant1-5755



11N40SISO-Ant1-5795

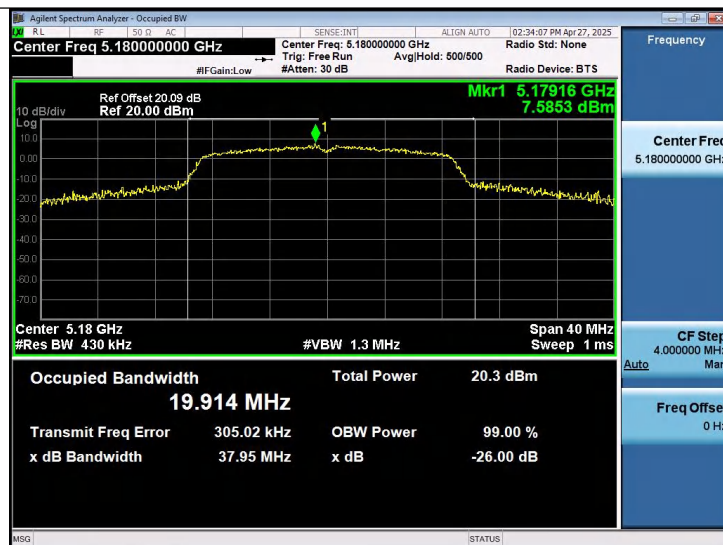


11AC20SISO-Ant1-5180




11AC20SISO-Ant1-5200




11AC20SISO-Ant1-5240

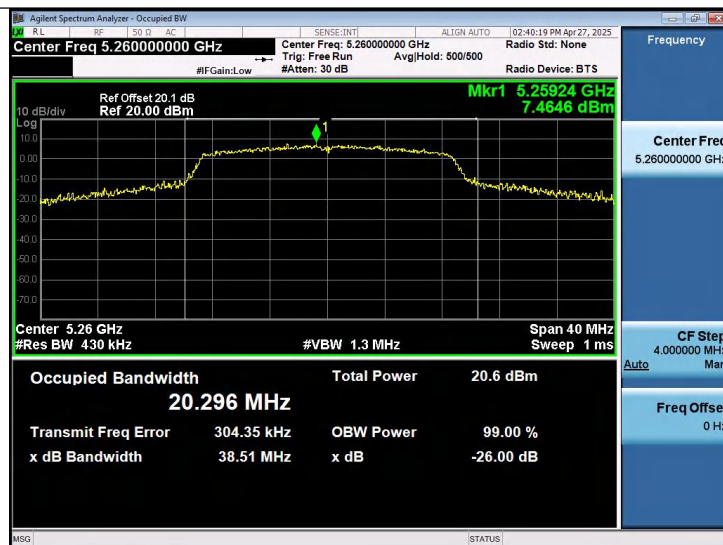


11AC20SISO-Ant1-5260

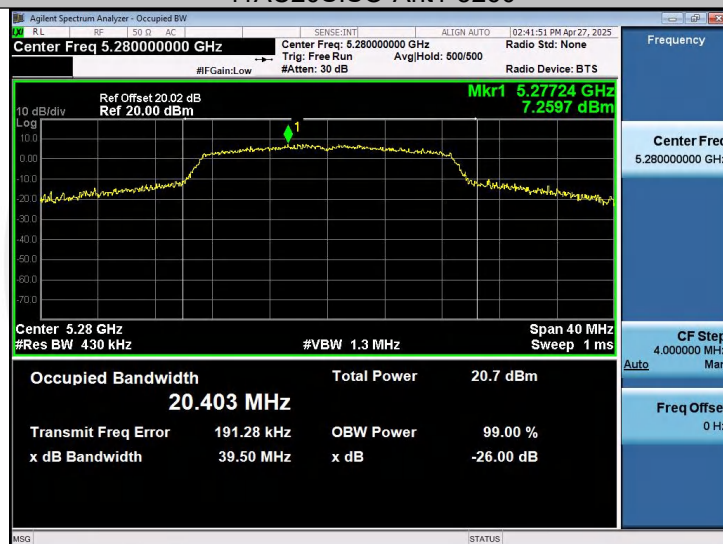

11AC20SISO-Ant1-5280

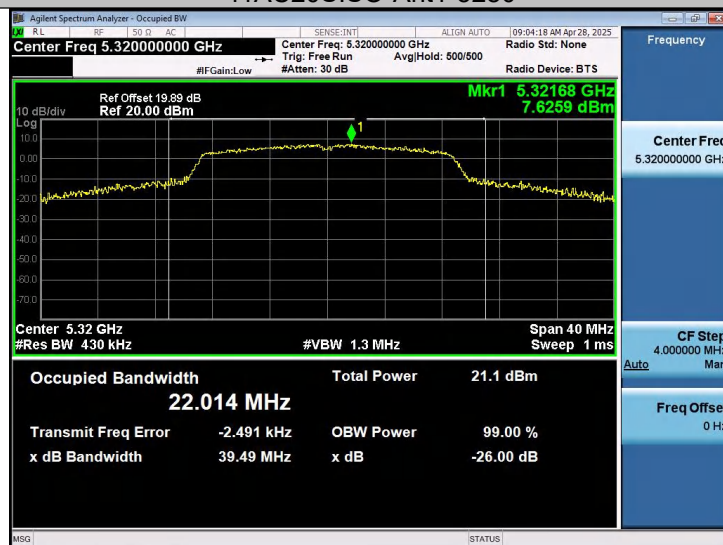

11AC20SISO-Ant1-5320

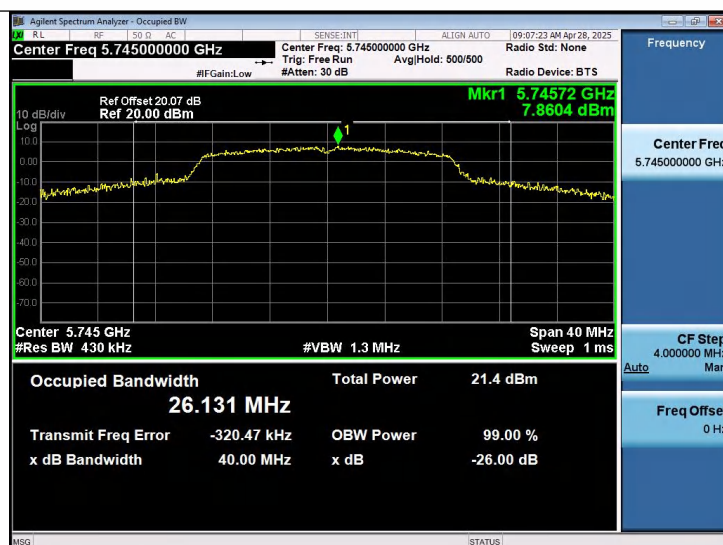


11AC20SISO-Ant1-5745




11AC20SISO-Ant1-5785




11AC20SISO-Ant1-5825

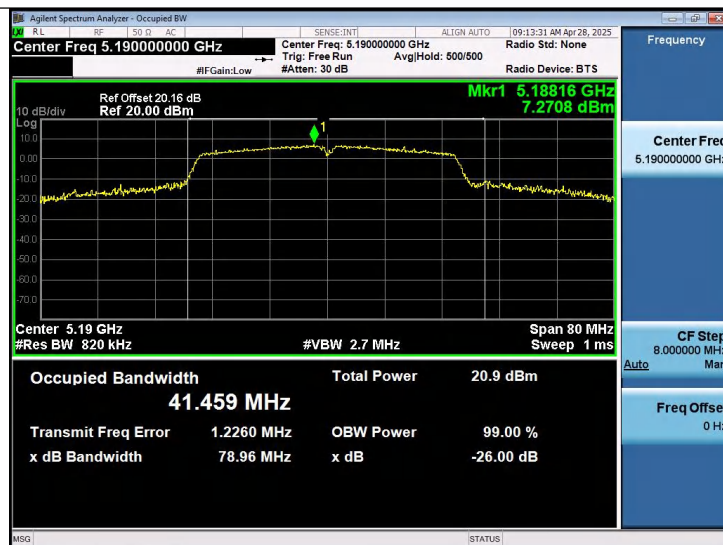


11AC40SISO-Ant1-5190

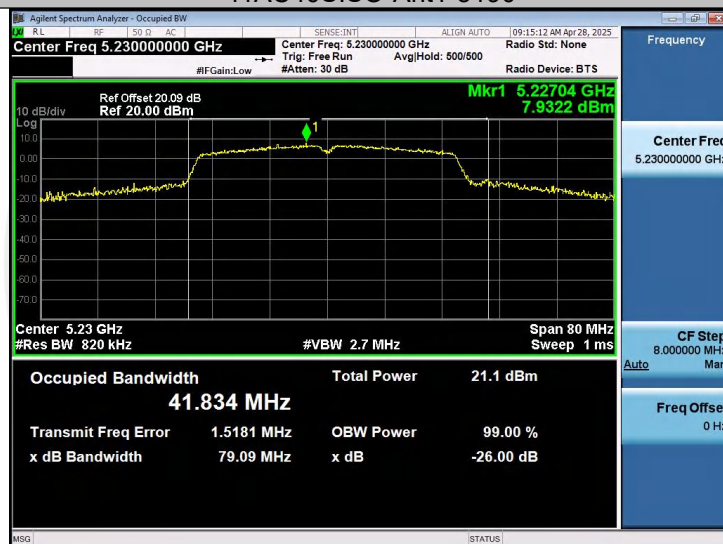


11AC40SISO-Ant1-5230

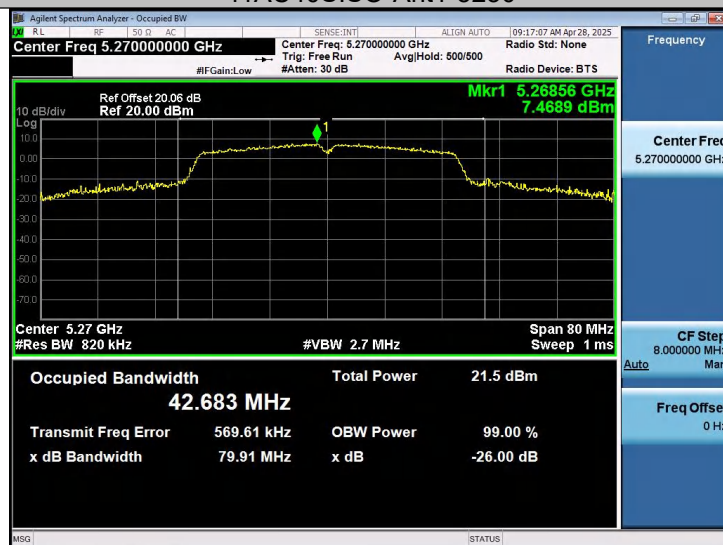


11AC40SISO-Ant1-5270

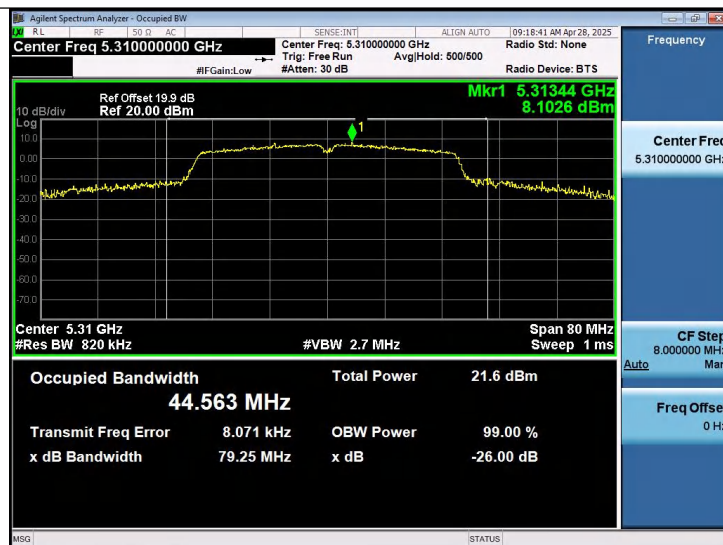


11AC40SISO-Ant1-5310

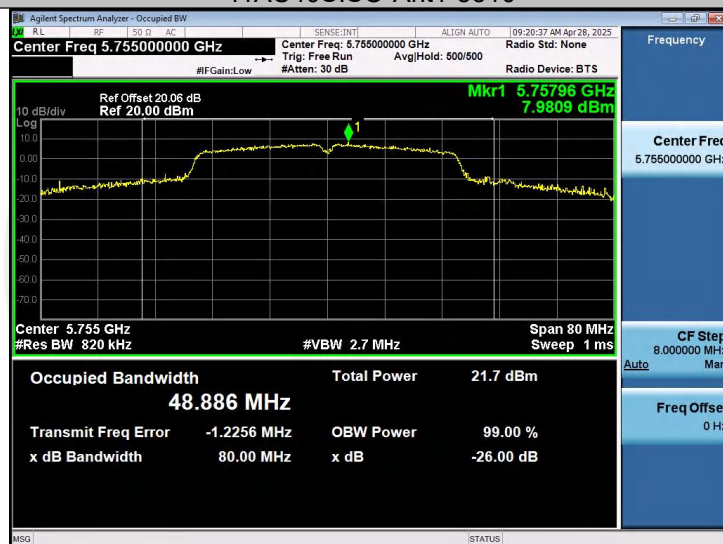

11AC40SISO-Ant1-5755

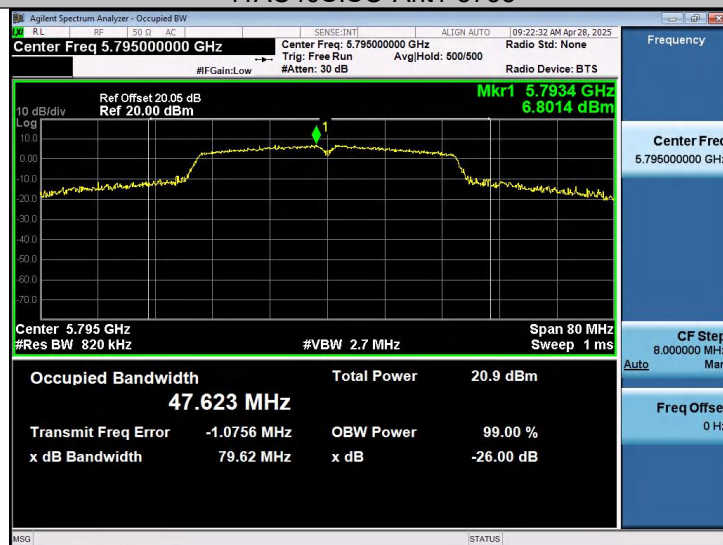


11AC40SISO-Ant1-5795

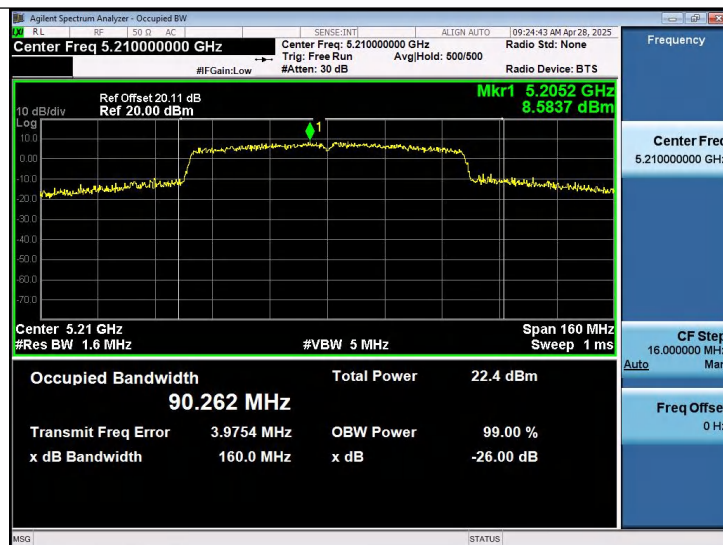

11AC80SISO-Ant1-5210



11AC80SISO-Ant1-5290

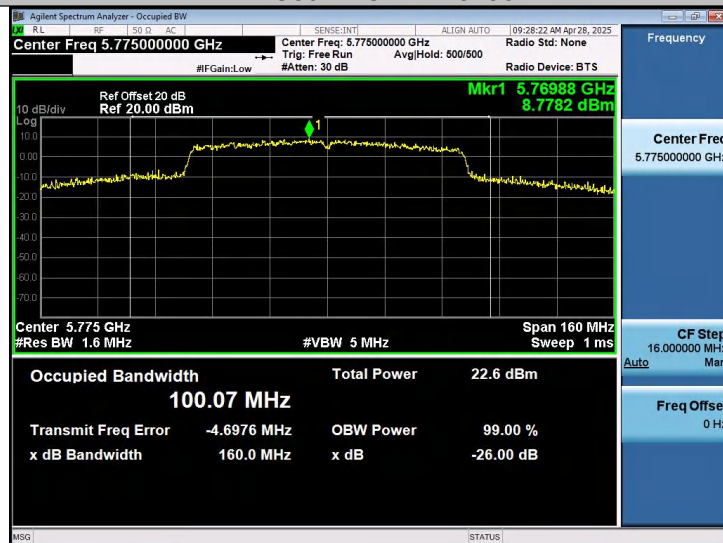

11AC80SISO-Ant1-5775

## 8.2 MAXIMUM CONDUCTED OUTPUT POWER

### 8.2.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I  
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C  
According to FCC Part 15.407(a)(3) for UNII Band III  
According to 789033 D02 Section II(E)

### 8.2.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(a) (2) The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) for the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30