



TEST REPORT

Applicant: ZKTECO CO., LTD.

Address: No.32,Pingshan Industrial Avenue, Tangxia Town, Dongguan City, Guangdong Province, China 523728

Product Name: Smart Lock

FCC ID: 2AJ9T-75405

Standard(s): 47 CFR Part 15, Subpart C(15.225)
ANSI C63.10-2020

Report Number: 2502R48766E-RF-00B

Report Date: 2025/5/29

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Reviewed By: Pedro Yun

Approved By: Gavin Xu

Title: Project Engineer

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL▲	5
1.4 EQUIPMENT MODIFICATIONS	5
2. SUMMARY OF TEST RESULTS	6
3. DESCRIPTION OF TEST CONFIGURATION	7
3.1 EUT OPERATION CONDITION	7
3.2 EUT EXERCISE SOFTWARE	7
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	7
3.4 SUPPORT CABLE LIST AND DETAILS	7
3.5 BLOCK DIAGRAM OF TEST SETUP	7
3.6 TEST FACILITY	8
3.7 MEASUREMENT UNCERTAINTY	8
4. REQUIREMENTS AND TEST RESULTS	9
4.1 AC LINE CONDUCTED EMISSIONS	9
4.2 RADIATED SPURIOUS EMISSIONS	10
4.2.1 Applicable Standard	10
4.2.2 EUT Setup	10
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	11
4.2.4 Test Procedure	12
4.2.5 Corrected Result & Margin Calculation	12
4.2.6 Test Data	13
4.3 20 dB EMISSION BANDWIDTH	25
4.3.1 Applicable Standard	25
4.3.2 EUT Setup	25
4.3.3 Test Procedure	25
4.3.4 Test Data	27
4.4 FREQUENCY STABILITY	28
4.4.1 Applicable Standard	28
4.4.2 EUT Setup	28
4.4.3 Test Procedure	28
4.4.4 Test Result	30
4.5 ANTENNA REQUIREMENT	31
4.5.1 Applicable Standard	31
4.5.2 Judgment	31
EXHIBIT A - EUT PHOTOGRAPHS	32
EXHIBIT B - TEST SETUP PHOTOGRAPHS	33
EXHIBIT C - RF EXPOSURE EVALUATION	34

APPLICABLE STANDARD	34
CALCULATION FORMULA:	34
CALCULATED DATA:	34

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2502R48766E-RF-00B	Original Report	2025/5/29

1. GENERAL INFORMATION

1.1 General Description of Equipment under Test

EUT Name:	Smart Lock
EUT Model:	SL03-T420H
Operation Frequency:	13.56 MHz
Modulation Type:	ASK
Rated Input Voltage:	DC 6V (1.5V*4)
Serial Number:	2ZX6-1
EUT Received Date:	2025/3/18
EUT Received Status:	Good

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.3 Antenna Information Detail ▲

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Loop	Unknown	13.56MHz	Unknown
The design of compliance with §15.203:			
<input checked="" type="checkbox"/> Unit uses a permanently attached antenna.			
<input type="checkbox"/> Unit uses a unique coupling to the intentional radiator.			
<input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.207 (a)	AC Line Conducted Emissions	Not Applicable
§15.225 §15.209 §15.205	Radiated Spurious Emissions	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.215(c)	20 dB Bandwidth	Compliant
FCC§15.203	Antenna Requirement	Compliant
§1.1310, §2.1091	RF Exposure Evaluation	Compliant

Note 1: Not Applicable for AC line conducted emissions test, the device is powered by battery while operating.

3. DESCRIPTION OF TEST CONFIGURATION

3.1 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer. Test performed with the typical card and without Card, the worst was reported.

3.2 EUT Exercise Software

No software was used in test. The EUT transmit when EUT was power up.

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	NFC Card	/	/

3.4 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

3.5 Block Diagram of Test Setup

Radiated Spurious Emissions:

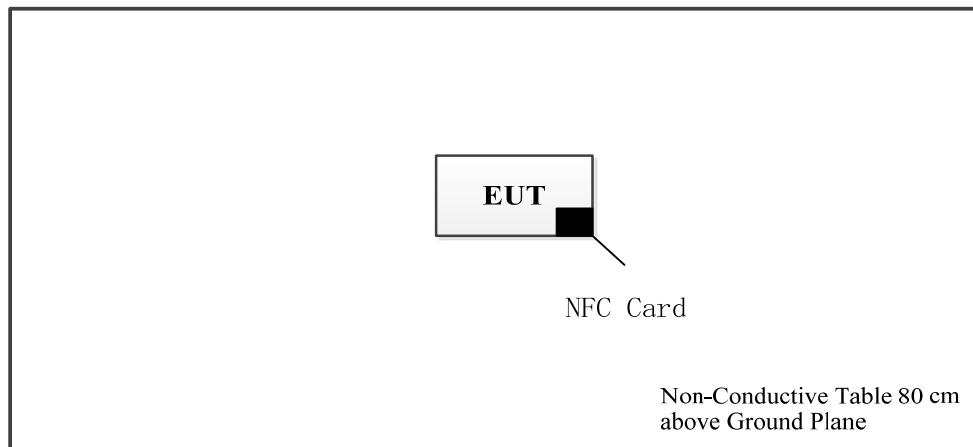

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz: 5.47 dB, 26.5GHz~40GHz: 5.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST RESULTS

4.1 AC Line Conducted Emissions

Not Applicable, the device was powered by battery when operating.

4.2 Radiated Spurious Emissions


4.2.1 Applicable Standard


As per FCC Part 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

4.2.2 EUT Setup

9kHz~30MHz:

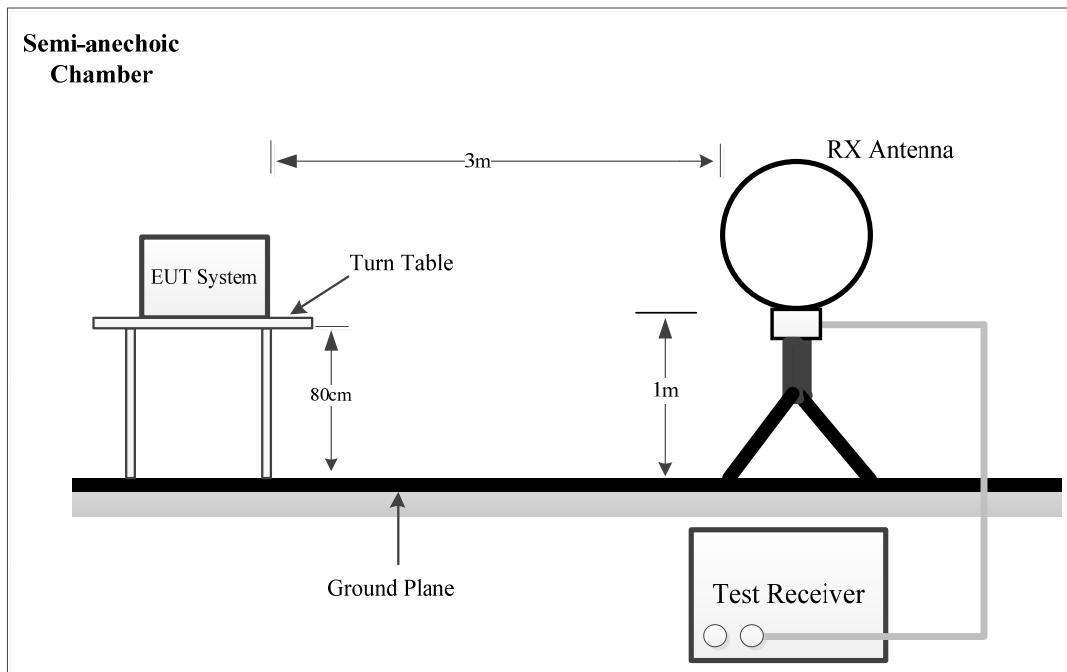

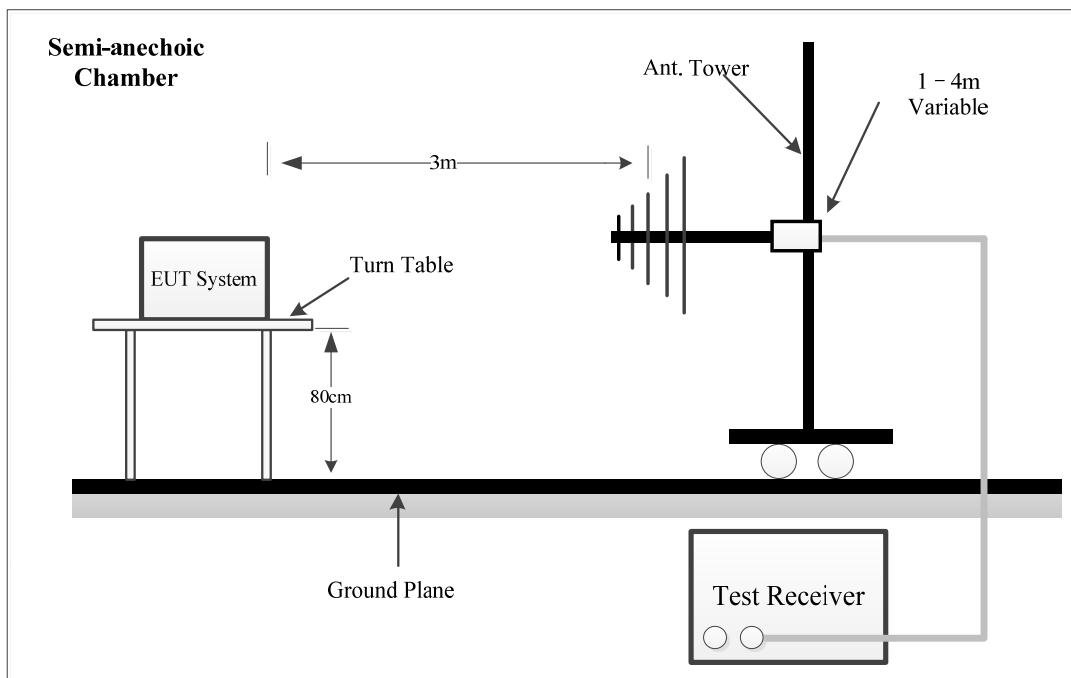30MHz~1GHz:

The radiated emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.10-2020.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 1 GHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	10 kHz	30 kHz	9 kHz	QP/AV
30 MHz – 1000 MHz	100 kHz	300 kHz	/	PK
	/	/	120 kHz	QP

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9-90 kHz, 110-490 kHz, employing an average detector.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

4.2.5 Corrected Result & Margin Calculation

$$E_{Log} = 20 \times \log_{10}(E_{Linear})$$

E_{Linear} is the field strength of the emission, in μ V/m

E_{Log} is the field strength of the emission, in dB μ V/m

For 9kHz-30MHz test, test distance is 3m, extrapolation limit shall be calculated using Equation:

$$E_{limit-measure} = E_{limit-Standard} + 40 \times \log_{10} (d_{standard}/d_{measure})$$

The basic equation is as follows:

Result = Reading + Factor

Factor= Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$

4.2.6 Test Data

Serial Number:	2ZX6-1	Test Date:	2025/5/19
Test Site:	Chamber10m	Test Mode:	Transmitting
Tester:	Zoo Zou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.9	Relative Humidity: (%)	52	ATM Pressure: (kPa)	100.3
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Please refer to the below table and plots.

1) 9kHz~30MHz

Project No.: 2502R48766E-RF
Polarization: Parallel
Test Mode: Transmitting
Note:
300Hz VBW:1kHz


Serial No.: 2ZX6-1
Tester: Zoo Zou

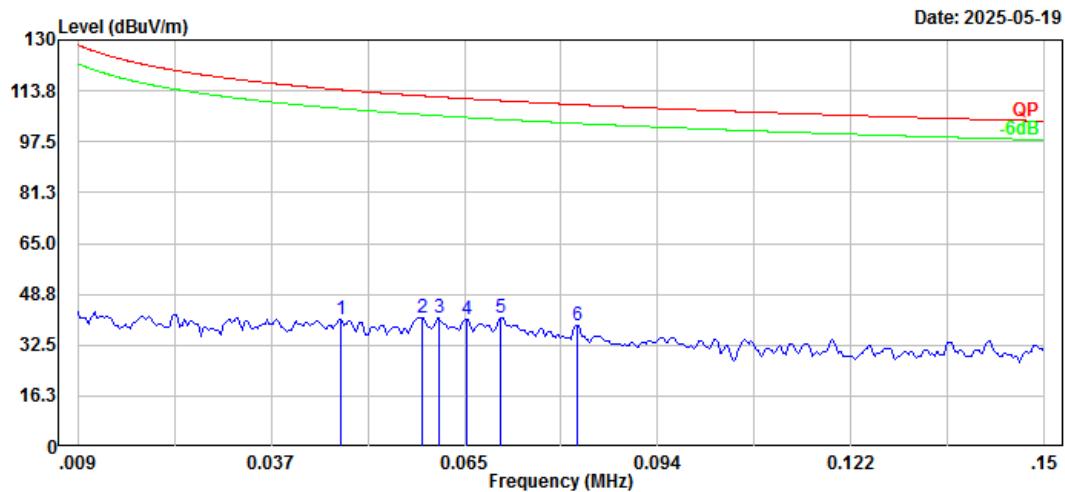

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	0.047	-3.59	44.50	40.91	114.10	73.19	Peak
2	0.059	-1.09	42.48	41.39	112.16	70.77	Peak
3	0.062	-0.73	42.04	41.31	111.79	70.48	Peak
4	0.066	-0.59	41.34	40.75	111.26	70.51	Peak
5	0.071	0.64	40.46	41.10	110.61	69.51	Peak
6	0.082	0.14	38.61	38.75	109.35	70.60	Peak

Project No.: 2502R48766E-RF
Polarization: Parallel
Test Mode: Transmitting
Note:
10kHz VBW:30kHz


Serial No.: 2ZX6-1
Tester: Zoo Zou

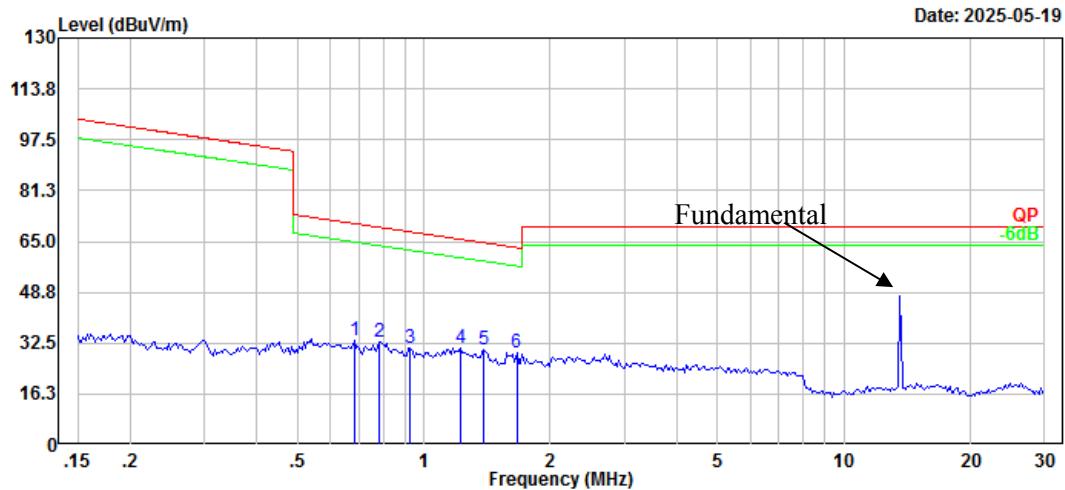

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	0.683	11.59	21.64	33.23	70.86	37.63	Peak
2	0.783	12.03	20.71	32.74	69.64	36.90	Peak
3	0.928	12.99	18.00	30.99	68.13	37.14	Peak
4	1.223	15.56	15.57	31.13	65.69	34.56	Peak
5	1.388	15.35	14.83	30.18	64.56	34.38	Peak
6	1.662	15.70	13.62	29.32	62.96	33.64	Peak

Project No.: 2502R48766E-RF
Polarization: Parallel
Test Mode: Transmitting
Note:
10kHz VBW:30kHz


Serial No.: 2ZX6-1
Tester: Zoo Zou

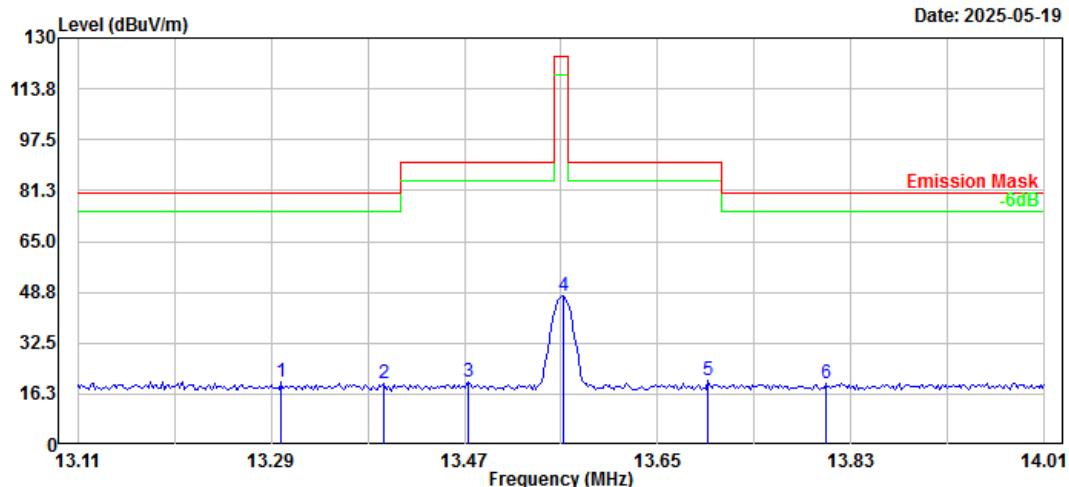

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	13.299	15.45	4.57	20.02	80.51	60.49	Peak
2	13.394	15.28	4.55	19.83	80.51	60.68	Peak
3	13.474	15.46	4.55	20.01	90.47	70.46	Peak
4	13.562	42.82	4.53	47.35	124.00	76.65	Peak
5	13.697	15.99	4.51	20.50	90.47	69.97	Peak
6	13.807	14.96	4.50	19.46	80.51	61.05	Peak

Project No.: 2502R48766E-RF
Polarization: Perpendicular
Test Mode: Transmitting
Note:
300Hz VBW:1kHz


Serial No.: 2ZX6-1
Tester: Zoo Zou

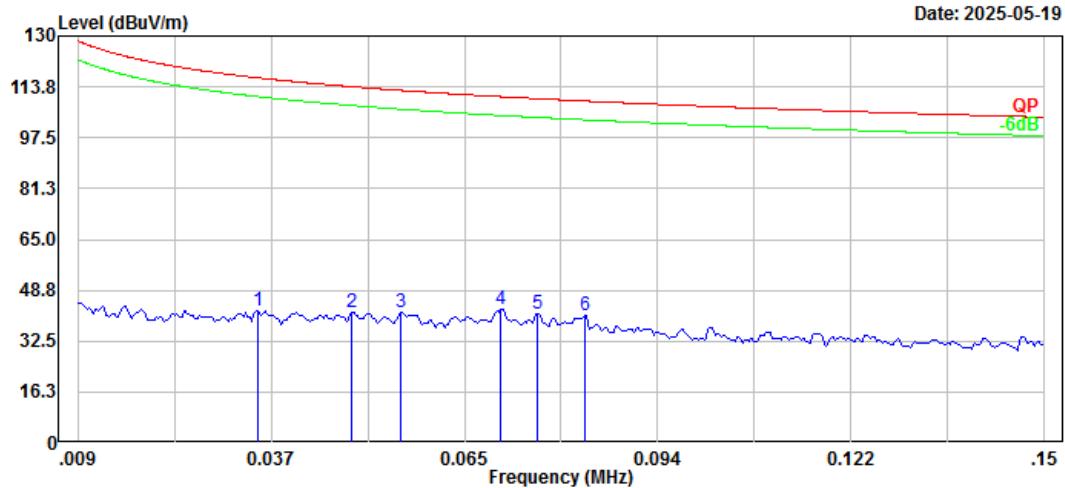

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	0.035	-4.23	46.62	42.39	116.67	74.28	Peak
2	0.049	-2.57	44.21	41.64	113.79	72.15	Peak
3	0.056	-1.43	43.00	41.57	112.63	71.06	Peak
4	0.071	2.12	40.46	42.58	110.61	68.03	Peak
5	0.076	1.76	39.57	41.33	109.97	68.64	Peak
6	0.083	2.17	38.41	40.58	109.23	68.65	Peak

Project No.: 2502R48766E-RF
Polarization: Perpendicular
Test Mode: Transmitting
Note:
10kHz VBW:30kHz


Serial No.: 2ZX6-1
Tester: Zoo Zou

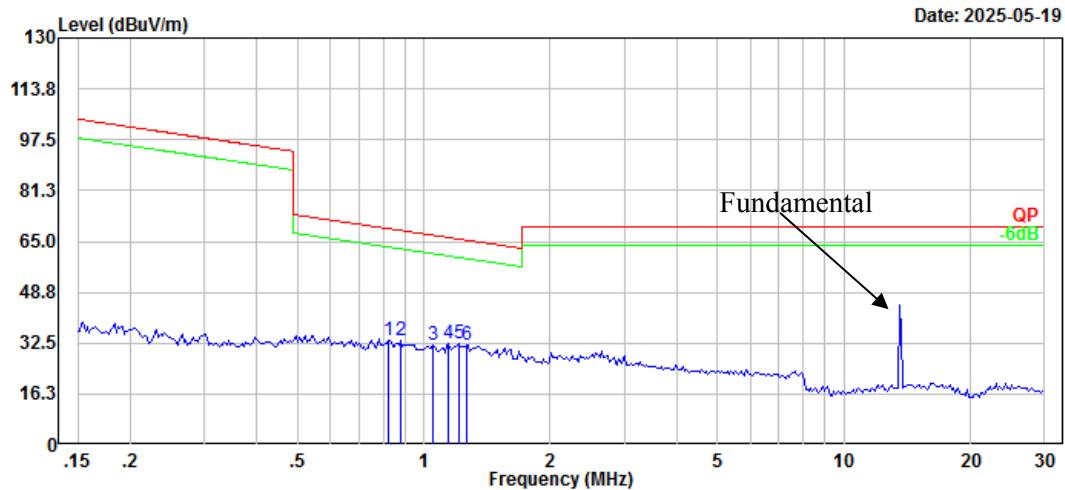

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	0.826	13.52	20.04	33.56	69.17	35.61	Peak
2	0.880	14.19	18.95	33.14	68.60	35.46	Peak
3	1.054	15.77	16.32	32.09	67.01	34.92	Peak
4	1.147	16.27	15.91	32.18	66.26	34.08	Peak
5	1.210	16.98	15.63	32.61	65.78	33.17	Peak
6	1.262	16.66	15.40	32.06	65.41	33.35	Peak

Project No.: 2502R48766E-RF
Polarization: Perpendicular
Test Mode: Transmitting
Note:
10kHz VBW:30kHz


Serial No.: 2ZX6-1
Tester: Zoo Zou

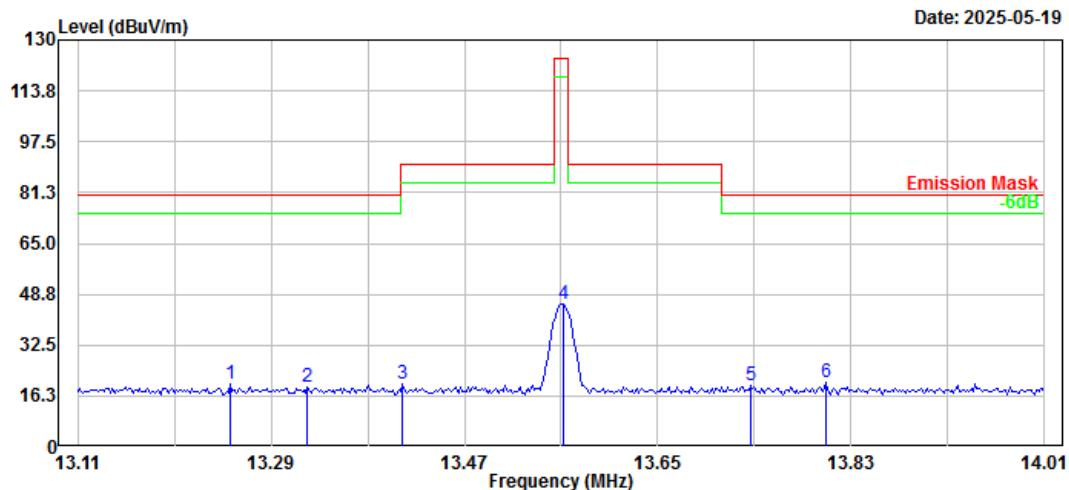

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	13.252	15.38	4.57	19.95	80.51	60.56	Peak
2	13.324	14.36	4.57	18.93	80.51	61.58	Peak
3	13.412	15.54	4.55	20.09	90.47	70.38	Peak
4	13.562	40.96	4.53	45.49	124.00	78.51	Peak
5	13.736	15.02	4.51	19.53	80.51	60.98	Peak
6	13.807	16.19	4.50	20.69	80.51	59.82	Peak

Project No.: 2502R48766E-RF
Polarization: Ground-Parallel
Test Mode: Transmitting
Note:
300Hz VBW:1kHz


Serial No.: 2ZX6-1
Tester: Zoo Zou

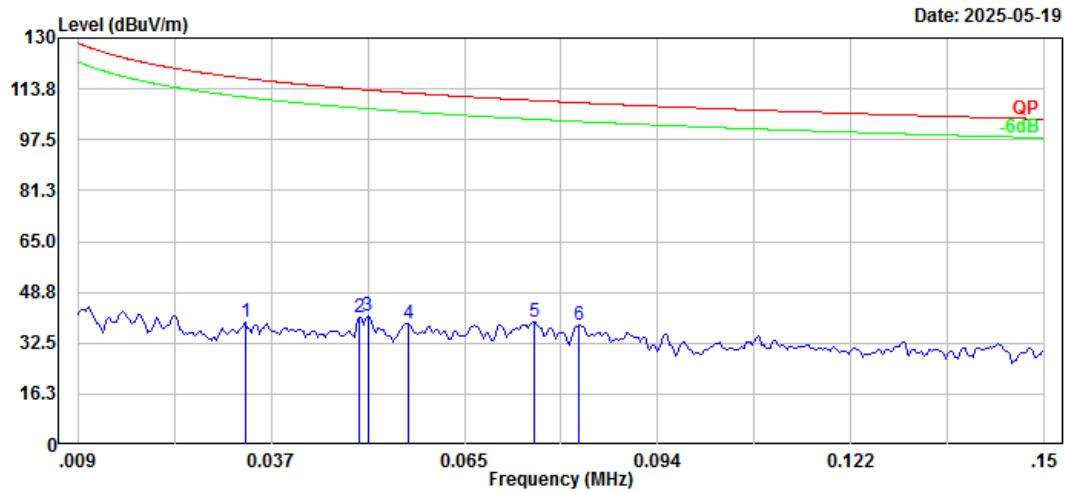

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	0.034	-7.55	46.92	39.37	117.10	77.73	Peak
2	0.050	-3.34	44.02	40.68	113.60	72.92	Peak
3	0.051	-2.85	43.83	40.98	113.40	72.42	Peak
4	0.057	-4.08	42.81	38.73	112.45	73.72	Peak
5	0.076	-0.39	39.67	39.28	110.04	70.76	Peak
6	0.082	-0.39	38.56	38.17	109.32	71.15	Peak

Project No.: 2502R48766E-RF
Polarization: Ground-Parallel
Test Mode: Transmitting
Note:
10kHz VBW:30kHz


Serial No.: 2ZX6-1
Tester: Zoo Zou

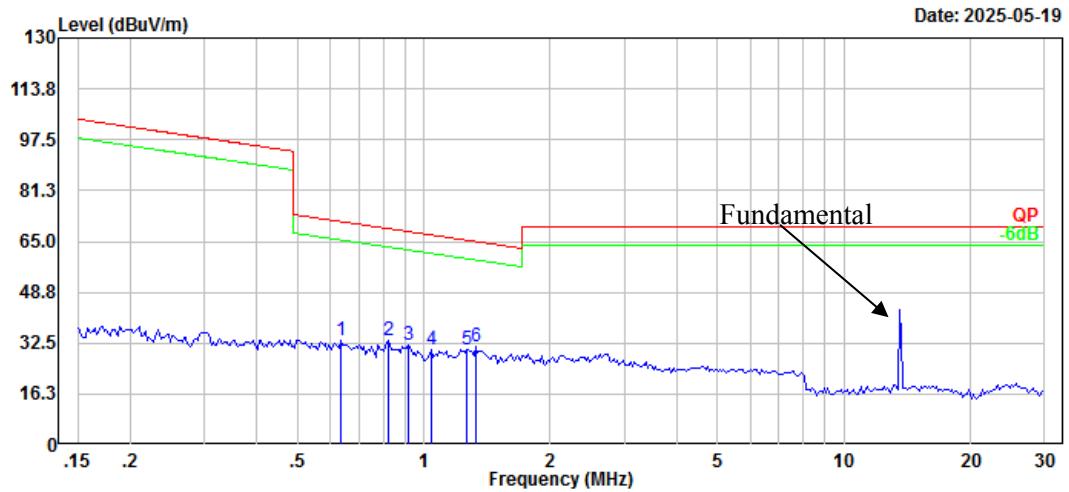

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	0.634	11.22	22.13	33.35	71.52	38.17	Peak
2	0.826	13.32	20.04	33.36	69.17	35.81	Peak
3	0.918	13.47	18.19	31.66	68.23	36.57	Peak
4	1.043	13.81	16.37	30.18	67.10	36.92	Peak
5	1.262	15.21	15.40	30.61	65.41	34.80	Peak
6	1.331	16.36	15.09	31.45	64.94	33.49	Peak

Project No.: 2502R48766E-RF
Polarization: Ground-Parallel
Test Mode: Transmitting
Note:
10kHz VBW:30kHz

Serial No.: 2ZX6-1
Tester: Zoo Zou

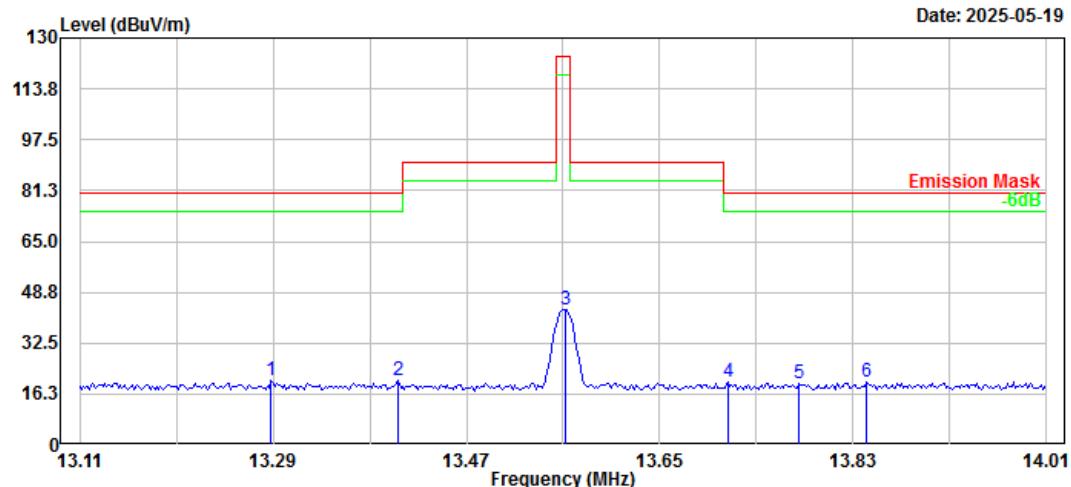


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	13.288	15.97	4.57	20.54	80.51	59.97	Peak
2	13.407	15.92	4.55	20.47	80.51	60.04	Peak
3	13.562	38.81	4.53	43.34	124.00	80.66	Peak
4	13.713	15.47	4.51	19.98	80.51	60.53	Peak
5	13.780	15.11	4.51	19.62	80.51	60.89	Peak
6	13.843	15.82	4.49	20.31	80.51	60.20	Peak

2) 30MHz-1GHz

Project No.: 2502R48766E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note:
100kHz VBW:300kHz


Serial No.: 2ZX6-1
Tester: Zoo Zou

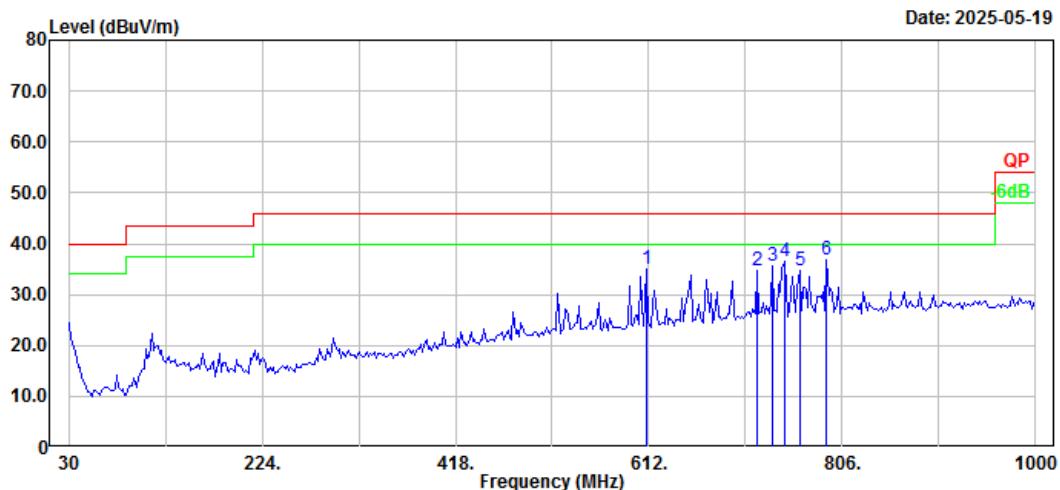

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	610.060	37.73	-2.71	35.02	46.00	10.98	Peak
2	720.640	35.67	-0.89	34.78	46.00	11.22	Peak
3	736.160	36.08	-0.58	35.50	46.00	10.50	Peak
4	747.800	36.79	-0.36	36.43	46.00	9.57	Peak
5	763.320	34.80	-0.11	34.69	46.00	11.31	Peak
6	790.480	36.48	0.30	36.78	46.00	9.22	Peak

Project No.: 2502R48766E-RF
Polarization: Vertical
Test Mode: Transmitting
Note:
100kHz VBW:300kHz

Serial No.: 2ZX6-1
Tester: Zoo Zou

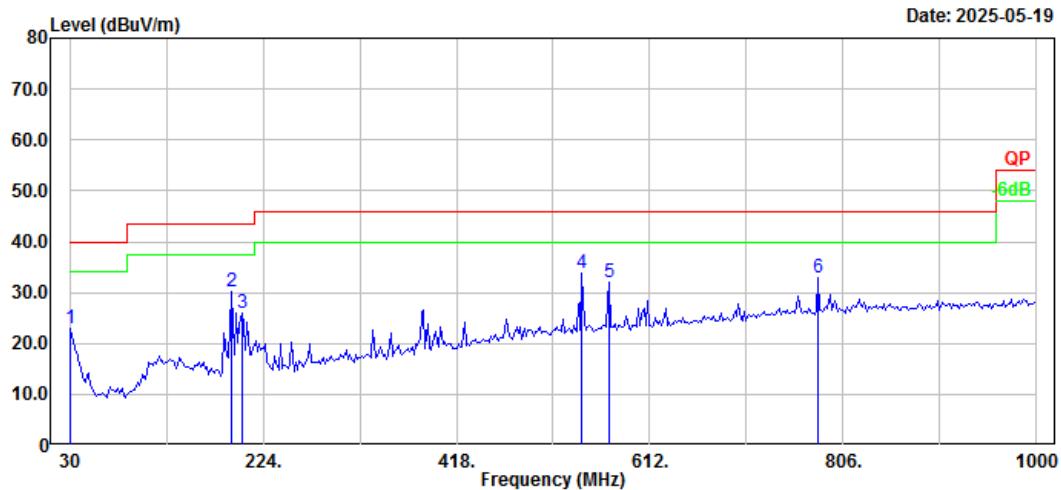

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	30.000	26.66	-3.80	22.86	40.00	17.14	Peak
2	192.960	42.01	-11.94	30.07	43.50	13.43	Peak
3	202.660	37.86	-11.80	26.06	43.50	17.44	Peak
4	544.100	37.41	-3.53	33.88	46.00	12.12	Peak
5	571.260	35.22	-3.22	32.00	46.00	14.00	Peak
6	780.780	32.61	0.17	32.78	46.00	13.22	Peak


4.3 20 dB Emission Bandwidth

4.3.1 Applicable Standard

FCC §15.215

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through § 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of band operation.

4.3.2 EUT Setup

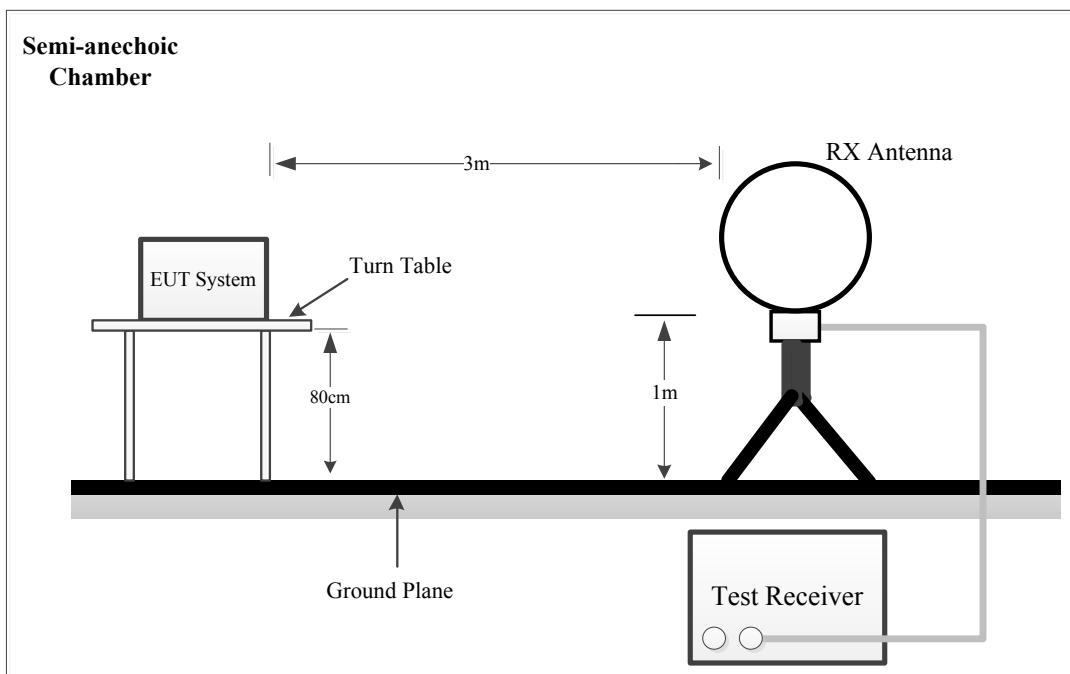

4.3.3 Test Procedure

According to ANSI C63.10-2020 Section 6.9.2

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target

“–xx dB down” requirement; that is, if the requirement calls for measuring the –20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.

f) Set detection mode to peak and trace mode to max hold.

g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).

h) Determine the “–xx dB down amplitude” using [(reference value) – xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument.

i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “–xx dB down amplitude” determined in step h). If a marker is below this “–xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “–xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

4.3.4 Test Data

Serial Number:	2ZX6-1	Test Date:	2025/5/19
Test Site:	Chamber10m	Test Mode:	Transmitting
Tester:	Zoo Zou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.9	Relative Humidity: (%)	52	ATM Pressure: (kPa)	100.3
-------------------	------	------------------------	----	---------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Frequency (MHz)	20 dB Bandwidth (kHz)
13.56	0.26

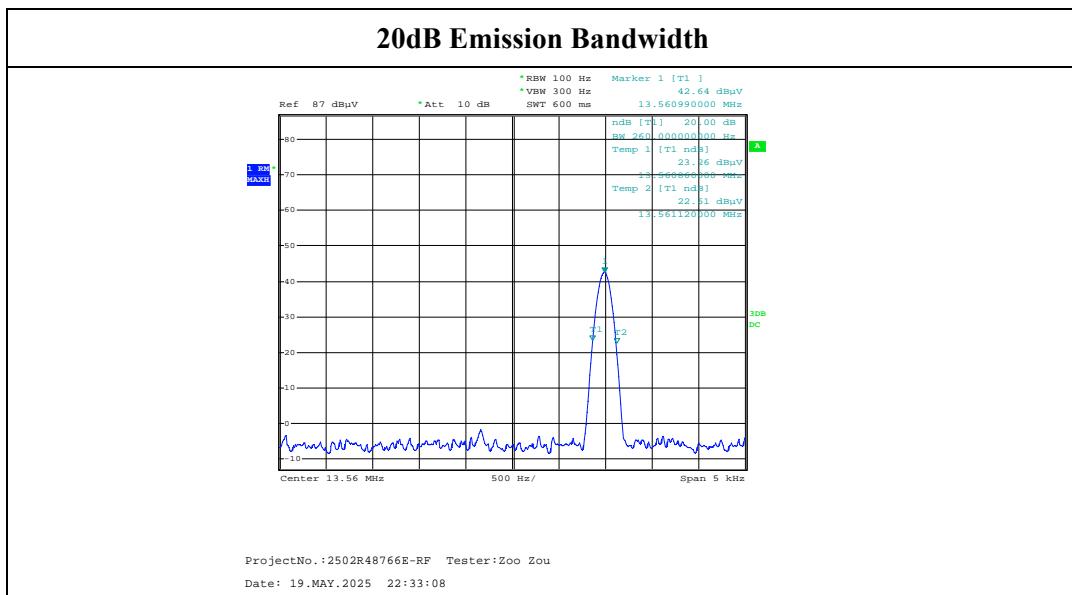


4.4 Frequency Stability

4.4.1 Applicable Standard

As per FCC Part 15.225:

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4.2 EUT Setup

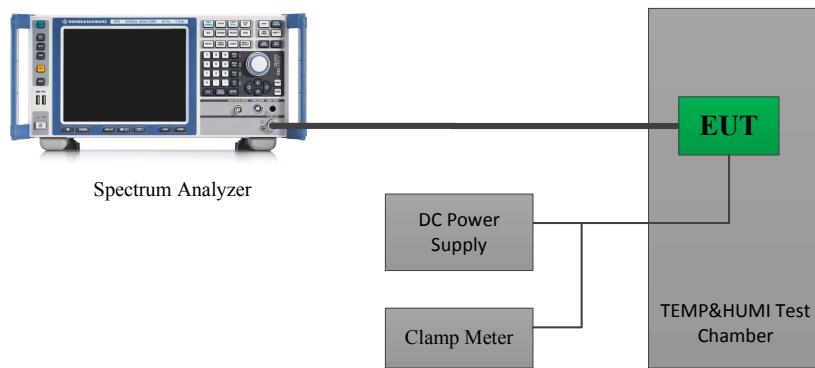

4.4.3 Test Procedure

According to ANSI C63.10-2013 Section 6.8

Frequency stability with respect to ambient temperature

- Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.
- Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

- Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.

- e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- g) Measure the frequency at each of frequencies specified in 5.6.
- h) Switch OFF the EUT but do not switch OFF the oscillator heater.
- i) Lower the chamber temperature by not more than 10 °C, and allow the temperature inside the chamber to stabilize.
- j) Repeat step f) through step i) down to the lowest specified temperature.

Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15 °C to +25 °C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

- a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument. NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.
- b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- c) Measure the frequency at each of the frequencies specified in 5.6.
- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage as described in 5.13.

4.4.4 Test Result

Serial Number:	2ZX6-1	Test Date:	2025/5/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Zoo Zou	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	27.9	Relative Humidity: (%)	52	ATM Pressure: (kPa)	100.3

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30173	2024/9/6	2025/9/5
All-sun	Clamp Meter	EM305A	8348897	2024/8/16	2025/8/15
TDK-Lambda	DC Power Supply	Z+60-14	F-08-EM038-1	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

$f_0 = 13.56 \text{ MHz}$				
Temperature	Voltage	Measured frequency	Frequency Error	Limit
°C	V _{DC}	MHz	Hz	Hz
-30	6	13.56063	630	±1356
-20		13.56072	720	±1356
-10		13.56076	760	±1356
0		13.56081	810	±1356
10		13.56085	850	±1356
20		13.56099	990	±1356
30		13.56091	910	±1356
40		13.56087	870	±1356
50		13.56079	790	±1356
20	4.2	13.56073	730	±1356
20	6.5	13.56082	820	±1356

Note: the voltage range was declared by manufacturer▲.

4.5 Antenna Requirement

4.5.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.5.2 Judgment

Please refer to the Antenna Information detail in Section 1.3.

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2502R48766E-RF-EXP EUT external photographs and 2502R48766E-RF-INP EUT internal photographs.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2502R48766E-RF-00B-TSP test setup photographs.

EXHIBIT C - RF EXPOSURE EVALUATION

Applicable Standard

According to subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Modes	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance▲		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
NFC	13.56	/	/	-47.85	0.001	20.00	<<0.001	0.98
ZigBee	2405-2480	4	2.51	2	1.58	20.00	0.0008	1.0

Note:

1. The Conducted output power including Tune-up Tolerance provided by manufacturer

2. EIRP(dBm)=E(dBuV/m)-95.2 for 3 meters distance

NFC E Field =47.35dBuV/m@3m

==> EIRP= -47.85dBm

3. For Simultaneous transmission, the result of NFC too low to calculated the Simultaneous transmission result.

Result: Compliant. The device compliant RF Exposure at 20cm distances.

***** END OF REPORT *****