

TEST REPORT

Product : Smart projector
Trade mark : TOUMEI
Model/Type reference : C900, C800, C800i, C800S, C800Pro, C900Pro, C1000, C1000Pro, C2000, C2000Pro, K1, K2, K3, K4, K5, K6, K7, K8, K9, K1Pro, K2Pro, K3Pro, K5Pro, K6Pro, K7Pro, K8Pro, K9Pro, S900, S1000, V3, V5, V6, V7, V8, V9, V3Pro, V5Pro, V6Pro, V7Pro, V8Pro, V9Pro, Q1, Q2, Q3, Q5, Q6, Q8, C1, C2, C3, C4, C5, C6, C7, C8, C9, T5, T6, T7, T8, T9, X1, X2, X3, X4, X5, X6, X7, X8, X9, S1, S2, S3, S4, S5, S6, S7, S8, S9, A3, A4, A5, A6, A7, A8, A9
Serial Number : N/A
Report Number : EED32N80001603
FCC ID : 2AJCM-TMSERIES
Date of Issue : Mar. 09, 2021
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

SHENZHEN TOUMEI TECHNOLOGY CO., LTD

Building 601, JinChongda Building, Building 00082, Shangwei Industrial Zone, Yukeng Trail Community, Guanhu Street, Longhua District, Shenzhen, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385



Compiled by:

Ken. cai

Reviewed by:

Aaron Ma

Ken Cai

Aaron Ma

Approved by:

David Wang

Date:

Mar. 09, 2021

David Wang

Check No.:4710040121

1 Content

1 CONTENT	2
2 VERSION	3
3 TEST SUMMARY	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 TEST CONFIGURATION.....	7
4.4 TEST ENVIRONMENT.....	7
4.5 DESCRIPTION OF SUPPORT UNITS.....	8
4.6 TEST LOCATION.....	8
4.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	8
5 EQUIPMENT LIST	9
6 TEST RESULTS AND MEASUREMENT DATA	11
6.1 ANTENNA REQUIREMENT.....	11
6.2 AC POWER LINE CONDUCTED EMISSIONS.....	12
6.3 MAXIMUM CONDUCTED OUTPUT POWER.....	15
6.4 DTS BANDWIDTH.....	16
6.5 MAXIMUM POWER SPECTRAL DENSITY.....	17
6.6 BAND EDGE MEASUREMENTS AND CONDUCTED SPURIOUS EMISSION.....	18
6.7 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS.....	19
7 APPENDIX A	81
8 PHOTOGRAPHS OF TEST SETUP	82
9 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	84

2 Version

Version No.	Date	Description
00	Mar. 09, 2021	Original



3 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	PASS
DTS Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	PASS
Band edge measurements	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Radiated Spurious Emission & Restricted bands	47 CFR Part 15 Subpart C Section 15.205/15.209	PASS

Remark:

Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

Model No.: C900, C800, C800i, C800S, C800Pro, C900Pro, C1000, C1000Pro, C2000, C2000Pro, K1, K2, K3, K4, K5, K6, K7, K8, K9, K1Pro, K2Pro, K3Pro, K5Pro, K6Pro, K7Pro, K8Pro, K9Pro, S900, S1000, V3, V5, V6, V7, V8, V9, V3Pro, V5Pro, V6Pro, V7Pro, V8Pro, V9Pro, Q1, Q2, Q3, Q5, Q6, Q8, C1, C2, C3, C4, C5, C6, C7, C8, C9, T5, T6, T7, T8, T9, X1, X2, X3, X4, X5, X6, X7, X8, X9, S1, S2, S3, S4, S5, S6, S7, S8, S9, A3, A4, A5, A6, A7, A8, A9

Only the model C900 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance, pack and model name.

4 General Information

4.1 Client Information

Applicant:	SHENZHEN TOUMEI TECHNOLOGY CO., LTD
Address of Applicant:	Building 601, JinChongda Building, Building 00082, Shangwei Industrial Zone, Yukeng Trail Community, Guanhu Street, Longhua District, Shenzhen, China
Manufacturer:	SHENZHEN TOUMEI TECHNOLOGY CO., LTD
Address of Manufacturer:	Building 601, JinChongda Building, Building 00082, Shangwei Industrial Zone, Yukeng Trail Community, Guanhu Street, Longhua District, Shenzhen, China
Factory:	SHENZHEN TOUMEI TECHNOLOGY CO., LTD
Address of Factory:	Building 601, JinChongda Building, Building 00082, Shangwei Industrial Zone, Yukeng Trail Community, Guanhu Street, Longhua District, Shenzhen, China

4.2 General Description of EUT

Product Name:	Smart projector	
Model No.:	C900	
Add Model No.:	C800, C800i, C800S, C800Pro, C900Pro, C1000, C1000Pro, C2000, C2000Pro, K1, K2, K3, K4, K5, K6, K7, K8, K9, K1Pro, K2Pro, K3Pro, K5Pro, K6Pro, K7Pro, K8Pro, K9Pro, S900, S1000, V3, V5, V6, V7, V8, V9, V3Pro, V5Pro, V6Pro, V7Pro, V8Pro, V9Pro, Q1, Q2, Q3, Q5, Q6, Q8, C1, C2, C3, C4, C5, C6, C7, C8, C9, T5, T6, T7, T8, T9, X1, X2, X3, X4, X5, X6, X7, X8, X9, S1, S2, S3, S4, S5, S6, S7, S8, S9, A3, A4, A5, A6, A7, A8, A9	
Trade mark:	TOUMEI	
Product Type:	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location	
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz	
Modulation Type:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM,QPSK,BPSK)	
Number of Channel:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels	
Channel Separation:	5MHz	
Antenna Type:	integral antenna	
Antenna Gain:	BT ANT: 3.5dBi; WIFI ANT1: 3.5dBi; WIFI ANT2: 3.5dBi	
Power Supply:	Adapter:	MODEL:TEKA-TD120200EU INPUT:100-240V~ 50/60Hz 0.7A max OUTPUT:12V—2.0A,24.0W
	Battery:	Model:18650-2S1P DC 7.4V, 2600mAh, 19.24Wh
Test Voltage:	DC 12V	
Sample Received Date:	Jan. 07, 2021	
Sample tested Date:	Jan. 07, 2021 to Feb. 26, 2021	

Operation Frequency each of channel (802.11b/g/n HT20)									
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency		
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz		
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz		
3	2422MHz	6	2437MHz	9	2452MHz				
Operation Frequency each of channel (802.11n HT40)									
Channel	Frequency	Channel	Frequency	Channel	Frequency				
3	2422MHz	6	2437MHz	9	2452MHz				
4	2427MHz	7	2442MHz						
5	2432MHz	8	2447MHz						

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/g/n (HT20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The highest channel	2462MHz

802.11n (HT40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The highest channel	2452MHz

4.3 Test Configuration

EUT Test Software Settings:	
Software:	Wi-Fi: QATool_Dbg.exe
EUT Power Grade:	Default(manufacturer declare)
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.	
Test Mode:	
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13.5Mbps
According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(HT20) and 6.5Mbps for 802.11n(HT40).	

4.4 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name	Manufacture	model	S/N serial number	Supplied by	Certification
AE Notebook	DELL	DELL 3490	D245DX2	DELL	CE&FCC

4.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

4.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

5 Equipment List

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-28-2020	04-27-2021
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-04-2021	03-03-2022
Barometer	changchun	DYM3	1188	---	---

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	12-28-2020	12-27-2021
Signal Generator	Keysight	N5182B	MY53051549	12-28-2020	12-27-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	12-28-2020	12-27-2021
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	---	---
High-pass filter	MICRO- TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	12-28-2020	12-27-2021
PC-1	Lenovo	R4960d	---	---	---
Power unit	R&S	OSP120	101374	12-28-2020	12-27-2021
RF control unit	JS Tonscend	JS0806-2	158060006	12-28-2020	12-27-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-16-2020	05-15-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-16-2020	10-15-2021
Multi device Controller	maturo	NCD/070/10711 112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	06-29-2020	06-28-2021
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial	Cal. date	Cal. Due date


			Number	(mm-dd-yyyy)	(mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-04-2021	03-03-2022
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-04-2021	03-03-2022
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-04-2021	03-03-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-20-2020	05-19-2021
Preamplifier	EMCI	EMC001330	980563	04-22-2020	04-21-2021
Preamplifier	JS Tonscend	980380	EMC051845 SE	12-31-2020	12-30-2021
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-27-2020	04-26-2021
Fully Anechoic Chamber	TDK	FAC-3	---	01-16-2021	01-15-2024
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(b) (4) requirement:	The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
EUT Antenna:	Please see Internal photos The antenna is integral antenna. The best case gain of the antenna is 3.5 dBi.

6.2 AC Power Line Conducted Emissions

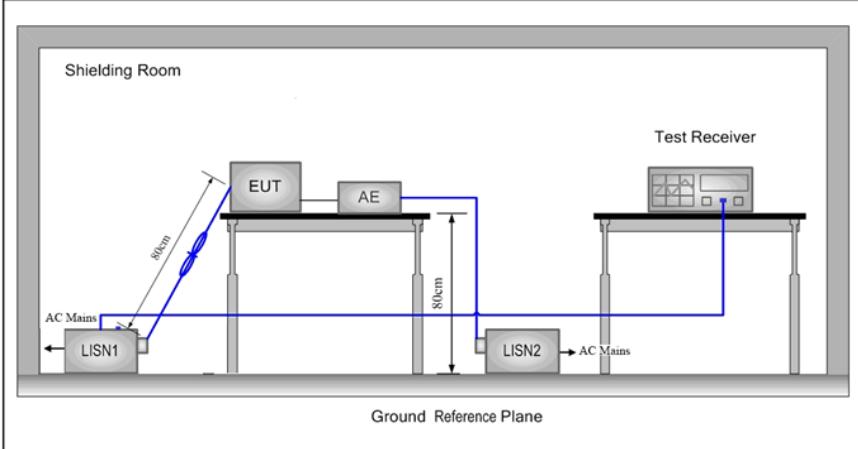
Test Requirement:	47 CFR Part 15C Section 15.207																
Test Method:	ANSI C63.10: 2013																
Test Frequency Range:	150kHz to 30MHz																
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test Setup:																	
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 																
Test Mode:	All modes were tested, only the worse case lowest channel of 1Mbps for 802.11b was recorded in the report.																
Test Results:	Pass																

Measurement Data

Live

line:


80.0 dBuV

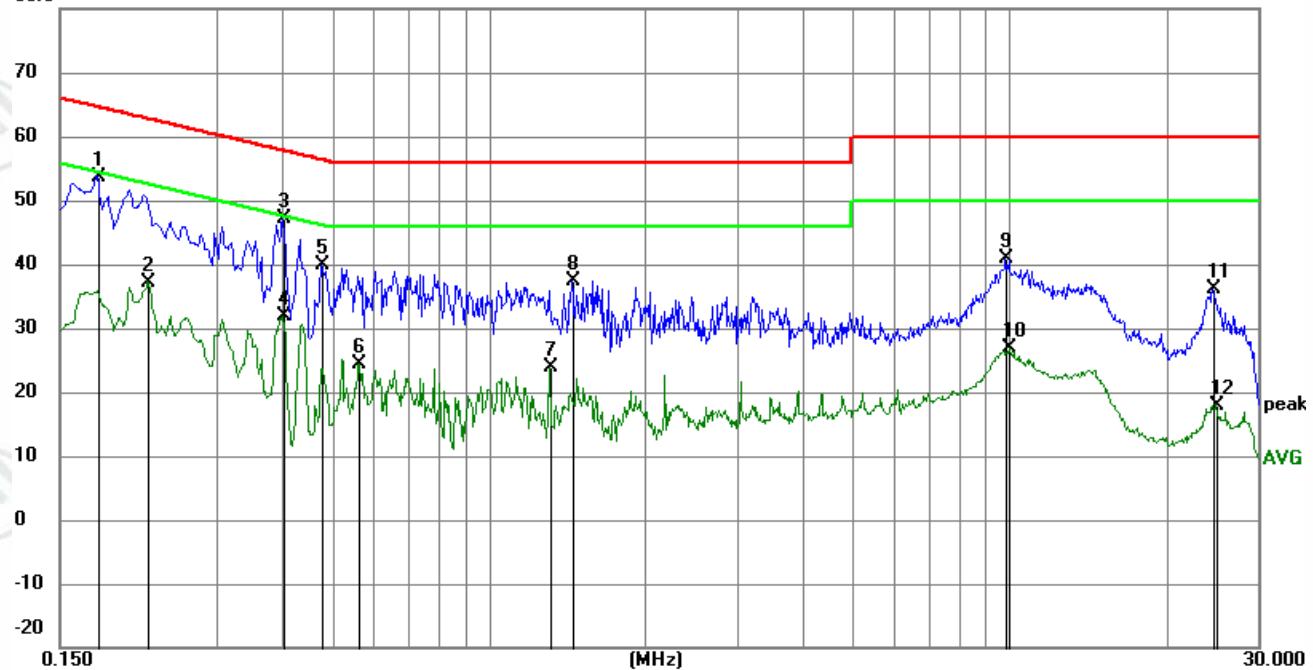

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1770	43.88	9.87	53.75	64.63	-10.88	peak	
2		0.2220	27.34	9.91	37.25	52.74	-15.49	AVG	
3	*	0.4020	37.19	9.97	47.16	57.81	-10.65	peak	
4		0.4020	21.84	9.97	31.81	47.81	-16.00	AVG	
5		0.4785	29.86	9.95	39.81	56.37	-16.56	peak	
6		0.5639	14.28	10.03	24.31	46.00	-21.69	AVG	
7		1.3110	13.98	9.82	23.80	46.00	-22.20	AVG	
8		1.4460	27.60	9.81	37.41	56.00	-18.59	peak	
9		9.8115	31.10	9.78	40.88	60.00	-19.12	peak	
10		9.9690	17.06	9.78	26.84	50.00	-23.16	AVG	
11		24.5400	26.02	10.00	36.02	60.00	-23.98	peak	
12		25.0170	8.00	10.00	18.00	50.00	-32.00	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

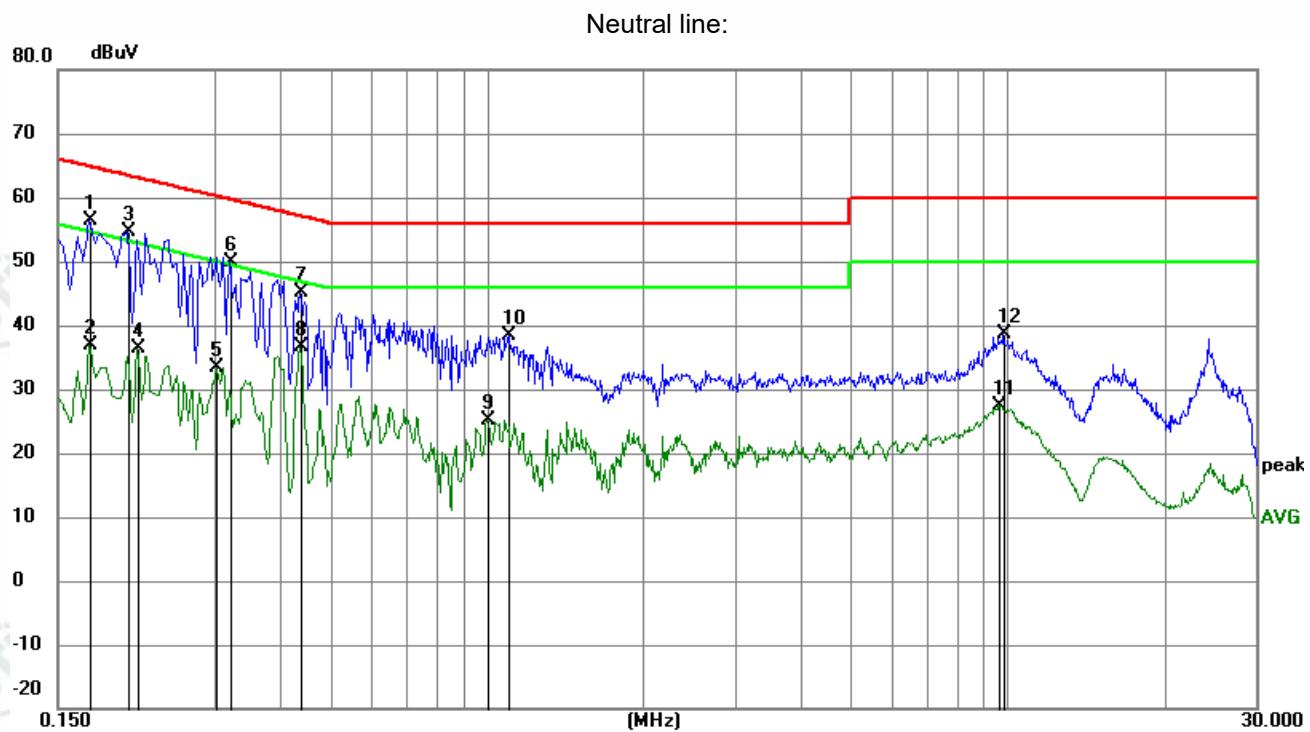


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1725	46.50	9.87	56.37	64.84	-8.47	peak	
2		0.1725	26.92	9.87	36.79	54.84	-18.05	AVG	
3		0.2040	44.73	9.88	54.61	63.45	-8.84	peak	
4		0.2130	26.48	9.90	36.38	53.09	-16.71	AVG	
5		0.3030	23.24	10.07	33.31	50.16	-16.85	AVG	
6		0.3209	39.78	10.05	49.83	59.68	-9.85	peak	
7		0.4380	35.16	9.96	45.12	57.10	-11.98	peak	
8		0.4380	26.76	9.96	36.72	47.10	-10.38	AVG	
9		1.0005	15.28	9.83	25.11	46.00	-20.89	AVG	
10		1.1040	28.62	9.83	38.45	56.00	-17.55	peak	
11		9.6495	17.72	9.78	27.50	50.00	-22.50	AVG	
12		9.8520	28.74	9.78	38.52	60.00	-21.48	peak	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


6.3 Maximum Conducted Output Power

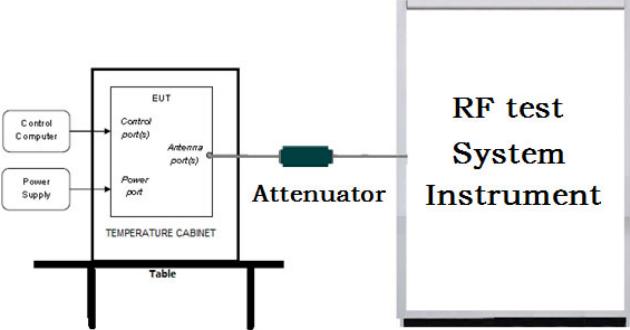Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 2013
Test Setup:	
Test Procedure:	<p>1. PKPM1 Peak power meter measurement The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.</p> <p>2. Method AVGPM-G Average power measurement Method AVGPM-G is a measurement using a gated RF average power meter. Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.</p>
Limit:	30dBm
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A


6.4 DTS Bandwidth

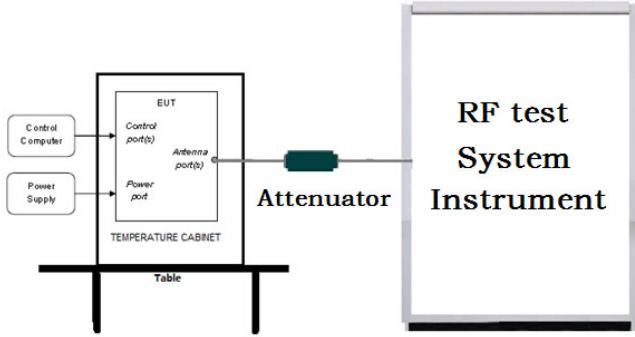Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> Set RBW = 100 kHz. Set the VBW $\geq [3 \times \text{RBW}]$. Detector = peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Limit:	≥ 500 kHz
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

6.5 Maximum Power Spectral Density

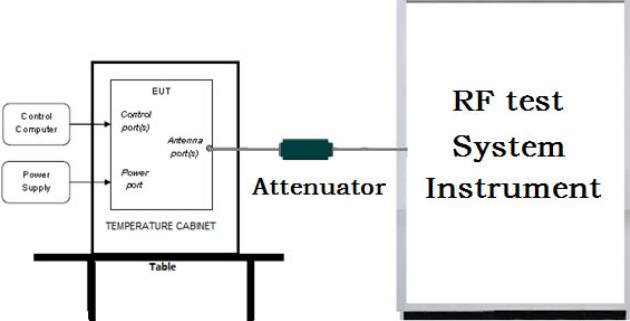Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> Set analyzer center frequency to DTS channel center frequency. Set the span to 1.5 times the DTS bandwidth. Set the RBW to $3 \text{ kHz} < \text{RBW} < 100 \text{ kHz}$. Set the VBW $> [3 \times \text{RBW}]$. Detector = peak. Sweep time = auto couple. Trace mode = max hold. Allow trace to fully stabilize. Use the peak marker function to determine the maximum amplitude level within the RBW. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
Limit:	$\leq 8.00 \text{ dBm}/3\text{kHz}$
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

6.6 Band Edge Measurements and Conducted Spurious Emission

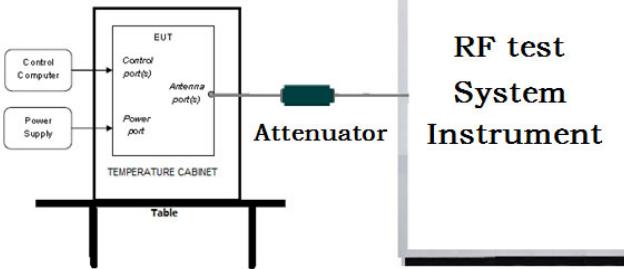Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> Set RBW = 100KHz. Set VBW = 300KHz. Sweep time = auto couple. Detector = peak. Trace mode = max hold. Allow trace to fully stabilize. Use peak marker function to determine the peak amplitude level.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

6.7 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

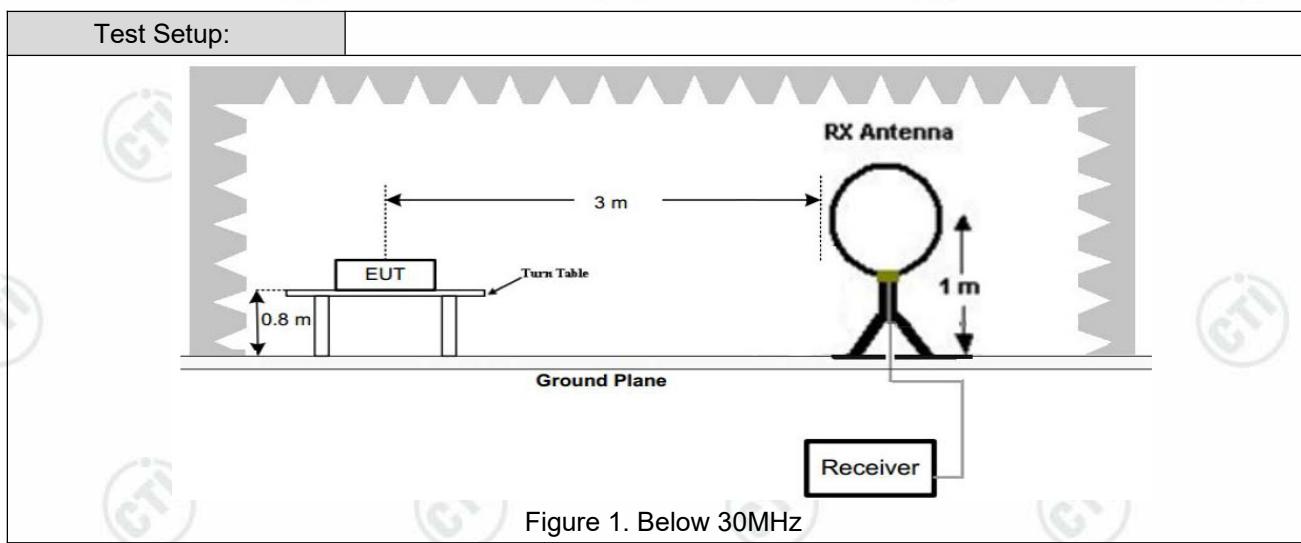


Figure 1. Below 30MHz

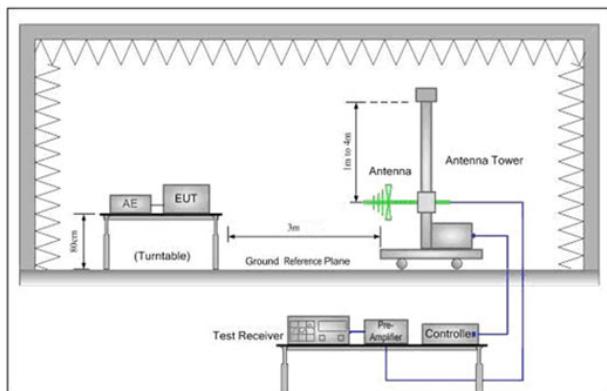


Figure 2. 30MHz to 1GHz

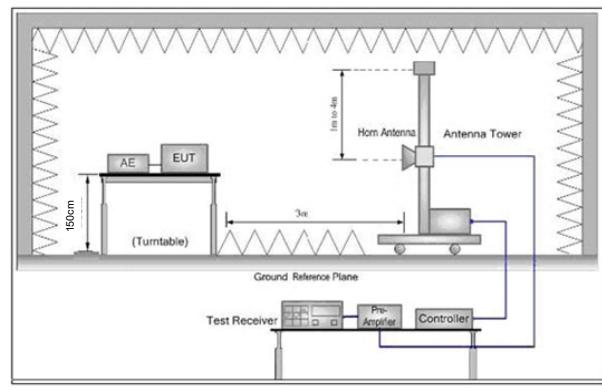


Figure 3. Above 1 GHz


Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the


	<p>measurement.</p> <ul style="list-style-type: none">d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Refer to clause 5.3
Test Results:	Pass

Radiated Spurious Emission below 1GHz:

During the test, the Radiated Emission from 30MHz to 1GHz was performed in all modes, only the worst case middle channel of 1Mbps for 802.11b was recorded in the report.

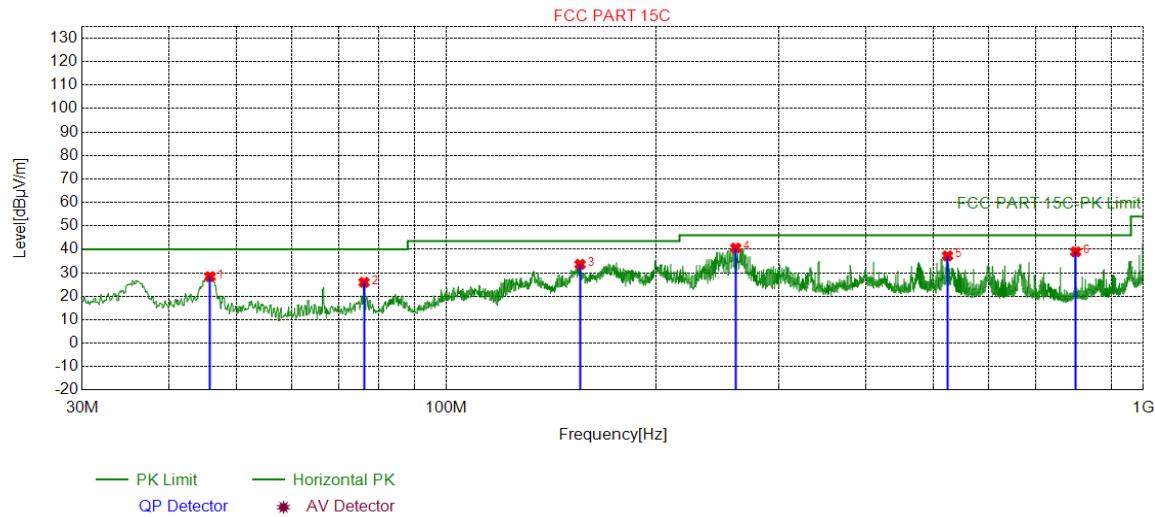

Mode:		GFSK Transmitting			Channel:			24437 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	45.8126	-17.82	46.19	28.37	40.00	11.63	PASS	Horizontal	PK
2	76.1766	-23.11	49.05	25.94	40.00	14.06	PASS	Horizontal	PK
3	155.5306	-22.79	56.39	33.60	43.50	9.90	PASS	Horizontal	PK
4	260.2040	-17.55	58.10	40.55	46.00	5.45	PASS	Horizontal	PK
5	523.7794	-11.71	48.94	37.23	46.00	8.77	PASS	Horizontal	PK
6	800.0630	-7.71	46.66	38.95	46.00	7.05	PASS	Horizontal	PK

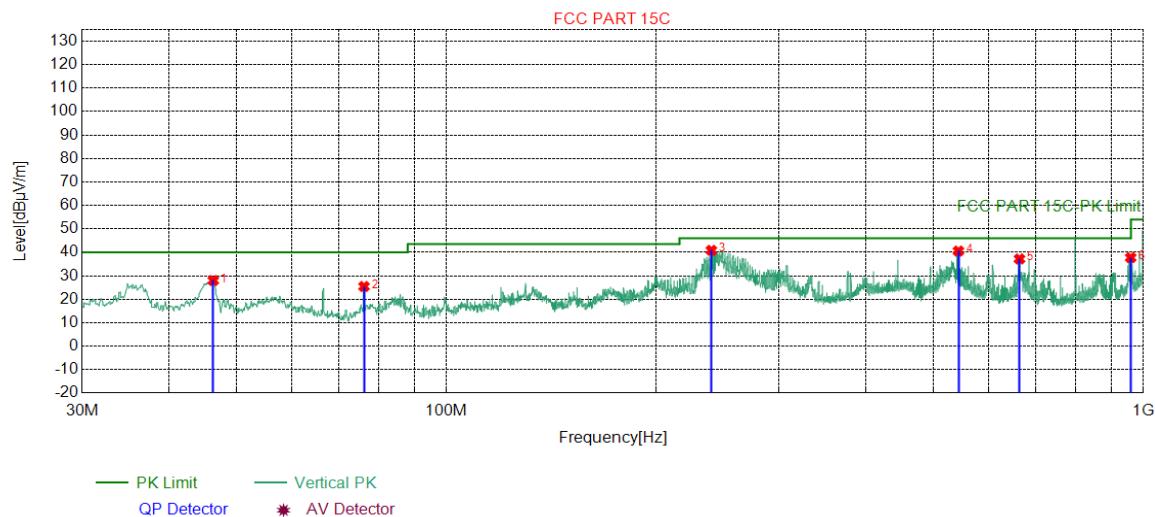

Mode:		GFSK Transmitting			Channel:			2441 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	46.2976	-17.85	45.84	27.99	40.00	12.01	PASS	Vertical	PK
2	76.1766	-23.11	48.57	25.46	40.00	14.54	PASS	Vertical	PK
3	240.0260	-18.12	58.98	40.86	46.00	5.14	PASS	Vertical	PK
4	542.9873	-11.30	51.86	40.56	46.00	5.44	PASS	Vertical	PK
5	664.3464	-9.46	46.65	37.19	46.00	8.81	PASS	Vertical	PK
6	959.3529	-4.93	42.65	37.72	46.00	8.28	PASS	Vertical	PK

**Radiated Spurious Emission above 1GHz:
For Antenna1**

Mode:			802.11 b Transmitting					Channel:		2412MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1333.6334	28.23	2.80	-42.75	62.05	50.33	74.00	23.67	Pass	Horizontal	Peak
2	1996.2996	31.68	3.47	-43.20	56.98	48.93	74.00	25.07	Pass	Horizontal	Peak
3	4220.0813	34.11	4.49	-42.91	53.93	49.62	74.00	24.38	Pass	Horizontal	Peak
4	5608.1739	35.17	5.07	-42.60	49.67	47.31	74.00	26.69	Pass	Horizontal	Peak
5	6905.2604	36.06	5.87	-42.25	49.76	49.44	74.00	24.56	Pass	Horizontal	Peak
6	10778.518	38.56	7.14	-42.00	48.72	52.42	74.00	21.58	Pass	Horizontal	Peak
7	1333.0333	28.23	2.80	-42.75	61.61	49.89	74.00	24.11	Pass	Vertical	Peak
8	1597.2597	29.04	3.07	-42.91	59.33	48.53	74.00	25.47	Pass	Vertical	Peak
9	3692.0461	33.55	4.26	-43.06	56.58	51.33	74.00	22.67	Pass	Vertical	Peak
10	4220.0813	34.11	4.49	-42.91	56.49	52.18	74.00	21.82	Pass	Vertical	Peak
11	7772.3182	36.49	6.18	-42.16	49.57	50.08	74.00	23.92	Pass	Vertical	Peak
12	10823.521	38.56	7.15	-41.99	48.52	52.24	74.00	21.76	Pass	Vertical	Peak

Mode:			802.11 b Transmitting					Channel:		2437MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.6067	27.97	2.53	-43.04	63.02	50.48	74.00	23.52	Pass	Horizontal	Peak
2	1333.0333	28.23	2.80	-42.75	61.22	49.50	74.00	24.50	Pass	Horizontal	Peak
3	1794.0794	30.34	3.31	-42.71	56.42	47.36	74.00	26.64	Pass	Horizontal	Peak
4	4220.0813	34.11	4.49	-42.91	54.58	50.27	74.00	23.73	Pass	Horizontal	Peak
5	6352.2235	35.87	5.45	-42.53	49.79	48.58	74.00	25.42	Pass	Horizontal	Peak
6	9031.4021	37.69	6.42	-42.00	49.19	51.30	74.00	22.70	Pass	Horizontal	Peak
7	1133.4133	28.03	2.65	-42.96	63.57	51.29	74.00	22.71	Pass	Vertical	Peak
8	1532.8533	28.62	3.02	-43.04	59.47	48.07	74.00	25.93	Pass	Vertical	Peak
9	3692.0461	33.55	4.26	-43.06	51.47	46.22	74.00	27.78	Pass	Vertical	Peak
10	4219.0813	34.11	4.49	-42.91	55.74	51.43	74.00	22.57	Pass	Vertical	Peak
11	7624.3083	36.55	6.12	-42.12	48.84	49.39	74.00	24.61	Pass	Vertical	Peak
12	11172.544	38.70	7.21	-42.00	49.39	53.30	74.00	20.70	Pass	Vertical	Peak

Mode:			802.11 b Transmitting						Channel:		2462MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark	
1	1066.2066	27.97	2.53	-43.04	65.24	52.70	74.00	21.30	Pass	Horizontal	Peak	
2	1333.8334	28.23	2.80	-42.75	64.93	53.21	74.00	20.79	Pass	Horizontal	Peak	
3	4220.0813	34.11	4.49	-42.91	54.60	50.29	74.00	23.71	Pass	Horizontal	Peak	
4	6458.2305	35.89	5.51	-42.50	49.45	48.35	74.00	25.65	Pass	Horizontal	Peak	
5	8367.3578	36.55	6.23	-42.06	49.33	50.05	74.00	23.95	Pass	Horizontal	Peak	
6	11399.5600	38.84	7.45	-42.00	48.83	53.12	74.00	20.88	Pass	Horizontal	Peak	
7	1066.8067	27.97	2.53	-43.04	64.56	52.02	74.00	21.98	Pass	Vertical	Peak	
8	1675.2675	29.56	3.17	-42.72	55.73	45.74	74.00	28.26	Pass	Vertical	Peak	
9	3188.0125	33.28	4.63	-43.10	52.76	47.57	74.00	26.43	Pass	Vertical	Peak	
10	4220.0813	34.11	4.49	-42.91	56.16	51.85	74.00	22.15	Pass	Vertical	Peak	
11	6330.2220	35.87	5.46	-42.54	50.32	49.11	74.00	24.89	Pass	Vertical	Peak	
12	8755.3837	37.16	6.29	-42.00	49.66	51.11	74.00	22.89	Pass	Vertical	Peak	

Mode:			802.11 n(HT40) Transmitting						Channel:		2422MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark	
1	1066.6067	27.97	2.53	-43.04	64.65	52.11	74.00	21.89	Pass	Horizontal	Peak	
2	1533.2533	28.62	3.02	-43.04	61.11	49.71	74.00	24.29	Pass	Horizontal	Peak	
3	3165.0110	33.27	4.59	-43.10	50.76	45.52	74.00	28.48	Pass	Horizontal	Peak	
4	4220.0813	34.11	4.49	-42.91	53.60	49.29	74.00	24.71	Pass	Horizontal	Peak	
5	7578.3052	36.57	5.99	-42.12	49.63	50.07	74.00	23.93	Pass	Horizontal	Peak	
6	10412.494	38.38	7.16	-42.02	49.60	53.12	74.00	20.88	Pass	Horizontal	Peak	
7	1199.8200	28.10	2.66	-42.89	63.10	50.97	74.00	23.03	Pass	Vertical	Peak	
8	1595.4595	29.03	3.07	-42.91	58.27	47.46	74.00	26.54	Pass	Vertical	Peak	
9	4220.0813	34.11	4.49	-42.91	57.31	53.00	74.00	21.00	Pass	Vertical	Peak	
10	5088.1392	34.59	4.80	-42.76	50.21	46.84	74.00	27.16	Pass	Vertical	Peak	
11	6938.2626	36.08	5.83	-42.25	49.42	49.08	74.00	24.92	Pass	Vertical	Peak	
12	9295.4197	37.64	6.64	-42.06	49.23	51.45	74.00	22.55	Pass	Vertical	Peak	

Mode:			802.11 n(HT40) Transmitting					Channel:		2437MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.2066	27.97	2.53	-43.04	60.60	48.06	74.00	25.94	Pass	Horizontal	Peak
2	1532.6533	28.62	3.02	-43.04	59.61	48.21	74.00	25.79	Pass	Horizontal	Peak
3	4220.0813	34.11	4.49	-42.91	53.47	49.16	74.00	24.84	Pass	Horizontal	Peak
4	6453.2302	35.89	5.52	-42.51	50.35	49.25	74.00	24.75	Pass	Horizontal	Peak
5	10469.498	38.46	7.04	-42.01	49.33	52.82	74.00	21.18	Pass	Horizontal	Peak
6	11839.589	39.17	7.41	-41.93	48.53	53.18	74.00	20.82	Pass	Horizontal	Peak
7	1066.2066	27.97	2.53	-43.04	63.79	51.25	74.00	22.75	Pass	Vertical	Peak
8	1803.6804	30.40	3.32	-42.71	56.76	47.77	74.00	26.23	Pass	Vertical	Peak
9	3955.0637	33.76	4.34	-43.01	58.32	53.41	74.00	20.59	Pass	Vertical	Peak
10	4220.0813	34.11	4.49	-42.91	56.04	51.73	74.00	22.27	Pass	Vertical	Peak
11	6896.2598	36.06	5.85	-42.26	49.24	48.89	74.00	25.11	Pass	Vertical	Peak
12	10630.508	38.53	6.97	-42.00	48.74	52.24	74.00	21.76	Pass	Vertical	Peak

Mode:			802.11 n(HT40) Transmitting					Channel:		2452MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.6067	27.97	2.53	-43.04	61.29	48.75	74.00	25.25	Pass	Horizontal	Peak
2	1333.2333	28.23	2.80	-42.75	59.81	48.09	74.00	25.91	Pass	Horizontal	Peak
3	1799.0799	30.37	3.32	-42.71	55.46	46.44	74.00	27.56	Pass	Horizontal	Peak
4	4220.0813	34.11	4.49	-42.91	53.22	48.91	74.00	25.09	Pass	Horizontal	Peak
5	6430.2287	35.89	5.44	-42.52	49.22	48.03	74.00	25.97	Pass	Horizontal	Peak
6	9663.4442	37.67	6.69	-42.11	48.74	50.99	74.00	23.01	Pass	Horizontal	Peak
7	1066.6067	27.97	2.53	-43.04	65.90	53.36	74.00	20.64	Pass	Vertical	Peak
8	1594.0594	29.02	3.07	-42.92	57.83	47.00	74.00	27.00	Pass	Vertical	Peak
9	4220.0813	34.11	4.49	-42.91	55.90	51.59	74.00	22.41	Pass	Vertical	Peak
10	6898.2599	36.06	5.87	-42.27	48.80	48.46	74.00	25.54	Pass	Vertical	Peak
11	9141.4094	37.67	6.45	-42.03	49.30	51.39	74.00	22.61	Pass	Vertical	Peak
12	11691.579	39.05	7.48	-41.96	49.12	53.69	74.00	20.31	Pass	Vertical	Peak

For Attenna2

Mode:			802.11 b Transmitting					Channel:		2412MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.6067	27.97	2.53	-43.04	61.03	48.49	74.00	25.51	Pass	Horizontal	Peak
2	1533.6534	28.62	3.02	-43.03	59.76	48.37	74.00	25.63	Pass	Horizontal	Peak
3	3211.0141	33.28	4.61	-43.10	50.40	45.19	74.00	28.81	Pass	Horizontal	Peak
4	4220.0813	34.11	4.49	-42.91	54.68	50.37	74.00	23.63	Pass	Horizontal	Peak
5	7207.2805	36.31	5.81	-42.16	49.70	49.66	74.00	24.34	Pass	Horizontal	Peak
6	9653.4436	37.66	6.71	-42.10	49.70	51.97	74.00	22.03	Pass	Horizontal	Peak
7	1066.6067	27.97	2.53	-43.04	63.08	50.54	74.00	23.46	Pass	Vertical	Peak
8	1333.0333	28.23	2.80	-42.75	58.43	46.71	74.00	27.29	Pass	Vertical	Peak
9	1786.8787	30.29	3.30	-42.70	56.18	47.07	74.00	26.93	Pass	Vertical	Peak
10	4220.0813	34.11	4.49	-42.91	55.52	51.21	74.00	22.79	Pass	Vertical	Peak
11	4824.1216	34.50	4.61	-42.80	53.25	49.56	74.00	24.44	Pass	Vertical	Peak
12	9146.4098	37.67	6.45	-42.03	49.42	51.51	74.00	22.49	Pass	Vertical	Peak

Mode:			802.11 b Transmitting					Channel:		2437MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.6067	27.97	2.53	-43.04	64.03	51.49	74.00	22.51	Pass	Horizontal	Peak
2	1333.6334	28.23	2.80	-42.75	63.35	51.63	74.00	22.37	Pass	Horizontal	Peak
3	4220.0813	34.11	4.49	-42.91	54.25	49.94	74.00	24.06	Pass	Horizontal	Peak
4	4874.1249	34.50	4.78	-42.80	52.11	48.59	74.00	25.41	Pass	Horizontal	Peak
5	7639.3093	36.54	6.14	-42.12	49.45	50.01	74.00	23.99	Pass	Horizontal	Peak
6	9748.4499	37.70	6.77	-42.10	49.57	51.94	74.00	22.06	Pass	Horizontal	Peak
7	1066.4066	27.97	2.53	-43.04	63.18	50.64	74.00	23.36	Pass	Vertical	Peak
8	1396.8397	28.30	2.89	-42.68	57.93	46.44	74.00	27.56	Pass	Vertical	Peak
9	4221.0814	34.11	4.49	-42.91	56.59	52.28	74.00	21.72	Pass	Vertical	Peak
10	4874.1249	34.50	4.78	-42.80	53.34	49.82	74.00	24.18	Pass	Vertical	Peak
11	7654.3103	36.54	6.16	-42.13	49.44	50.01	74.00	23.99	Pass	Vertical	Peak
12	9747.4498	37.70	6.77	-42.10	50.00	52.37	74.00	21.63	Pass	Vertical	Peak

Mode:			802.11 b Transmitting					Channel:		2462MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.4066	27.97	2.53	-43.04	63.69	51.15	74.00	22.85	Pass	Horizontal	Peak
2	1333.4333	28.23	2.80	-42.75	63.96	52.24	74.00	21.76	Pass	Horizontal	Peak
3	1798.0798	30.37	3.32	-42.72	56.81	47.78	74.00	26.22	Pass	Horizontal	Peak
4	4220.0813	34.11	4.49	-42.91	53.96	49.65	74.00	24.35	Pass	Horizontal	Peak
5	7758.3172	36.50	6.22	-42.16	49.27	49.83	74.00	24.17	Pass	Horizontal	Peak
6	10490.4994	38.49	7.06	-42.00	48.49	52.04	74.00	21.96	Pass	Horizontal	Peak
7	1066.6067	27.97	2.53	-43.04	65.38	52.84	74.00	21.16	Pass	Vertical	Peak
8	1596.8597	29.04	3.07	-42.91	58.52	47.72	74.00	26.28	Pass	Vertical	Peak
9	4219.0813	34.11	4.49	-42.91	53.73	49.42	74.00	24.58	Pass	Vertical	Peak
10	4924.1283	34.50	4.85	-42.80	53.20	49.75	74.00	24.25	Pass	Vertical	Peak
11	7724.3150	36.51	6.25	-42.14	48.92	49.54	74.00	24.46	Pass	Vertical	Peak
12	10363.4909	38.31	7.00	-42.03	48.94	52.22	74.00	21.78	Pass	Vertical	Peak

Mode:			802.11 n(HT40) Transmitting					Channel:		2422MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.2066	27.97	2.53	-43.04	61.28	48.74	74.00	25.26	Pass	Horizontal	Peak
2	1333.8334	28.23	2.80	-42.75	60.32	48.60	74.00	25.40	Pass	Horizontal	Peak
3	1793.0793	30.33	3.31	-42.70	54.98	45.92	74.00	28.08	Pass	Horizontal	Peak
4	4220.0813	34.11	4.49	-42.91	54.80	50.49	74.00	23.51	Pass	Horizontal	Peak
5	7670.3114	36.53	6.19	-42.13	49.45	50.04	74.00	23.96	Pass	Horizontal	Peak
6	10418.494	38.39	7.13	-42.02	48.52	52.02	74.00	21.98	Pass	Horizontal	Peak
7	1066.0066	27.97	2.53	-43.04	65.32	52.78	74.00	21.22	Pass	Vertical	Peak
8	1333.2333	28.23	2.80	-42.75	61.78	50.06	74.00	23.94	Pass	Vertical	Peak
9	1597.8598	29.05	3.07	-42.91	58.05	47.26	74.00	26.74	Pass	Vertical	Peak
10	4220.0813	34.11	4.49	-42.91	54.15	49.84	74.00	24.16	Pass	Vertical	Peak
11	7661.3108	36.54	6.17	-42.13	49.17	49.75	74.00	24.25	Pass	Vertical	Peak
12	10240.482	38.14	6.83	-42.06	49.52	52.43	74.00	21.57	Pass	Vertical	Peak

Mode:			802.11 n(HT40) Transmitting					Channel:		2437MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.6067	27.97	2.53	-43.04	62.49	49.95	74.00	24.05	Pass	Horizontal	Peak
2	1333.8334	28.23	2.80	-42.75	60.90	49.18	74.00	24.82	Pass	Horizontal	Peak
3	1532.6533	28.62	3.02	-43.04	58.00	46.60	74.00	27.40	Pass	Horizontal	Peak
4	4220.0813	34.11	4.49	-42.91	54.96	50.65	74.00	23.35	Pass	Horizontal	Peak
5	7662.3108	36.54	6.18	-42.14	48.48	49.06	74.00	24.94	Pass	Horizontal	Peak
6	10460.497	38.44	7.03	-42.00	49.26	52.73	74.00	21.27	Pass	Horizontal	Peak
7	1066.6067	27.97	2.53	-43.04	65.45	52.91	74.00	21.09	Pass	Vertical	Peak
8	1333.4333	28.23	2.80	-42.75	63.04	51.32	74.00	22.68	Pass	Vertical	Peak
9	1595.8596	29.03	3.07	-42.91	59.09	48.28	74.00	25.72	Pass	Vertical	Peak
10	4220.0813	34.11	4.49	-42.91	54.90	50.59	74.00	23.41	Pass	Vertical	Peak
11	6330.2220	35.87	5.46	-42.54	49.61	48.40	74.00	25.60	Pass	Vertical	Peak
12	9743.4496	37.70	6.76	-42.11	49.22	51.57	74.00	22.43	Pass	Vertical	Peak

Mode:			802.11 n(HT40) Transmitting					Channel:		2452MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.8067	27.97	2.53	-43.04	64.91	52.37	74.00	21.63	Pass	Horizontal	Peak
2	1333.4333	28.23	2.80	-42.75	63.58	51.86	74.00	22.14	Pass	Horizontal	Peak
3	1791.6792	30.33	3.31	-42.72	57.19	48.11	74.00	25.89	Pass	Horizontal	Peak
4	4220.0813	34.11	4.49	-42.91	54.32	50.01	74.00	23.99	Pass	Horizontal	Peak
5	6901.2601	36.06	5.88	-42.26	49.53	49.21	74.00	24.79	Pass	Horizontal	Peak
6	9648.4432	37.66	6.72	-42.10	49.35	51.63	74.00	22.37	Pass	Horizontal	Peak
7	1066.8067	27.97	2.53	-43.04	64.21	51.67	74.00	22.33	Pass	Vertical	Peak
8	1333.4333	28.23	2.80	-42.75	59.52	47.80	74.00	26.20	Pass	Vertical	Peak
9	3098.0065	33.24	4.72	-43.10	50.64	45.50	74.00	28.50	Pass	Vertical	Peak
10	5012.1341	34.51	4.83	-42.79	50.52	47.07	74.00	26.93	Pass	Vertical	Peak
11	7435.2957	36.54	5.85	-42.12	48.56	48.83	74.00	25.17	Pass	Vertical	Peak
12	9719.4480	37.69	6.66	-42.10	50.40	52.65	74.00	21.35	Pass	Vertical	Peak

For Antenna2x2 MIMO

Mode:			802.11 n(HT20) Transmitting					Channel:		2412MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.6067	27.97	2.53	-43.04	63.96	51.42	74.00	22.58	Pass	Horizontal	Peak
2	1333.8334	28.23	2.80	-42.75	63.55	51.83	74.00	22.17	Pass	Horizontal	Peak
3	1532.6533	28.62	3.02	-43.04	59.93	48.53	74.00	25.47	Pass	Horizontal	Peak
4	4219.0813	34.11	4.49	-42.91	53.74	49.43	74.00	24.57	Pass	Horizontal	Peak
5	7649.3100	36.54	6.15	-42.13	48.76	49.32	74.00	24.68	Pass	Horizontal	Peak
6	10431.495	38.40	7.09	-42.01	48.93	52.41	74.00	21.59	Pass	Horizontal	Peak
7	1066.6067	27.97	2.53	-43.04	66.25	53.71	74.00	20.29	Pass	Vertical	Peak
8	1597.0597	29.04	3.07	-42.91	59.38	48.58	74.00	25.42	Pass	Vertical	Peak
9	4220.0813	34.11	4.49	-42.91	55.46	51.15	74.00	22.85	Pass	Vertical	Peak
10	5929.1953	35.69	5.21	-42.60	49.11	47.41	74.00	26.59	Pass	Vertical	Peak
11	7654.3103	36.54	6.16	-42.13	49.06	49.63	74.00	24.37	Pass	Vertical	Peak
12	10455.497	38.44	7.03	-42.02	48.90	52.35	74.00	21.65	Pass	Vertical	Peak

Mode:			802.11 n(HT20) Transmitting					Channel:		2437MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.4066	27.97	2.53	-43.04	65.01	52.47	74.00	21.53	Pass	Horizontal	Peak
2	1333.6334	28.23	2.80	-42.75	64.38	52.66	74.00	21.34	Pass	Horizontal	Peak
3	3165.0110	33.27	4.59	-43.10	50.30	45.06	74.00	28.94	Pass	Horizontal	Peak
4	4220.0813	34.11	4.49	-42.91	53.50	49.19	74.00	24.81	Pass	Horizontal	Peak
5	7505.3004	36.60	5.95	-42.10	49.10	49.55	74.00	24.45	Pass	Horizontal	Peak
6	10199.480	38.08	6.86	-42.06	48.90	51.78	74.00	22.22	Pass	Horizontal	Peak
7	1067.0067	27.97	2.53	-43.04	65.81	53.27	74.00	20.73	Pass	Vertical	Peak
8	1600.2600	29.06	3.07	-42.90	60.02	49.25	74.00	24.75	Pass	Vertical	Peak
9	3165.0110	33.27	4.59	-43.10	53.56	48.32	74.00	25.68	Pass	Vertical	Peak
10	4220.0813	34.11	4.49	-42.91	56.33	52.02	74.00	21.98	Pass	Vertical	Peak
11	7544.3030	36.58	5.86	-42.10	50.00	50.34	74.00	23.66	Pass	Vertical	Peak
12	10371.491	38.32	7.04	-42.03	48.82	52.15	74.00	21.85	Pass	Vertical	Peak

Mode:			802.11 n(HT20) Transmitting					Channel:		2462MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.2066	27.97	2.53	-43.04	64.82	52.28	74.00	21.72	Pass	Horizontal	Peak
2	1793.4793	30.34	3.31	-42.71	57.51	48.45	74.00	25.55	Pass	Horizontal	Peak
3	2878.7879	33.01	4.32	-43.11	50.98	45.20	74.00	28.80	Pass	Horizontal	Peak
4	4220.0813	34.11	4.49	-42.91	53.42	49.11	74.00	24.89	Pass	Horizontal	Peak
5	7038.2692	36.14	5.70	-42.20	49.05	48.69	74.00	25.31	Pass	Horizontal	Peak
6	10302.4868	38.22	6.86	-42.03	49.05	52.10	74.00	21.90	Pass	Horizontal	Peak
7	1199.6200	28.10	2.66	-42.89	64.01	51.88	74.00	22.12	Pass	Vertical	Peak
8	1597.2597	29.04	3.07	-42.91	59.02	48.22	74.00	25.78	Pass	Vertical	Peak
9	3190.0127	33.28	4.63	-43.10	53.72	48.53	74.00	25.47	Pass	Vertical	Peak
10	4220.0813	34.11	4.49	-42.91	55.96	51.65	74.00	22.35	Pass	Vertical	Peak
11	6992.2662	36.10	5.70	-42.21	49.25	48.84	74.00	25.16	Pass	Vertical	Peak
12	9220.4147	37.66	6.51	-42.05	49.45	51.57	74.00	22.43	Pass	Vertical	Peak

Mode:			802.11 n(HT40) Transmitting					Channel:		2422MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.6067	27.97	2.53	-43.04	63.90	51.36	74.00	22.64	Pass	Horizontal	Peak
2	1333.4333	28.23	2.80	-42.75	64.13	52.41	74.00	21.59	Pass	Horizontal	Peak
3	4220.0813	34.11	4.49	-42.91	53.77	49.46	74.00	24.54	Pass	Horizontal	Peak
4	6482.2321	35.90	5.49	-42.51	48.53	47.41	74.00	26.59	Pass	Horizontal	Peak
5	9680.4454	37.67	6.64	-42.10	49.50	51.71	74.00	22.29	Pass	Horizontal	Peak
6	11773.584	39.12	7.47	-41.95	49.15	53.79	74.00	20.21	Pass	Horizontal	Peak
7	1199.8200	28.10	2.66	-42.89	63.69	51.56	74.00	22.44	Pass	Vertical	Peak
8	1805.2805	30.41	3.33	-42.72	58.33	49.35	74.00	24.65	Pass	Vertical	Peak
9	4220.0813	34.11	4.49	-42.91	56.04	51.73	74.00	22.27	Pass	Vertical	Peak
10	5958.1972	35.73	5.32	-42.59	48.97	47.43	74.00	26.57	Pass	Vertical	Peak
11	7726.3151	36.51	6.25	-42.15	48.71	49.32	74.00	24.68	Pass	Vertical	Peak
12	11162.544	38.70	7.21	-42.00	48.67	52.58	74.00	21.42	Pass	Vertical	Peak

Mode:			802.11 n(HT40) Transmitting					Channel:		2437MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.6067	27.97	2.53	-43.04	64.04	51.50	74.00	22.50	Pass	Horizontal	Peak
2	1333.2333	28.23	2.80	-42.75	62.99	51.27	74.00	22.73	Pass	Horizontal	Peak
3	4219.0813	34.11	4.49	-42.91	54.58	50.27	74.00	23.73	Pass	Horizontal	Peak
4	5582.1721	35.13	5.11	-42.59	50.10	47.75	74.00	26.25	Pass	Horizontal	Peak
5	7727.3152	36.51	6.25	-42.15	48.82	49.43	74.00	24.57	Pass	Horizontal	Peak
6	9277.4185	37.64	6.62	-42.05	49.48	51.69	74.00	22.31	Pass	Horizontal	Peak
7	1067.0067	27.97	2.53	-43.04	66.15	53.61	74.00	20.39	Pass	Vertical	Peak
8	1598.2598	29.05	3.07	-42.91	59.24	48.45	74.00	25.55	Pass	Vertical	Peak
9	4219.0813	34.11	4.49	-42.91	55.00	50.69	74.00	23.31	Pass	Vertical	Peak
10	5917.1945	35.67	5.15	-42.60	48.98	47.20	74.00	26.80	Pass	Vertical	Peak
11	7695.3130	36.52	6.25	-42.14	48.71	49.34	74.00	24.66	Pass	Vertical	Peak
12	10250.483	38.15	6.82	-42.05	49.03	51.95	74.00	22.05	Pass	Vertical	Peak

Mode:			802.11 n(HT40) Transmitting					Channel:		2452MHz	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1066.4066	27.97	2.53	-43.04	62.46	49.92	74.00	24.08	Pass	Horizontal	Peak
2	1679.4679	29.58	3.18	-42.71	61.99	52.04	74.00	21.96	Pass	Horizontal	Peak
3	4220.0813	34.11	4.49	-42.91	54.03	49.72	74.00	24.28	Pass	Horizontal	Peak
4	6329.2219	35.87	5.46	-42.54	50.09	48.88	74.00	25.12	Pass	Horizontal	Peak
5	7650.3100	36.54	6.15	-42.13	49.88	50.44	74.00	23.56	Pass	Horizontal	Peak
6	9705.4470	37.68	6.61	-42.10	50.20	52.39	74.00	21.61	Pass	Horizontal	Peak
7	1067.0067	27.97	2.53	-43.04	64.27	51.73	74.00	22.27	Pass	Vertical	Peak
8	1596.8597	29.04	3.07	-42.91	58.68	47.88	74.00	26.12	Pass	Vertical	Peak
9	3692.0461	33.55	4.26	-43.06	54.24	48.99	74.00	25.01	Pass	Vertical	Peak
10	4220.0813	34.11	4.49	-42.91	54.95	50.64	74.00	23.36	Pass	Vertical	Peak
11	7574.3050	36.57	5.97	-42.11	49.05	49.48	74.00	24.52	Pass	Vertical	Peak
12	9277.4185	37.64	6.62	-42.05	49.49	51.70	74.00	22.30	Pass	Vertical	Peak


Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 3) For SISO mode and 20MHz bandwidth, 802.11b mode was the worst case; For SISO mode and 40MHz bandwidth, 802.11n(HT40) mode was the worst case; For MIMO mode, 802.11n(HT20/40) mode was the worst case; only the worst case was recorded in the report.


Restricted bands:**Test plot as follows:****For Attenna1**

Mode:	802.11 b Transmitting	Channel:	2412MHz
Remark:	PK		

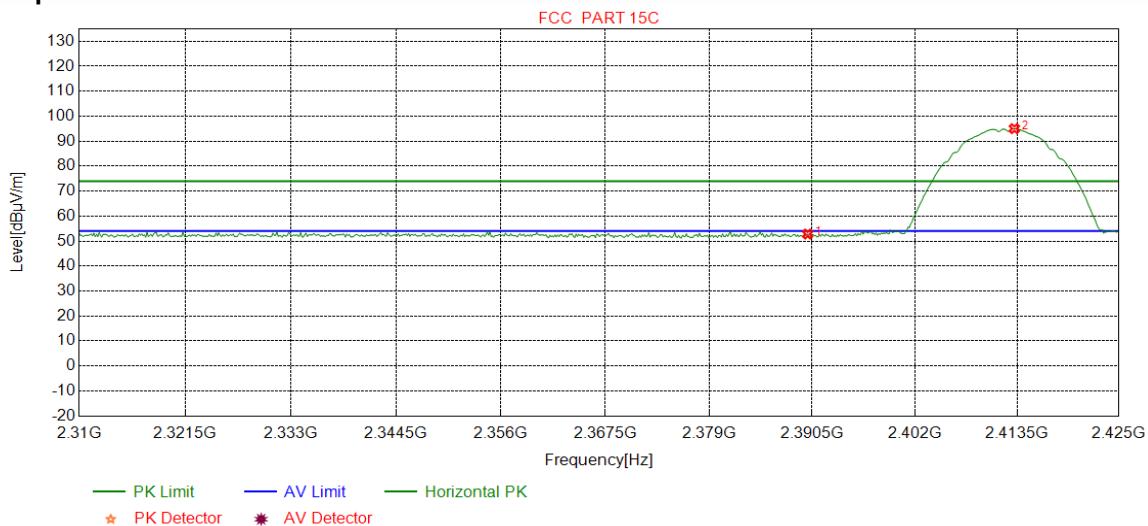Test Graph

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	50.30	52.80	74.00	21.20	Pass	Horizontal
2	2413.1977	32.28	13.36	-43.12	92.50	95.02	74.00	-21.02	Pass	Horizontal


Mode:	802.11 b Transmitting	Channel:	2412MHz
Remark:	PK		

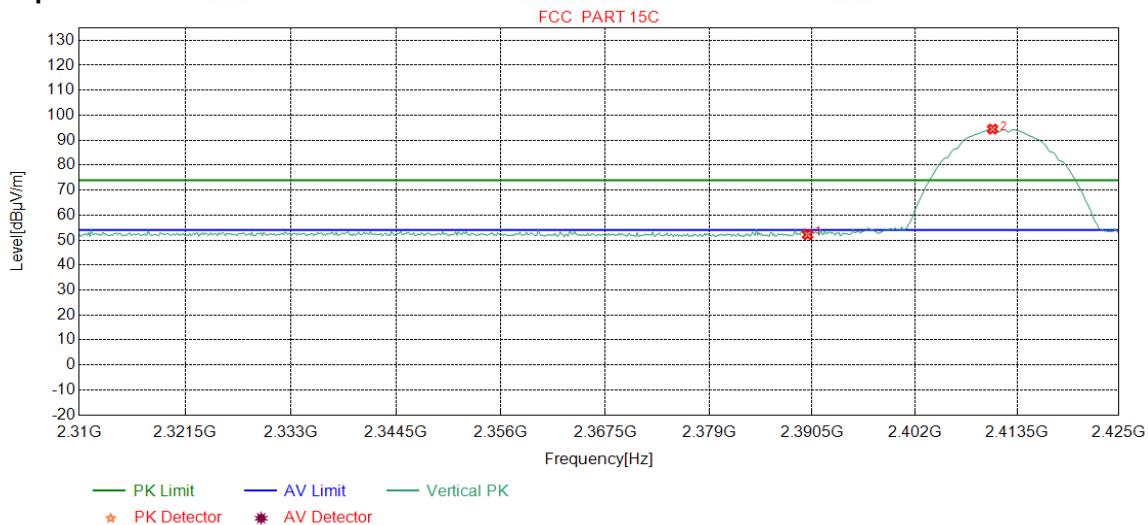Test Graph

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	49.70	52.20	74.00	21.80	Pass	Vertical
2	2410.7509	32.28	13.35	-43.12	91.92	94.43	74.00	-20.43	Pass	Vertical


Mode:	802.11 b Transmitting	Channel:	2412MHz
Remark:	AV		

Test Graph

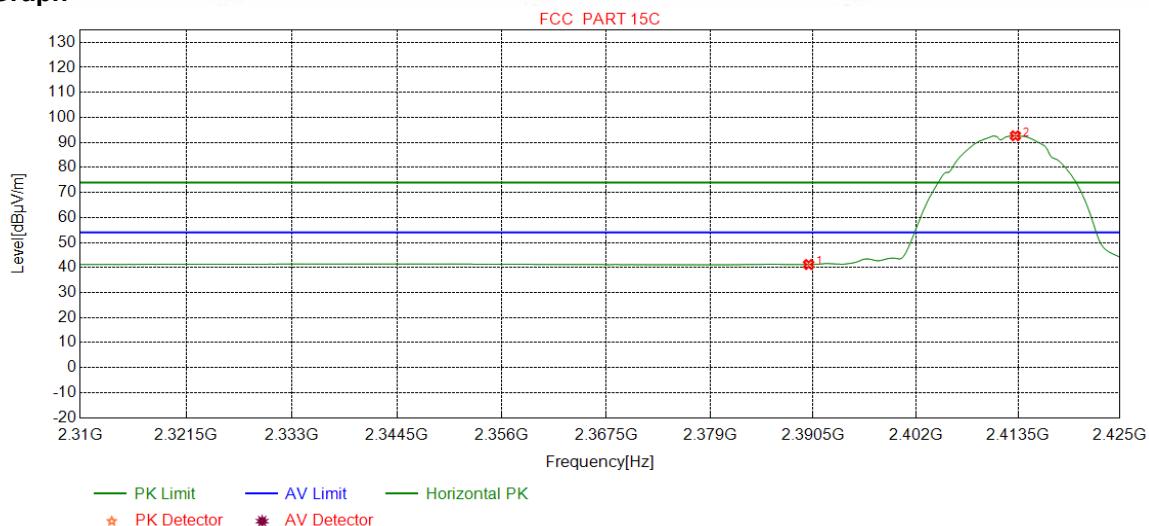

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	38.71	41.21	54.00	12.79	Pass	Horizontal
2	2413.1977	32.28	13.36	-43.12	90.13	92.65	54.00	-38.65	Pass	Horizontal


Mode:	802.11 b Transmitting	Channel:	2412MHz
Remark:	AV		

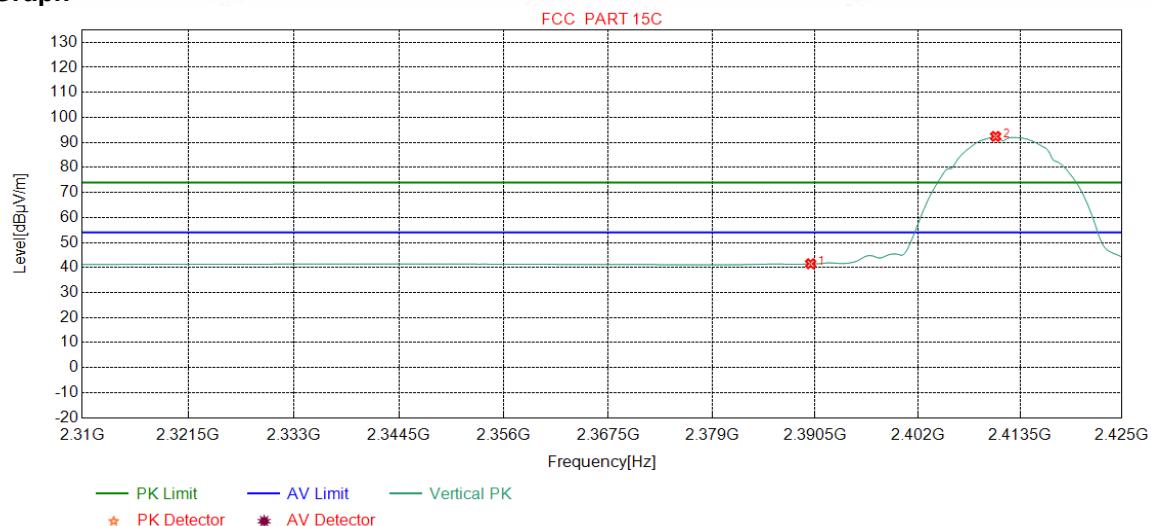Test Graph

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	39.01	41.51	54.00	12.49	Pass	Vertical
2	2410.7509	32.28	13.35	-43.12	89.90	92.41	54.00	-38.41	Pass	Vertical

Mode:	802.11 b Transmitting	Channel:	2462MHz
Remark:	PK		


Test Graph

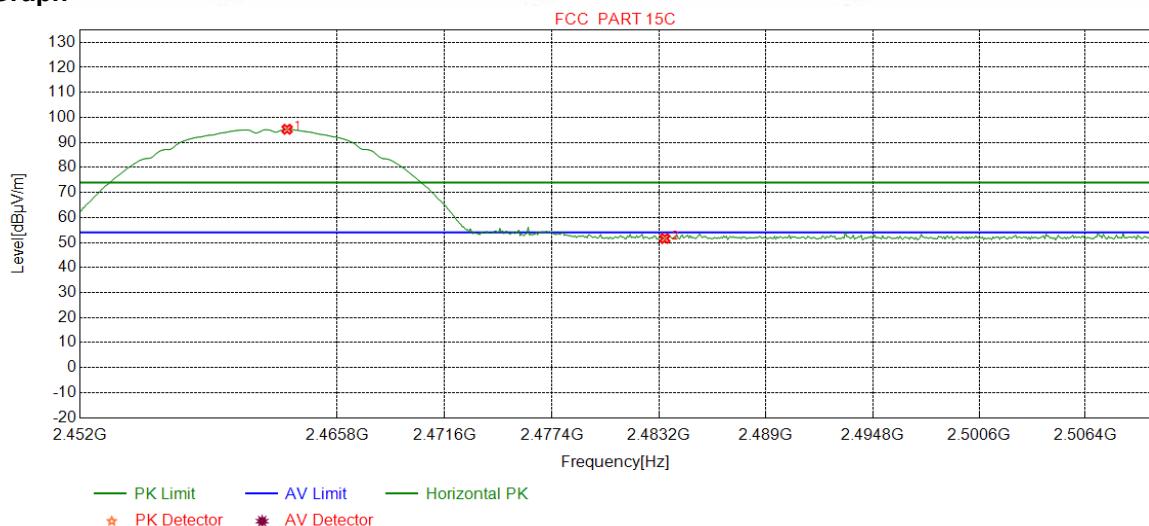

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2463.1064	32.35	13.47	-43.11	92.56	95.27	74.00	-21.27	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	48.95	51.60	74.00	22.40	Pass	Horizontal

Mode:	802.11 b Transmitting	Channel:	2462MHz
Remark:	PK		


Test Graph

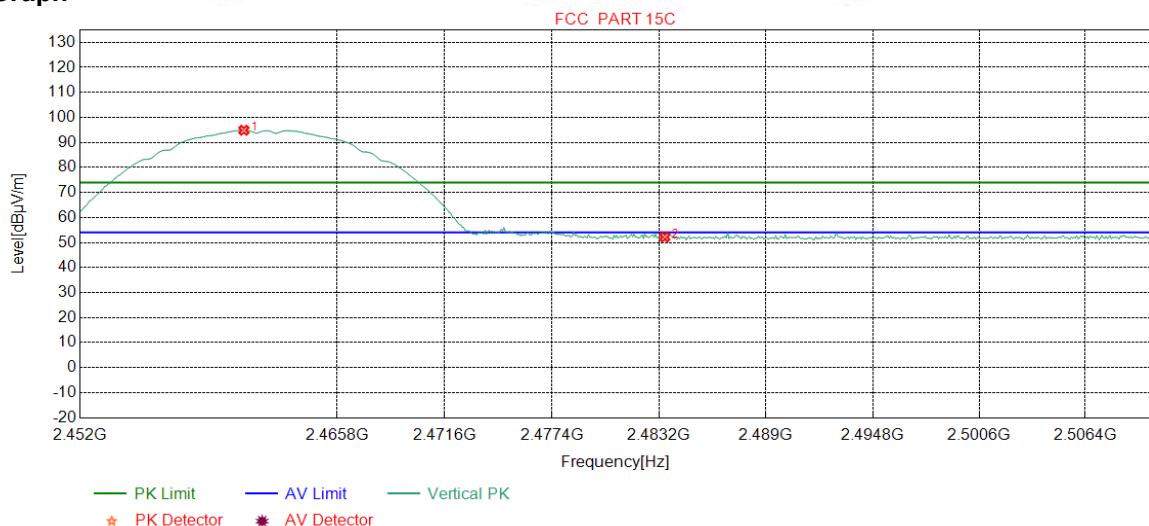

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2460.7835	32.35	13.48	-43.11	92.14	94.86	74.00	-20.86	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	49.55	52.20	74.00	21.80	Pass	Vertical

Mode:	802.11 b Transmitting	Channel:	2462MHz
Remark:	AV		


Test Graph

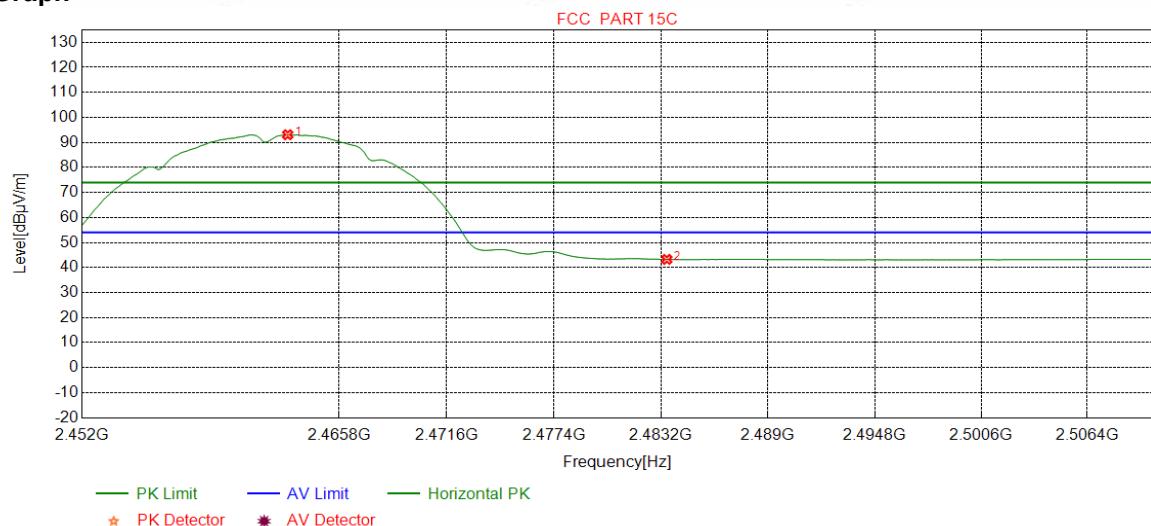

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2463.0338	32.35	13.47	-43.11	90.37	93.08	54.00	-39.08	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	40.60	43.25	54.00	10.75	Pass	Horizontal

Mode:	802.11 b Transmitting	Channel:	2462MHz
Remark:	AV		


Test Graph

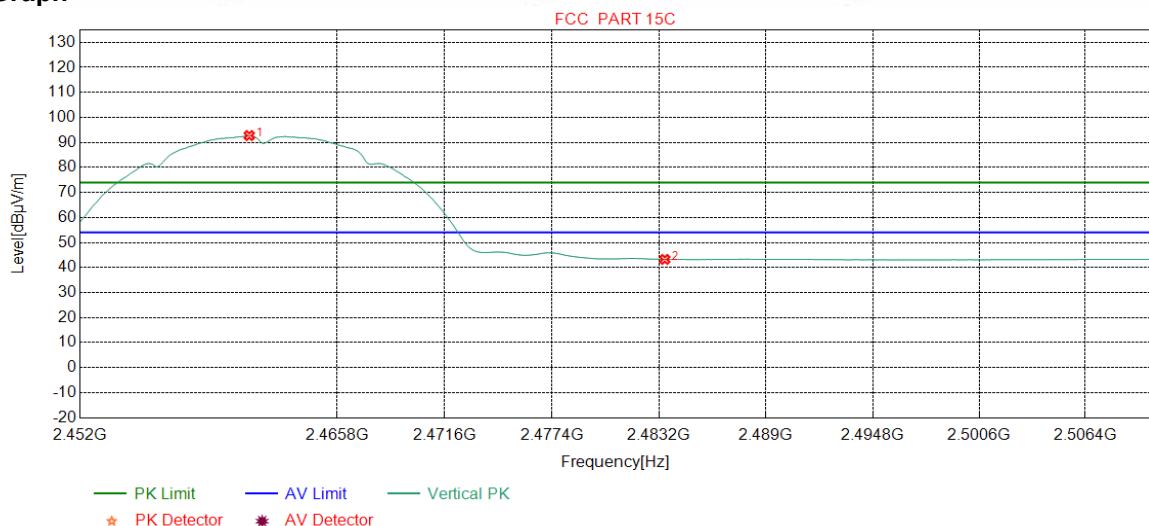

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2461.0738	32.35	13.48	-43.11	90.02	92.74	54.00	-38.74	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	40.59	43.24	54.00	10.76	Pass	Vertical

Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:	PK		


Test Graph

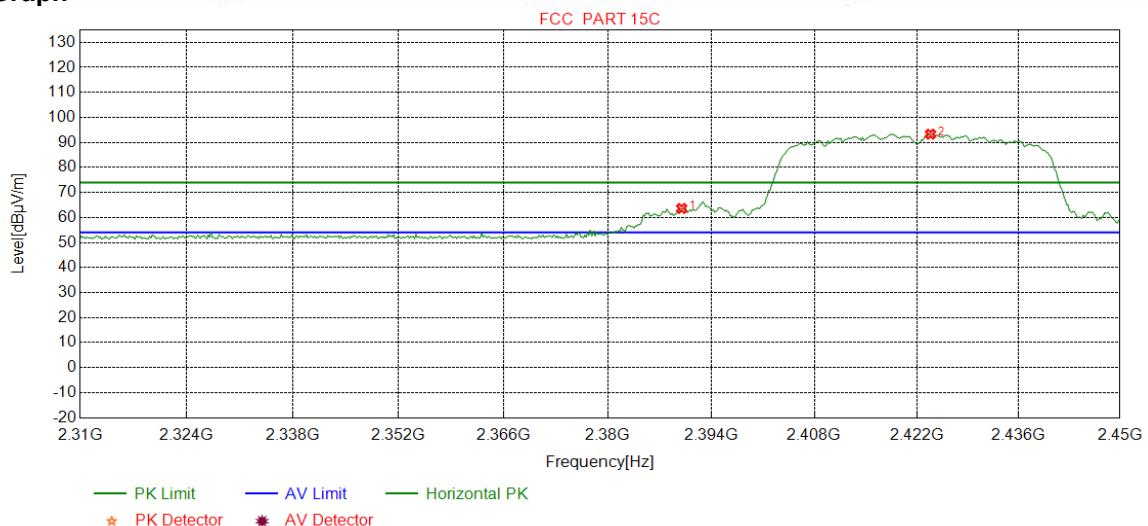

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	61.12	63.62	74.00	10.38	Pass	Horizontal
2	2423.8924	32.29	13.41	-43.11	90.71	93.30	74.00	-19.30	Pass	Horizontal

Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:	PK		


Test Graph

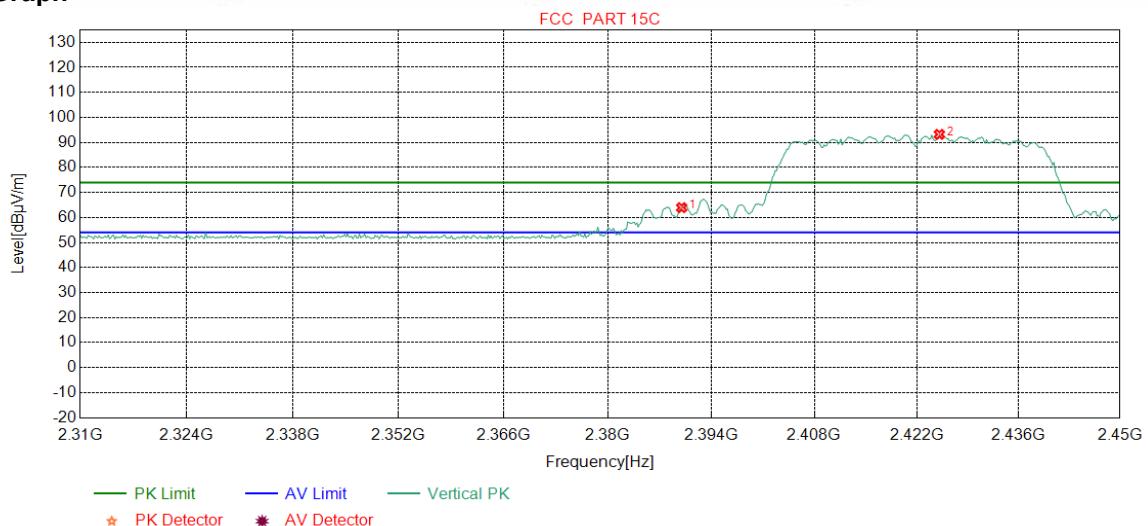

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	61.45	63.95	74.00	10.05	Pass	Vertical
2	2425.1189	32.30	13.42	-43.12	90.62	93.22	74.00	-19.22	Pass	Vertical


Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:	AV		

Test Graph

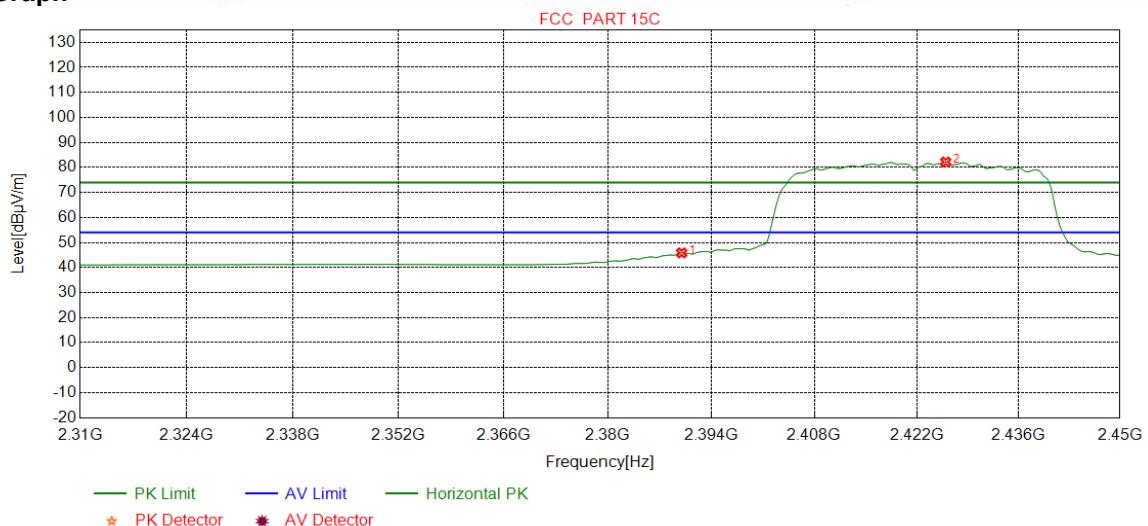


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	43.34	45.84	54.00	8.16	Pass	Horizontal
2	2425.9950	32.30	13.42	-43.12	79.59	82.19	54.00	-28.19	Pass	Horizontal

Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:	AV		

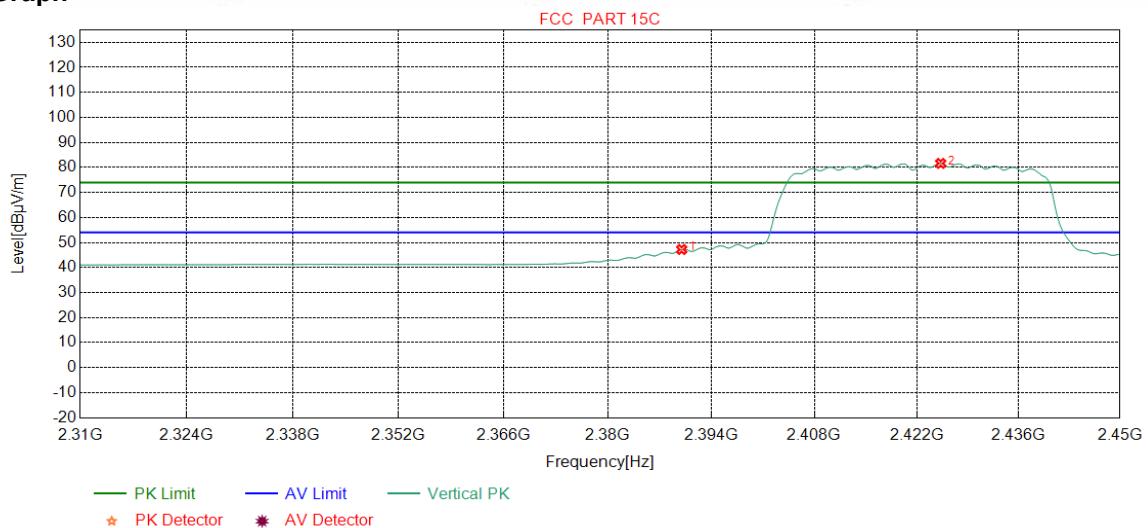Test Graph

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	44.72	47.22	54.00	6.78	Pass	Vertical
2	2425.2941	32.30	13.42	-43.12	79.02	81.62	54.00	-27.62	Pass	Vertical


Mode:	802.11 n(HT40)) Transmitting	Channel:	2452MHz
Remark:	PK		

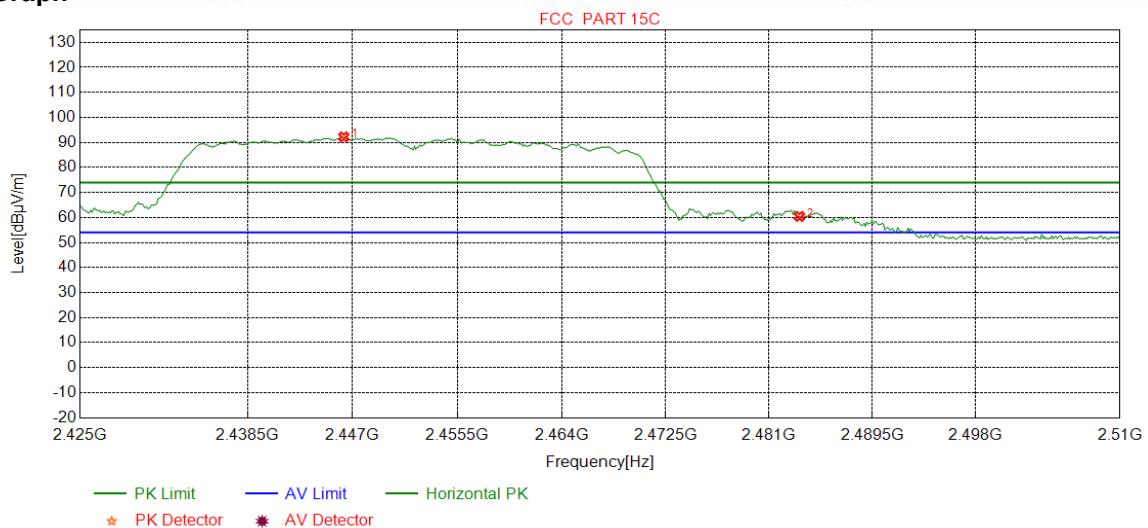Test Graph

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2446.2766	32.32	13.51	-43.10	89.50	92.23	74.00	-18.23	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	57.78	60.43	74.00	13.57	Pass	Horizontal


Mode:	802.11 n(HT40) Transmitting	Channel:	2452MHz
Remark:	PK		

Test Graph

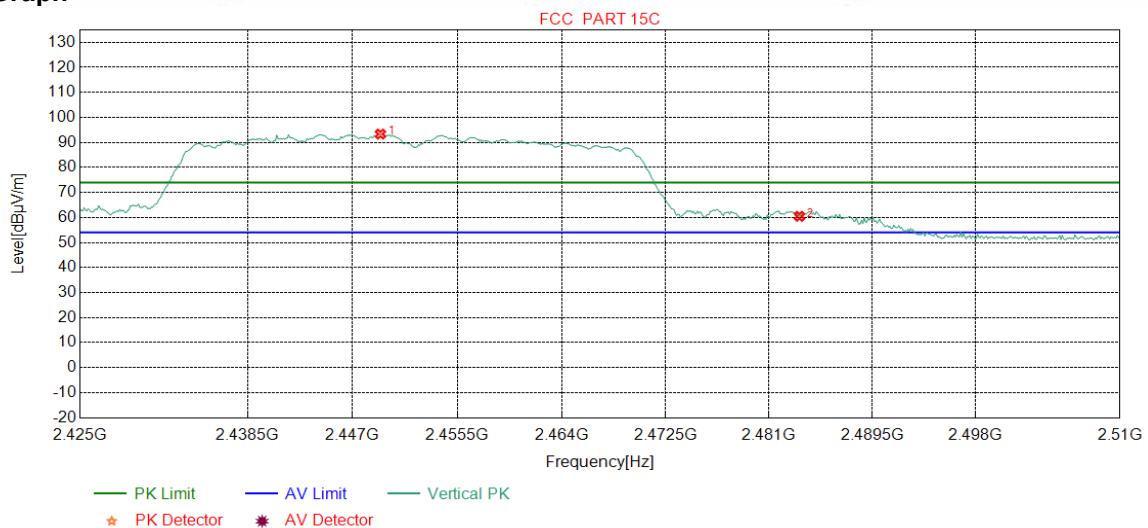


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2449.2553	32.33	13.53	-43.11	90.58	93.33	74.00	-19.33	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	57.83	60.48	74.00	13.52	Pass	Vertical

Mode:	802.11 n(HT40) Transmitting	Channel:	2452MHz
Remark:	AV		

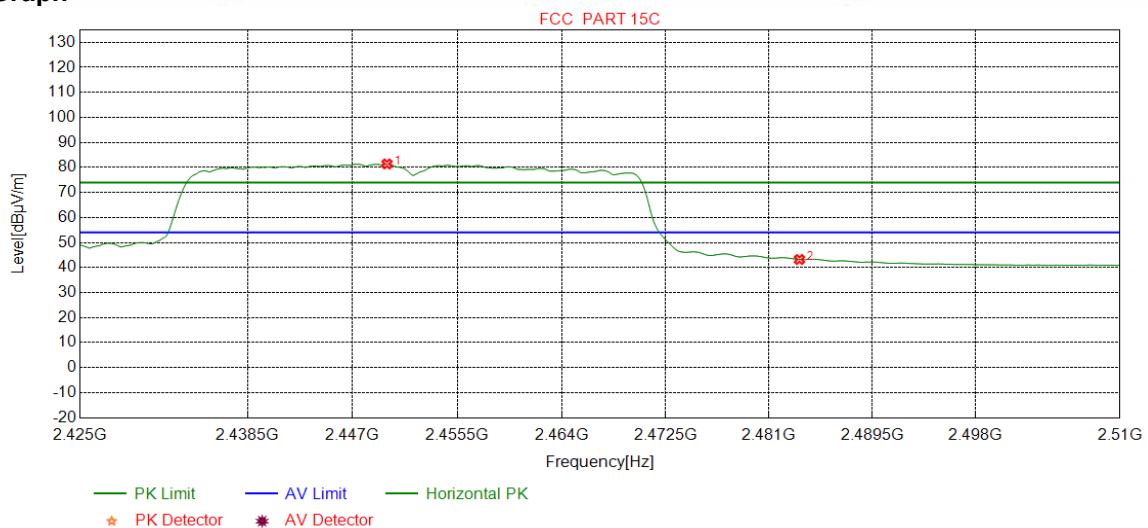Test Graph

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2449.7872	32.33	13.53	-43.11	78.65	81.40	54.00	-27.40	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	40.56	43.21	54.00	10.79	Pass	Horizontal


Mode:	802.11 n(HT40) Transmitting	Channel:	2452MHz
Remark:	AV		

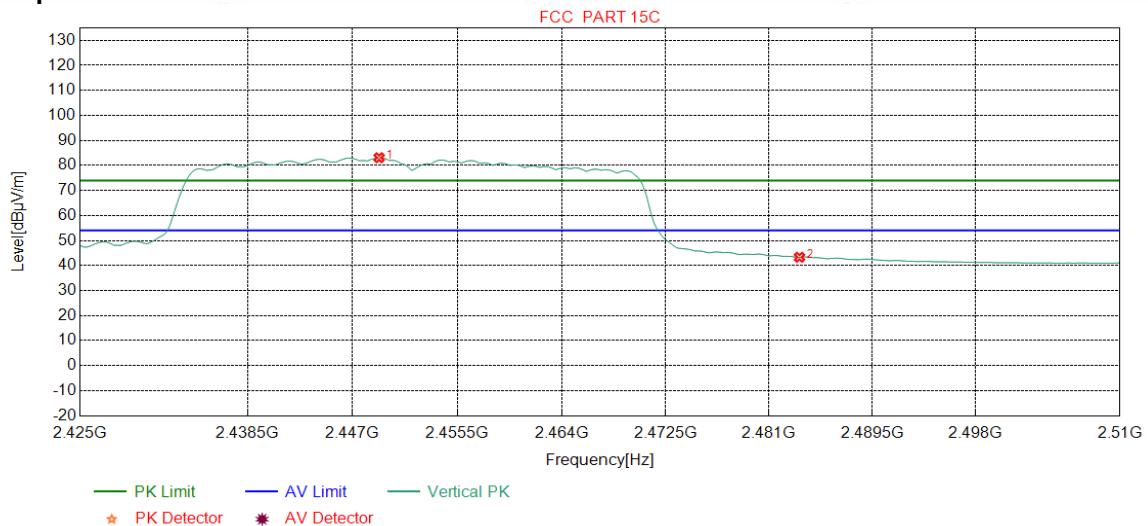Test Graph

N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Readin g [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margi n [dB]	Result	Polarity
1	2449.1489	32.33	13.53	-43.12	80.35	83.09	54.00	-29.09	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	40.66	43.31	54.00	10.69	Pass	Vertical


For Attenna2

Mode:	802.11 b Transmitting	Channel:	2412MHz
Remark:	PK		

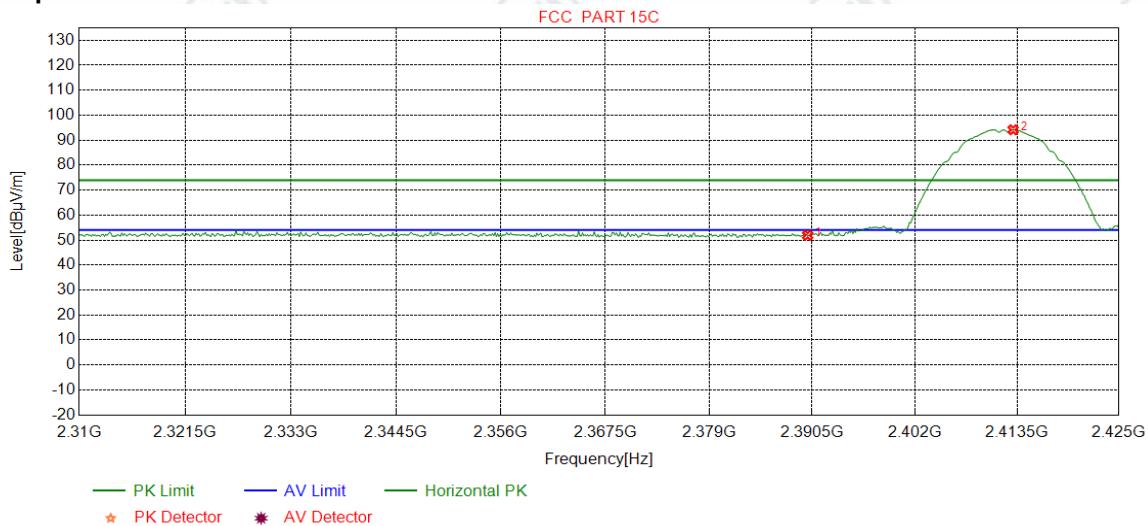Test Graph


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	49.40	51.90	74.00	22.10	Pass	Horizontal
2	2413.0538	32.28	13.36	-43.12	91.65	94.17	74.00	-20.17	Pass	Horizontal


Mode:	802.11 b Transmitting	Channel:	2412MHz
Remark:	PK		

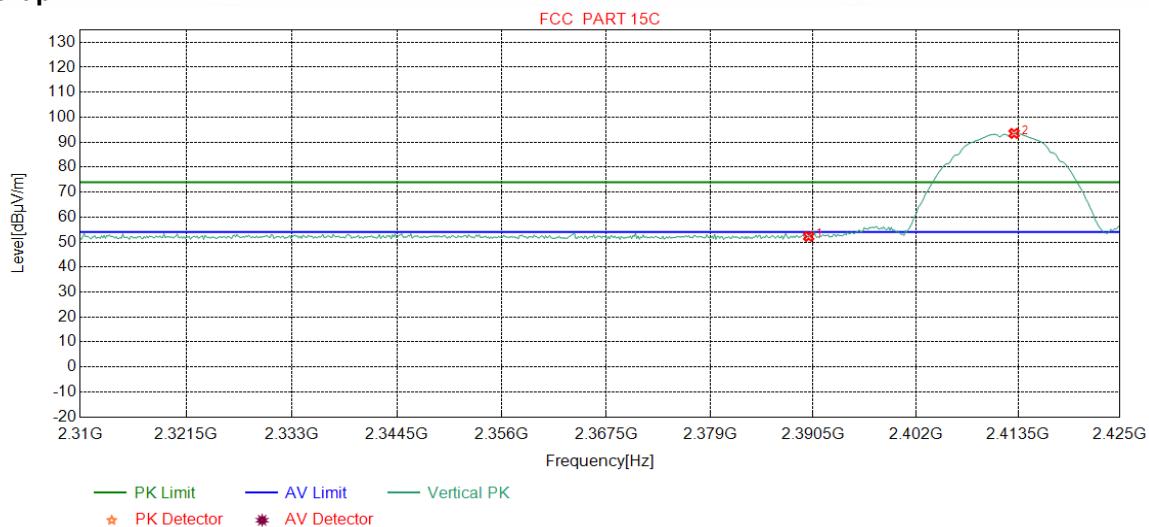Test Graph

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	49.75	52.25	74.00	21.75	Pass	Vertical
2	2413.0538	32.28	13.36	-43.12	90.98	93.50	74.00	-19.50	Pass	Vertical

Mode:	802.11 b Transmitting	Channel:	2412MHz
Remark:	AV		


Test Graph

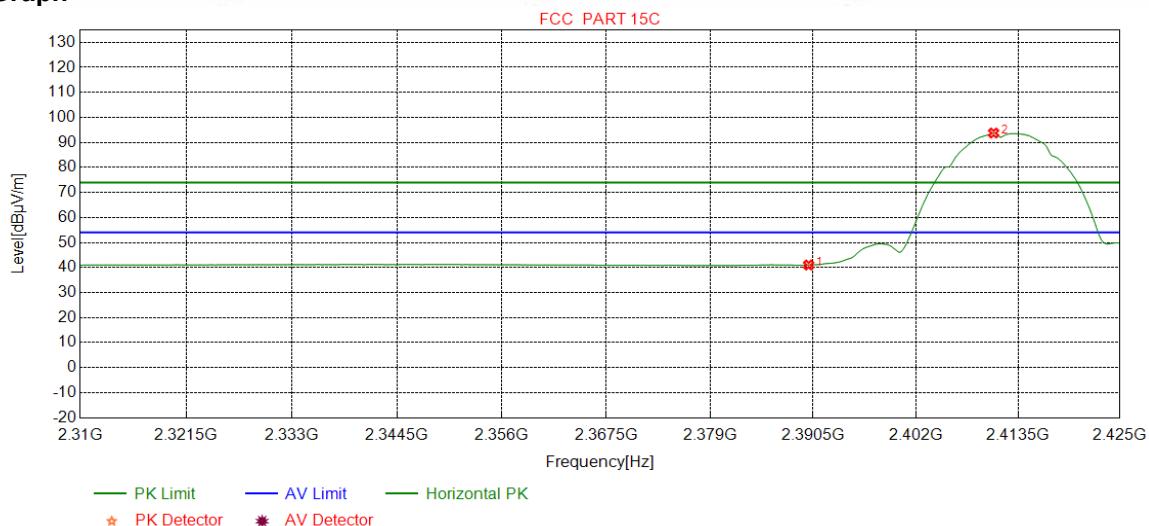

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	38.50	41.00	54.00	13.00	Pass	Horizontal
2	2410.7509	32.28	13.35	-43.12	91.24	93.75	54.00	-39.75	Pass	Horizontal

Mode:	802.11 b Transmitting	Channel:	2412MHz
Remark:	AV		


Test Graph

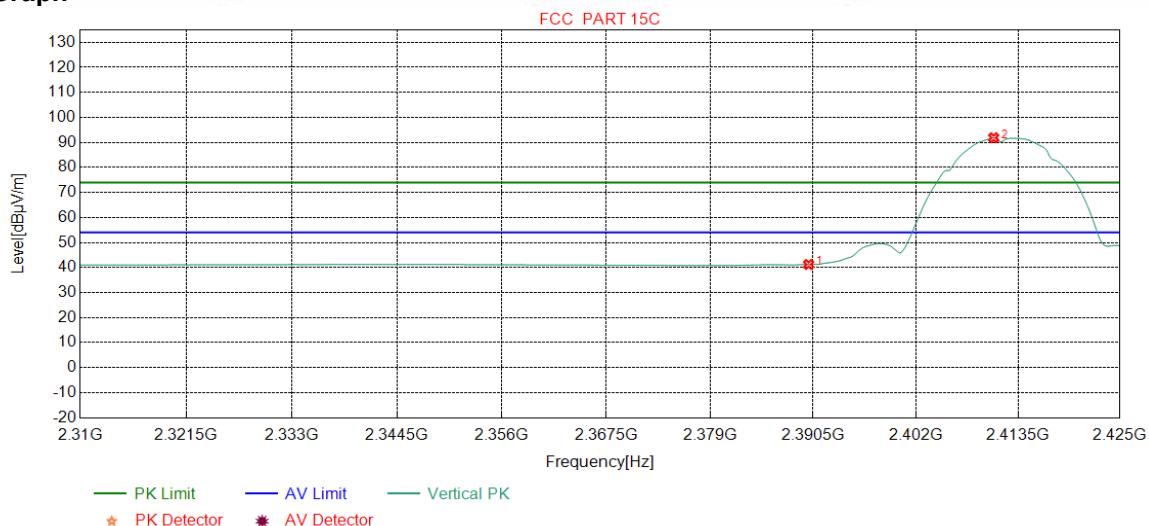

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	38.72	41.22	54.00	12.78	Pass	Vertical
2	2410.7509	32.28	13.35	-43.12	89.37	91.88	54.00	-37.88	Pass	Vertical

Mode:	802.11 b Transmitting	Channel:	2462MHz
Remark:	PK		


Test Graph

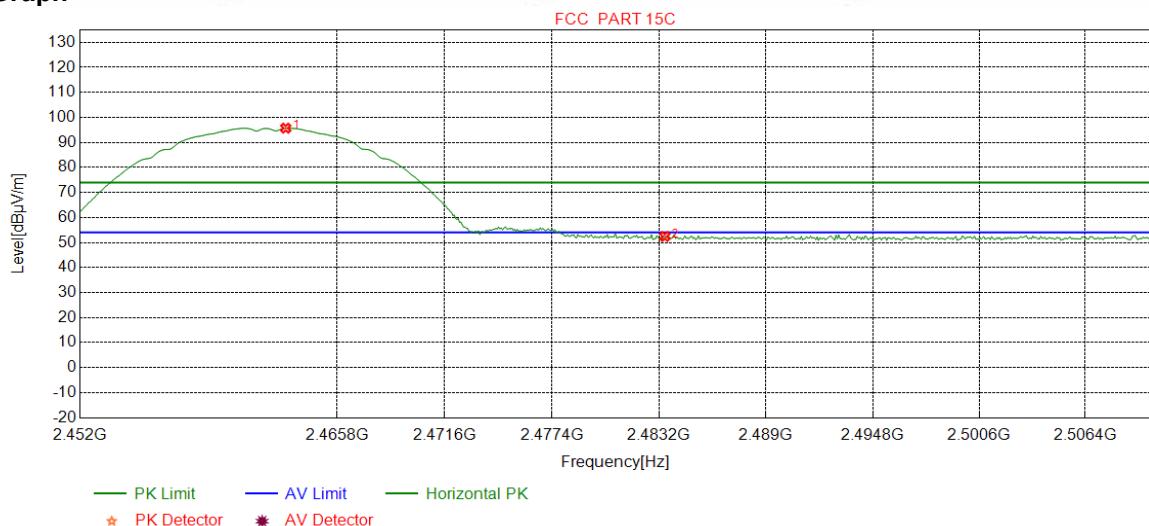

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2463.0338	32.35	13.47	-43.11	93.00	95.71	74.00	-21.71	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	49.77	52.42	74.00	21.58	Pass	Horizontal

Mode:	802.11 b Transmitting	Channel:	2462MHz
Remark:	PK		


Test Graph

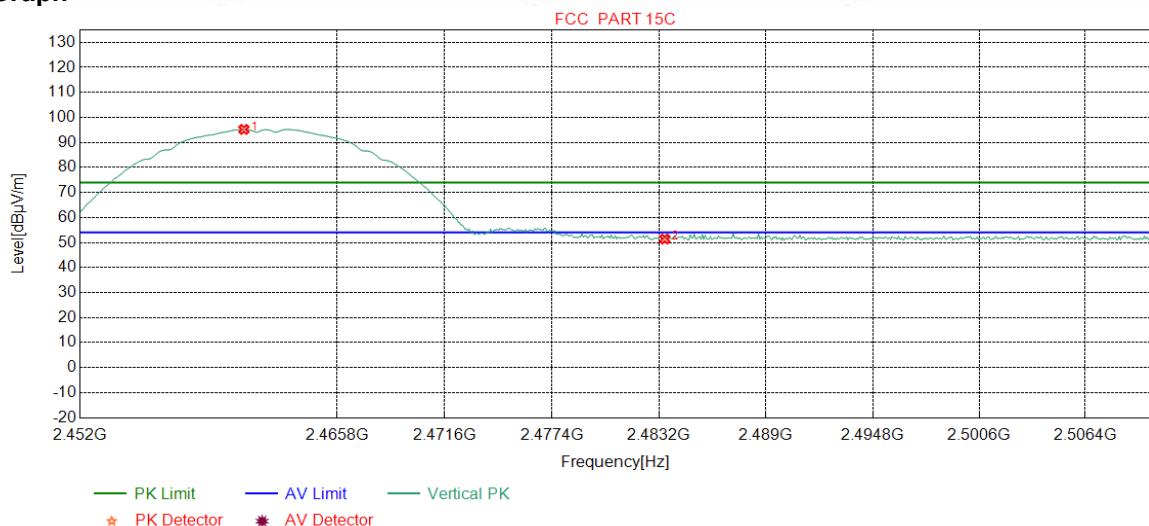

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2460.7835	32.35	13.48	-43.11	92.49	95.21	74.00	-21.21	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	48.76	51.41	74.00	22.59	Pass	Vertical

Mode:	802.11 b Transmitting	Channel:	2462MHz
Remark:	AV		


Test Graph

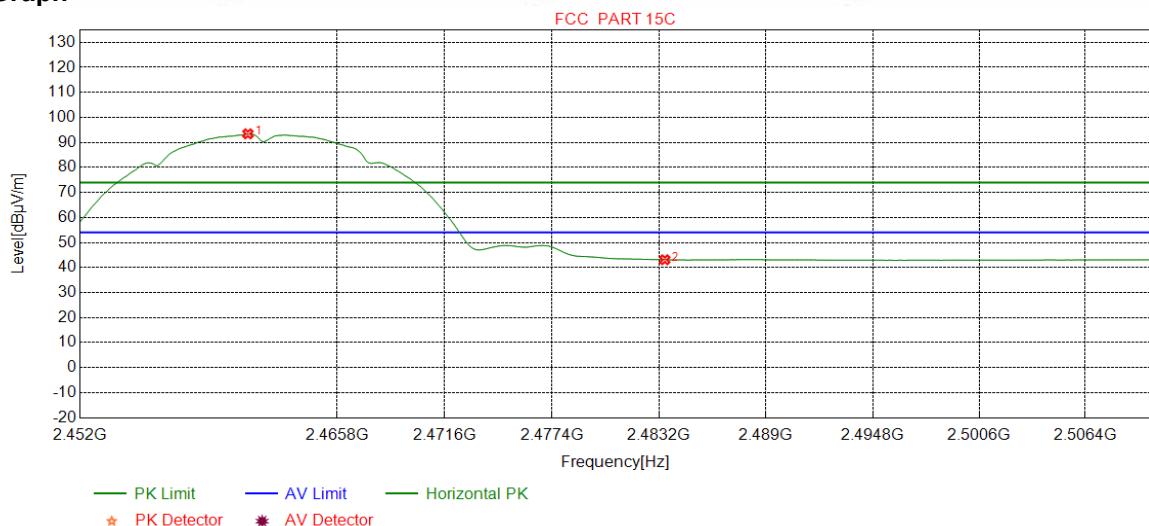

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2461.0013	32.35	13.48	-43.11	90.72	93.44	54.00	-39.44	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	40.46	43.11	54.00	10.89	Pass	Horizontal

Mode:	802.11 b Transmitting	Channel:	2462MHz
Remark:	AV		


Test Graph

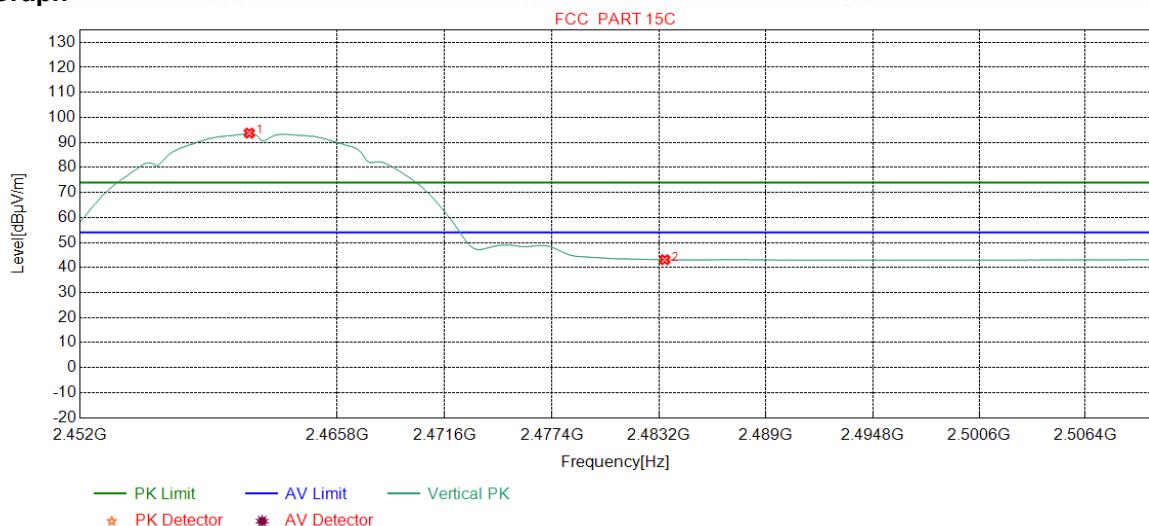

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2461.0738	32.35	13.48	-43.11	91.00	93.72	54.00	-39.72	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	40.47	43.12	54.00	10.88	Pass	Vertical

Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:	PK		


Test Graph

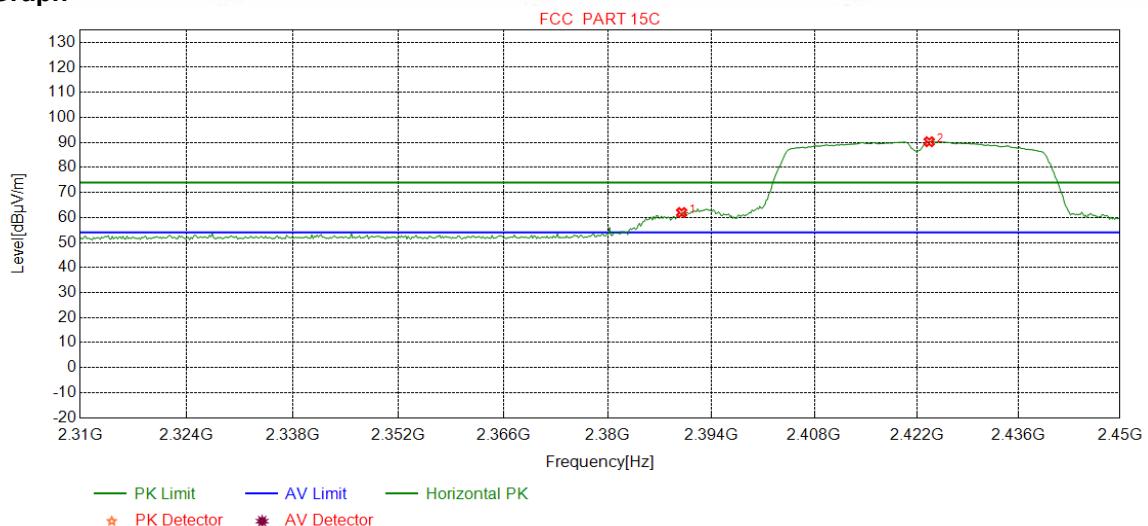

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	59.48	61.98	74.00	12.02	Pass	Horizontal
2	2423.7171	32.29	13.41	-43.11	87.69	90.28	74.00	-16.28	Pass	Horizontal

Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:	PK		


Test Graph

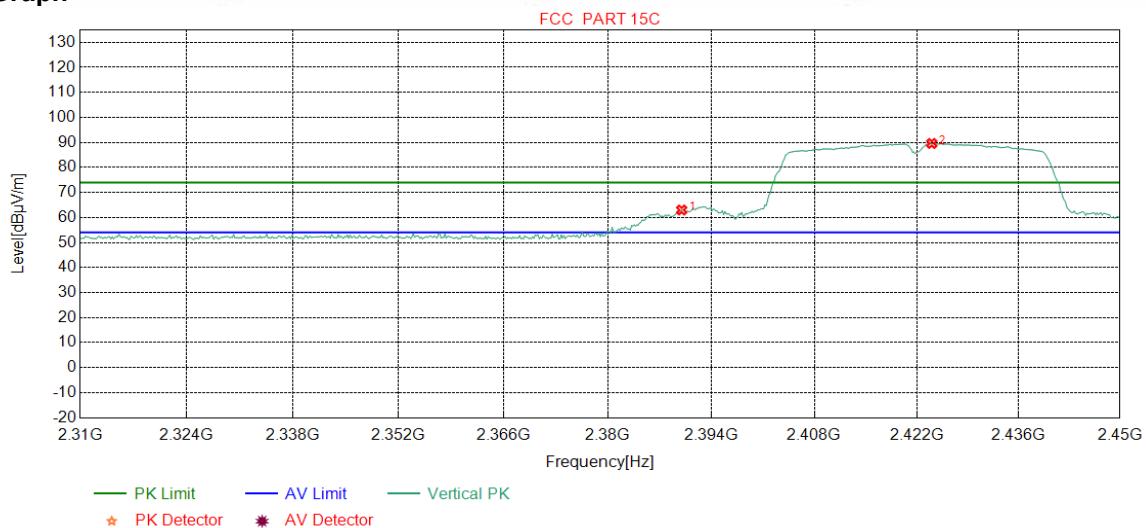

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	60.49	62.99	74.00	11.01	Pass	Vertical
2	2424.0676	32.29	13.41	-43.11	87.00	89.59	74.00	-15.59	Pass	Vertical

Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:	AV		


Test Graph

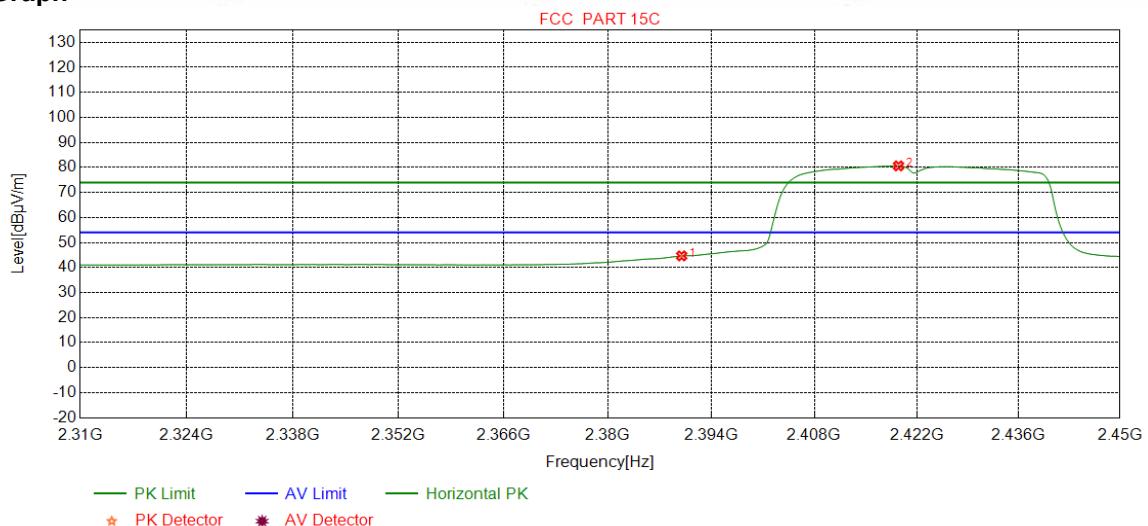

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	42.15	44.65	54.00	9.35	Pass	Horizontal
2	2419.5119	32.29	13.39	-43.12	78.06	80.62	54.00	-26.62	Pass	Horizontal


Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:	AV		

Test Graph

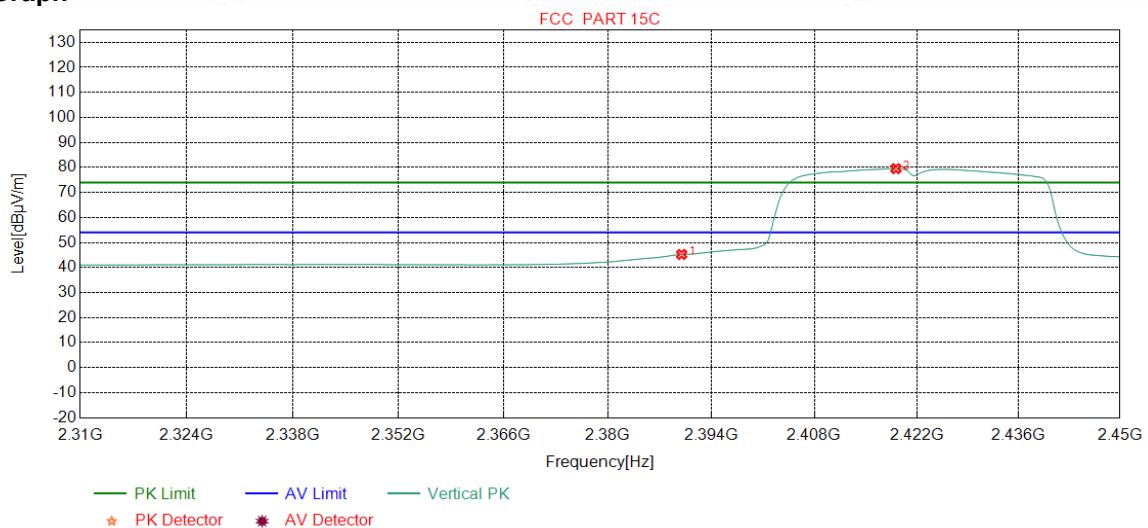


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	42.74	45.24	54.00	8.76	Pass	Vertical
2	2419.1615	32.29	13.39	-43.12	76.96	79.52	54.00	-25.52	Pass	Vertical

Mode:	802.11 n(HT40)) Transmitting	Channel:	2452MHz
Remark:	PK		

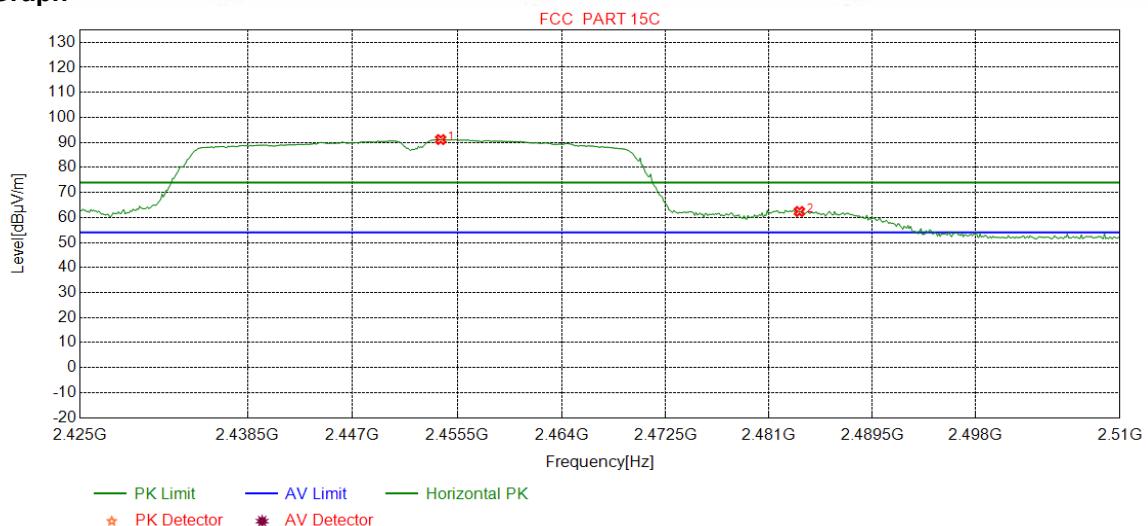Test Graph


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2454.1489	32.34	13.51	-43.11	88.40	91.14	74.00	-17.14	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	59.74	62.39	74.00	11.61	Pass	Horizontal

Mode:	802.11 n(HT40) Transmitting	Channel:	2452MHz
Remark:	PK		

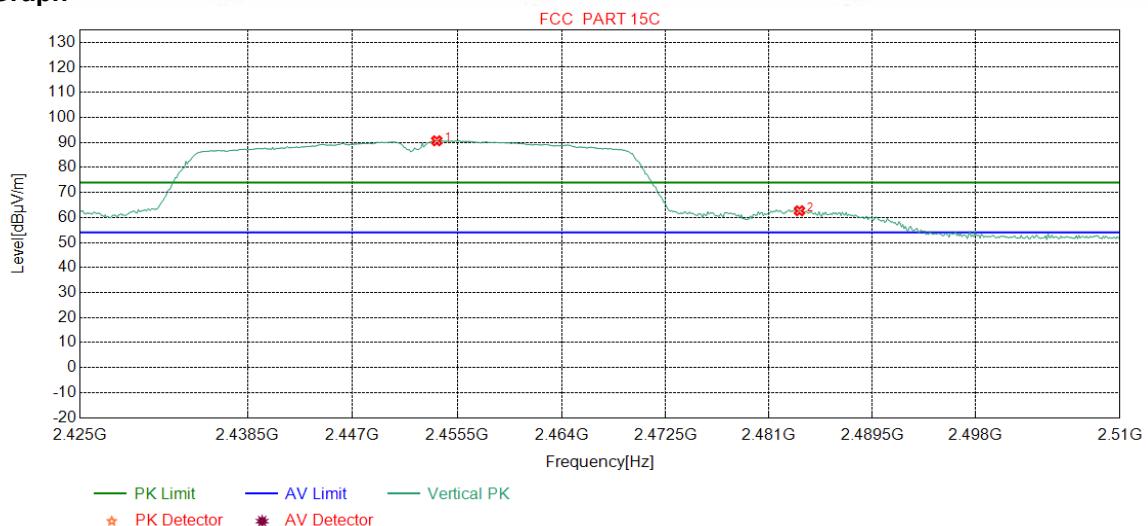Test Graph


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2453.8298	32.34	13.51	-43.11	87.91	90.65	74.00	-16.65	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	60.02	62.67	74.00	11.33	Pass	Vertical

Mode:	802.11 n(HT40) Transmitting	Channel:	2452MHz
Remark:	AV		

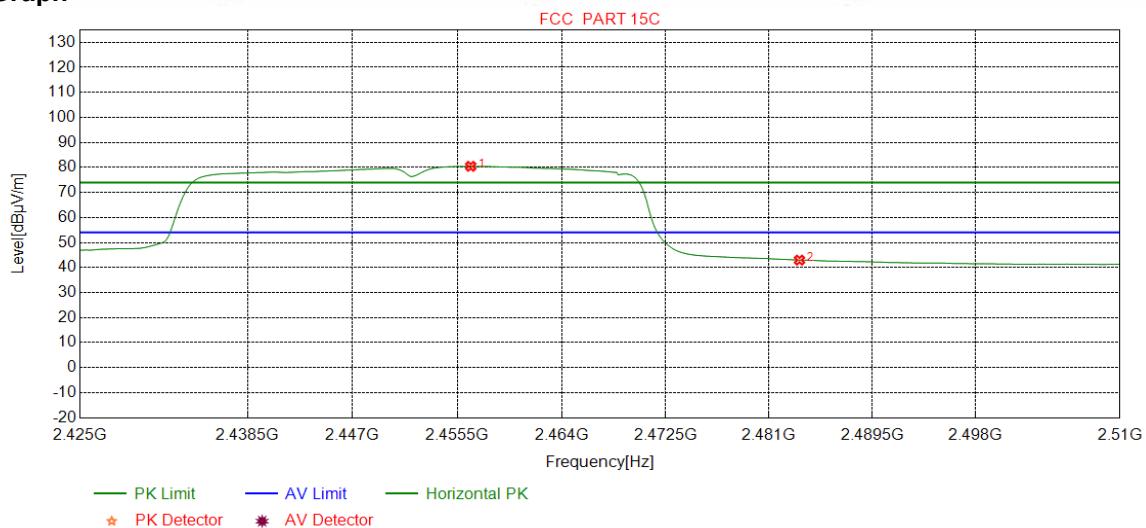Test Graph

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2456.5957	32.34	13.50	-43.11	77.72	80.45	54.00	-26.45	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	40.32	42.97	54.00	11.03	Pass	Horizontal


Mode:	802.11 n(HT40) Transmitting	Channel:	2452MHz
Remark:	AV		

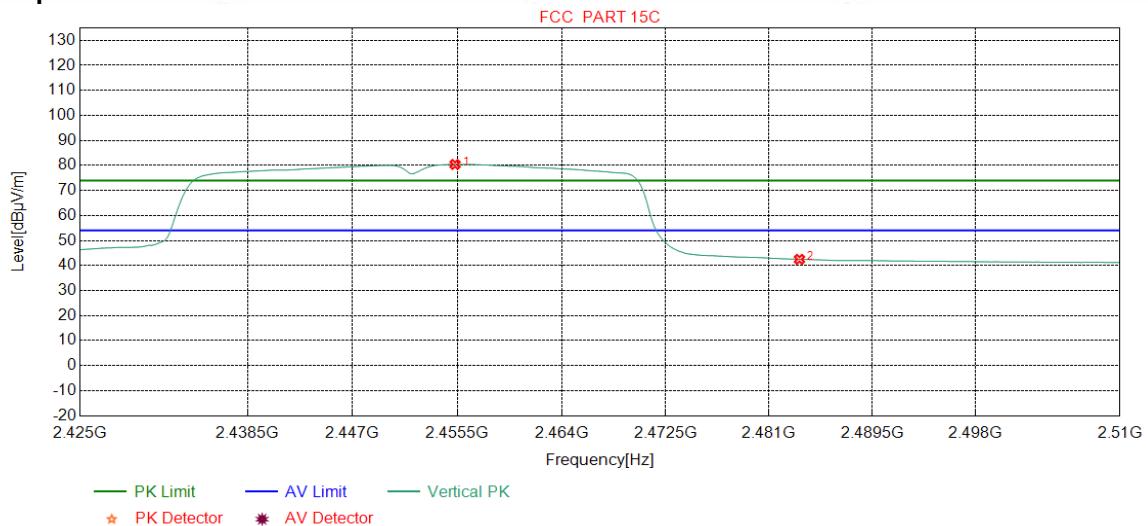Test Graph

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2455.3191	32.34	13.51	-43.12	77.68	80.41	54.00	-26.41	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	39.83	42.48	54.00	11.52	Pass	Vertical

For Attenna2x2 MIMO


Mode:	802.11 n(HT20) Transmitting	Channel:	2412MHz
Remark:	PK		

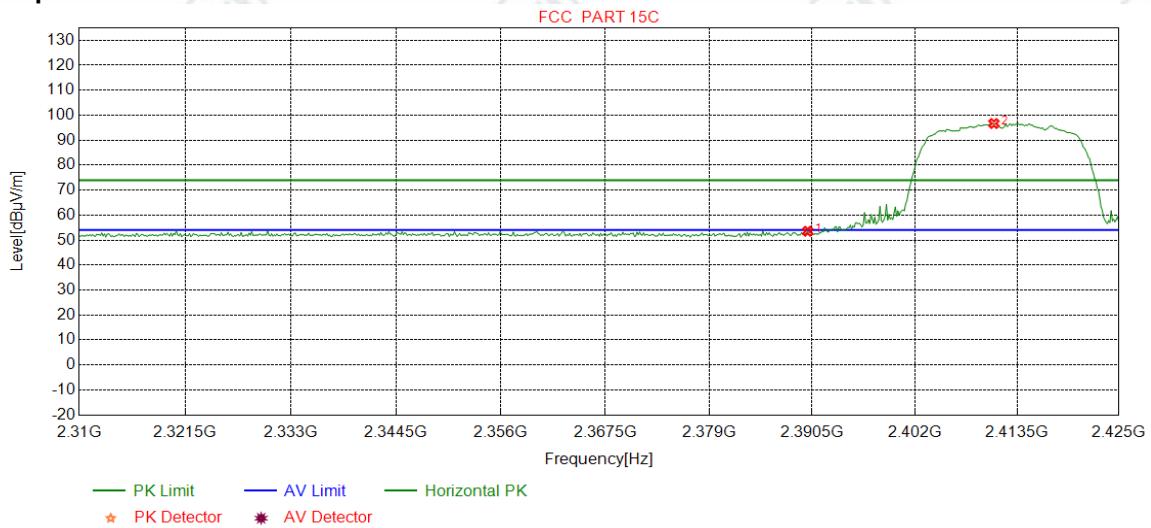Test Graph


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	51.03	53.53	74.00	20.47	Pass	Horizontal
2	2410.8949	32.28	13.35	-43.12	94.16	96.67	74.00	-22.67	Pass	Horizontal


Mode:	802.11 n(HT20) Transmitting	Channel:	2412MHz
Remark:	PK		

Test Graph

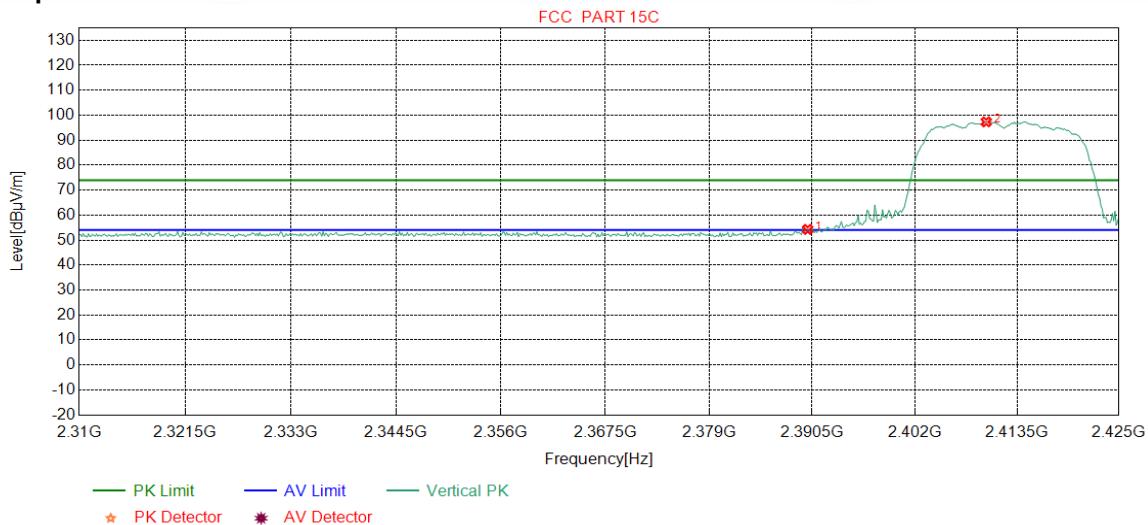

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	51.78	54.28	74.00	19.72	Pass	Vertical
2	2410.0313	32.27	13.35	-43.12	94.83	97.33	74.00	-23.33	Pass	Vertical


Mode:	802.11 n(HT20) Transmitting	Channel:	2412MHz
Remark:	AV		

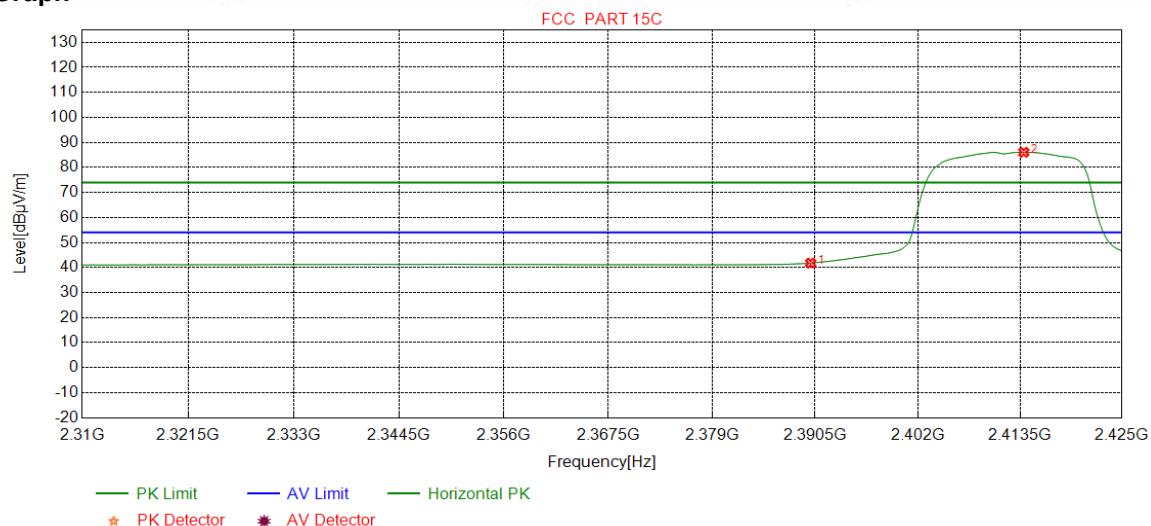Test Graph

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	39.28	41.78	54.00	12.22	Pass	Horizontal
2	2413.9174	32.28	13.36	-43.11	83.54	86.07	54.00	-32.07	Pass	Horizontal

Mode:	802.11 n(HT20) Transmitting	Channel:	2412MHz
Remark:	AV		


Test Graph

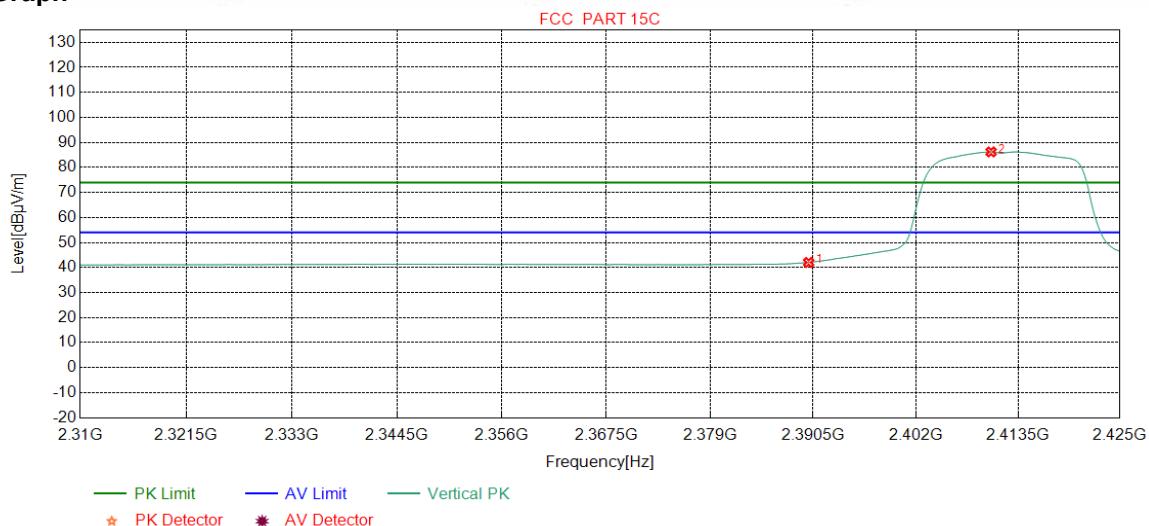

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	39.53	42.03	54.00	11.97	Pass	Vertical
2	2410.4631	32.27	13.35	-43.12	83.71	86.21	54.00	-32.21	Pass	Vertical

Mode:	802.11 n(HT20) Transmitting	Channel:	2462MHz
Remark:	PK		


Test Graph

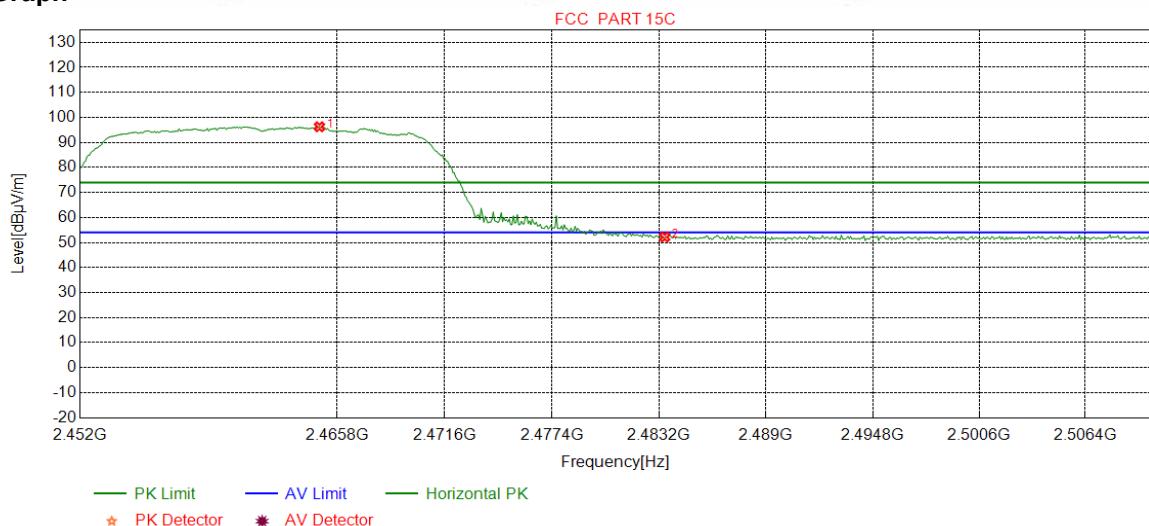

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2464.8486	32.35	13.46	-43.10	93.54	96.25	74.00	-22.25	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	49.55	52.20	74.00	21.80	Pass	Horizontal

Mode:	802.11 n(HT20) Transmitting	Channel:	2462MHz
Remark:	PK		


Test Graph

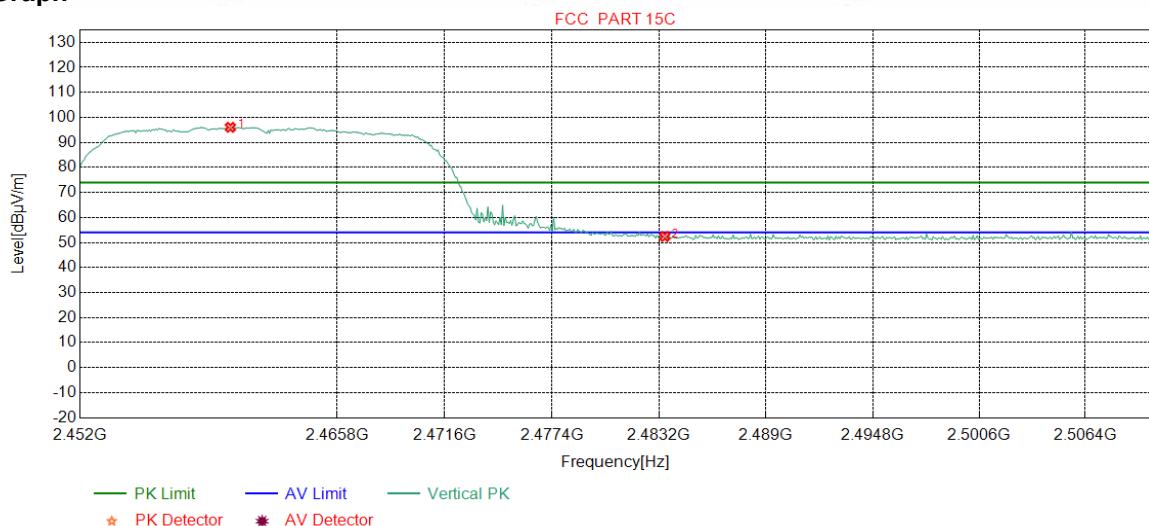

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2460.0576	32.34	13.48	-43.10	93.32	96.04	74.00	-22.04	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	49.75	52.40	74.00	21.60	Pass	Vertical

Mode:	802.11 n(HT20) Transmitting	Channel:	2462MHz
Remark:	AV		


Test Graph

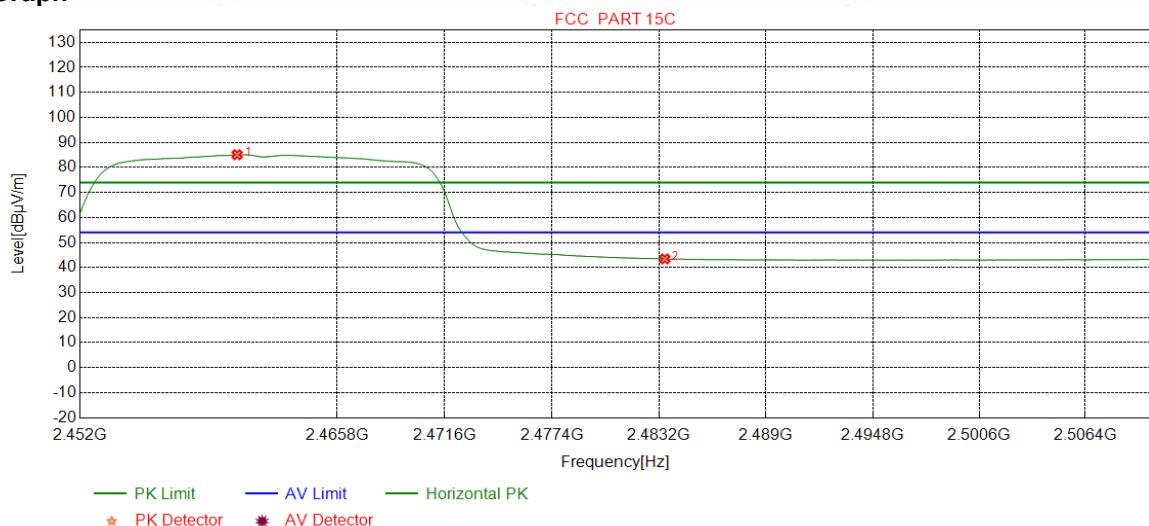

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2460.4205	32.34	13.48	-43.10	82.35	85.07	54.00	-31.07	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	40.78	43.43	54.00	10.57	Pass	Horizontal


Mode:	802.11 n(HT20) Transmitting	Channel:	2462MHz
Remark:	AV		

Test Graph

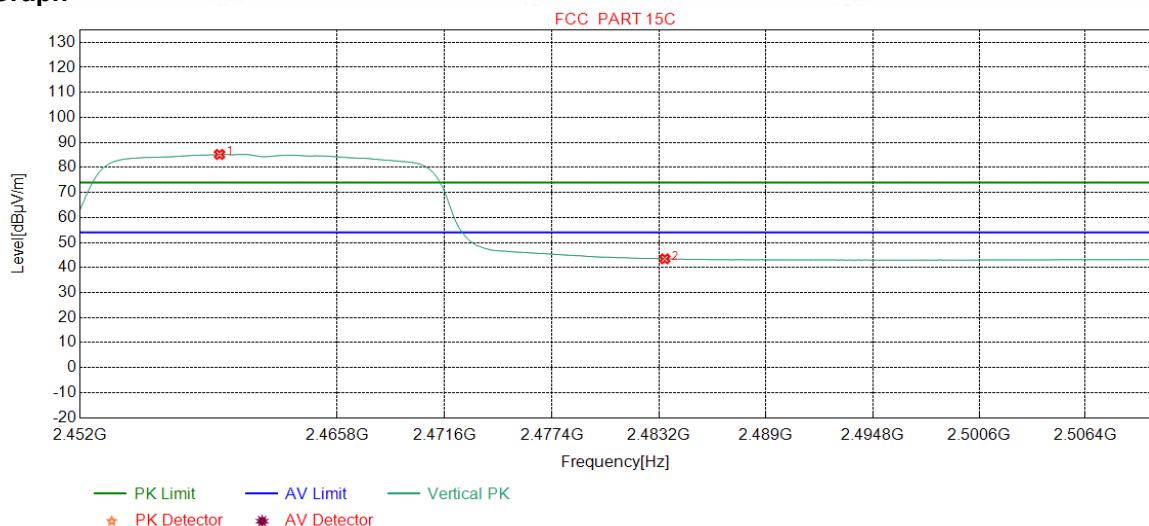

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2459.4768	32.34	13.49	-43.11	82.49	85.21	54.00	-31.21	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	40.83	43.48	54.00	10.52	Pass	Vertical


Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:	PK		

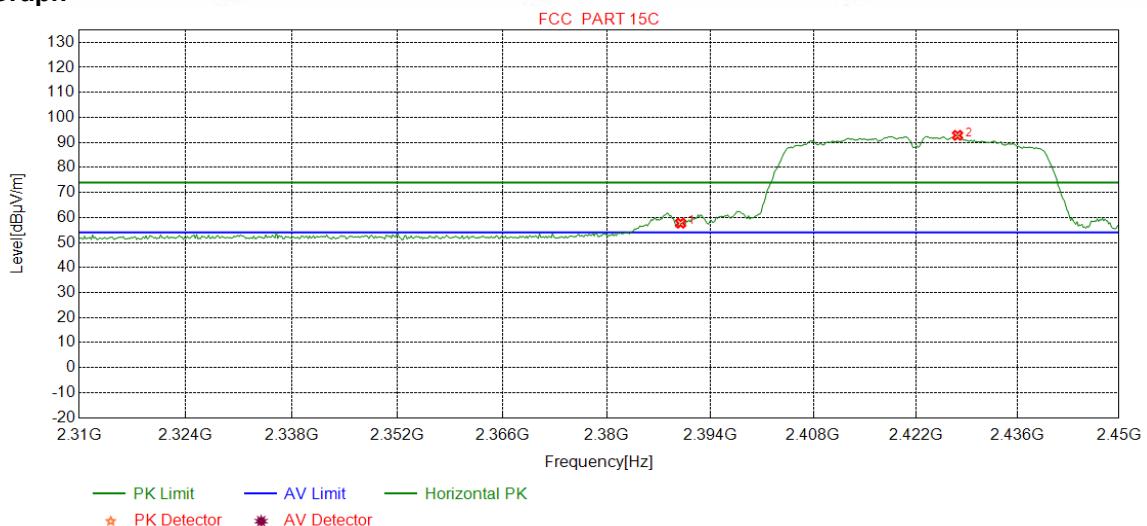Test Graph

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	55.24	57.74	74.00	16.26	Pass	Horizontal
2	2427.7472	32.30	13.43	-43.12	90.23	92.84	74.00	-18.84	Pass	Horizontal

Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:	PK		


Test Graph

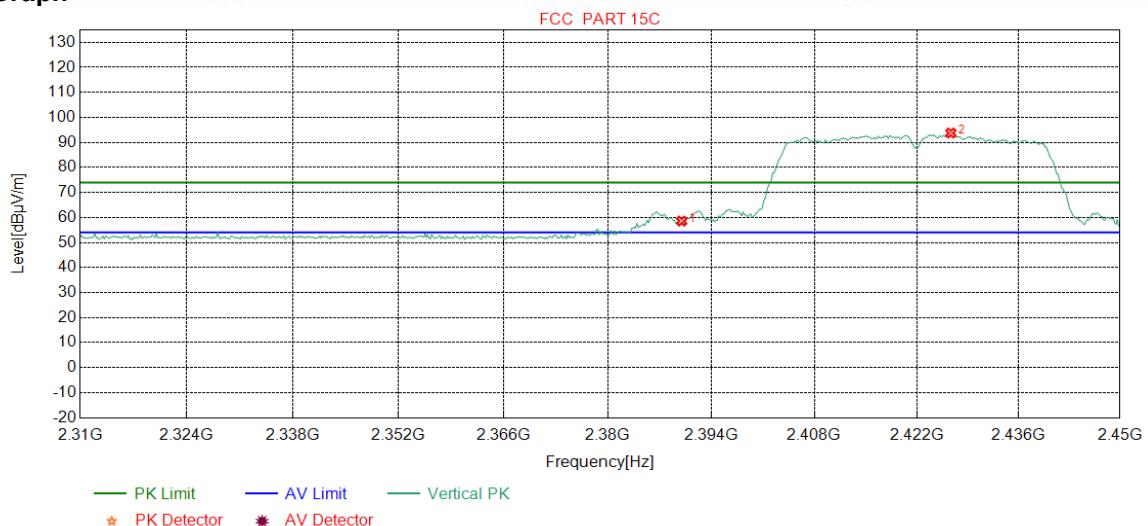

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	56.07	58.57	74.00	15.43	Pass	Vertical
2	2426.6959	32.30	13.42	-43.11	91.15	93.76	74.00	-19.76	Pass	Vertical

Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:	AV		


Test Graph

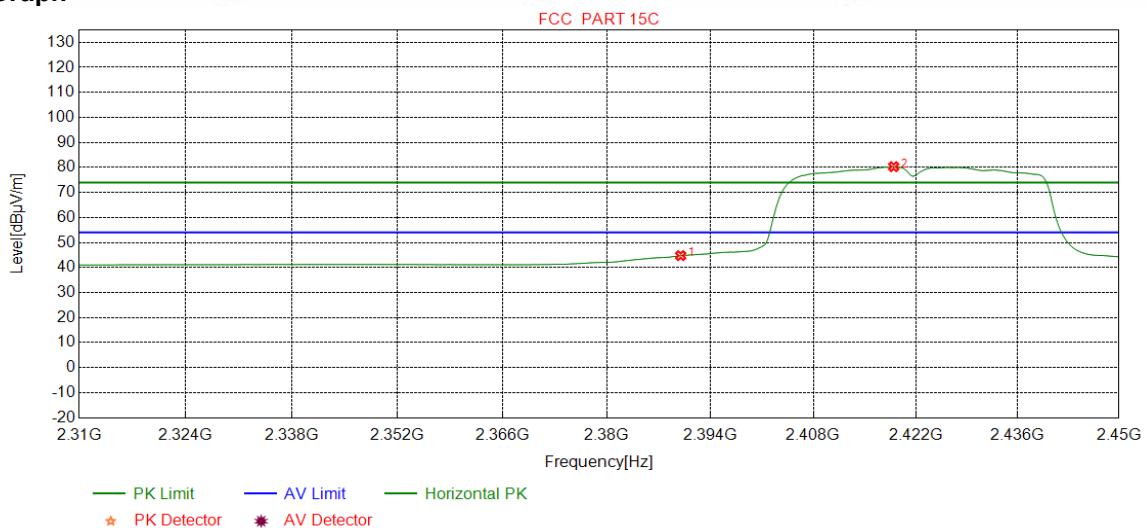

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	42.26	44.76	54.00	9.24	Pass	Horizontal
2	2418.9862	32.29	13.39	-43.12	77.76	80.32	54.00	-26.32	Pass	Horizontal

Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:	AV		


Test Graph

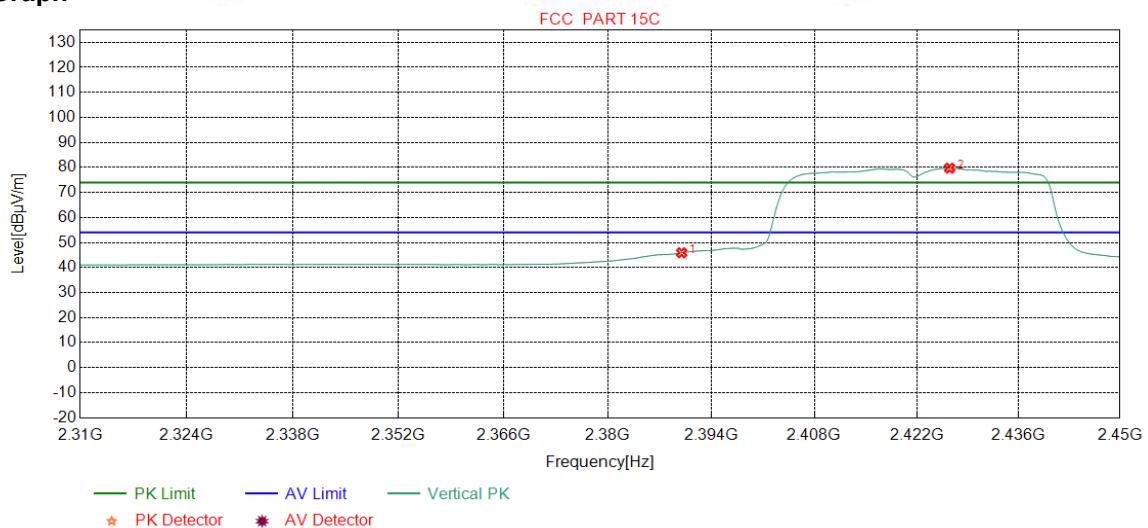

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	43.42	45.92	54.00	8.08	Pass	Vertical
2	2426.5207	32.30	13.42	-43.12	77.14	79.74	54.00	-25.74	Pass	Vertical

Mode:	802.11 n(HT40)) Transmitting	Channel:	2452MHz
Remark:	PK		


Test Graph

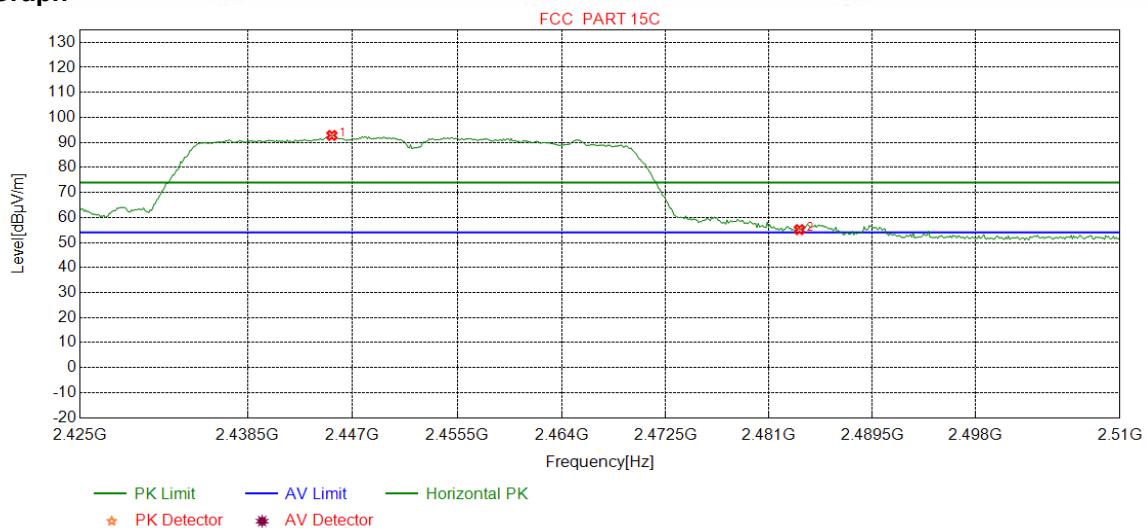

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2445.3191	32.32	13.51	-43.11	90.07	92.79	74.00	-18.79	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	52.50	55.15	74.00	18.85	Pass	Horizontal

Mode:	802.11 n(HT40) Transmitting	Channel:	2452MHz
Remark:	PK		


Test Graph

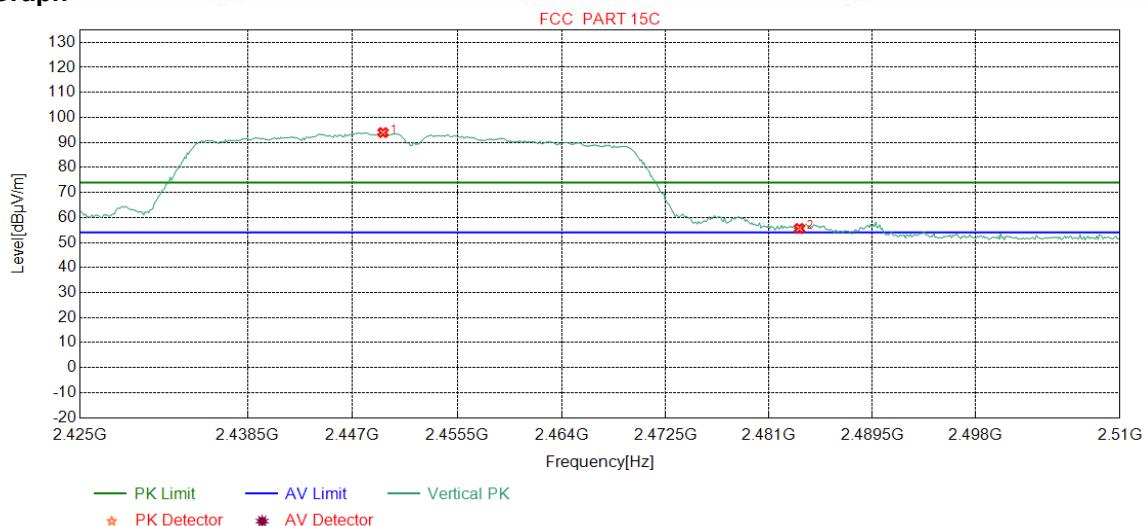

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2449.4681	32.33	13.53	-43.11	91.19	93.94	74.00	-19.94	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	52.97	55.62	74.00	18.38	Pass	Vertical


Mode:	802.11 n(HT40) Transmitting	Channel:	2452MHz
Remark:	AV		

Test Graph

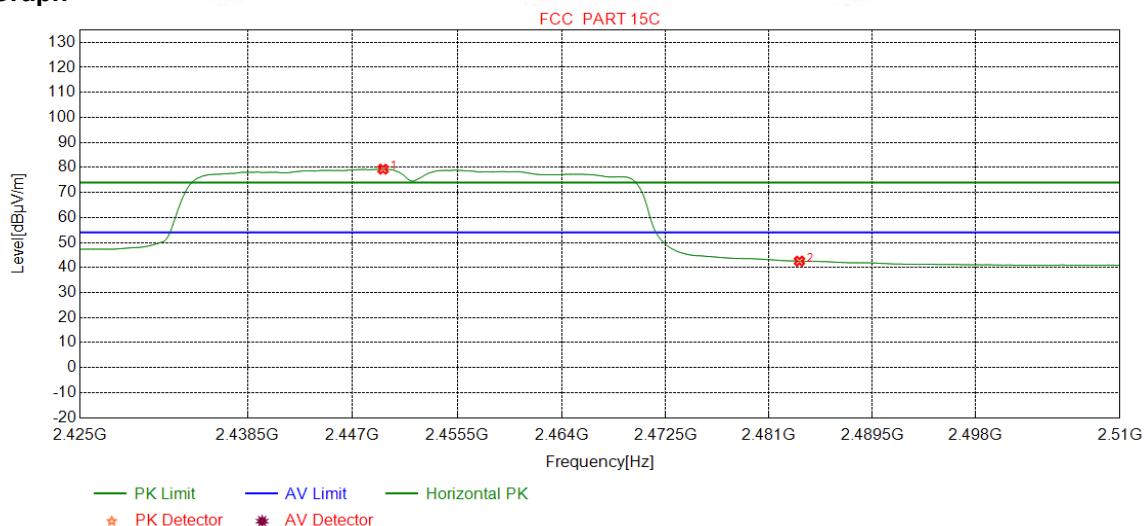

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2449.4681	32.33	13.53	-43.11	76.57	79.32	54.00	-25.32	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	39.91	42.56	54.00	11.44	Pass	Horizontal

Mode:	802.11 n(HT40) Transmitting	Channel:	2452MHz
Remark:	AV		

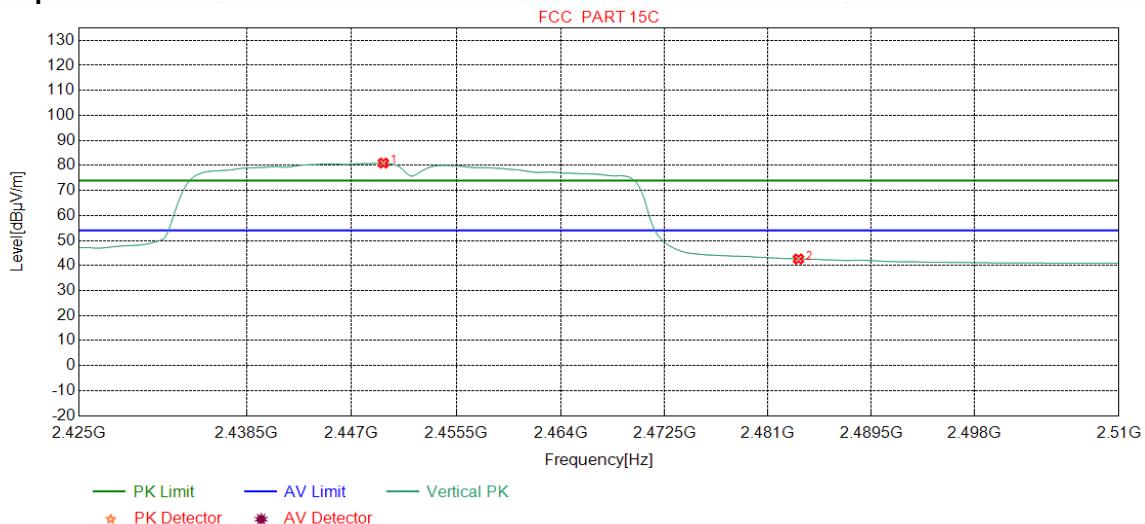Test Graph

N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Readin g [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margi n [dB]	Result	Polarity
1	2449.5745	32.33	13.53	-43.11	78.21	80.96	54.00	-26.96	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	39.97	42.62	54.00	11.38	Pass	Vertical

Remark:

1) Through Pre-scan transmitting mode and charge+transmitter mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40), and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) For SISO mode and 20MHz bandwidth, 802.11b mode was the worst case; For SISO mode and 40MHz bandwidth, 802.11n(HT40) mode was the worst case; For MIMO mode, 802.11n(HT20/40) mode was the worst case; only the worst case was recorded in the report.

7 Appendix A

Refer to Appendix: 2.4G WIFI of EED32M80001603.

