



FCC 47 CFR PART 15 SUBPART C
CERTIFICATION TEST REPORT

For

Wifi Gateway
MODEL NUMBER: GTW0000WT0

FCC ID: 2AJCX-LEGWW

REPORT NUMBER: 4788097701-1

ISSUE DATE: September 29, 2017

Prepared for

CAREL INDUSTRIES S.p.A.
via dell'Industria, 11 - 35020 Brugine, PD – ITALY

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 10, Innovation Technology Park,
Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Tel: +86 769 33817100

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
--	09/29/2017	Initial Issue	

Summary of Test Results			
Clause	Test Items	FCC/IC Rules	Test Results
1	6dB Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2)	Complied
2	Peak Conducted Output Power	FCC 15.247 (b) (3)	Complied
3	Power Spectral Density	FCC 15.247 (e)	Complied
4	Conducted Bandedge and Spurious Emission	FCC 15.247 (d)	Complied
5	Radiated Bandedge and Spurious Emission	FCC 15.247 (d) FCC 15.209 FCC 15.205	Complied
6	Conducted Emission Test For AC Power Port	FCC 15.207	Complied
7	Antenna Requirement	FCC 15.203	Complied

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>9</i>
5.3. <i>CHANNEL LIST.....</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE CONFIGURATIONS</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>10</i>
5.7. <i>TEST ENVIRONMENT</i>	<i>11</i>
5.8. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>12</i>
5.9. <i>MEASURING INSTRUMENT AND SOFTWARE USED.....</i>	<i>13</i>
6. MEASUREMENT METHODS	14
7. ANTENNA PORT TEST RESULTS	15
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>15</i>
7.2. <i>6 dB DTS BANDWIDTH AND 99% BANDWIDTH.....</i>	<i>18</i>
7.2.1. <i>802.11b MODE</i>	<i>19</i>
7.2.2. <i>802.11g MODE</i>	<i>22</i>
7.2.3. <i>802.11n HT20 MODE</i>	<i>26</i>
7.3. <i>PEAK & AVERAGE CONDUCTED OUTPUT POWER.....</i>	<i>30</i>
7.3.1. <i>802.11b MODE</i>	<i>31</i>
7.3.2. <i>802.11g MODE</i>	<i>31</i>
7.3.3. <i>802.11n HT20 MODE</i>	<i>31</i>
7.4. <i>POWER SPECTRAL DENSITY.....</i>	<i>32</i>
7.4.1. <i>802.11b MODE</i>	<i>33</i>
7.4.2. <i>802.11g MODE</i>	<i>35</i>
7.4.3. <i>802.11n HT20 MODE</i>	<i>37</i>
7.5. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....</i>	<i>39</i>
7.5.1. <i>802.11b MODE</i>	<i>40</i>
7.5.1. <i>802.11g MODE</i>	<i>43</i>
7.5.1. <i>802.11n HT20 MODE</i>	<i>46</i>
8. RADIATED TEST RESULTS.....	49

8.1. <i>LIMITS AND PROCEDURE</i>	49
8.2. <i>RESTRICTED BANDEDGE</i>	54
8.2.1. 802.11b MODE	54
8.2.2. 802.11g MODE	58
8.2.3. 802.11n HT20 MODE	62
8.3. <i>SPURIOUS EMISSIONS (1~18GHz)</i>	66
8.3.1. 802.11b MODE	66
8.3.2. 802.11g MODE	72
8.3.3. 802.11n HT20 MODE	78
8.4. <i>SPURIOUS EMISSIONS 18~25GHz</i>	84
8.4.1. 802.11b MODE	84
8.5. <i>SPURIOUS EMISSIONS 30M ~ 1 GHz</i>	86
8.5.1. 802.11b MODE	86
8.6. <i>SPURIOUS EMISSIONS BELOW 30M</i>	88
8.6.1. 802.11b MODE	88
9. AC POWER LINE CONDUCTED EMISSIONS	92
9.1.1. 802.11b MODE	93
10. ANTENNA REQUIREMENTS	95

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: CAREL INDUSTRIES S.p.A.
Address: via dell'Industria, 11 - 35020 Brugine, PD – ITALY

Manufacturer Information

Company Name: CAREL INDUSTRIES S.p.A.
Address: via dell'Industria, 11 - 35020 Brugine, PD – ITALY

Factory Information


Company Name: CAREL INDUSTRIES S.p.A.
Address: via dell'Industria, 11 - 35020 Brugine, PD – ITALY

EUT Description

Product Name: Wifi Gateway
Brand Name: CAREL
Model Name: GTW0000WT0
Date Tested: September 01, 2017 ~ September 22, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	PASS

Tested By: Checked By:



Denny Huang
Engineer Project Associate



Shawn Wen
Laboratory Leader

Approved By:



Stephen Guo
Laboratory Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with 558074 D01 DTS Meas Guidance v04, 414788 D01 Radiated Test Site v01, FCC CFR 47 Part 2, FCC CFR 47 Part 15 and ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Test Location	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
Address	Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
Accreditation Certificate	<p>UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. The Certificate Registration Number is 4102.01.</p> <p>UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The Designation Number is CN1187.</p> <p>UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. EMC Laboratory has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.</p>

Note:

1. The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
2. For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OATS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.90dB
Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.52dB
Uncertainty for Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	5.04dB(1-6GHz)
	5.30dB (6GHz-18Gz)
	5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Equipment	Wifi Gateway
Model Name	GTW0000WT0
Radio Technology	IEEE802.11b/g/n HT20/
Operation frequency	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz
Modulation	IEEE 802.11b: DSSS(CCK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK)
Rated Input	DC 24V
Hardware Version	V1.000
Software Version	V3.0.0

5.2. MAXIMUM OUTPUT POWER

Frequency Range (MHz)	Number of Transmit Chains (NTX)	IEE Std. 802.11	Frequency (MHz)	Channel Number	Max PK Conducted Power (dBm)
2412-2462	1	IEEE 802.11b	2412-2462	1-11[11]	18.606
2412-2462	1	IEEE 802.11g	2412-2462	1-11[11]	17.919
2412-2462	1	IEEE 802.11n HT20	2412-2462	1-11[11]	15.681

5.3. CHANNEL LIST

Channel	Frequency (MHz)						
1	2412	4	2425	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	N/A	N/A

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
WiFi TX(802.11b)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11g)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11n HT20)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz

5.5. THE WORSE CASE CONFIGURATIONS

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		UI_mptool					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 7	CH 13	CH 3	CH 7	CH 11
802.11b	1	30	30	30	N/A		
802.11g	1	27	27	27			
802.11n HT20	1	19	19	19			

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2412-2462	External Antenna	3.47

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

5.7. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	23 ~ 28°C
Voltage :	VL	N/A
	VN	DC 24V
	VH	N/A

Note: VL= Lower Extreme Test Voltage
VN= Nominal Voltage, DC 24V from Adapter.
VH= Upper Extreme Test Voltage
TN= Normal Temperature

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	ThinkPad	T460S	SL10K24796 JS
2	USB to serial board	N/A	N/A	N/A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	N/A	N/A	N/A	N/A	N/A


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	Switching Power Supply	CAREL	PGTA00TRG0	Input: AC 100~240, 0.3A Output: DC 24V, 0.42A

TEST SETUP

The EUT can work in engineering mode with software UI_mptool through a Laptop.

SETUP DIAGRAM FOR TESTS

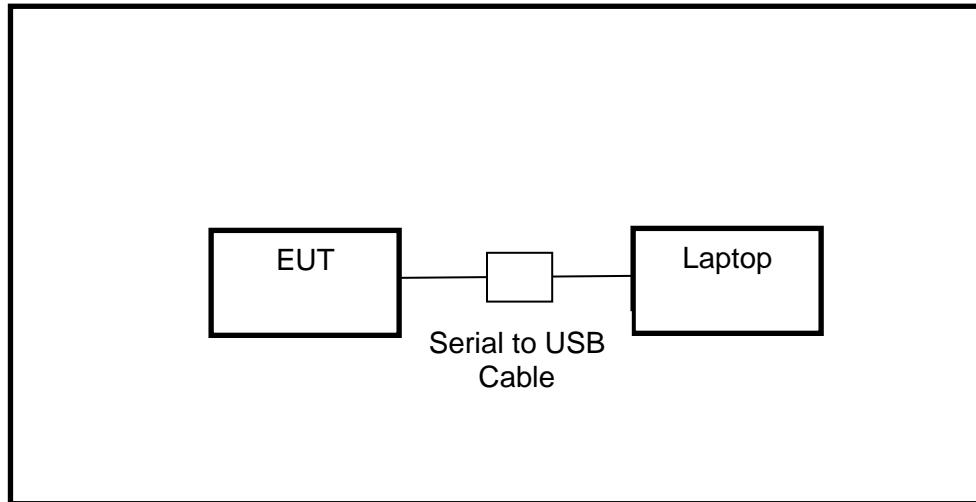

5.9. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions										
Instrument										
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.				
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	101961	Dec.20, 2016	Dec.19, 2017				
<input checked="" type="checkbox"/>	Two-Line V-Network	R&S	ENV216	101983	Dec.20, 2016	Dec.19, 2017				
<input checked="" type="checkbox"/>	Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Feb.10, 2017	Feb.10, 2018				
Software										
Used	Description		Manufacturer	Name	Version					
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance		Farad	EZ-EMC	Ver. UL-3A1					
Radiated Emissions										
Instrument										
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.				
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400 036	Feb. 24, 2017	Feb. 24, 2018				
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Jan.09, 2016	Jan.09, 2019				
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A090 99	Feb. 13, 2017	Feb. 13, 2018				
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec. 20, 2016	Dec. 20, 2017				
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Jan. 09, 2016	Jan. 09, 2019				
<input checked="" type="checkbox"/>	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Jan.06, 2016	Jan.06, 2019				
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Jan. 14, 2017	Jan. 14, 2018				
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec. 20, 2016	Dec. 20, 2017				
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Mar. 26, 2016	Mar. 25, 2019				
Software										
Used	Description		Manufacturer	Name	Version					
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance		Farad	EZ-EMC	Ver. UL-3A1					
Other instruments										
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.				
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec. 20, 2016	Dec. 20, 2017				
<input checked="" type="checkbox"/>	Power Meter	Keysight	N1911A	MY55416024	Aug. 20, 2017	Aug. 20, 2018				
<input checked="" type="checkbox"/>	Power Sensor	Keysight	N1921A	MY51100041	Feb. 13, 2017	Feb. 13, 2018				
<input checked="" type="checkbox"/>	DC Supply	Keysight	E36103A	MY55350020	Feb. 10, 2017	Feb. 10, 2018				

6. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6dB Bandwidth and 99% Bandwidth	KDB 558074 D01 DTS Meas Guidance v04	8.0
2	Peak Output Power	KDB 558074 D01 DTS Meas Guidance v04	9.1.1
3	Power Spectral Density	KDB 558074 D01 DTS Meas Guidance v04	10.2
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 DTS Meas Guidance v04	11.0
5	Out-of-band emissions in restricted bands	KDB 558074 D01 DTS Meas Guidance v04	12.1
6	Band-edge	KDB 558074 D01 DTS Meas Guidance v04	13.3.2
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	7.3

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP

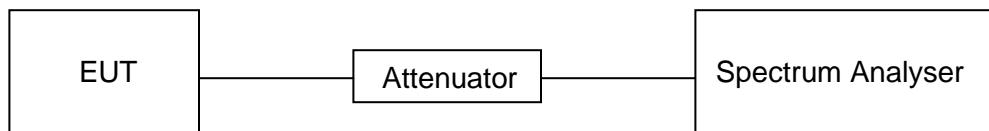



RESULTS


Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/B Minimum VBW (KHz)
11b	12.54	12.68	0.989	99	0.048	0.010
11g	2.06	2.18	0.945	95	0.246	0.485
11n20	1.92	2.04	0.941	94	0.263	0.521

Note: Duty Cycle Correction Factor=10log(1/x).

Where: x is Duty Cycle(Linear)

Where: B is On Time

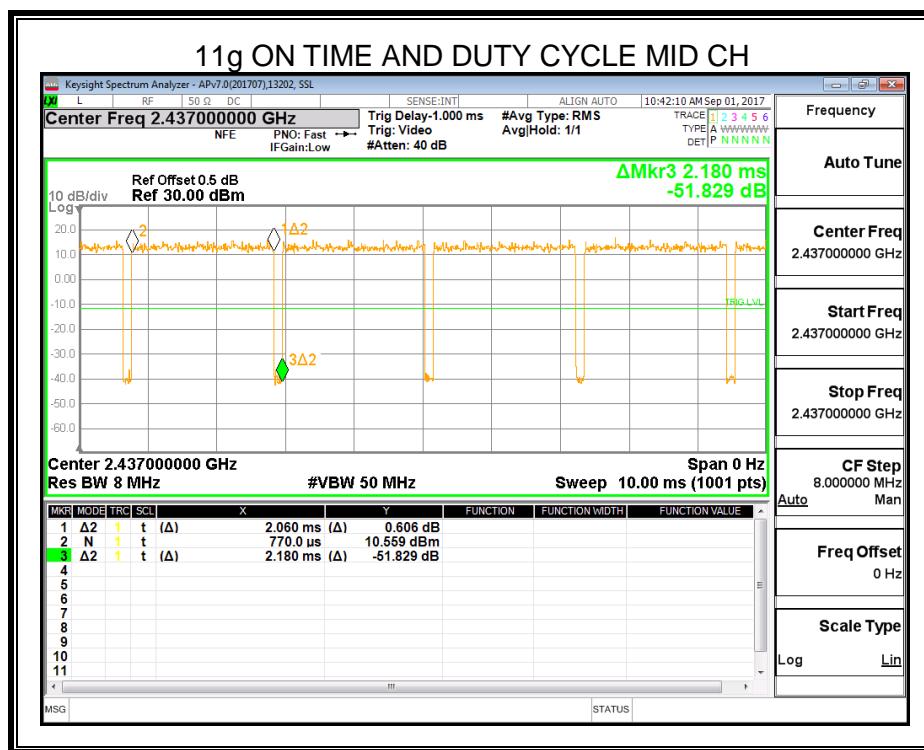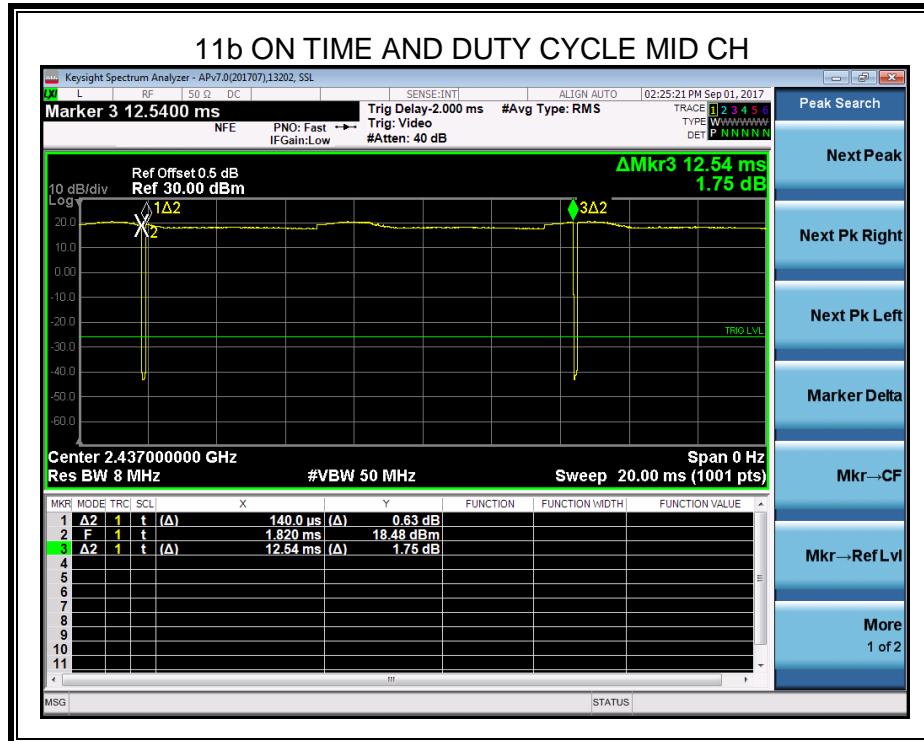

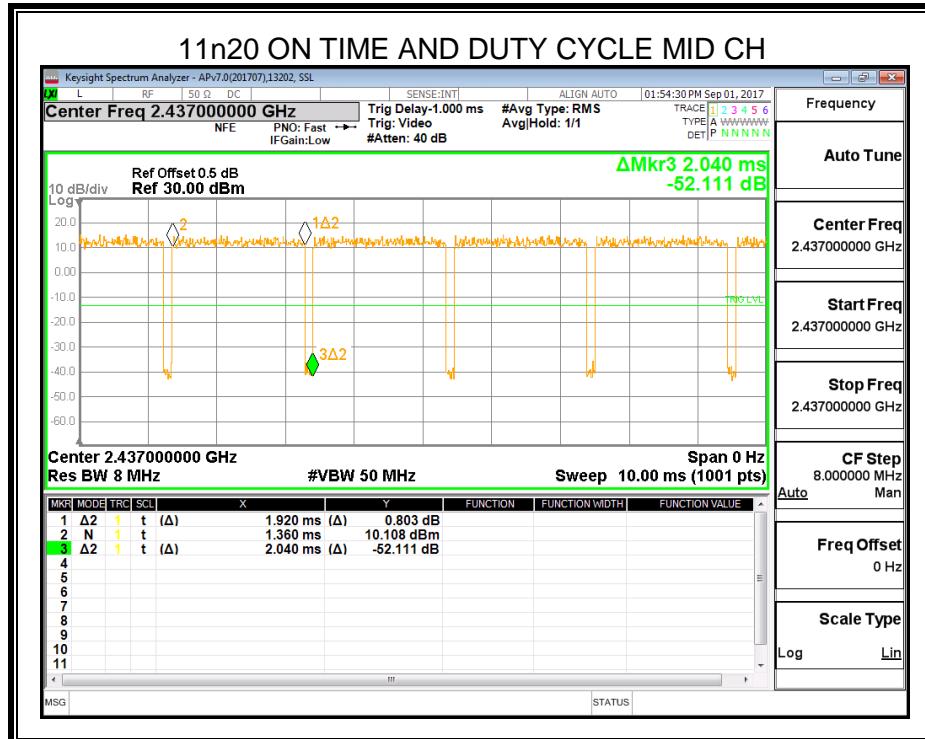

7.2. 6 dB DTS BANDWIDTH AND 99% BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(a)(2)	6 dB Bandwidth	$\geq 500\text{KHz}$	2400-2483.5


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6dB Bandwidth :100K For 99% Bandwidth :1% to 5% of the occupied bandwidth
VBW	For 6dB Bandwidth : $\geq 3 \times \text{RBW}$ For 99% Bandwidth : approximately 3 \times RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.


TEST SETUP


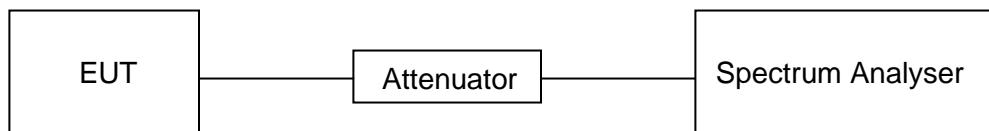




RESULTS


7.2.1. 802.11b MODE

Channel	Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.12	13.483	500	Pass
Middle	2437	7.80	13.431	500	Pass
High	2462	8.56	13.407	500	Pass

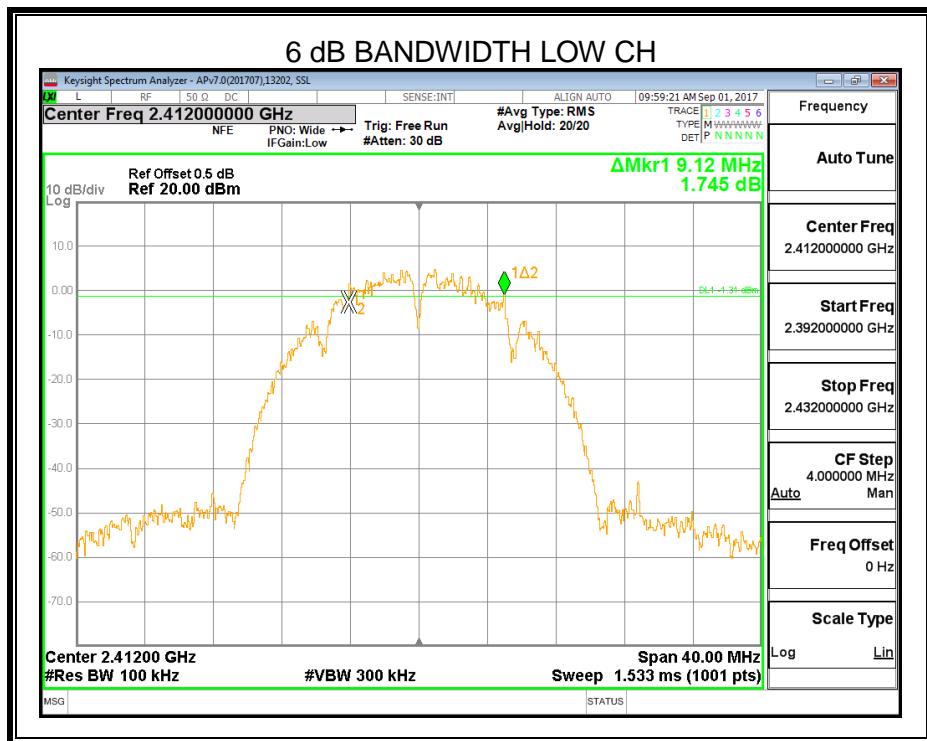

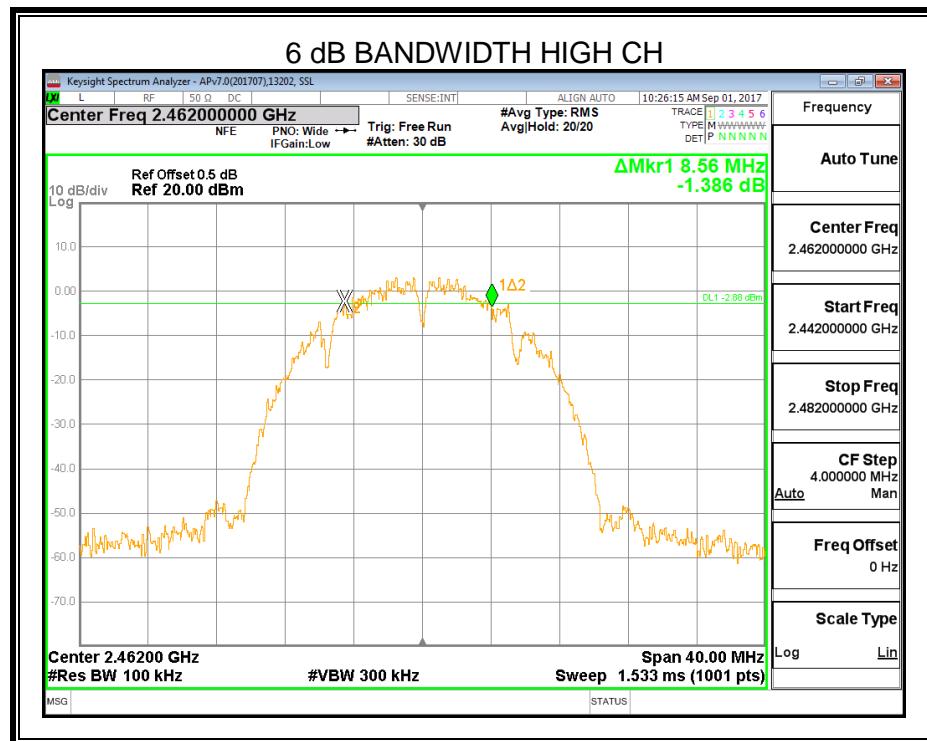
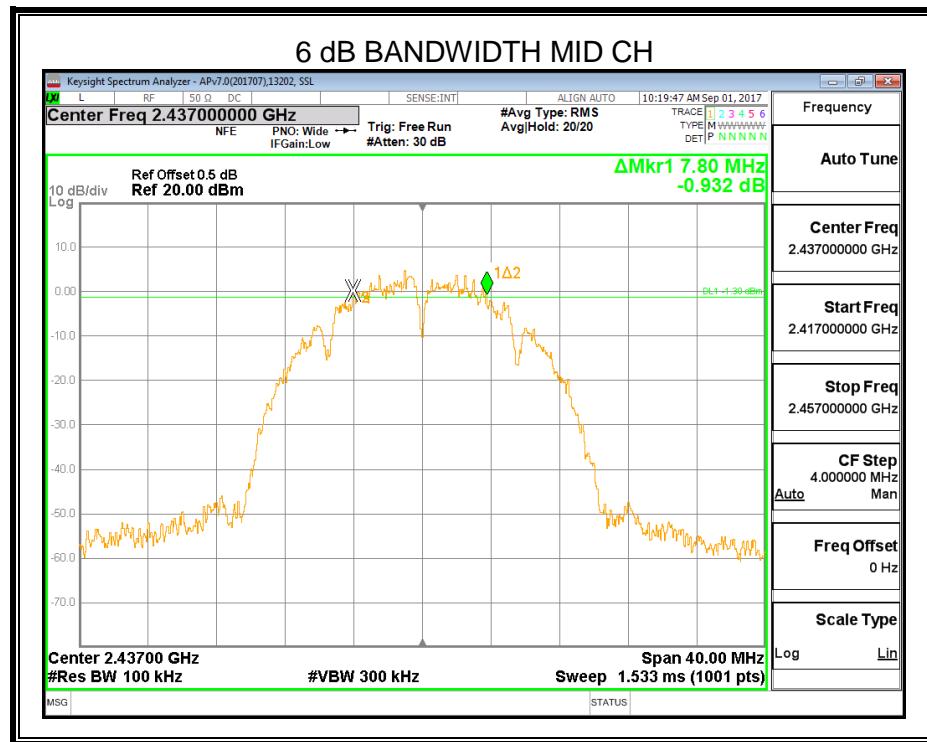


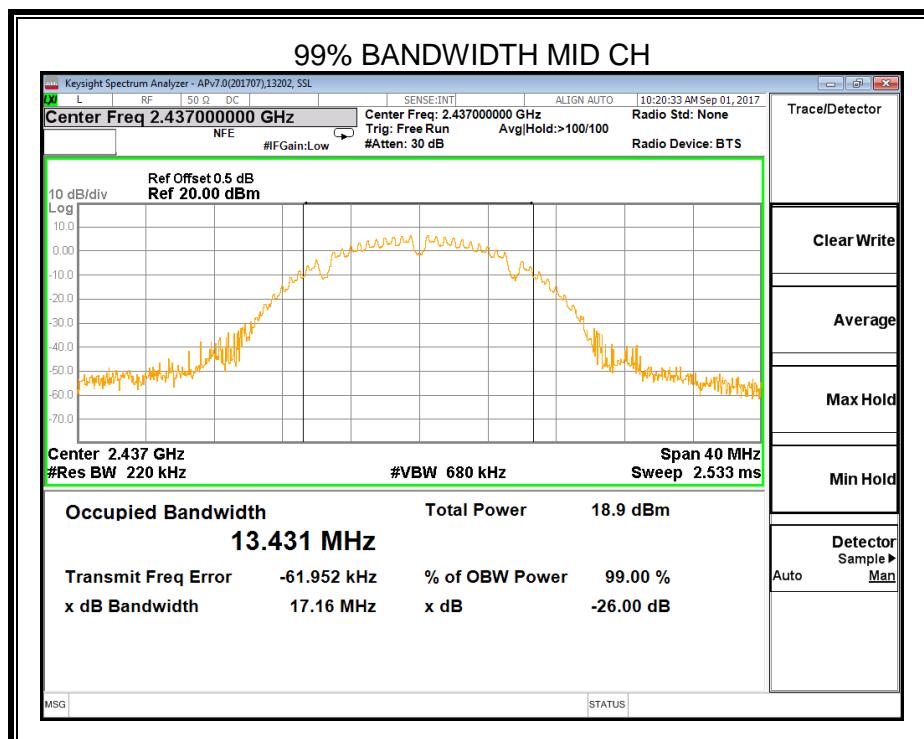
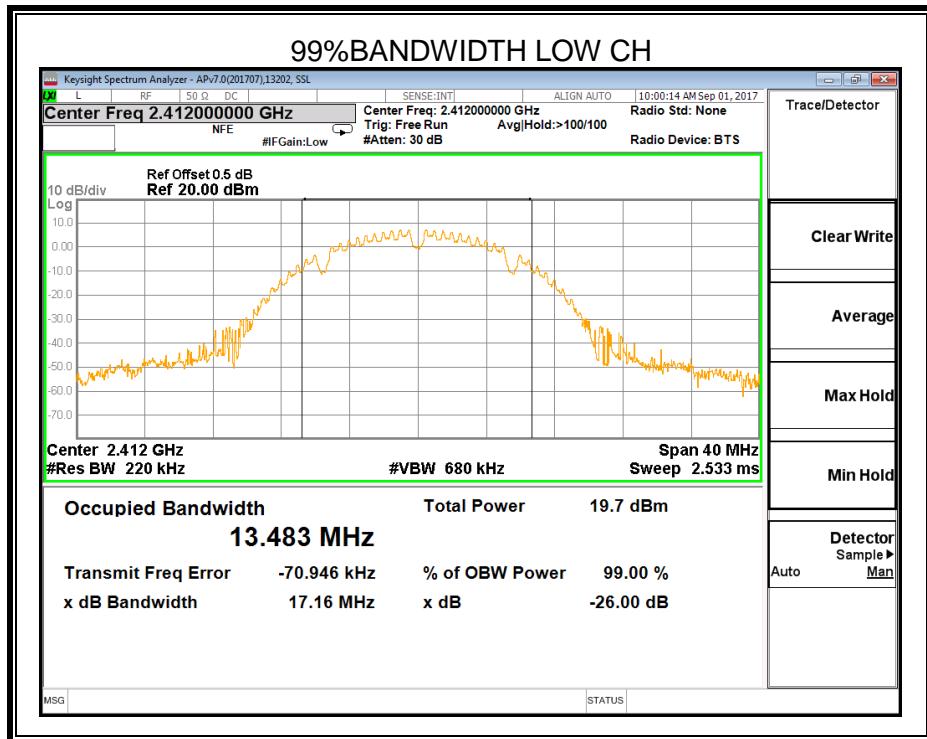



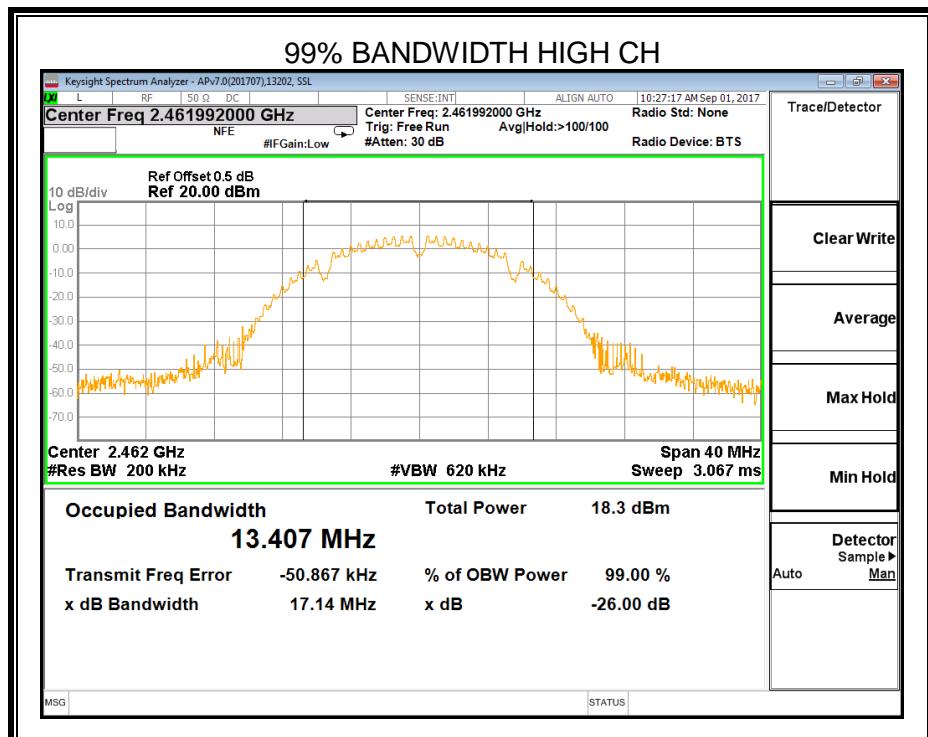


7.2.2. 802.11g MODE

Channel	Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.44	17.243	500	Pass
Middle	2437	16.56	17.257	500	Pass
High	2462	16.40	17.258	500	Pass

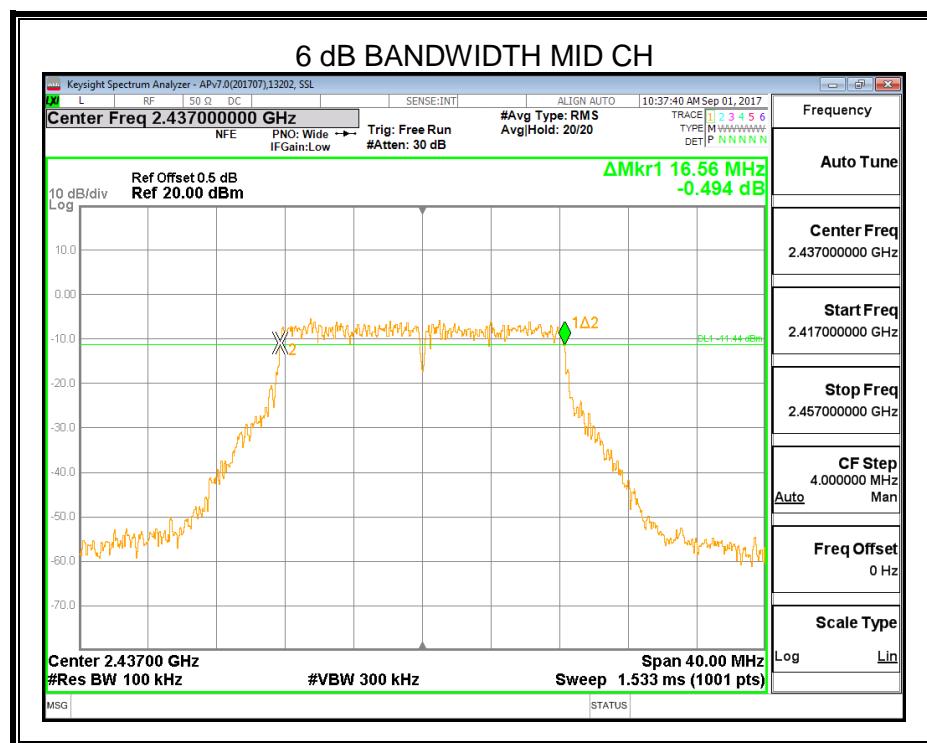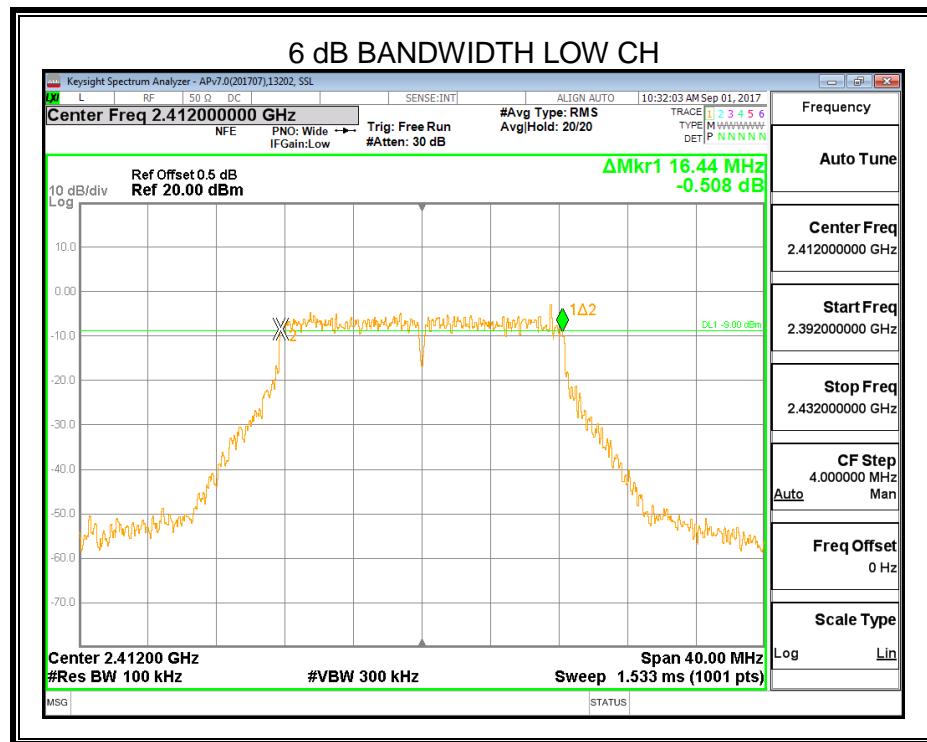


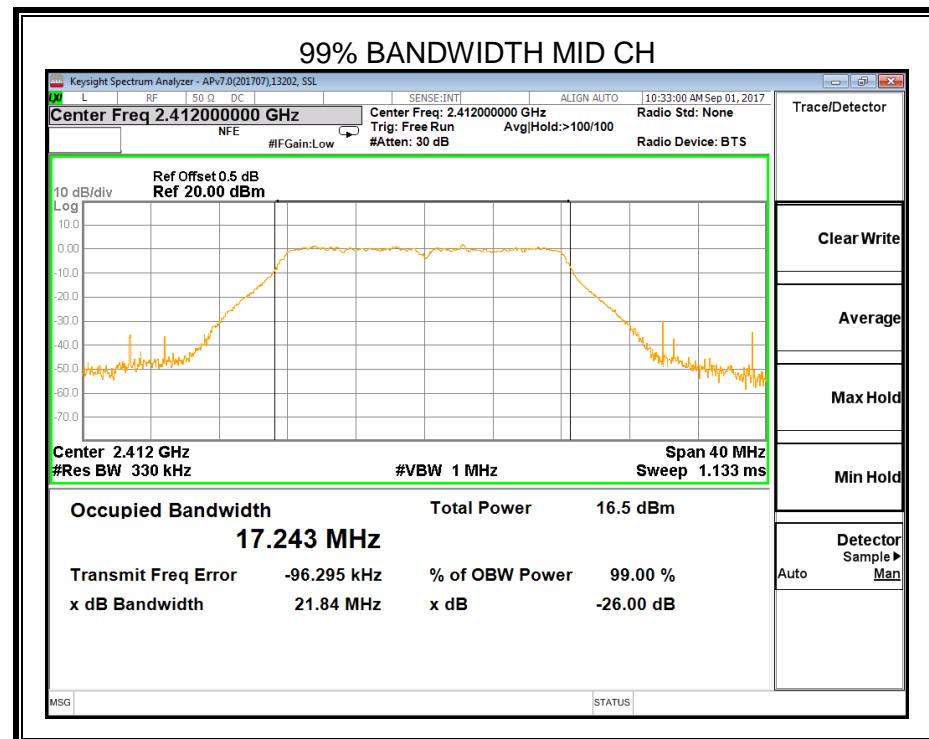
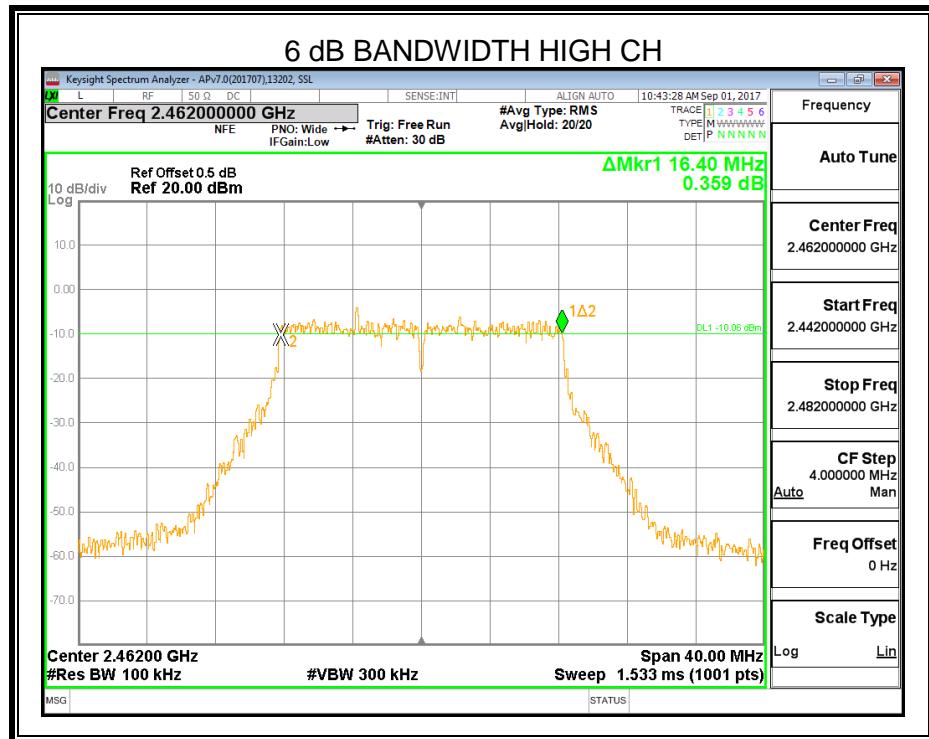


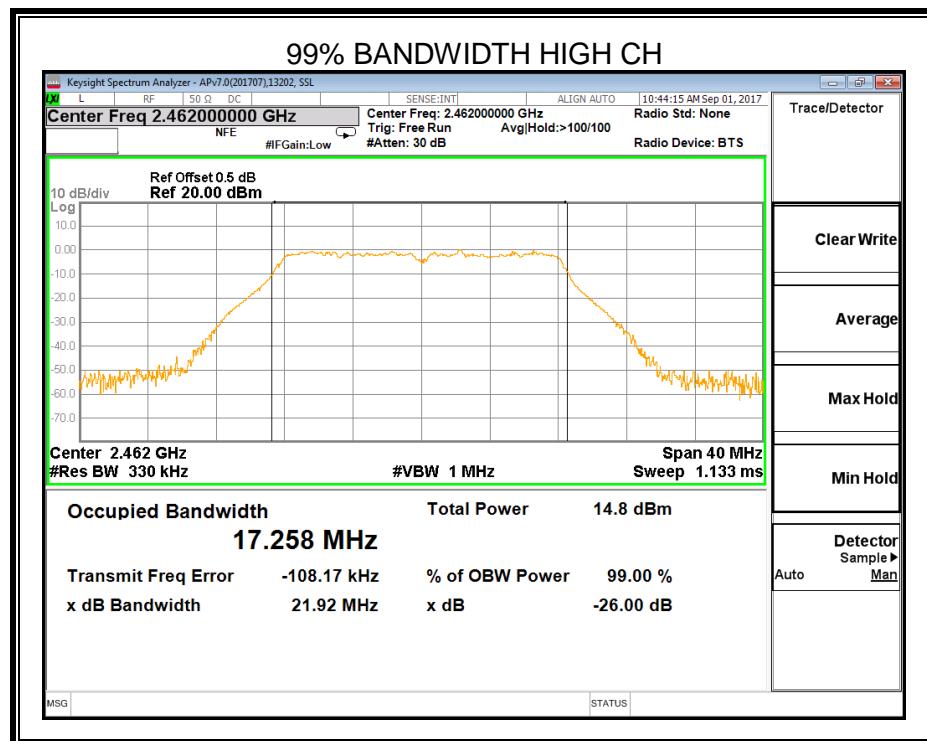
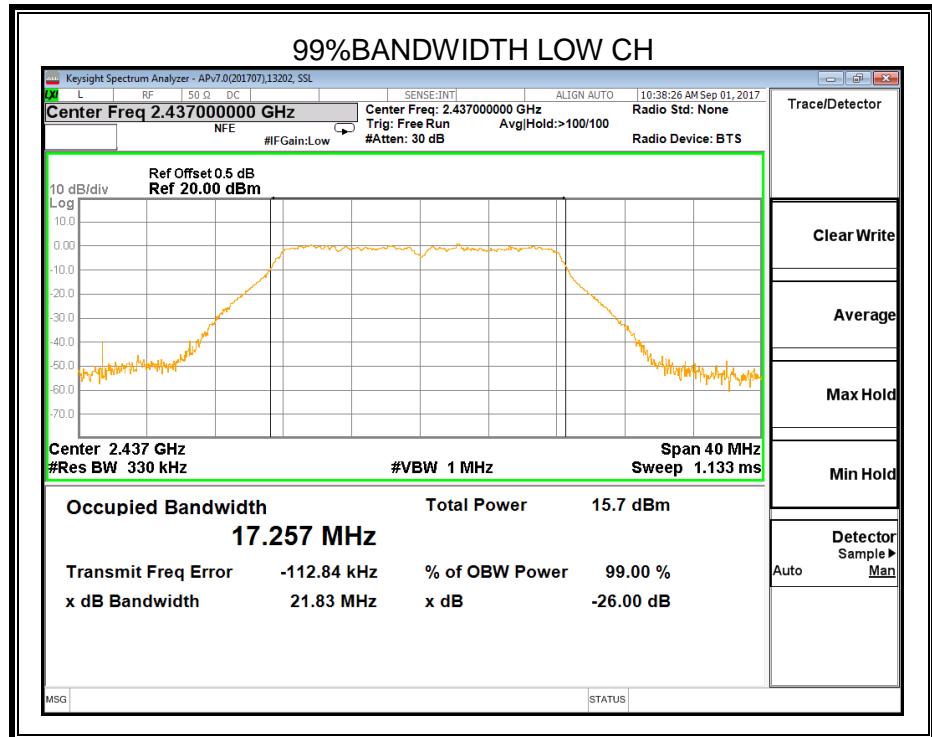



7.2.3. 802.11n HT20 MODE

Channel	Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.80	18.058	500	Pass
Middle	2437	17.84	17.971	500	Pass
High	2462	17.80	17.978	500	Pass

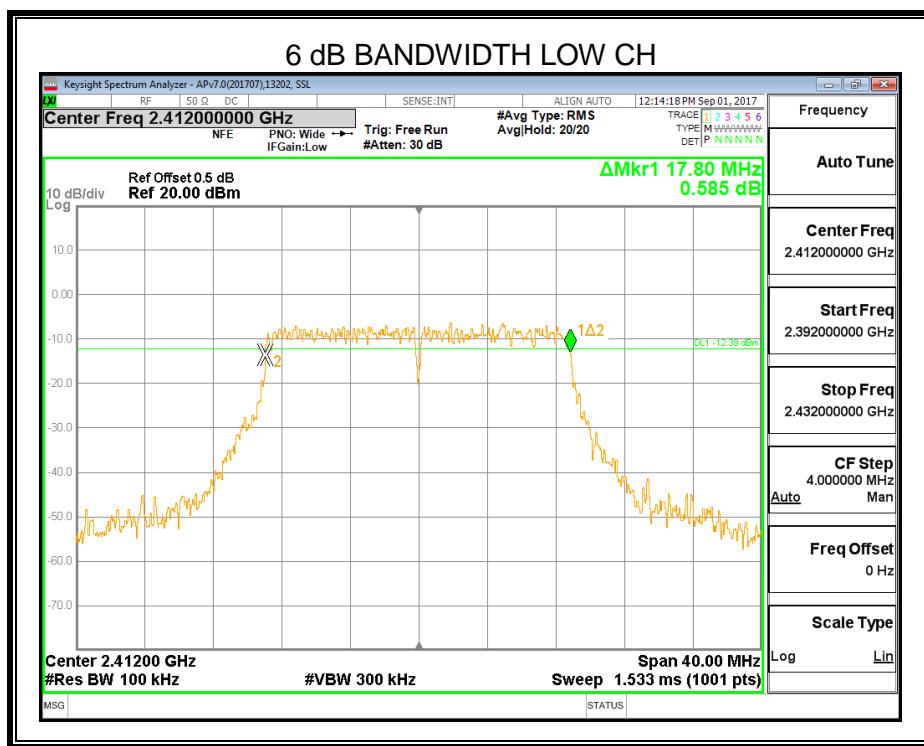

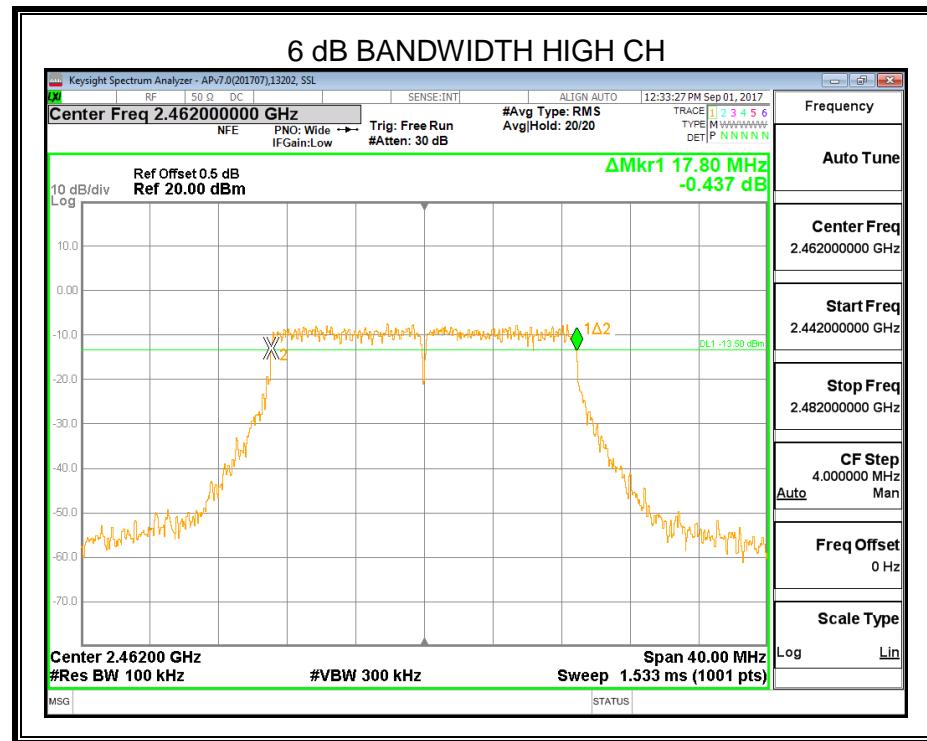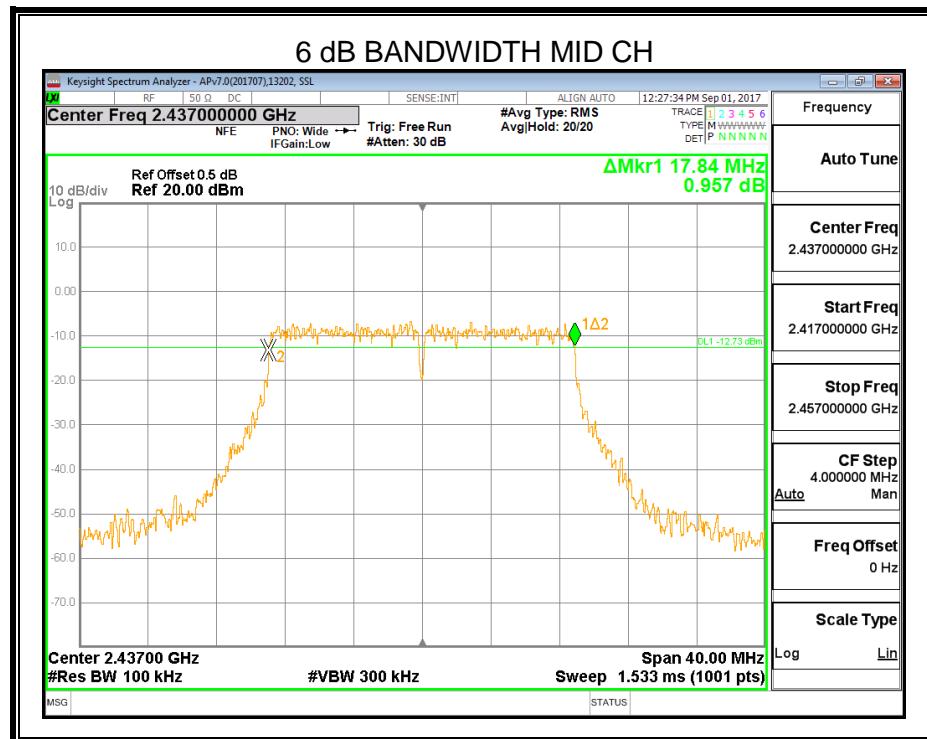

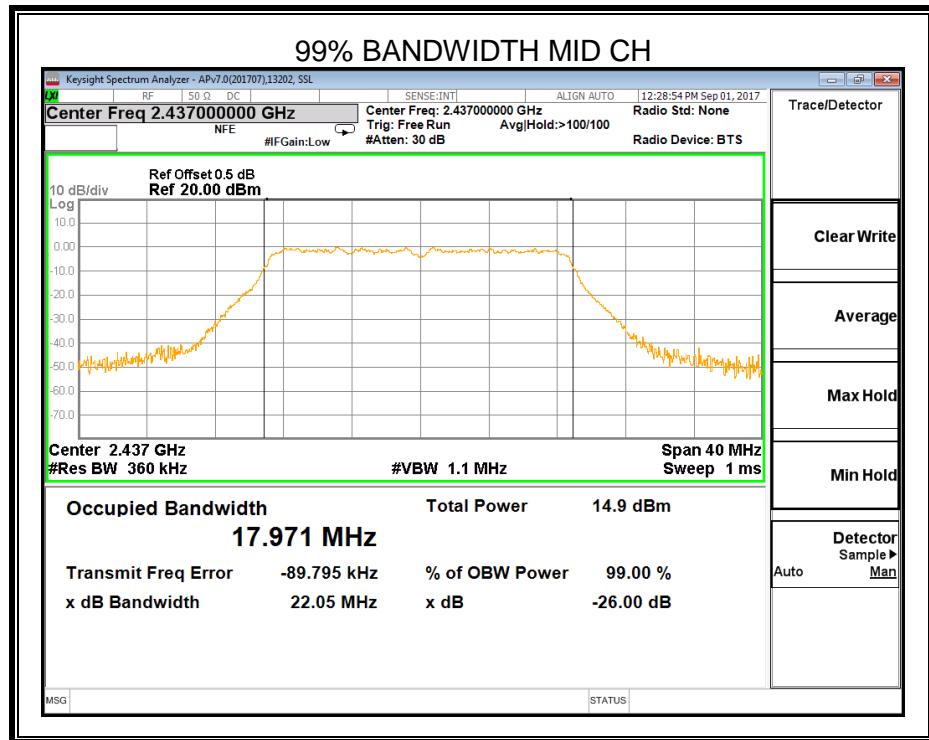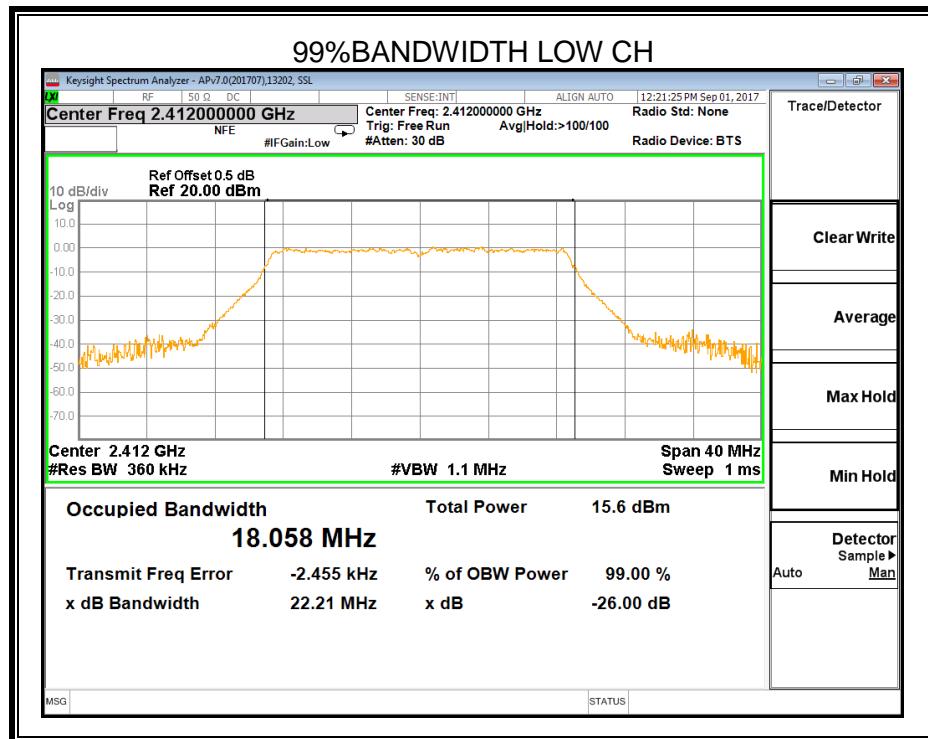

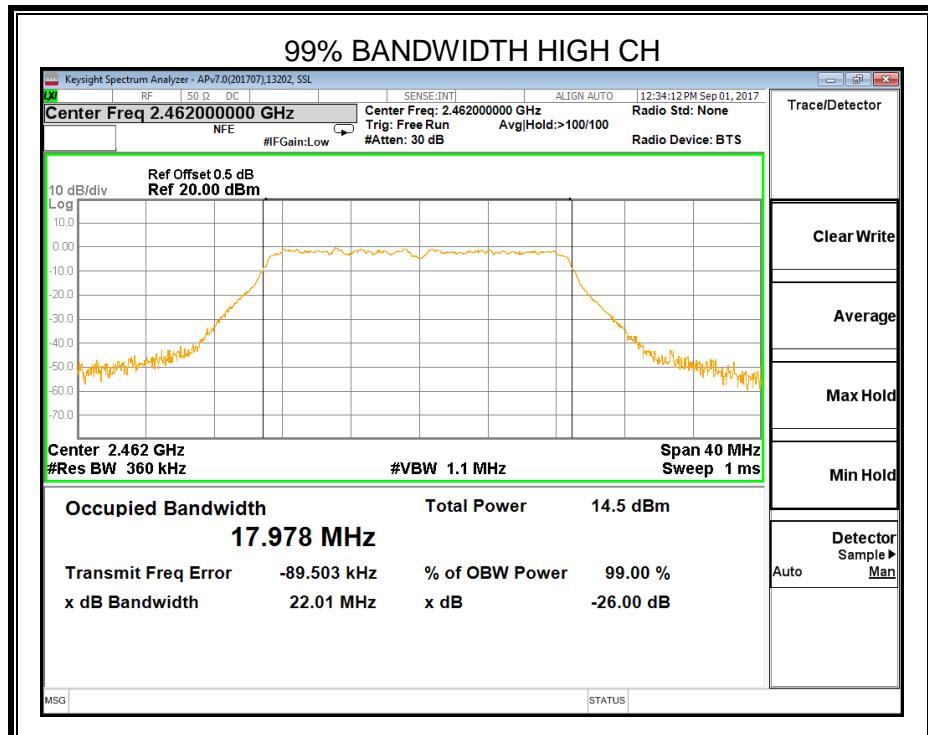

7.3. PEAK & AVERAGE CONDUCTED OUTPUT POWER


LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(b)(3)	Peak & Average Output Power	1 watt or 30dBm	2400-2483.5

TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.
Measure peak power each channel.

TEST SETUP

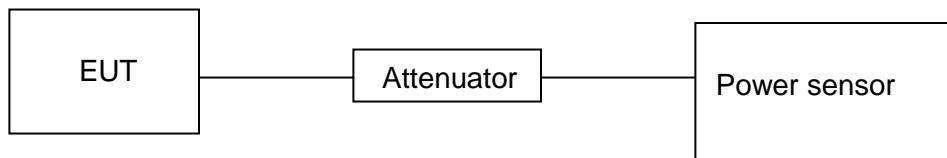

RESULTS

7.3.1. 802.11b MODE

Test Channel	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
Low	2412	18.606	30
Middle	2437	17.116	30
High	2462	16.949	30

7.3.2. 802.11g MODE

Test Channel	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
Low	2412	17.919	30
Middle	2437	17.651	30
High	2462	17.089	30

7.3.3. 802.11n HT20 MODE

Test Channel	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
Low	2412	15.681	30
Middle	2437	15.380	30
High	2462	14.820	30

7.4. POWER SPECTRAL DENSITY

LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


TEST SETUP


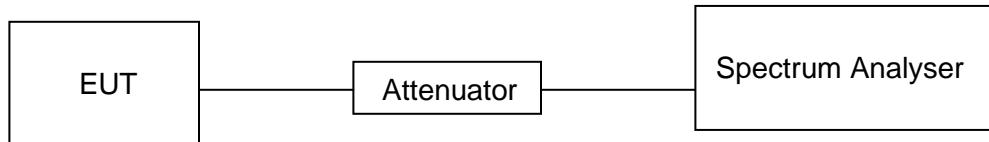


RESULTS

7.4.1. 802.11b MODE


Test Channel	Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	2412MHz	-10.943	8	PASS
Middle	2437MHz	-11.646	8	PASS
High	2462MHz	-12.021	8	PASS


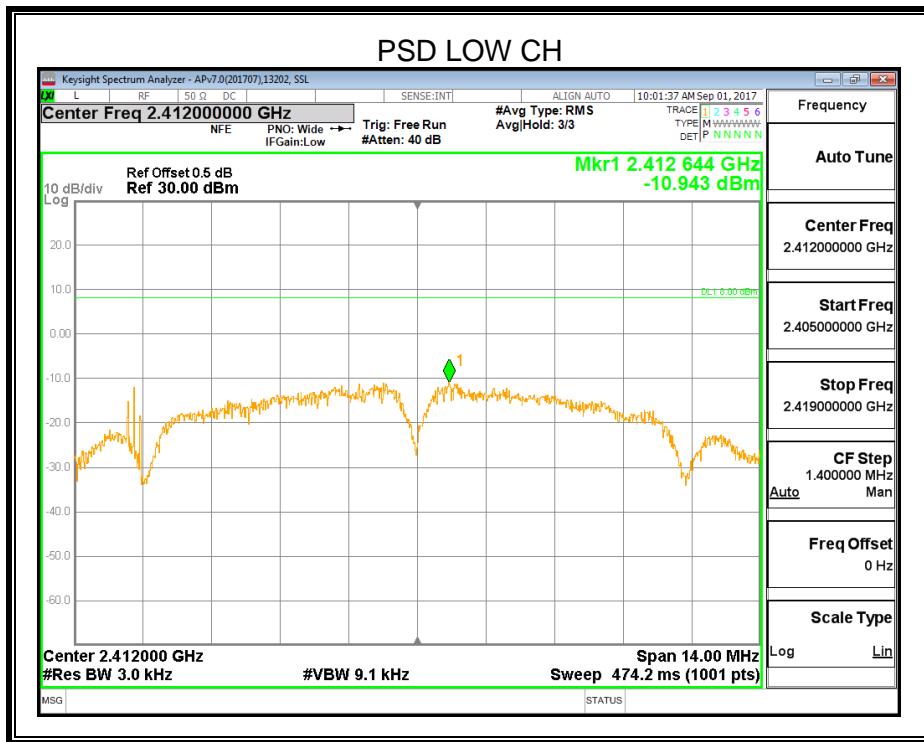


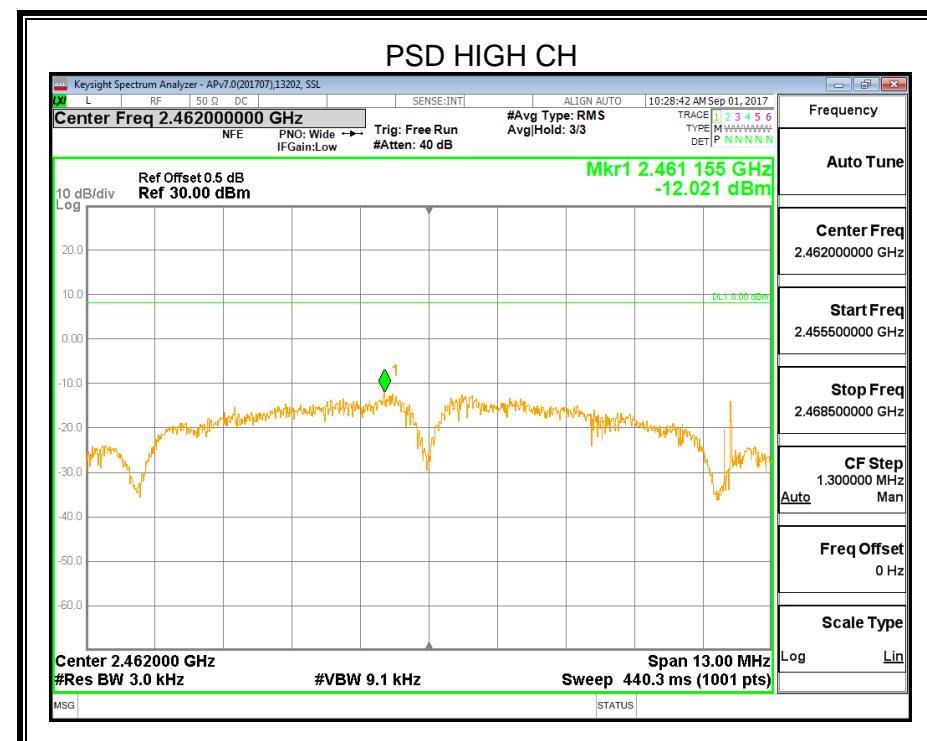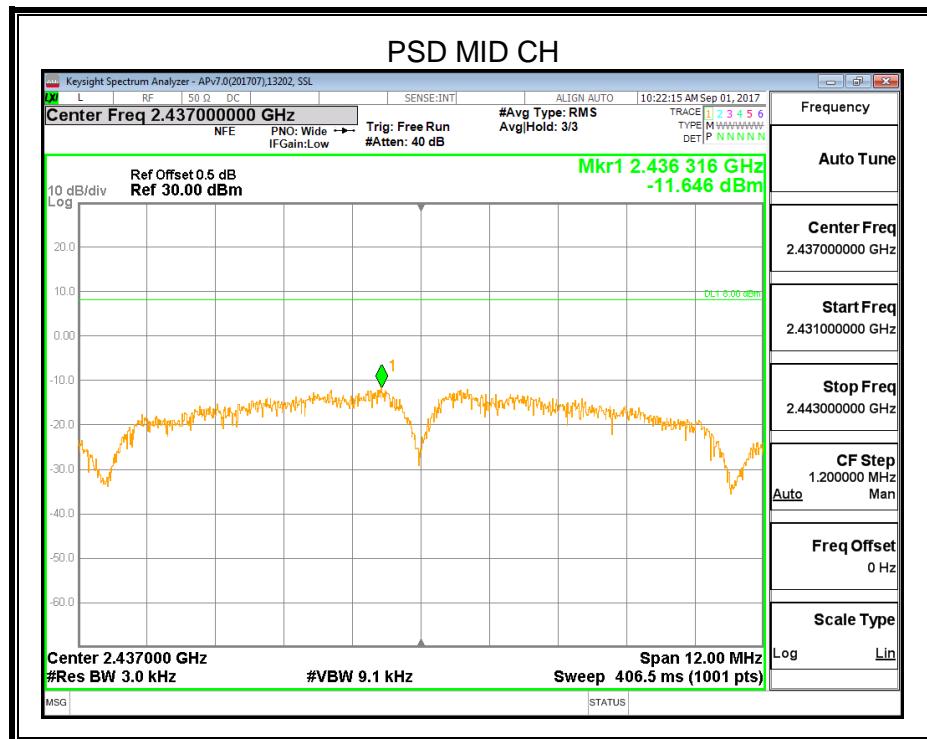

7.4.2. 802.11g MODE


Test Channel	Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	2412MHz	-18.865	8	PASS
Middle	2437MHz	-18.355	8	PASS
High	2462MHz	-20.987	8	PASS


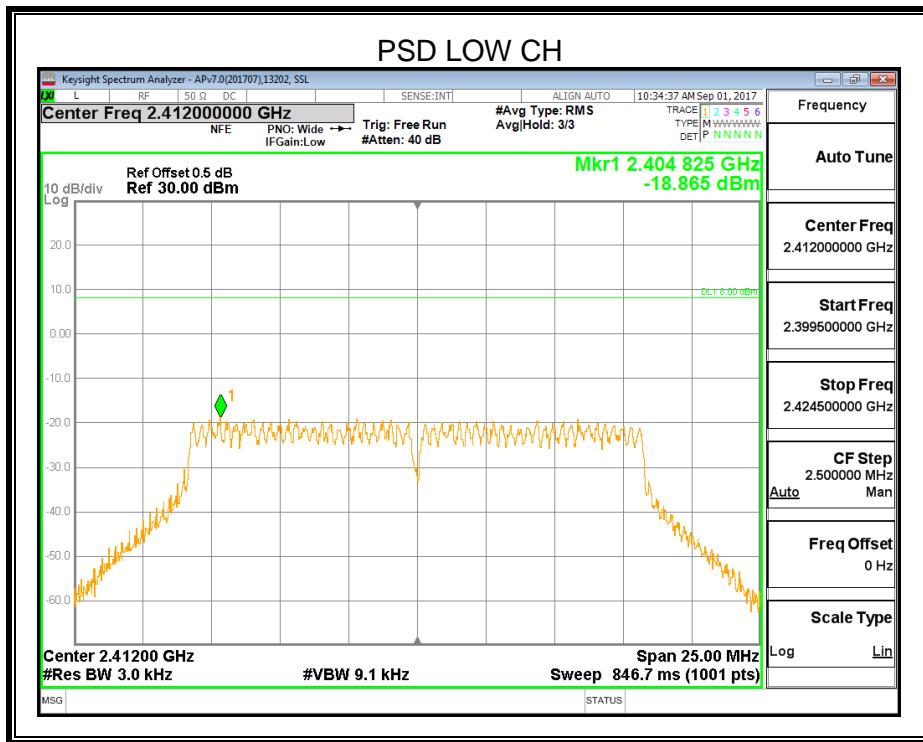


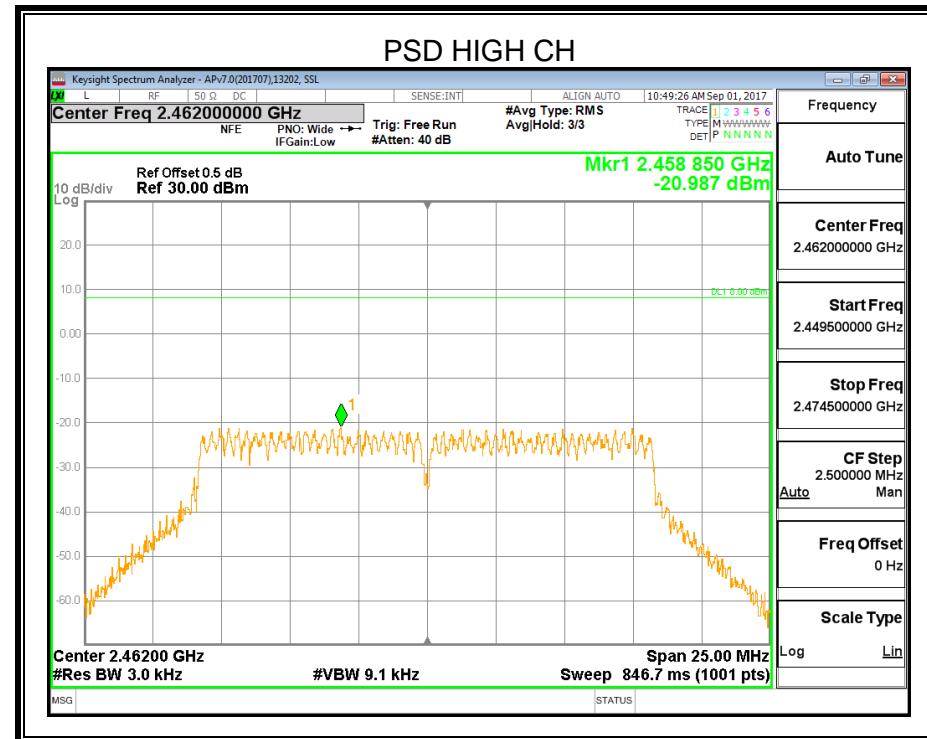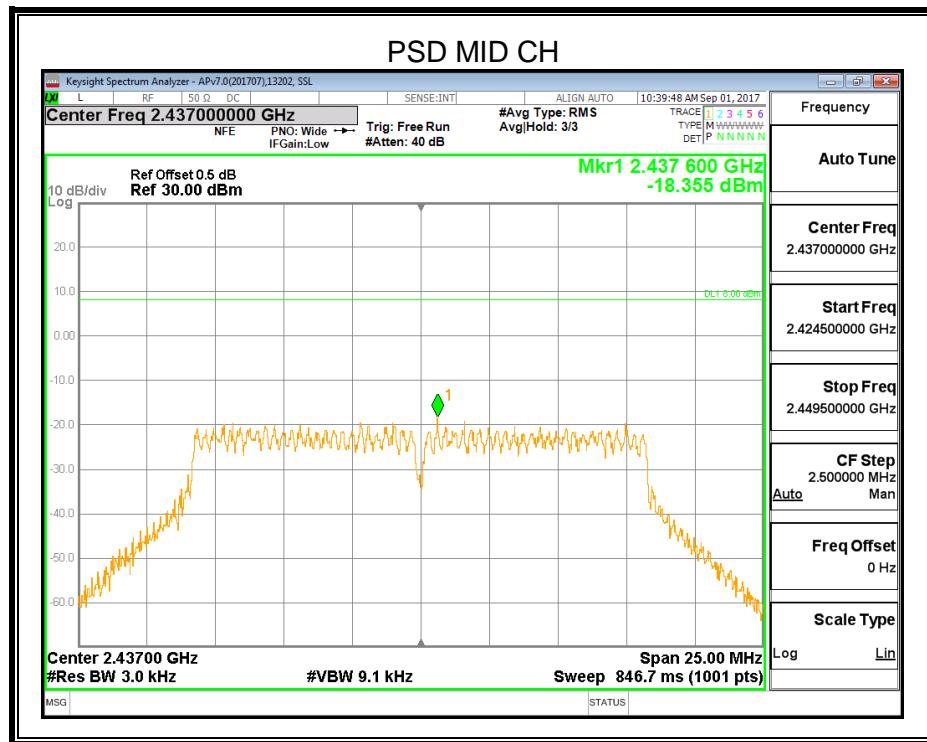

7.4.3. 802.11n HT20 MODE

Test Channel	Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	2412MHz	-18.864	8	PASS
Middle	2437MHz	-19.813	8	PASS
High	2462MHz	-21.393	8	PASS

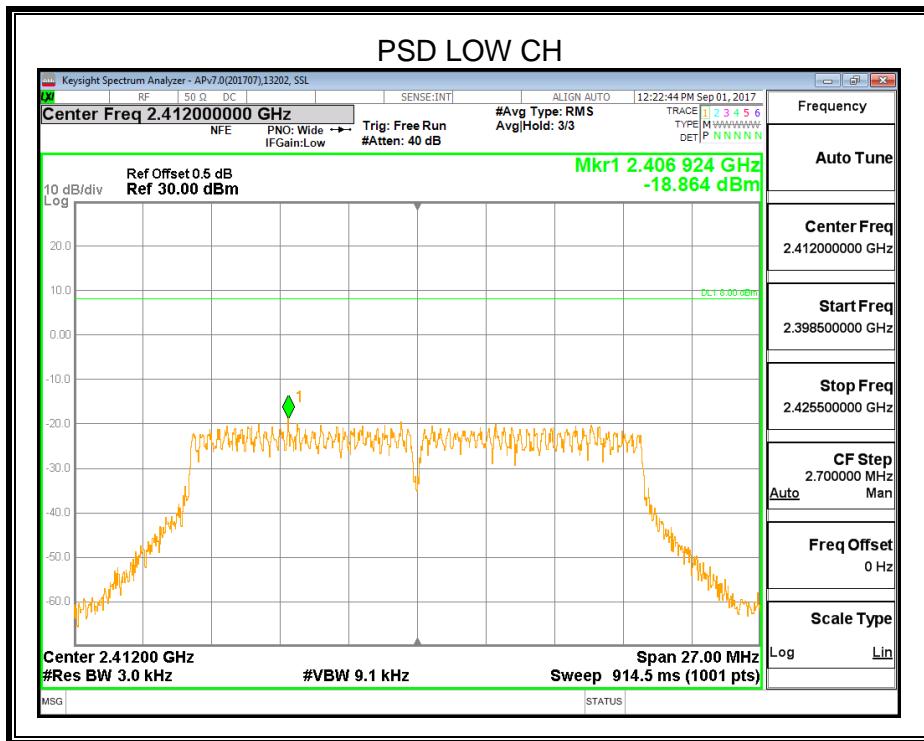

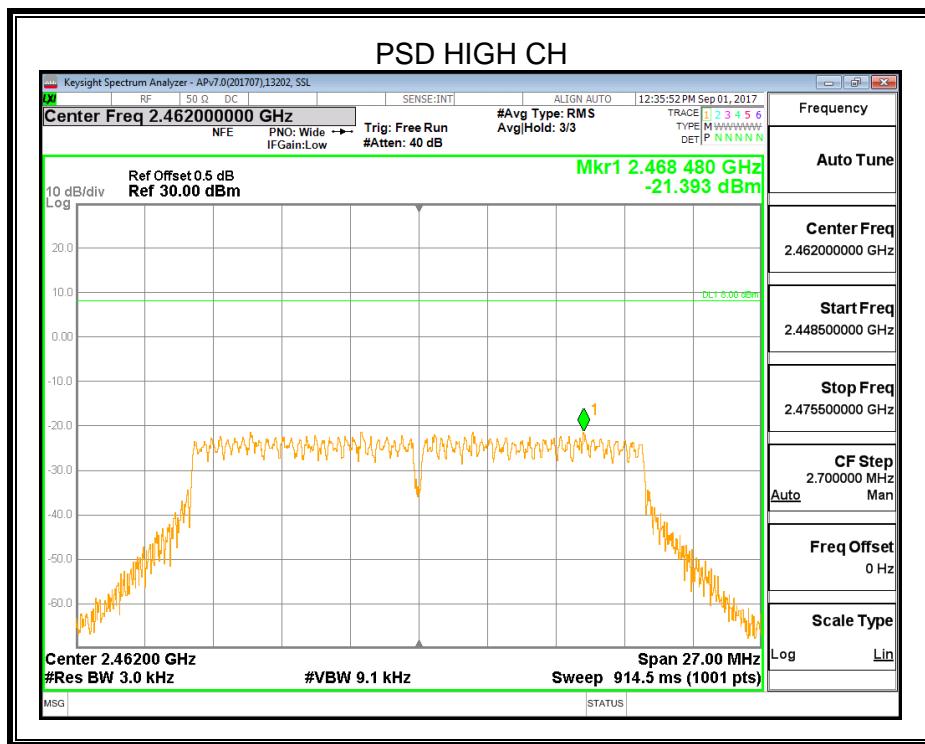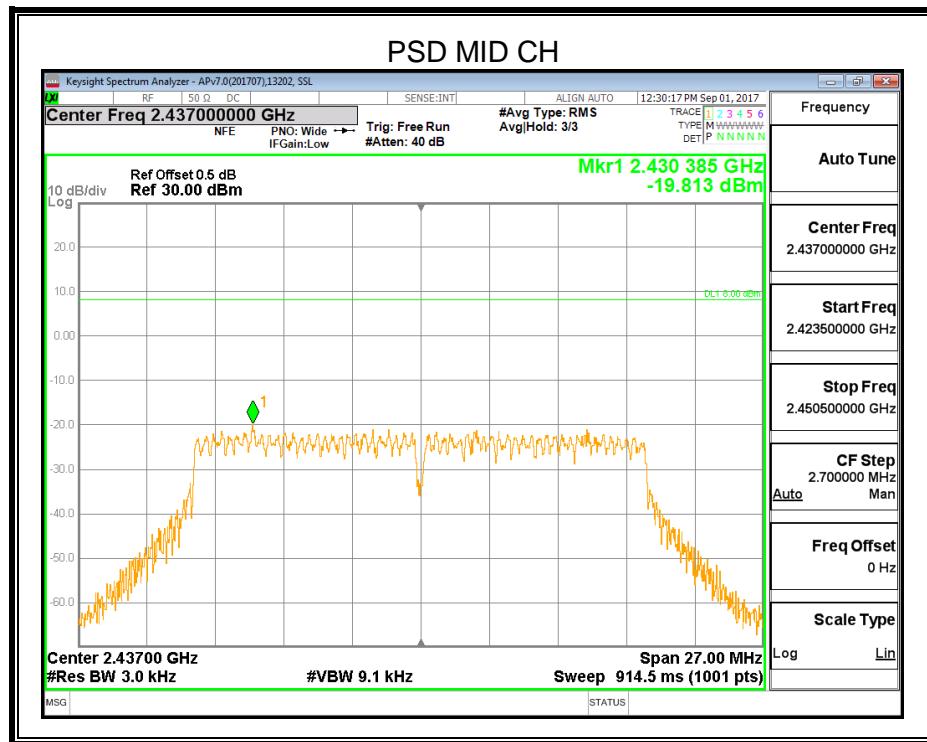

7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

LIMITS

FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:


Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100K
VBW	$\geq 3 \times$ RBW
measurement points	\geq span/RBW
Trace	Max hold
Sweep time	Auto couple.



Use the peak marker function to determine the maximum amplitude level.



TEST SETUP





RESULTS



7.5.1. 802.11b MODE

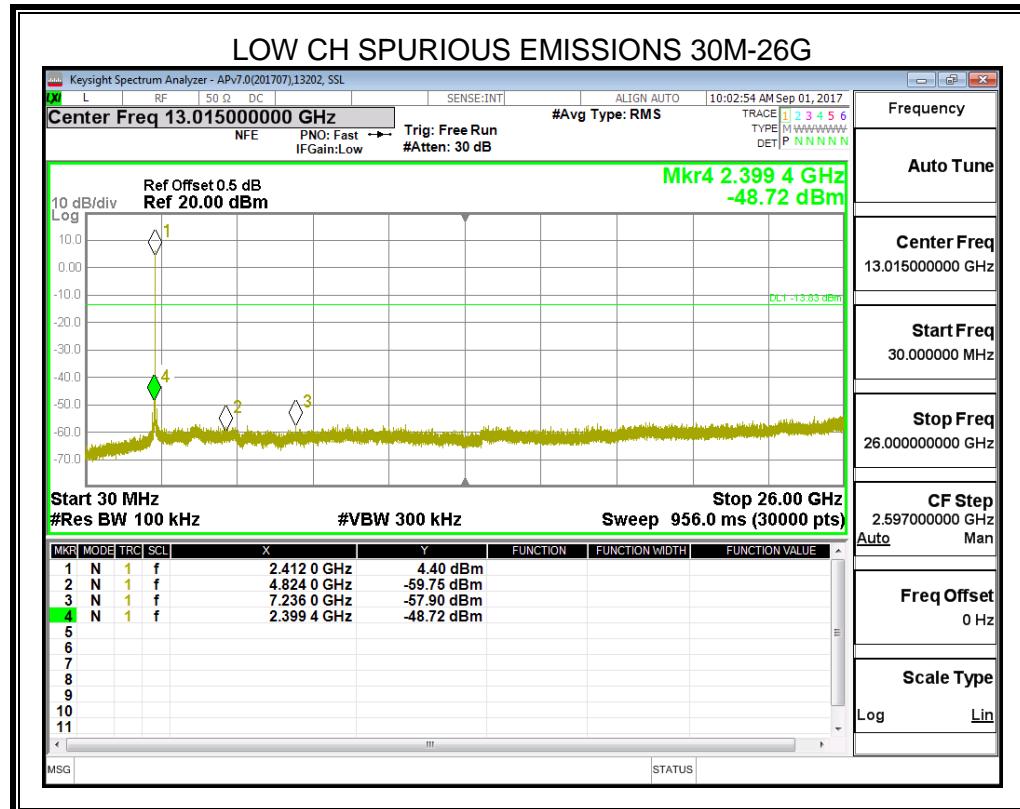
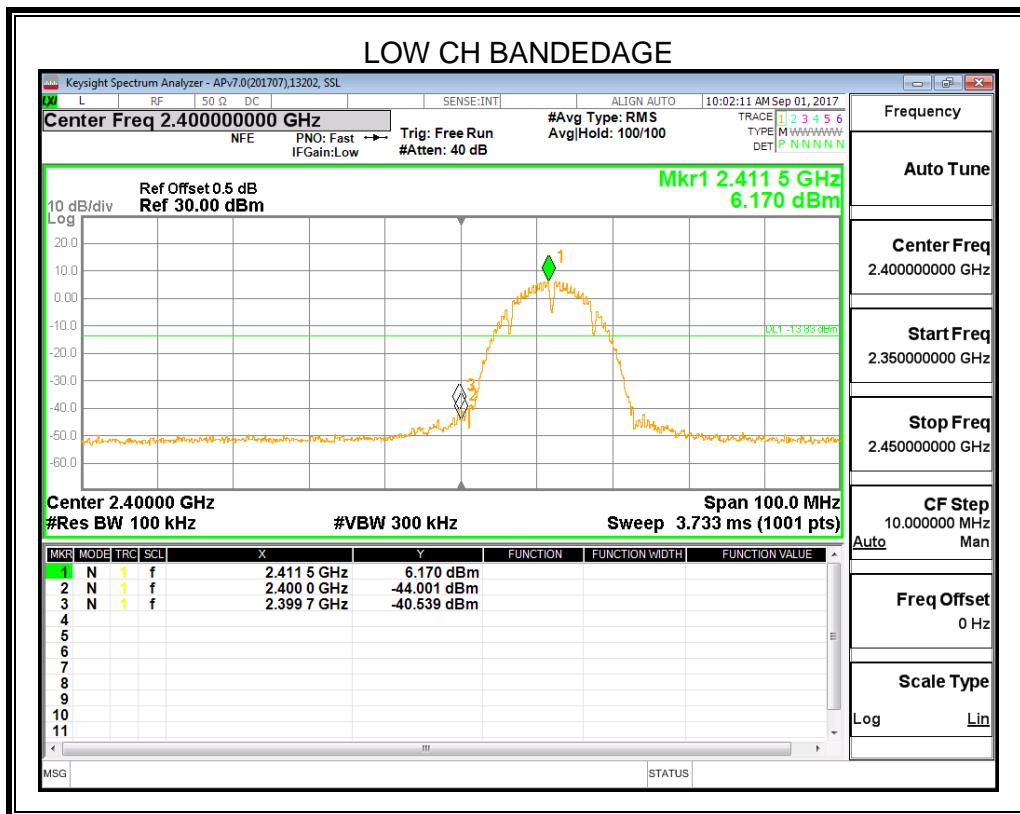


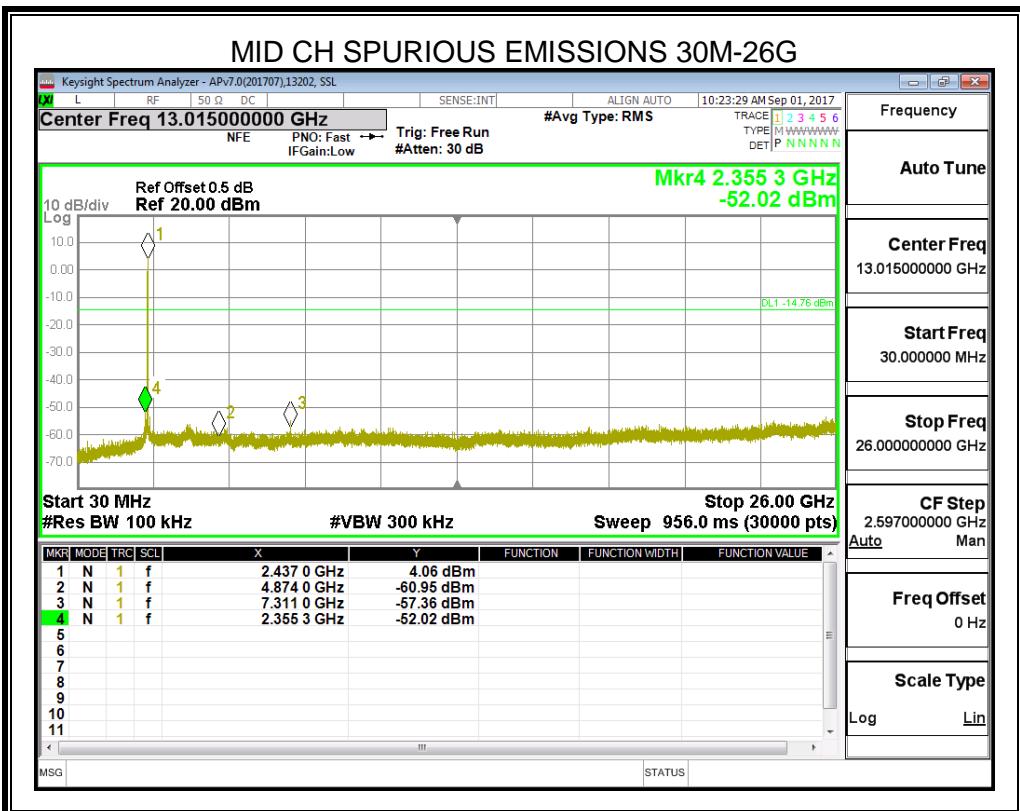
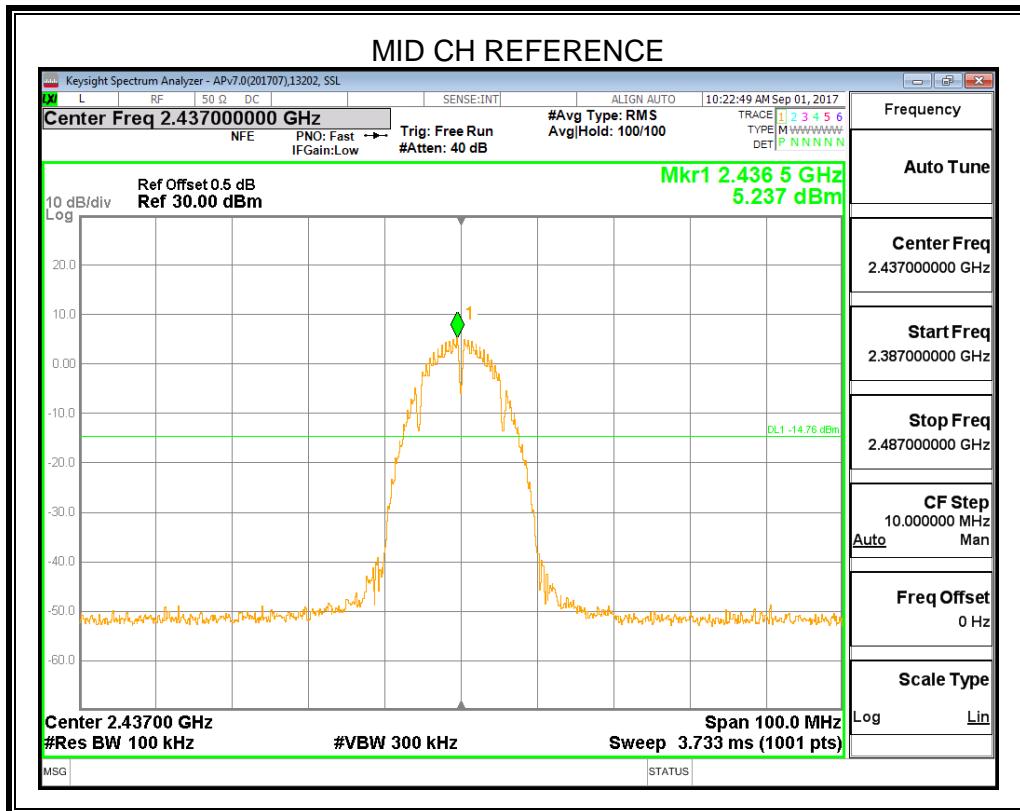


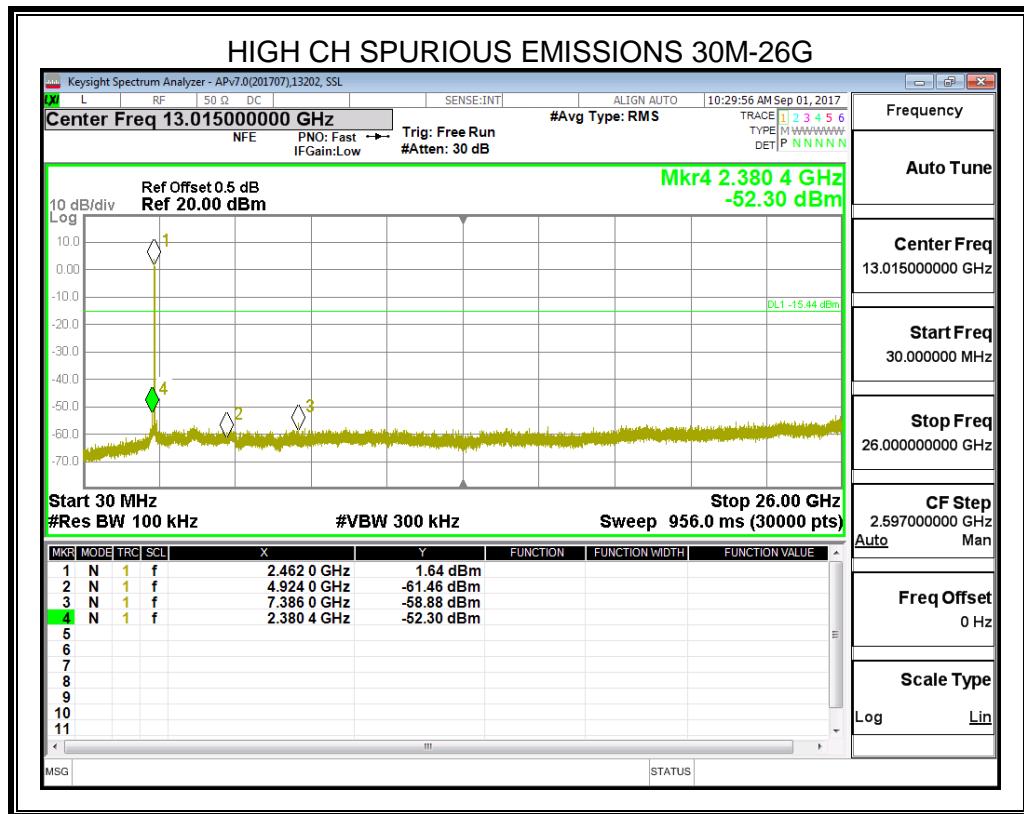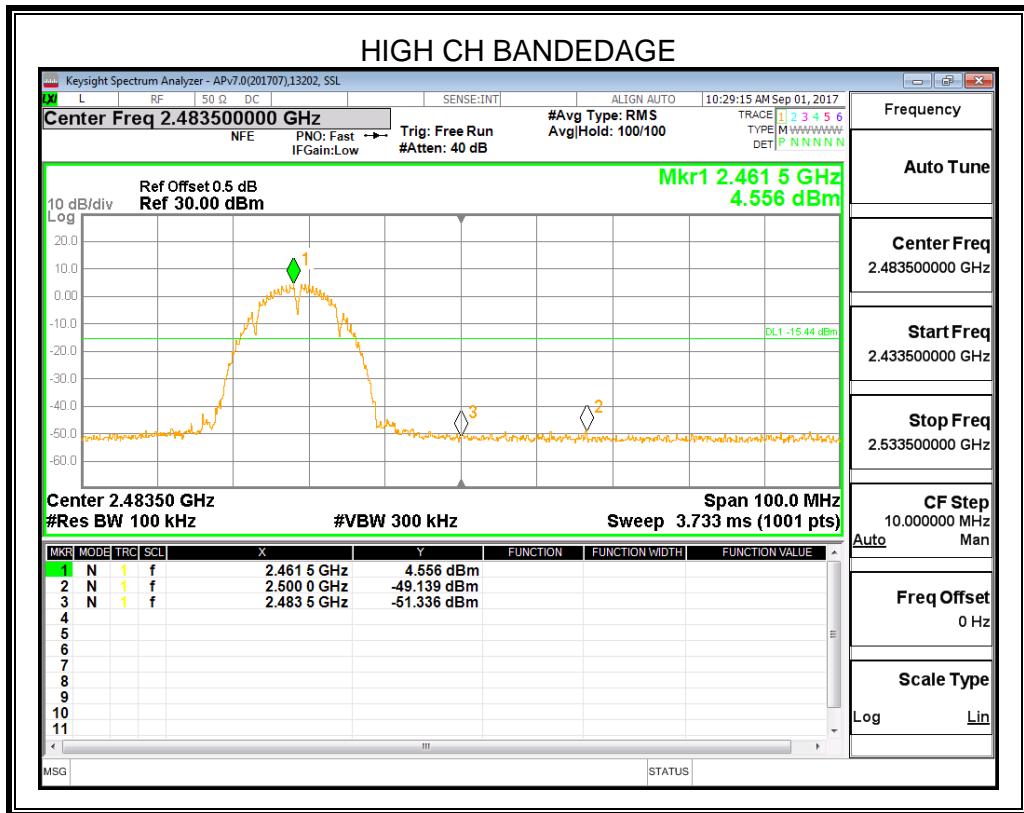



7.5.1. 802.11g MODE

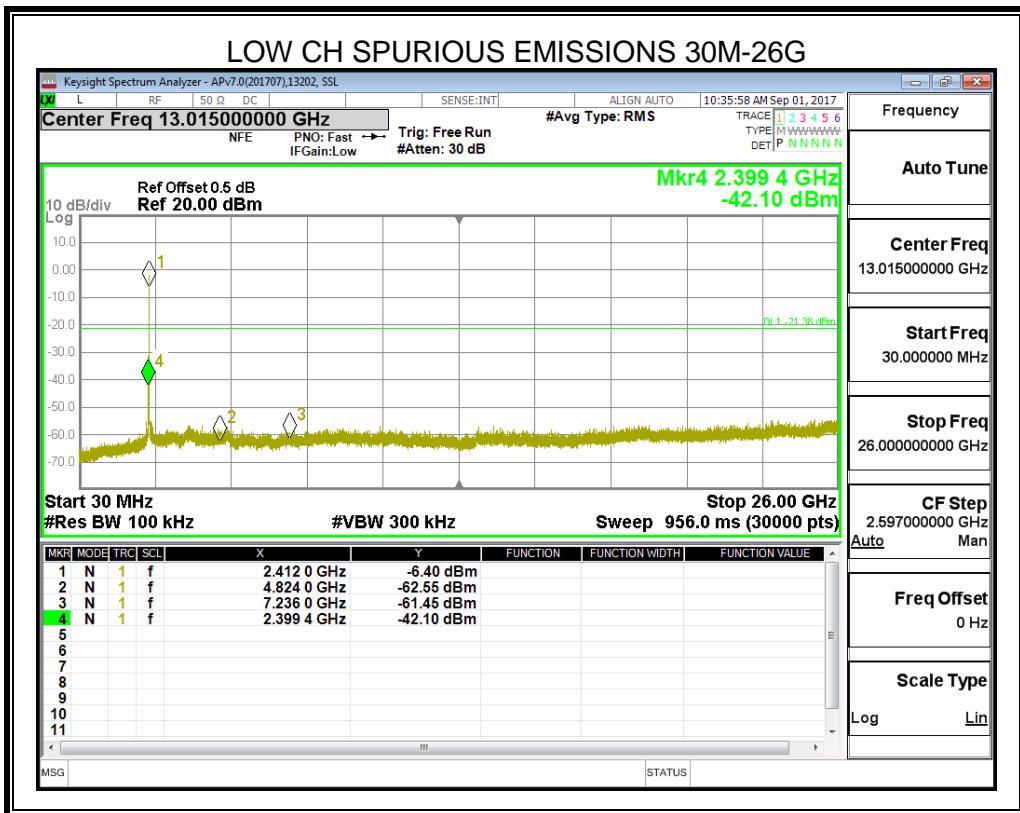
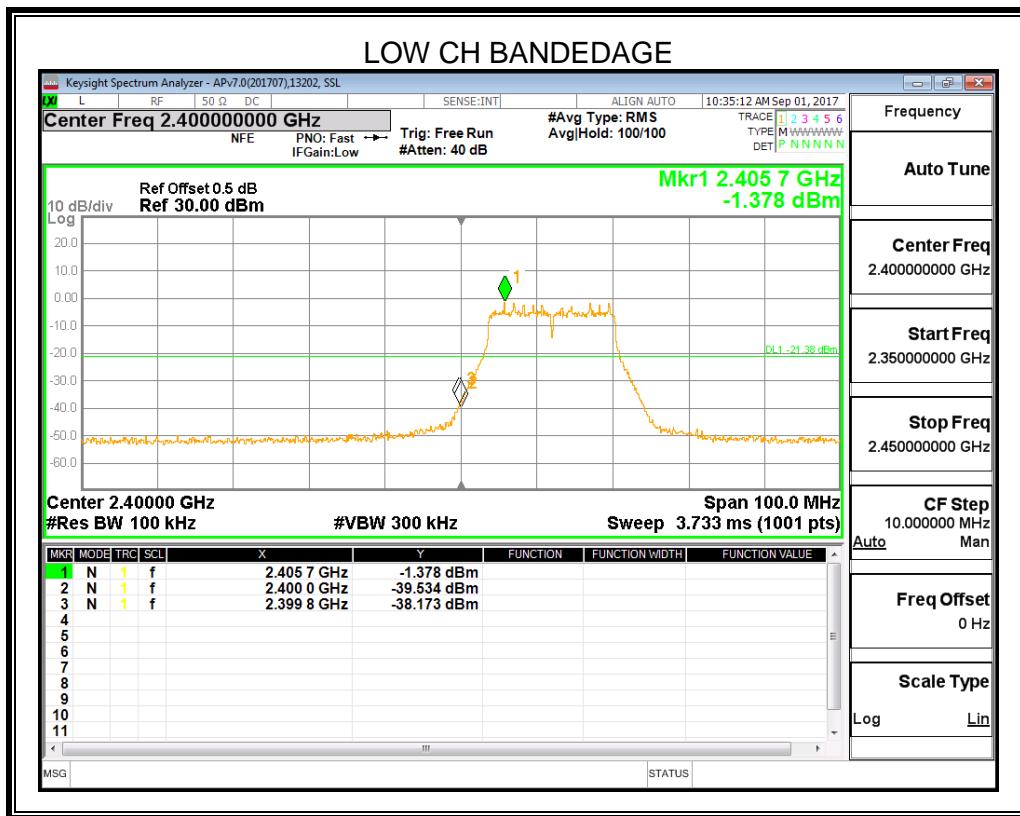


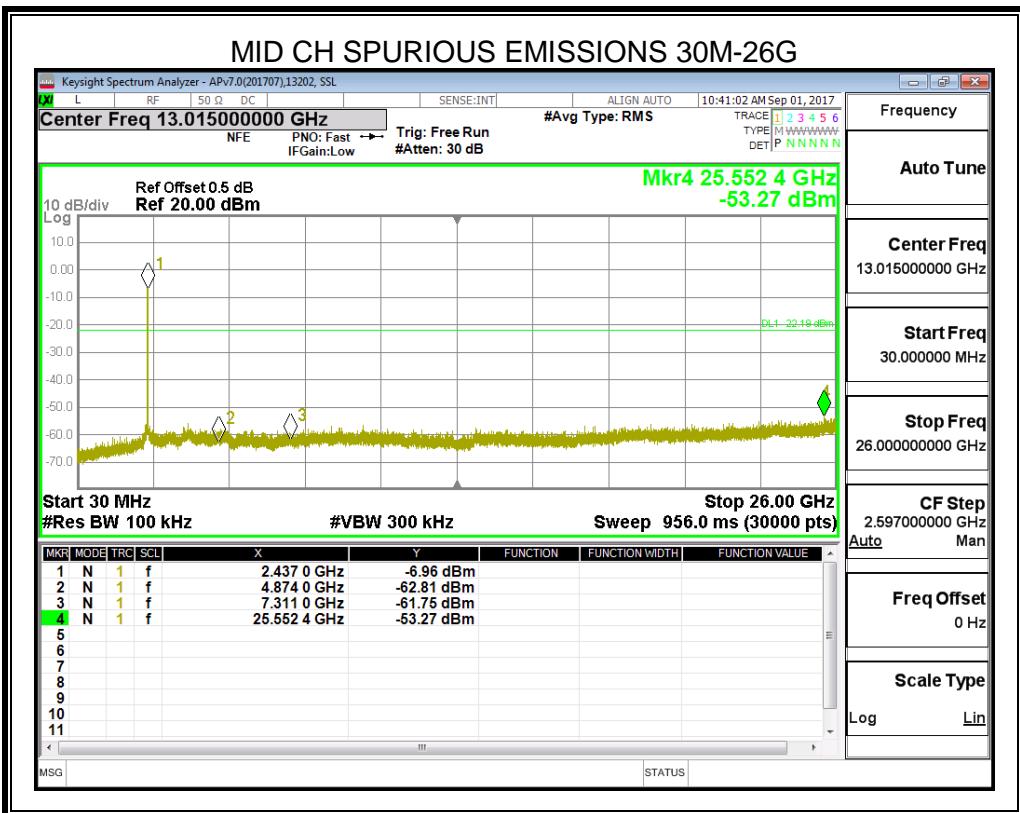
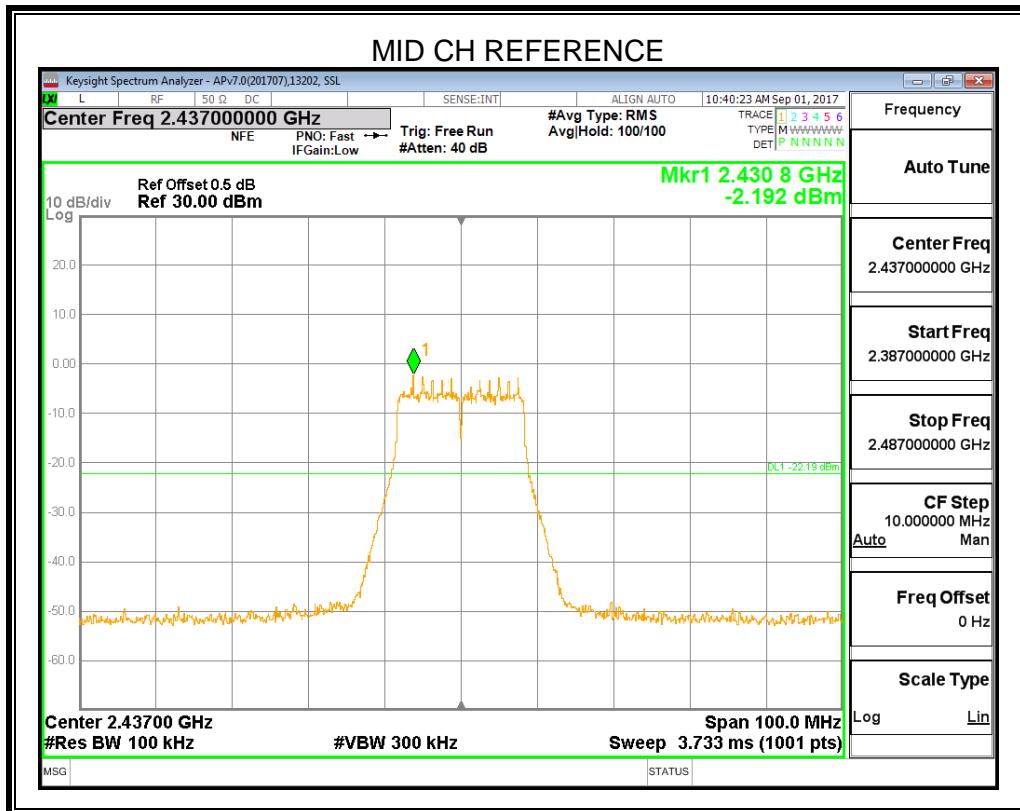


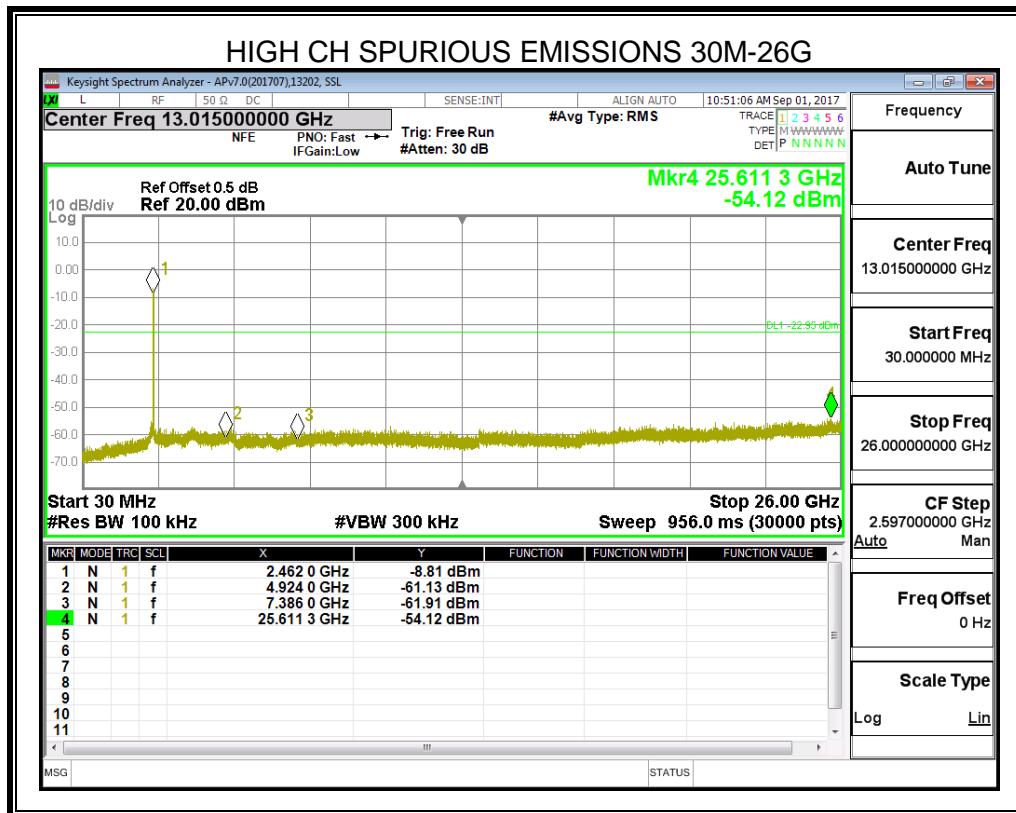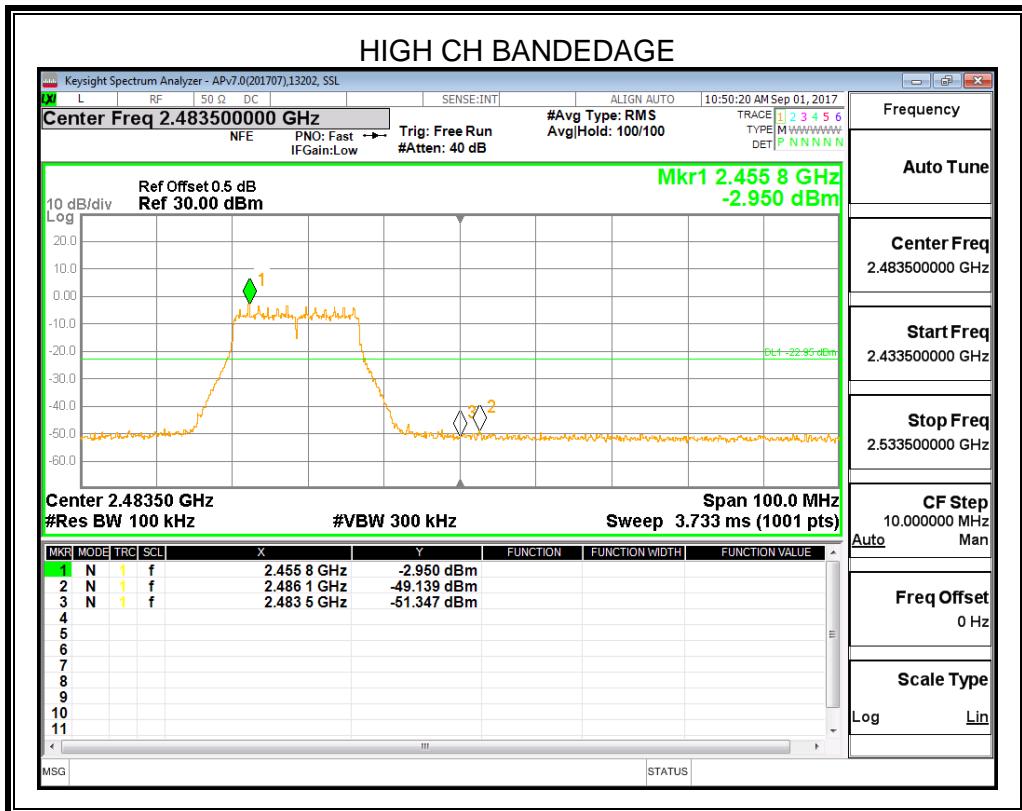

7.5.1. 802.11n HT20 MODE

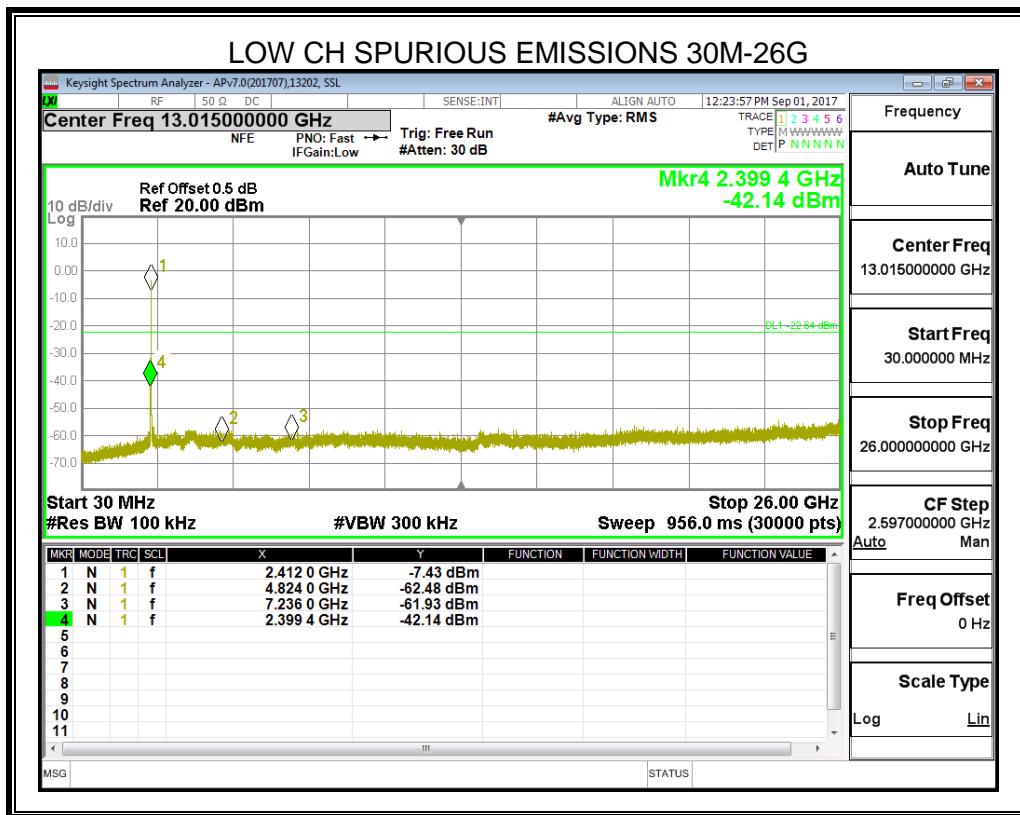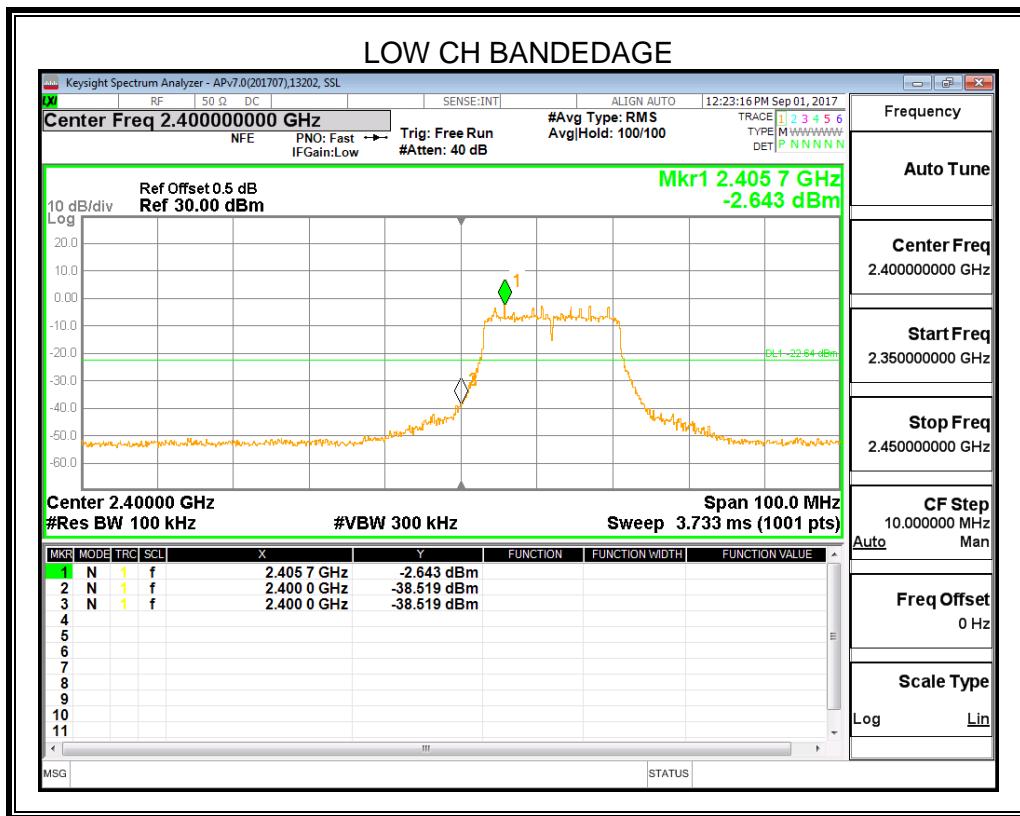

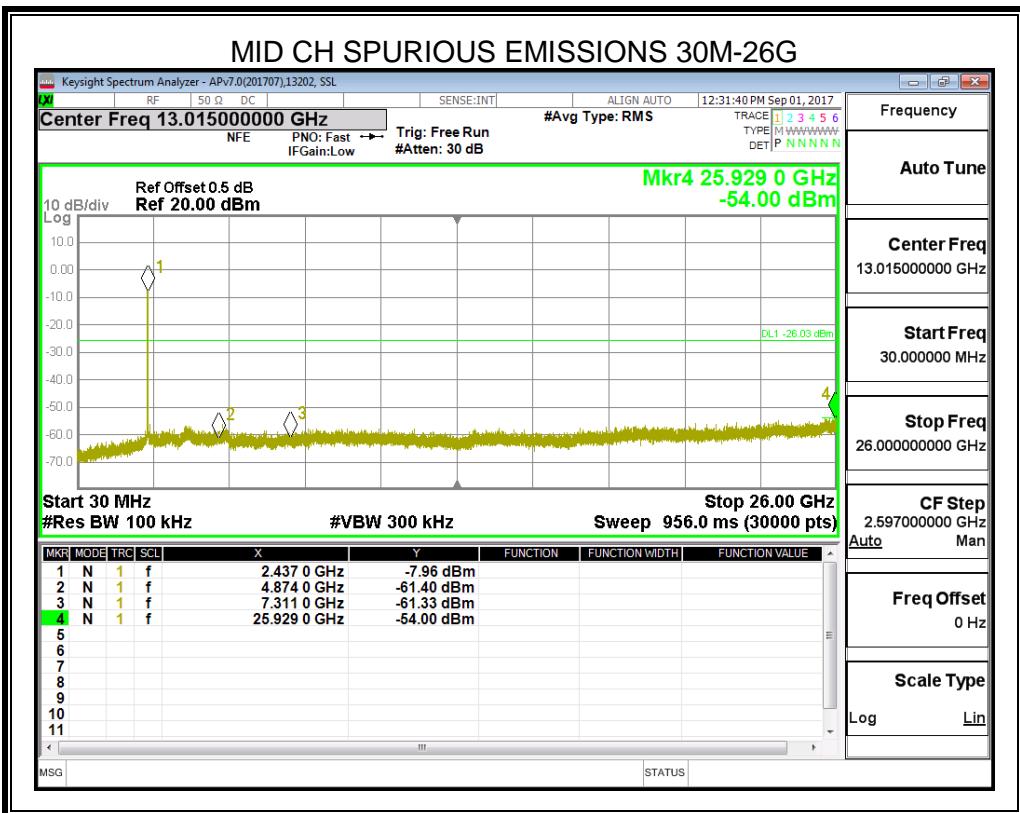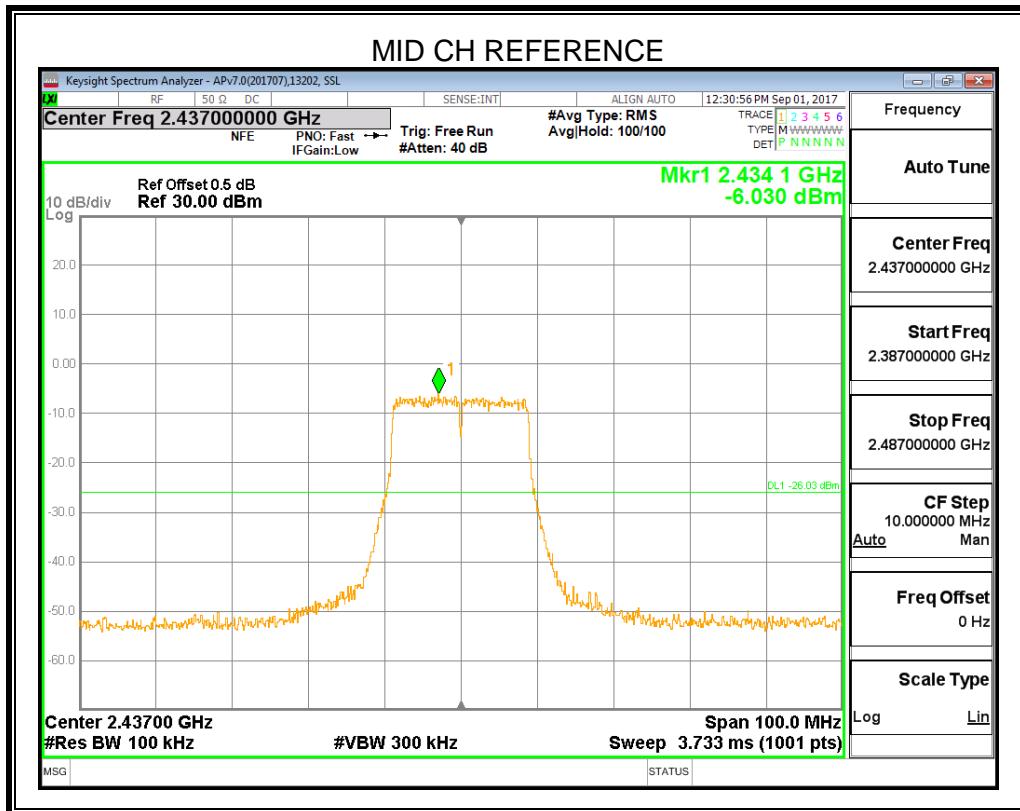

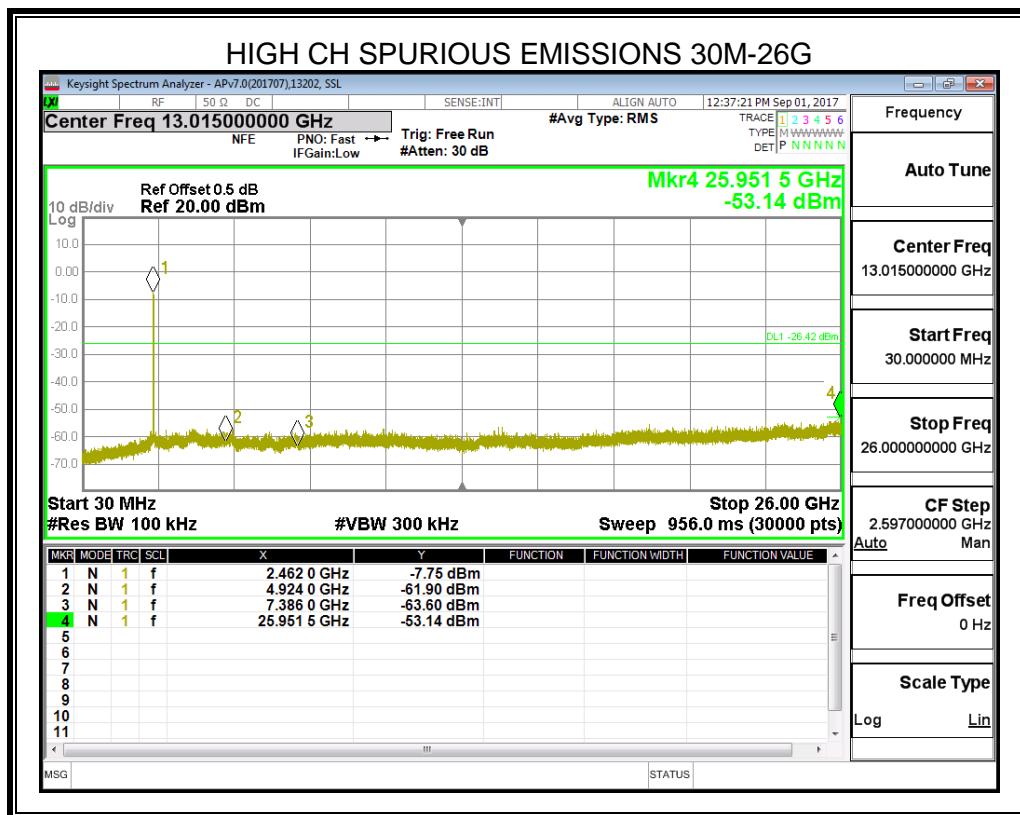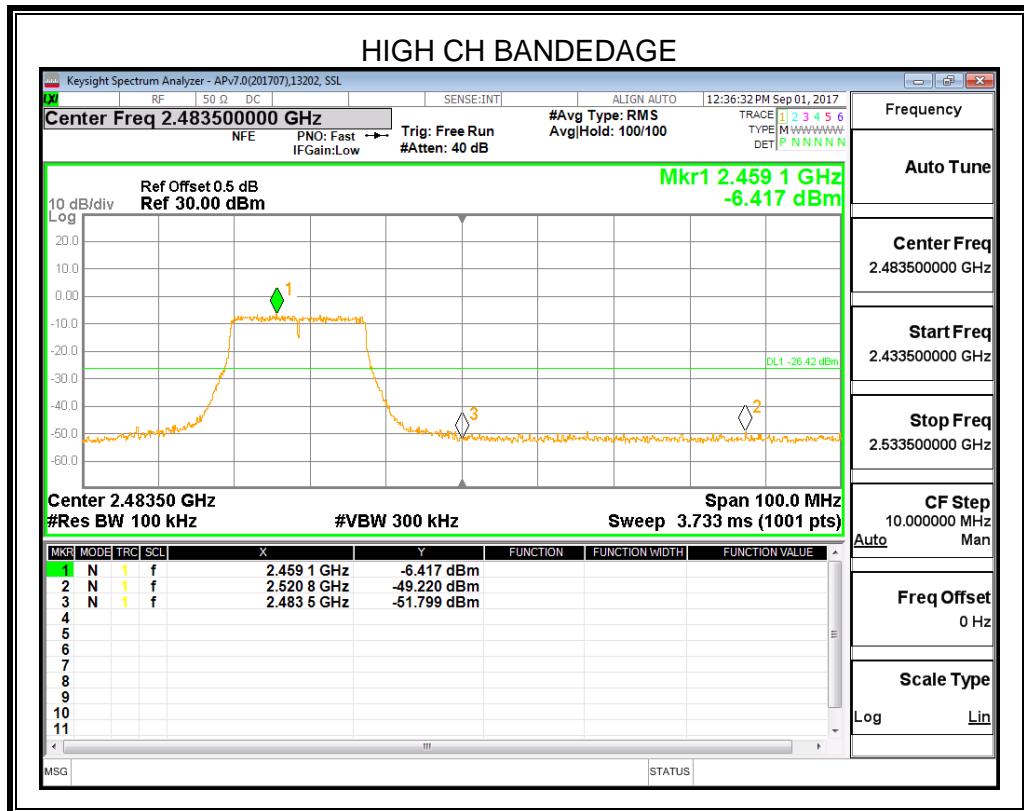

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54


Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Below 30MHz

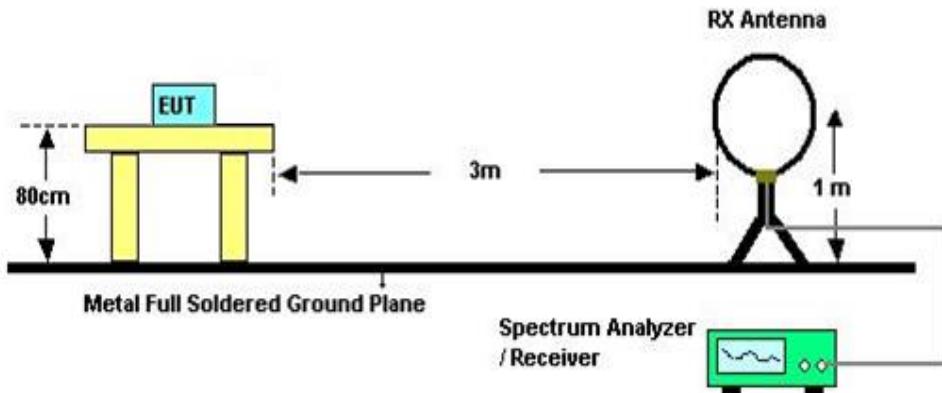


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

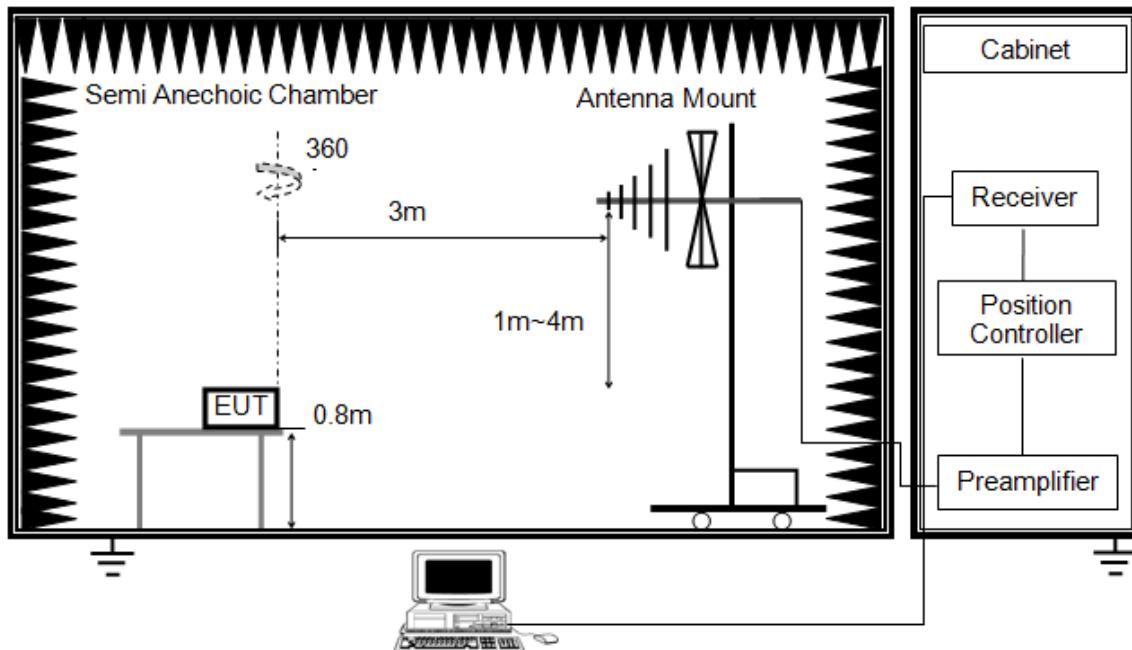


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)


ABOVE 1G

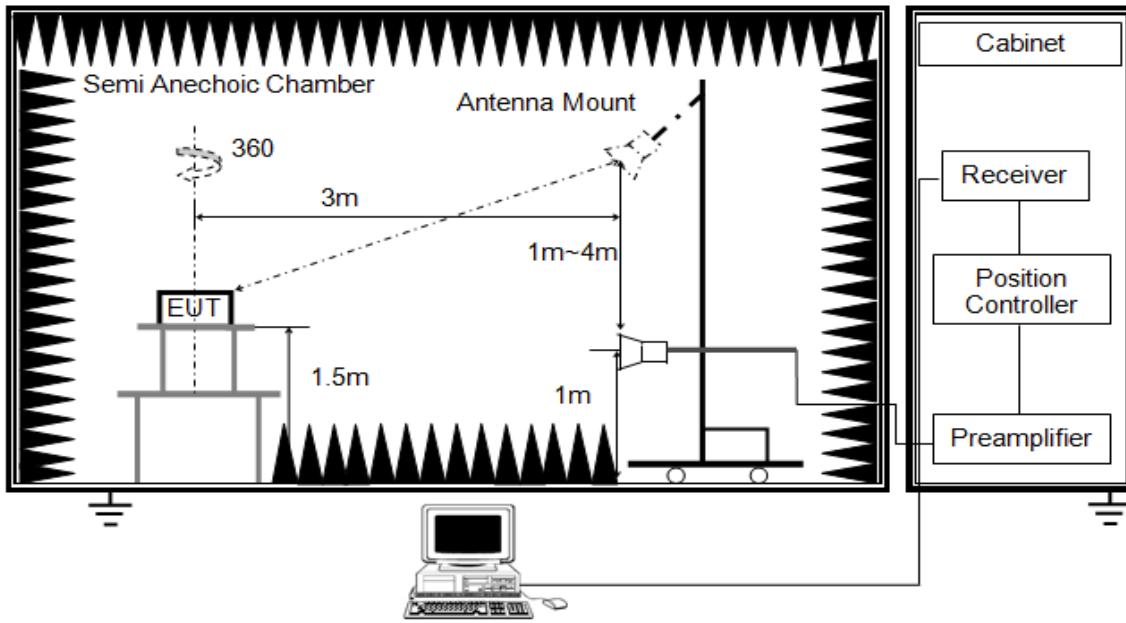

The setting of the spectrum analyser

RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements, for average measurements, if the duty cycle of the EUT is larger than 98%, then set VBW to 10Hz, if the duty cycle of the EUT is less than 98%, set VBW $\geq 1 / T$, where T is defined in clause 7.1.ON TIME AND DUTY CYCLE.

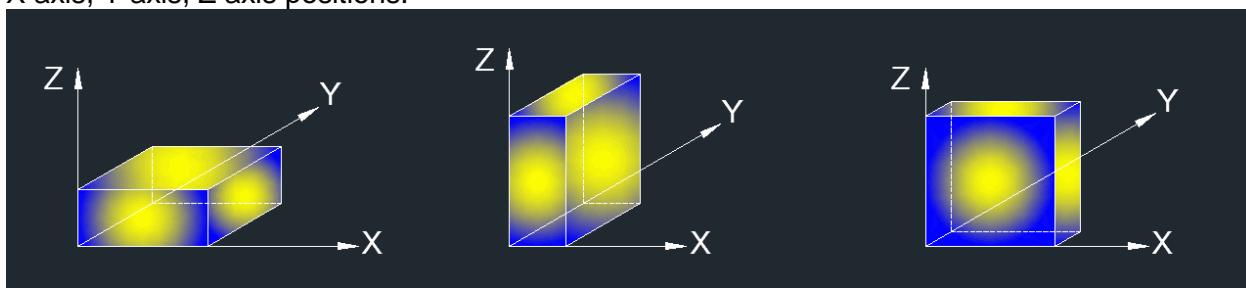


Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

8.2. RESTRICTED BANDEDGE

8.2.1. 802.11b MODE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

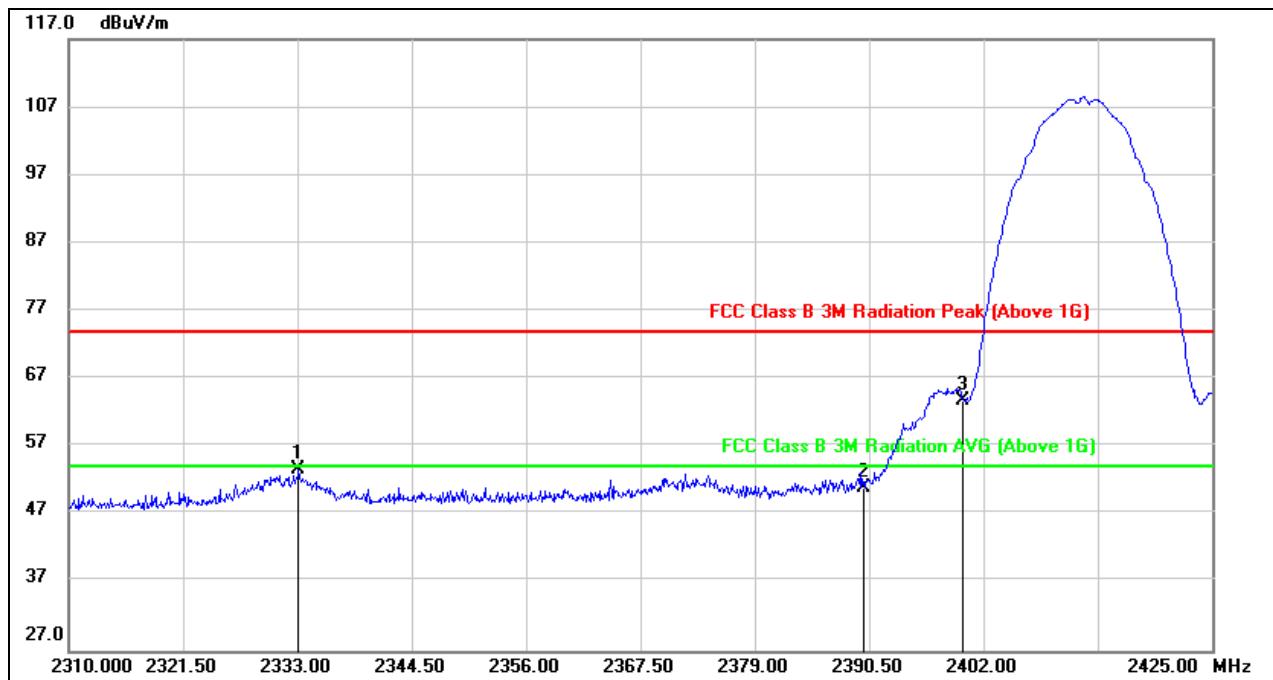

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2333.115	20.02	33.56	53.58	74.00	-20.42	peak
2	2390.000	17.89	33.14	51.03	74.00	-22.97	peak
3	2400.000	30.69	33.07	63.76	74.00	-10.24	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.


RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

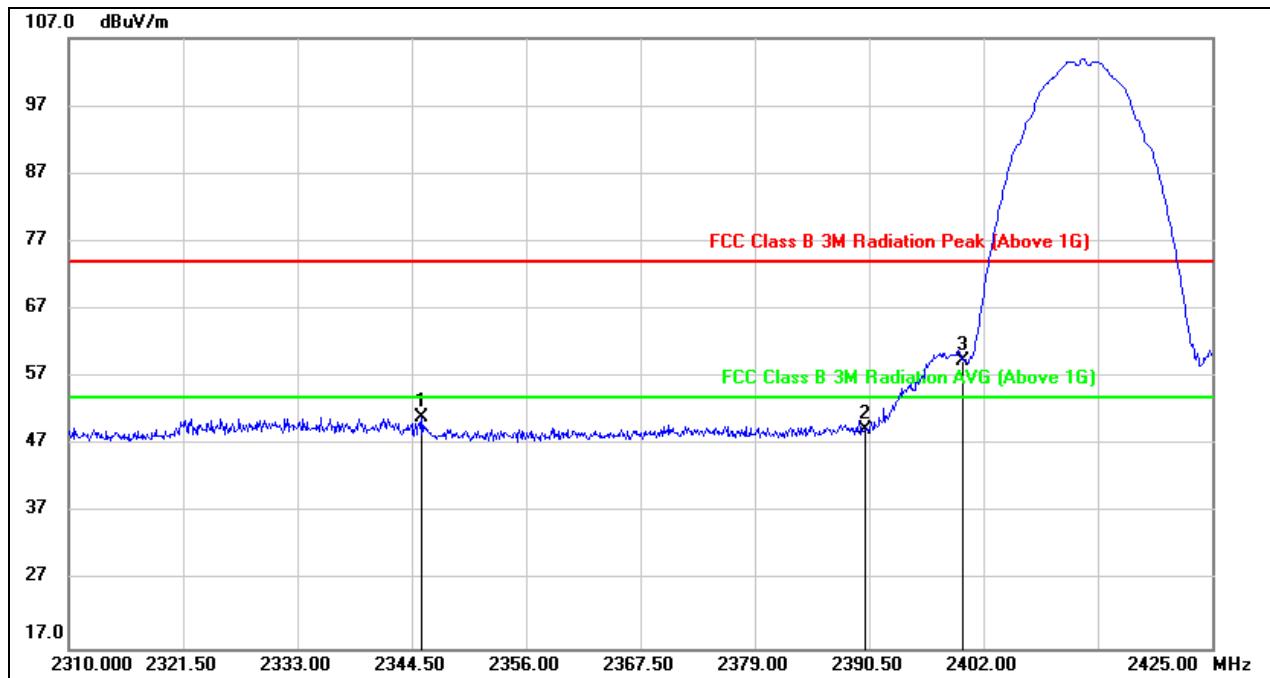

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2345.535	17.41	33.57	50.98	74.00	-23.02	peak
2	2390.000	16.05	33.24	49.29	74.00	-24.71	peak
3	2400.000	26.24	33.17	59.41	74.00	-14.59	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.


RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

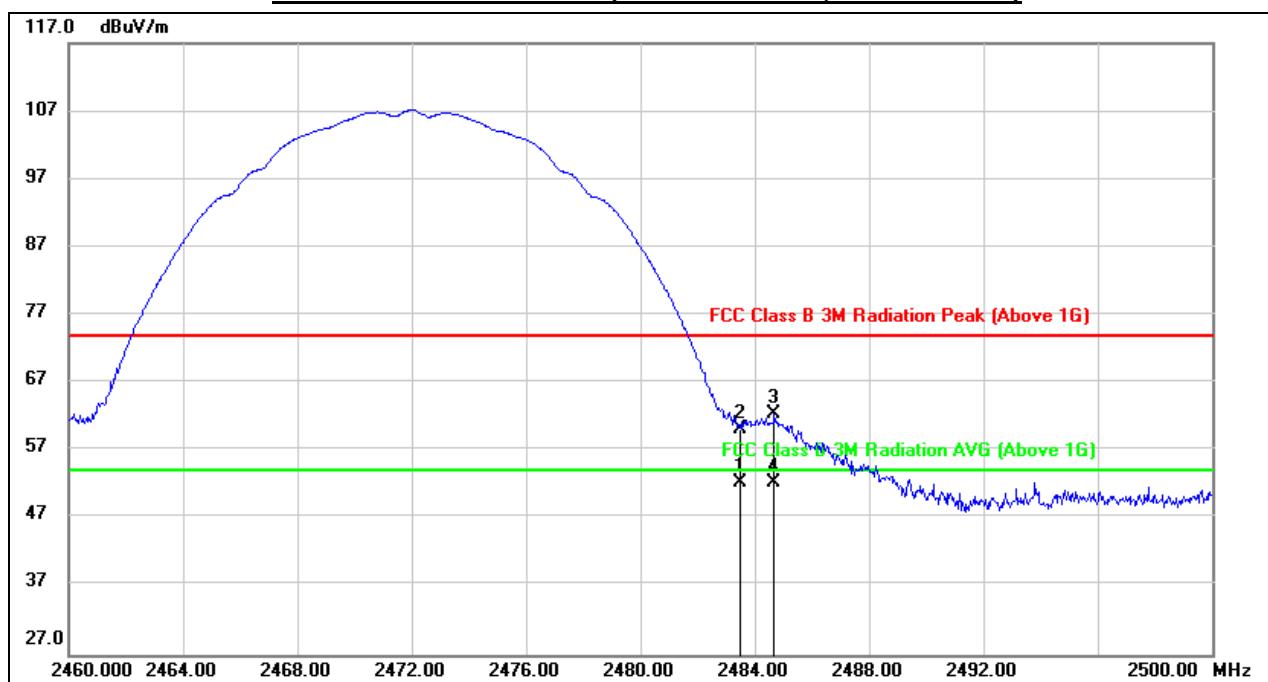

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.63	32.78	52.41	54.00	-1.59	AVG
2	2483.500	27.45	32.78	60.23	74.00	-13.77	peak
3	2484.680	29.61	32.78	62.39	74.00	-11.61	peak
4	2484.680	19.59	32.78	52.37	54.00	-1.63	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW =10Hz

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

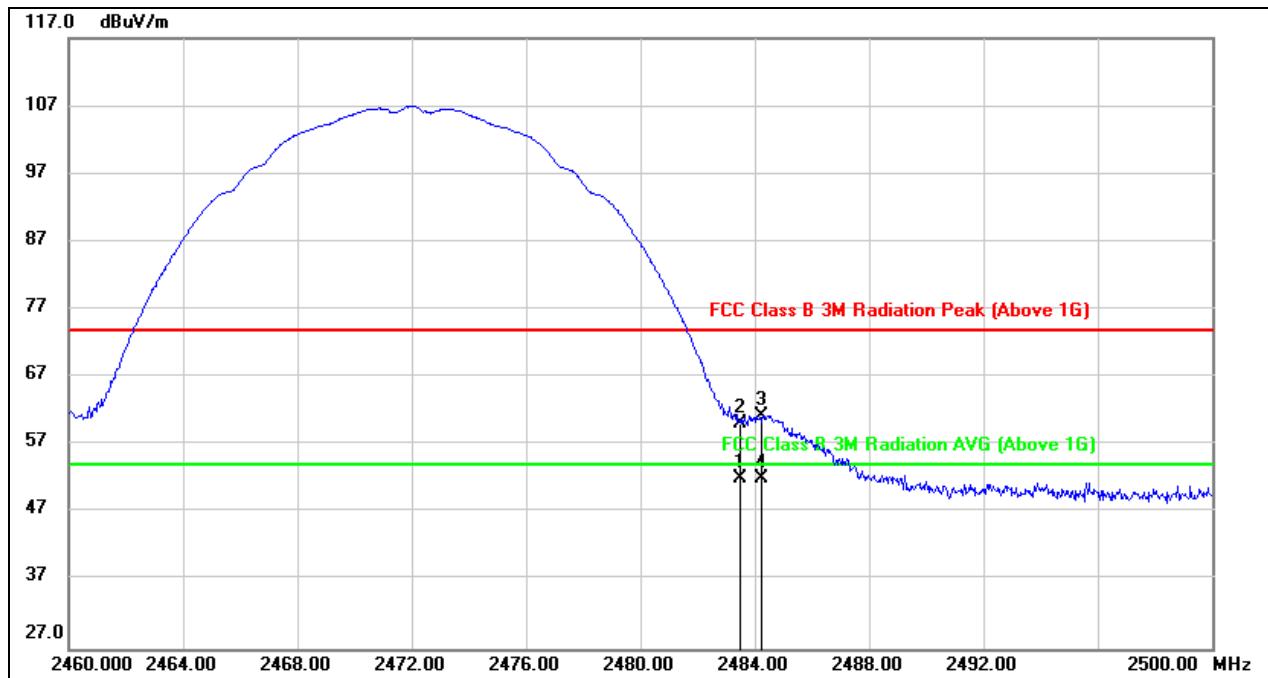


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.28	32.78	52.06	54.00	-1.94	AVG
2	2483.500	27.44	32.78	60.22	74.00	-13.78	peak
3	2484.240	28.62	32.78	61.40	74.00	-12.60	peak
4	2484.240	19.34	32.78	52.12	54.00	-1.88	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW =10Hz

8.2.2. 802.11g MODE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

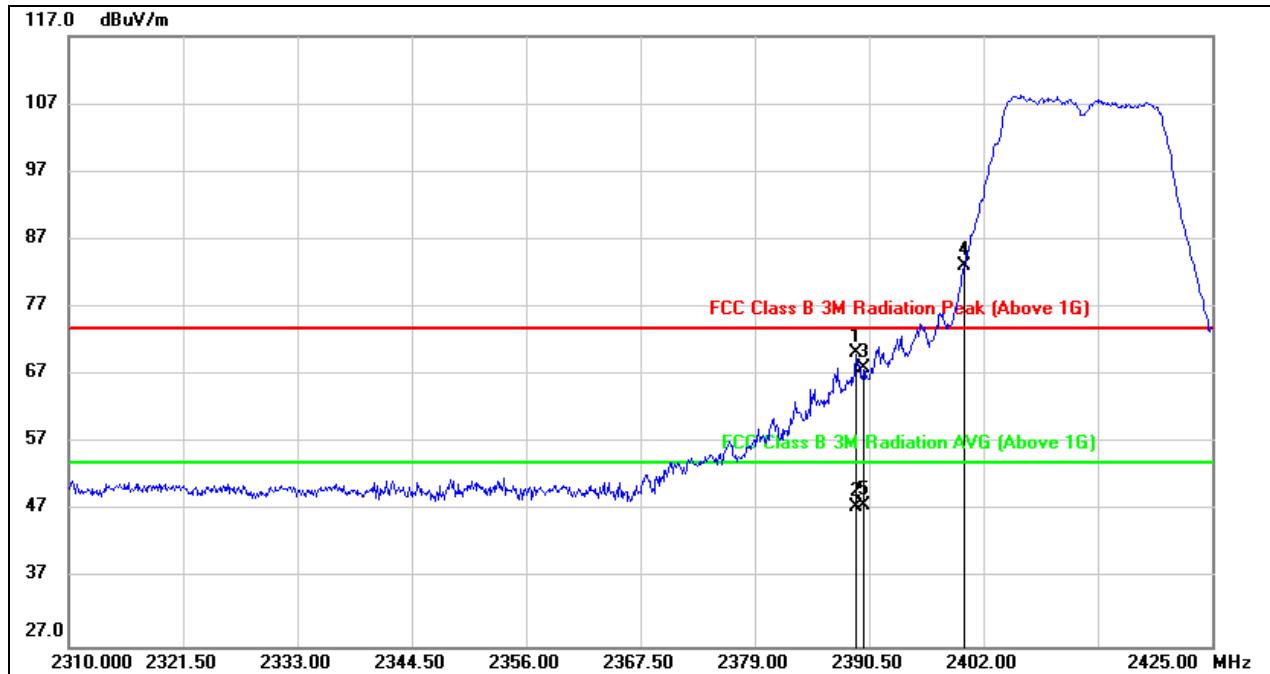

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.120	37.13	33.15	70.28	74.00	-3.72	peak
2	2389.120	14.48	33.15	47.63	54.00	-6.37	AVG
3	2390.000	34.97	33.14	68.11	74.00	-5.89	peak
4	2400.000	50.01	33.07	83.08	74.00	9.08	peak
5	2390.000	14.58	33.14	47.72	54.00	-6.28	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton=500Hz where: ton is transmit duration.
5. For more information about transmit duration, please refer to clause 7.1.


RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

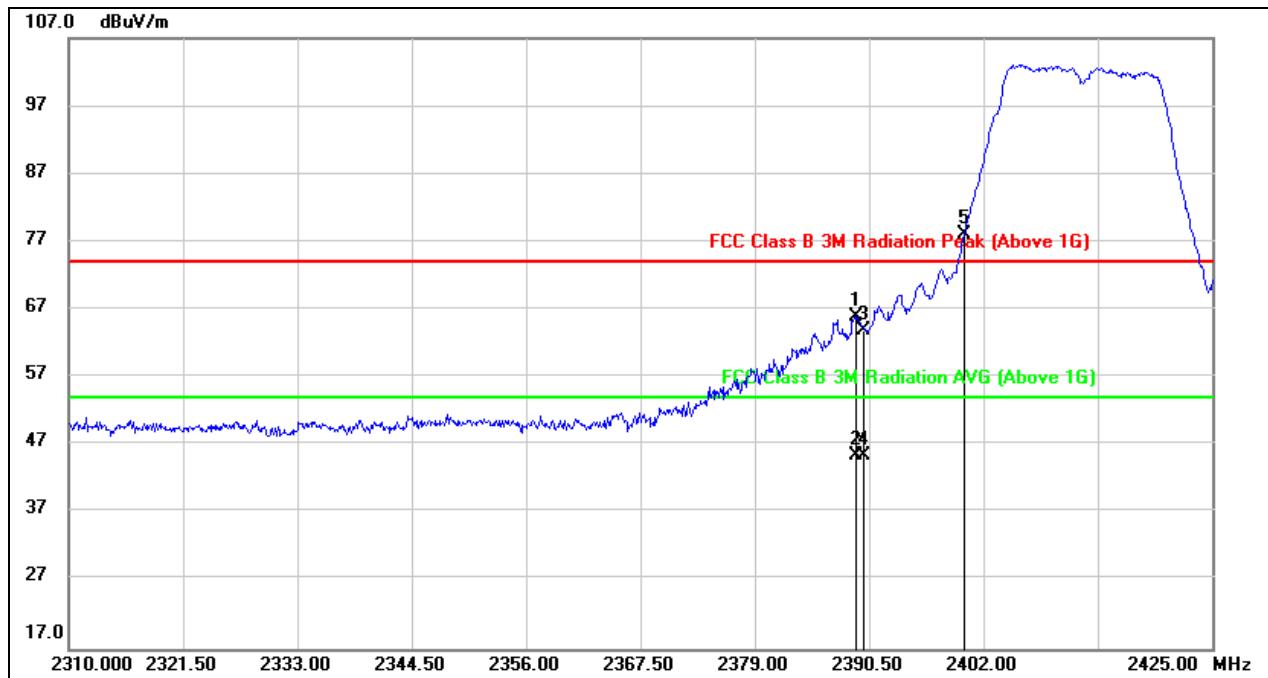

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.120	32.78	33.25	66.03	74.00	-7.97	peak
2	2389.120	12.15	33.25	45.40	54.00	-8.60	AVG
3	2390.000	30.71	33.24	63.95	74.00	-10.05	peak
4	2390.000	12.25	33.24	45.49	54.00	-8.51	AVG
5	2400.000	44.81	33.17	77.98	74.00	3.98	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton=500Hz where: ton is transmit duration.
5. For more information about transmit duration, please refer to clause 7.1.


RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

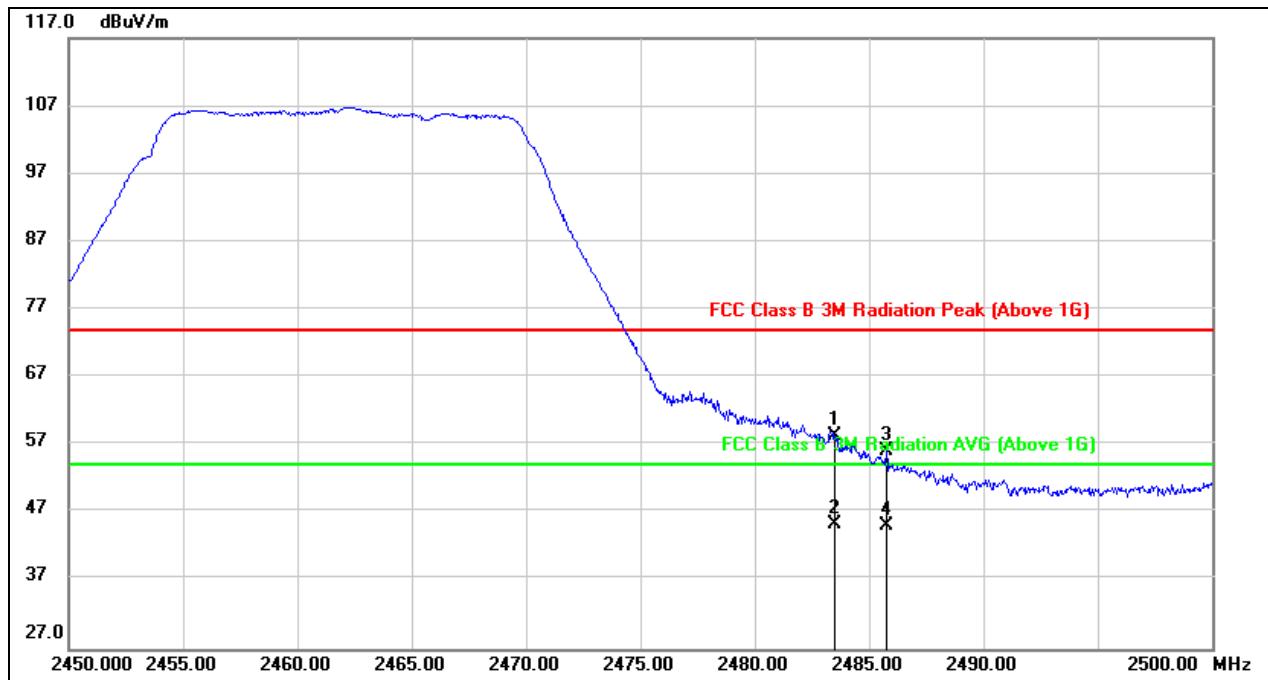

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	25.52	32.78	58.30	74.00	-15.70	peak
2	2483.500	12.48	32.78	45.26	54.00	-8.74	AVG
3	2485.750	23.33	32.79	56.12	74.00	-17.88	peak
4	2485.750	12.35	32.79	45.14	54.00	-8.86	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton=500Hz where: ton is transmit duration.
5. For more information about transmit duration, please refer to clause 7.1.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

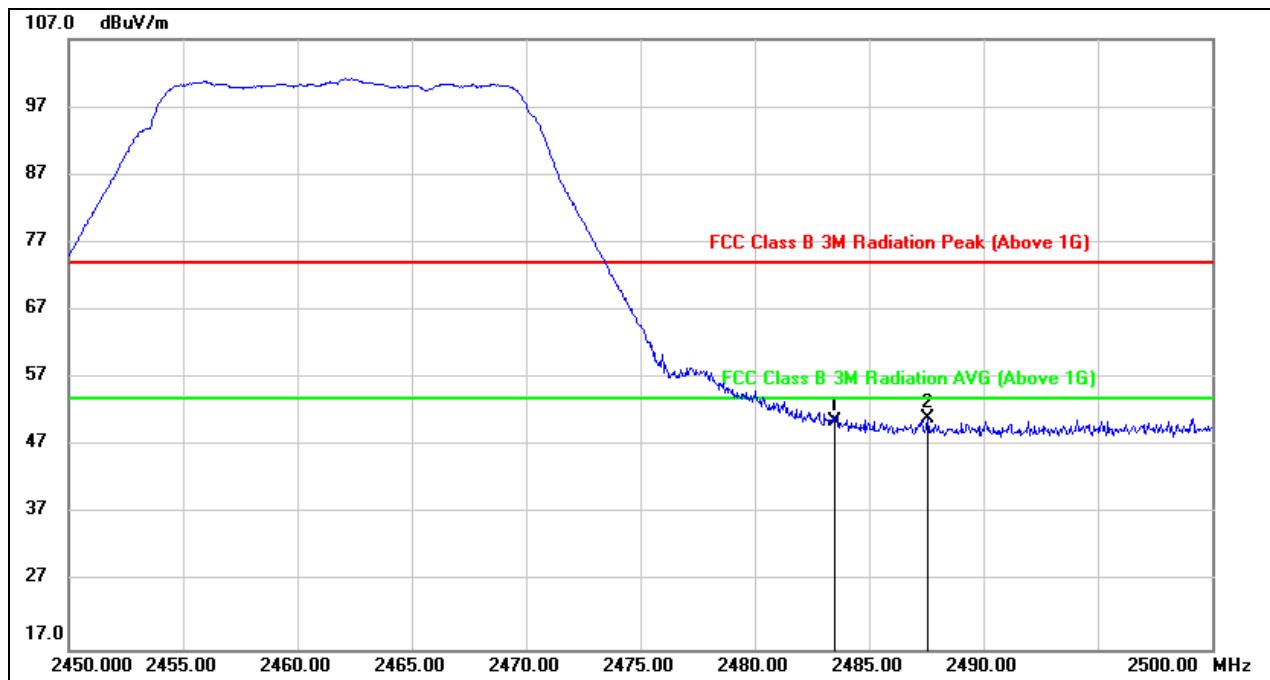


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.81	32.88	50.69	74.00	-23.31	peak
2	2487.550	18.25	32.88	51.13	74.00	-22.87	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

8.2.3. 802.11n HT20 MODE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

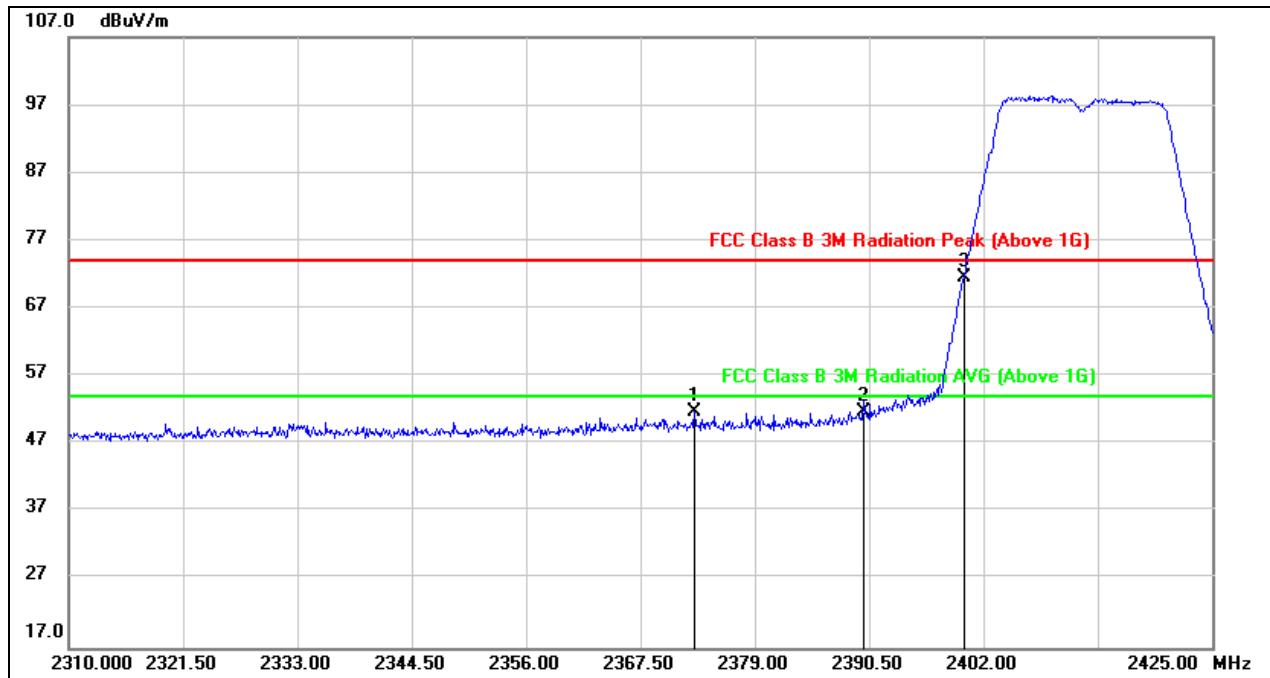

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2372.905	18.55	33.27	51.82	74.00	-22.18	peak
2	2390.000	18.52	33.14	51.66	74.00	-22.34	peak
3	2400.000	38.50	33.07	71.57	74.00	-2.43	peak


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

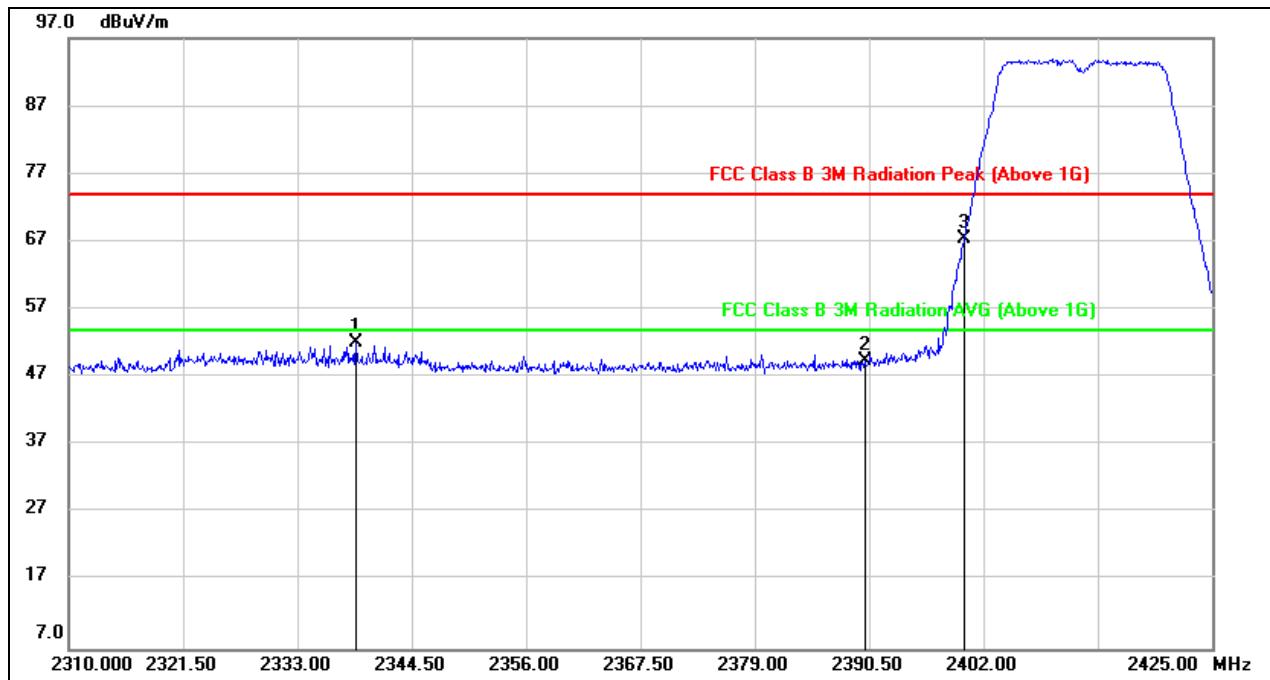

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2338.865	18.42	33.63	52.05	74.00	-21.95	peak
2	2390.000	16.21	33.24	49.45	74.00	-24.55	peak
3	2400.000	34.24	33.17	67.41	74.00	-6.59	peak


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

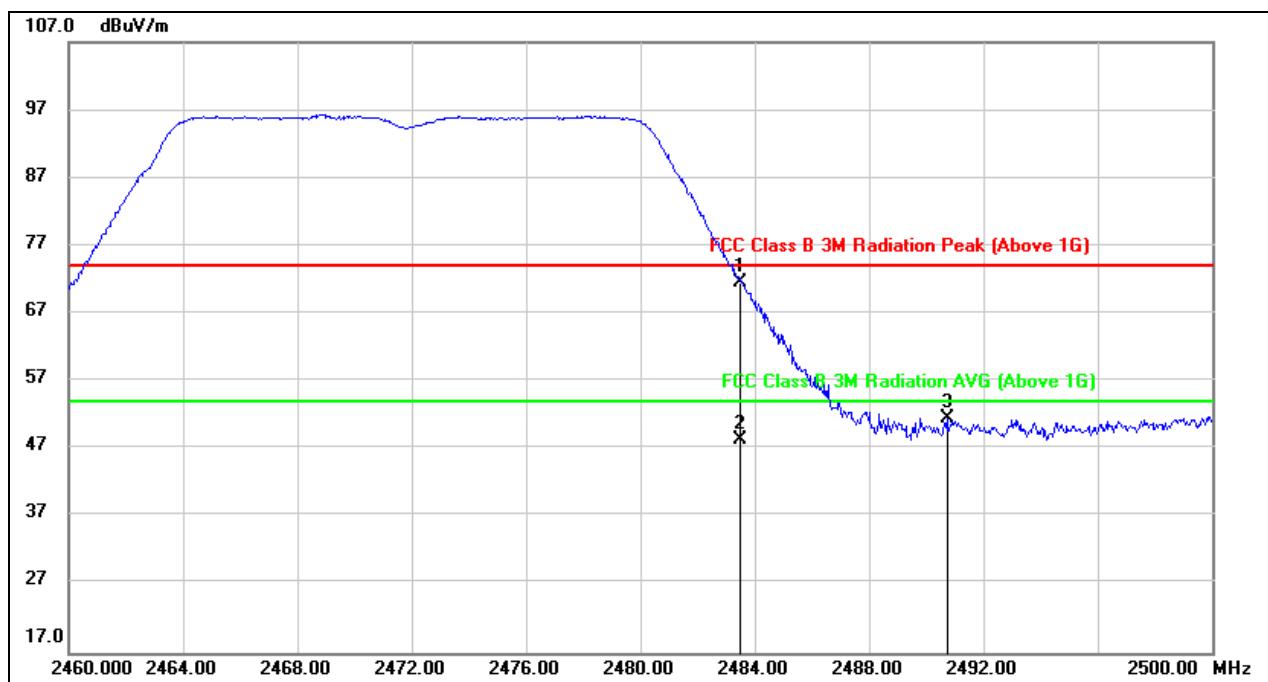

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.86	32.78	71.64	74.00	-2.36	peak
2	2483.500	15.68	32.78	48.46	54.00	-5.54	AVG
3	2490.720	18.83	32.78	51.61	74.00	-22.39	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton=1000Hz where: ton is transmit duration.
5. For more information about transmit duration, please refer to clause 7.1.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

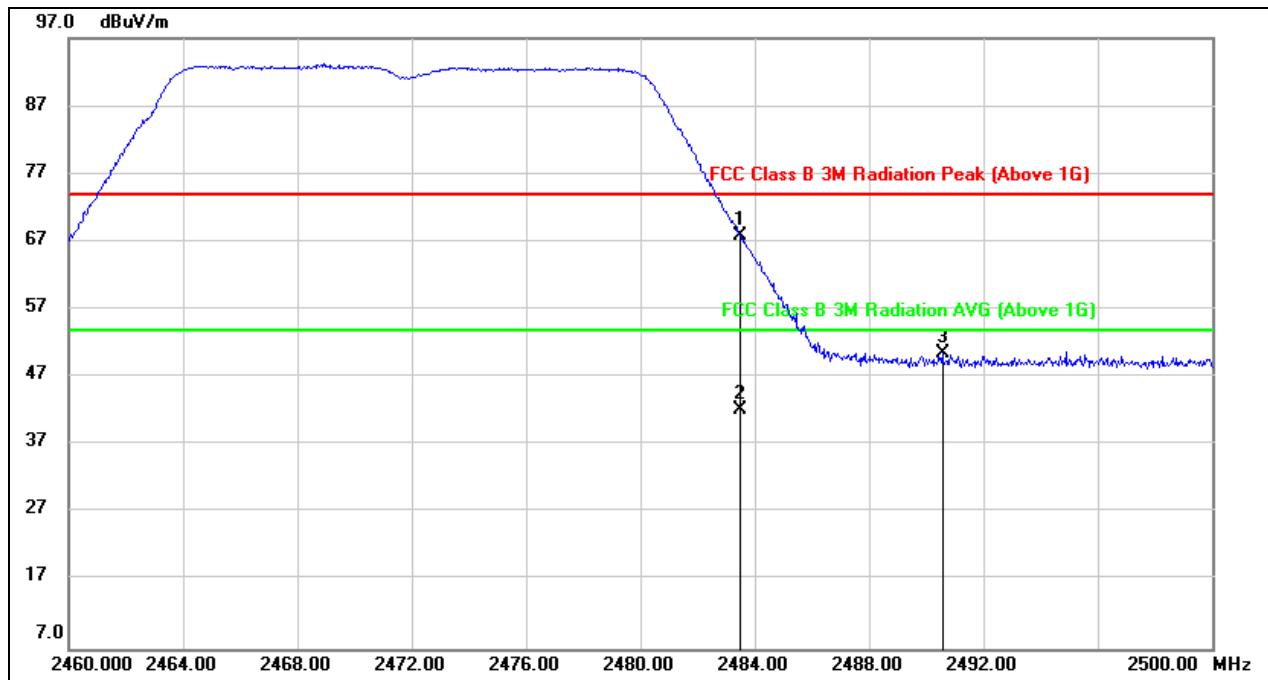


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	34.91	32.88	67.79	74.00	-6.21	peak
2	2483.500	9.34	32.88	42.22	54.00	-11.78	AVG
3	2490.560	17.59	32.88	50.47	74.00	-23.53	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton=1000Hz$ where: ton is transmit duration.
5. For more information about transmit duration, please refer to clause 7.1.

8.3. SPURIOUS EMISSIONS (1~18GHz)

8.3.1. 802.11b MODE


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

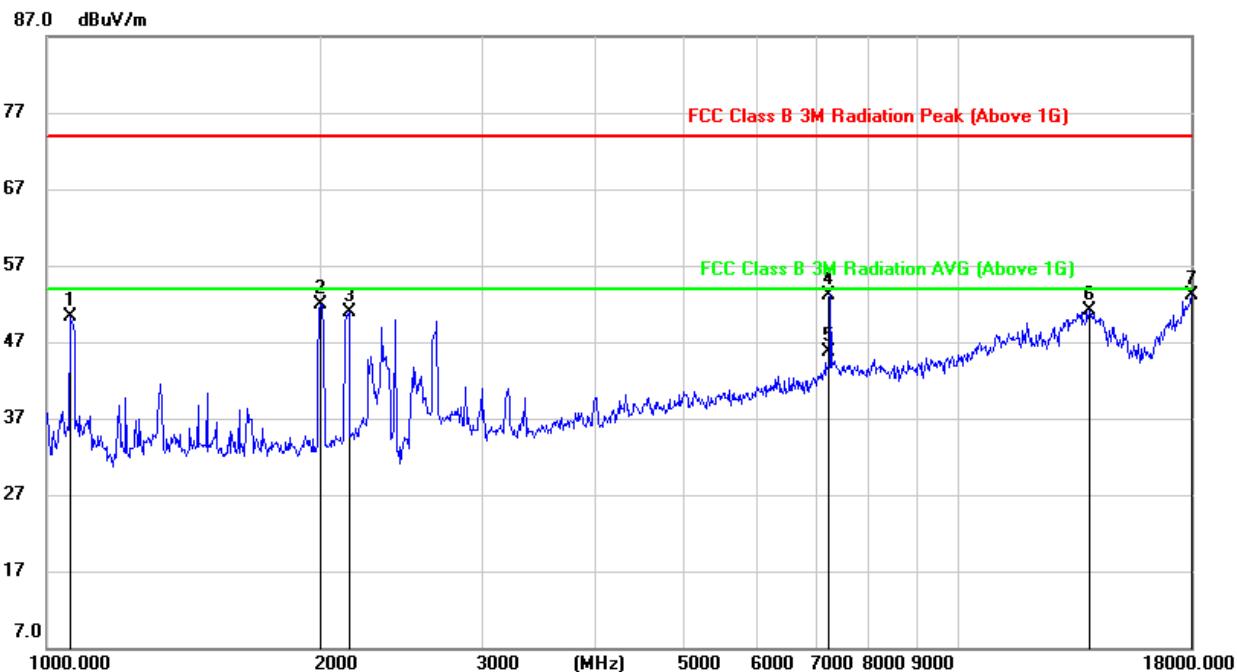

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1062.578	64.33	-14.07	50.26	74.00	-23.74	peak
2	2001.084	63.20	-11.22	51.98	74.00	-22.02	peak
3	2151.034	60.34	-9.53	50.81	74.00	-23.19	peak
4	7236.000	47.29	5.91	53.20	74.00	-20.80	peak
5	7236.000	39.84	5.91	45.75	54.00	-8.25	AVG
6	13917.244	32.10	18.97	51.07	74.00	-22.93	peak
7	18000.000	26.55	26.65	53.20	74.00	-20.80	peak


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW =10Hz

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

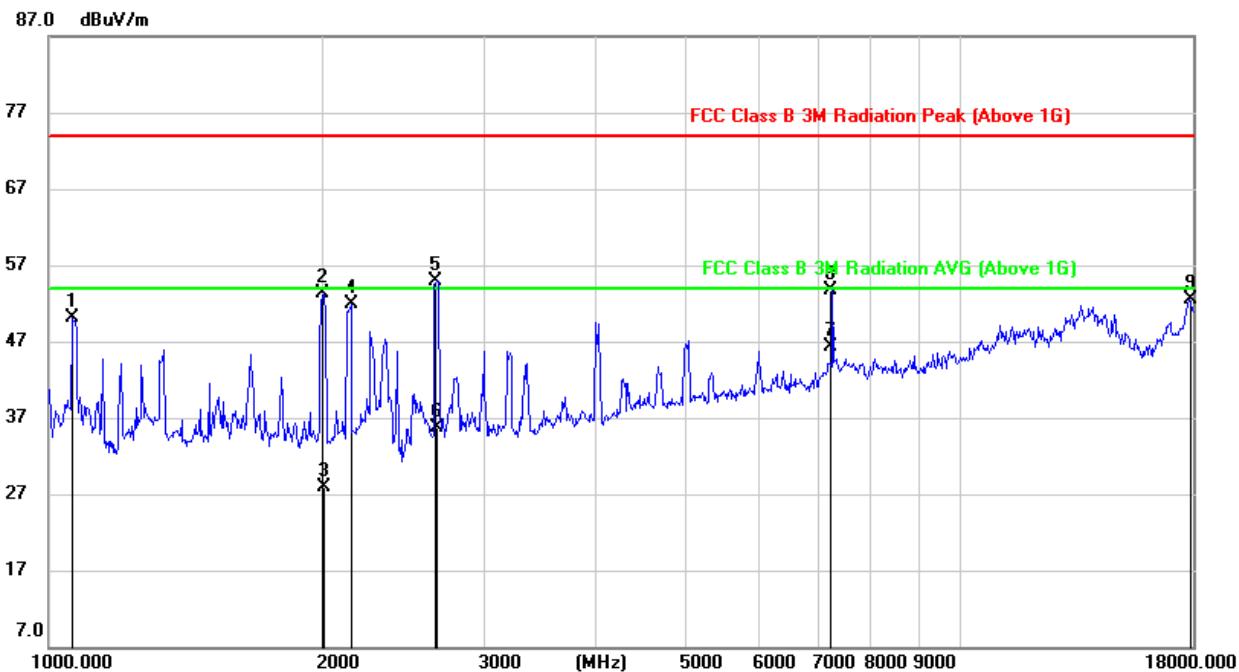

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1062.578	64.42	-14.37	50.05	74.00	-23.95	peak
2	2001.084	64.44	-11.23	53.21	74.00	-20.79	peak
3	2004.780	39.05	-11.20	27.85	54.00	-26.15	AVG
4	2151.034	61.52	-9.63	51.89	74.00	-22.11	peak
5	2664.019	63.42	-8.49	54.93	74.00	-19.07	peak
6	2667.735	44.11	-8.45	35.66	54.00	-18.34	AVG
7	7236.000	40.53	5.87	46.40	74.00	-27.60	peak
8	7236.000	47.88	5.87	53.75	74.00	-20.25	peak
9	17896.247	26.52	25.99	52.51	74.00	-21.49	peak


Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: VBW =10Hz

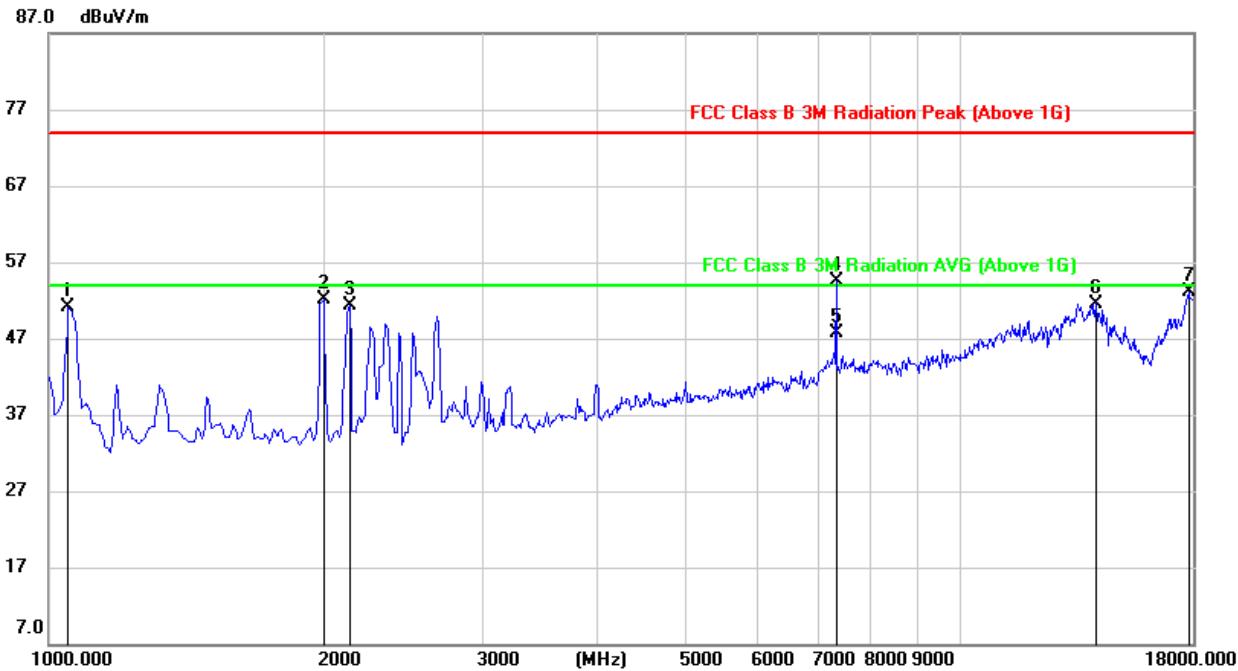

No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	1051.000	65.25	-14.11	51.14	74.00	-22.86	peak
2	2003.000	63.22	-11.21	52.01	74.00	-21.99	peak
3	2139.000	60.95	-9.69	51.26	74.00	-22.74	peak
4	7307.000	48.53	5.91	54.44	74.00	-19.56	peak
5	7311.635	41.79	5.86	47.65	54.00	-6.35	AVG
6	14107.000	32.77	18.83	51.60	74.00	-22.40	peak
7	17796.000	27.23	25.84	53.07	74.00	-20.93	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW =10Hz


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

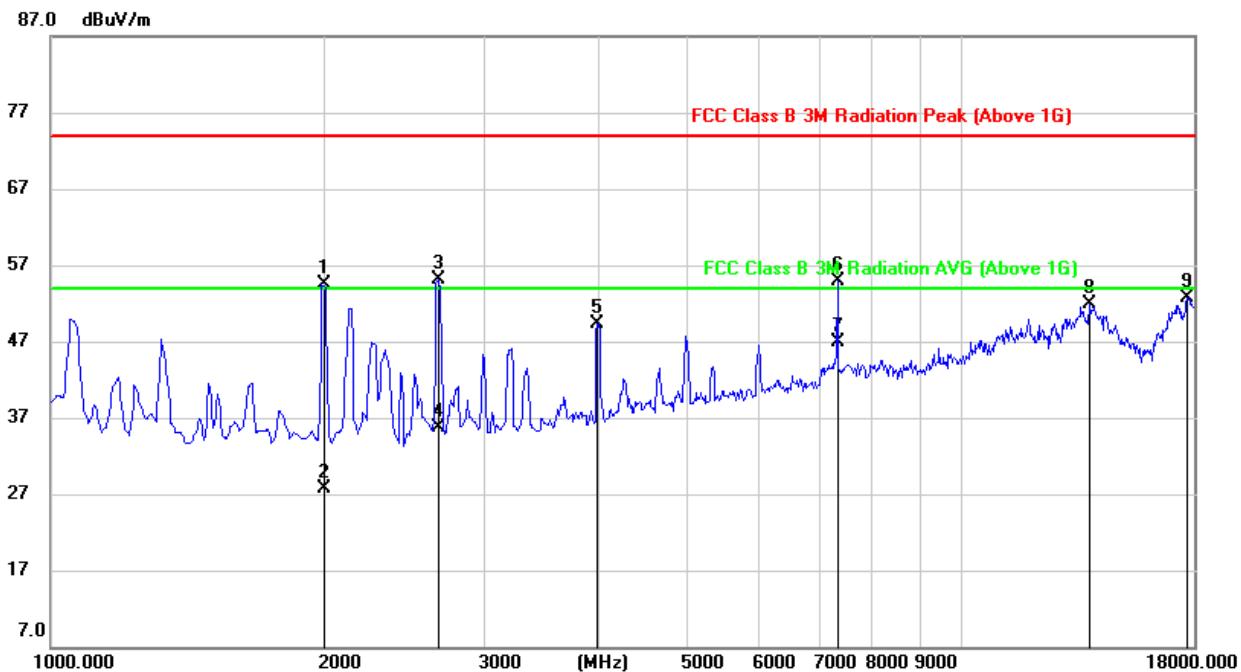

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1999.285	65.65	-11.23	54.42	74.00	-19.58	peak
2	1999.285	38.89	-11.23	27.66	54.00	-26.34	AVG
3	2666.000	63.54	-8.46	55.08	74.00	-18.92	peak
4	2666.480	44.18	-8.46	35.72	54.00	-18.28	AVG
5	3992.000	53.79	-4.42	49.37	74.00	-24.63	peak
6	7307.000	48.98	5.93	54.91	74.00	-19.09	peak
7	7311.675	41.10	5.89	46.99	54.00	-7.01	AVG
8	13801.000	32.43	19.49	51.92	74.00	-22.08	peak
9	17728.000	27.42	25.28	52.70	74.00	-21.30	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: VBW =10Hz


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

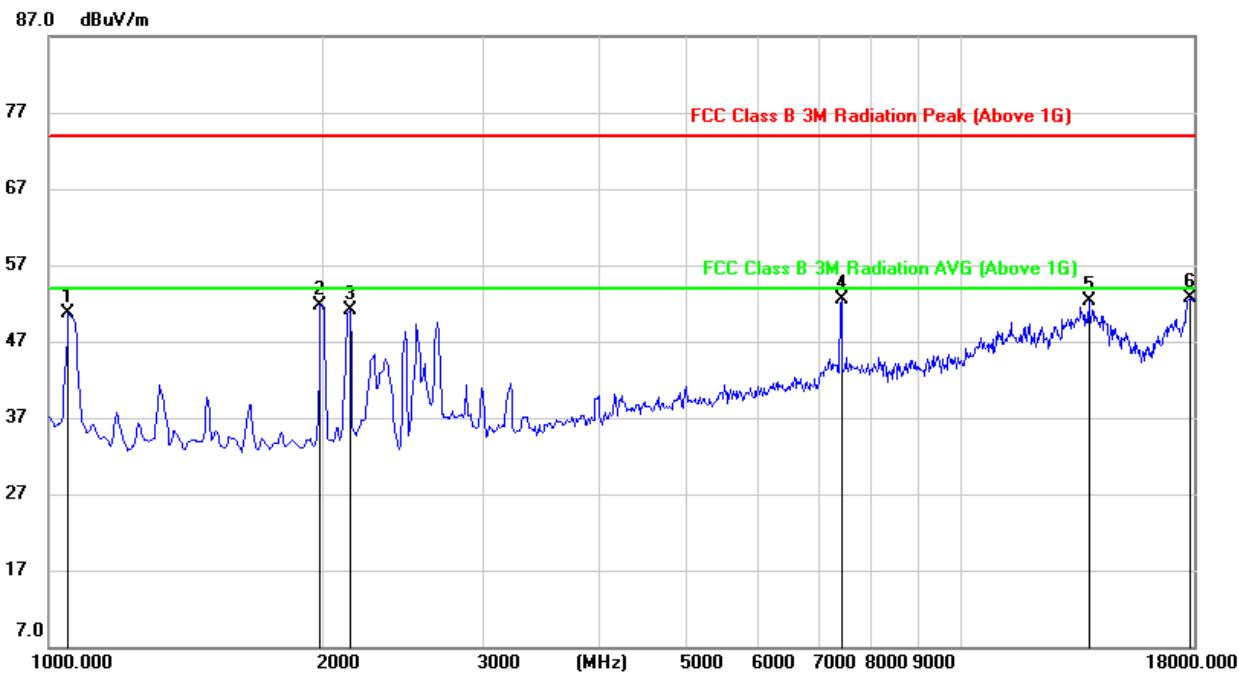

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1051.000	64.78	-14.11	50.67	74.00	-23.33	peak
2	1986.000	63.07	-11.27	51.80	74.00	-22.20	peak
3	2139.000	60.72	-9.69	51.03	74.00	-22.97	peak
4	7392.000	47.28	5.26	52.54	74.00	-21.46	peak
5	13835.000	33.23	19.01	52.24	74.00	-21.76	peak
6	17881.000	26.95	25.82	52.77	74.00	-21.23	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

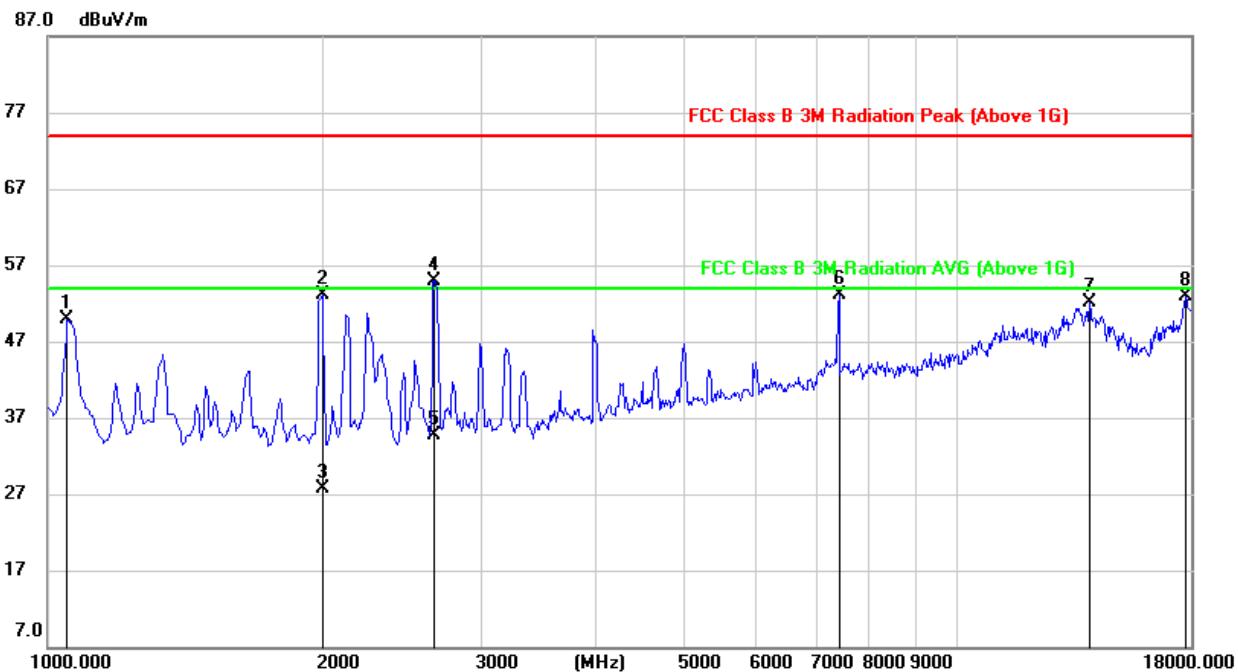


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1051.000	64.33	-14.41	49.92	74.00	-24.08	peak
2	2000.000	64.35	-11.23	53.12	74.00	-20.88	peak
3	2000.000	38.88	-11.23	27.65	54.00	-26.35	AVG
4	2665.210	63.37	-8.48	54.89	74.00	-19.11	peak
5	2665.210	43.25	-8.48	34.77	54.00	-19.23	AVG
6	7392.000	47.80	5.28	53.08	74.00	-20.92	peak
7	13954.000	32.98	19.06	52.04	74.00	-21.96	peak
8	17779.000	26.90	25.99	52.89	74.00	-21.11	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW =10Hz

8.3.2. 802.11g MODE


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

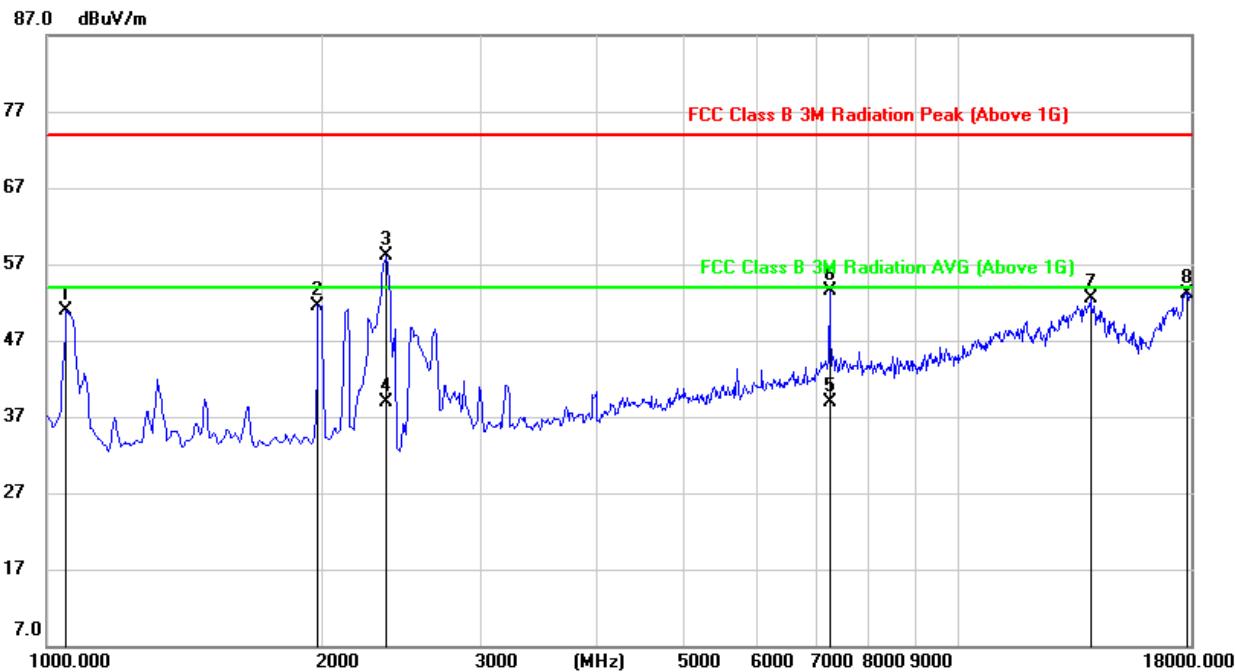

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1051.000	64.92	-14.11	50.81	74.00	-23.19	peak
2	1986.000	62.79	-11.27	51.52	74.00	-22.48	peak
3	2360.000	66.88	-8.72	58.16	74.00	-15.84	peak
4	2360.000	47.70	-8.72	38.98	54.00	-15.02	AVG
5	7234.100	32.94	5.90	38.84	54.00	-15.16	AVG
6	7239.000	47.66	5.91	53.57	74.00	-20.43	peak
7	13971.000	33.58	18.93	52.51	74.00	-21.49	peak
8	17830.000	27.26	25.93	53.19	74.00	-20.81	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton=500Hz where: ton is transmit duration.
5. For more information about transmit duration, please refer to clause 7.1.


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

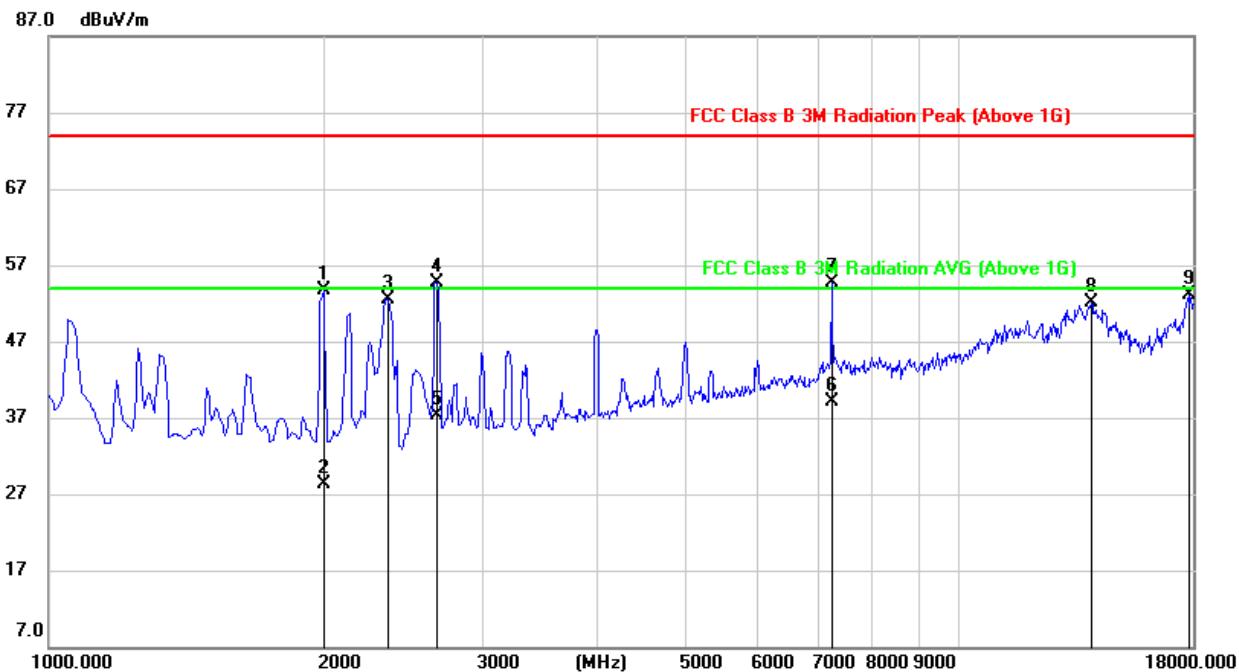

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2000.562	64.88	-11.23	53.65	74.00	-20.35	peak
2	2000.588	39.49	-11.23	28.26	54.00	-25.74	AVG
3	2360.000	61.12	-8.62	52.50	74.00	-21.50	peak
4	2666.000	63.18	-8.46	54.72	74.00	-19.28	peak
5	2666.000	45.68	-8.46	37.22	54.00	-16.78	AVG
6	7234.200	33.17	5.86	39.03	54.00	-14.97	AVG
7	7239.000	48.83	5.85	54.68	74.00	-19.32	peak
8	13937.000	32.91	19.10	52.01	74.00	-21.99	peak
9	17813.000	26.93	26.11	53.04	74.00	-20.96	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: VBW=1/Ton=500Hz where: ton is transmit duration.
 5. For more information about transmit duration, please refer to clause 7.1.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

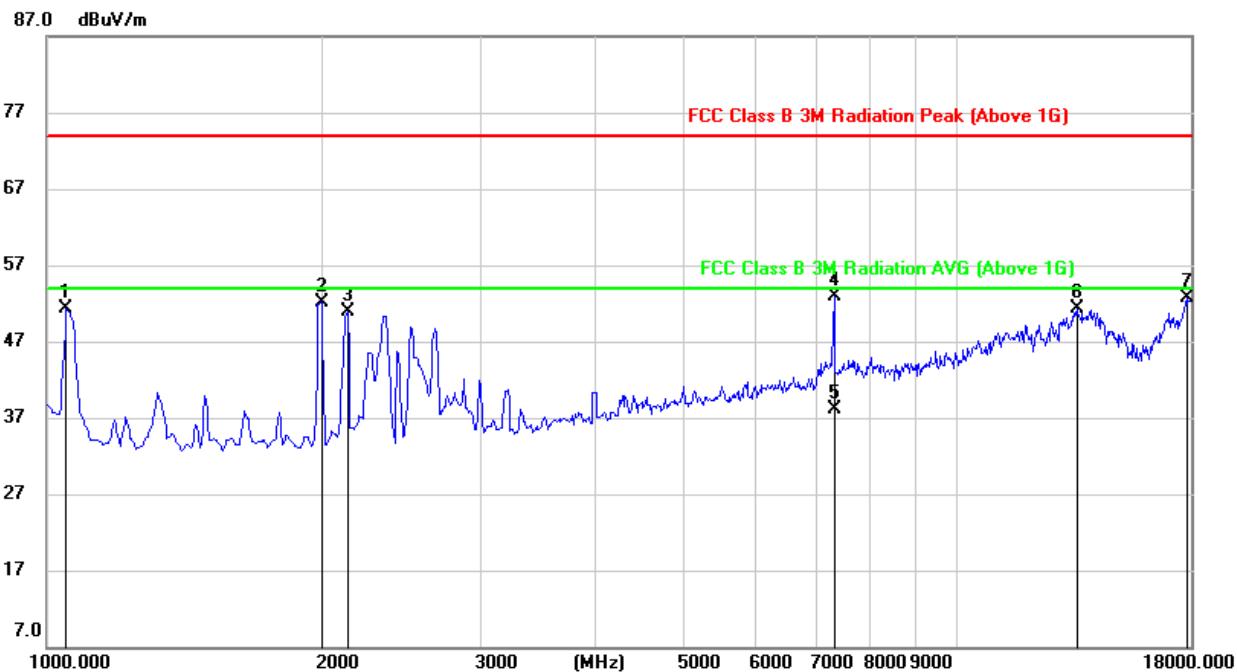


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1051.000	65.36	-14.11	51.25	74.00	-22.75	peak
2	2003.000	63.38	-11.21	52.17	74.00	-21.83	peak
3	2139.000	60.52	-9.69	50.83	74.00	-23.17	peak
4	7307.000	47.03	5.91	52.94	74.00	-21.06	peak
5	7309.200	32.27	5.89	38.16	54.00	-15.84	AVG
6	13495.000	32.71	18.59	51.30	74.00	-22.70	peak
7	17796.000	26.81	25.84	52.65	74.00	-21.35	peak

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton=500Hz$ where: ton is transmit duration.
5. For more information about transmit duration, please refer to clause 7.1.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

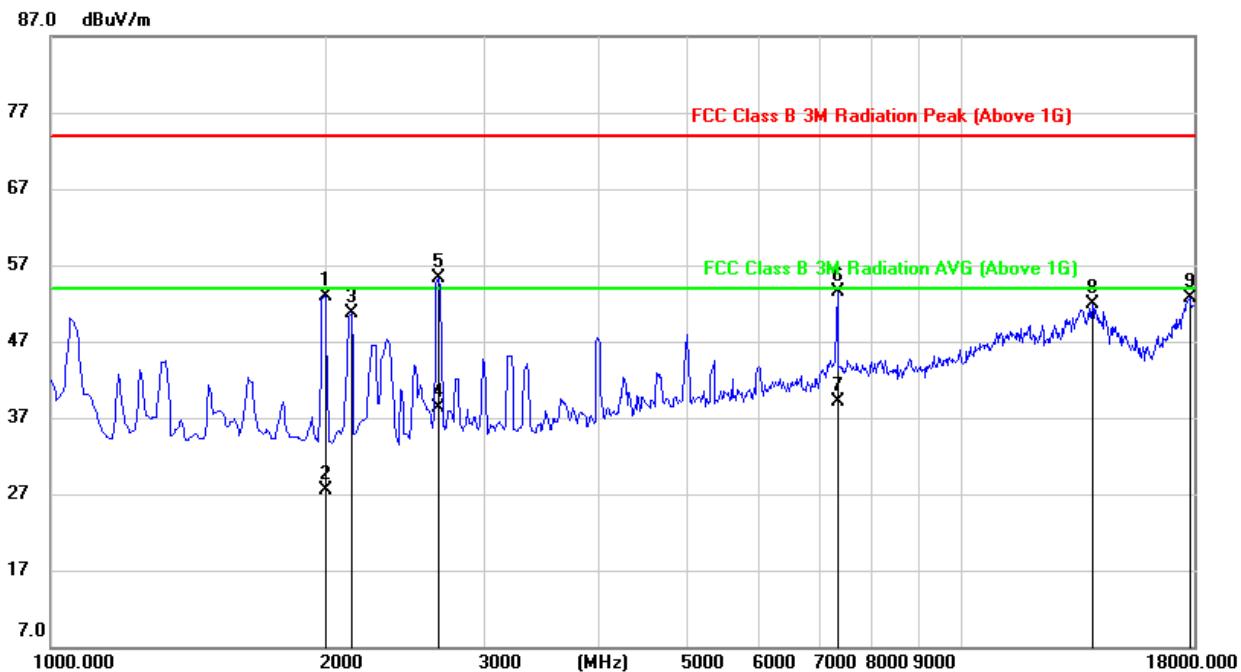

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2000.000	64.14	-11.23	52.91	74.00	-21.09	peak
2	2000.000	38.77	-11.23	27.54	54.00	-26.46	AVG
3	2139.000	60.54	-9.79	50.75	74.00	-23.25	peak
4	2657.369	46.80	-8.55	38.25	54.00	-15.75	AVG
5	2666.000	63.73	-8.46	55.27	74.00	-18.73	peak
6	7310.844	47.57	5.90	53.47	74.00	-20.53	peak
7	7310.846	33.22	5.90	39.12	54.00	-14.88	AVG
8	13954.000	32.77	19.06	51.83	74.00	-22.17	peak
9	17796.000	26.43	26.24	52.67	74.00	-21.33	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/T_{on}=500Hz$ where: ton is transmit duration.
 5. For more information about transmit duration, please refer to clause 7.1.


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

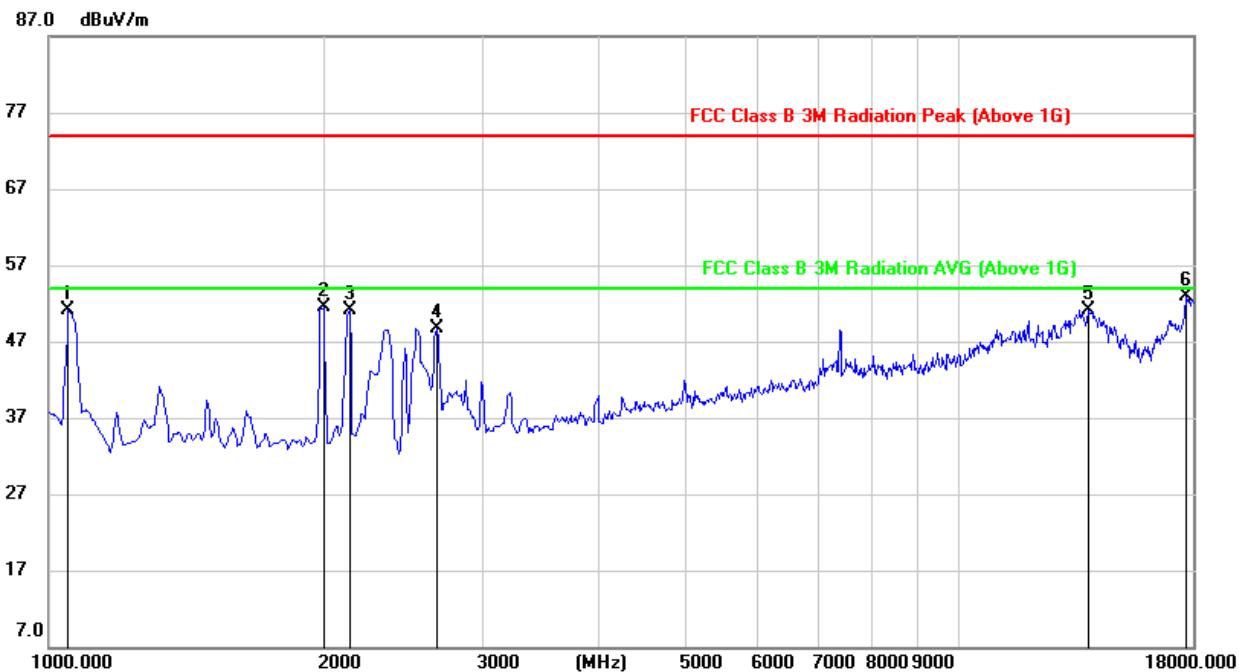

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1051.000	65.21	-14.11	51.10	74.00	-22.90	peak
2	2003.000	62.69	-11.21	51.48	74.00	-22.52	peak
3	2139.000	60.71	-9.69	51.02	74.00	-22.98	peak
4	2666.000	57.18	-8.40	48.78	74.00	-25.22	peak
5	13835.000	32.12	19.01	51.13	74.00	-22.87	peak
6	17711.000	27.87	25.03	52.90	74.00	-21.10	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

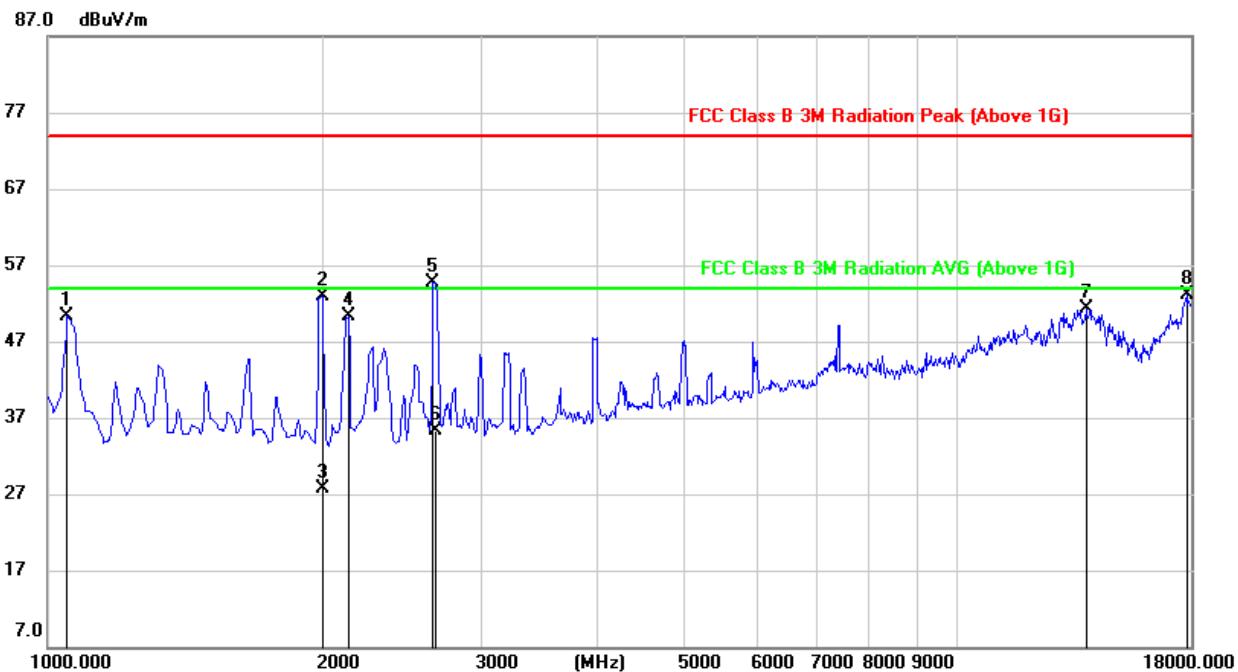


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1051.000	64.79	-14.41	50.38	74.00	-23.62	peak
2	2000.000	64.21	-11.23	52.98	74.00	-21.02	peak
3	2000.000	38.85	-11.23	27.62	54.00	-26.38	AVG
4	2139.000	60.00	-9.79	50.21	74.00	-23.79	peak
5	2649.000	63.34	-8.60	54.74	74.00	-19.26	peak
6	2666.524	43.77	-8.46	35.31	54.00	-18.69	AVG
7	13818.000	32.00	19.40	51.40	74.00	-22.60	peak
8	17796.000	26.84	26.24	53.08	74.00	-20.92	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton=500Hz where: ton is transmit duration.
5. For more information about transmit duration, please refer to clause 7.1.

8.3.3. 802.11n HT20 MODE


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

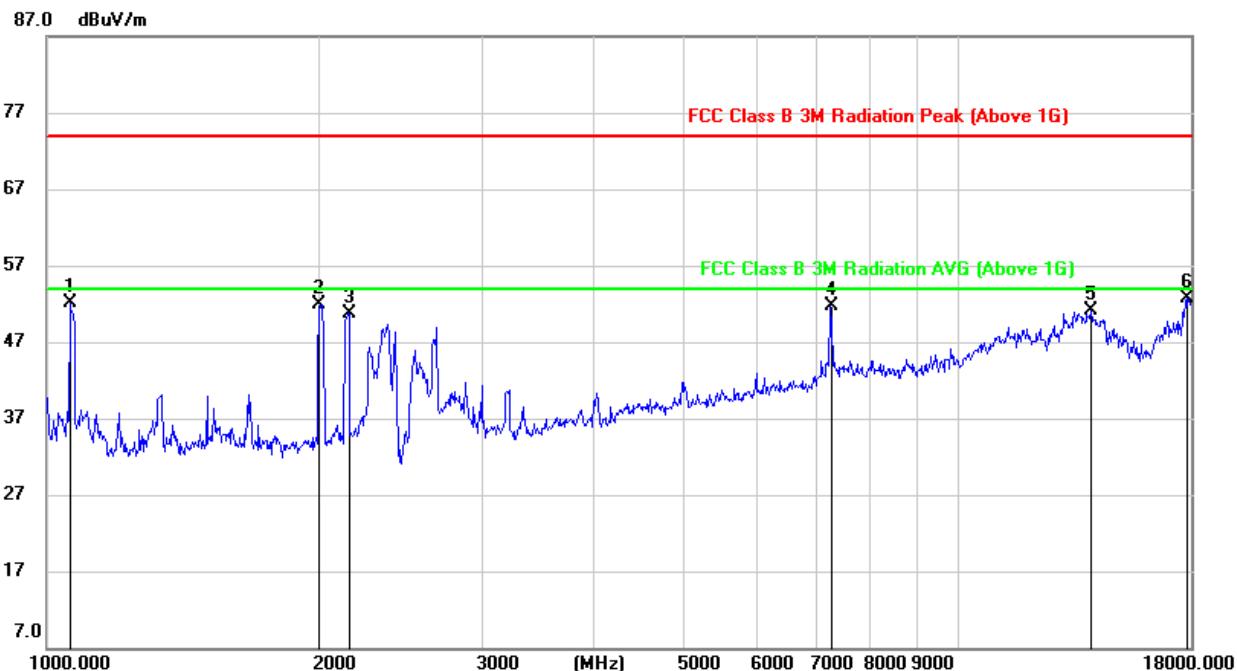

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1062.578	66.13	-14.07	52.06	74.00	-21.94	peak
2	2001.084	63.03	-11.22	51.81	74.00	-22.19	peak
3	2151.034	60.32	-9.53	50.79	74.00	-23.21	peak
4	7263.015	45.80	5.95	51.75	74.00	-22.25	peak
5	13997.929	32.18	18.87	51.05	74.00	-22.95	peak
6	17793.092	26.94	25.79	52.73	74.00	-21.27	peak


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

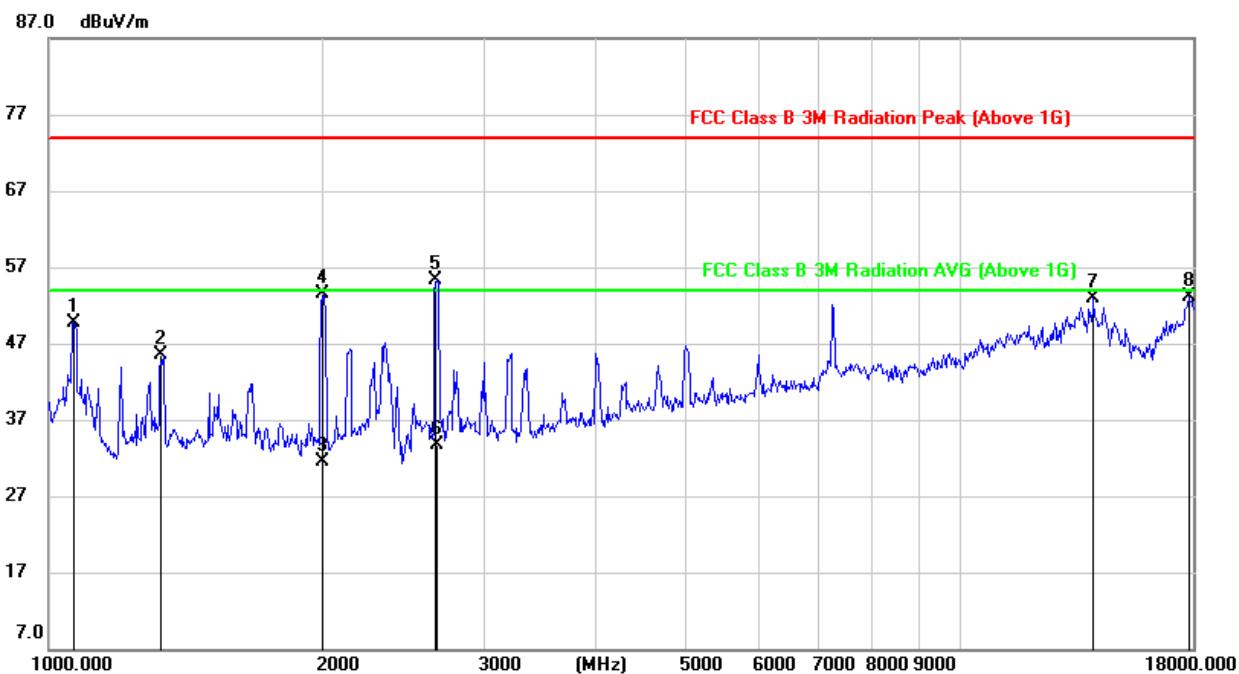

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1065.653	64.12	-14.36	49.76	74.00	-24.24	peak
2	1335.141	58.33	-12.87	45.46	74.00	-28.54	peak
3	1999.935	42.72	-11.23	31.49	54.00	-22.51	AVG
4	2001.084	64.64	-11.23	53.41	74.00	-20.59	peak
5	2664.019	63.72	-8.49	55.23	74.00	-18.77	peak
6	2666.517	42.07	-8.46	33.61	54.00	-20.39	AVG
7	13997.929	33.84	18.97	52.81	74.00	-21.19	peak
8	17793.092	26.84	26.19	53.03	74.00	-20.97	peak


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton=1000Hz$ where: ton is transmit duration.
5. For more information about transmit duration, please refer to clause 7.1.

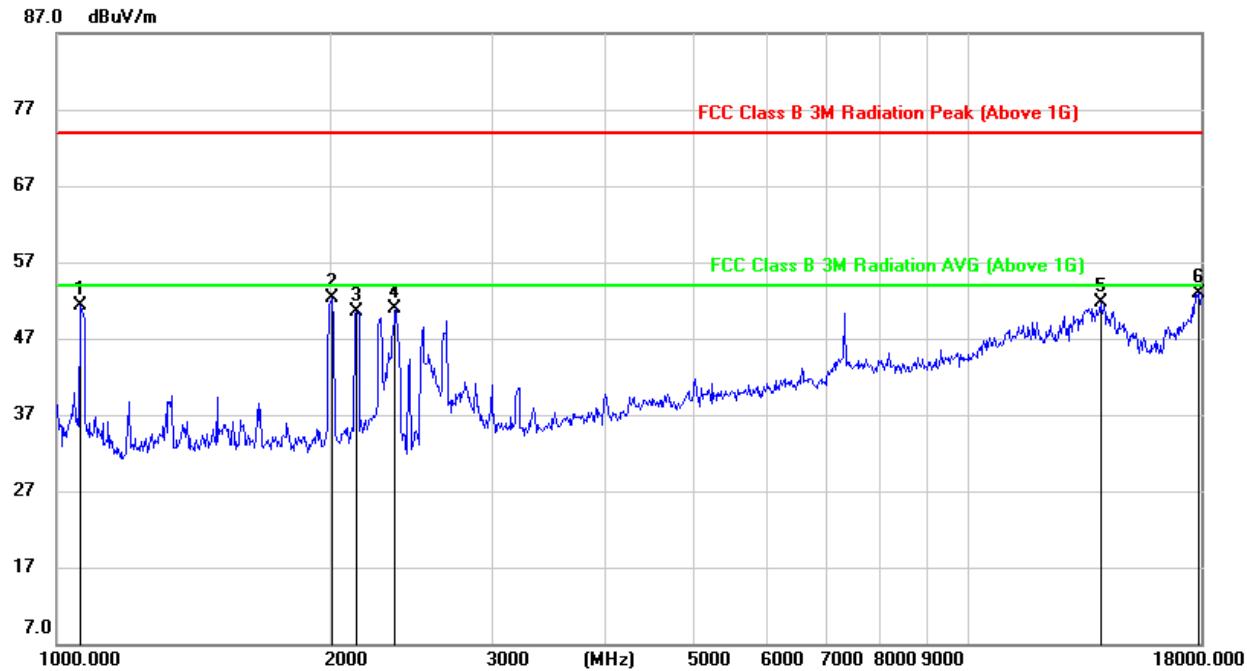

No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	1062.578	65.45	-14.07	51.38	74.00	-22.62	peak
2	2006.877	63.54	-11.18	52.36	74.00	-21.64	peak
3	2138.635	60.23	-9.71	50.52	74.00	-23.48	peak
4	2352.668	59.52	-8.68	50.84	74.00	-23.16	peak
5	13957.529	32.79	18.95	51.74	74.00	-22.26	peak
6	17896.247	27.18	25.75	52.93	74.00	-21.07	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

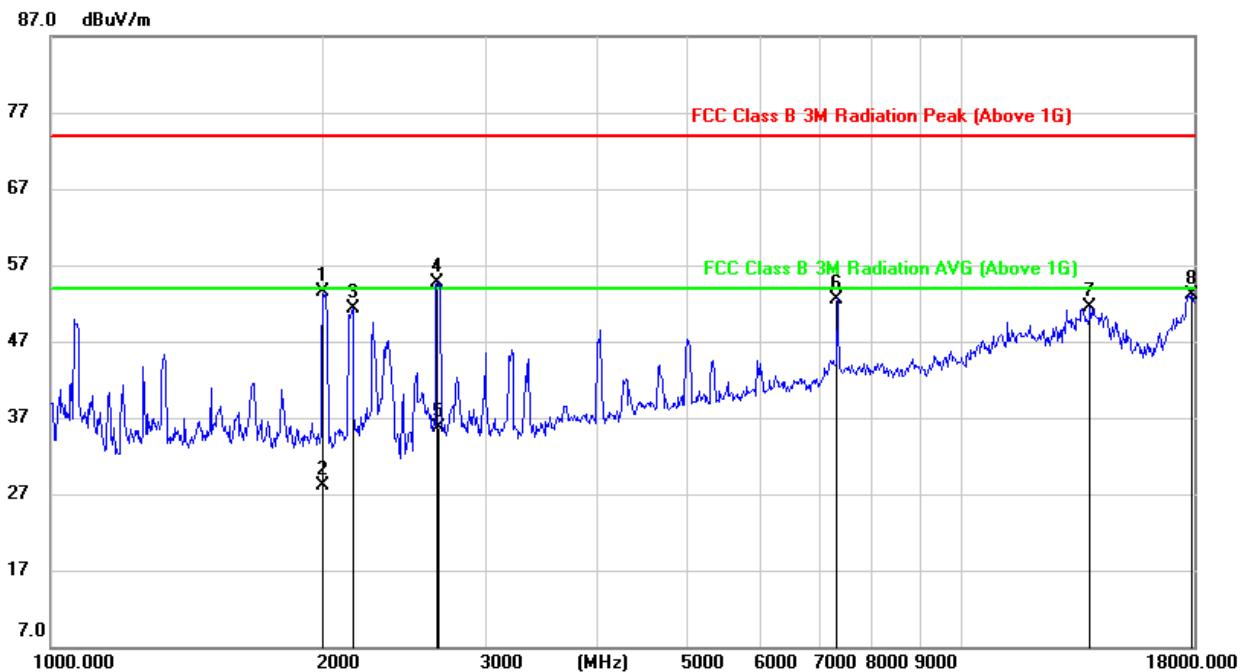

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2000.435	64.64	-11.23	53.41	74.00	-20.59	peak
2	2000.435	39.36	-11.23	28.13	54.00	-25.87	AVG
3	2151.034	60.88	-9.63	51.25	74.00	-22.75	peak
4	2664.019	63.23	-8.49	54.74	74.00	-19.26	peak
5	2666.517	44.10	-8.46	35.64	54.00	-18.36	AVG
6	7305.122	46.67	5.93	52.60	74.00	-21.40	peak
7	13837.024	32.24	19.29	51.53	74.00	-22.47	peak
8	17896.247	27.11	25.99	53.10	74.00	-20.90	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=1000Hz$ where: ton is transmit duration.
 5. For more information about transmit duration, please refer to clause 7.1.


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

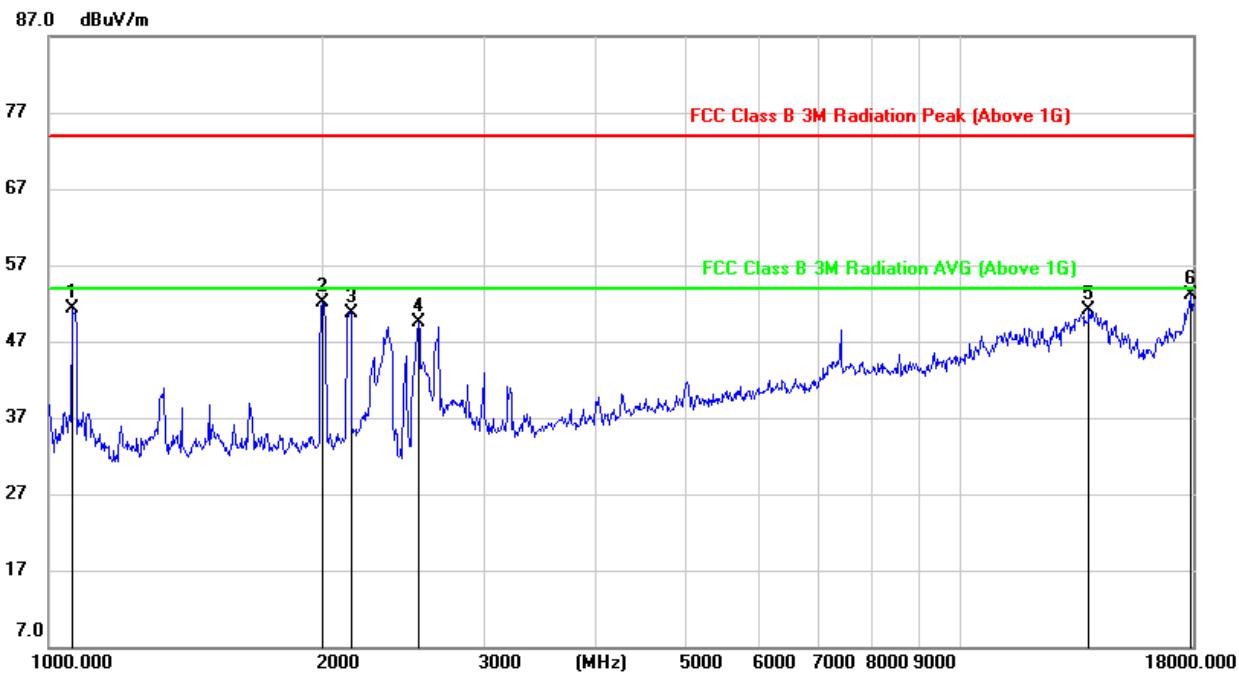

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1062.578	65.42	-14.07	51.35	74.00	-22.65	peak
2	1995.309	63.26	-11.24	52.02	74.00	-21.98	peak
3	2151.034	60.26	-9.53	50.73	74.00	-23.27	peak
4	2543.625	58.63	-9.12	49.51	74.00	-24.49	peak
5	13837.024	32.02	19.01	51.03	74.00	-22.97	peak
6	17896.247	27.31	25.75	53.06	74.00	-20.94	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

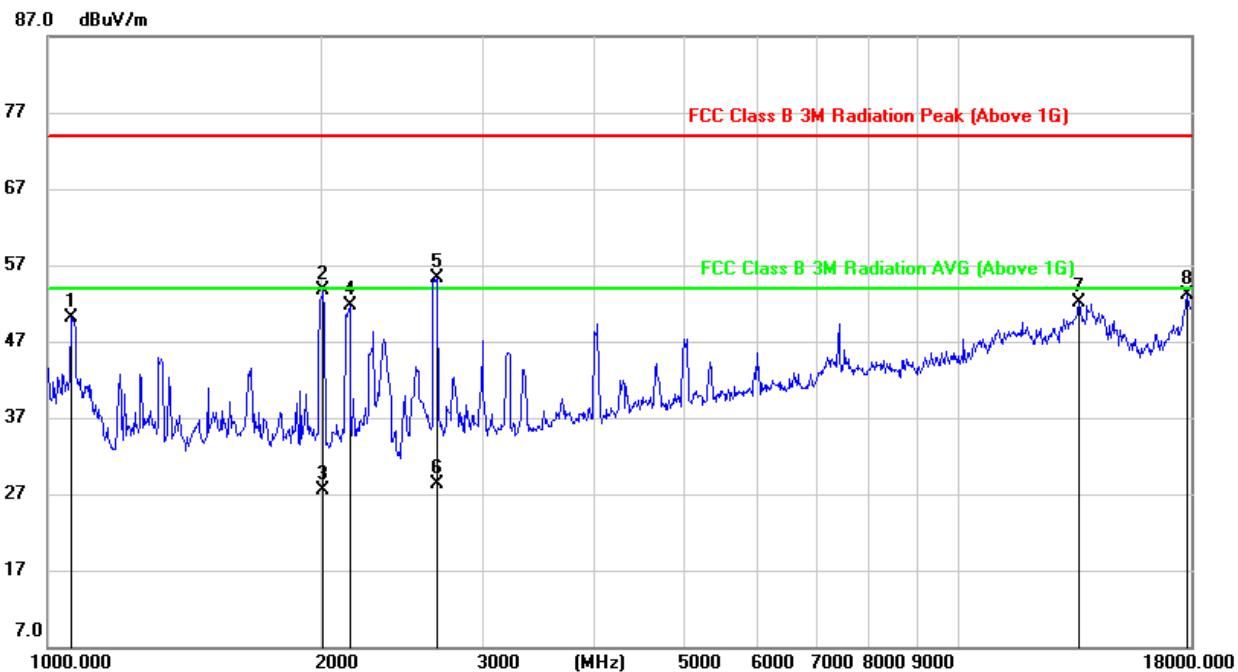

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1062.578	64.44	-14.37	50.07	74.00	-23.93	peak
2	2002.122	64.97	-11.22	53.75	74.00	-20.25	peak
3	2002.122	38.80	-11.22	27.58	54.00	-26.42	AVG
4	2151.034	61.28	-9.63	51.65	74.00	-22.35	peak
5	2671.731	63.67	-8.43	55.24	74.00	-18.76	peak
6	2671.731	36.79	-8.43	28.36	54.00	-25.64	AVG
7	13559.879	32.72	19.29	52.01	74.00	-21.99	peak
8	17793.092	26.89	26.19	53.08	74.00	-20.92	peak


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton=1000Hz$ where: ton is transmit duration.
5. For more information about transmit duration, please refer to clause 7.1.

8.4. SPURIOUS EMISSIONS 18~25GHz

8.4.1. 802.11b MODE


SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

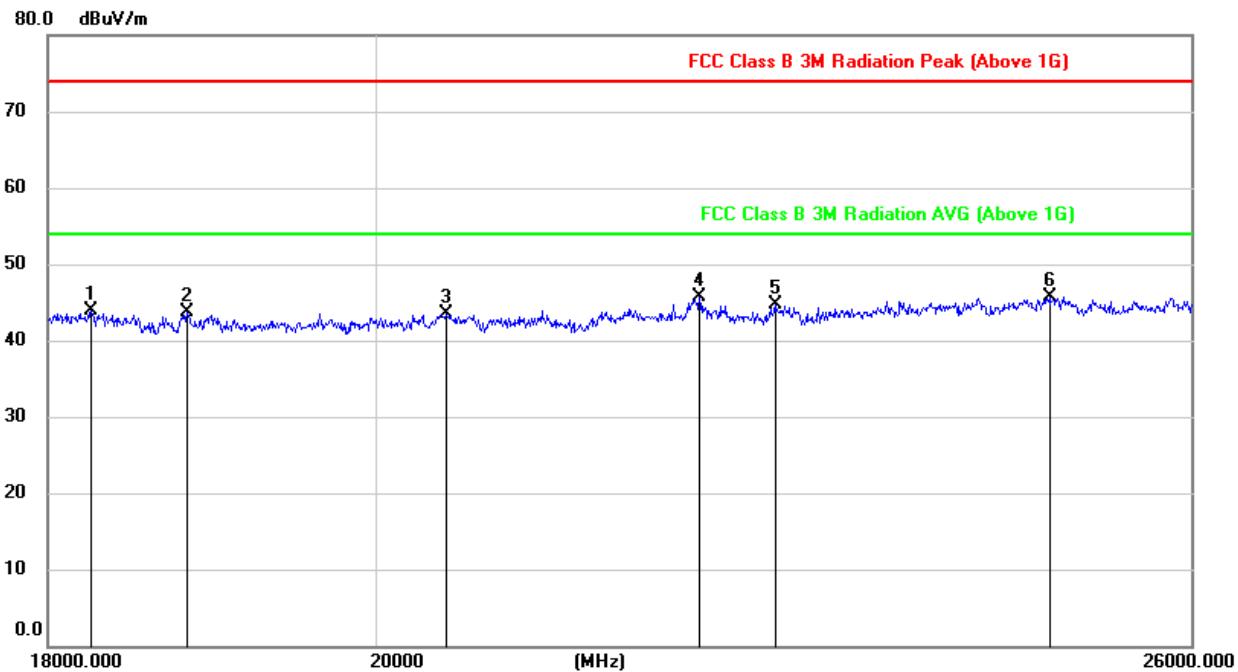

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18253.289	49.50	-5.55	43.95	74.00	-30.05	peak
2	18825.911	49.01	-5.36	43.65	74.00	-30.35	peak
3	20457.304	48.93	-5.39	43.54	74.00	-30.46	peak
4	22197.394	49.99	-4.27	45.72	74.00	-28.28	peak
5	22742.711	48.46	-3.70	44.76	74.00	-29.24	peak
6	24841.078	47.85	-2.24	45.61	74.00	-28.39	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

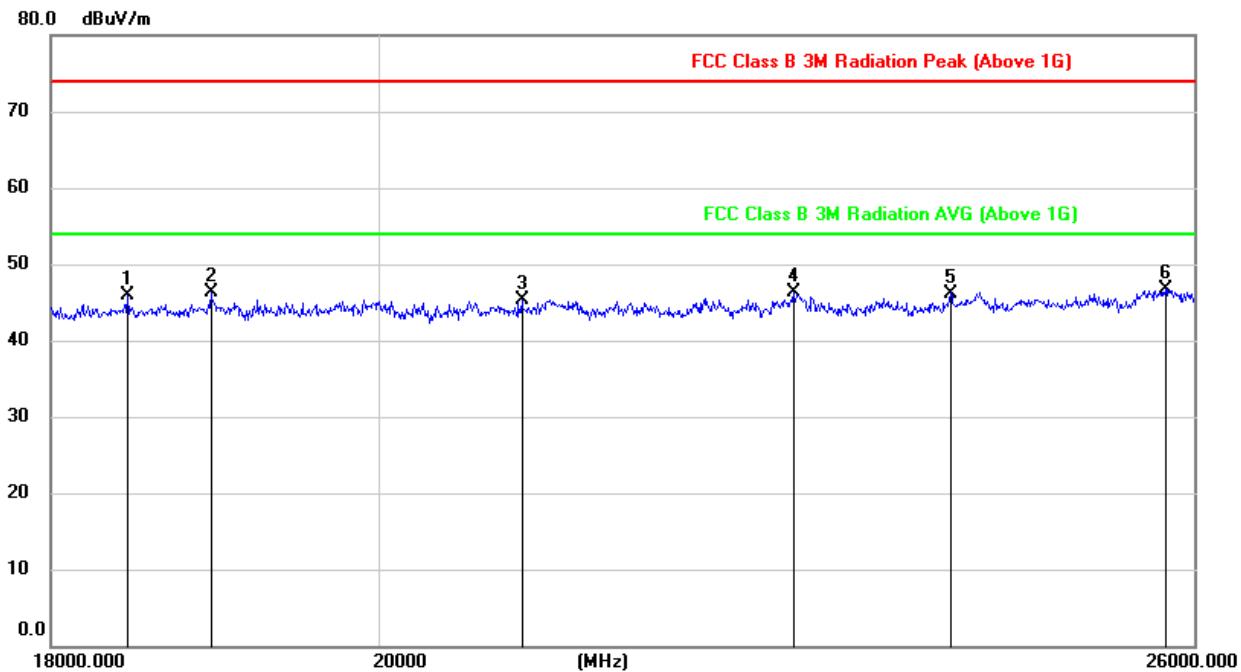


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18448.984	51.27	-5.32	45.95	74.00	-28.05	peak
2	18950.934	51.49	-5.26	46.23	74.00	-27.77	peak
3	20944.464	50.24	-4.93	45.31	74.00	-28.69	peak
4	22860.096	49.90	-3.58	46.32	74.00	-27.68	peak
5	24041.251	48.96	-2.76	46.20	74.00	-27.80	peak
6	25762.074	47.33	-0.64	46.69	74.00	-27.31	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

8.5. SPURIOUS EMISSIONS 30M ~ 1 GHz

8.5.1. 802.11b MODE


SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

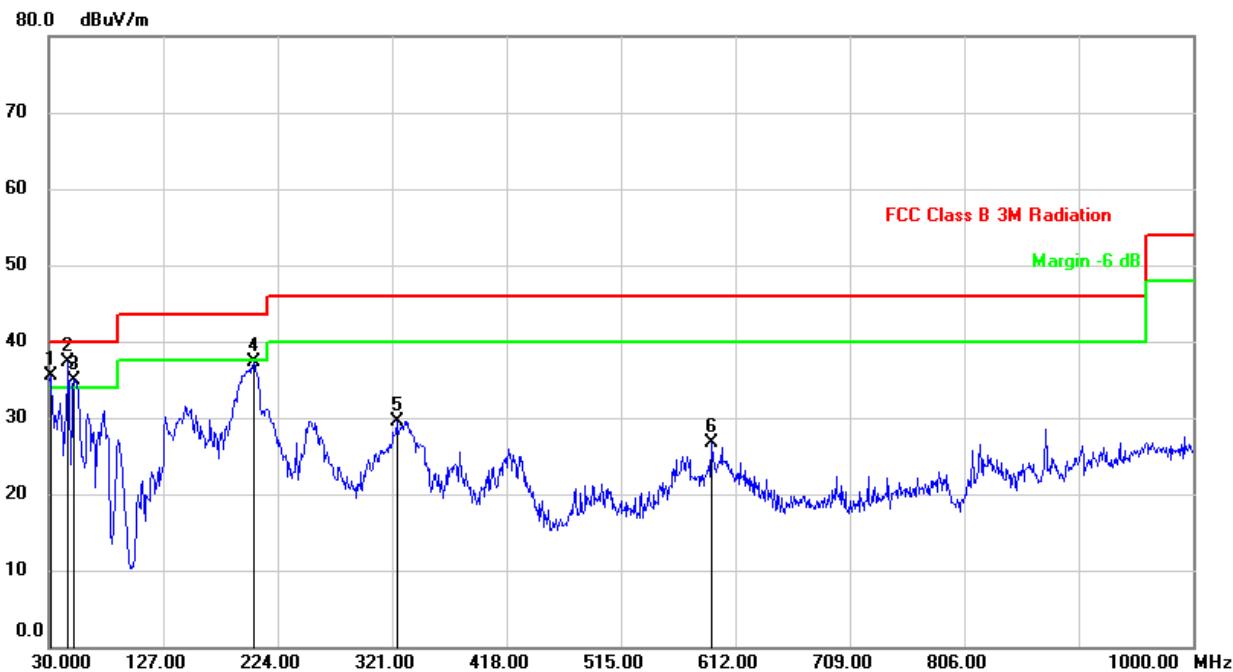

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9400	49.97	-14.53	35.44	40.00	-4.56	QP
2	46.4900	53.33	-16.09	37.24	40.00	-2.76	QP
3	51.3400	51.34	-16.38	34.96	40.00	-5.04	QP
4	203.6300	49.66	-12.43	37.23	43.50	-6.27	QP
5	324.8800	41.55	-12.04	29.51	46.00	-16.49	QP
6	591.6300	33.92	-7.14	26.78	46.00	-19.22	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

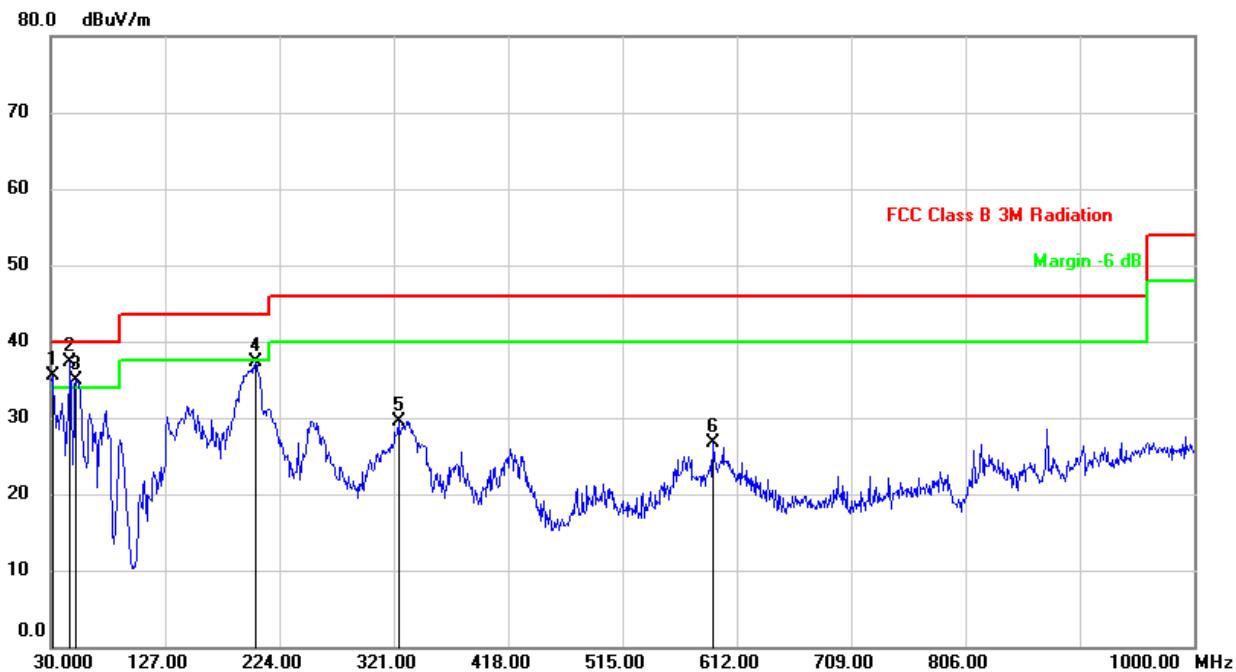


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9400	49.97	-14.53	35.44	40.00	-4.56	QP
2	46.4900	53.33	-16.09	37.24	40.00	-2.76	QP
3	51.3400	51.34	-16.38	34.96	40.00	-5.04	QP
4	203.6300	49.66	-12.43	37.23	43.50	-6.27	QP
5	324.8800	41.55	-12.04	29.51	46.00	-16.49	QP
6	591.6300	33.92	-7.14	26.78	46.00	-19.22	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

8.6. SPURIOUS EMISSIONS BELOW 30M

8.6.1. 802.11b MODE


SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

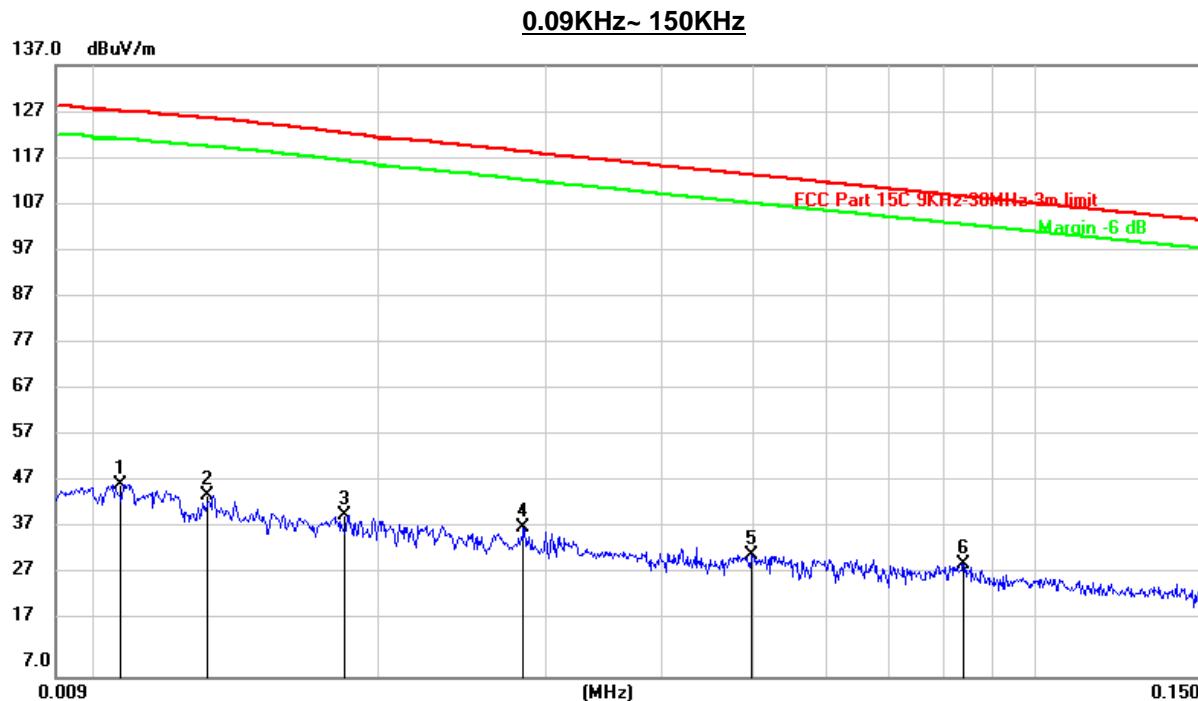

No.	Frequency (KHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0106	27.54	20.22	47.76	127.24	-79.48	peak
2	0.0131	25.29	20.24	45.53	125.73	-80.20	peak
3	0.0183	20.89	20.29	41.18	122.60	-81.42	peak
4	0.0284	18.26	20.31	38.57	118.62	-80.05	peak
5	0.0497	12.51	20.31	32.82	113.68	-80.86	peak
6	0.0840	10.65	20.27	30.92	109.13	-78.21	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

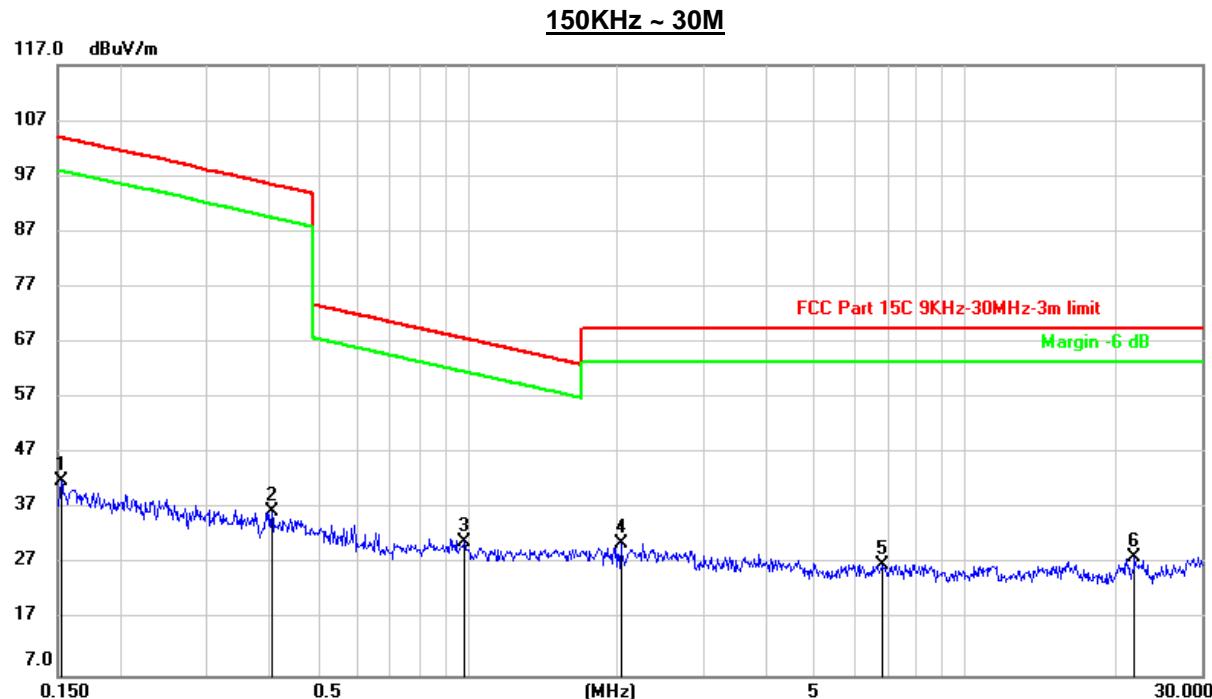


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1524	21.66	20.42	42.08	103.95	-61.87	peak
2	0.4040	16.23	20.27	36.50	95.48	-58.98	peak
3	0.9838	10.76	20.37	31.13	67.75	-36.62	peak
4	2.0333	10.17	20.74	30.91	69.54	-38.63	peak
5	6.8051	6.04	20.91	26.95	69.54	-42.59	peak
6	21.9463	6.98	21.25	28.23	69.54	-41.31	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

0.09KHz~150KHz

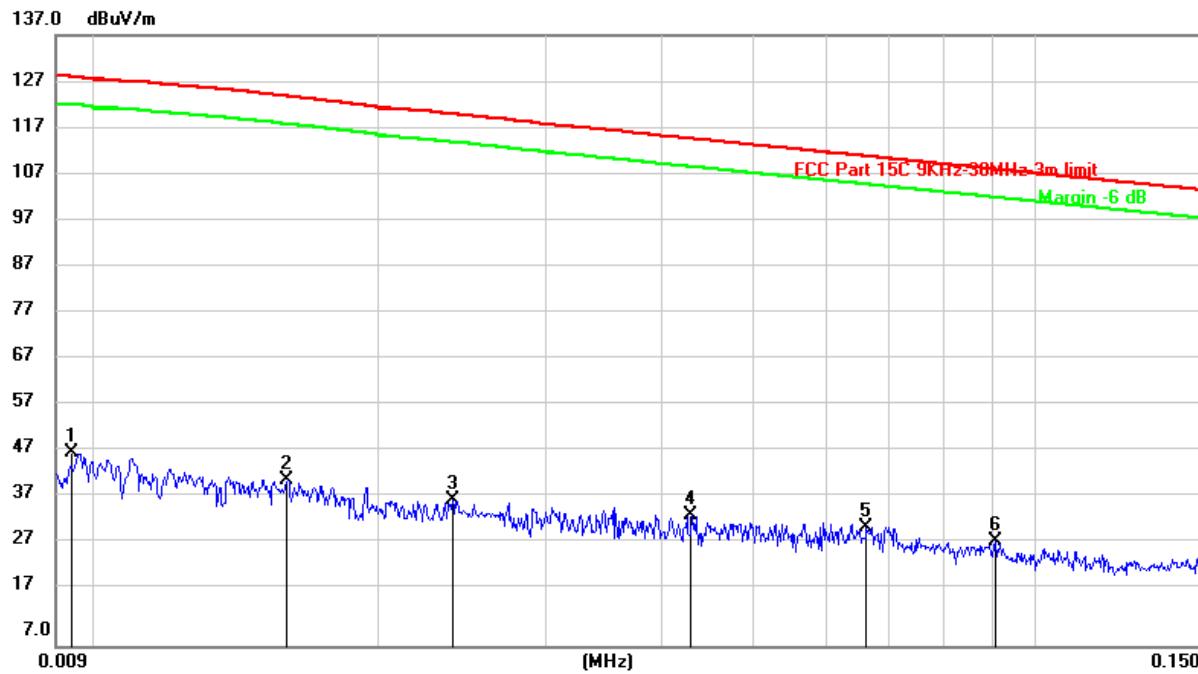


No.	Frequency (KHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0094	27.69	20.26	47.95	128.06	-80.11	peak
2	0.0159	21.99	20.27	42.26	124.05	-81.79	peak
3	0.0239	17.67	20.31	37.98	120.21	-82.23	peak
4	0.0429	14.53	20.31	34.84	115.00	-80.16	peak
5	0.0661	12.01	20.31	32.32	111.22	-78.90	peak
6	0.0908	8.85	20.26	29.11	108.45	-79.34	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

150KHz ~ 30M

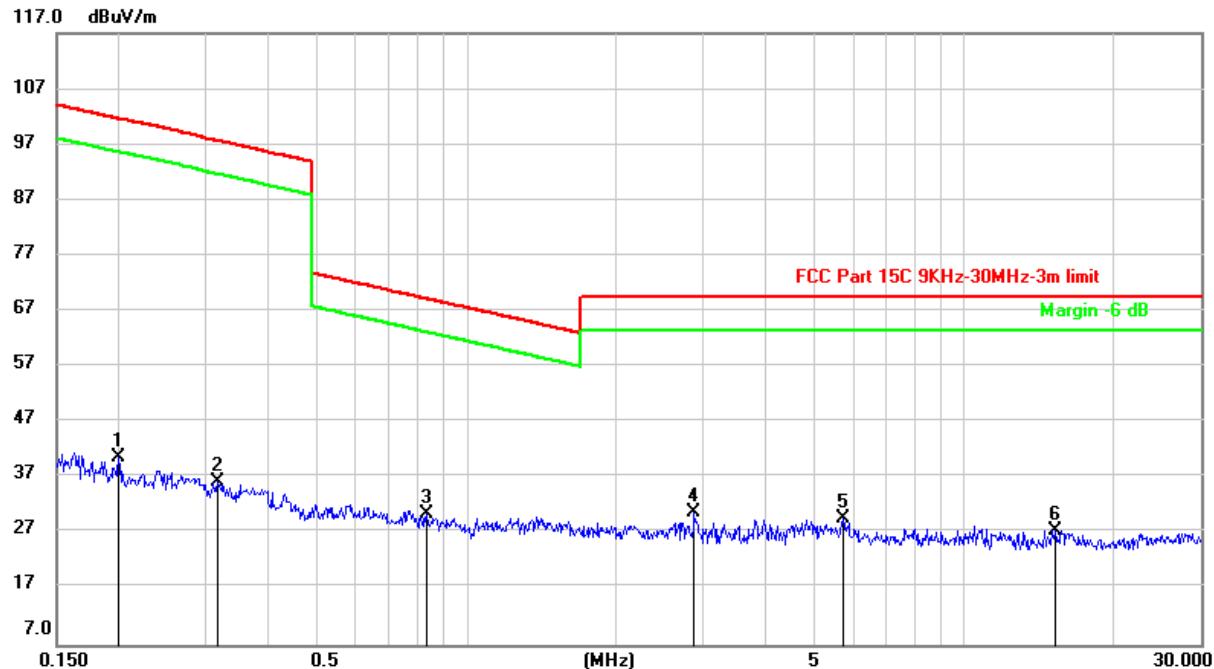

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1995	20.35	20.37	40.72	101.60	-60.88	peak
2	0.3149	15.89	20.30	36.19	97.69	-61.50	peak
3	0.8305	10.04	20.36	30.40	69.23	-38.83	peak
4	2.8692	9.82	20.88	30.70	69.54	-38.84	peak
5	5.7134	8.83	20.85	29.68	69.54	-39.86	peak
6	15.3070	6.55	20.94	27.49	69.54	-42.05	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.


9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

TEST SETUP AND PROCEDURE

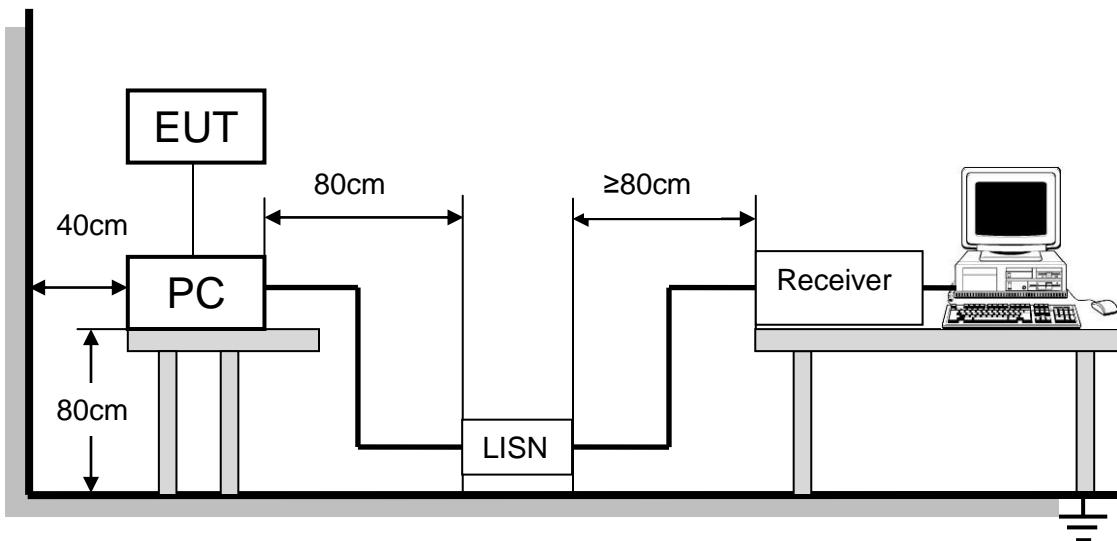

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10 -2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST RESULTS

TEST RESULTS

9.1.1. 802.11b MODE


LINE N RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

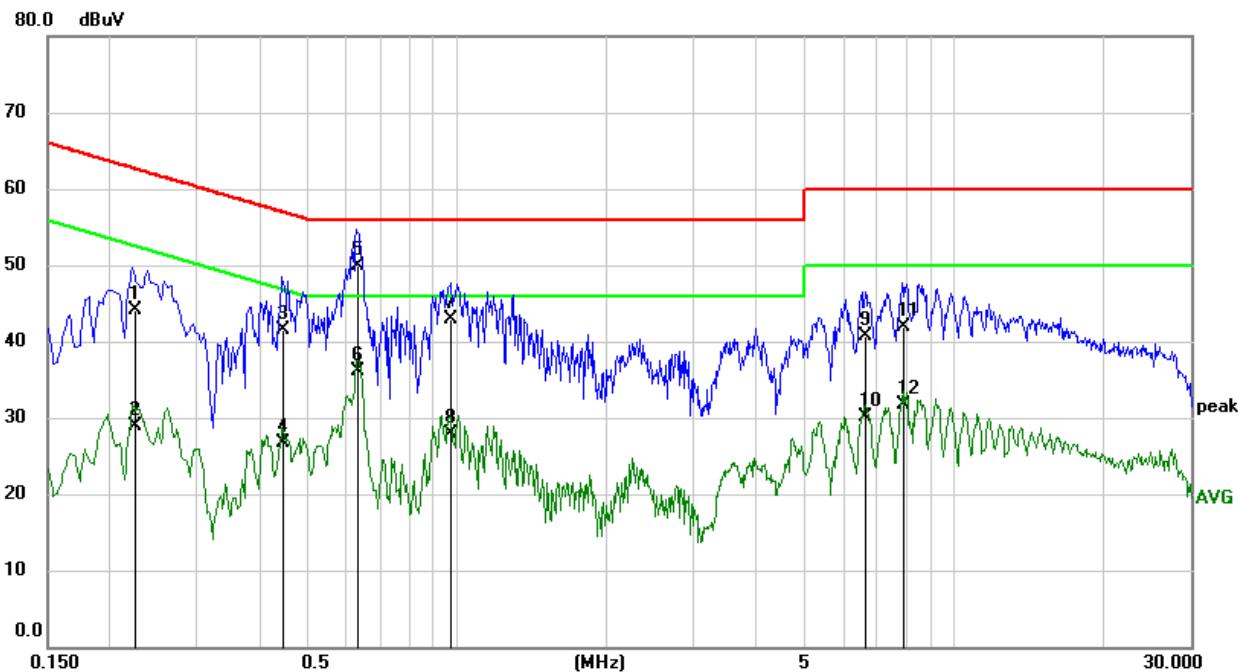

No.	Frequency (MHz)	Reading (dBuV)	Correct dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2254	34.40	9.65	44.05	62.62	-18.57	QP
2	0.2254	19.22	9.65	28.87	52.62	-23.75	AVG
3	0.4478	31.91	9.65	41.56	56.92	-15.36	QP
4	0.4478	17.07	9.65	26.72	46.92	-20.20	AVG
5	0.6322	40.21	9.66	49.87	56.00	-6.13	QP
6	0.6322	26.42	9.66	36.08	46.00	-9.92	AVG
7	0.9730	33.15	9.66	42.81	56.00	-13.19	QP
8	0.9730	18.19	9.66	27.85	46.00	-18.15	AVG
9	6.6396	31.06	9.74	40.80	60.00	-19.20	QP
10	6.6396	20.44	9.74	30.18	50.00	-19.82	AVG
11	7.8991	32.17	9.76	41.93	60.00	-18.07	QP
12	7.8991	22.04	9.76	31.80	50.00	-18.20	AVG

Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

LINE L RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

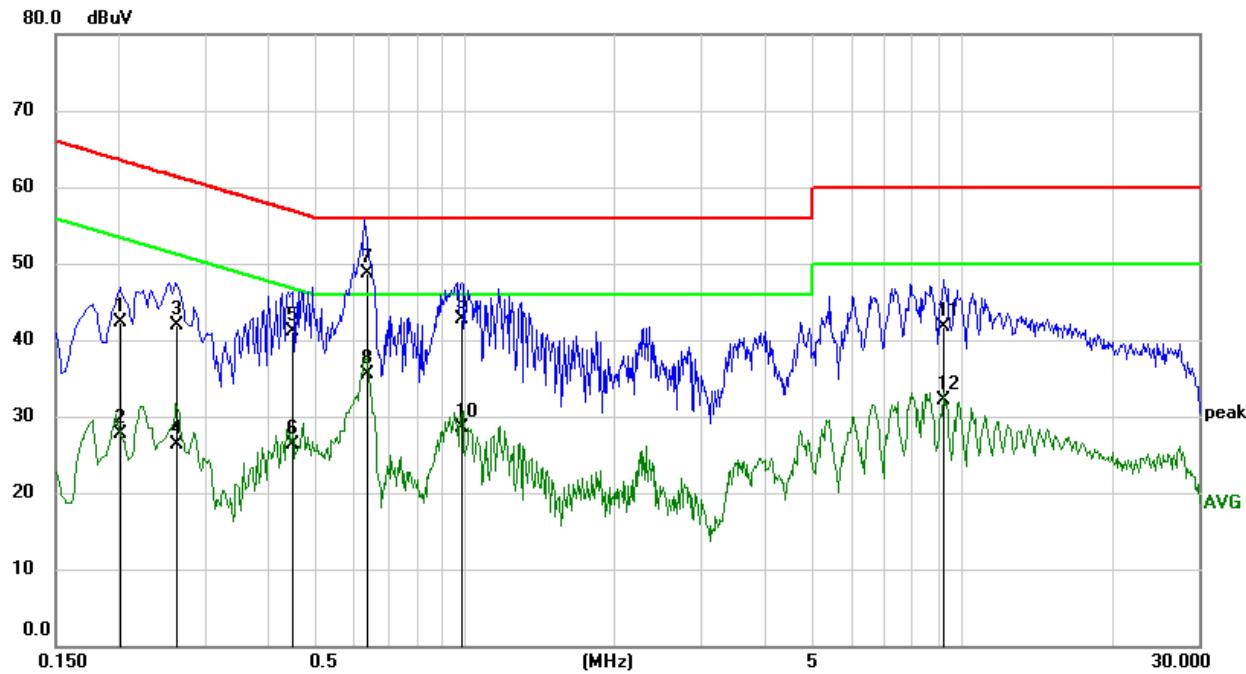

No.	Frequency (MHz)	Reading (dBuV)	Correct dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2034	32.72	9.64	42.36	63.47	-21.11	QP
2	0.2034	18.03	9.64	27.67	53.47	-25.80	AVG
3	0.2636	32.19	9.64	41.83	61.32	-19.49	QP
4	0.2636	16.67	9.64	26.31	51.32	-25.01	AVG
5	0.4494	31.52	9.65	41.17	56.89	-15.72	QP
6	0.4494	16.64	9.65	26.29	46.89	-20.60	AVG
7	0.6355	39.08	9.66	48.74	56.00	-7.26	QP
8	0.6355	25.89	9.66	35.55	46.00	-10.45	AVG
9	0.9878	33.12	9.67	42.79	56.00	-13.21	QP
10	0.9878	18.92	9.67	28.59	46.00	-17.41	AVG
11	9.2053	31.86	9.77	41.63	60.00	-18.37	QP
12	9.2053	22.27	9.77	32.04	50.00	-17.96	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA CONNECTOR

EUT has an external antenna with a non-standard antenna connector.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi.

END OF REPORT

Page 95 of 95