

## Shenzhen Huatongwei International Inspection Co., Ltd.

1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road,Tianliao,Gongming,Shenzhen,China Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn



# **TEST REPORT**

**Report Reference No.....: TRE1706007201** R/C.....: 72977

FCC ID.....: 2AJE3TM116

Applicant's name .....: Tmax Digital, Inc.

Manufacturer...... Shenzhen Alldocube Technology and Science Co.,Ltd

Address..... Building No.1,Suwang Industrial Park,Xiahenglang Dalang,

Longhua District, Shenzhen, China

Test item description .....: Tablet PC

Trade Mark ...... NUVISION

Model/Type reference...... TM116W725L

Listed Model(s) ...... 17-TC

Standard .....: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of receipt of test sample.......... Jun. 09, 2017

Date of testing...... Jun. 10, 2017 - Jul. 10, 2017

Date of issue...... Jul. 11, 2017

Result..... PASS

Compiled by

( position+printedname+signature)...: File administrators Becky Liang

Supervised by

(position+printedname+signature)....: Project Engineer Jeff Sun

Approved by

(position+printedname+signature)....: RF Manager Hans Hu

Testing Laboratory Name .....: Shenzhen Huatongwei International Inspection Co., Ltd.

Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Report No.: TRE1706007201 Page 2 of 43 Issued: 2017-07-11

# **Contents**

<u>1.</u>	TEST STANDARDS AND REPORT VERSION	3
1.1.	Test standards	3
1.1. 1.2.		3
1.2.	Report version	3
<u>2.</u>	TEST DESCRIPTION	4
<u>3.</u>	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	TEST ENVIRONMENT	7
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Equipments Used during the Test	8
4.4.	Environmental conditions	9
4.5.	Statement of the measurement uncertainty	9
<u>5.</u>	TEST CONDITIONS AND RESULTS	10
5.1.	Antenna requirement	10
5.2.	Conducted Emissions (AC Main)	11
5.3.	Conducted Peak Output Power	14
5.4.	Power Spectral Density	15
5.5.	6dB bandwidthand	19
5.6.	Restricted band	23
5.7.	Band edge and Spurious Emission (conducted)	27
5.8.	Spurious Emissions (radiated)	31
<u>6.</u>	TEST SETUP PHOTOS OF THE EUT	37
7.	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	39
_		

Report No.: TRE1706007201 Page 3 of 43 Issued: 2017-07-11

# 1. Test standards and Report version

## 1.1. Test standards

The tests were performed according to following standards: FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

<u>KDB558074 D01 DTS Meas Guidance v04:</u>Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under §15.247

## 1.2. Report version

Version No.	Date of issue	Description
00	Jul. 11, 2017	Original

Report No.: TRE1706007201 Page 4 of 43 Issued: 2017-07-11

# 2. Test Description

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
Line Conducted Emissions (AC Main)	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Power Spectral Density	15.247 (e)	Pass
6dB Bandwidth	15.247 (a)(2)	Pass
Restricted band	15.247(d)/15.205	Pass
Spurious Emissions	15.247(d)/15.209	Pass

Note: The measurement uncertainty is not included in the test result.

Report No.: TRE1706007201 Page 5 of 43 Issued: 2017-07-11

# 3. <u>Summary</u>

# 3.1. Client Information

Applicant:	Tmax Digital, Inc.
Address:	4401 Eucalyptus Ave., #120 ,Chino, CA 91710 ,USA
Manufacturer:	Shenzhen Alldocube Technology and Science Co.,Ltd
Address:	Building No.1,Suwang Industrial Park,Xiahenglang Dalang,Longhua District, Shenzhen,China

# 3.2. Product Description

				1	
Name of EUT:	Tablet PC				
Trade Mark:	NUVISION	NUVISION			
Model No.:	TM116W725L				
Listed Model(s):	I7-TC				
Power supply:	DC 5V from inte	rnal battery			
Adapter information:	Model: JHD-AP015U-050250BU1-C Input: 100-240Va.c., 50/60Hz, 0.45A Output: 5Vd.c., 2500mA				
Hardware version:	CHT-P04				
Software version:	-				
WIFI					
Supported type:	⊠802.11b	⊠802.11g	⊠802.11n(HT20)		
Modulation:	DSSS for 802.17 OFDM for 802.1	1b 1g/802.11n(HT20)			
Operation frequency:	2412MHz~2462MHz for 802.11b/802.11g/802.11n(HT20)				
Channel number:	11 for 802.11b/802.11g/802.11n(HT20)				
Channel separation:	5MHz				
Antenna type:	Integral antenna				
Antenna gain:	1.60 dBi				

Report No.: TRE1706007201 Page 6 of 43 Issued: 2017-07-11

## 3.3. Operation state

## > Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

802.11b/g/n(HT20)		
Channel	Frequency (MHz)	
01	2412	
02	2417	
03	2422	
04	2427	
05	2432	
06	2437	
07	2442	
08	2447	
09	2452	
10	2457	
11	2462	

### Test mode

#### For RF test items

The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%).

For AC power line conducted emissions:

The EUT was set to connect with the WLAN AP under large package sizes transmission.

For RF test axis

EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

## 3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

supplied by the manufacturer

supplied by the lab

	Manufacturer:	/
	Model No.:	/
	Manufacturer:	/
	Model No.:	/

## 3.5. Modifications

No modifications were implemented to meet testing criteria.

Report No.: TRE1706007201 Page 7 of 43 Issued: 2017-07-11

## 4. Test Environment

## 4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.
Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China Phone: 86-755-26748019 Fax: 86-755-26748089

## 4.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478.

IC-Registration No.: 5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B-1.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

# 4.3. Equipments Used during the Test

Line C	Line Conducted Emission (AC Main)				
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	R&S	ESCI	101247	2016/11/13
2	Artificial Mains	Shwarzbeck	NNLK 8121	573	2016/11/13
3	Pulse Limiter	R&S	ESH3-Z2	101488	2016/11/13
4	Test Software	R&S	ES-K1	N/A	N/A
5	Test cable	ENVIROFLEX	3651	1101902	2016/11/13

	Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission				
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2016/11/13
2	Power Meter	Anritsu	ML2480B	100798	2016/11/13
3	Power Sensor	Anritsu	MA2411B	100258	2016/11/13
4	Test cable	FARPU	MCX-J	N/A	2016/11/13
5	Temporary antenna connector	D-LENP	NJ-SMAK	N/A	2016/11/13

NOTE: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radia	Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	
1	EMI Test Receiver	Rohde&Schwarz	ESI 26	100009	2016/11/13	
2	RF Test Panel	Rohde&Schwarz	TS / RSP	335015/ 0017	N/A	
3	EMI Test Software	Rohde&Schwarz	ESK1	N/A	N/A	
4	Loop Antenna	Rohde&Schwarz	HZ-9	838622\013	2016/11/13	
5	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2016/11/13	
6	Horn Antenna	ShwarzBeck	9120D	1011	2016/11/13	
7	Broadband Horn Antenna	Shwarzbeck	BBHA9170	BBHA917047 2	2016/11/13	
8	Preamplifier	Shwarzbeck	BBV9742	9742-196	2016/11/13	
9	Broadband Preamplifer	Shwarzbeck	BBV 9721	9721-102	2016/11/13	
10	Broadband Preamplifer	Shwarzbeck	BBV 9718	9718-247	2016/11/13	
11	Turn Table	MATURO	TT2.0	/	N/A	
12	Antenna Mast	MATURO	TAM-4.0-P	/	N/A	
13	EMI Test Software	Audix	E3	N/A	N/A	
14	Test Software	R&S	ES-K1	N/A	N/A	
15	Test cable	Siva Cables Italy	RG 58A/U	W14.02	2016/11/13	

The Cal. Interval was one year.

Report No.: TRE1706007201 Page 9 of 43 Issued: 2017-07-11

#### 4.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
lative Humidity:	30~60 %
Air Pressure:	950~1050mba

## 4.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system according to ISO/IEC 17025. Further more, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei is reported:

Test Items	MeasurementUncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emissions 9KHz-40 GHz	2.20 dB	(1)
Conducted Emissions 9KHz-30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18-40GHz	5.54 dB	(1)
Occupied Bandwidth		(1)

<sup>(1)</sup> This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

Report No.: TRE1706007201 Page 10 of 43 Issued: 2017-07-11

## 5. Test Conditions and Results

## 5.1. Antenna requirement

#### **REQUIREMENT:**

### FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of anantenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

## **TEST RESULTS**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



Report No.: TRE1706007201 Page 11 of 43 Issued: 2017-07-11

## 5.2. Conducted Emissions (AC Main)


### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207:

Fraguenov rango (MHz)	Limit (d	BuV)
Frequency range (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

#### **TEST CONFIGURATION**

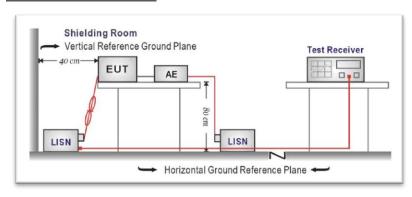


## **TEST PROCEDURE**

- The EUT was setup according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2. The EUT was placed on a plat form of nominal size, 1 m by 1.5 m, raised 10 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 10 cm from any other grounded conducting surface.
- 3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50ohm / 50uH coupling impedance for the measuring equipment.
- 4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
- 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor,was individually connected through a LISN to the input power source.
- 6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
- 8. During the above scans, the emissions were maximized by cable manipulation.

#### **TEST MODE:**

Please refer to the clause 3.3

### **TEST RESULTS**

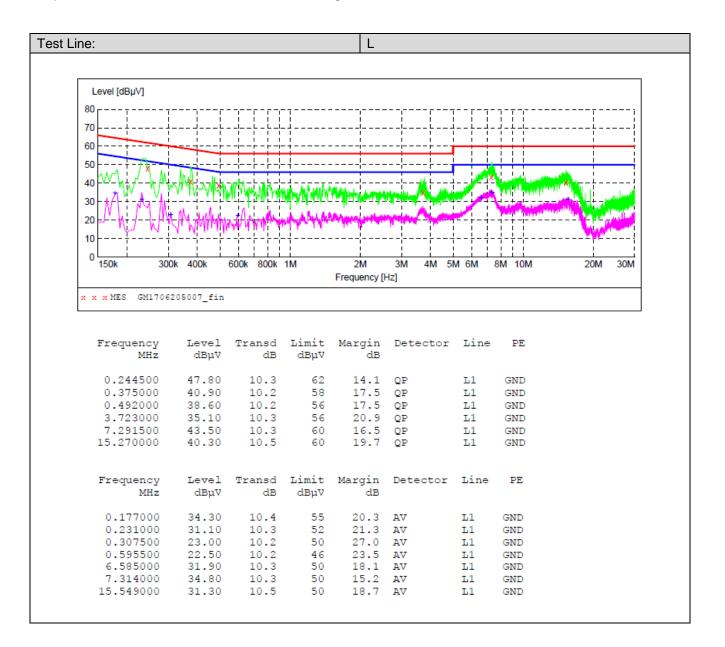

Issued: 2017-07-11

17.326500

30.30

10.5

50

19.7 AV

Ν

GND

Issued: 2017-07-11


Report No.: TRE1706007201 Page 14 of 43 Issued: 2017-07-11

## 5.3. Conducted Peak Output Power

## **LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm:

## **TEST CONFIGURATION**

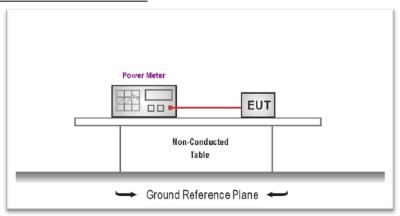

## **TEST PROCEDURE**

- 1. The EUT was tested according to ANSI C63.10: 2013and KDB 558074 D01 for compliance to FCC 47CFR 15.247requirements.
- 2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
- 3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector
- 4. Record the measurement data.

#### **TEST MODE:**

Please refer to the clause 3.3

## **TEST RESULTS**

Туре	Channel	Output power (dBm)	Limit (dBm)	Result
	01	14.67		
802.11b	06	15.02	30.00	Pass
	11	14.84		
	01	14.83		
802.11g	06	14.86	30.00	Pass
	11	14.96		
	01	14.65		
802.11n(HT20)	06	14.81	30.00	Pass
	11	14.73		

Report No.: TRE1706007201 Page 15 of 43 Issued: 2017-07-11


## 5.4. Power Spectral Density

### LIMIT

### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### **TEST CONFIGURATION**

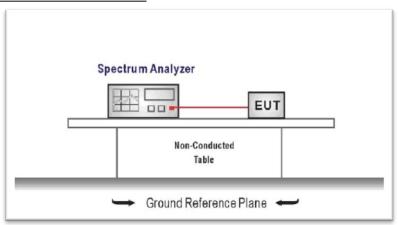

### **TEST PROCEDURE**

- 1. Connect the antenna port(s) to the spectrum analyzer input,
- 2. Configurethe spectrum analyzer as shown below:

Center frequency=DTS channel center frequency

Span =1.5 times the DTS bandwidth

RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW

Sweep time = auto couple

Detector = peak

Trace mode = max hold

- 3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
- 4. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


### TEST MODE:


Please refer to the clause 3.3

## **TEST RESULTS**

Туре	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
	01	-10.33		
802.11b	06	-10.48	8.00	Pass
	11	-10.19		
	01	-17.48		
802.11g	06	-17.84	8.00	Pass
	11	-17.90		
	01	-20.16		
802.11n(HT20)	06	-19.78	8.00	Pass
	11	-19.44		

Test plot as follows:

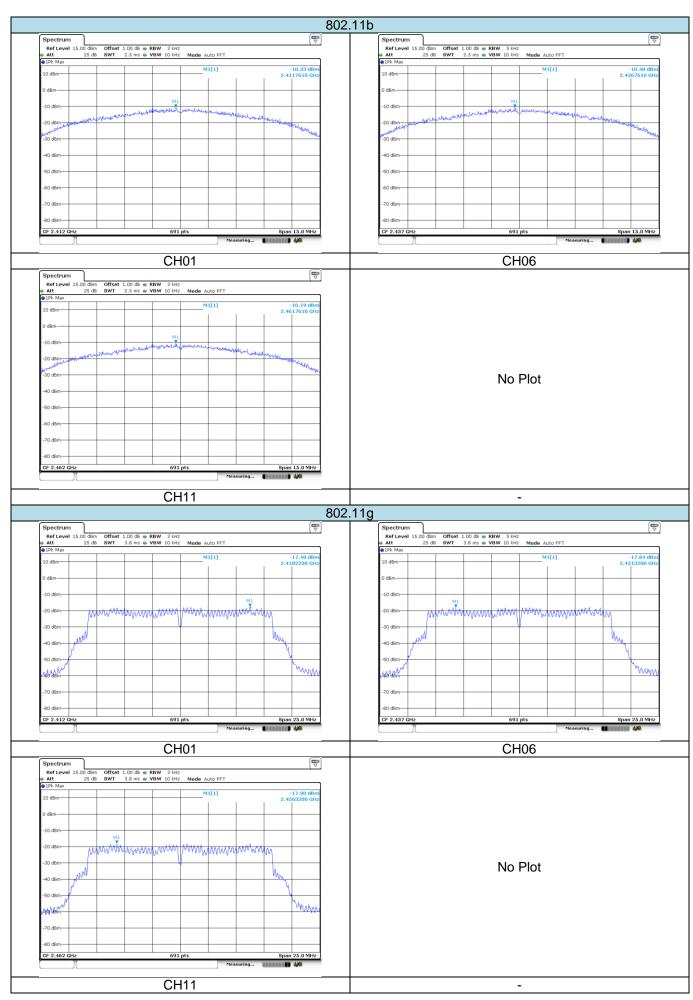

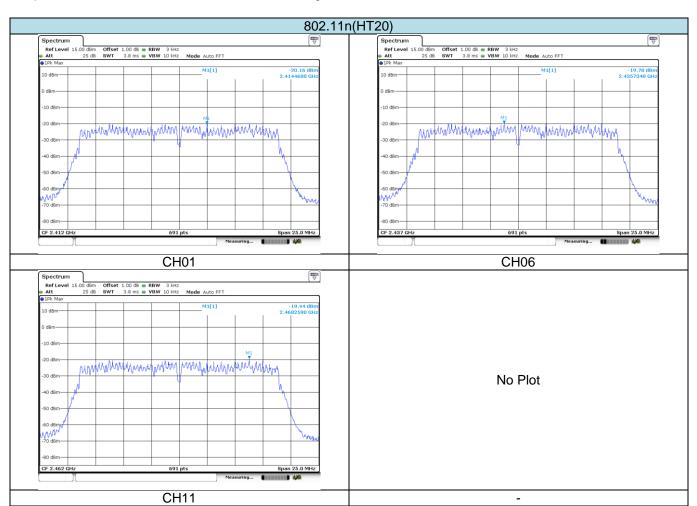

Issued: 2017-07-11

Report No.: TRE1706007201 Page 19 of 43 Issued: 2017-07-11


## 5.5. 6dB bandwidthand

## **LIMIT**

### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### **TEST CONFIGURATION**

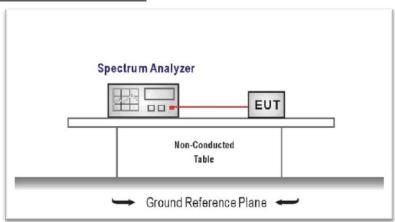

### **TEST PROCEDURE**

- 1. Connect the antenna port(s) to the spectrum analyzer input.
- 2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output andthe spectrum analyzer).

Center Frequency = DTS channel center frequency

Span=2 x DTS bandwidth

RBW = 100 kHz, VBW ≥ 3 × RBW

Sweep time= auto couple

Detector = Peak

Trace mode = max hold

- 3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, andrecord the pertinent measurements.


#### **TEST MODE:**


Please refer to the clause 3.3

### **TEST RESULTS**

Туре	Channel	6dB Bandwidth (MHz)	Limit (kHz)	Result
	01	10.02		
802.11b	06	10.02	≥500	Pass
	11	10.02		
	01	16.38		
802.11g	06	16.32	≥500	Pass
	11	16.32		
	01	17.31		
802.11n(HT20)	06	17.71	≥500	Pass
	11	17.66		

Test plot as follows:

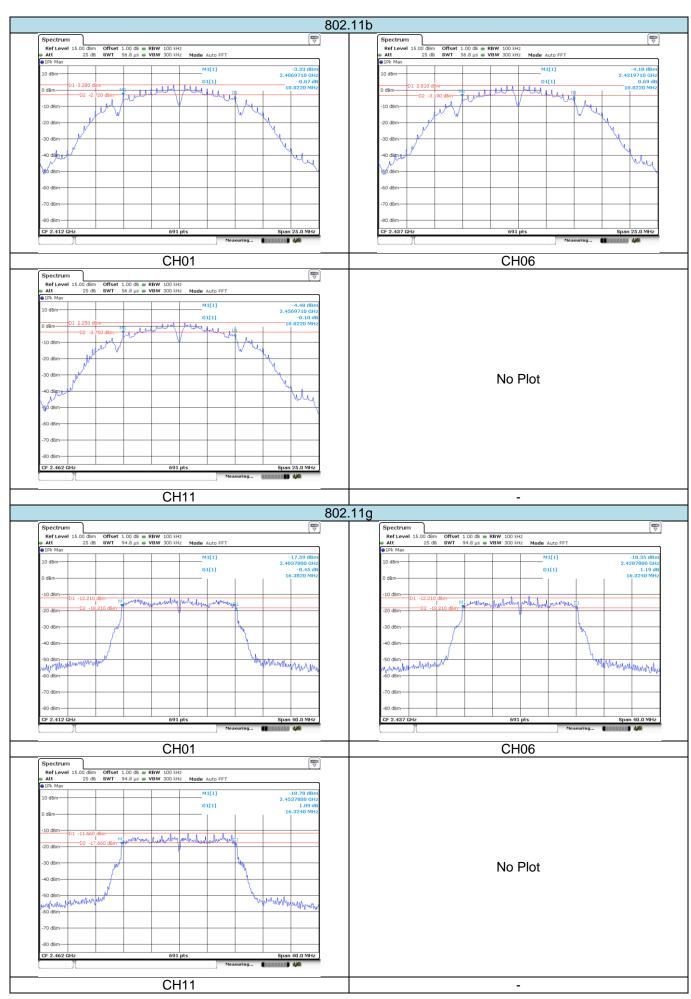

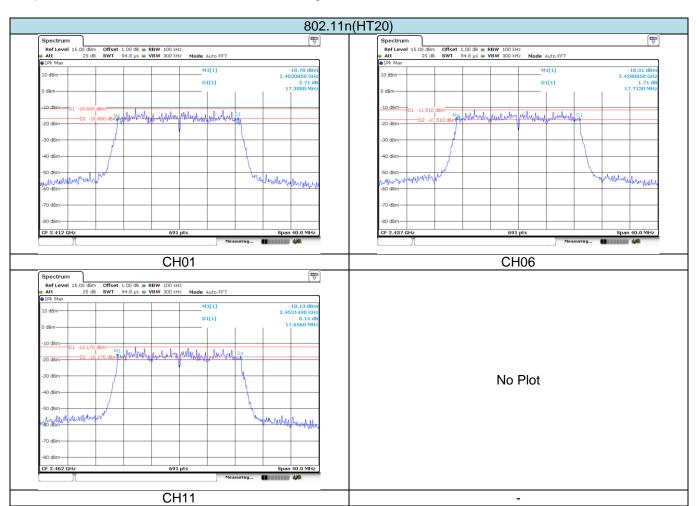

Issued: 2017-07-11

Report No.: TRE1706007201 Page 23 of 43 Issued: 2017-07-11


## 5.6. Restricted band

## **LIMIT**

## FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### **TEST CONFIGURATION**

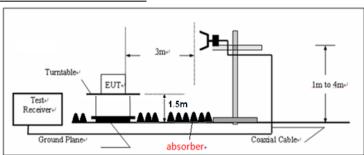

### **TEST PROCEDURE**

- The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated360 degrees
  to determine the position of the maximum emission level.
- 3) The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
- 4) The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. Thisis repeated for both horizontal and vertical polarization of the antenna. In order to find themaximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- 5) The receiver set as follow: RBW=1MHz, VBW=3MHz Peak detector for Peak value RBW=1MHz, VBW=3MHz RMS detector for Average value.

### **TEST MODE:**

Please refer to the clause 3.3

#### **TEST RESULTS**

#### Note:

1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor

802.11b						CH01			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2310.00	13.99	28.05	6.62	0.00	48.66	74.00	-25.34	Horizontal	Peak
2390.01	15.73	27.65	6.75	0.00	50.13	74.00	-23.87	Horizontal	Peak
2310.00	15.23	28.05	6.62	0.00	49.90	74.00	-24.10	Vertical	Peak
2390.01	13.46	27.65	6.75	0.00	47.86	74.00	-26.14	Vertical	Peak
2310.00	11.17	28.05	6.62	0.00	45.84	54.00	-8.16	Horizontal	Average
2390.01	10.70	27.65	6.75	0.00	45.10	54.00	-8.90	Horizontal	Average
2310.00	11.17	28.05	6.62	0.00	45.84	54.00	-8.16	Vertical	Average
2390.01	10.71	27.65	6.75	0.00	45.11	54.00	-8.89	Vertical	Average

802.11b						CH11			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2483.49	14.80	27.26	6.83	0.00	48.89	74.00	-25.11	Horizontal	Peak
2500.00	13.76	27.20	6.84	0.00	47.80	74.00	-26.20	Horizontal	Peak
2483.49	13.50	27.26	6.83	0.00	47.59	74.00	-26.41	Vertical	Peak
2500.00	13.25	27.20	6.84	0.00	47.29	74.00	-26.71	Vertical	Peak
2483.49	10.77	27.26	6.83	0.00	44.86	54.00	-9.14	Horizontal	Average
2500.00	10.73	27.20	6.84	0.00	44.77	54.00	-9.23	Horizontal	Average
2483.49	10.75	27.26	6.83	0.00	44.84	54.00	-9.16	Vertical	Average
2500.00	10.73	27.20	6.84	0.00	44.77	54.00	-9.23	Vertical	Average

802.11g						CH01			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2310.00	13.33	28.05	6.62	0.00	48.00	74.00	-26.00	Horizontal	Peak
2390.01	13.11	27.65	6.75	0.00	47.51	74.00	-26.49	Horizontal	Peak
2310.00	13.75	28.05	6.62	0.00	48.42	74.00	-25.58	Vertical	Peak
2390.01	13.62	27.65	6.75	0.00	48.02	74.00	-25.98	Vertical	Peak
2310.00	11.18	28.05	6.62	0.00	45.85	54.00	-8.15	Horizontal	Average
2390.01	10.78	27.65	6.75	0.00	45.18	54.00	-8.82	Horizontal	Average
2310.00	11.16	28.05	6.62	0.00	45.83	54.00	-8.17	Vertical	Average
2390.01	10.73	27.65	6.75	0.00	45.13	54.00	-8.87	Vertical	Average

802.11g						CH11			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2483.49	12.78	27.26	6.83	0.00	46.87	74.00	-27.13	Horizontal	Peak
2500.00	12.83	27.20	6.84	0.00	46.87	74.00	-27.13	Horizontal	Peak
2483.49	13.94	27.26	6.83	0.00	48.03	74.00	-25.97	Vertical	Peak
2500.00	12.19	27.20	6.84	0.00	46.23	74.00	-27.77	Vertical	Peak
2483.49	10.73	27.26	6.83	0.00	44.82	54.00	-9.18	Horizontal	Average
2500.00	10.71	27.20	6.84	0.00	44.75	54.00	-9.25	Horizontal	Average
2483.49	10.85	27.26	6.83	0.00	44.94	54.00	-9.06	Vertical	Average
2500.00	10.75	27.20	6.84	0.00	44.79	54.00	-9.21	Vertical	Average

802.11n(HT	20)					CH01			
Frequency (MHz)	Frequency (MHz) Read Antenna Cable Prear Level Factor Loss Fact		Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value	
2310.00	13.69	28.05	6.62	0.00	48.36	74.00	-25.64	Horizontal	Peak
2390.01	14.07	27.65	6.75	0.00	48.47	74.00	-25.53	Horizontal	Peak
2310.00	13.58	28.05	6.62	0.00	48.25	74.00	-25.75	Vertical	Peak
2390.01	13.68	27.65	6.75	0.00	48.08	74.00	-25.92	Vertical	Peak
2310.00	11.22	28.05	6.62	0.00	45.89	54.00	-8.11	Horizontal	Average
2390.01	10.87	27.65	6.75	0.00	45.27	54.00	-8.73	Horizontal	Average
2310.00	11.24	28.05	6.62	0.00	45.91	54.00	-8.09	Vertical	Average
2390.01	10.87	27.65	6.75	0.00	45.27	54.00	-8.73	Vertical	Average

802.11n(HT	20)					CH11			
Frequency (MHz)	Read Level (dBuV)	evel Factor Loss Factor		Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2483.49	11.30	27.26	6.83	0.00	45.39	74.00	-28.61	Horizontal	Peak
2500.00	11.90	27.20	6.84	0.00	45.94	74.00	-28.06	Horizontal	Peak
2483.49	11.64	27.26	6.83	0.00	45.73	74.00	-28.27	Vertical	Peak
2500.00	13.81	27.20	6.84	0.00	47.85	74.00	-26.15	Vertical	Peak
2483.49	10.77	27.26	6.83	0.00	44.86	54.00	-9.14	Horizontal	Average
2500.00	10.73	27.20	6.84	0.00	44.77	54.00	-9.23	Horizontal	Average
2483.49	10.79	27.26	6.83	0.00	44.88	54.00	-9.12	Vertical	Average
2500.00	10.76	27.20	6.84	0.00	44.80	54.00	-9.20	Vertical	Average

Report No.: TRE1706007201 Page 27 of 43 Issued: 2017-07-11


## 5.7. Band edge and Spurious Emission (conducted)

#### LIMIT

### FCC CFR Title 47 Part 15 Subpart C Section15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

## **TEST CONFIGURATION**

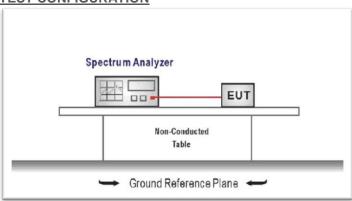

## **TEST PROCEDURE**

- 1. Connect the antenna port(s) to the spectrum analyzer input.
- 2. Establish a reference level by using the following procedure

Center frequency=DTS channel center frequency

The span = 1.5 times the DTS bandwidth.

RBW = 100 kHz, VBW  $\geq$  3 x RBW

Detector = peak, Sweep time = auto couple, Trace mode = max hold

Allow trace to fully stabilize

Use the peak marker function to determine the maximum PSD level

Note: the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement

Set the center frequency and span to encompass frequency range to be measured

RBW = 100 kHz, VBW ≥ 3 x RBW

Detector = peak, Sweep time = auto couple, Trace mode = max hold

Allow trace to fully stabilize

Use the peak marker function to determine the maximum amplitude level.


- 4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
- 5. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emissions relative to the limit.

#### **TEST MODE:**

Please refer to the clause 3.3

#### **TEST RESULTS**

Issued: 2017-07-11

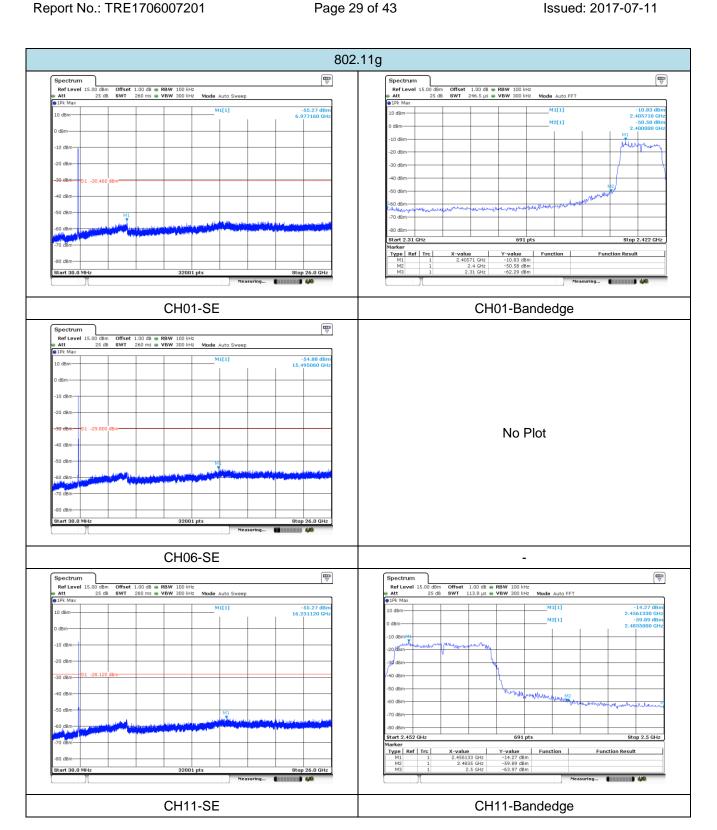

Issued: 2017-07-11

Report No.: TRE1706007201 Page 31 of 43 Issued: 2017-07-11

# 5.8. Spurious Emissions (radiated)


## LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
Above IGIIZ	74.00	Peak

## **TEST CONFIGURATION**


### ➢ 9KHz ~30MHz

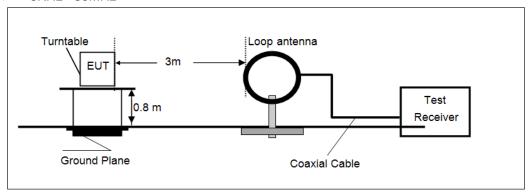

## > 30MHz ~ 1GHz

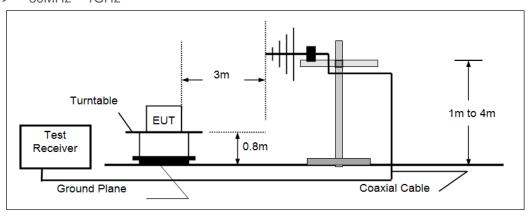

#### Above 1GHz

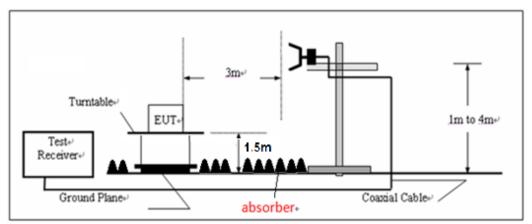

Report No.: TRE1706007201 Page 32 of 43 Issued: 2017-07-11

## **TEST PROCEDURE**

- 1. The EUT was tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2. The EUT is placed on a turn table which is 0.8/1.5 meter above ground plane. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
- 4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
- 5. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 1GHz, RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, theemission measurement will be repeated using the quasi-peak detector and reported.
  - (3) Above 1GHz, RBW=1MHz, VBW=3MHz Peak detetor for Peak value RBW=1MHz, VBW=3MHz RMS detetor for Average value.

Remark: "floor-standing equipment" Where possible, the antenna(s) of the EUT shall be located at a height of 1.5 m above the floor, and the intentional radiator circuitry shall be located within the system at a height of at least 0.8 m above the floor.

#### **TEST MODE:**

Please refer to the clause 3.3

#### **TEST RESULTS**

#### Note:

- Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2) "\*", means this data is the too weak instrument of signal is unable to test.
- 3) The emission levels of other frequencies are very lower than the limit and not show in test report.


## → 9kHz ~ 30MHz

The EUT was pre-scanned the frequency band (9KHz~30MHz), found the radiated level lower than the limit, so don't show on the report.

Report No.: TRE1706007201 Page 33 of 43 Issued: 2017-07-11

#### 30MHz ~ 1GHz

ation:				Vert	ical			
Level [dBµV/m]								
80 [ 7				<u>-</u>				
70							¦ ¦	¦
60			 	- 1		-		
00		† † <u> </u>					† <u>†</u>	<u> </u>
50		<del></del>				<del> </del>	<del></del>	┼┽┽├- <mark>┼</mark> │
40			L				l	1
-			l I					Land Market
30	- <del> </del>	++	<b></b> -		<mark>x</mark>	+	Harman Harris	
20		<del> </del>	~~~~. A.	4~k4-2	*****	mynny.		<u> </u>
10	1 1							
10								
1 1 i				-			ŢŢ	Ţ <u>-</u>
0 30M 40M	50M 60M 70	M 10	OM.	200	M	300M 40	OM 500M 60	00M 900M 1G
	50M 60M 70	OM 10	OM F	200 Frequency [Hz		300M 40	00M 500M 60	0M 800M 1G
		DM 10				300M 40	00M 500M 60	0M 800M 1G
30M 40M		DM 10				300M 40	00M 500M 60	00M 800M 1G
30M 40M  x x x MES GM170	6166105_red		F	Frequency [Hz	z]			
30M 40M  x x x MES GM170  Frequency	6166105_red Level	Transd	Limit	Frequency [Hz	z]	Height	Azimuth	
30M 40M  x x x MES GM170  Frequency MHz  30.000000 51.340000	Level dBµV/m 28.30 29.20	Transd dB -13.3 -8.8	Limit dBµV/m 40.0 40.0	Margin dB	Det. QP QP	Height cm	Azimuth deg	Polarization VERTICAL VERTICAL
30M 40M  x x x MES GM170  Frequency MHz  30.000000 51.340000 55.220000	Level dBµV/m 28.30 29.20 25.50	Transd dB -13.3 -8.8 -9.2	Limit dBµV/m 40.0 40.0 40.0	Margin dB	Det.  QP QP QP	Height cm 100.0 100.0 100.0	Azimuth deg 189.00 0.00 0.00	Polarization VERTICAL VERTICAL VERTICAL
30M 40M  x x x MES GM170  Frequency MHz  30.000000 51.340000 55.220000 239.520000	Level dBµV/m 28.30 29.20 25.50 28.10	Transd dB -13.3 -8.8 -9.2 -8.8	Limit dBµV/m 40.0 40.0 40.0 46.0	Margin dB 11.7 10.8 14.5 17.9	Det.  QP QP QP QP QP	Height cm 100.0 100.0 100.0 100.0	Azimuth deg 189.00 0.00 0.00 14.00	Polarization VERTICAL VERTICAL VERTICAL VERTICAL VERTICAL
30M 40M  x x x MES GM170  Frequency MHz  30.000000 51.340000 55.220000	Level dBµV/m 28.30 29.20 25.50	Transd dB -13.3 -8.8 -9.2	Limit dBµV/m 40.0 40.0 40.0	Margin dB	Det.  QP QP QP	Height cm 100.0 100.0 100.0	Azimuth deg 189.00 0.00 0.00	Polarization VERTICAL VERTICAL VERTICAL

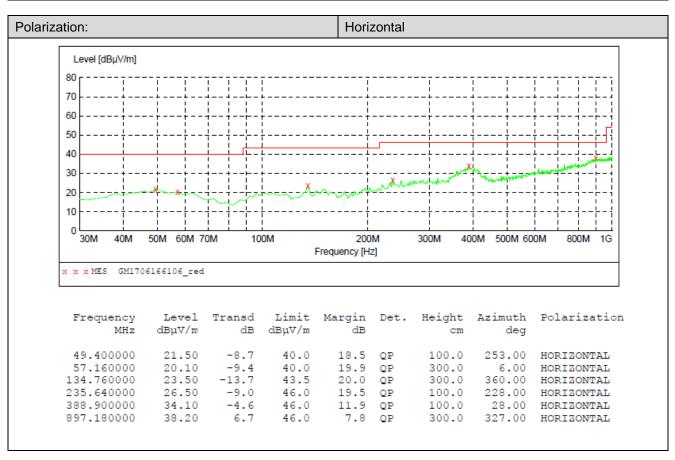

Report No.: TRE1706007201 Page 34 of 43 Issued: 2017-07-11

### Above 1GHz

802.11b					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1267.10	36.00	26.23	4.77	36.53	30.47	74.00	-43.53	Vertical	
3913.39	35.90	29.70	8.66	38.16	36.10	74.00	-37.90	Vertical	
4821.76	39.42	31.56	9.55	36.90	43.63	74.00	-30.37	Vertical	
8637.08	33.27	37.52	12.93	34.48	49.24	74.00	-24.76	Vertical	Peak
1156.15	36.81	25.96	4.56	36.59	30.74	74.00	-43.26	Horizontal	reak
3607.26	34.73	29.30	8.28	38.27	34.04	74.00	-39.96	Horizontal	
5971.29	31.93	32.44	10.66	35.43	39.60	74.00	-34.40	Horizontal	
8042.90	32.28	37.06	12.40	34.53	47.21	74.00	-26.79	Horizontal	

802.11b					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1210.36	35.42	26.29	4.68	36.56	29.83	74.00	-44.17	Vertical	
3283.02	35.87	28.30	7.82	38.35	33.64	74.00	-40.36	Vertical	
4871.10	35.95	31.46	9.59	36.76	40.24	74.00	-33.76	Vertical	
8022.46	33.34	37.08	12.35	34.53	48.24	74.00	-25.76	Vertical	Peak
1216.53	35.12	26.28	4.69	36.56	29.53	74.00	-44.47	Horizontal	Peak
3168.08	34.94	28.80	7.68	38.20	33.22	74.00	-40.78	Horizontal	
4871.10	35.95	31.46	9.59	36.76	40.24	74.00	-33.76	Horizontal	
7413.73	32.44	36.27	12.11	34.83	45.99	74.00	-28.01	Horizontal	

802.11b					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1367.66	35.67	25.99	4.95	36.48	30.13	74.00	-43.87	Vertical	
3863.90	35.73	29.66	8.59	38.19	35.79	74.00	-38.21	Vertical	
5099.49	33.95	31.90	9.75	36.30	39.30	74.00	-34.70	Vertical	
7319.96	32.20	36.30	11.99	34.92	45.57	74.00	-28.43	Vertical	Peak
1296.47	34.22	26.20	4.82	36.52	28.72	74.00	-45.28	Horizontal	reak
3176.16	35.44	28.80	7.69	38.20	33.73	74.00	-40.27	Horizontal	
5560.50	32.12	31.84	10.24	36.05	38.15	74.00	-35.85	Horizontal	
7027.82	31.86	35.38	11.85	34.83	44.26	74.00	-29.74	Horizontal	

#### Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11g					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1741.81	35.11	25.29	5.85	37.02	29.23	74.00	-44.77	Vertical	
3662.78	34.76	29.30	8.34	38.26	34.14	74.00	-39.86	Vertical	
6219.51	31.35	32.94	11.01	35.29	40.01	74.00	-33.99	Vertical	
7376.08	33.05	36.30	12.04	34.85	46.54	74.00	-27.46	Vertical	Peak
1668.04	35.41	25.11	5.70	36.86	29.36	74.00	-44.64	Horizontal	reak
3634.91	35.51	29.30	8.31	38.26	34.86	74.00	-39.14	Horizontal	
4821.76	34.55	31.56	9.55	36.90	38.76	74.00	-35.24	Horizontal	
7451.57	31.66	36.20	12.24	34.86	45.24	74.00	-28.76	Horizontal	

802.11g					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1764.12	35.79	25.33	5.89	37.06	29.95	74.00	-44.05	Vertical	
4065.71	35.01	29.83	8.83	37.96	35.71	74.00	-38.29	Vertical	
6628.18	31.94	34.20	11.39	35.31	42.22	74.00	-31.78	Vertical	
7413.73	32.45	36.27	12.11	34.83	46.00	74.00	-28.00	Vertical	Peak
1773.13	35.74	25.35	5.91	37.08	29.92	74.00	-44.08	Horizontal	reak
3598.09	34.50	29.29	8.27	38.27	33.79	74.00	-40.21	Horizontal	
5956.11	32.44	32.41	10.65	35.42	40.08	74.00	-33.92	Horizontal	
8637.08	32.22	37.52	12.93	34.48	48.19	74.00	-25.81	Horizontal	

802.11g					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1498.91	34.80	25.80	5.28	36.59	29.29	74.00	-44.71	Vertical	
3049.39	35.61	28.70	7.54	38.22	33.63	74.00	-40.37	Vertical	
4034.78	35.05	29.77	8.81	38.03	35.60	74.00	-38.40	Vertical	
5821.21	31.58	32.14	10.60	35.33	38.99	74.00	-35.01	Vertical	Peak
1791.27	35.19	25.38	5.94	37.12	29.39	74.00	-44.61	Horizontal	reak
3883.62	34.43	29.68	8.62	38.18	34.55	74.00	-39.45	Horizontal	
6764.54	32.10	34.07	11.56	35.06	42.67	74.00	-31.33	Horizontal	
8042.90	32.56	37.06	12.40	34.53	47.49	74.00	-26.51	Horizontal	

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n(HT	20)				CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1782.18	35.63	25.37	5.93	37.10	29.83	74.00	-44.17	Vertical	
3026.20	36.51	28.65	7.51	38.23	34.44	74.00	-39.56	Vertical	
4245.51	33.99	30.09	8.98	37.63	35.43	74.00	-38.57	Vertical	
6094.14	31.82	32.50	10.83	35.37	39.78	74.00	-34.22	Vertical	Peak
1755.16	34.70	25.31	5.87	37.05	28.83	74.00	-45.17	Horizontal	reak
4310.85	33.79	30.23	9.05	37.60	35.47	74.00	-38.53	Horizontal	
7376.08	31.76	36.30	12.04	34.85	45.25	74.00	-28.75	Horizontal	
8927.68	32.33	37.83	13.23	34.36	49.03	74.00	-24.97	Horizontal	

802.11n(HT	20)				CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1668.04	34.86	25.11	5.70	36.86	28.81	74.00	-45.19	Vertical	
3184.25	35.18	28.80	7.70	38.20	33.48	74.00	-40.52	Vertical	
5086.52	32.29	31.85	9.74	36.31	37.57	74.00	-36.43	Vertical	
6628.18	32.20	34.20	11.39	35.31	42.48	74.00	-31.52	Vertical	Dools
1741.81	34.71	25.29	5.85	37.02	28.83	74.00	-45.17	Horizontal	Peak
3903.44	34.82	29.70	8.64	38.17	34.99	74.00	-39.01	Horizontal	
5940.97	32.21	32.38	10.65	35.41	39.83	74.00	-34.17	Horizontal	
8615.13	33.73	37.39	12.91	34.50	49.53	74.00	-24.47	Horizontal	

802.11n(HT	20)				CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1728.56	35.34	25.26	5.82	36.99	29.43	74.00	-44.57	Vertical	
3805.33	35.78	29.61	8.51	38.23	35.67	74.00	-38.33	Vertical	
4920.96	33.74	31.42	9.62	36.62	38.16	74.00	-35.84	Vertical	
6851.19	32.61	34.36	11.66	34.94	43.69	74.00	-30.31	Vertical	Peak
1617.86	35.28	24.95	5.60	36.76	29.07	74.00	-44.93	Horizontal	reak
3766.79	35.09	29.50	8.46	38.24	34.81	74.00	-39.19	Horizontal	
4933.50	37.19	31.43	9.63	36.59	41.66	74.00	-32.34	Horizontal	
7376.08	32.91	36.30	12.04	34.85	46.40	74.00	-27.60	Horizontal	

#### Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Report No.: TRE1706007201 Page 37 of 43 Issued: 2017-07-11

# 6. Test Setup Photos of the EUT

Conducted Emissions (AC Mains)




## **Radiated Emissions**





Report No.: TRE1706007201 Page 38 of 43 Issued: 2017-07-11

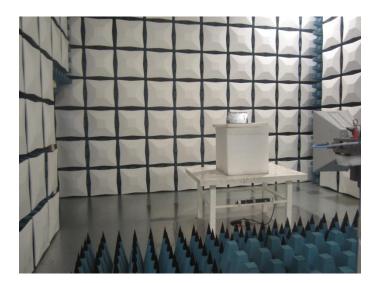

Report No.: TRE1706007201 Page 39 of 43 Issued: 2017-07-11

# 7. External and Internal Photos of the EUT

# **External Photos of the EUT**





















Report No.: TRE1706007201 Page 42 of 43 Issued: 2017-07-11

# **Internal Photos of the EUT**



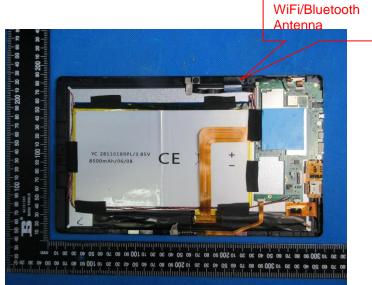

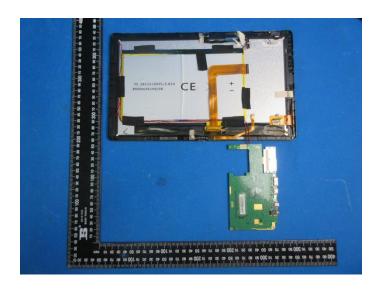







.....End of Report.....