

Shenzhen Huatongwei International Inspection Co., Ltd.

1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road,Tianliao,Gongming,Shenzhen,China Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn



Beepy Ling

Jeff Sten

House my

FCC REPORT

Report Reference No.: TRE1706007204 R/C....: 72977

FCC ID 2AJE3TM116

Applicant's name Tmax Digital, Inc.

Address 4401 Eucalyptus Ave., #120 ,Chino, CA 91710 ,USA

Manufacturer...... Shenzhen Alldocube Technology and Science Co.,Ltd

Longhua District, Shenzhen, China

Test item description.....: Tablet PC

Trade Mark.....: NUVISION

Model/Type reference: TM116W725L

Listed Model(s).....: 17-TC

Standard..... : 47 CFR FCC Part 15 Subpart B - Unintentional Radiators

Date of receipt of test sample.......... Jun. 09, 2017

Date of testing...... Jun. 10, 2017 - Jul. 10, 2017

Date of issue...... Jul. 11, 2017

Result Pass

Compiled by

(position+printed name+signature) .: File administrators Becky Liang

Supervised by

(position+printed name+signature) . : Project Engineer Jeff Sun

Approved by

(position+printed name+signature) .: RF Manager Hans Hu

Testing Laboratory Name.....: Shenzhen Huatongwei International Inspection Co., Ltd.

Address 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,

Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Report No.: TRE1706007204 Page 2 of 16 Issued: 2017-07-11

Contents

<u>1.</u>	TEST STANDARDS AND REPORT VERSION	3
1.1.	Test Standards	3
1.1. 1.2.	Report version	3
<u>2.</u>	TEST DESCRIPTION	4
3.	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	EUT operation mode	5
3.4.	EUT configuration	5
<u>4.</u>	TEST ENVIRONMENT	6
4.1.	Address of the test laboratory	6
4.2.	Test Facility	6
4.3.	Equipments Used during the Test	7
4.4.	Environmental conditions	8
4.5.	Statement of the measurement uncertainty	8
<u>5.</u>	TEST CONDITIONS AND RESULTS	9
5.1.	Conducted Emissions Test	9
5.1. 5.2.	Radiated Emissions Test	9 12
-		_
<u>6.</u>	TEST SETUP PHOTOS OF THE EUT	16
7.	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	16

Report No.: TRE1706007204 Page 3 of 16 Issued: 2017-07-11

1. Test standards and Report version

1.1. Test Standards

The tests were performed according to following standards:

47 CFR FCC Part 15 Subpart B - Unintentional Radiators

<u>ANSI C63.4: 2014</u> – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

1.2. Report version

Version No.	Date of issue	Description
00	Jul. 11, 2017	Original

Report No.: TRE1706007204 Page 4 of 16 Issued: 2017-07-11

2. Test Description

Test Item	Section in CFR 47	Result
Conducted Emissions	15.107(a)	Pass
Radiated Emissions	15.109(a)	Pass

Note: The measurement uncertainty is not included in the test result.

Report No.: TRE1706007204 Page 5 of 16 Issued: 2017-07-11

3. Summary

3.1. Client Information

Applicant:	Tmax Digital, Inc.
Address: 4401 Eucalyptus Ave., #120 ,Chino, CA 91710 ,USA	
Manufacturer:	Shenzhen Alldocube Technology and Science Co.,Ltd
A dalace c	Building No.1,Suwang Industrial Park,Xiahenglang Dalang,Longhua District,
Address:	Shenzhen,China

3.2. Product Description

Name of EUT:	Tablet PC	
Trade Mark:	NUVISION	
Model No.:	TM116W725L	
Listed Model(s):	I7-TC	
Power supply: DC 5V from internal battery		
	Model: JHD-AP015U-050250BU1-C	
Adapter information:	Input: 100-240Va.c., 50/60Hz, 0.45A	
	Output: 5Vd.c., 2500mA	
Hardware version:	CHT-P04	
Software version:	-	

3.3. EUT operation mode

The EUT has been tested under communication with USB mode, playing mode and display mode.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

supplied by the manufacturer

\circ	- supp	lied	by t	he	ab

\circ	Monitor	Manufacturer:	EIZO
		Model No.:	FS2333
\circ	Mouse	Manufacturer:	DELL
		Model No.:	MS111-T
\circ	earphone	Manufacturer :	PHILIPS
		Model No.:	SHE6000
\circ	U Flash Disk	Manufacturer :	Kingston
		Model No.:	DT101

Note:Peripheral devices comply with FCC DOC approval.

Report No.: TRE1706007204 Page 6 of 16 Issued: 2017-07-11

4. Test Environment

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.
Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China Phone: 86-755-26748019 Fax: 86-755-26748089

4.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478.

IC-Registration No.: 5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Equipments Used during the Test

Cond	Conducted Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal	
1	EMI Test Receiver	Rohde & Schwarz	ESCI	101247	2016/11/13	
2	Artificial Mains	Rohde & Schwarz	NNLK 8121	573	2016/11/13	
3	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101488	2016/11/13	
4	Test cable	ENVIROFLEX	3651	1101902	2016/11/13	
5	Test Software	Rohde & Schwarz	ES-K1	N/A	N/A	

Radia	Radiated Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal	
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2016/11/13	
2	EMI Test Receiver	Rohde & Schwarz	ESCI	101247	2016/11/13	
3	EMI Test Software	Audix	E3	N/A	N/A	
4	Turntable	MATURO	TT2.0		N/A	
5	Antenna Mast	MATURO	TAM-4.0-P-12		N/A	
6	EMI Test Software	Rohde & Schwarz	ESK1	N/A	N/A	
7	Ultra-Broadband Antenna	Rohde&Schwarz	HL562	100015	2016/11/13	
8	Amplifer	ShwarzBeck	BBV 9743	9743-0022	2016/11/13	
9	TURNTABLE	ETS	2088	2149	N/A	
10	HORN ANTENNA	Rohde&Schwarz	HF906	100039	2016/11/13	
11	Test cable	Siva Cables Italy	RG 58A/U	W14.02	2016/11/13	

The calibration interval was one year.

Report No.: TRE1706007204 Page 8 of 16 Issued: 2017-07-11

4.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
lative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.24 dB	(1)
Radiated Emission	1~18GHz	5.16 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.39 dB	(1)

⁽¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5. Test Conditions and Results

5.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.107:

Frequency range (MHz)	Limit (dBuV)		
Frequency range (IVII 12)	Quasi-peak	Average	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5	56	46	
5-30	60	50	

^{*} Decreases with the logarithm of the frequency.

TEST CONFIGURATION

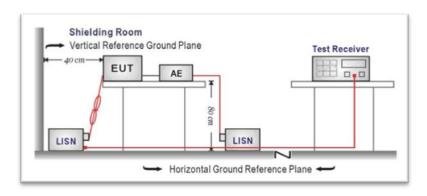


TEST PROCEDURE


- 1. The EUT was setup according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2. The EUT was placed on a plat form of nominal size, 1 m by 1.5 m, raised 10 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 10 cm from any other grounded conducting surface.
- 3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50ohm / 50uH coupling impedance for the measuring equipment.
- 4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
- 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor,was individually connected through a LISN to the input power source.
- 6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
- 8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

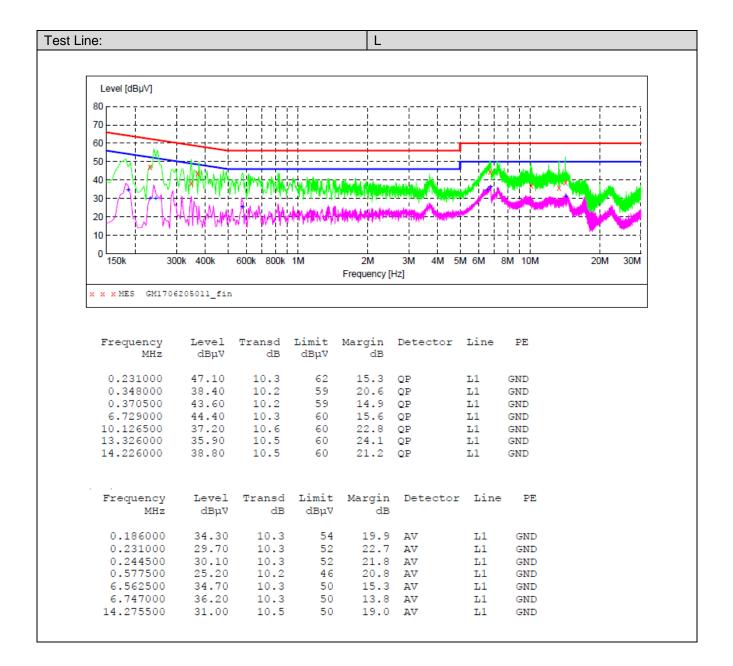

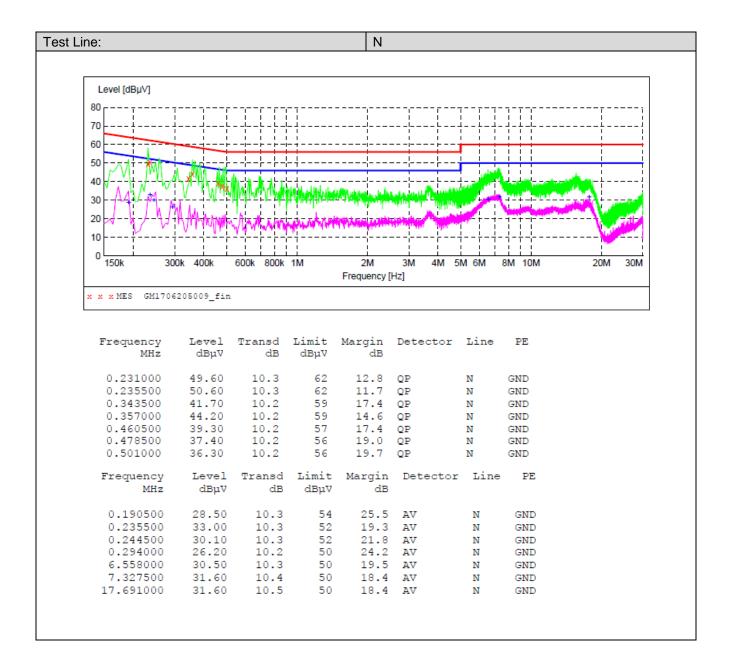

5.2. Radiated Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

> 30MHz ~ 1GHz

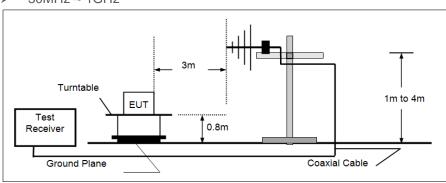

Above 1GHz

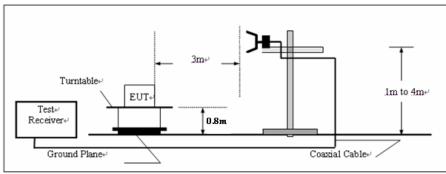

Report No.: TRE1706007204 Page 13 of 16 Issued: 2017-07-11

TEST PROCEDURE


- 1. The EUT was tested according to ANSI C63.4:2014.
- 2. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
- 4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. Thisis repeated for both horizontal and vertical polarization of the antenna.
- 5. The tested frequency range 30MHz to 25GHz.
- 6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1GHz, RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, theemission measurement will be repeated using the quasi-peak detector and reported.
 - (3) Above 1GHz, RBW=1MHz, VBW=3MHz


TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Note: Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

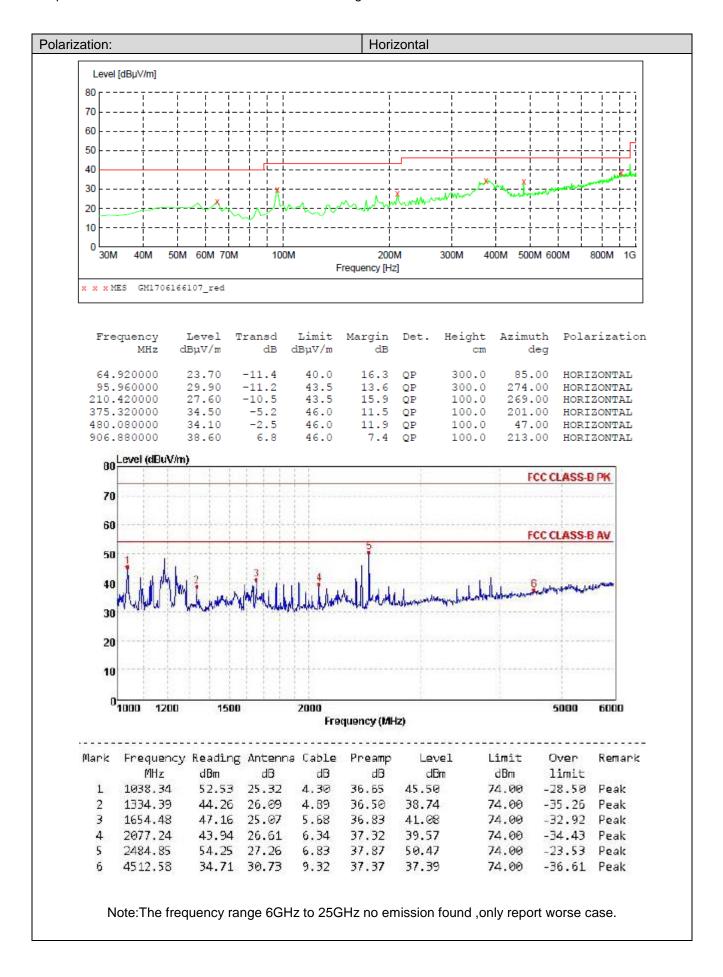

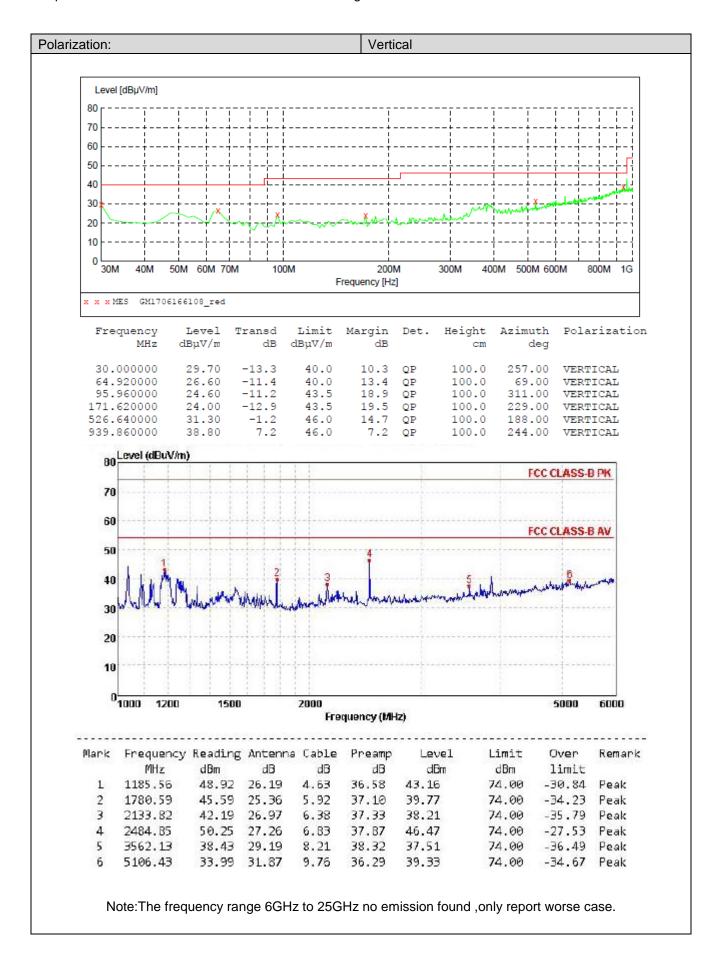

6. Test Setup Photos of the EUT


Conducted Emissions (AC Mains)



Radiated Emissions (30MHz-1GHz)



Radiated Emissions (Above 1GHz)

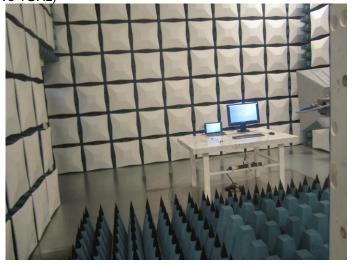

7. External and Internal Photos of the EUT

Reference to Test Report No.: TRE1706007201.

.....End of Report.....