

Page : 1 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# **RADIO TEST REPORT**

**Product** : Radio frequency module for Small-sized Digital

**Telemetry Systems** 

Model Name : MR-2400MA

**FCC ID** : 2AJE9MR-2400MA

**Test Regulation** : FCC 47 CFR Part 15 Subpart C (Section 15.247)

**Received Date** : Jul. 29, 2019

**Test Date** : Aug. 2, 2019

**Issued Date** : Aug. 28, 2019

**Applicant** : Kyowa Electronic Instruments Co., Ltd

3-5-1, Chofugaoka, Chofu, Tokyo, 182-8520 Japan

**Issued By** : Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing

Rd., Zhudong Township, Hsinchu County, Taiwan





3398

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.

#### Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948



Page : 2 of 28

Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# **REVISION HISTORY**

Original Test Report No.: 4789096882-US-R0-V0

Rev.	Test report No. 4789096882-US-R0-V0	Date	Page revised	Contents
Original	4789096882-US-R0-V0	Aug. 28, 2019	-	Initial issue

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan



Page : 3 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# **Table Of Contents**

1.	Att	estation of Test Results	4
2.	Sur	nmary of Test Results	5
3.	Tes	st Methodology	6
4.	Fac	cilities and Accreditation	6
5.	Me	asurement Uncertainty	7
6.	Equ	uipment under Test	8
	6.1.	Description of EUT	8
	6.2.	Test Condition	8
	6.3.	Description Of Available Antennas	9
	6.4.	Test Mode Applicability and Tested Channel Detail	11
7.	Tes	t Equipment	12
8.	Des	scription of Test Setup	13
9.	Tes	t Results	14
	9.1.	Conducted output power	
	9.2.	Radiated Spurious Emission	16
Aį	ppend	ix I Radiated Band Edge Measurement	26
Αı	ppend	ix II Radiated Spurious Emission Measurement	28



Page : 4 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# 1. Attestation of Test Results

**APPLICANT:** Kyowa Electronic Instruments Co., Ltd

3-5-1, Chofugaoka, Chofu, Tokyo, 182-8520 Japan

MANUFACTURER Kyowa Electronic Instruments Co., Ltd

3-5-1, Chofugaoka, Chofu, Tokyo, 182-8520 Japan

**EUT DESCRIPTION:** Radio frequency module for Small-sized Digital Telemetry

Systems

**BRAND:** TAIYOYUDEN

MODEL: MR-2400MA

**SAMPLE STAGE:** Production Unit

**DATE of TESTED:** Aug. 2, 2019

#### APPLICABLE STANDARDS

STANDARD Test Results

FCC 47 CFR PART 15 Subpart C (Section 15.247)

PASS

Underwriters Laboratories Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Prepared By:

Project Handler

Approved and Authorized By

Cindy Hsin Date: Aug. 28, 2019

Stanley Wu Date: Aug. 28, 2019

Senior Project Engineer

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948



Doc No: 17-EM-F0876 / 2.0

Page : 5 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# 2. Summary of Test Results

Summary of Test Results				
FCC Clause Test Items Result				
15.247(b)	Conducted Output Power	PASS		
15.205 / 15.209 /	Radiated Emissions and	DACC		
15.247(d)	Band Edge Measurement	PASS		

#### Note:

- 1. For the Radiated Band Edge test plots were recorded in Appendix I, the Radiated Emissions test plots were recorded in Appendix II.
- 2. This CIIPC supplemental report was issued based on the original report with the report number 11392143S-B-R4. The difference compared to the original report is the addition Antenna and there is nothing changed to RF related part. Therefore, only Radiated Emissions tests was performed and recorded in this report.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan



Doc No: 17-EM-F0876 / 2.0

Page : 6 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# 3. Test Methodology

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB558074 D01 DTS Meas Guidance v05r02, KDB414788 D01 Radiated Test Site v01r01, ANSI C63.10-2013.

# 4. Facilities and Accreditation

Test Location Underwriters Laboratories Taiwan Co., Ltd.		
Address	Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan	
Accreditation Certificate	Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398. The full scope of accreditation can be viewed at <a href="http://accreditation.taftw.org.tw/taf/public/basic/viewApplyItems.action?unitNo=3398">http://accreditation.taftw.org.tw/taf/public/basic/viewApplyItems.action?unitNo=3398</a>	

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan



Doc No: 17-EM-F0876 / 2.0

Page : 7 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# 5. Measurement Uncertainty

For statement of conformity, accuracy method (Section 8.2.4 and 8.2.5 of ISO Guide 98-4) was applied as decision rule for measurement in this test report.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor k=2.

Test Item	<b>Measurement Frequency Range</b>	K	U(dB)
Conducted disturbance at mains terminals ports	0.15MHz ~ 30MHz	2	1.7
Radiated disturbance below 30MHz	9 kHz - 30 MHz	2	2.2
Radiated disturbance below 1 GHz	30MHz ~ 1GHz	2	5.3
Radiated disturbance above 1GHz	1GHz ~ 40GHz	2	4.8

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan



Page : 8 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# 6. Equipment under Test

# **6.1. Description of EUT**

Product	Radio frequency module for Small-sized Digital Telemetry Systems
Brand Name	TAIYOYUDEN
Model Name	MR-2400MA
<b>Operating Frequency</b>	2405MHz ~ 2480MHz
Modulation	GFSK
Number of Channel	16
Normal Voltage	DC 1.2V, DC 1.7V
Hardware Version	N/A
Software Version	N/A

#### Note:

1. This CIIPC supplemental report was issued based on the original report with the report number 11392143S-B-R4. The difference compared to the original report is the addition Antenna and there is nothing changed to RF related part. Therefore, only Radiated Emissions tests was performed and recorded in this report.

## **6.2. Test Condition**

Test Item	Test Site No.	Environmental Condition	Input Power	Test Date	Tested by
Radiated Spurious Emission	966-2	26°C / 68%RH	120Vac / 60 Hz	Aug. 02, 2019	Will Chen

FCC Test Firm Registration Number: 498077

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948



Doc No: 17-EM-F0876 / 2.0

Page : 9 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# **6.3. Description Of Available Antennas**

# Cable and connector

No.	Cable and connector	Loss [dB]
1	Internal layer pattern (Board 1)	0.48
2	Internal layer pattern (Board 2)	0.33
3	Internal layer pattern (Board 3)	0.12
4	6303090203-150	0.63
5	D-E01-269-A-G	3.30
6	D-C22-054-A-G (SMA-PR-A-PP)	-
7	D-C22-052-A-G (SMA-PR-LA-PJ)	-
8	N/A	N/A
9	SMA454A1	0.04
10	SMA40A1/1	0.07
11	6303020003-60	0.36
12	D-E01-276-A-G	9.97
13	Internal layer pattern (Board 4)	0.60

#### Antennas

Antennas						
DA-DB-05RP-SMA-08	dipole antenna	+6 dBi	RP SMA MALE			
with anto	with antenna cable 1 & 4 (loss 1.11 dB) total antenna gain: 4.89 dBi *1)					
with antenna cable 1 & 4 & 5 (loss 4.41 dB) total antenna gain: 1.59 dBi						
with antenna cable 2 & 4 & 5 (loss 4.26 dB) total antenna gain: 1.74 dBi						
with antenna cable 1 & 4 & 12 (loss 11.08 dB) total antenna gain: -5.08 dBi						
		0.93 dB) total antenna gain:				
		23 dB) total antenna gain: 4.7				
		4.53 dB) total antenna gain:				
	,	11.20 dB) total antenna gain				
W1030 *2)	Lambda/2 dipole	+2.00 dBi	Reverse SMA (P)			
	antenna					
		(loss 1.11 dB) total antenna g				
		(loss 0.96 dB) total antenna g				
		(loss 0.75 dB) total antenna g	2			
		& 5 (loss 4.41 dB) total anter	C			
		& 5 (loss 4.26 dB) total anter	C			
		& 5 (loss 4.05 dB) total anter	0			
		& 12 (loss 11.08 dB) total ar				
		& 12 (loss 10.93 dB) total ar				
		& 12 (loss 10.72 dB) total ar	•			
		4 (loss 1.23 dB) total antenna	C			
		4 & 5 (loss 4.53 dB) total ant	0			
	with antenna cable 13 &	4 & 12 (loss 11.20 dB) total a				
EXT-ANT2 *2)	bow-tie antenna	+1.70 dBi	Reverse SMA (J)			
		& 6 (loss 1.11 dB) total anter	C			
		& 6 (loss 0.96 dB) total anter	C			
		& 6 (loss 0.75 dB) total anter	,			
		& 5 & 6 (loss 4.41 dB) total				
		& 5 & 6 (loss 4.26 dB) total	<u> </u>			
	with antenna cable 3 & 4	& 5 & 6 (loss 4.05 dB) total	antenna gain: -2.35 dBi			

# Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan



Page : 10 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

		& 5 & 6 & 7 (loss 4.41 dB) t			
	with antenna cable 2 & 4	& 5 & 6 & 7 (loss 4.26 dB) t	otal antenna gain: -2.56 dBi		
	with antenna cable 3 & 4 & 5 & 6 & 7 (loss 4.05 dB) total antenna gain: -2.35 dBi				
	with antenna cable 1 & 4	& 5 & 9 (loss 4.41 dB) total :	antenna gain: -2.71 dBi		
	with antenna cable 2 & 4	& 5 & 9 (loss 4.30 dB) total a	antenna gain: -2.60 dBi		
		& 5 & 9 (loss 4.09dB) total a	•		
		& 5 & 10 (loss 4.48 dB) total			
		& 5 & 10 (loss 4.33 dB) total			
		& 5 & 10 (loss 4.12 dB) total	<u> </u>		
			•		
	with antenna cable 1 & 4 & 9 (loss 1.15 dB) total antenna gain: 0.55 dBi with antenna cable 2 & 4 & 9 (loss 1.00 dB) total antenna gain: 0.70 dBi				
		& 9 (loss $0.79 \text{ dB}$ ) total anter			
		& 10 (loss 1.18 dB) total ante			
		& 10 (loss 1.03 dB) total ante	_		
		& 10 (loss 0.82 dB) total ante	•		
		& 10 & 12 (loss 11.15 dB) to			
		& 10 & 12 (loss 11.00 dB) to	C		
		& 10 & 12 (loss 10.79 dB) to	<u>U</u>		
	with antenna cable 13 & 4	(loss 1.23 dB) total antenna	gain: 0.47 dBi		
		4 & 5 (loss 4.53 dB) total ante			
	with antenna cable 13 & 4	4 & 12 (loss 11.20 dB) total a	ntenna gain: -9.50 dBi		
A 21 M245001 AH 212 *2)	monopole antenna	+0.90 dBi	Connector none		
	(chip antenna)				
MR-ANT1 *2)	monopole antenna	-6.00 dBi,	Connector none		
AA-562-2050 *2)	Patch antenna	+1.95 dBi	Reverse SMA (P)		
	with antenna cable 1 & 4	(loss 1.11 dB) total antenna g	gain: 0.84 dBi		
		(loss 0.96 dB) total antenna g			
		(loss 0.75 dB) total antenna g			
		& 5 (loss 4.41 dB) total anter			
		& 5 (loss 4.26 dB) total anter			
		& 5 (loss 4.05 dB) total anter			
		& 12 (loss 11.08 dB) total an	•		
		& 12 (loss 11.03 dB) total an			
		& 12 (loss 10.72 dB) total an			
		(loss 1.23 dB) total antenna	C		
		4 & 5 (loss 4.53 dB) total ante			
2 ACTIZ WIDE ANTERNALA		& 12 (loss 11.20 dB) total a			
2.4GHZ WIRE ANTENNA	monopole antenna	1.62 dBi	Connector none		
*2)	11 0 "	0.22 10 1	1.00 ID:		
		0.33 dB) total antenna gain:			
		0.12 dB) total antenna gain:			
	,	s 0.60 dB) total antenna gain			
EXT-ANT3 *2)	Bowtie antenna	2.70 dBi	Connector none		
	with antenna cable 2 & 11	(loss 0.69 dB) total antenna	gain: 2.01 dBi		
	with antenna cable 3 & 11	(loss 0.48 dB) total antenna	gain: 2.22 dBi		
		1 (loss 0.96 dB) total antenn			

## Note:

- \*1) The combination which has the highest antenna gain has been chosen for the test.
- \*2) Refer to the test report: 11392143S-B-R4 \cdot 11826181S.
- \*3) The above antenna information was provided from customer and for more detailed features description, please refer the manufacturer's specification or user's manual.

# Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948 Doc No: 17-EM-F0876 / 2.0



Doc No: 17-EM-F0876 / 2.0

Page : 11 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# 6.4. Test Mode Applicability and Tested Channel Detail

Test item	Modulation Type	Frequency (MHz)
Antenna Port Conducted Measurement	GFSK	2405 2440 2480
Radiated Emissions (Above 1GHz)	GFSK	2405 2440 2480
Radiated Emissions (Below 1GHz)	GFSK	2480

#### Note:

- 1. For below 1 GHz radiated emission was performed the worst case from determine the combinations of above 1GHz.
- 2. The fundamental of the EUT was investigated in two orthogonal axes X/Y, it was determined that Y axis was worst-case. Therefore, all final radiated testing was performed with the EUT in Y axis.
- 3. For 9 kHz to 30 MHz, the loop antenna is studied in three polarization parallel/vertical/ground parallel directions, and parallel polarization has been determined to be the worst case of pre-scan radiation.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan



Page : 12 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# 7. Test Equipment

Test Equipment List							
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval		
	Radiated Spurious Emission						
Spectrum Analyzer	Keysight	N9010A	MY56070827	Nov. 8, 2018	1 year		
EMI Test Receiver	Rohde & Schwarz	ESR7	101754	Nov. 8, 2018	1 year		
Loop Antenna	ETS lindgren	6502	00213440	Dec. 11, 2018	1 year		
Trilog- Broadband Antenna with 5dB Attenuator	Schwarzbeck & EMCI	VULB 9168 & N-6-05	774 & AT- N0538	Jan. 14, 2019	1 year		
Horn Antenna (1-18 GHz)	Schwarzbeck	BBHA 9120 D	01690	Jan. 25, 2019	1 year		
Horn Antenna (18-40 GHz)	Schwarzbeck	BBHA 9170	781	Jan.16, 2019	1 year		
Preamplifier (30-1000 MHz)	EMCI	EMC330E	980405	Jan. 30, 2019	1 year		
Preamplifier (1-18 GHz)	EMCI	EMC051835BE	980406	Jan. 29, 2019	1 year		
Preamplifier (18-40GHz)	EMCI	EMC184040SE E	980426	May 8, 2019	1 year		
RF Cable (9 KHz~18 GHz)	UltraPhase & EMC Instrument	A1K50- UP0358- A1K50- 1500&EMC106 -NM-SM- 2500/7000	170111- 4&170219/170 102	Jan. 29, 2019	1 year		
RF Cable (18 GHz~40 GHz)	UltraPhase	K1K50- UP0264- K1K50- 2500/2500/600	170214- 2/170214- 6/170111-1	Jan. 29, 2019	1 year		

UL Software				
Description Name Version				
Radiated measurement	EZ_EMC	1.1.4.2		

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948 Doc No: 17-EM-F0876 / 2.0



Page : 13 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# 8. Description of Test Setup

# **EUT&Support Equipment**

Item	Equipment	Brand Name	Model Name	S/N
A1	Radio frequency module for Small-sized Digital Telemetry Systems	TAIYOYUDEN	MR-2400MA	-
A2	Dipole Antenna	-	DA-2450-05RP- SMA-02	-
В	Telemetry Receiver	Kyowa	MRS-114A	EM013Rx4A
C	AC Adapter	Kyowa	UN1318-1215-EDS	H05-0367636
F	Jig	Kyowa	AA-562-5050	-


# **List of cables used**

Item	Equipment	Cable	Connector	Length (m)
1	Relay harness	Unshielded	Unshielded	0.2
2	DC	Unshielded	Unshielded	1.8
3	AC	Unshielded	Unshielded	1.5
4	Antenna	Shielded	Shielded	0.15

# **Test Setup**

Controlled using a bespoke application (MRSctrl\_v0.07) on a test Notebook. The application was used to enable a continuous transmission mode and to select the test channels, data rates, modulation schemes and power setting as required.

# **Setup Diagram for Test**



#### **Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948



Page : 14 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# 9. Test Results

# 9.1. Conducted output power


# **Requirements**

For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

# **Test Procedure**

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

# **Test Setup**



The loss between RF output port of the EUT and the input port of the Power Meter has been taken into consideration.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948



Page : 15 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# **Test Data**

## **FOR PEAK POWER**

Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
2405	2.07	3.16	30	Pass
2440	2.06	3.14	30	Pass
2480	2.00	3	30	Pass

# FOR AVERAGE POWER

# For reference

Frequency (MHz)	Average Power (mW)	Average Power (dBm)
2405	1.91	2.82
2440	1.90	2.78
2480	1.83	2.63

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948 Doc No: 17-EM-F0876 / 2.0



Page : 16 of 28
Issued date : Aug. 28, 2019
FCC ID : 2AJE9MR-2400MA

# 9.2. Radiated Spurious Emission

# **Requirements**

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948



Page : 17 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# **Test Procedures**

[For  $9 \text{ kHz} \sim 30 \text{ MHz}$ ]

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 30MHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### [For above 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters (for  $30\text{MHz} \sim 1\text{GHz}$ ) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan



Page : 18 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

#### Note:

a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.

- b. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.


Configuration	Ave	rage
Configuration	RBW VBW	
2.4G Wireless	1MHz	2 kHz

Note: Refer to original report No. 11392143S-B-R4 for duty cycle.

d. All modes of operation were investigated and the worst-case emissions are reported.

## **Test Setup**

<Frequency Range 9 kHz ~ 30 MHz>

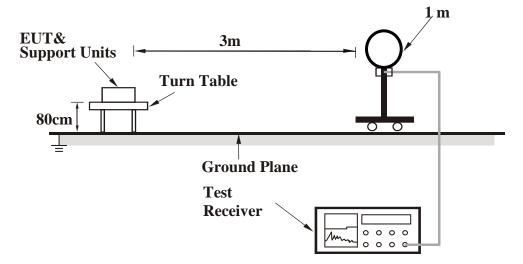

#### Underwriters Laboratories Taiwan Co., Ltd.


Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948




Page : 19 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# <Frequency Range 30 MHz ~ 1 GHz >

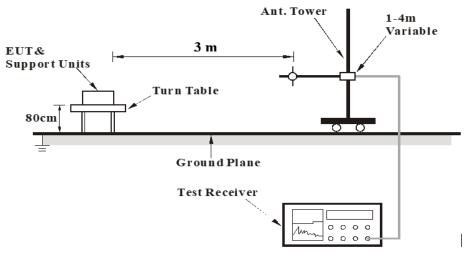

# < Frequency Range above 1 GHz>

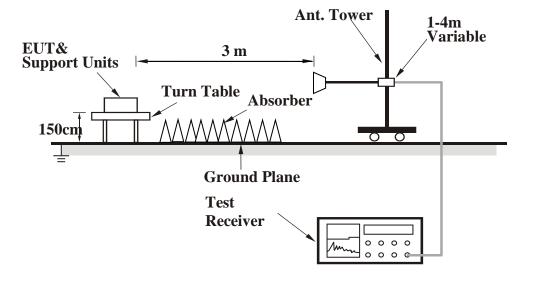

For the actual test configuration, please refer to the Setup Configurations.

## **Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948



Page : 20 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# **Test Data**

#### **Above 1GHz Data**

<b>EUT Test Condition</b>		Measurement Detail		
Frequency	2405 MHz	Frequency Range	1 GHz ~ 26.5 GHz	

		Antenna Pola	rity & Test I	Distance: Hori	zontal at 3 m		
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2333.800	60.48	-7.61	52.87	74.00	-21.13	peak
@	2405.000	99.76	-7.59	92.17	-	-	peak
-	2390.000	41.69	-7.60	34.09	54.00	-19.91	AVG
@	2405.000	99.22	-7.59	91.63	-	-	AVG
*	4810.000	47.80	-3.07	44.73	74.00	-29.27	peak
#	7215.000	42.51	3.52	46.03	72.17	-26.14	peak
		Antenna Po	larity & Test	Distance: Ver	rtical at 3 m		
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2334.200	65.68	-7.61	58.07	74.00	-15.93	peak
@	2405.000	106.63	-7.59	99.04	-	-	peak
-	2390.000	42.13	-7.60	34.53	54.00	-19.47	AVG
@	2405.000	106.06	-7.59	98.47	-	-	AVG
*	4810.000	52.24	-3.07	49.17	74.00	-24.83	peak
#	7215.000	41.80	3.52	45.32	79.04	-33.72	peak

#### Remarks:

- 1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
- 2. Margin(dB) = Result value (dBuV/m) Limit value (dBuV/m).
- 3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) Preamp Factor (dB).
- 4. "@": Fundamental Frequency.
- 5. " # ": The radiated frequency is out of the restricted band.
- 6. " \* ": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
- 7. The other emission levels were very low against the limit.

## **Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948 Doc No: 17-EM-F0876 / 2.0



Doc No: 17-EM-F0876 / 2.0

Page : 21 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

<b>EUT Test Condition</b>		Measurement Detail		
Frequency	2440 MHz	Frequency Range	1 GHz ~ 26.5 GHz	

		Antenna Pola	rity & Test I	Distance: Hori	zontal at 3 m		
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2390.000	62.22	-7.60	54.62	74.00	-19.38	peak
<u>@</u>	2440.000	100.14	-7.70	92.44	-	-	peak
-	2494.000	53.94	-7.60	46.34	74.00	-27.66	peak
-	2390.000	41.64	-7.60	34.04	54.00	-19.96	AVG
@	2440.000	99.58	-7.70	91.88	-	-	AVG
-	2488.600	41.44	-7.61	33.83	54.00	-20.17	AVG
*	4880.000	47.64	-3.02	44.62	74.00	-29.38	peak
*	7320.000	43.63	3.63	47.26	74.00	-26.74	peak
		Antenna Po	larity & Test	Distance: Vei	rtical at 3 m		
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2390.000	67.86	-7.60	60.26	74.00	-13.74	peak
<u>@</u>	2440.000	106.77	-7.70	99.07	-	-	peak
-	2490.400	53.70	-7.61	46.09	74.00	-27.91	peak
-	2363.600	42.53	-7.68	34.85	54.00	-19.15	AVG
<u>@</u>	2440.000	106.26	-7.70	98.56	-	-	AVG
-	2488.400	41.42	-7.61	33.81	54.00	-20.19	AVG
*	4880.000	52.80	-3.02	49.78	74.00	-24.22	peak
*	7320,000	41.55	3.63	45.18	74.00	-28.82	peak

#### Remarks:

- 1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
- 2. Margin(dB) = Result value (dBuV/m) Limit value (dBuV/m).
- 3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) Preamp Factor (dB).
- 4. "@": Fundamental Frequency.
- 5. " \* ": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
- 6. The other emission levels were very low against the limit.

## **Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan



Doc No: 17-EM-F0876 / 2.0

Page : 22 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

EUT Test Condition		Measurement Detail		
Frequency	2480 MHz	Frequency Range	1 GHz ~ 26.5 GHz	

	Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark	
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)		
@	2480.000	99.66	-7.64	92.02	-	-	peak	
-	2483.500	63.13	-7.63	55.50	74.00	-18.50	peak	
@	2480.000	99.17	-7.64	91.53	-	-	AVG	
-	2483.500	43.10	-7.63	35.47	54.00	-18.53	AVG	
*	4960.000	50.74	-2.89	47.85	74.00	-26.15	peak	
*	7440.000	41.83	3.87	45.70	74.00	-28.30	peak	
		Antenna Po	larity & Test	Distance: Vei	rtical at 3 m			
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark	
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)		
@	2480.000	107.15	-7.64	99.51	-	-	peak	
-	2483.500	70.43	-7.63	62.80	74.00	-11.20	peak	
@	2480.000	106.38	-7.64	98.74	-	-	AVG	
-	2483.500	45.63	-7.63	38.00	54.00	-16.00	AVG	
*	4960.000	54.92	-2.89	52.03	74.00	-21.97	peak	
*	7440.000	41.44	3.87	45.31	74.00	-28.69	peak	

#### Remarks:

- 1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
- 2. Margin(dB) = Result value (dBuV/m) Limit value (dBuV/m).
- 3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) Preamp Factor (dB).
- 4. "@": Fundamental Frequency.
- 5. " \* ": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
- 6. The other emission levels were very low against the limit.

## **Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan



Doc No: 17-EM-F0876 / 2.0

Page : 23 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

#### $9 \text{ kHz} \sim 30 \text{ MHz Data}$ :

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

No non-compliance noted:

#### KDB 414788 D01 OATS and Chamber Correlation Justification

- Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
- OATs and chamber correlation testing had been performed and chamber measured test results is the worst case test result.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan



Page : 24 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA


## 30 MHz ~ 1 GHz Data

<b>EUT Test Condition</b>		Measurement Detail			
Frequency	2480 MHz	Frequency Range	30 MHz ~ 1 GHz		

#### **Horizontal**



# Vertical

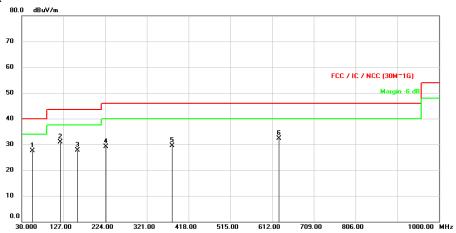

# Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948



Page : 25 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

	Antenna Polarity & Test Distance: Horizontal at 3 m								
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark		
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)			
-	131.9793	50.61	-16.68	33.93	43.50	-9.57	peak		
-	159.9800	49.87	-14.97	34.90	43.50	-8.60	peak		
-	224.4850	51.24	-17.34	33.90	46.00	-12.10	peak		
-	392.3597	44.27	-11.68	32.59	46.00	-13.41	peak		
-	529.8086	39.41	-8.78	30.63	46.00	-15.37	peak		
-	717.1157	40.11	-5.17	34.94	46.00	-11.06	peak		
	Antenna Polarity & Test Distance: Vertical at 3 m								
Notation	Notation Frequency Reading Correct Result Limit Margin Rem								
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)			
-	55.4463	42.70	-15.21	27.49	40.00	-12.51	peak		
-	119.9513	48.82	-17.83	30.99	43.50	-12.51	peak		
-	159.9800	42.76	-14.97	27.79	43.50	-15.71	peak		
-	226.8453	46.25	-17.12	29.13	46.00	-16.87	peak		
-	380.0730	41.62	-12.05	29.57	46.00	-16.43	peak		
-	628.7486	38.91	-6.59	32.32	46.00	-13.68	peak		

#### Remarks:

- 1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
- $2. \quad Margin(dB) = Result \ value \ (dBuV/m) \ \ Limit \ value \ (dBuV/m).$
- $\label{eq:correction} \textbf{3.} \quad \text{Correction Factor } (dB/m) = \text{Antenna Factor } (dBuV/m) + \text{Cable Loss } (dB) \text{ Preamp Factor } (dB).$
- 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
- 5. The other emission levels were very low against the limit.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948 Doc No: 17-EM-F0876 / 2.0



Page : 26 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# **Appendix I Radiated Band Edge Measurement**

## **Peak**

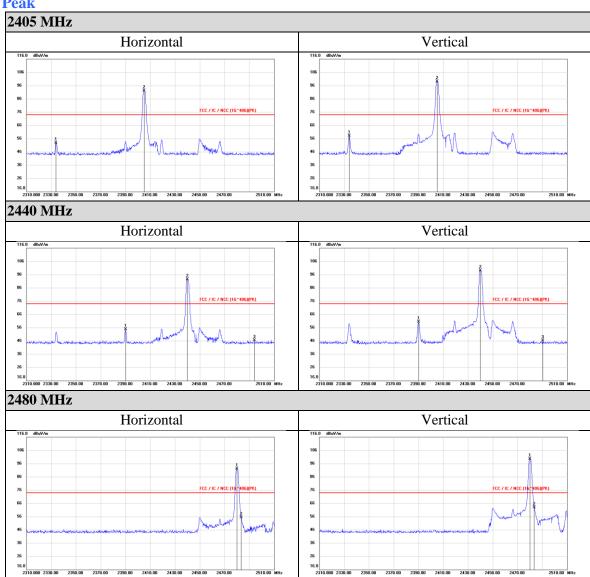


Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000 Facsimile (FAX) :+886-3-583-7948



Page : 27 of 28
Issued date : Aug. 28, 2019
FCC ID : 2AJE9MR-2400MA

# **Average**

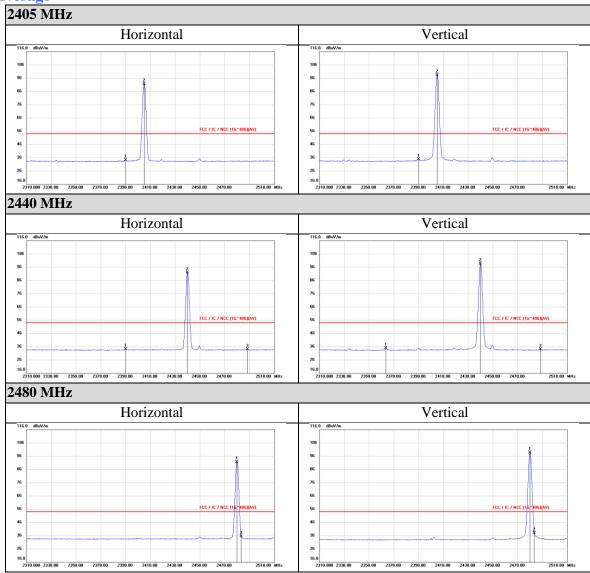

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000 Facsimile (FAX ) :+886-3-583-7948 Doc No: 17-EM-F0876 / 2.0



Doc No: 17-EM-F0876 / 2.0

Page : 28 of 28 Issued date : Aug. 28, 2019 FCC ID : 2AJE9MR-2400MA

# **Appendix II Radiated Spurious Emission Measurement**

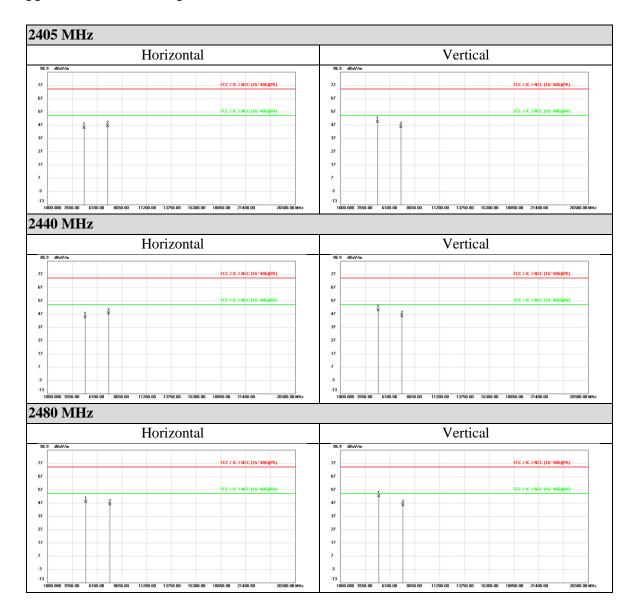

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan