# **FCC Test Report**

Report No.: AGC07549160701FE03

FCC ID : 2AJFDON14AA011

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Wireless Transmitter

**BRAND NAME** : Onn, sharper image

MODEL NAME : ONA14AA011, SHP921

**CLIENT** : Shantou Yihao Industrial Co,Ltd

**DATE OF ISSUE** : Aug.12, 2016

**STANDARD(S)** : FCC Part 15.239

**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

# **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 20

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug.12, 2016	Valid	Original Report

Report No.: AGC07549160701FE03 Page 3 of 20

# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	6
5. SYSTEM TEST CONFIGURATION	6
5.1. EQUIPMENT USED IN EUT SYSTEM	6
5.2. SUMMARY OF TEST RESULTS	6
6. TEST FACILITY	7
7. RADIATED EMISSION	8
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SETUP	9
7.3. TEST RESULT	10
8. BANDWIDTH	13
8.1. MEASUREMENT PROCEDURE	13
8.2. TEST SETUP	13
8.3. TEST RESULT	14
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	15
APPENDIX B: PHOTOGRAPHS OF EUT	16

Page 4 of 20

### 1. VERIFICATION OF CONFORMITY

Applicant	Shantou Yihao Industrial Co,Ltd
Address	Gounan industrial park, Gurao town, Chaoyang district Shantou city
Manufacturer	Shantou Yihao Industrial Co,Ltd
Address	Gounan industrial park, Gurao town, Chaoyang district Shantou city
Product Designation	Wireless Transmitter
Brand Name	Onn, sharper image
Test Model	ONA14AA011
Series Model	SHP921
Model Difference	All the same except for the model name and logo.
Date of test	Aug.03, 2016 to Aug.11, 2016
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF (2013-03-01)

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.239.

Max Zhang(Zhang Yi) Aug. 12, 2016

Reviewed by

Bart Xie(Xie Xiaobin)) Aug. 12, 2016

Approved by

Solger Zhang(Zhang Hongyi)
Aug. 12, 2016
Aug. 12, 2016

Page 5 of 20

# 2. GENERAL INFORMATION

# 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	88.2MHz
Field Strength(3m)	45.74dBuV/m(AV)@3m
Modulation	FM
Number of channels	1
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	Components antenna
Power Supply	DC3.0V by battery

**NOTE:** 1. About the EUT, please refer to User's Manual.

Page 6 of 20

# 3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 3.18dB Radiated measurement: +/- 3.91dB

### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Transmitting mode

#### Note:

- 1. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 2. All the requirements have been tested by modulating the transmitter with a 2.5 kHz tone at a fixed level which set to the manufacturer's maximum rated input to the modulator.
- 3. Only the result of the worst case was recorded in the report, if no other cases.

## 5. SYSTEM TEST CONFIGURATION

### **5.1. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless Transmitter	ONA14AA011	2AJFDON14AA011	EUT
2	Smart Phone	HUAWEI P7	N/A	Support

### **5.2. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
15.239	Field Strength of Fundamental and Spurious Emission	Compliant
15.215	Bandwidth	Compliant

Page 7 of 20

# **6. TEST FACILITY**

Site Dongguan Precise Testing Service Co., Ltd.					
Location  Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China.					
FCC Registration No.	371540				
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.				

# **ALL TEST EQUIPMENT LIST**

Radiated Emission Test Site								
Name of Equipment	Manufacturer Model Number		Serial Number	Last Calibration	Due Calibration			
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 3, 2016	July 2, 2017			
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 3, 2016	July 2, 2017			
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 3, 2016	July 2, 2017			
RF Cable	SCHWARZBECK	AK9515E	96221	July 3, 2016	July 2, 2017			
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 3, 2016	June 2, 2017			
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A			
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 3, 2016	June 2, 2017			
Spectrum analyzer	Agilent	E4407B	MY46185649	June 3, 2016	June 2, 2017			

Page 8 of 20

### 7. RADIATED EMISSION

### 7.1. MEASUREMENT PROCEDURE

- 1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground and opposite the horn antenna. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
- 7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 8. Only the worst case is reported.


The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP


Report No.: AGC07549160701FE03 Page 9 of 20

### 7.2. TEST SETUP

# Radiated Emission Test-Setup Frequency Below 30MHz

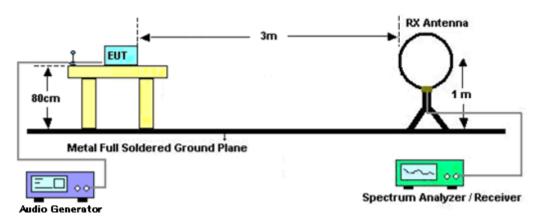

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

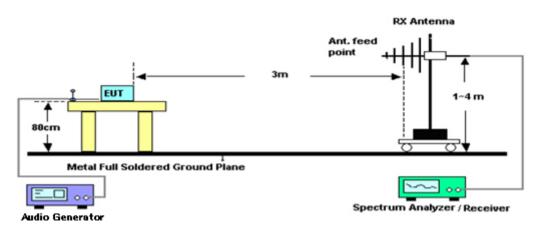

Page 10 of 20

# 7.3. TEST RESULT

For field strength of fundamental and band edge emission


Frequency MHz	Polarization	Level dB(uV/m)	Limit dB(uV/m)	Margin dB	Pass/Fail	Detector
88.200	Н	48.25	67.96	19.71	Pass	PK
88.200	Н	45.74	47.96	2.22	Pass	AV
88.200	V	44.92	67.96	23.04	Pass	PK
88.200	V	42.36	47.96	5.60	Pass	AV
Frequency MHz	Polarization	Level dB(uV/m)	Limit dB(uV/m)	Margin dB	Pass/Fail	Detector
88.100	Н	39.13	43.50	4.37	Pass	QP
88.100	V	34.84	43.50	8.66	Pass	QP
88.300	Н	38.74	43.50	4.76	Pass	QP
88.300	V	34.33	43.50	9.17	Pass	QP

Page 11 of 20

# RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

# RADIATED EMISSION BELOW 1GHZ-Horizontal

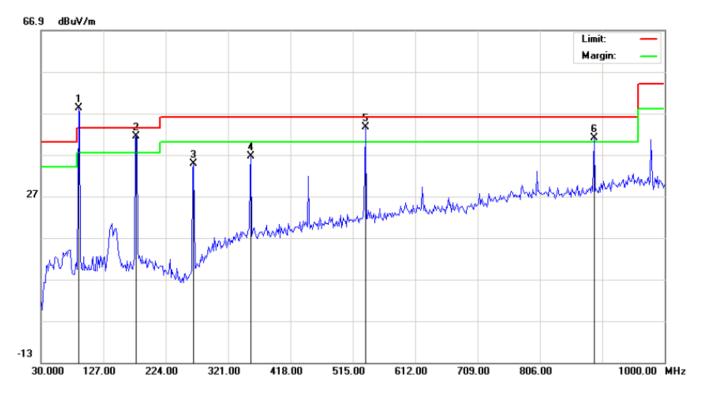


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	88.2000	47.75	0.50	48.25						
2	İ	178.7332	30.33	11.02	41.35	43.50	-2.15	peak			
3		267.6500	24.93	9.90	34.83	46.00	-11.17	peak			
4		356.5667	17.76	18.78	36.54	46.00	-9.46	peak			
5	İ	534.4000	21.45	22.06	43.51	46.00	-2.49	peak			
6	İ	890.0667	12.69	28.35	41.04	46.00	-4.96	peak			

**RESULT: PASS** 

Page 12 of 20

# **RADIATED EMISSION BELOW 1GHZ-Vertical**

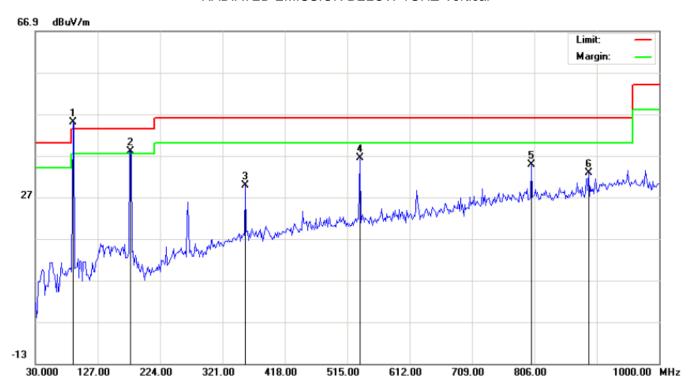

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	88.2000	40.18	4.74	44.92			peak			
2	ļ	178.7332	23.88	14.15	38.03	43.50	-5.47	peak			
3		356.5667	11.00	18.78	29.78	46.00	-16.22	peak			
4		534.4000	14.42	22.06	36.48	46.00	-9.52	peak			
5		801.1500	7.45	27.32	34.77	46.00	-11.23	peak			
6		890.0667	4.55	28.35	32.90	46.00	-13.10	peak			

### **RESULT: PASS**

### Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain, Margin=Measurement-Limit.
- 1. The "Factor" value can be calculated automatically by software of measurement system.
- 2. All test modes had been tested. The High channel is the worst case and recorded in the report.


Page 13 of 20

### 8. BANDWIDTH

### **8.1. MEASUREMENT PROCEDURE**

- 1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- 2. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- 3. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level.
- 4. Steps 1 through 3 might require iteration to adjust within the specified tolerances.

### 8.2. TEST SETUP

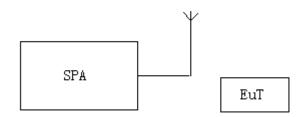

Page 14 of 20

### 8.3. TEST RESULT

Channel Frequency(MHz)	-20dB bandwidth (kHz)	Limit(kHz)
88.2	182.2	200


### **TEST PLOT OF BANDWIDTH**



Report No.: AGC07549160701FE03 Page 15 of 20

# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

RADIATED EMISSION TEST SETUP BELOW 1G

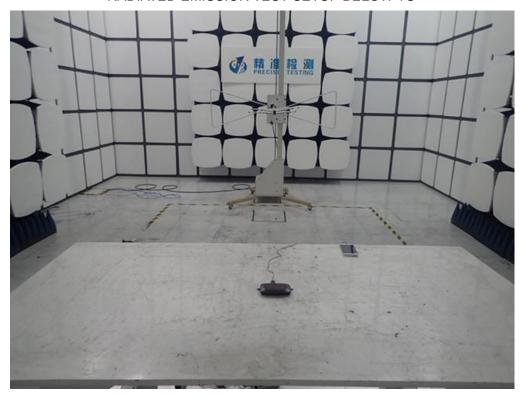

Page 16 of 20

# **APPENDIX B: PHOTOGRAPHS OF EUT**


ALL VIEW OF EUT



TOP VIEW OF EUT



# **BOTTOM VIEW OF EUT**

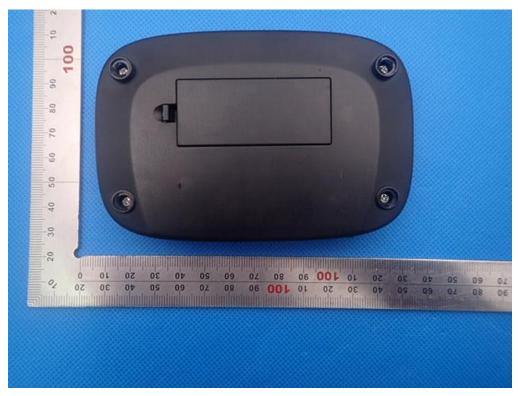

FRONT VIEW OF EUT



**BACK VIEW OF EUT** 




**LEFT VIEW OF EUT** 




**RIGHT VIEW OF EUT** 




**OPEN VIEW OF EUT** 

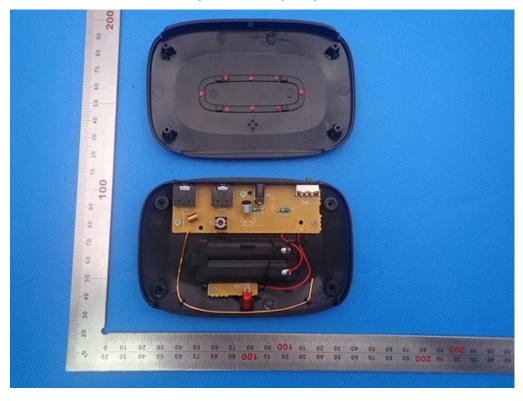

**INTERNAL VIEW OF EUT-1** 

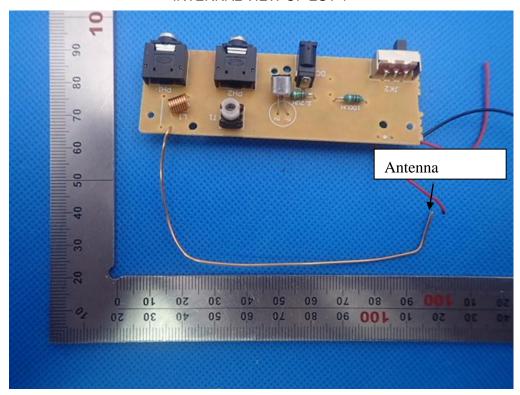

**INTERNAL VIEW OF EUT-2** 

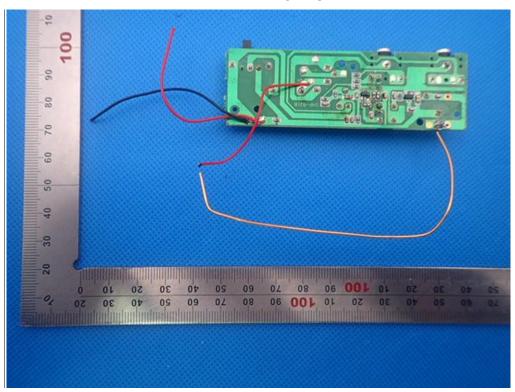

----END OF REPORT----