

Manufacturer:Shantou Chenghai Lihuang Plastic Toys Co.,Ltd
Manufacturer add.:Xinyuan Industrial Zone, Shengzhou
Village, Lianshang Town, Chenghai District, Shantou, China

天线规格承认书

Antenna Specification for Approval

客户名称

Customer Name: _____

产品名称: _

Product Name: _____ 2.4G 天线 全长35白色

客户型号:

Product Name: _____

产品料号:


Part NO.: _____ 19芯*0.12*1.4PVC

制 表:

Write By: _____

日 期:

Issued Date: _____ 2019-3-8

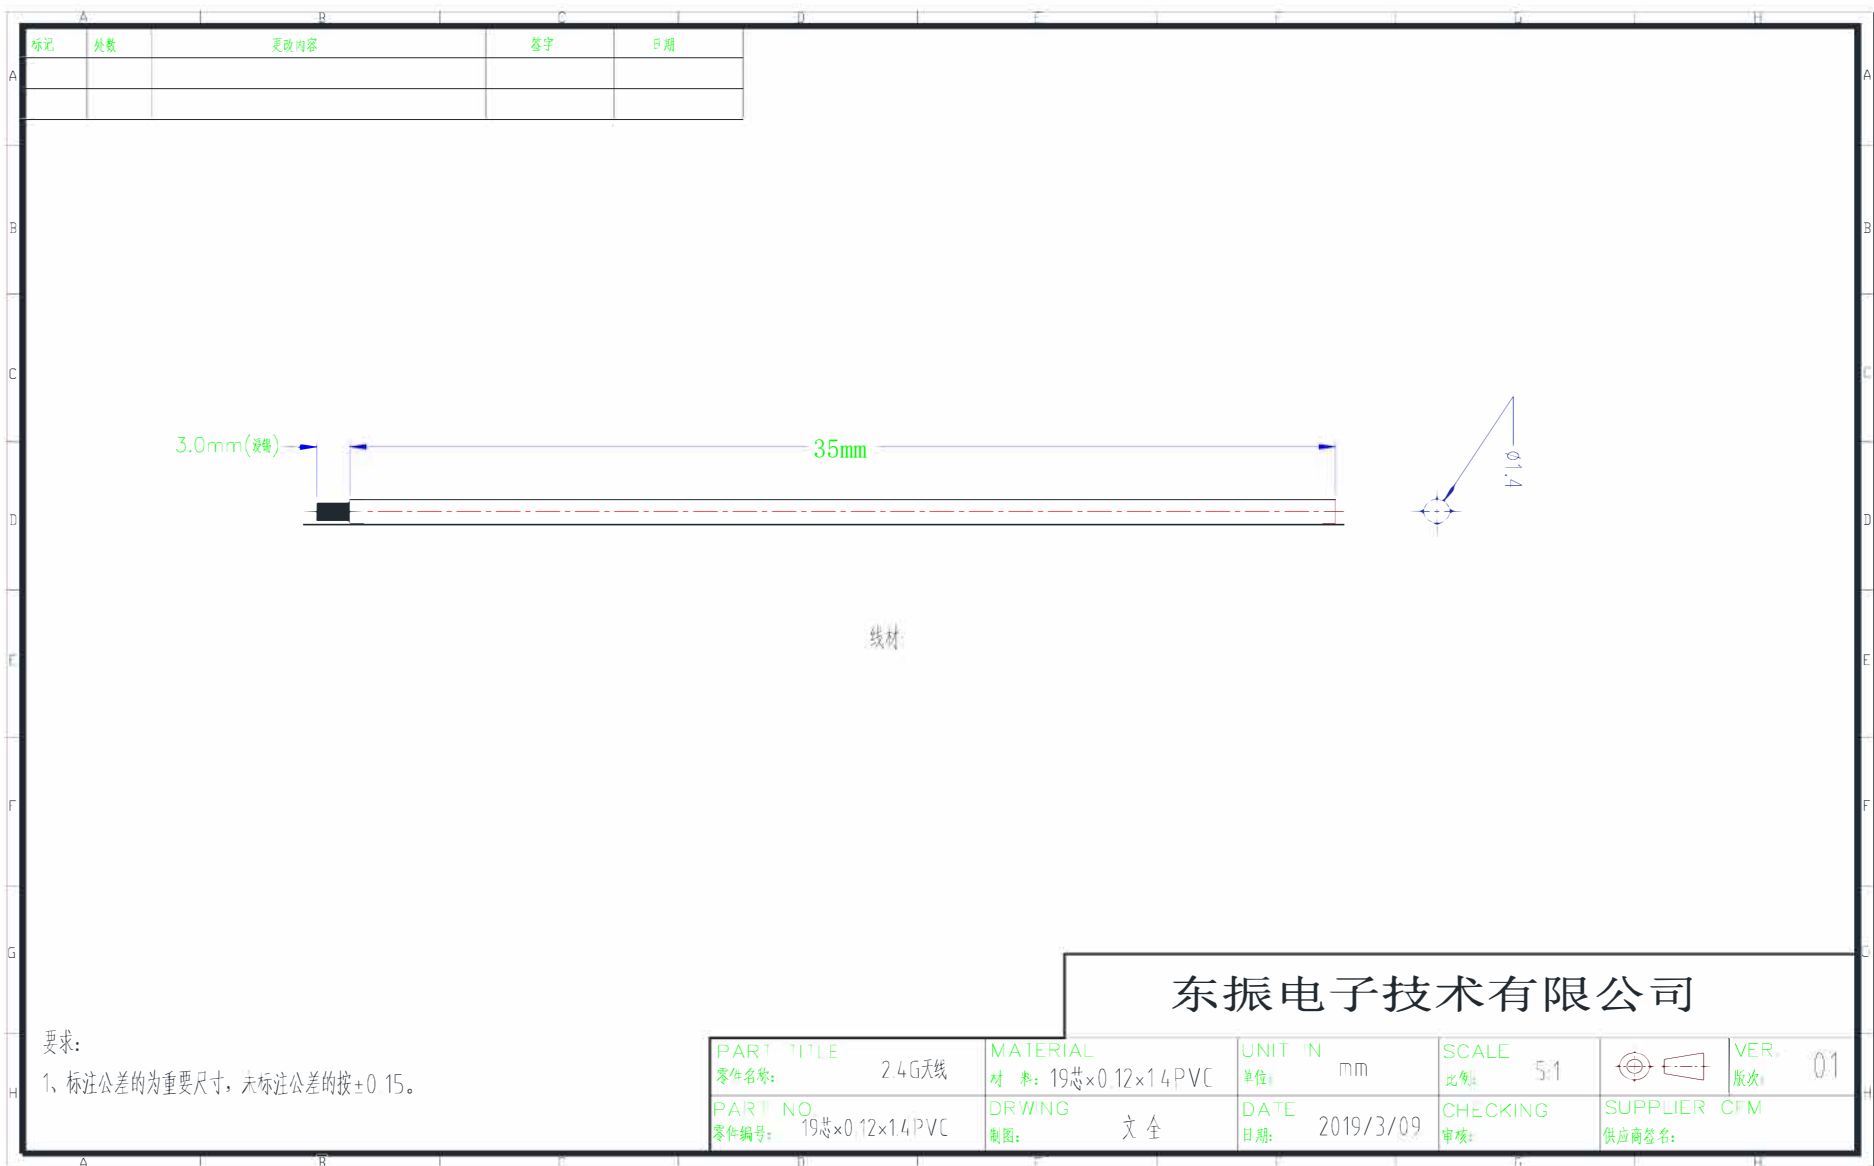

东振电子技术有限公司

PART TITLE 零件名称: 2.4G天线	MATERIAL 材料: 19芯×0.12×1.4PVC	UNIT IN 单位: mm	SCALE 比例: 5:1		VER. 版次: 01
PAR NO 零件编号: 19芯×0.12×1.4PVC	DRWING 制图: 文全	DATE 日期: 2019/3/09	CHECKING 审核:	SUPPLIER C/M 供应商签名:	

Product Specification

A. Electrical Characteristics Frequency

2400MHz ~2500MHz VSWR <1.0

Efficiency >20%

Impedance 50 Ohm

Polarization Line

Gain 0.17DBi

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.4 白色

Connector Type : NO

Dimension

C. Environmental

Operation Temperature - 30 °C ~ + 80 °C

Storage Temperature - 30 °C ~ + 85 °C

Test Equipment & Conditions



1. Network Analyzers :

Agilent 8753D 5071B


2. Communications Test Set:

Agilent E5515C

3. 3D Chamber Test System

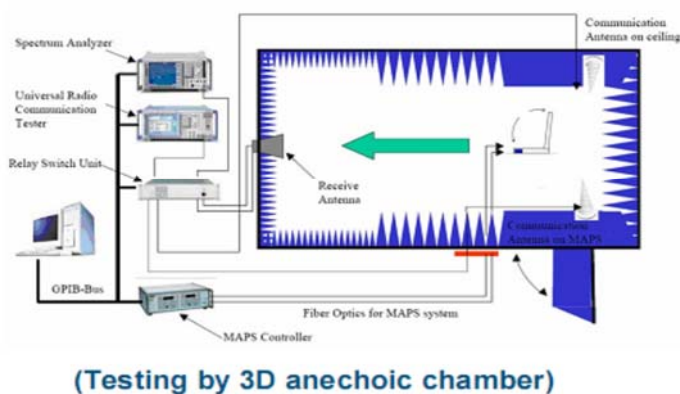

Phi axis test








Theta axis test

Effiency &Gain


2.40	-0.01
2.440	0.12
2.48	0.17

Radiation Pattern:

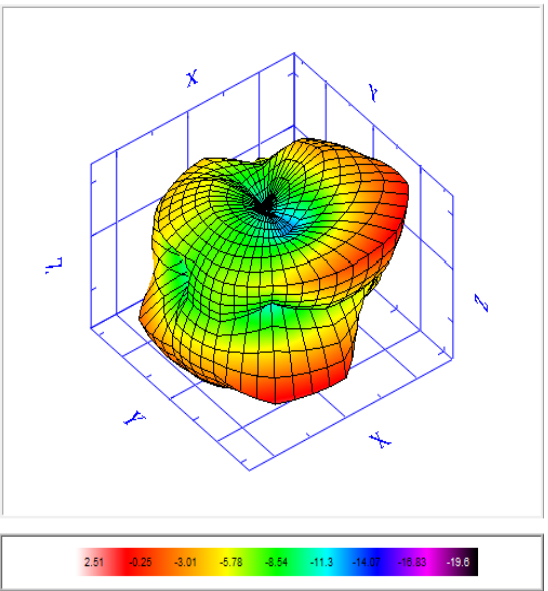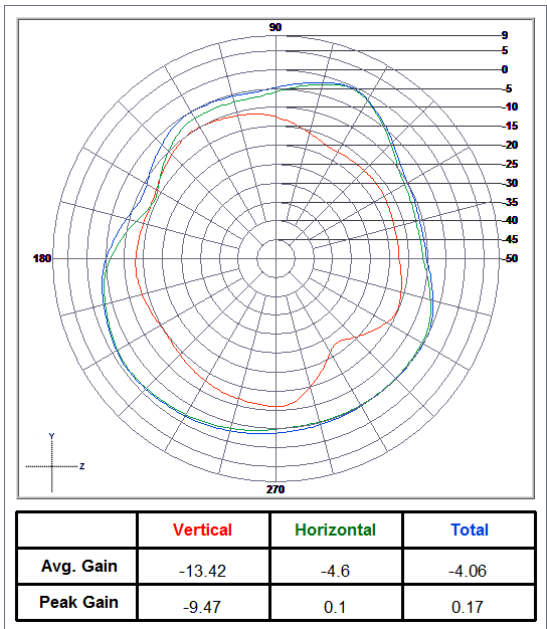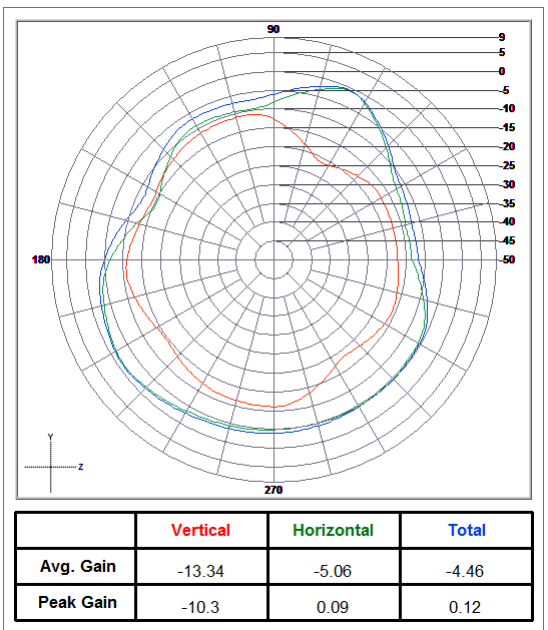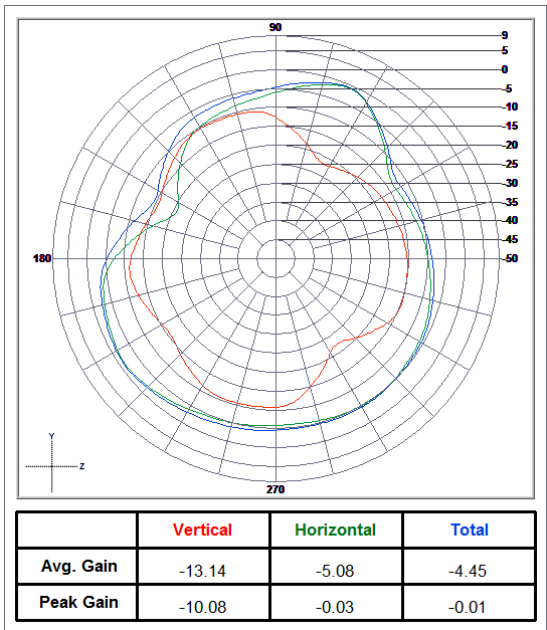

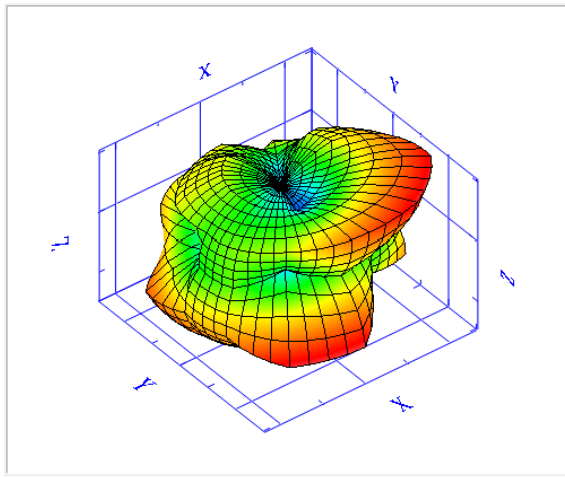

2.12 -0.3 -2.73 -5.16 -7.58 -10.01 -12.44 -14.86 -17.29

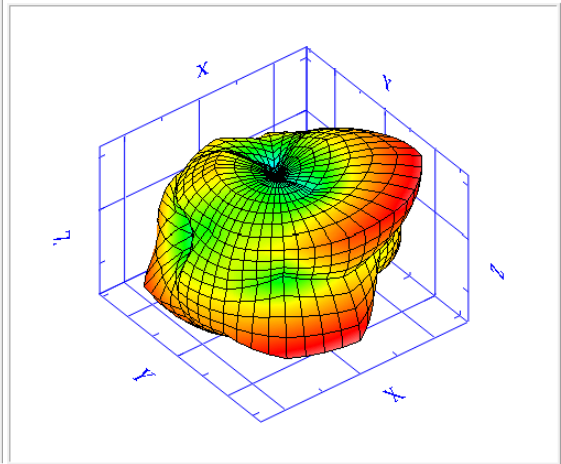

1.98 -0.58 -3.14 -5.7 -8.25 -10.81 -13.37 -15.93 -18.49