



## TEST REPORT

**Applicant:** PO FUNG ELECTRONIC (HK) INTERNATONAL GROUP  
COMPANY LIMITED

**Address:** Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan Road,  
Kowloon, Hong Kong

**Product Name:** Amateur Radio

**FCC ID:** 2AJGM-AR152PRO

**Standard(s):** FCC Part 15B  
ANSI C63.4-2014

**Report Number:** 2402A59151E-RF-00B

**Report Date:** 2025/3/14

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

**Reviewed By:** Pedro Yun

Title: Project Engineer

**Approved By:** Gavin Xu

Title: RF Supervisor

**Bay Area Compliance Laboratories Corp. (Dongguan)**  
No.12, Pulong East 1<sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China  
Tel: +86-769-86858888  
Fax: +86-769-86858891  
[www.baclcorp.com.cn](http://www.baclcorp.com.cn)

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

## CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>3</b>
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST .....	4
1.2 ACCESSORY INFORMATION.....	4
1.3 EQUIPMENT MODIFICATIONS.....	4
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
<b>3. DESCRIPTION OF TEST CONFIGURATION .....</b>	<b>6</b>
3.1 OPERATION FREQUENCY AND TEST CHANNEL:.....	6
3.2 DESCRIPTION OF TEST CONFIGURATION .....	6
3.3 EUT EXERCISE SOFTWARE.....	6
3.4 SUPPORT EQUIPMENT LIST AND DETAILS .....	6
3.5 SUPPORT CABLE LIST AND DETAILS .....	6
3.6 BLOCK DIAGRAM OF TEST SETUP.....	7
3.7 TEST FACILITY .....	9
3.8 MEASUREMENT UNCERTAINTY .....	9
<b>4. REQUIREMENTS AND TEST PROCEDURES.....</b>	<b>10</b>
4.1 AC LINE CONDUCTED EMISSIONS .....	10
4.1.1 Applicable Standard .....	10
4.1.2 EUT Setup.....	10
4.1.3 EMI Test Receiver Setup .....	11
4.1.4 Test Procedure.....	11
4.1.5 Corrected Amplitude & Margin Calculation .....	11
4.1.6 Test Result and Data .....	12
4.2 RADIATION SPURIOUS EMISSIONS .....	17
4.2.1 Applicable Standard .....	17
4.2.2 Test System Setup .....	17
4.2.3 EMI Test Receiver Setup .....	18
4.2.4 Test Procedure.....	19
4.2.5 Corrected Result & Margin Calculation .....	19
4.2.6 Test Result and Data .....	20
4.3 SCANNING RECEIVERS AND FREQUENCY CONVERTERS USED WITH SCANNING RECEIVERS.....	69
4.3.1 Applicable Standard .....	69
4.3.2 Test Procedure.....	69
4.3.3 Scanning Receivers and Frequency Converters Used with Scanning Receivers.....	70
<b>EXHIBIT A - EUT PHOTOGRAPHS .....</b>	<b>71</b>
<b>EXHIBIT B - TEST SETUP PHOTOGRAPHS.....</b>	<b>72</b>

**DOCUMENT REVISION HISTORY**

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402A59151E-RF-00B	Original Report	2025/3/14

## 1. GENERAL INFORMATION

### 1.1 General Description Of Equipment under Test

<b>EUT Name:</b>	Amateur Radio
<b>EUT Model:</b>	AR-152PRO
<b>Multiple Model:</b>	BF-152PRO, AT-152PRO
<b>Highest Operation Frequency<sup>▲</sup>:</b>	2480MHz
<b>Rated Input Voltage:</b>	DC 7.4V from battery or DC 5V from adapter
<b>Serial Number:</b>	2W4W-2
<b>EUT Received Date:</b>	2024/12/18
<b>EUT Received Status:</b>	Good

Note:

The multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.

### 1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter	Unknown	YZSJ-A207-05200-U	Input: AC100-240V 50/60Hz 0.35A Output: DC 5V 2A

### 1.3 Equipment Modifications

No modifications are made to the EUT during all test items.

## 2. SUMMARY OF TEST RESULTS

Standard Clause	Description of Test	Test Result
FCC§15.107	Conducted emissions	Compliant
FCC§15.109	Radiated emissions	Compliant
FCC§15.121(b)	Scanning receivers and frequency converters used with scanning receivers	Compliant

### 3. DESCRIPTION OF TEST CONFIGURATION

#### 3.1 Operation Frequency And Test Channel:

Operation Modes	Operation Frequency Range (MHz)	Test Frequency (MHz)
Scanning	108-136	108-136
	136-174	136-174
	220-260	220-260
	350-390	350-390
	400-520	400-520
Receiving	108-136	108.0125, 122, 135.9875
	136-174	136.0125, 155, 173.9875
	220-260	220.0125, 240, 259.9875
	350-390	350.0125, 370, 389.9875
	400-520	400.0125, 460, 519.9875

#### 3.2 Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user). The following summary table is showing all test modes to demonstrate in compliance with the standard:

Test Items	Test Mode(s)
<b>Radiated Spurious Emission :</b>	Test Mode 1: Charging & Scanning Test Mode 2: Charging & Receiving Test Mode 3: Discharging & Scanning or receiving(worst determined in mode 1 and 2)
<b>AC Line Conducted Emission</b>	Test Mode 1: Charging & Scanning Test Mode 2: Charging & Receiving

#### 3.3 EUT Exercise Software

No software was used to test.

#### 3.4 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
PO FUNG	Earphone	Unknown	2W4W-10
HP	RF Communications Test Set	8920A	3438A05201
HUAWEI	Smartphone	MAR-AL00	5GK4C19906004629


#### 3.5 Support Cable List and Details

Cable Description	Shielding Cable	Ferrite Core	Length (m)	From Port	To
Type-C Cable	No	No	1	Adapter	EUT
Antenna Cable	Yes	No	10	Antenna	8920A
Earphone Cable	No	No	1.2	EUT	Earphone
Type-C Cable	No	No	1.2	Smartphone	EUT

### 3.6 Block Diagram of Test Setup


AC Line conducted Emission:

**M1&M2:**

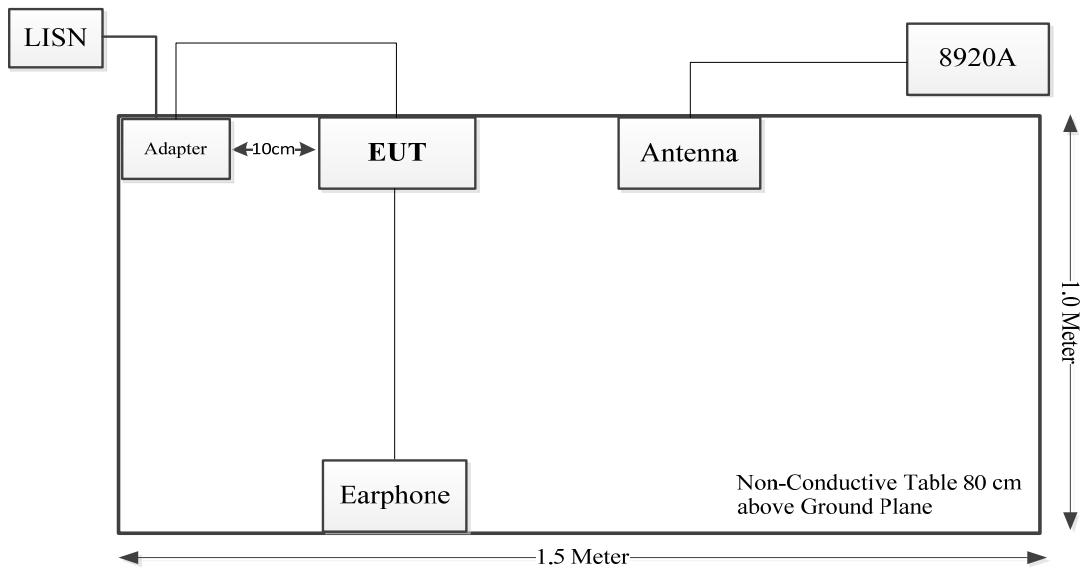


## Radiated Emission:

## M1&M2:

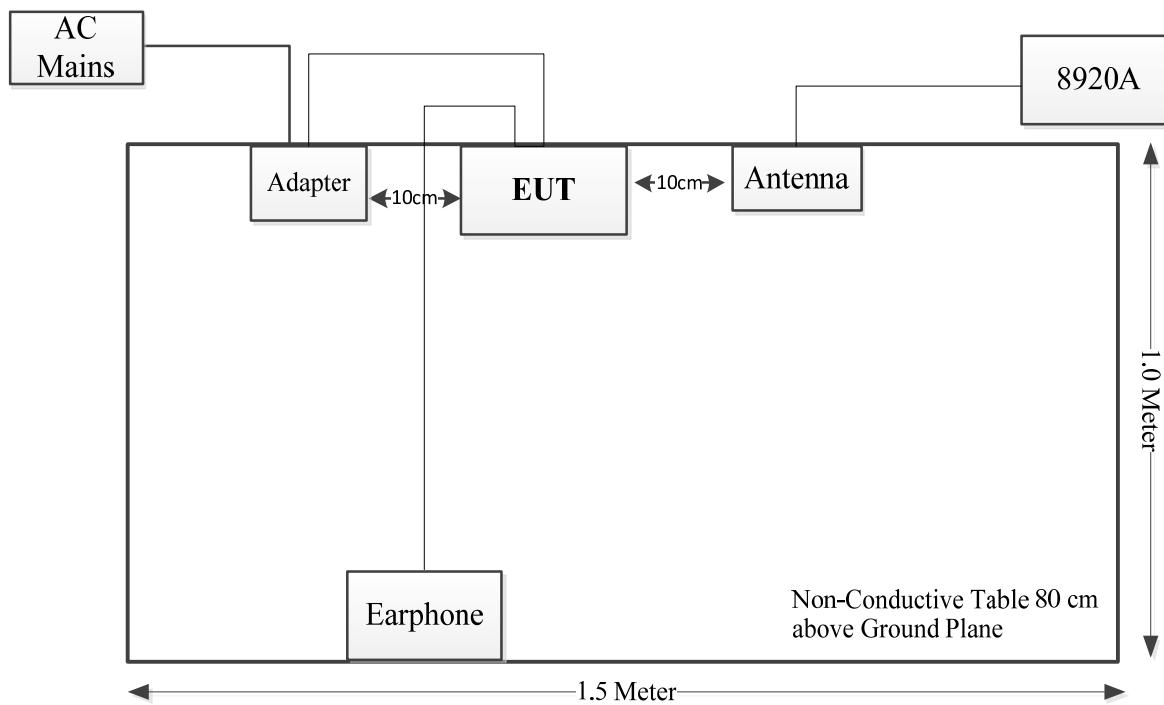

M3:

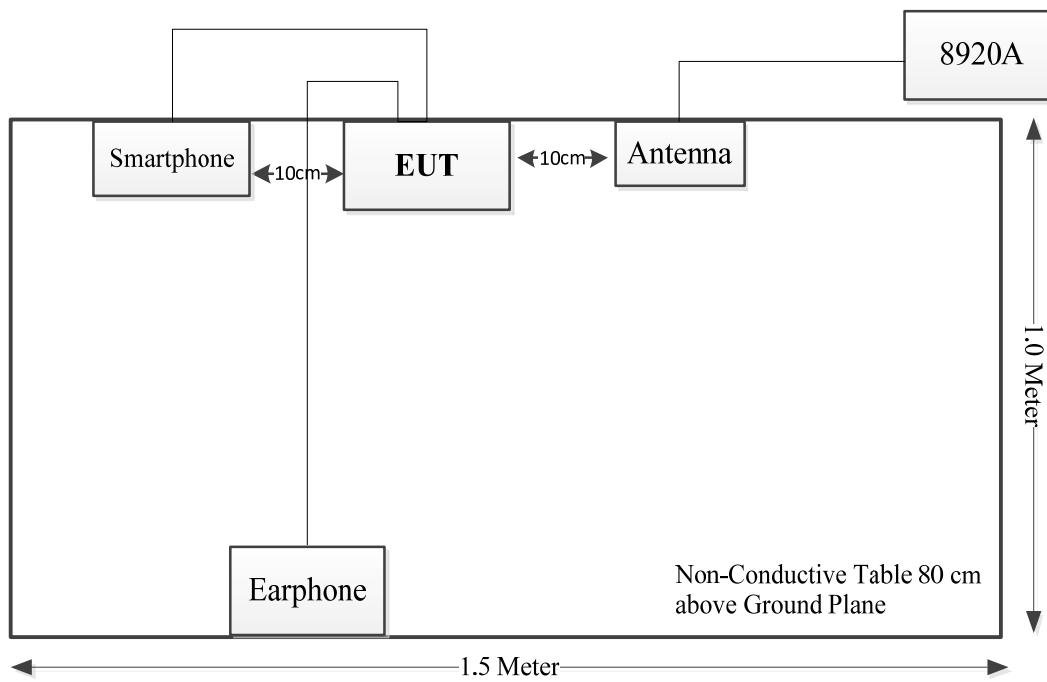

### 3.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

### 3.8 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz: 5.47 dB 26.5GHz~40GHz: 5.63 dB
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)
Temperature	±1°C
Humidity	±5%

## 4. REQUIREMENTS AND TEST PROCEDURES

### 4.1 AC Line Conducted Emissions

#### 4.1.1 Applicable Standard


FCC§15.107

(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$  H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

\*Decreases with the logarithm of the frequency.

#### 4.1.2 EUT Setup

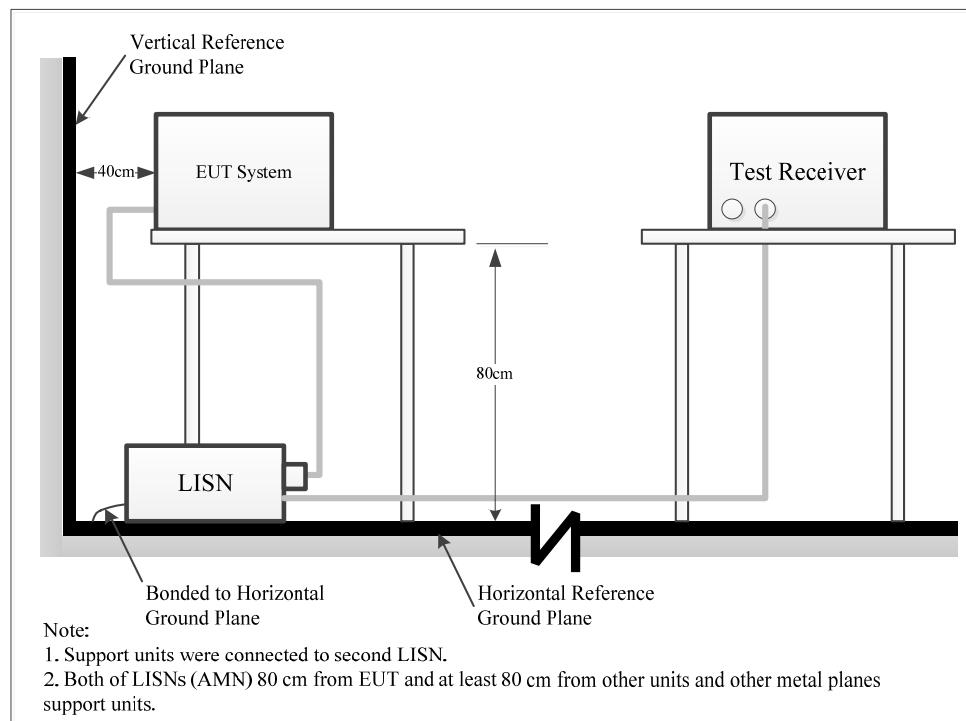

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

#### 4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

#### 4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

#### 4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

#### 4.1.6 Test Result and Data

Serial Number:	2W4W-2	Test Date:	2025/01/14
Test Site:	CE	Test Mode:	M1,M2
Tester:	Yukin Qiu	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	21	Relative Humidity: (%)	37	ATM Pressure: (kPa)	101.5
-------------------	----	------------------------	----	---------------------	-------

#### Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2024/9/5	2025/9/4
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2024/9/5	2025/9/4
R&S	EMI Test Receiver	ESCI	100035	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

M1(400-520MHz was tested):

Project No.: 2402A59151E-RF  
 Port: Line  
 Test Mode: M1  
 IF B/W 9kHz PK/AV


Serial No.: 2W4W-2  
 Tester: Yukin Qiu  
 Note:

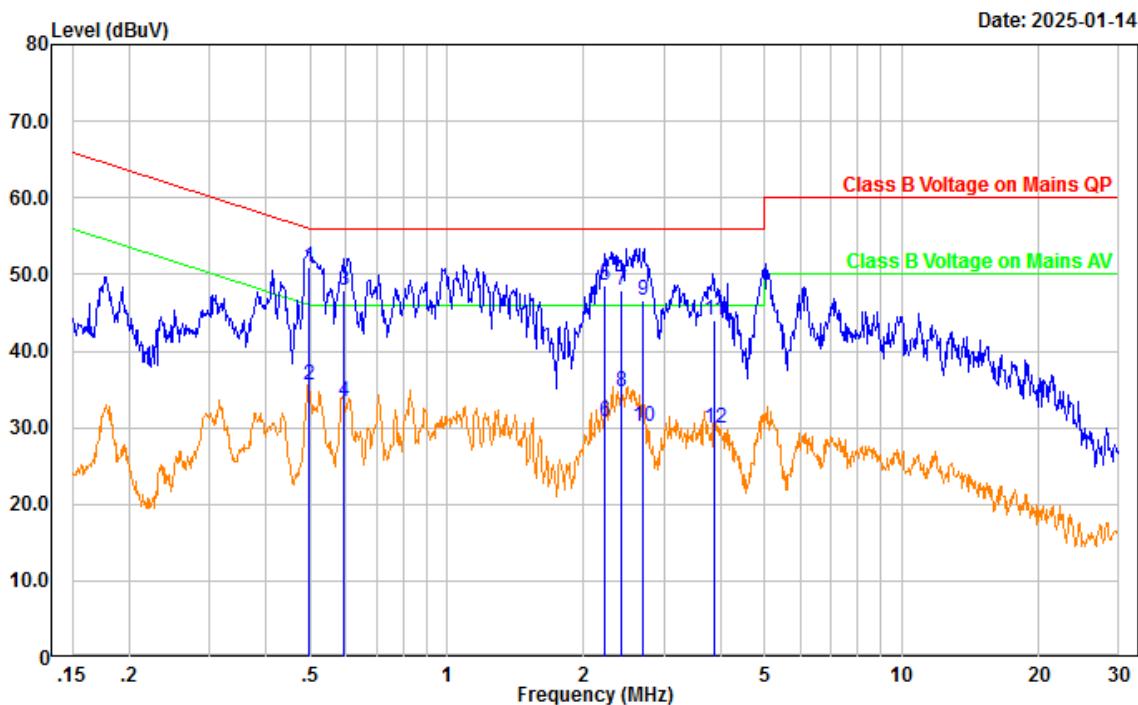

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.498	40.05	10.84	50.89	56.03	5.14	QP
2	0.498	24.76	10.84	35.60	46.03	10.43	Average
3	0.592	37.17	10.82	47.99	56.00	8.01	QP
4	0.592	22.49	10.82	33.31	46.00	12.69	Average
5	2.221	37.73	10.81	48.54	56.00	7.46	QP
6	2.221	19.95	10.81	30.76	46.00	15.24	Average
7	2.419	37.17	10.81	47.98	56.00	8.02	QP
8	2.419	23.83	10.81	34.64	46.00	11.36	Average
9	2.695	35.88	10.80	46.68	56.00	9.32	QP
10	2.695	19.29	10.80	30.09	46.00	15.91	Average
11	3.869	33.13	10.77	43.90	56.00	12.10	QP
12	3.869	19.15	10.77	29.92	46.00	16.08	Average

Project No.: 2402A59151E-RF  
 Port: neutral  
 Test Mode: M1  
 IF B/W 9kHz PK/AV

Serial No.: 2W4W-2  
 Tester: Yukin Qiu  
 Note:

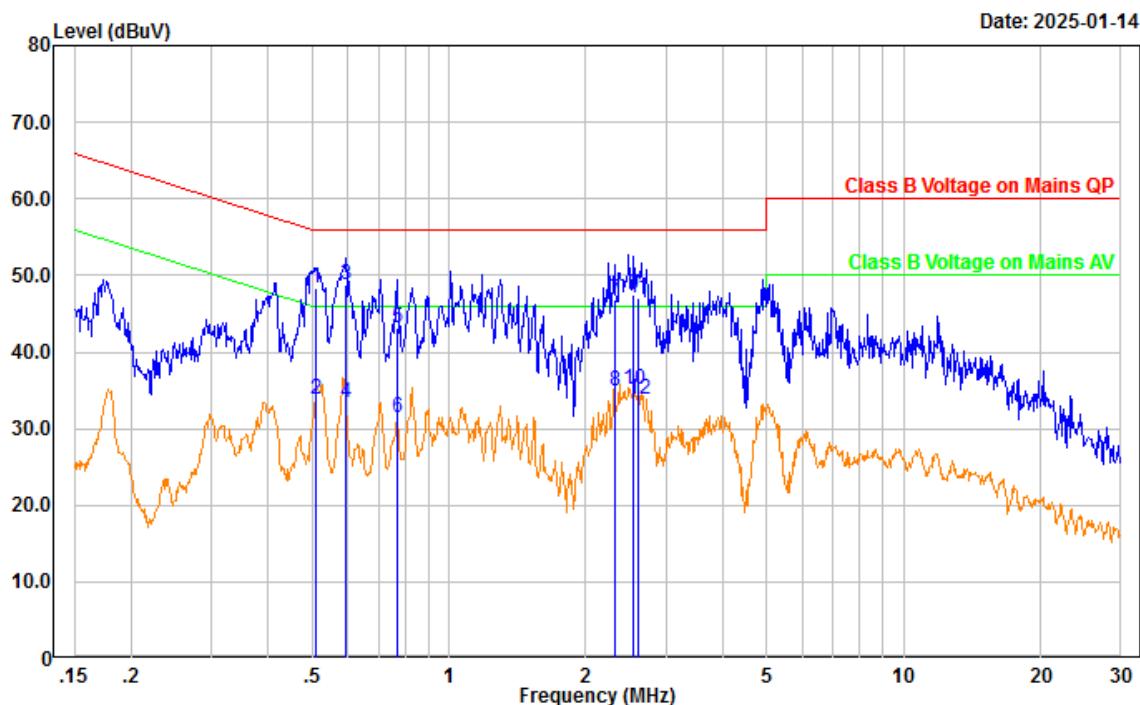


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.509	37.59	10.74	48.33	56.00	7.67	QP
2	0.509	23.06	10.74	33.80	46.00	12.20	Average
3	0.594	38.08	10.72	48.80	56.00	7.20	QP
4	0.594	22.63	10.72	33.35	46.00	12.65	Average
5	0.771	32.36	10.77	43.13	56.00	12.87	QP
6	0.771	20.57	10.77	31.34	46.00	14.66	Average
7	2.312	35.96	10.91	46.87	56.00	9.13	QP
8	2.312	24.07	10.91	34.98	46.00	11.02	Average
9	2.548	36.62	10.90	47.52	56.00	8.48	QP
10	2.548	24.14	10.90	35.04	46.00	10.96	Average
11	2.605	36.08	10.90	46.98	56.00	9.02	QP
12	2.605	22.96	10.90	33.86	46.00	12.14	Average

M2(519.9875MHz was tested):

Project No.: 2402A59151E-RF  
 Port: Line  
 Test Mode: M2  
 IF B/W 9kHz PK/AV


Serial No.: 2W4W-2  
 Tester: Yukin Qiu  
 Note:

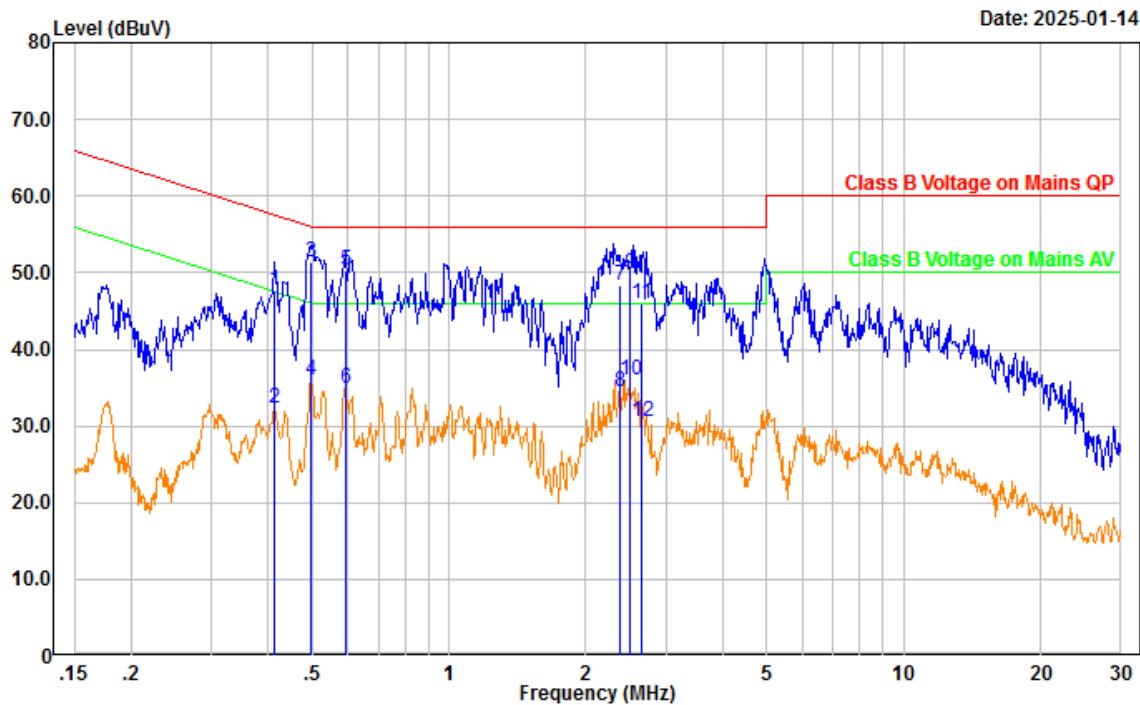

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.414	36.89	10.84	47.73	57.56	9.83	QP
2	0.414	21.47	10.84	32.31	47.56	15.25	Average
3	0.497	40.58	10.84	51.42	56.05	4.63	QP
4	0.497	25.21	10.84	36.05	46.05	10.00	Average
5	0.593	39.58	10.82	50.40	56.00	5.60	QP
6	0.593	24.11	10.82	34.93	46.00	11.07	Average
7	2.371	37.60	10.81	48.41	56.00	7.59	QP
8	2.371	23.64	10.81	34.45	46.00	11.55	Average
9	2.491	38.99	10.81	49.80	56.00	6.20	QP
10	2.491	25.16	10.81	35.97	46.00	10.03	Average
11	2.643	35.27	10.80	46.07	56.00	9.93	QP
12	2.643	19.83	10.80	30.63	46.00	15.37	Average

Project No.: 2402A59151E-RF  
 Port: neutral  
 Test Mode: M2  
 IF B/W 9kHz PK/AV

Serial No.: 2W4W-2  
 Tester: Yukin Qiu  
 Note:

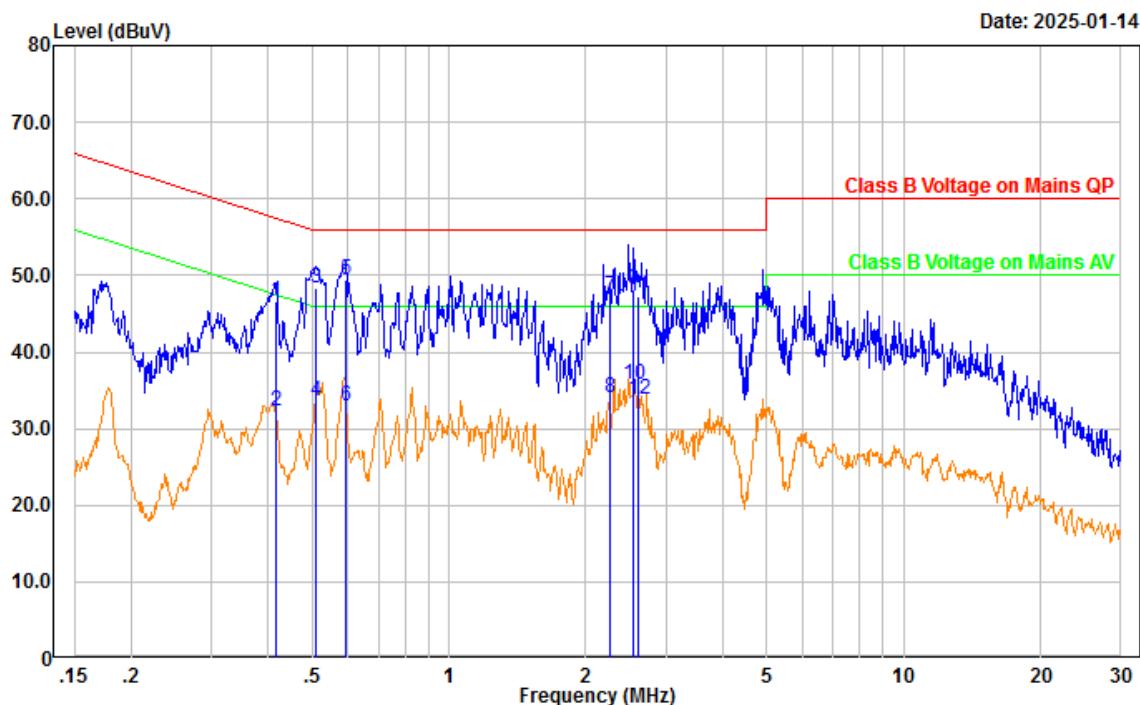

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.416	35.75	10.77	46.52	57.52	11.00	QP
2	0.416	21.54	10.77	32.31	47.52	15.21	Average
3	0.509	37.63	10.74	48.37	56.00	7.63	QP
4	0.509	22.83	10.74	33.57	46.00	12.43	Average
5	0.595	38.62	10.72	49.34	56.00	6.66	QP
6	0.595	22.29	10.72	33.01	46.00	12.99	Average
7	2.252	36.25	10.92	47.17	56.00	8.83	QP
8	2.252	23.06	10.92	33.98	46.00	12.02	Average
9	2.550	37.22	10.90	48.12	56.00	7.88	QP
10	2.550	24.82	10.90	35.72	46.00	10.28	Average
11	2.606	36.46	10.90	47.36	56.00	8.64	QP
12	2.606	22.96	10.90	33.86	46.00	12.14	Average

## 4.2 Radiation Spurious Emissions

### 4.2.1 Applicable Standard


FCC§15.109

(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

### 4.2.2 Test System Setup

Below 1GHz:

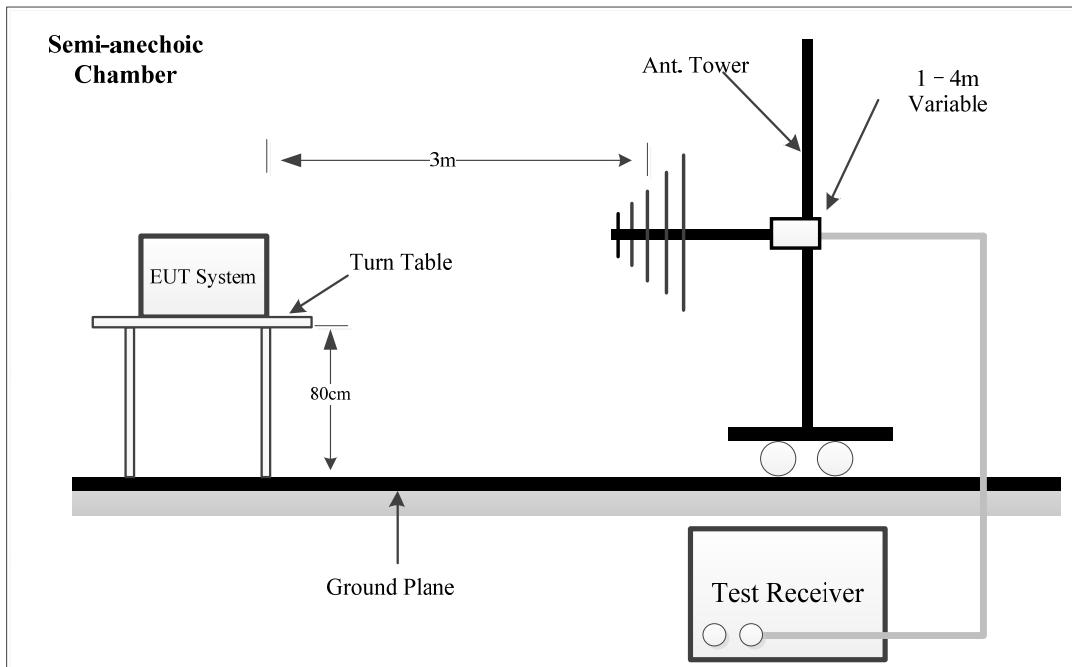

Above 1GHz:

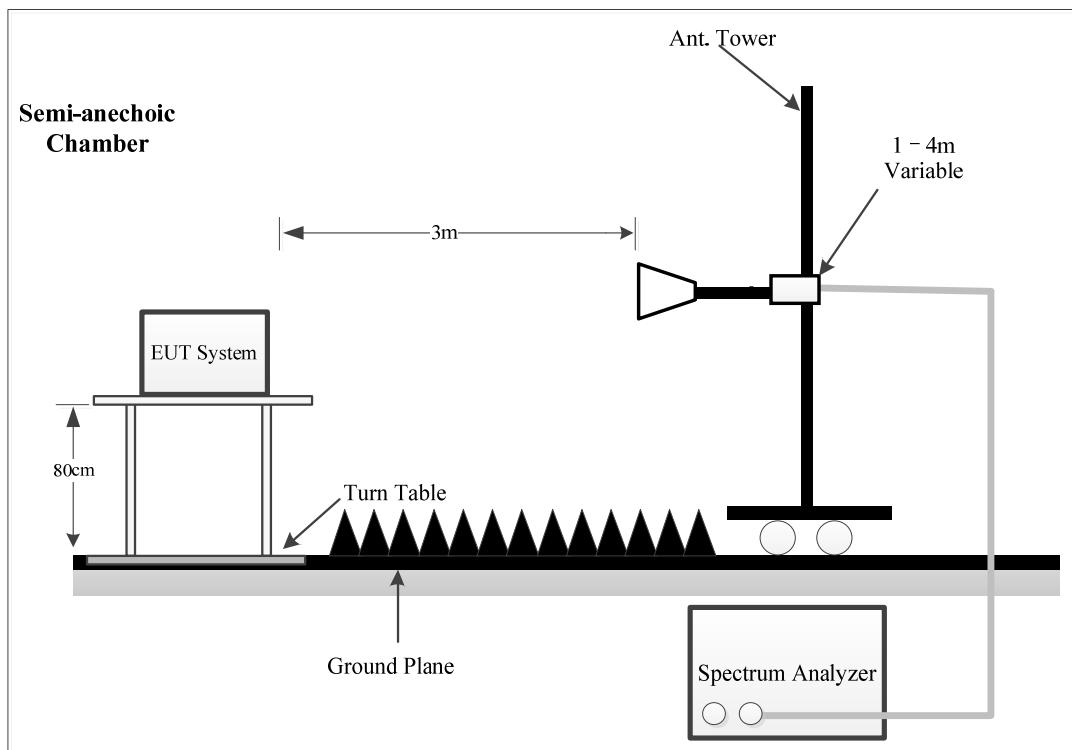

The radiated emission tests were performed at the 3 meters distance, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15B Class B limits.

#### 4.2.3 EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

30 MHz-1000 MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	PK	100 kHz	300 kHz	/	PK
	QP	/	/	120 kHz	QP

1 GHz- 13 GHz:

Pre-scan:

Measurement	RBW	Video B/W	Detector
PK	1MHz	3 MHz	PK
Ave.	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Measurement	RBW	Video B/W	Detector
PK	1MHz	3 MHz	PK
Ave.	1MHz	10 Hz	PK

#### 4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

If the maximized peak measured value complies with under the QP limit more than 6dB, then it is unnecessary to perform an QP measurement.

#### 4.2.5 Corrected Result & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

#### 4.2.6 Test Result and Data

Serial Number:	2W4W-2	Test Date:	2025/1/14
Test Site:	Chamber10m, Chamber B	Test Mode:	M1-M4
Tester:	Leesin Xiang, Leo Xiao, Colin Yang	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	19.9~20	Relative Humidity: (%)	31~36	ATM Pressure: (kPa)	101.5
-------------------	---------	------------------------	-------	---------------------	-------


#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/15
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Audix	Test Software	E3	191218 V9	N/A	N/A
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


**1) 30MHz-1GHz:**

M1(108-136MHz):

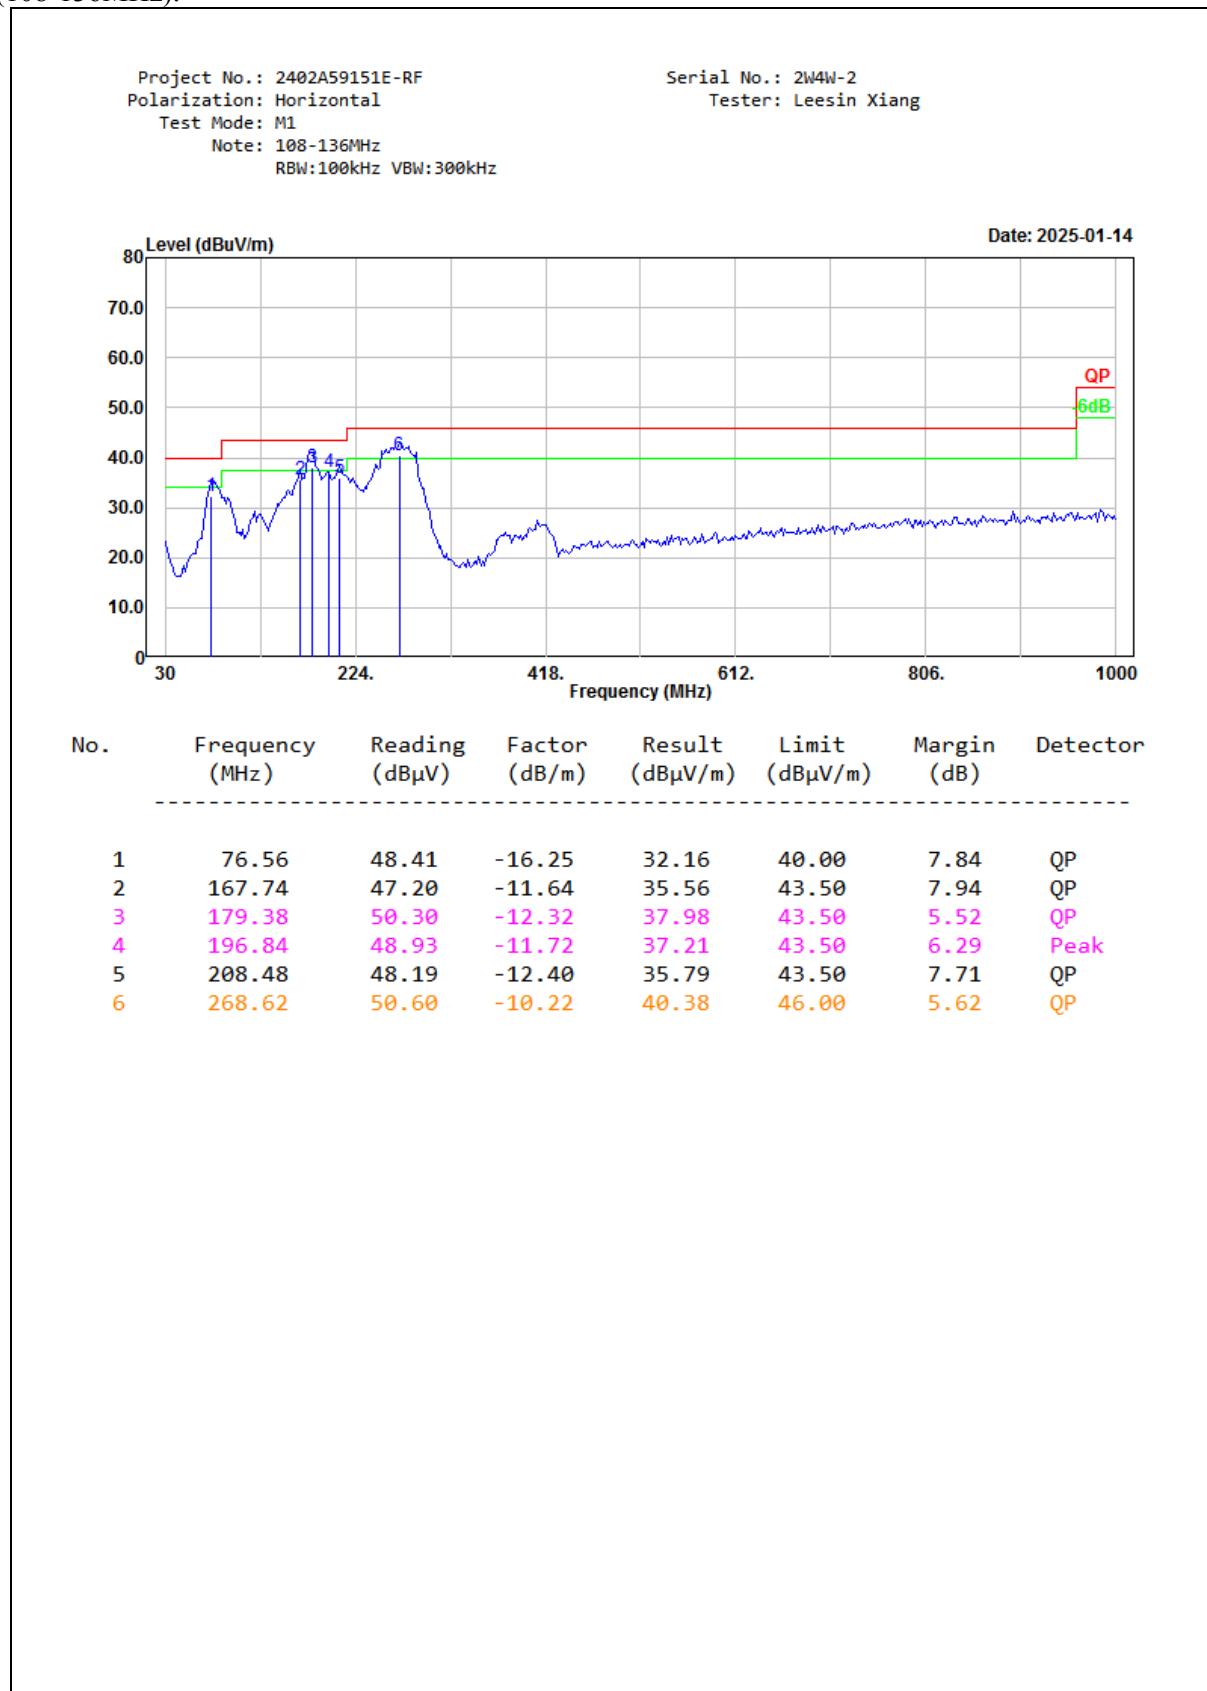

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M1  
Note: 108-136MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

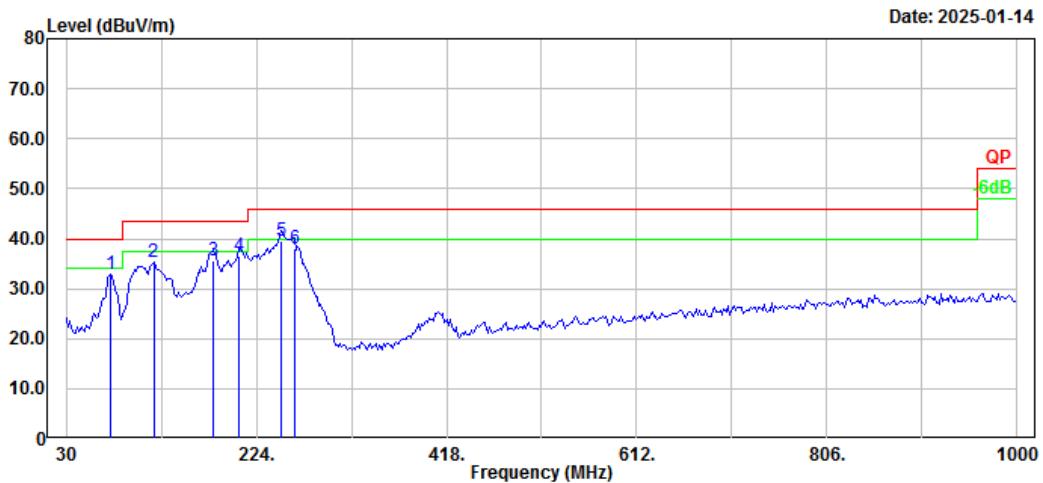


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	74.62	48.92	-16.14	32.78	40.00	7.22	Peak
2	119.24	45.40	-10.05	35.35	43.50	8.15	Peak
3	179.38	47.90	-12.32	35.58	43.50	7.92	QP
4	206.54	48.60	-12.21	36.39	43.50	7.11	QP
5	249.22	51.00	-11.46	39.54	46.00	6.46	QP
6	262.80	48.90	-10.83	38.07	46.00	7.93	QP

M1(136-174MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M1  
Note: 136-174MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

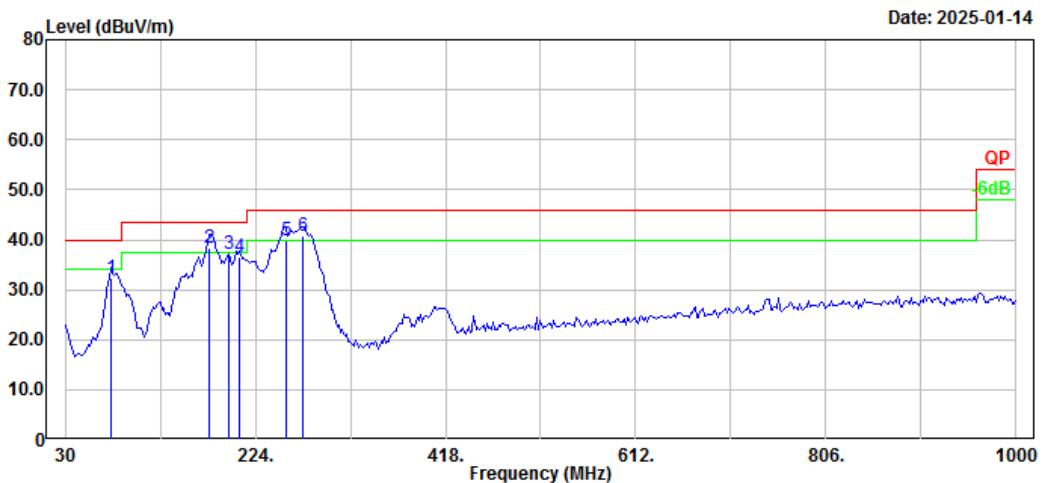

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	76.56	48.51	-16.25	32.26	40.00	7.74	QP
2	177.44	50.60	-12.21	38.39	43.50	5.11	QP
3	196.84	48.75	-11.72	37.03	43.50	6.47	Peak
4	208.48	48.89	-12.40	36.49	43.50	7.01	QP
5	255.04	51.09	-11.27	39.82	46.00	6.18	QP
6	272.50	50.59	-9.98	40.61	46.00	5.39	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M1  
Note: 136-174MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

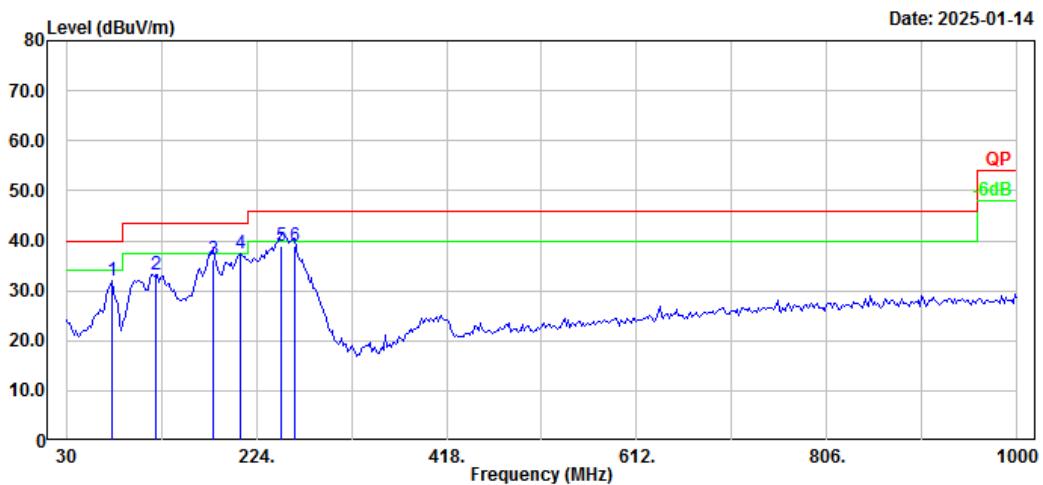


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	76.56	48.23	-16.25	31.98	40.00	8.02	Peak
2	121.18	43.29	-9.94	33.35	43.50	10.15	Peak
3	179.38	48.40	-12.32	36.08	43.50	7.42	QP
4	208.48	49.86	-12.40	37.46	43.50	6.04	Peak
5	249.22	50.40	-11.46	38.94	46.00	7.06	QP
6	262.80	49.80	-10.83	38.97	46.00	7.03	QP

M1(220-260MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M1  
Note: 220-260MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

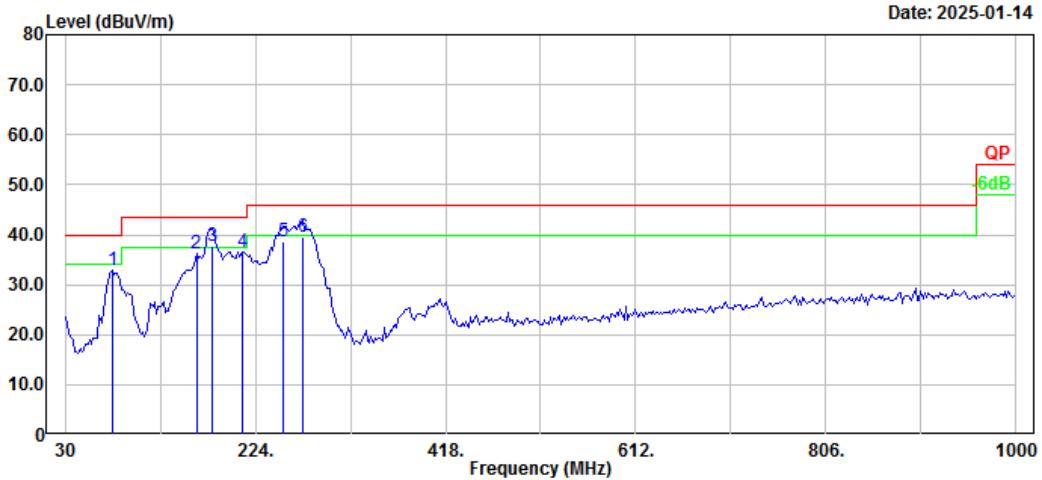

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	78.50	49.36	-16.38	32.98	40.00	7.02	Peak
2	163.86	47.66	-11.39	36.27	43.50	7.23	Peak
3	179.38	50.20	-12.32	37.88	43.50	5.62	QP
4	210.42	49.24	-12.57	36.67	43.50	6.83	Peak
5	253.10	49.90	-11.34	38.56	46.00	7.44	QP
6	272.50	49.59	-9.98	39.61	46.00	6.39	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M1  
Note: 220-260MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

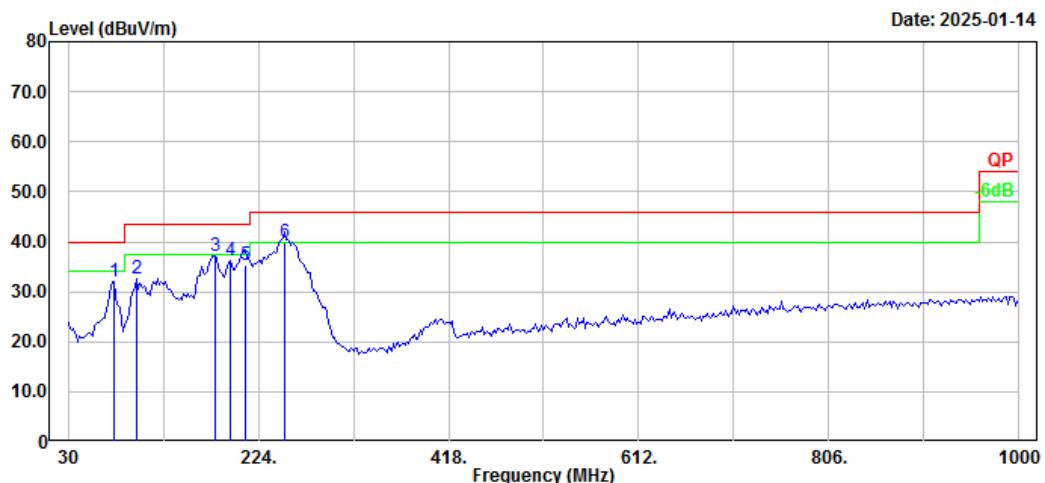


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	76.56	48.35	-16.25	32.10	40.00	7.90	Peak
2	99.84	47.12	-14.43	32.69	43.50	10.81	Peak
3	179.38	49.45	-12.32	37.13	43.50	6.37	Peak
4	194.90	48.02	-11.83	36.19	43.50	7.31	Peak
5	210.42	47.91	-12.57	35.34	43.50	8.16	QP
6	251.16	51.11	-11.41	39.70	46.00	6.30	QP

M1(350-390MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M1  
Note: 350-390MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

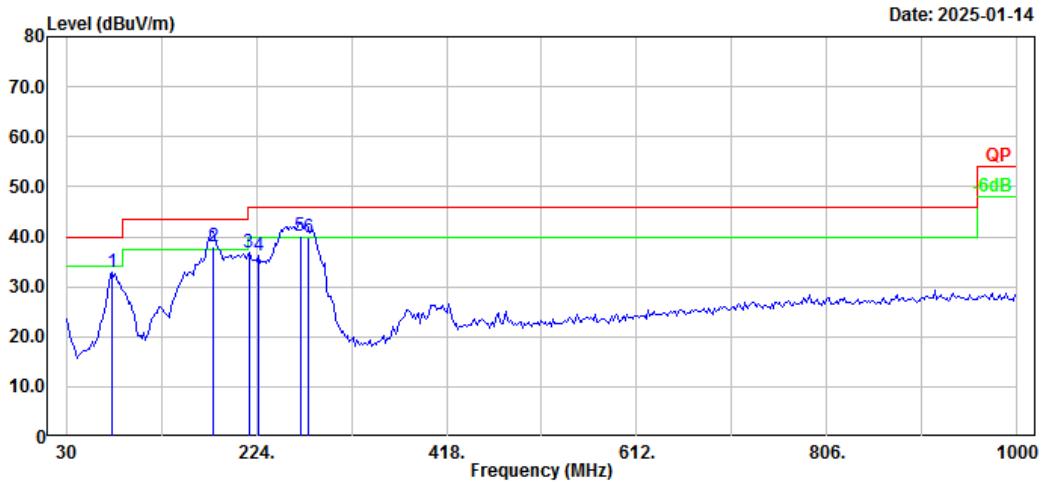

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	76.56	49.02	-16.25	32.77	40.00	7.23	Peak
2	179.38	50.30	-12.32	37.98	43.50	5.52	QP
3	216.24	49.24	-12.52	36.72	46.00	9.28	Peak
4	225.94	48.65	-12.33	36.32	46.00	9.68	Peak
5	268.62	50.50	-10.22	40.28	46.00	5.72	QP
6	276.38	49.60	-9.85	39.75	46.00	6.25	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M1  
Note: 350-390MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

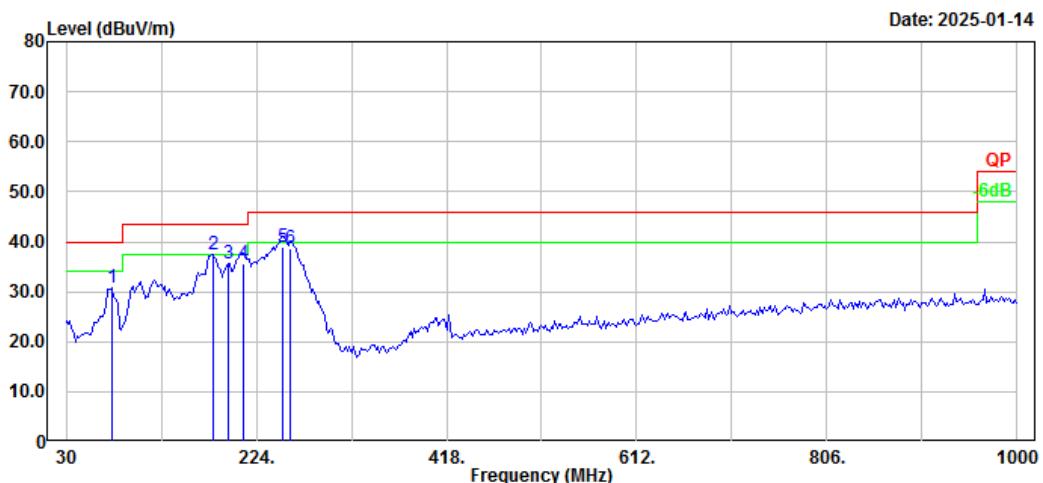


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	76.56	46.93	-16.25	30.68	40.00	9.32	Peak
2	179.38	49.78	-12.32	37.46	43.50	6.04	Peak
3	194.90	47.59	-11.83	35.76	43.50	7.74	Peak
4	210.42	48.21	-12.57	35.64	43.50	7.86	QP
5	251.16	50.41	-11.41	39.00	46.00	7.00	QP
6	258.92	49.70	-11.15	38.55	46.00	7.45	QP

M1(400-520MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M1  
Note: 400-520MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

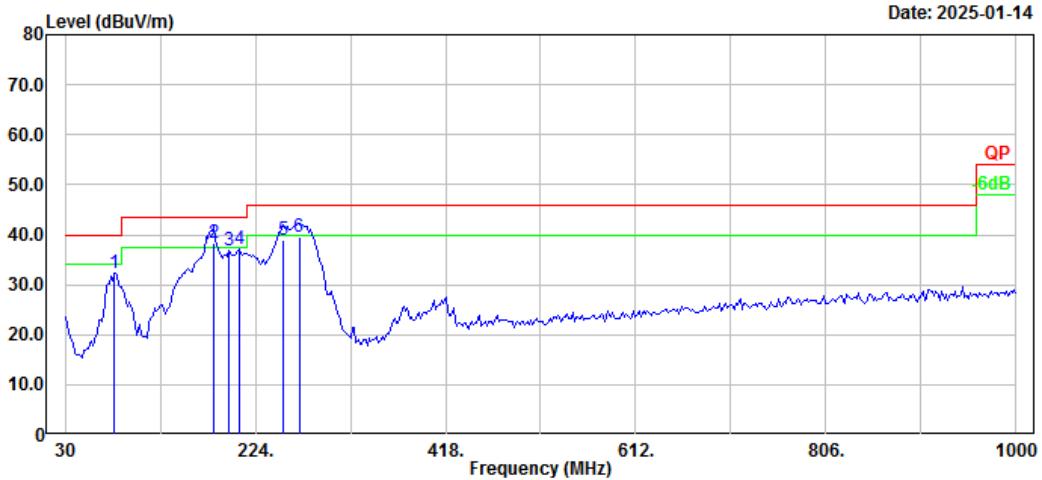

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	80.44	48.83	-16.50	32.33	40.00	7.67	Peak
2	181.32	50.80	-12.33	38.47	43.50	5.03	QP
3	196.84	48.57	-11.72	36.85	43.50	6.65	Peak
4	208.48	49.67	-12.40	37.27	43.50	6.23	Peak
5	253.10	50.40	-11.34	39.06	46.00	6.94	QP
6	268.62	49.90	-10.22	39.68	46.00	6.32	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M1  
Note: 400-520MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

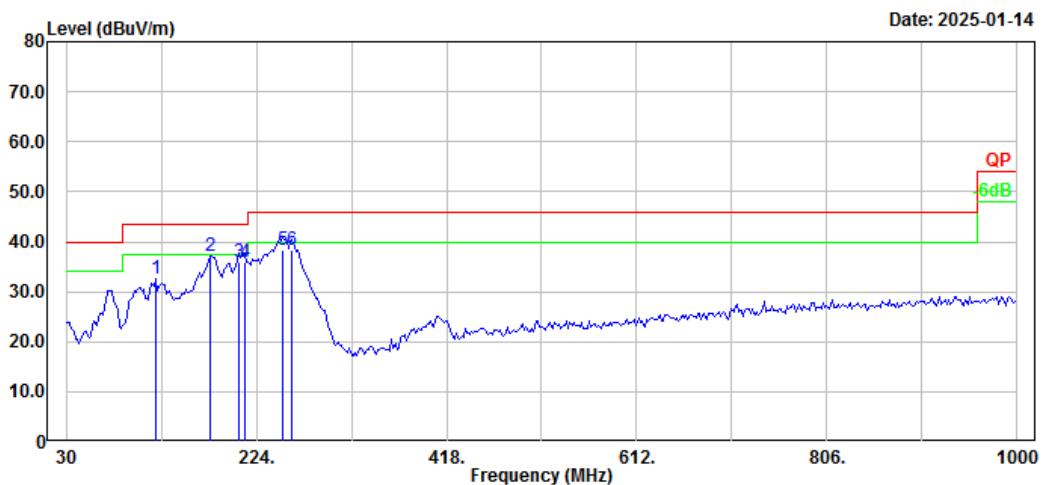


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	121.18	42.48	-9.94	32.54	43.50	10.96	Peak
2	177.44	49.36	-12.21	37.15	43.50	6.35	Peak
3	206.54	48.20	-12.21	35.99	43.50	7.51	QP
4	212.36	48.40	-12.55	35.85	43.50	7.65	QP
5	251.16	49.81	-11.41	38.40	46.00	7.60	QP
6	260.86	49.51	-11.04	38.47	46.00	7.53	QP

M2(108.0125MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 108.0125MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

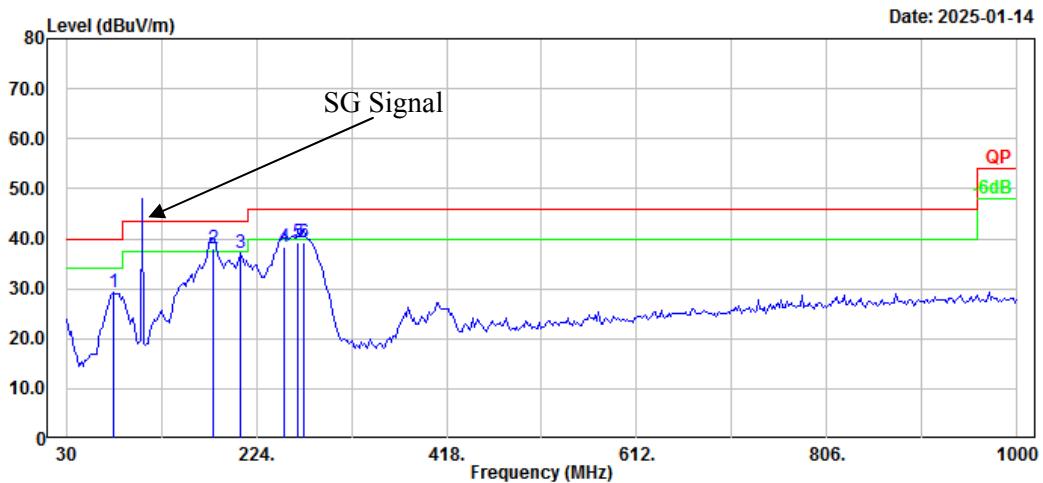

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	78.50	45.65	-16.38	29.27	40.00	10.73	Peak
2	179.38	50.30	-12.32	37.98	43.50	5.52	QP
3	208.48	49.42	-12.40	37.02	43.50	6.48	Peak
4	253.10	49.80	-11.34	38.46	46.00	7.54	QP
5	266.68	49.71	-10.43	39.28	46.00	6.72	QP
6	272.50	49.19	-9.98	39.21	46.00	6.79	QP


Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 108.0125MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

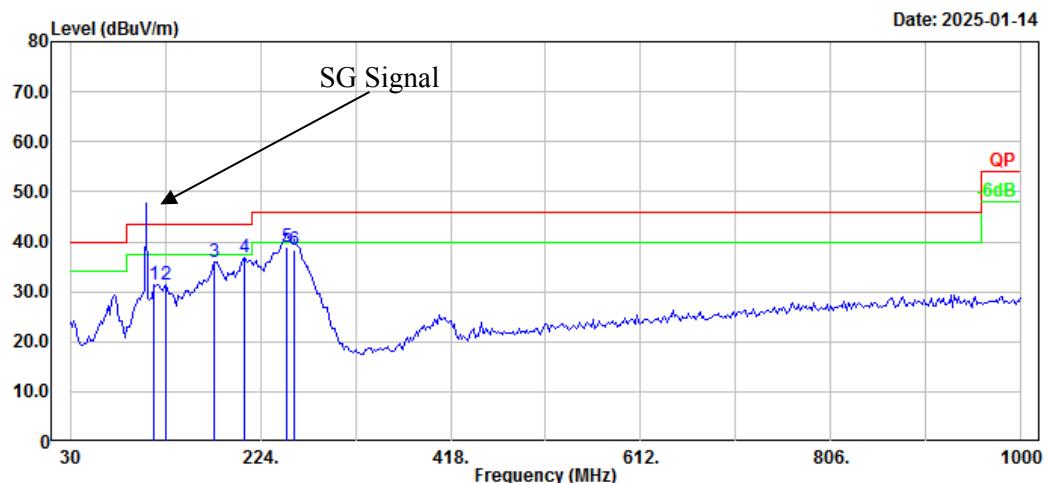


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	115.36	42.13	-10.60	31.53	43.50	11.97	Peak
2	127.00	41.42	-9.89	31.53	43.50	11.97	Peak
3	177.44	48.17	-12.21	35.96	43.50	7.54	Peak
4	208.48	49.08	-12.40	36.68	43.50	6.82	Peak
5	251.16	50.41	-11.41	39.00	46.00	7.00	QP
6	258.92	49.40	-11.15	38.25	46.00	7.75	QP

M2(122MHz):

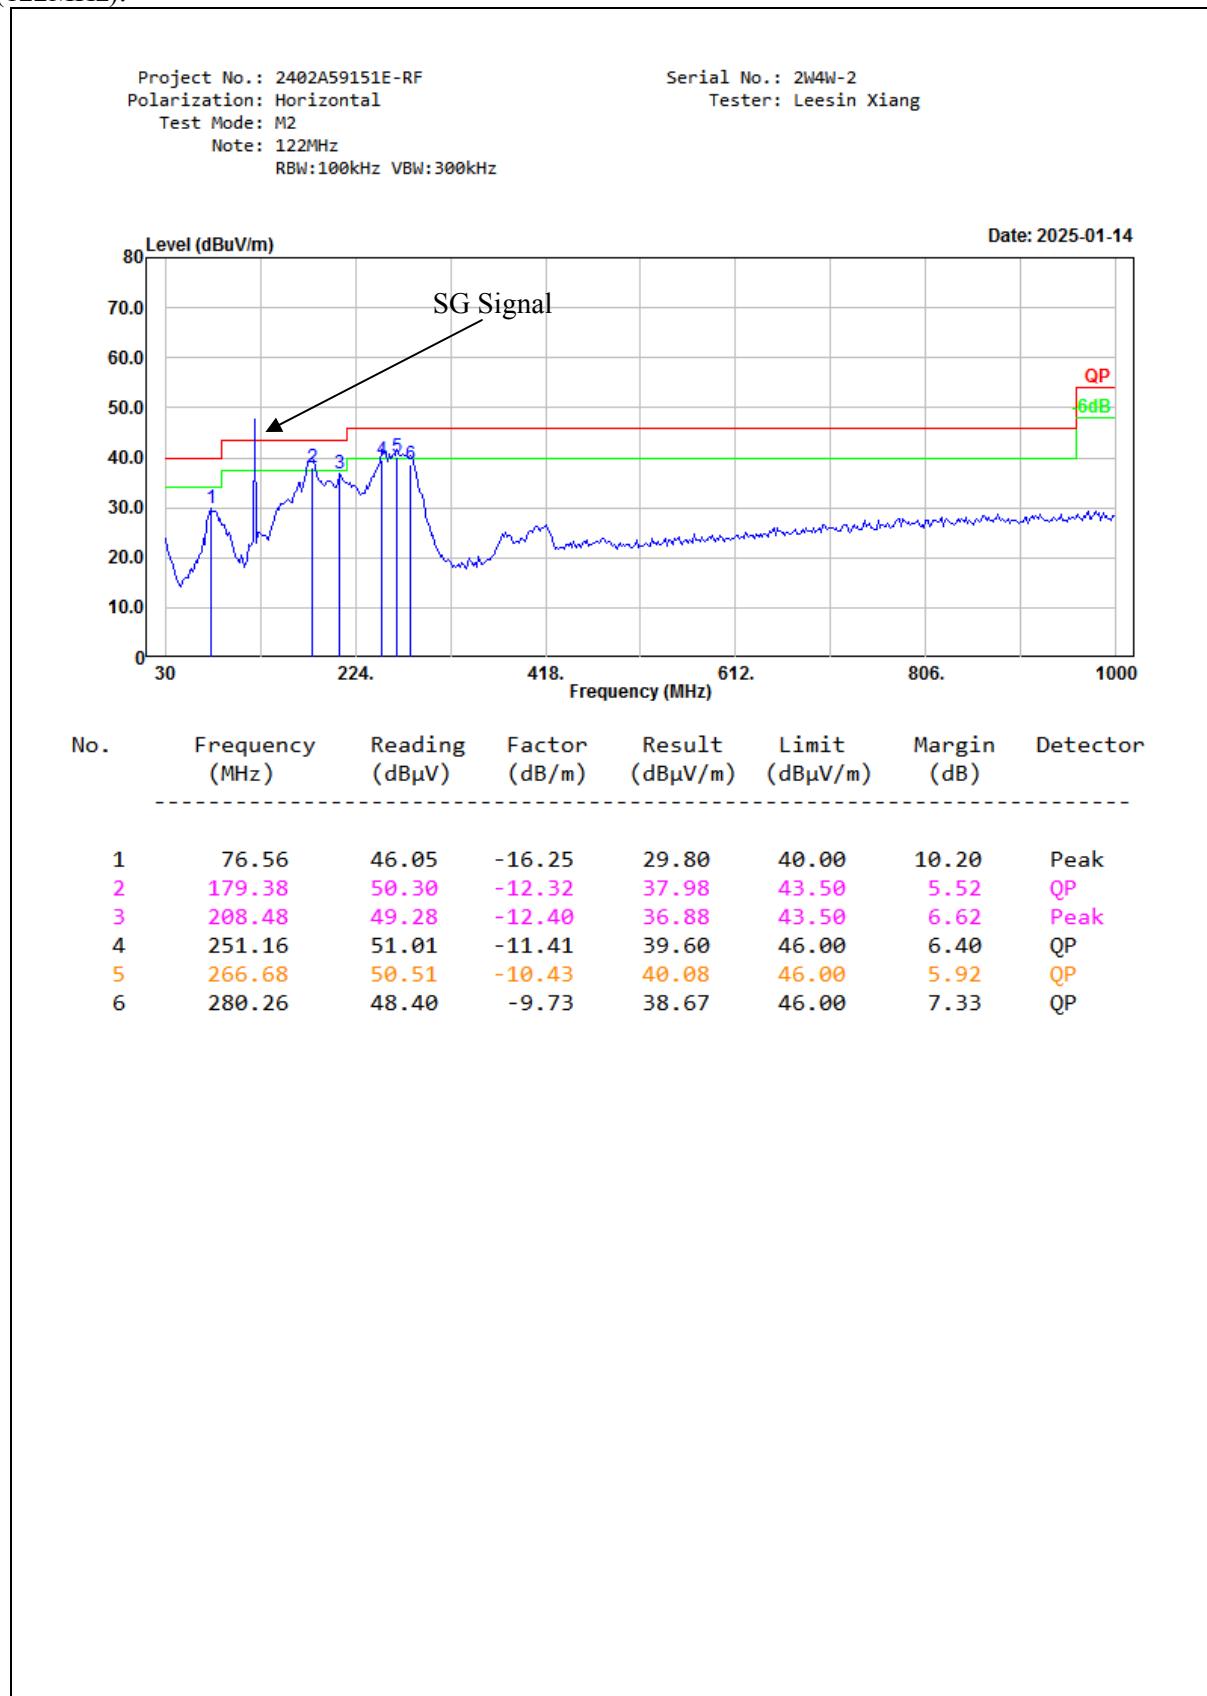

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 122MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

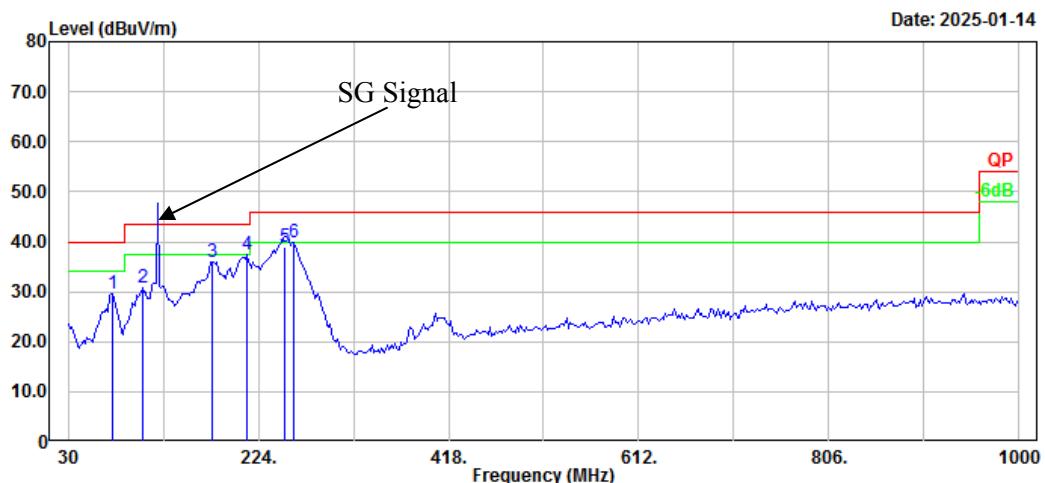


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	74.62	45.58	-16.14	29.44	40.00	10.56	Peak
2	105.66	43.62	-12.68	30.94	43.50	12.56	Peak
3	177.44	48.15	-12.21	35.94	43.50	7.56	Peak
4	212.36	49.93	-12.55	37.38	43.50	6.12	Peak
5	251.16	50.31	-11.41	38.90	46.00	7.10	QP
6	260.86	51.01	-11.04	39.97	46.00	6.03	Peak

M2(135.9875MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 135.9875MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

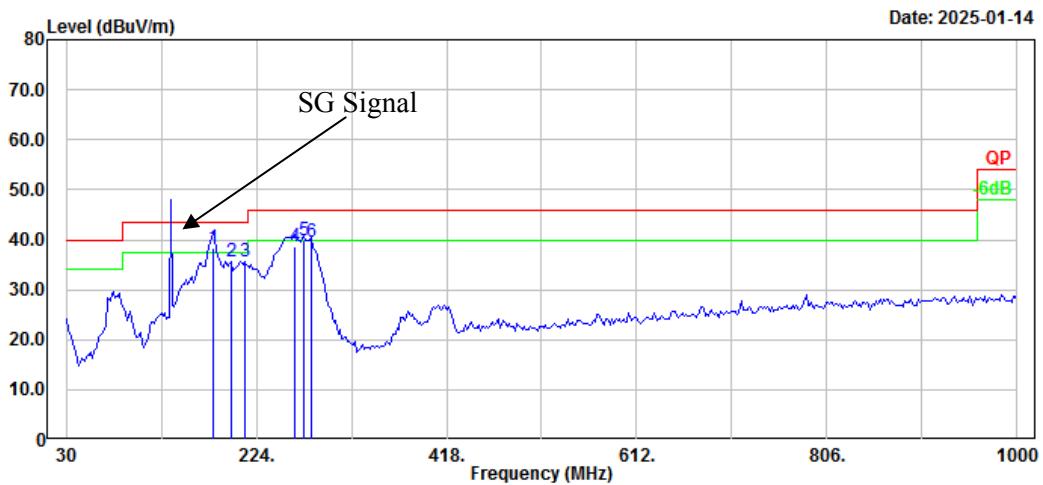

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	179.38	50.80	-12.32	38.48	43.50	5.02	QP
2	198.78	47.28	-11.60	35.68	43.50	7.82	Peak
3	212.36	48.32	-12.55	35.77	43.50	7.73	Peak
4	262.80	49.60	-10.83	38.77	46.00	7.23	QP
5	272.50	49.79	-9.98	39.81	46.00	6.19	QP
6	280.26	49.20	-9.73	39.47	46.00	6.53	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 135.9875MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

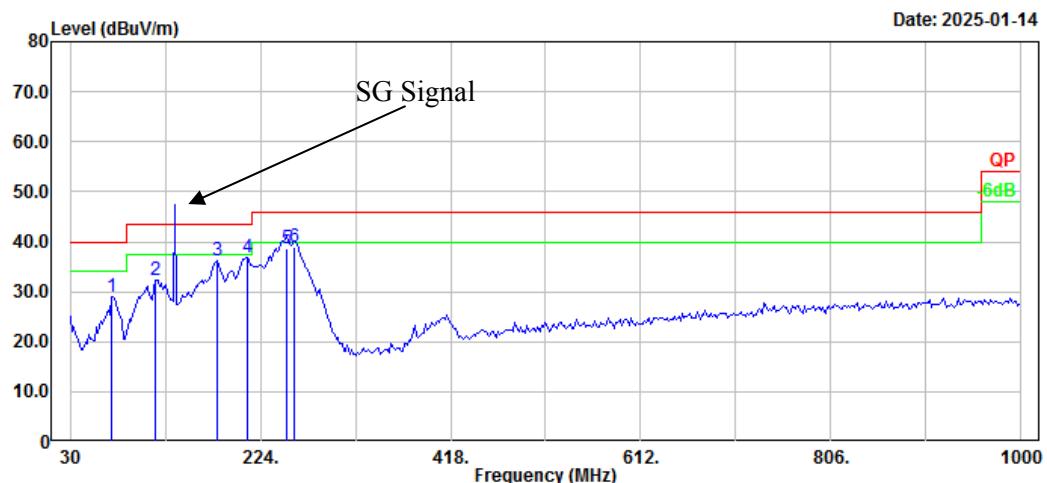


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	72.68	45.25	-16.20	29.05	40.00	10.95	Peak
2	117.30	42.57	-10.33	32.24	43.50	11.26	Peak
3	179.38	48.54	-12.32	36.22	43.50	7.28	Peak
4	210.42	49.52	-12.57	36.95	43.50	6.55	Peak
5	251.16	50.11	-11.41	38.70	46.00	7.30	QP
6	258.92	50.00	-11.15	38.85	46.00	7.15	QP

M2(136.0125MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 136.0125MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

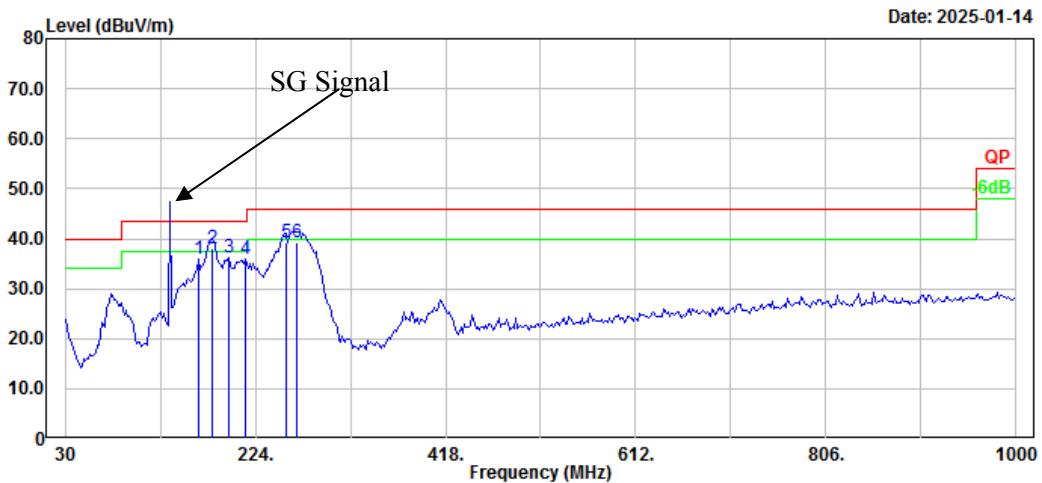

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	165.80	47.44	-11.51	35.93	43.50	7.57	Peak
2	179.38	50.30	-12.32	37.98	43.50	5.52	QP
3	196.84	47.82	-11.72	36.10	43.50	7.40	Peak
4	214.30	48.51	-12.54	35.97	43.50	7.53	Peak
5	255.04	50.39	-11.27	39.12	46.00	6.88	QP
6	266.68	49.81	-10.43	39.38	46.00	6.62	QP


Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 136.0125MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

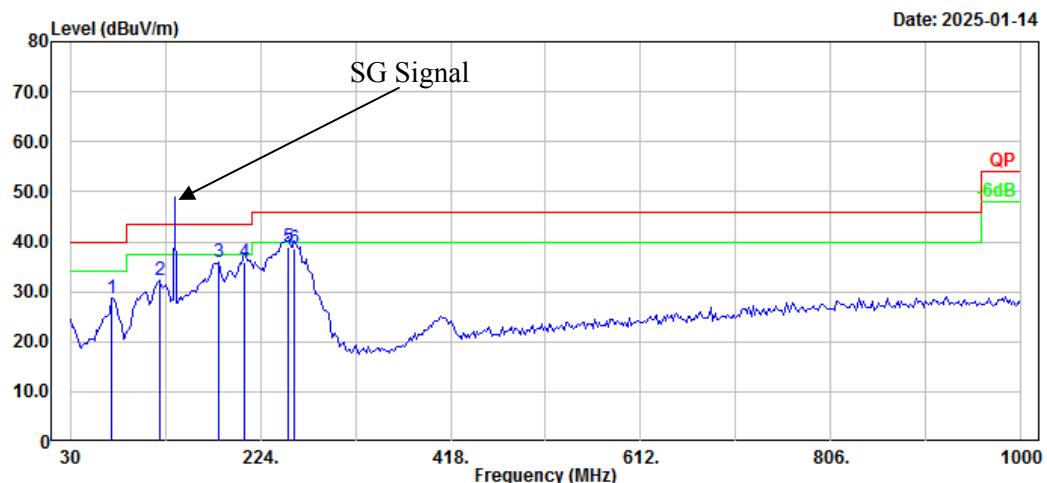


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	72.68	44.99	-16.20	28.79	40.00	11.21	Peak
2	121.18	42.17	-9.94	32.23	43.50	11.27	Peak
3	181.32	48.20	-12.33	35.87	43.50	7.63	Peak
4	208.48	48.19	-12.40	35.79	43.50	7.71	QP
5	253.10	50.40	-11.34	39.06	46.00	6.94	QP
6	258.92	49.80	-11.15	38.65	46.00	7.35	QP

M2(155MHz):

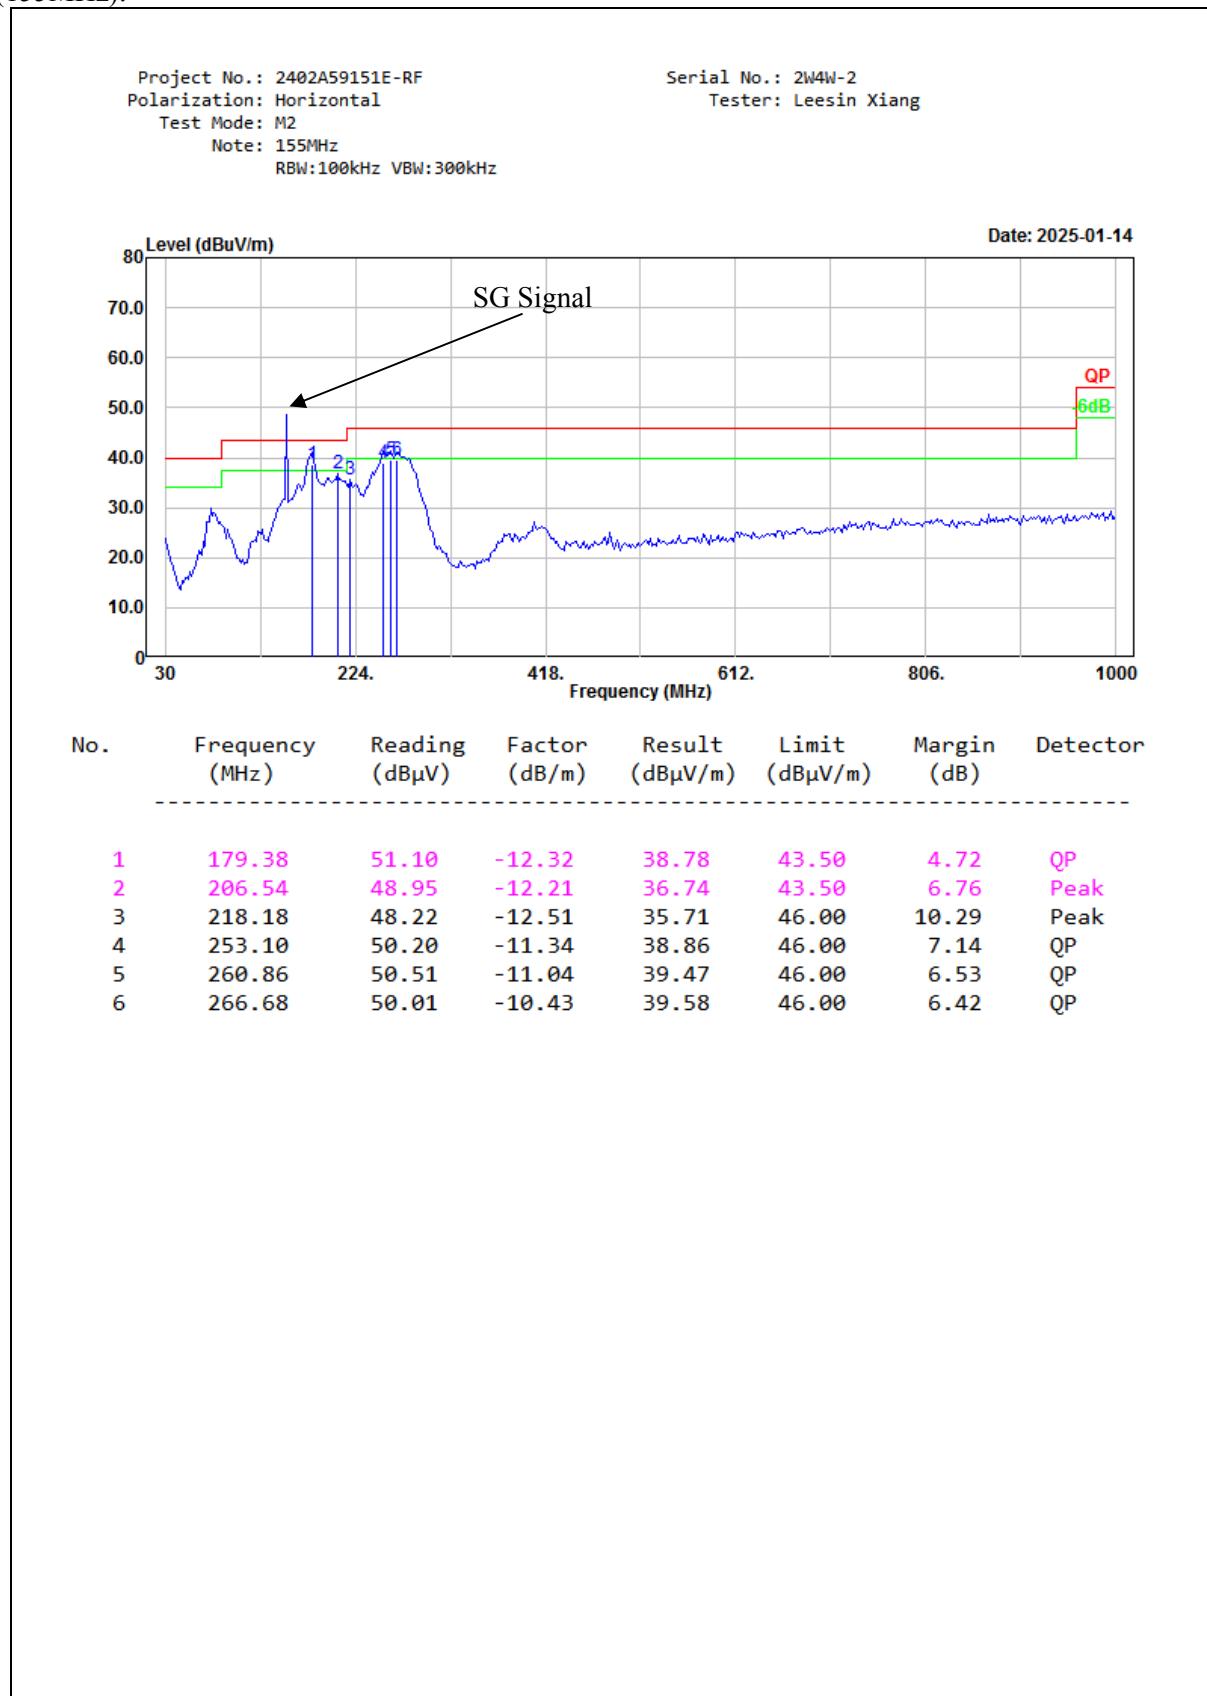

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 155MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

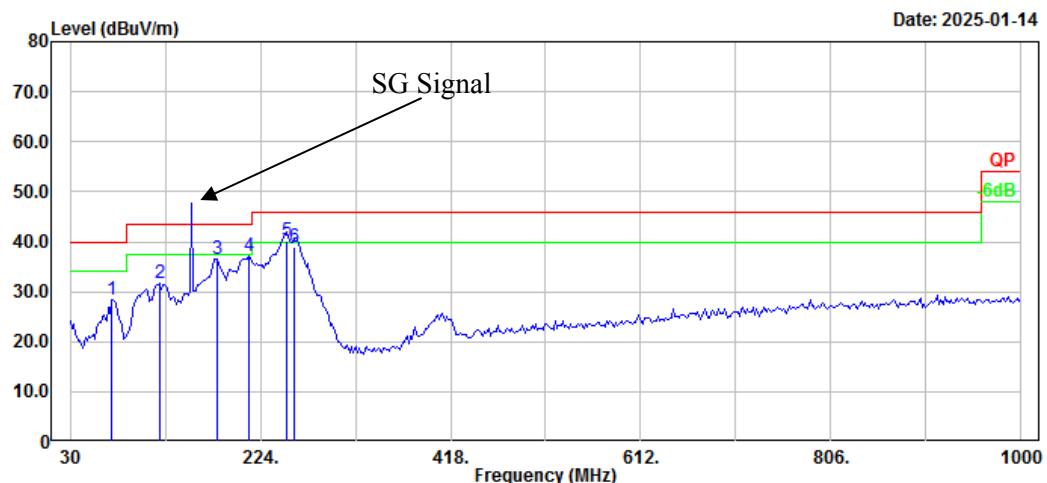


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	72.68	44.56	-16.20	28.36	40.00	11.64	Peak
2	121.18	41.53	-9.94	31.59	43.50	11.91	Peak
3	179.38	48.91	-12.32	36.59	43.50	6.91	Peak
4	212.36	49.65	-12.55	37.10	43.50	6.40	Peak
5	251.16	51.41	-11.41	40.00	46.00	6.00	QP
6	258.92	50.20	-11.15	39.05	46.00	6.95	QP

M2(173.9875MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 173.9875MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

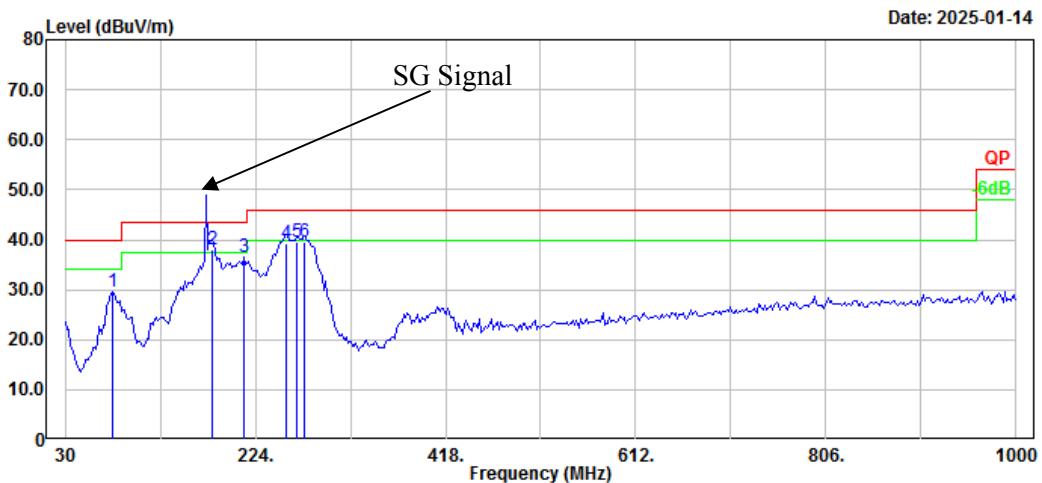

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	78.50	45.88	-16.38	29.50	40.00	10.50	Peak
2	179.38	50.30	-12.32	37.98	43.50	5.52	QP
3	212.36	49.12	-12.55	36.57	43.50	6.93	Peak
4	255.04	50.39	-11.27	39.12	46.00	6.88	QP
5	266.68	50.11	-10.43	39.68	46.00	6.32	QP
6	274.44	49.50	-9.92	39.58	46.00	6.42	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 173.9875MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

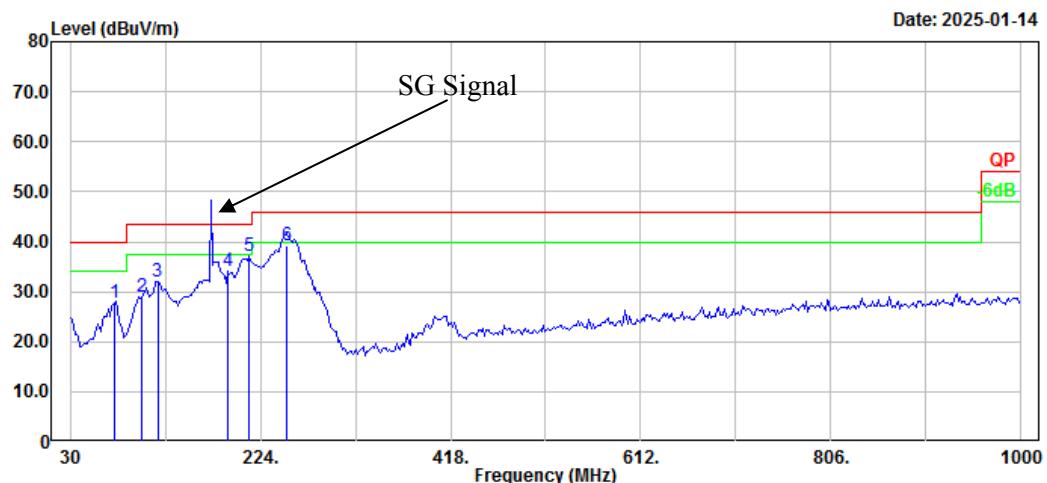


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	74.62	43.92	-16.14	27.78	40.00	12.22	Peak
2	103.72	42.40	-13.27	29.13	43.50	14.37	Peak
3	119.24	42.02	-10.05	31.97	43.50	11.53	Peak
4	191.02	46.12	-12.06	34.06	43.50	9.44	Peak
5	212.36	49.67	-12.55	37.12	43.50	6.38	Peak
6	251.16	50.61	-11.41	39.20	46.00	6.80	QP

M2(220.0125MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 220.0125MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

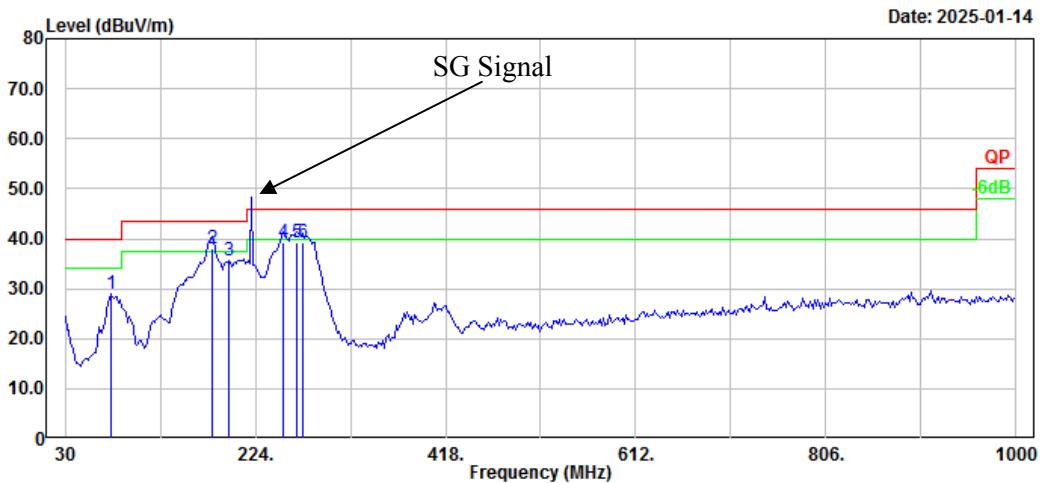

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	76.56	45.21	-16.25	28.96	40.00	11.04	Peak
2	179.38	50.30	-12.32	37.98	43.50	5.52	QP
3	196.84	47.45	-11.72	35.73	43.50	7.77	Peak
4	253.10	50.50	-11.34	39.16	46.00	6.84	QP
5	266.68	49.71	-10.43	39.28	46.00	6.72	QP
6	272.50	49.29	-9.98	39.31	46.00	6.69	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 220.0125MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

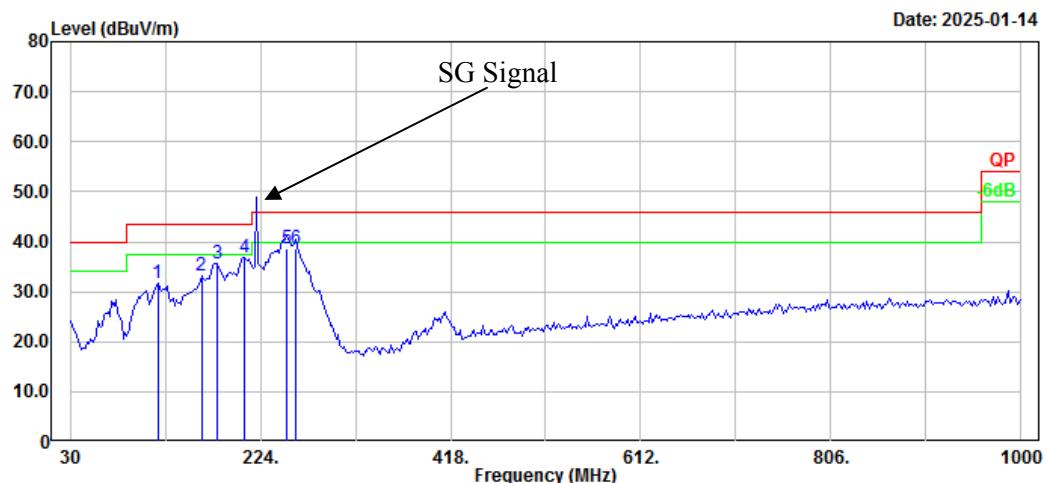


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	119.24	41.90	-10.05	31.85	43.50	11.65	Peak
2	163.86	44.65	-11.39	33.26	43.50	10.24	Peak
3	179.38	48.01	-12.32	35.69	43.50	7.81	Peak
4	208.48	49.18	-12.40	36.78	43.50	6.72	Peak
5	251.16	50.11	-11.41	38.70	46.00	7.30	QP
6	260.86	49.81	-11.04	38.77	46.00	7.23	QP

M2(240MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 240MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

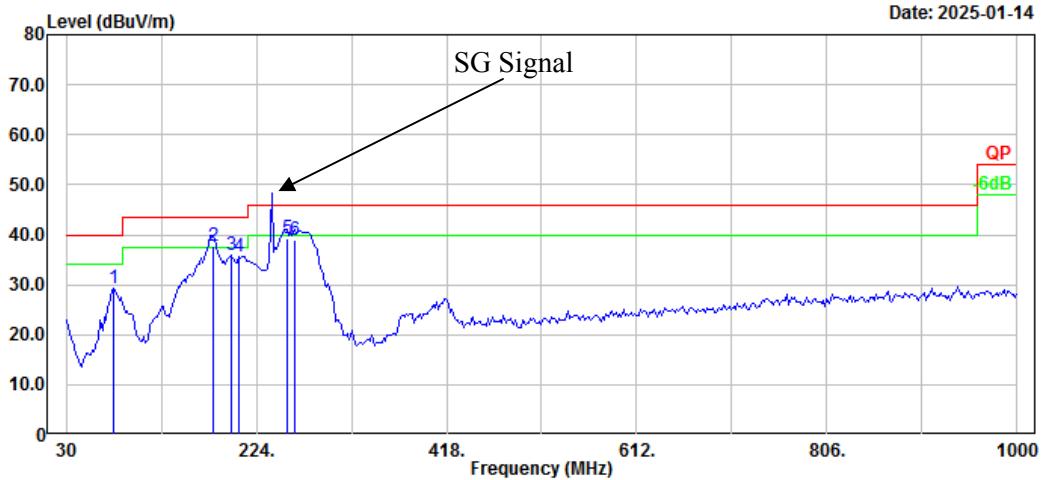

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	78.50	45.53	-16.38	29.15	40.00	10.85	Peak
2	179.38	50.20	-12.32	37.88	43.50	5.62	QP
3	198.78	47.41	-11.60	35.81	43.50	7.69	Peak
4	206.54	47.79	-12.21	35.58	43.50	7.92	Peak
5	255.04	50.59	-11.27	39.32	46.00	6.68	QP
6	262.80	49.90	-10.83	39.07	46.00	6.93	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 240MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

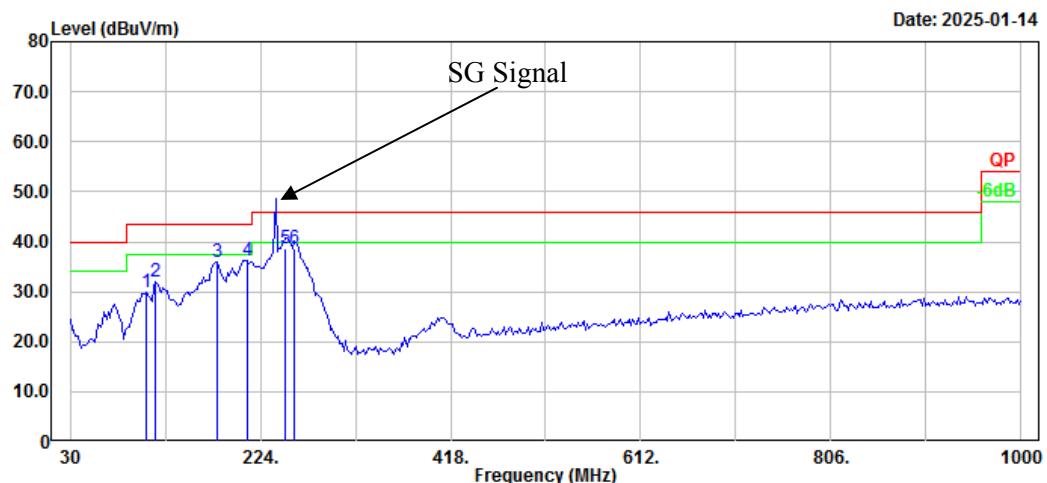


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	107.60	42.05	-12.09	29.96	43.50	13.54	Peak
2	117.30	42.37	-10.33	32.04	43.50	11.46	Peak
3	179.38	48.39	-12.32	36.07	43.50	7.43	Peak
4	210.42	48.68	-12.57	36.11	43.50	7.39	Peak
5	249.22	50.10	-11.46	38.64	46.00	7.36	QP
6	258.92	49.80	-11.15	38.65	46.00	7.35	QP

M2(259.9875MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 259.9875MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

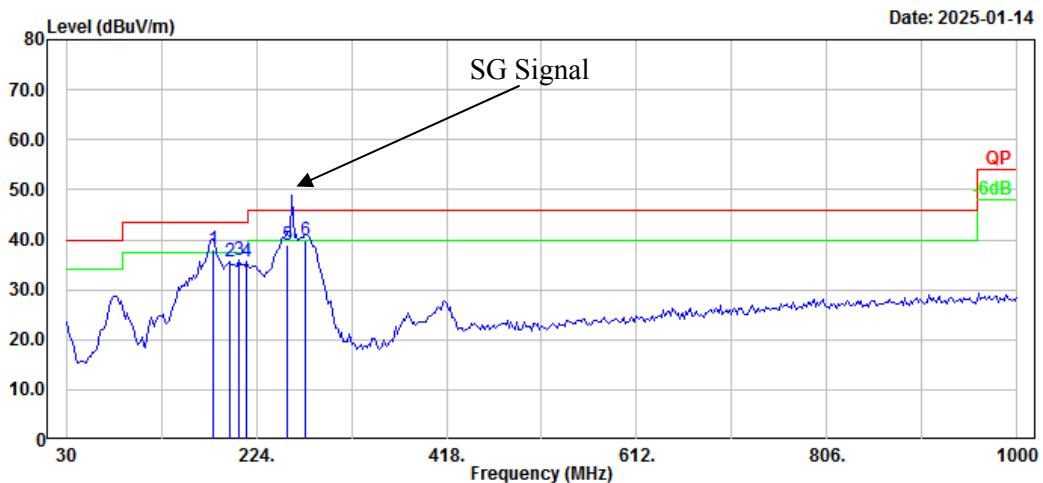

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	179.38	50.40	-12.32	38.08	43.50	5.42	QP
2	196.84	47.43	-11.72	35.71	43.50	7.79	Peak
3	206.54	48.12	-12.21	35.91	43.50	7.59	Peak
4	214.30	48.05	-12.54	35.51	43.50	7.99	Peak
5	255.04	50.19	-11.27	38.92	46.00	7.08	QP
6	274.44	49.80	-9.92	39.88	46.00	6.12	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 259.9875MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

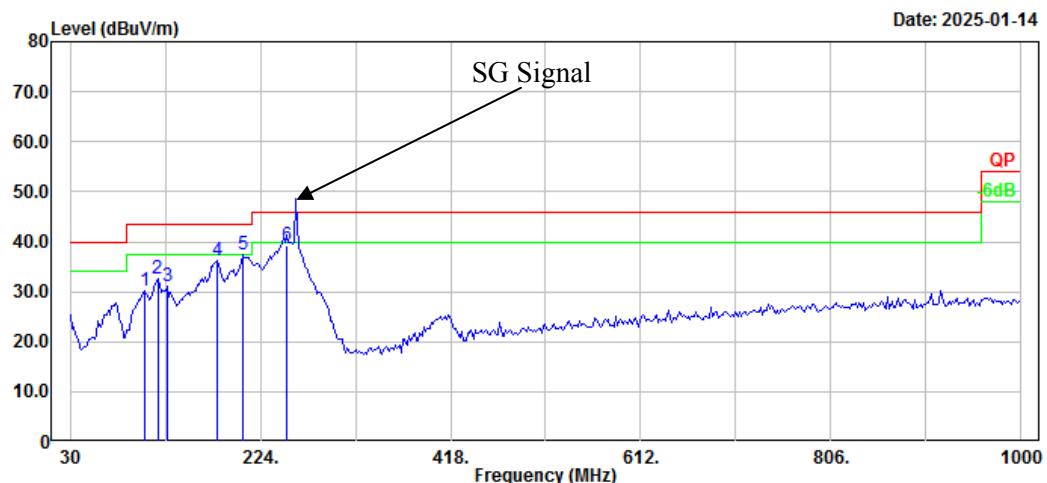


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	105.66	42.85	-12.68	30.17	43.50	13.33	Peak
2	119.24	42.54	-10.05	32.49	43.50	11.01	Peak
3	128.94	41.01	-9.86	31.15	43.50	12.35	Peak
4	179.38	48.42	-12.32	36.10	43.50	7.40	Peak
5	206.54	49.55	-12.21	37.34	43.50	6.16	Peak
6	251.16	50.61	-11.41	39.20	46.00	6.80	QP

M2(350.0125MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 350.0125MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

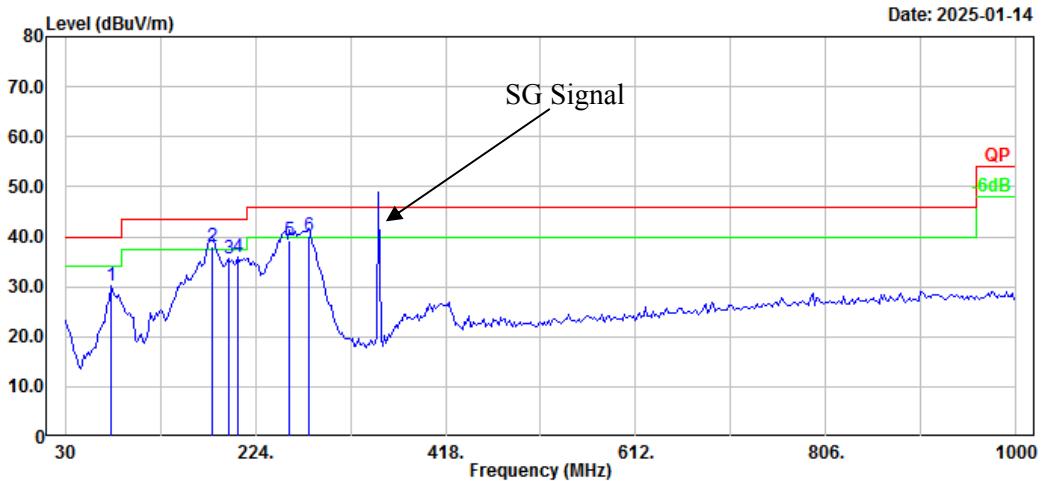

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	76.56	46.37	-16.25	30.12	40.00	9.88	Peak
2	179.38	50.40	-12.32	38.08	43.50	5.42	QP
3	196.84	47.39	-11.72	35.67	43.50	7.83	Peak
4	206.54	48.13	-12.21	35.92	43.50	7.58	Peak
5	258.92	50.50	-11.15	39.35	46.00	6.65	QP
6	278.32	49.80	-9.79	40.01	46.00	5.99	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 350.0125MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

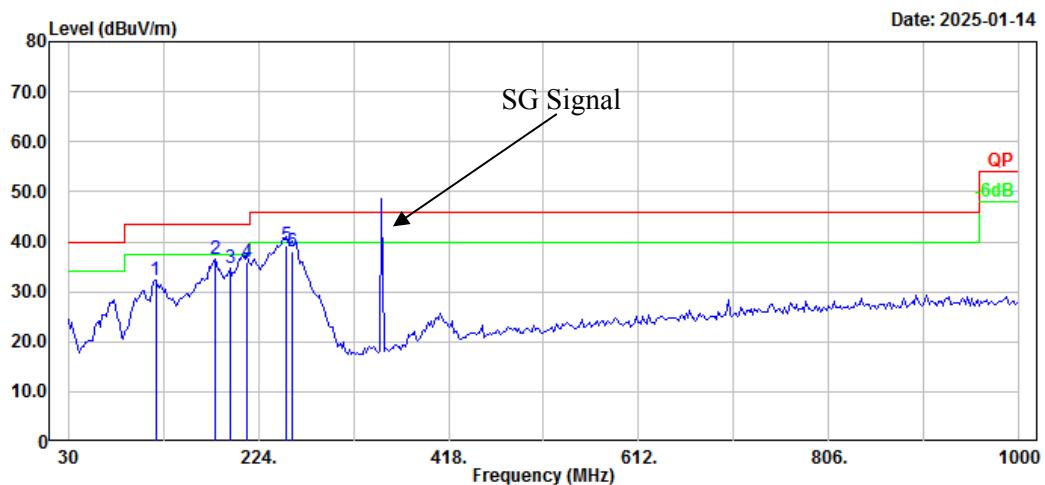


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	119.24	42.45	-10.05	32.40	43.50	11.10	Peak
2	179.38	48.74	-12.32	36.42	43.50	7.08	Peak
3	194.90	46.67	-11.83	34.84	43.50	8.66	Peak
4	212.36	48.50	-12.55	35.95	43.50	7.55	QP
5	253.10	50.60	-11.34	39.26	46.00	6.74	QP
6	258.92	49.30	-11.15	38.15	46.00	7.85	QP

M2(370MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 370MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

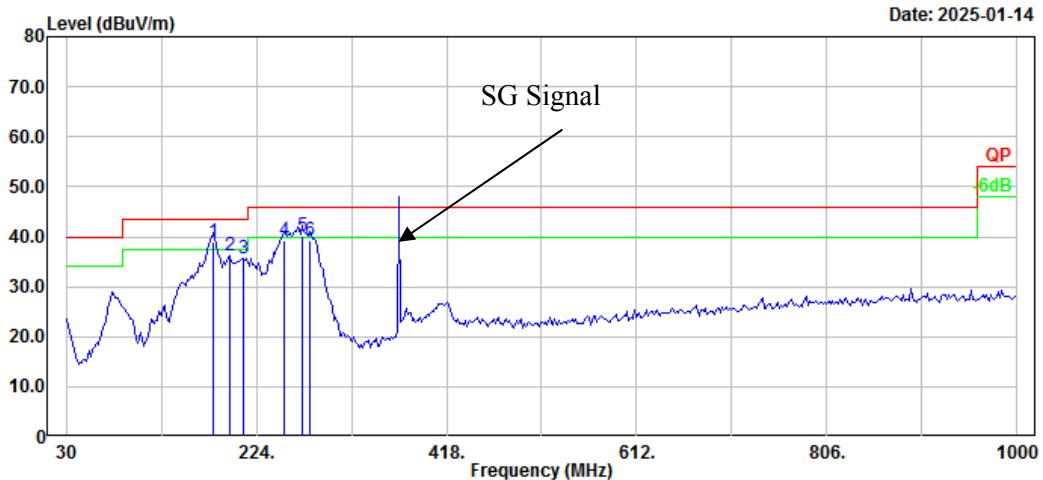

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	179.38	51.20	-12.32	38.88	43.50	4.62	QP
2	196.84	47.99	-11.72	36.27	43.50	7.23	Peak
3	210.42	48.28	-12.57	35.71	43.50	7.79	Peak
4	253.10	50.60	-11.34	39.26	46.00	6.74	QP
5	270.56	50.09	-10.05	40.04	46.00	5.96	QP
6	278.32	48.90	-9.79	39.11	46.00	6.89	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 370MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

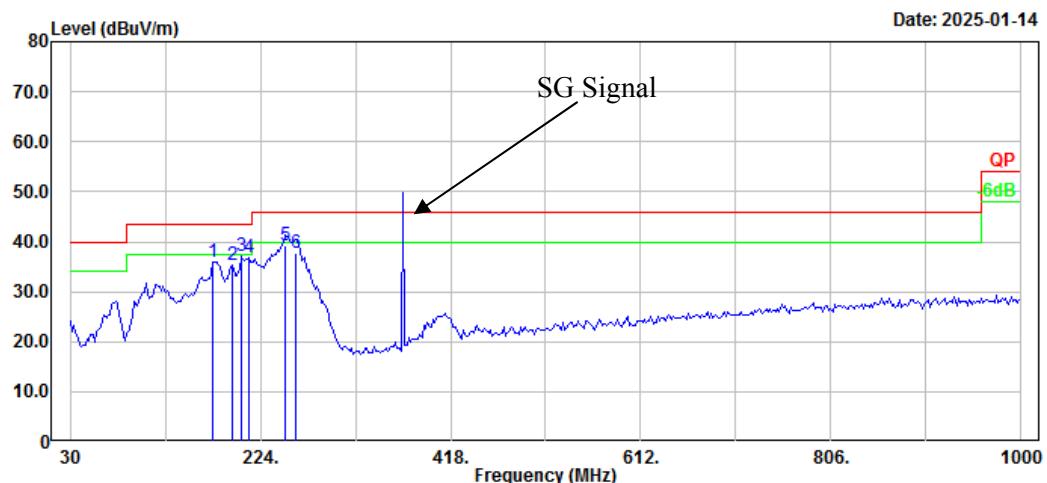


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	175.50	48.11	-12.10	36.01	43.50	7.49	Peak
2	194.90	47.10	-11.83	35.27	43.50	8.23	Peak
3	204.60	49.01	-12.01	37.00	43.50	6.50	Peak
4	212.36	49.38	-12.55	36.83	43.50	6.67	Peak
5	249.22	50.60	-11.46	39.14	46.00	6.86	QP
6	260.86	48.81	-11.04	37.77	46.00	8.23	QP

M2(389.9875MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 389.9875MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

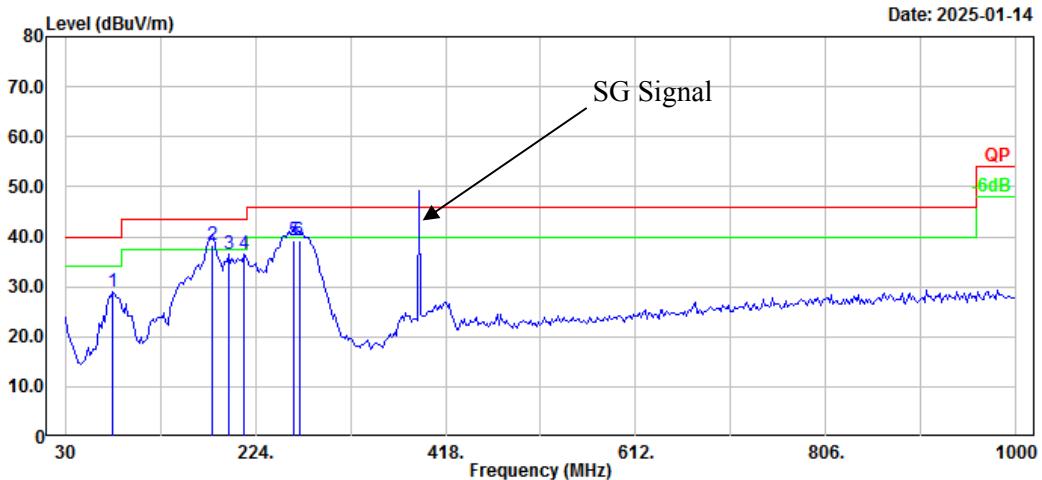

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	78.50	45.33	-16.38	28.95	40.00	11.05	Peak
2	179.38	50.70	-12.32	38.38	43.50	5.12	QP
3	196.84	48.14	-11.72	36.42	43.50	7.08	Peak
4	212.36	48.97	-12.55	36.42	43.50	7.08	Peak
5	262.80	50.20	-10.83	39.37	46.00	6.63	QP
6	268.62	49.60	-10.22	39.38	46.00	6.62	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 389.9875MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

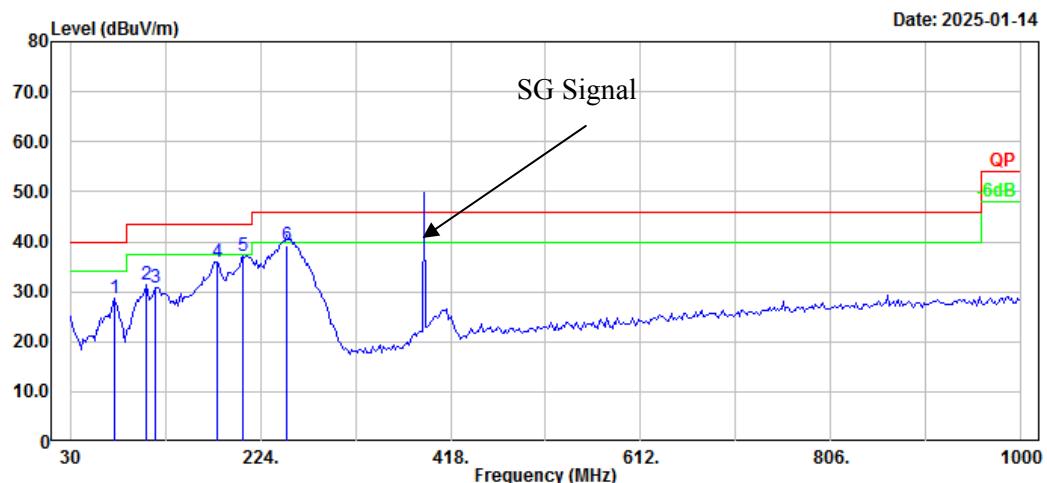


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	74.62	44.84	-16.14	28.70	40.00	11.30	Peak
2	107.60	43.42	-12.09	31.33	43.50	12.17	Peak
3	117.30	41.26	-10.33	30.93	43.50	12.57	Peak
4	179.38	48.21	-12.32	35.89	43.50	7.61	Peak
5	206.54	49.45	-12.21	37.24	43.50	6.26	Peak
6	251.16	50.61	-11.41	39.20	46.00	6.80	QP

M2(400.0125MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 400.0125MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

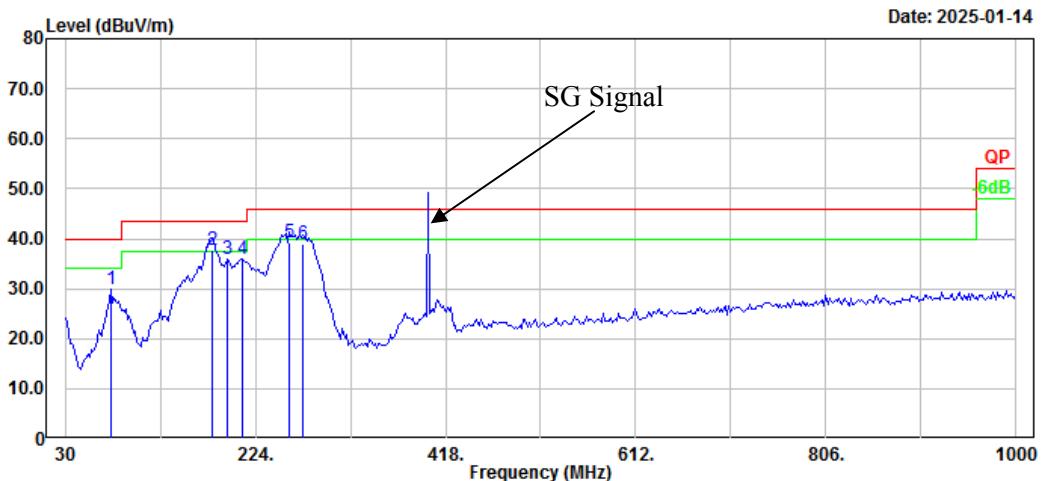

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	76.56	46.11	-16.25	29.86	40.00	10.14	Peak
2	179.38	50.20	-12.32	37.88	43.50	5.62	QP
3	194.90	47.69	-11.83	35.86	43.50	7.64	Peak
4	210.42	48.48	-12.57	35.91	43.50	7.59	Peak
5	258.92	50.50	-11.15	39.35	46.00	6.65	QP
6	272.50	48.79	-9.98	38.81	46.00	7.19	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 400.0125MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

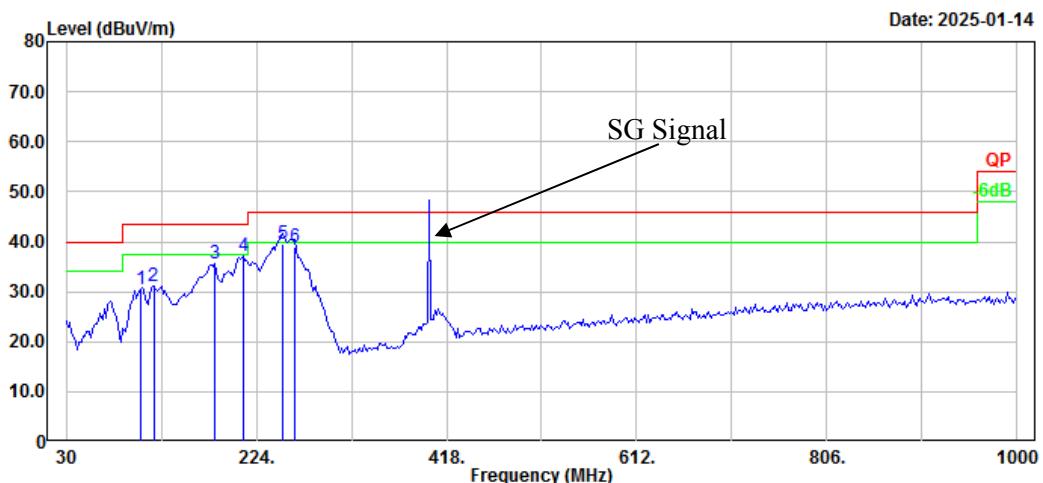


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	105.66	43.13	-12.68	30.45	43.50	13.05	Peak
2	119.24	41.21	-10.05	31.16	43.50	12.34	Peak
3	181.32	48.01	-12.33	35.68	43.50	7.82	Peak
4	210.42	49.75	-12.57	37.18	43.50	6.32	Peak
5	251.16	50.81	-11.41	39.40	46.00	6.60	QP
6	262.80	49.70	-10.83	38.87	46.00	7.13	QP

M2(460MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 460MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

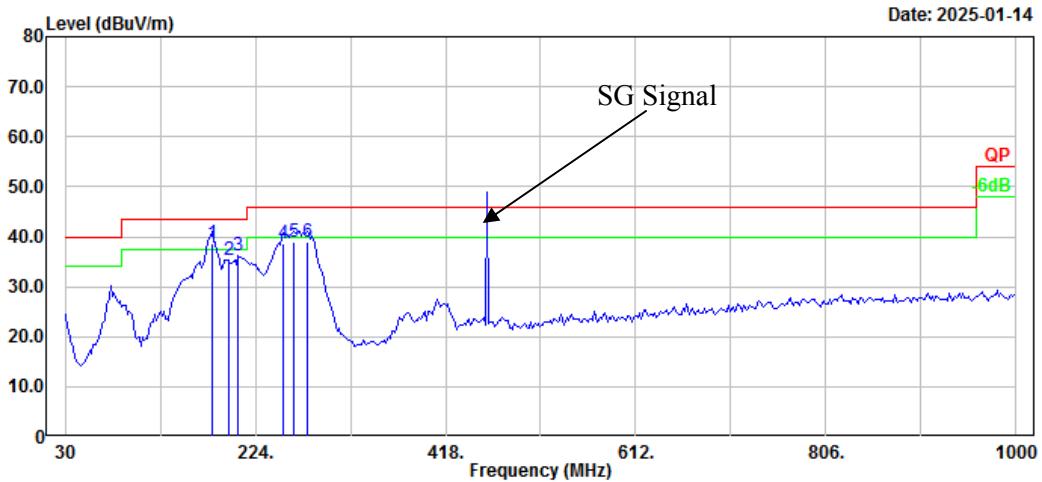

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	179.38	50.90	-12.32	38.58	43.50	4.92	QP
2	196.84	47.13	-11.72	35.41	43.50	8.09	Peak
3	206.54	48.29	-12.21	36.08	43.50	7.42	Peak
4	253.10	50.10	-11.34	38.76	46.00	7.24	QP
5	262.80	49.90	-10.83	39.07	46.00	6.93	QP
6	276.38	48.80	-9.85	38.95	46.00	7.05	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 460MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

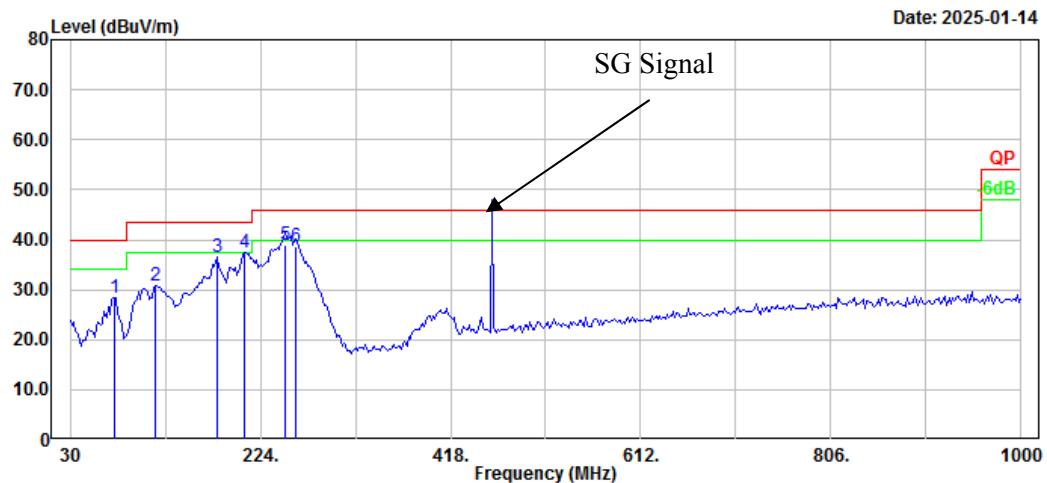


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	74.62	44.61	-16.14	28.47	40.00	11.53	Peak
2	117.30	41.18	-10.33	30.85	43.50	12.65	Peak
3	179.38	48.74	-12.32	36.42	43.50	7.08	Peak
4	208.48	49.78	-12.40	37.38	43.50	6.12	Peak
5	249.22	50.30	-11.46	38.84	46.00	7.16	QP
6	260.86	49.71	-11.04	38.67	46.00	7.33	QP

M2(519.9875MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M2  
Note: 519.9875MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

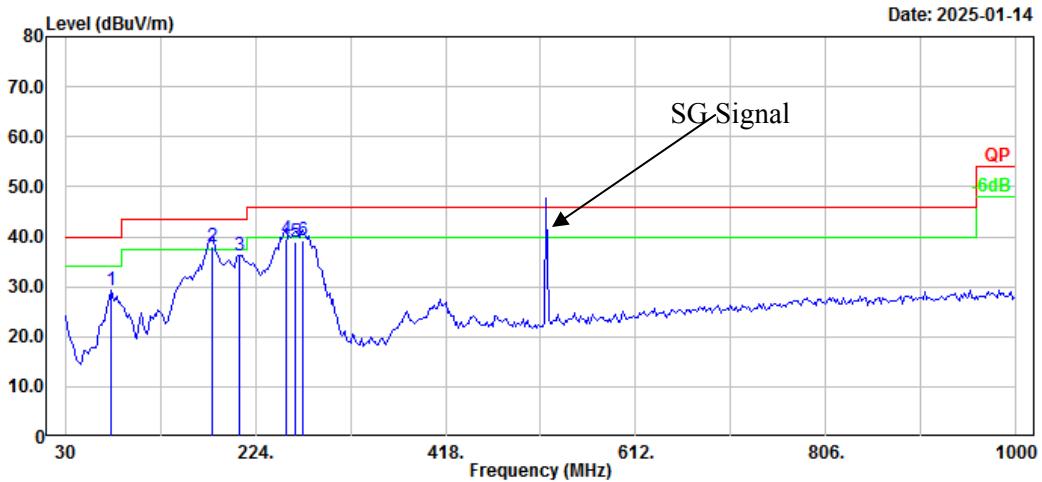

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	76.56	45.45	-16.25	29.20	40.00	10.80	Peak
2	179.38	50.50	-12.32	38.18	43.50	5.32	QP
3	208.48	48.67	-12.40	36.27	43.50	7.23	Peak
4	255.04	50.69	-11.27	39.42	46.00	6.58	QP
5	264.74	49.61	-10.63	38.98	46.00	7.02	QP
6	272.50	49.19	-9.98	39.21	46.00	6.79	QP

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 519.9875MHz  
RBW:100kHz VBW:300kHz

Serial No.: 2W4W-2  
Tester: Leesin Xiang

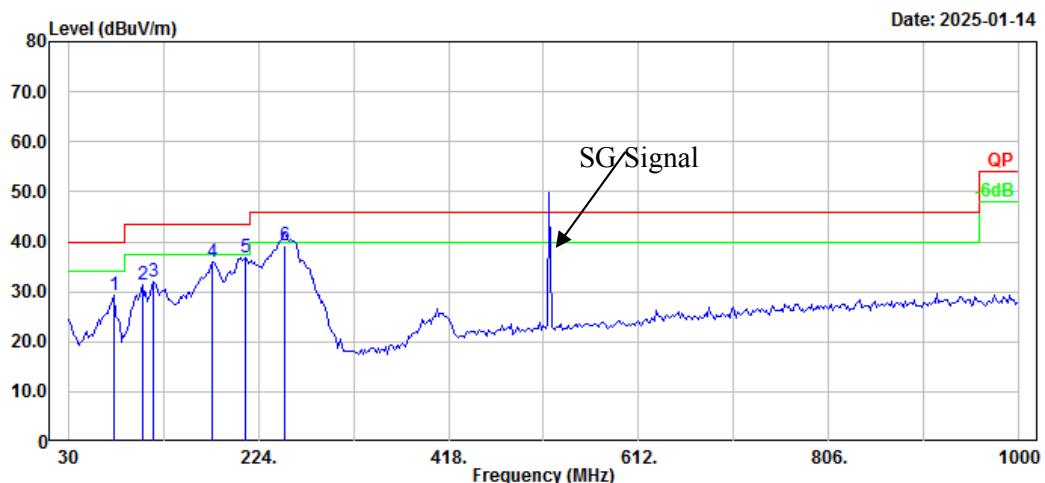


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	76.56	45.53	-16.25	29.28	40.00	10.72	Peak
2	105.66	44.18	-12.68	31.50	43.50	12.00	Peak
3	117.30	42.24	-10.33	31.91	43.50	11.59	Peak
4	177.44	47.99	-12.21	35.78	43.50	7.72	Peak
5	210.42	49.45	-12.57	36.88	43.50	6.62	Peak
6	251.16	50.51	-11.41	39.10	46.00	6.90	QP

M3(370MHz):

Project No.: 2402A59151E-RF  
Polarization: Horizontal  
Test Mode: M3  
Note: 370MHz  
RBW:100kHz VBW:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

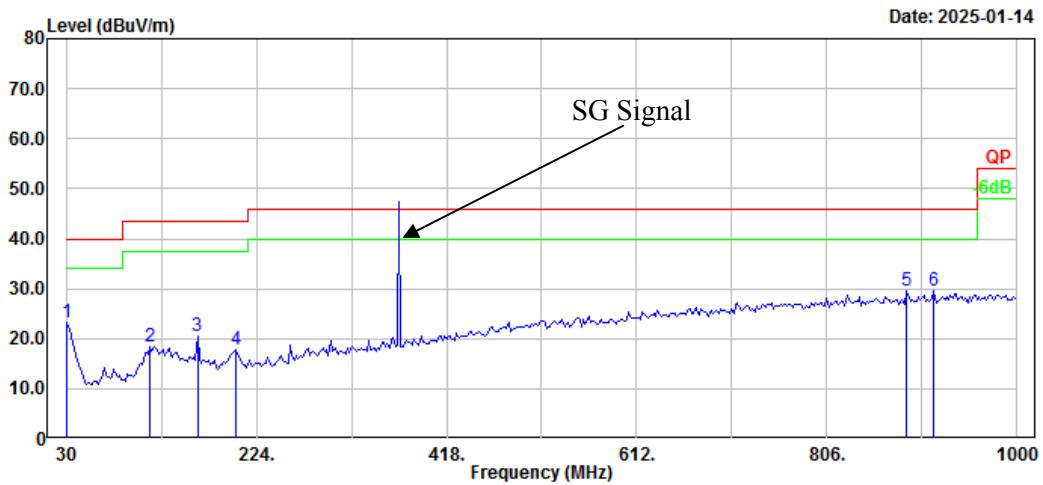

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	30.00	26.93	-3.80	23.13	40.00	16.87	Peak
2	115.36	29.03	-10.60	18.43	43.50	25.07	Peak
3	163.86	31.87	-11.39	20.48	43.50	23.02	Peak
4	202.66	29.63	-11.80	17.83	43.50	25.67	Peak
5	887.48	28.23	1.28	29.51	46.00	16.49	Peak
6	914.64	27.96	1.60	29.56	46.00	16.44	Peak

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M3  
Note: 370MHz  
RBW:100kHz VBV:300kHz


Serial No.: 2W4W-2  
Tester: Leesin Xiang

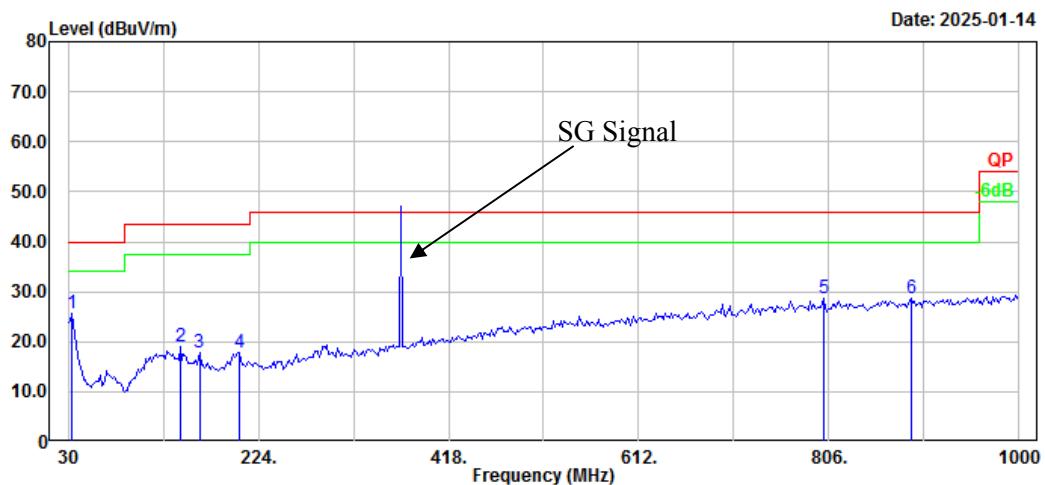

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	33.88	32.23	-6.62	25.61	40.00	14.39	Peak
2	144.46	29.85	-10.73	19.12	43.50	24.38	Peak
3	163.86	29.15	-11.39	17.76	43.50	25.74	Peak
4	204.60	29.86	-12.01	17.85	43.50	25.65	Peak
5	800.18	28.24	0.46	28.70	46.00	17.30	Peak
6	889.42	27.40	1.30	28.70	46.00	17.30	Peak


Above 1GHz:

M1(108-136 MHz was worst):

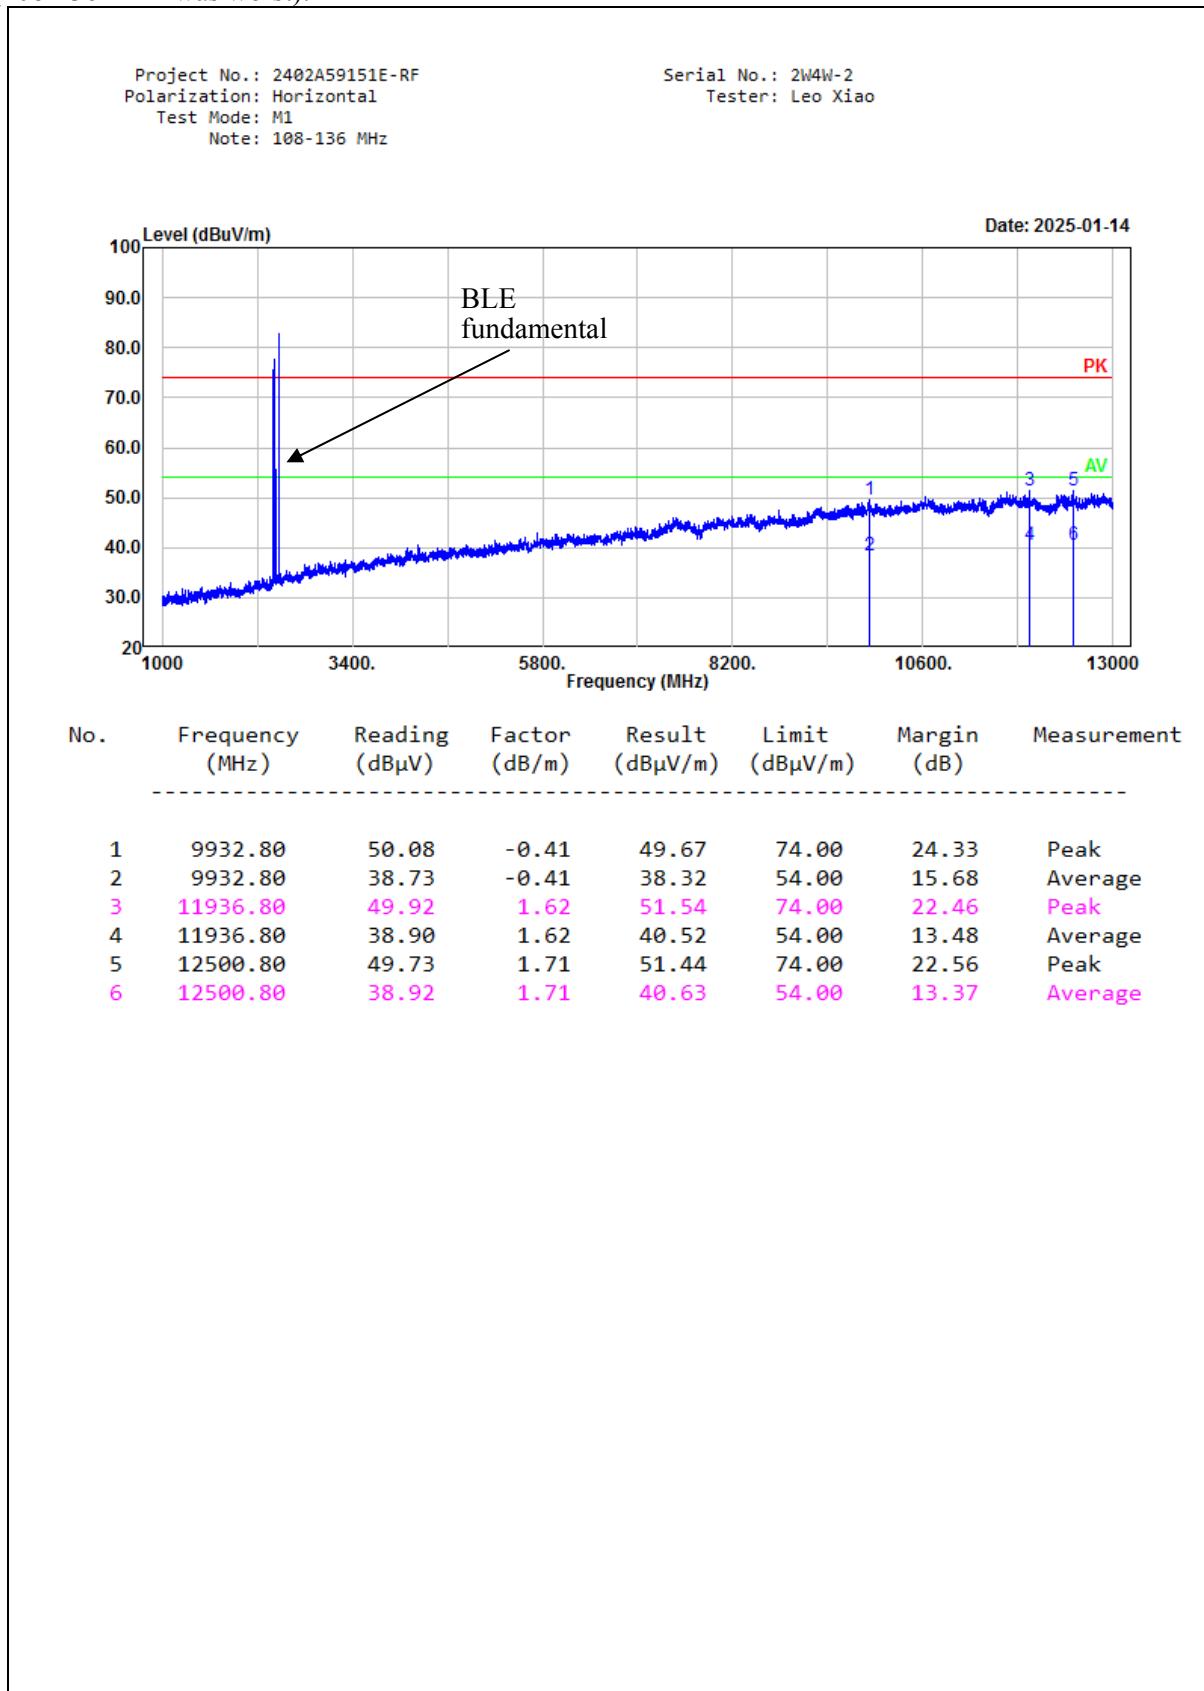


Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M1  
Note: 108-136 MHz

Serial No.: 2W4W-2  
Tester: Leo Xiao

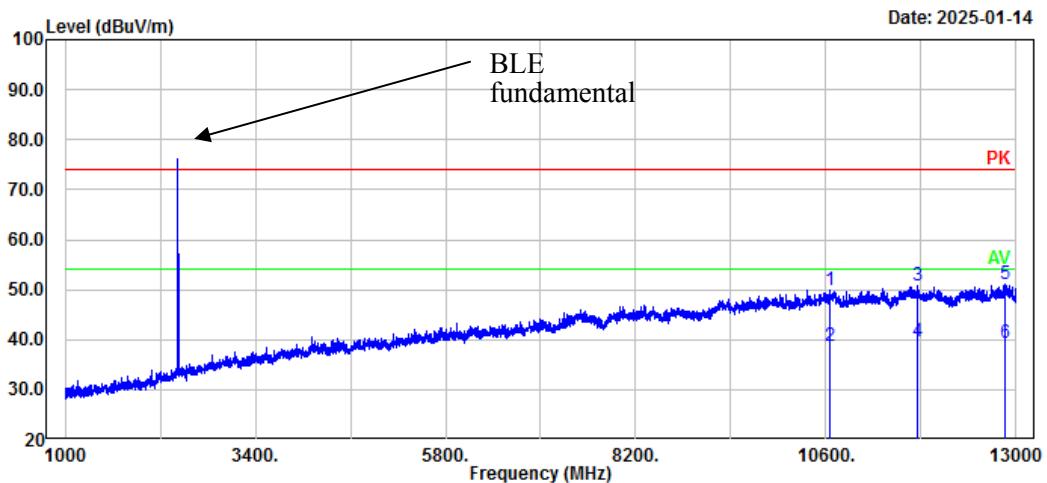


No.	Frequency (MHz)	Reading (dB <sub>u</sub> V)	Factor (dB/m)	Result (dB <sub>u</sub> V/m)	Limit (dB <sub>u</sub> V/m)	Margin (dB)	Measurement
1	10657.60	49.18	0.64	49.82	74.00	24.18	Peak
2	10657.60	38.05	0.64	38.69	54.00	15.31	Average
3	11756.80	49.26	1.61	50.87	74.00	23.13	Peak
4	11756.80	38.14	1.61	39.75	54.00	14.25	Average
5	12851.20	49.06	1.89	50.95	74.00	23.05	Peak
6	12851.20	37.52	1.89	39.41	54.00	14.59	Average

**M2**(370 MHz was the worst):

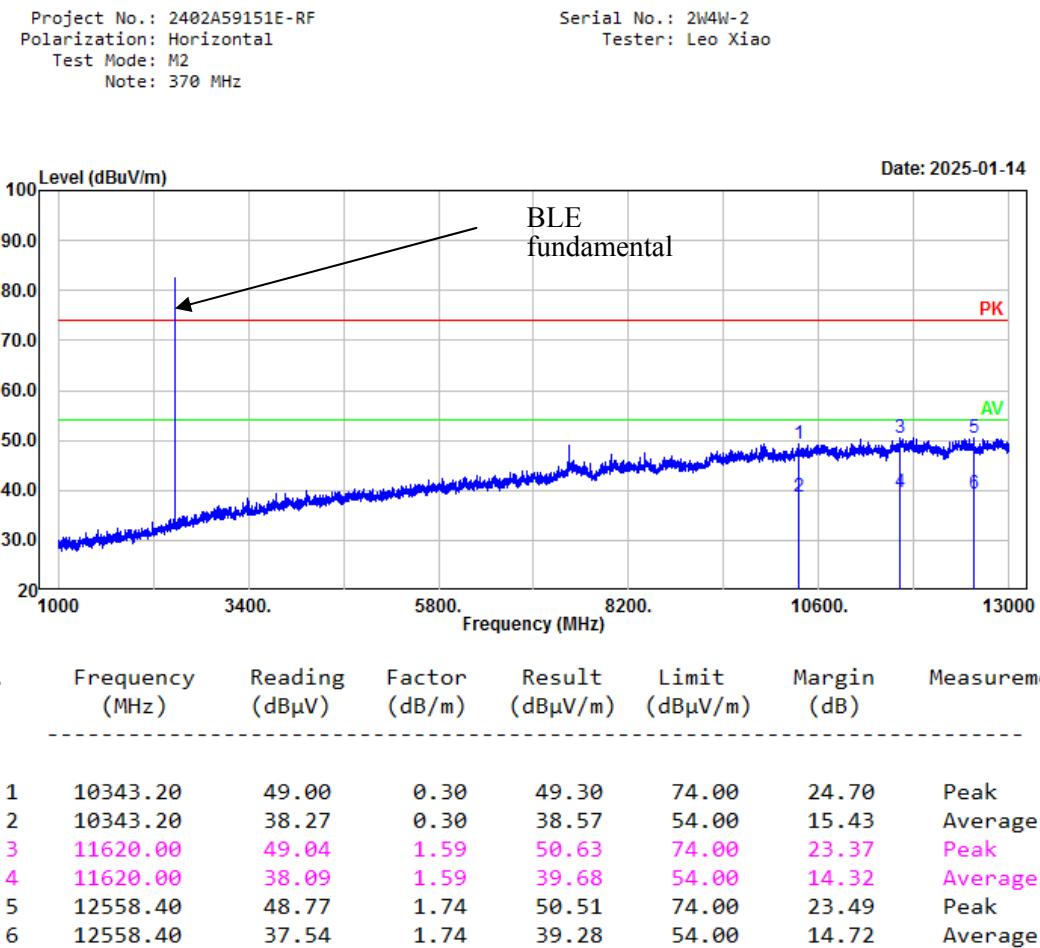


Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M2  
Note: 370 MHz

Serial No.: 2W4W-2  
Tester: Leo Xiao

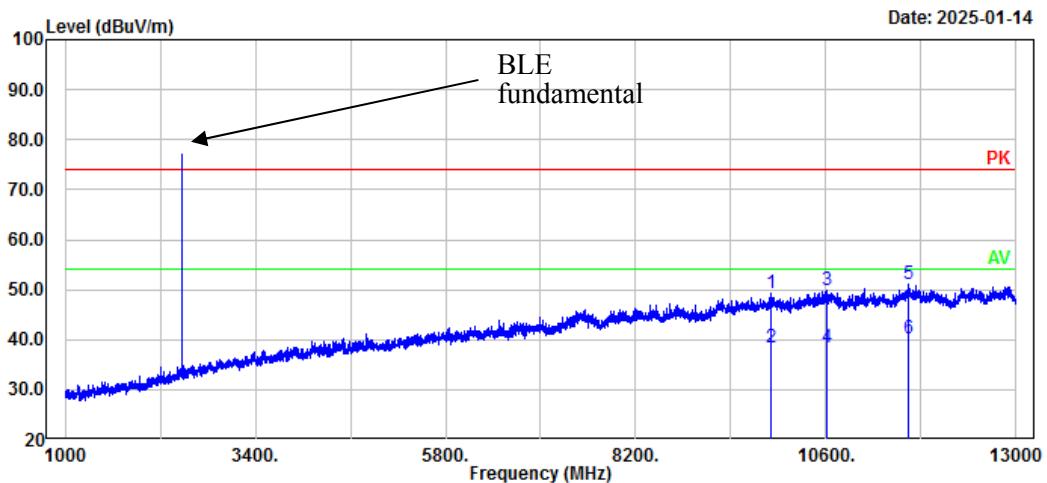


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Measurement
1	9906.40	49.64	-0.44	49.20	74.00	24.80	Peak
2	9906.40	38.99	-0.44	38.55	54.00	15.45	Average
3	10602.40	49.19	0.62	49.81	74.00	24.19	Peak
4	10602.40	37.79	0.62	38.41	54.00	15.59	Average
5	11636.80	49.44	1.58	51.02	74.00	22.98	Peak
6	11636.80	38.61	1.58	40.19	54.00	13.81	Average

M3 (108-136 MHz was worst):

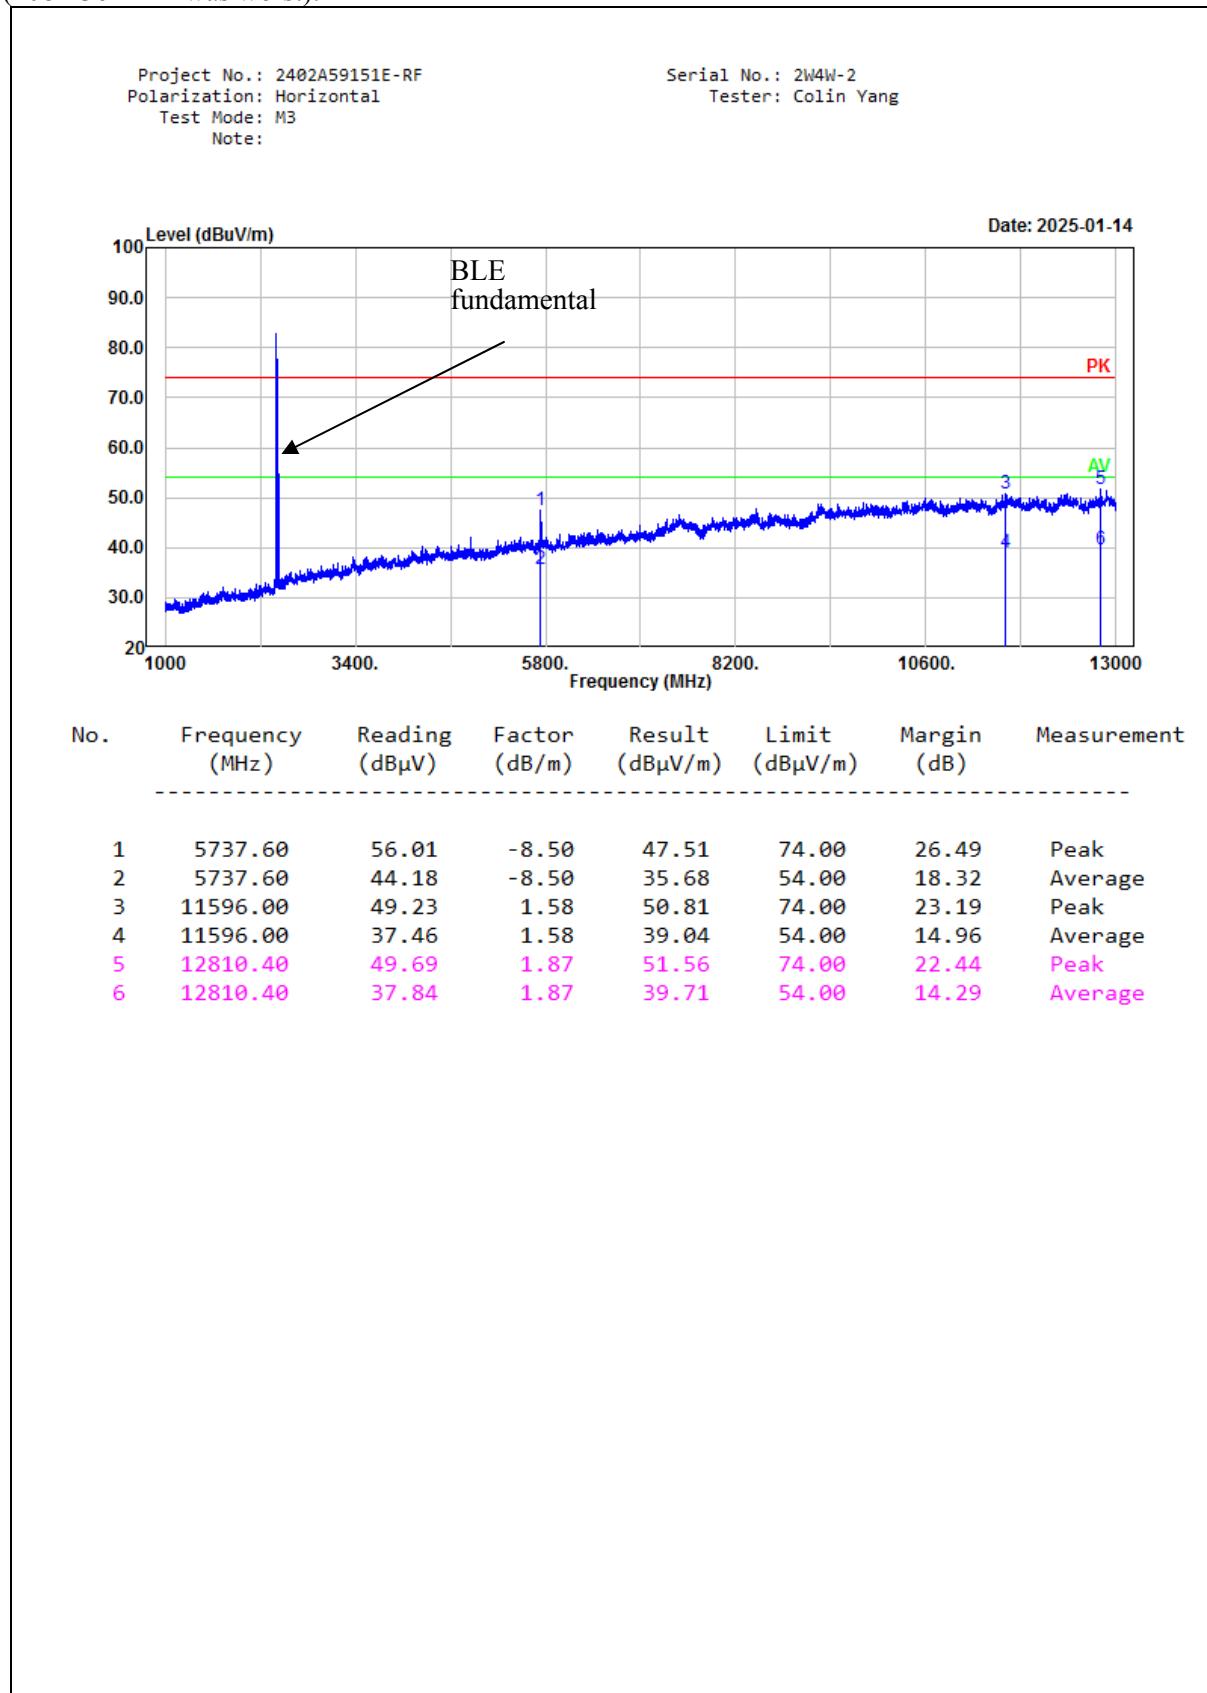

Project No.: 2402A59151E-RF  
Polarization: Vertical  
Test Mode: M3  
Note:

Serial No.: 2W4W-2  
Tester: Colin Yang

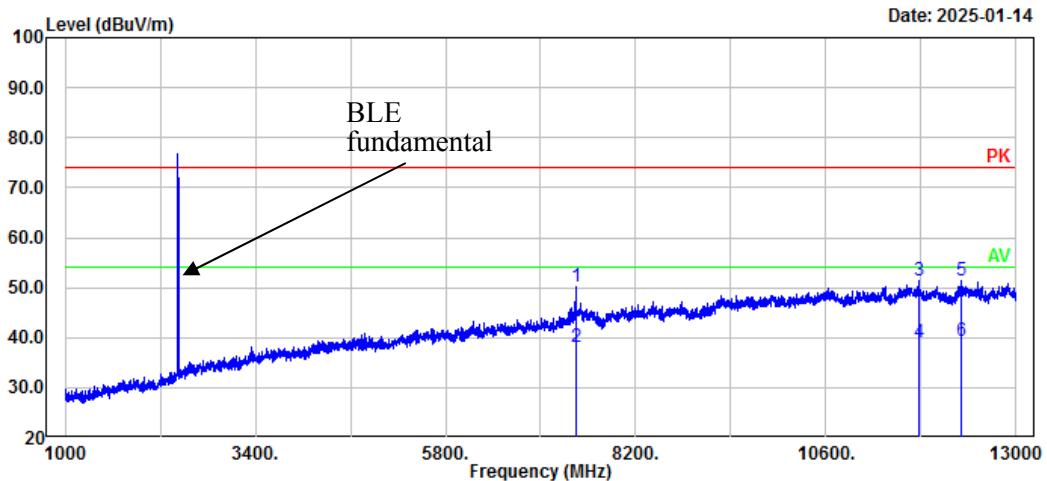

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Measurement
1	7439.20	54.85	-4.52	50.33	74.00	23.67	Peak
2	7439.20	42.49	-4.52	37.97	54.00	16.03	Average
3	11766.40	49.83	1.61	51.44	74.00	22.56	Peak
4	11766.40	37.48	1.61	39.09	54.00	14.91	Average
5	12299.20	49.85	1.68	51.53	74.00	22.47	Peak
6	12299.20	37.78	1.68	39.46	54.00	14.54	Average

## 4.3 Scanning Receivers and Frequency Converters Used with Scanning Receivers


### 4.3.1 Applicable Standard

FCC §15.121(b).

(b) Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are 38 dB or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

### 4.3.2 Test Procedure

1. Connected the EUT as the below block diagram;

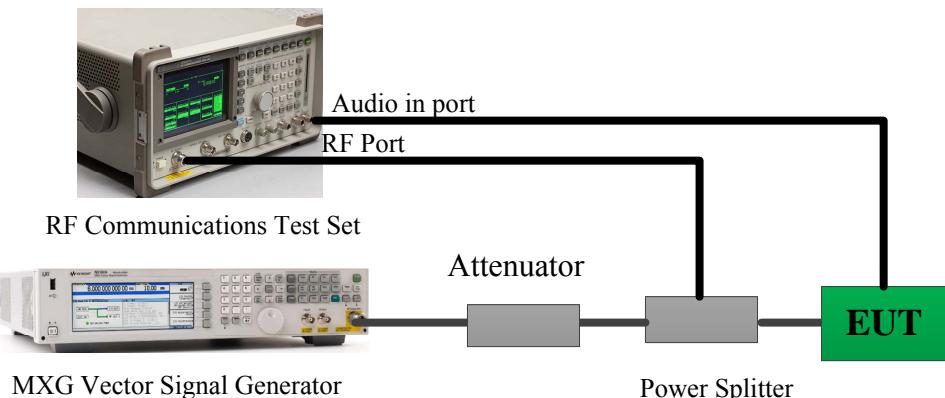

2. Apply a signal to the EUT antenna port at lowest, middle, highest channel frequencies of the operating band;
3. Adjust the audio output level of the EUT to its rated value with the distortion less than 10%;
4. Adjust the 8920 output power to produce 12 dB SINAD without the audio output power dropping by more than 3 dB; These output level of the 8920 at each channel frequency is the sensitivity of the EUT;
5. Select the lowest or worst case sensitivity level for all of the bands as the reference sensitivity;
6. Adjust the Signal Generator output to a level of +60 dB above the reference sensitivity obtained in step 5 and its frequency to the frequency point in the Cellular Band;
7. Set the EUT squelch to threshold, the signal required to open the squelch must be lower than the reference sensitivity level;
8. Set the EUT in a scanning mode and allow it to scan through its complete receiving range;
9. If the EUT un-squelched or stopped on any frequency, receiving at this frequency, then adjust the signal generator output level until 12 dB SINAD is produced, this level is the spurious value and the difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38 dB;
10. Repeat above procedure at the frequencies 824, 836, 849 MHz for the mobile band, and 869, 881.5 and 894 MHz for the Cellular Base Band.

#### 4.3.3 Scanning Receivers and Frequency Converters Used with Scanning Receivers

Serial Number:	2W4W-2	Test Date:	2025/1/18
Test Site:	RF	Test Mode:	Scanning
Tester:	Stu Song	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	21.4	Relative Humidity: (%)	35	ATM Pressure: (kPa)	101.5
-------------------	------	------------------------	----	---------------------	-------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Micro-Coax	Coaxial Cable	UFB205A	323308-024	2024/6/1	2025/5/31
Micro-Coax	Coaxial Cable	UFB205A	323308-015	2024/6/1	2025/5/31
Micro-Coax	Coaxial Cable	UFB205A	323308-018	2024/6/1	2025/5/31
Huaxiang	Coaxial Attenuator	DTS250-30	11022109	2024/6/7	2025/6/6
Mini-Circuits	Coaxial Power Splitters & Combiner	ZFRSC-183-S+	SF448201614	2024/2/25	2025/2/24
HP	RF Communications Test Set	8920A	3438A05201	2024/10/17	2025/10/16
Agilent	MXG Vector Signal Generator	N5182B	MY51350142	2024/8/26	2025/8/25

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

Scanning Frequency Range (MHz)	Test Frequency (MHz)	Measurement Result (dB)	Limit (dB)
108-136	824, 836, 849, 869, 881.5, 894	45	>38
136-174	824, 836, 849, 869, 881.5, 894	48	>38
220-260	824, 836, 849, 869, 881.5, 894	44	>38
350-390	824, 836, 849, 869, 881.5, 894	46	>38
400-520	824, 836, 849, 869, 881.5, 894	45	>38

---

## **EXHIBIT A - EUT PHOTOGRAPHS**

---

Please refer to the attachment 2402A59151E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2402A59151E-RF-INP EUT INTERNAL PHOTOGRAPHS

---

## **EXHIBIT B - TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment 2402A59151E-RF-00B-TSP TEST SETUP PHOTOGRAPHS.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***