

SAR EVALUATION REPORT

For

PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY

3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN HONGKONG

FCC ID: 2AJGM-DM-5R

Report Type: Product Type:

Original Report VHF/UHF Two Way Radio

Report Number: RXM160918052-20

Report Date: 2018-01-07

Rocky Xiao

Reviewed By: RF Engineer

Prepared By: Bay Area Compliance Laboratories Corp. (Dongguan)

No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

pocky xiao

Tel: +86-769-8685888 Fax: +86-769-86858891 www.baclcorp.com.cn

	A	ttestation of Test Results				
EUT Description		VHF/UHF Two Way Radio				
	Main Model	DM-5R				
EUT Information	Multiple Model	DMR-5RA, DMR-5RB, DMR-5RC, DMR-5RE, GT-3 DMR				
v	FCC ID	2AJGM-DM-5R				
	Test Date	2017-10-22 ~ 2018-01-05				
MO	DE	Max. SAR Level(s) Repo	orted(W/kg)	Limit		
PTT(136-1	74 MHz)	1g Head SAR(Face Up)	1.43			
1 1 1 (130-1	. 74 WIIIZ)	1g Body SAR(Body Back)	1.70	9.0 (W/I.a)		
DEET. (100, 100 DAY)		1g Head SAR(Face Up)	2.31	8.0 (W/kg)		
PTT(400-4	880 MHZ)	1g Body SAR(Body Back)	3.59			
IEEE1528:2013 IEEE Recommende		Practice for Determining the Peal R) in the Human Head from Wire	k Spatial-Average S			
Applicable Standards	communication device to determine the special close proximity to the KDB procedures KDB 447498 D01 Ge KDB 865664 D01 SA	radio frequency fields from hand-held and body-mounted wireless ices-Human models, instrumentation, and procedures-Part 2: Procedure reific absorption rate (SAR) for wireless communication devices used in the human body (frequency range of 30 MHz to 6 GHz) General RF Exposure Guidance v06 GAR Measurement 100 MHz to 6 GHz v01r04 RF Exposure Reporting v01r02				

Report No.: RXM160918052-20

Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for Occupational/Controlled Exposure limits specified in **FCC 47 CFR part 2.1093** and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.

The results and statements contained in this report pertain only to the device(s) evaluated.

SAR Evaluation Report 2 of 35

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
EUT DESCRIPTION	5
TECHNICAL SPECIFICATION	5
REFERENCE, STANDARDS, AND GUIDELINES	6
SAR LIMITS	7
FACILITIES	8
DESCRIPTION OF TEST SYSTEM	9
EQUIPMENT LIST AND CALIBRATION	14
EQUIPMENTS LIST & CALIBRATION INFORMATION	
SAR MEASUREMENT SYSTEM VERIFICATION	15
LIQUID VERIFICATION	
SYSTEM ACCURACY VERIFICATION	
SAR SYSTEM VALIDATION DATA	
EUT TEST STRATEGY AND METHODOLOGY	
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON'S EAR	
CHEEK/TOUCH POSITION EAR/TILT POSITION	
TEST POSITION TEST POSITION TO THE CONFIGURATIONS	
TEST DISTANCE FOR SAR EVALUATION	24
SAR EVALUATION PROCEDURE	25
CONDUCTED OUTPUT POWER MEASUREMENT	26
Provision Applicable	
TEST PROCEDURE	
TEST RESULTS:	
SAR MEASUREMENT RESULTS	
SAR TEST DATA	
TEST RESULT:	
SAR MEASUREMENT VARIABILITY	30
SAR PLOTS	31
APPENDIX A MEASUREMENT UNCERTAINTY	32
APPENDIX B EUT TEST POSITION PHOTOS	34
APPENDIX C CALIBRATION CERTIFICATES	35

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	RXM160918052-20	Original Report	2018-01-07

Report No.: RXM160918052-20

SAR Evaluation Report 4 of 35

EUT DESCRIPTION

The **PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY's** product, model number: **DM-5R** (FCC ID: **2AJGM-DM-5R**) in this report is a **VHF/UHF Two Way Radio**.

Report No.: RXM160918052-20

The products, main model: DM-5R, multiple model: DMR-5RA, DMR-5RB, DMR-5RC, DMR-5RE, GT-3 DMR. Their differences were presented in Product Difference Statement provided by the applicant.

* All measurement and test data in this report was gathered from production sample as listed below(Assigned by BACL, Dongguan):

Model	Serial Number	Model	Serial Number
DM-5R	16091805221	DMR-5RC	16091805224
DMR-5RA	16091805222	DMR-5RE	16091805225
DMR-5RB	16091805223	GT-3 DMR	16091805226

[.] The EUT supplied by the applicant were received on 2017-04-14.

Technical Specification

Device Type:	Portable	
Exposure Category:	Occupational/Controlled Exposure	
Antenna Type(s):	External Antenna	
Body-Worn Accessories:	Belt Clip	
Face-Head Accessories: None		
Operation Mode:	PTT_FM, PTT_4FSK	
Frequency Band:	Frequency Band: PTT_FM/PTT_4FSK:136 -174 MHz, 400 -480 MHz	
Conducted RF Power:	PTT_FM 136 -174 MHz: 5.18 W PTT_4FSK 136 -174 MHz: 5.18 W PTT_FM 400 -480 MHz: 4.13 W PTT_4FSK 400 -480 MHz: 4.19 W	
Power Source:	7.4 VDC Rechargeable Battery	
Normal Operation:	Face Up and Body-worn	

SAR Evaluation Report 5 of 35

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

Report No.: RXM160918052-20

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Evaluation Report 6 of 35

SAR Limits

FCC Limit

Report No.: RXM160918052-20

	SAR (W/kg)			
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)		
Spatial Average (averaged over the whole body)	0.08	0.4		
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0		
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0		

CE Limit

	SAR (W/kg)				
	(General Population /	(Occupational /			
EXPOSURE LIMITS	Uncontrolled Exposure	Controlled Exposure			
	Environment)	Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 10 g of tissue)	2.0	10			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

Occupational/Controlled environments Spatial Peak limit 8.0 W/kg (FCC/IC) & 10.0 W/kg (CE) applied to the EUT.

SAR Evaluation Report 7 of 35

FACILITIES

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

Report No.: RXM160918052-20

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 897218,the FCC Designation No.: CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

The test sites and measurement facilities used to collect data are located at:

⊠ SAR Lab 1	☐ SAR Lab 2
-------------	-------------

SAR Evaluation Report 8 of 35

DESCRIPTION OF TEST SYSTEM


These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:

Report No.: RXM160918052-20



DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

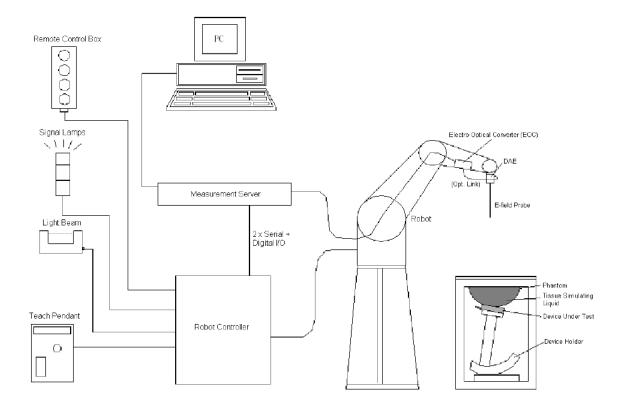

SAR Evaluation Report 9 of 35

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY5 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz Intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical



Report No.: RXM160918052-20

processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

SAR Evaluation Report 10 of 35

EX3DV4 E-Field Probes

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: \pm 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

Report No.: RXM160918052-20

Robots

The DASY5 system uses the high precision industrial robot. The robot offers the same features important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

SAR Evaluation Report 11 of 35

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Report No.: RXM160918052-20

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m^3 is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10 mm, with the side length of the 10 g cube is 21.5 mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

SAR Evaluation Report 12 of 35

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Report No.: RXM160918052-20

Recommended Tissue Dielectric Parameters for Head and Body

Frequency	Head	Tissue	Body	Tissue
(MHz)	εr	O'(S/m)	εr	O (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

SAR Evaluation Report 13 of 35

EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information


Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52.8	N/A	NCR	NCR
DASY5 Measurement Server	DASY5 4.5.12	1470	NCR	NCR
Data Acquisition Electronics	DAE4	1459	2017/9/15	2018/9/15
E-Field Probe	EX3DV4	7441	2016/11/15	2017/11/14
E-Field Flobe	EA3DV4	/441	2017/11/23	2018/11/22
CLA150	Loop, 150 MHz	4020	2016/11/8	2019/11/7
Dipole, 450MHz	D450V3	1096	2016/11/07	2019/11/06
Mounting Device	MD4HHTV5	BJPCTC0152	N/A	N/A
Oval Flat Phantom	ELI V8.0	2051	N/A	N/A
Simulated Tissue 150 MHz Head	TS-150-H	1709015001	Each Time	/
Simulated Tissue 150 MHz Body	TS-150-B	1709015002	Each Time	/
Simulated Tissue 450 MHz Head	TS-450-H	1709045001	Each Time	/
Simulated Tissue 450 MHz Body	TS-450-B	1709045002	Each Time	/
Network Analyzer	8753C	3033A02857	2017/8/31	2018/8/31
Dielectric assessment kit	1253	SM DAK 040 CA	N/A	N/A
Signal Generator	N5182B	MY51350142	2017/5/4	2018/5/4
D 14	EDM 441 A	CD27401404	2016/12/8	2017/12/8
Power Meter	EPM-441A	GB37481494	2017/12/11	2018/12/11
Power Amplifier	5205FE	1015	N/A	N/A
Power Amplifier	ZVA-213-S+	SN054 201245	N/A	N/A
Directional Coupler	488Z	N/A	N/A	N/A
Attenuator	20dB, 100W	N/A	N/A	N/A
Attenuator	3dB, 150W	N/A	N/A	N/A

Report No.: RXM160918052-20

SAR Evaluation Report 14 of 35

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

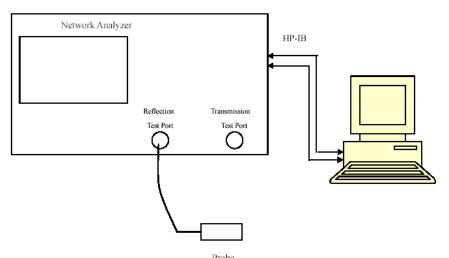

Report No.: RXM160918052-20

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency	Liquid Type	_	quid ameter Targe		arget Value		elta 6)	Tolerance
(MHz)	Liquid Type	ε _r	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
136.0125	Simulated Tissue 150 MHz Head	52.55	0.772	52.95	0.75	-0.76	2.93	±5
144	Simulated Tissue 150 MHz Head	52.516	0.769	52.67	0.75	-0.29	2.53	±5
150	Simulated Tissue 150 MHz Head	52.442	0.77	52.3	0.76	0.27	1.32	±5
155	Simulated Tissue 150 MHz Head	52.301	0.774	52.3	0.76	0	1.84	±5
164	Simulated Tissue 150 MHz Head	51.481	0.797	51.79	0.77	-0.6	3.51	±5
173.9875	Simulated Tissue 150 MHz Head	50.501	0.793	51.18	0.78	-1.33	1.67	±5

^{*}Liquid Verification above was performed on 2017/10/22.

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz)	Liquid Type	$\epsilon_{ m r}$	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta\epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
136.0125	Simulated Tissue 150 MHz Body	61.832	0.82	62.25	0.79	-0.67	3.8	±5
144	Simulated Tissue 150 MHz Body	60.813	0.821	62.1	0.79	-2.07	3.92	±5
150	Simulated Tissue 150 MHz Body	60.512	0.826	61.9	0.8	-2.24	3.25	±5
155	Simulated Tissue 150 MHz Body	60.326	0.824	61.9	0.8	-2.54	3	±5
164	Simulated Tissue 150 MHz Body	59.777	0.841	61.63	0.81	-3.01	3.83	±5
173.9875	Simulated Tissue 150 MHz Body	59.803	0.85	61.31	0.82	-2.46	3.66	±5

^{*}Liquid Verification above was performed on 2017/10/22.

SAR Evaluation Report 15 of 35

Frequency	Liquid Tuno	Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz)	Liquid Type	$\epsilon_{ m r}$	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
400.0125	Simulated Tissue 450 MHz Head	44.049	0.84	44.1	0.87	-0.12	-3.45	±5
420	Simulated Tissue 450 MHz Head	43.587	0.862	43.86	0.87	-0.63	-0.92	±5
440	Simulated Tissue 450 MHz Head	42.968	0.866	43.62	0.87	-1.49	-0.46	±5
450	Simulated Tissue 450 MHz Head	42.894	0.878	43.5	0.87	-1.39	0.92	±5
460	Simulated Tissue 450 MHz Head	42.287	0.879	43.45	0.87	-2.68	1.03	±5
479.9875	Simulated Tissue 450 MHz Head	42.331	0.878	43.34	0.87	-2.33	0.92	±5

^{*}Liquid Verification above was performed on 2018/1/5.

Frequency	Liquid Tuno	Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz)	Liquid Type	ε _r	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
400.0125	Simulated Tissue 450 MHz Body	55.036	0.935	57.2	0.93	-3.78	0.54	±5
420	Simulated Tissue 450 MHz Body	54.892	0.936	57	0.94	-3.7	-0.43	±5
440	Simulated Tissue 450 MHz Body	54.771	0.954	56.8	0.94	-3.57	1.49	±5
450	Simulated Tissue 450 MHz Body	54.555	0.974	56.7	0.94	-3.78	3.62	±5
460	Simulated Tissue 450 MHz Body	54.628	0.968	56.66	0.94	-3.59	2.98	±5
479.9875	Simulated Tissue 450 MHz Body	54.639	0.961	56.58	0.94	-3.43	2.23	±5

^{*}Liquid Verification above was performed on 2018/1/4.

SAR Evaluation Report 16 of 35

System Accuracy Verification


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

Report No.: RXM160918052-20

The spacing distance s in the **System Verification Setup Block Diagram** is given by the following:

- a) $s = 15 \text{ mm} \pm 0.2 \text{ mm for } 300 \text{ MHz} \le f \le 1000 \text{ MHz};$
- b) $s = 10 \text{ mm} \pm 0.2 \text{ mm}$ for $1000 \text{ MHz} < f \le 3000 \text{ MHz}$;
- c) $s = 10 \text{ mm} \pm 0.2 \text{ mm for } 3000 \text{ MHz} < f \le 6000 \text{ MHz}.$
- d) s = 0 mm for f = 150 MHz(Loop Antenna).

System Verification Setup Block Diagram

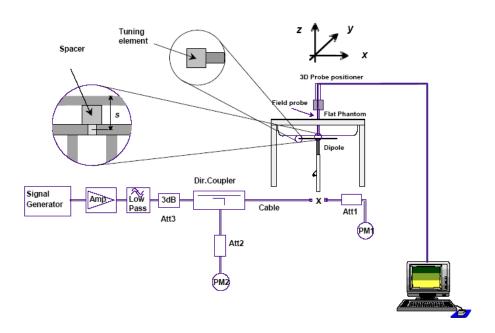

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Input Power (mW)	Measured SAR (W/kg)		Normalized to 1W (W/kg)	Target Value (W/kg)	Delta (%)	Toleranc e (%)
2017/10/22	150 MHz	150MHz Head	100	1g	0.365	3.65	3.64	0.27	±10
2017/10/22	150 MHz	150MHz Body	100	1g	0.388	3.88	3.73	4.02	±10
2018/1/5	450 MHz	450MHz Head	100	1g	0.457	4.57	4.53	0.88	±10
2018/1/4	450 MHz	450MHz Body	100	1g	0.441	4.41	4.55	-3.08	±10

^{*}The SAR values above are normalized to 1 Watt forward power.

SAR Evaluation Report 17 of 35

SAR SYSTEM VALIDATION DATA

System Performance 150 MHz Head

DUT: CLA-150; Type: Loop, 150MHz; Serial: 4020

Communication System: CW; Frequency: 150 MHz; Duty Cycle: 1:1

Medium parameters used: f = 150 MHz; $\sigma = 0.77 \text{ S/m}$; $\varepsilon_r = 52.442$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

• Probe: EX3DV4 - SN7441; ConvF(13.25, 13.25, 13.25); Calibrated: 2016/11/15;

Report No.: RXM160918052-20

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2017/9/15

Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.472 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.71 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 0.467 W/kg

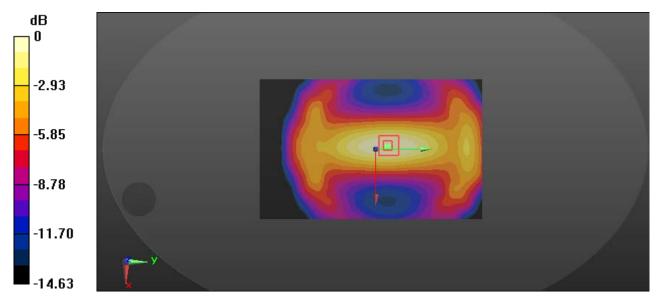

0 dB = 0.467 W/kg = -3.31 dBW/kg

SAR Evaluation Report 18 of 35

System Performance 150 MHz Body

DUT: CLA-150; Type: Loop, 150 MHz; Serial: 4020

Communication System: CW; Frequency: 150 MHz; Duty Cycle: 1:1

Medium parameters used: f = 150 MHz; $\sigma = 0.826$ S/m; $\varepsilon_r = 60.512$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7441; ConvF(12.58, 12.58, 12.58); Calibrated: 2016/11/15;

Report No.: RXM160918052-20

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2017/9/15

• Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x151x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.527 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.88 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.531 W/kg

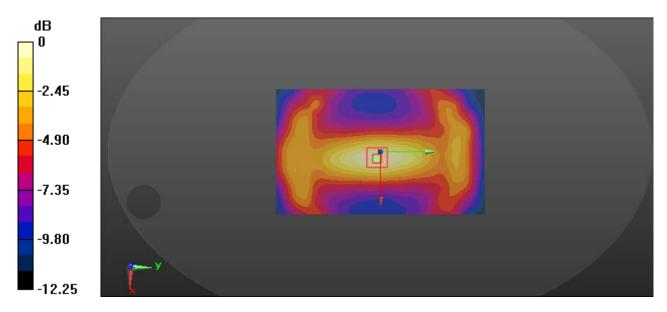

0 dB = 0.531 W/kg = -2.75 dBW/kg

SAR Evaluation Report 19 of 35

System Performance 450 MHz Head

DUT: Dipole 450 MHz; Type: D450V3; Serial: 1096

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 450 MHz; $\sigma = 0.878 \text{ S/m}$; $\varepsilon_r = 42.894$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7441; ConvF(10.97, 10.97, 10.97); Calibrated: 2017/11/23;

Report No.: RXM160918052-20

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2017/9/15

Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x201x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.602 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.11 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.705 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.31 W/kg

Maximum value of SAR (measured) = 0.613 W/kg

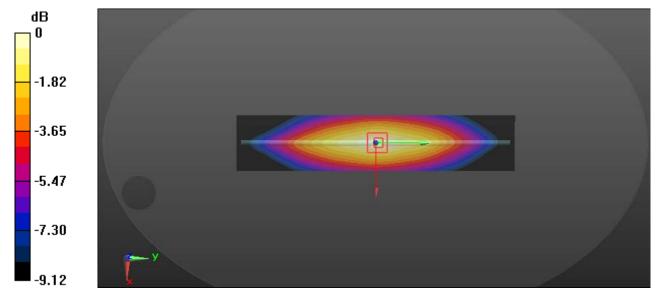

0 dB = 0.613 W/kg = -2.13 dBW/kg

SAR Evaluation Report 20 of 35

System Performance 450 MHz Body

DUT: Dipole 450 MHz; Type: D450V3; Serial: 1096

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 450 MHz; $\sigma = 0.974 \text{ S/m}$; $\varepsilon_r = 54.555$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7441; ConvF(12.08, 12.08, 12.08); Calibrated: 2017/11/23;

Report No.: RXM160918052-20

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1459; Calibrated: 2017/9/15

Phantom: ELI v8.0; Type: QDOVA004AA; Serial: 2051

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x201x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.613 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.93 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.699 W/kg

SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 0.599 W/kg

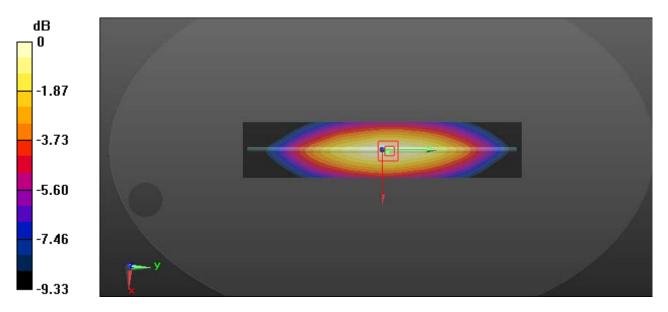

0 dB = 0.599 W/kg = -2.23 dBW/kg


SAR Evaluation Report 21 of 35


EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

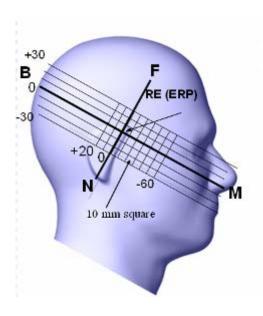



Report No.: RXM160918052-20

SAR Evaluation Report 22 of 35

Cheek/Touch Position

The device is brought toward the mouth of the head phantom by pivoting against the "ear reference point" or along the "N-F" line for the SCC-34/SC-2 head phantom.

This test position is established:


When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.

Report No.: RXM160918052-20

(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek / Touch Position

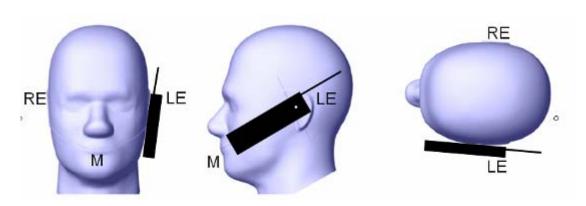

Ear/Tilt Position

With the handset aligned in the "Cheek/Touch Position":


- 1) If the earpiece of the handset is not in full contact with the phantom's ear spacer (in the "Cheek/Touch position") and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.
- 2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both "ear reference points" (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the "test device reference point" until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the "Cheek/Touch" and "Ear/Tilt" positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

SAR Evaluation Report 23 of 35

Ear /Tilt 15° Position

Report No.: RXM160918052-20

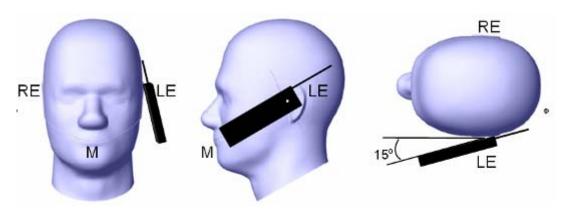

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

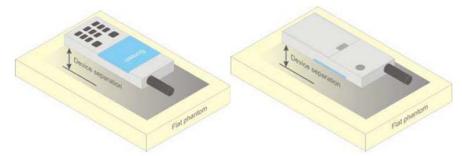


Figure 5 - Test positions for body-worn devices

Test Distance for SAR Evaluation

For this case the DUT(Device Under Test) is set directly against the phantom, the test distance is 0mm for Body Back mode; for Face Up mode the distance is 25mm.

SAR Evaluation Report 24 of 35

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Report No.: RXM160918052-20

- Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.
- Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:
 - 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

SAR Evaluation Report 25 of 35

CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the Power Meter through sufficient attenuation.

Report No.: RXM160918052-20



Maximum Target Output Power

N	1ode	Rated Power	Maximum output Power(With tolerance)
PTT	FM_12.5kHz	5.0 (W)	5.2 (W)
(136-174 MHz)	4FSK_12.5kHz	5.0 (W)	5.2 (W)
PTT	FM_12.5kHz	4.0 (W)	4.2 (W)
(400-480 MHz)	4FSK_12.5kHz	4.0 (W)	4.2 (W)

Test Results:

Model	Band/Test	Mode	Frequency (MHz)	Output Power(W)	Power level
			136.0125	5.04	High
			144	5.16	High
		FM 12.5 kHz	155	4.91	High
			164	5.04	High
	PTT		173.9875	5.18	High
	(136-174 MHz)		136.0125	5.09	High
		477077	144	5.01	High
		4FSK 12.5 kHz	155	5.10	High
			164	5.18	High
DM-5R			173.9875	4.92	High
DWI-5K			400.0125	4.13	High
		FM 12.5 kHz	420	4.04	High
			440	4.13	High
		12.0 1112	460	4.02	High
	PTT		479.9875	3.93	High
	(400-480 MHz)		400.0125	3.93	High
		AEGIZ	420	3.96	High
		4FSK 12.5 kHz	440	4.09	High
		12.0 HILL	460	4.19	High
			479.9875	4.12	High

SAR Evaluation Report 26 of 35

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

Report No.: RXM160918052-20

SAR Test Data

Environmental Conditions

Temperature:	22.2-23.3 ℃	21.3-23.0 ℃	21.5-22.5 ℃
Relative Humidity:	41%	40%	41%
ATM Pressure:	100.8 kPa	100.7 kPa	100.8 kPa
Test Date:	2017/10/22	2018/1/4	2018/1/5

Testing was performed by Yun Yu, Brave Lu, Jayce Chen.

Test Result:

SAR Evaluation Report 27 of 35

PTT(136-174 MHz):

Pre-Scan all 5 Channels, the peak SAR located on 164 MHz for Face Up mode, 155 MHz For Body Back mode.

Report No.: RXM160918052-20

			_	Max.	Maximum	1	g SAR	Value(W/kg)	
Test N	Aode	EUT Model	Frequency (MHz)	Meas. Power (W)	output Power(W)	Scaled Factor		· `	50%	Plot
		DM-5R	164	5.04	5.2	1.038	1.94	2.014	1.01	1#
		DMR-5RA	164	5.04	5.2	1.038	1.73	1.796	0.90	2#
		DMR-5RB	164	5.04	5.2	1.038	2.52	2.616	1.31	3#
		DMR-5RC	164	5.04	5.2	1.038	2.14	2.221	1.11	4#
	Face Up		136.0125	5.04	5.2	1.038	0.565	0.586	0.29	5#
	(25 mm)		144	5.16	5.2	1.009	1.56	1.574	0.79	6#
		DMR-5RE	155	4.91	5.2	1.069	2.23	2.384	1.19	7#
			164	5.04	5.2	1.038	2.75	2.855	1.43	8#
			173.9875	5.18	5.2	1.005	1.39	1.397	0.70	9#
FM		GT-3 DMR	164	5.04	5.2	1.038	2.57	2.668	1.33	10#
12.5 kHz		DM-5R	155	4.91	5.2	1.069	2.04	2.181	1.09	11#
		DMR-5RA	155	4.91	5.2	1.069	2.61	2.790	1.40	12#
		DMR-5RB	155	4.91	5.2	1.069	2.31	2.469	1.23	13#
		DMR-5RC	155	4.91	5.2	1.069	1.78	1.903	0.95	14#
	Body Back	DMR-5RE	155	4.91	5.2	1.069	2.78	2.972	1.49	15#
	(0 mm)	GT-3 DMR	136.0125	5.04	5.2	1.038	1.42	1.474	0.74	16#
			144	5.16	5.2	1.009	2.06	2.079	1.04	17#
			155	4.91	5.2	1.069	3.18	3.399	1.70	18#
			164	5.04	5.2	1.038	2.63	2.730	1.37	19#
			173.9875	5.18	5.2	1.005	1.62	1.628	0.81	20#
		DM-5R	164	5.18	5.2	1.005	0.911	0.916	0.46	21#
		DMR-5RA	164	5.18	5.2	1.005	1.08	1.085	0.54	22#
	Face Up	DMR-5RB	164	5.18	5.2	1.005	1.32	1.327	0.66	23#
	(25 mm)	DMR-5RC	164	5.18	5.2	1.005	1.13	1.136	0.57	24#
		DMR-5RE	164	5.18	5.2	1.005	1.43	1.437	0.72	25#
4FSK		GT-3 DMR	164	5.18	5.2	1.005	1.27	1.276	0.64	26#
12.5 kHz	Body Back	DM-5R	155	5.10	5.2	1.023	1.35	1.381	0.69	27#
		DMR-5RA	155	5.10	5.2	1.023	1.37	1.402	0.70	28#
		DMR-5RB	155	5.10	5.2	1.023	1.28	1.309	0.65	29#
	(0 mm)	DMR-5RC	155	5.10	5.2	1.023	1.26	1.289	0.64	30#
		DMR-5RE	144	5.10	5.2	1.023	1.54	1.575	0.79	31#
		GT-3 DMR	155	5.10	5.2	1.023	1.22	1.248	0.62	32#

SAR Evaluation Report 28 of 35

PTT(400-480 MHz):

Pre-Scan all 5 Channels, the peak SAR located on 420 MHz

		DIIO	E	Max.	Maximum	1	g SAR	Value(W/kg)	
Test N	Aode	EUT Model	Frequency (MHz)	Meas. Power (W)	output Power(W)	Scaled Factor	Meas. SAR	Scaled SAR	50%	Plot
		DM-5R	420	4.04	4.2	1.038	3.73	3.872	1.94	33#
			400.0125	4.13	4.2	1.016	3.32	3.373	1.69	34#
			420	4.04	4.2	1.038	4.46	4.629	2.31	35#
		DMR-5RA	440	4.13	4.2	1.016	2.64	2.682	1.34	36#
	Face Up		460	4.02	4.2	1.042	2.03	2.115	1.06	37#
	(25 mm)		479.9875	3.93	4.2	1.064	1.43	1.522	0.76	38#
		DMR-5RB	420	4.04	4.2	1.038	4.24	4.401	2.20	39#
		DMR-5RC	420	4.04	4.2	1.038	3.6	3.737	1.87	40#
		DMR-5RE	420	4.04	4.2	1.038	4.15	4.308	2.15	41#
FM		GT-3 DMR	420	4.04	4.2	1.038	2.98	3.093	1.55	42#
12.5 kHz		DM-5R	420	4.04	4.2	1.038	6.19	6.425	3.21	43#
		DMR-5RA	420	4.04	4.2	1.038	6.32	6.560	3.28	44#
		DMR-5RB	420	4.04	4.2	1.038	6.59	6.840	3.42	45#
		DMR-5RC	420	4.04	4.2	1.038	6.36	6.602	3.30	46#
	Body Back		400.0125	4.13	4.2	1.016	5.4	5.486	2.74	47#
	(0 mm)		420	4.04	4.2	1.038	6.92	7.183	3.59	48#
	,		440	4.13	4.2	1.016	4.55	4.623	2.31	49#
			460	4.02	4.2	1.042	3.01	3.136	1.57	50#
			479.9875	3.93	4.2	1.064	1.77	1.883	0.94	51#
		GT-3 DMR	420	4.04	4.2	1.038	6.85	7.110	3.56	52#
		DM-5R	420	3.96	4.2	1.057	1.53	1.617	0.81	53#
		DMR-5RA	420	3.96	4.2	1.057	2.21	2.336	1.17	54#
	Face Up	DMR-5RB	420	3.96	4.2	1.057	2.12	2.241	1.12	55#
	(25 mm)	DMR-5RC	420	3.96	4.2	1.057	2.04	2.156	1.08	56#
		DMR-5RE	420	3.96	4.2	1.057	1.84	1.945	0.97	57#
4FSK		GT-3 DMR	420	3.96	4.2	1.057	1.88	1.987	0.99	58#
12.5 kHz	Body Back (0 mm)	DM-5R	420	3.96	4.2	1.057	3	3.171	1.59	59#
		DMR-5RA	420	3.96	4.2	1.057	3.64	3.847	1.92	60#
		DMR-5RB	420	3.96	4.2	1.057	3.51	3.710	1.86	61#
		DMR-5RC	420	3.96	4.2	1.057	3.7	3.911	1.96	62#
		DMR-5RE	420	3.96	4.2	1.057	4.07	4.302	2.15	63#
		GT-3 DMR	420	3.96	4.2	1.057	4.08	4.313	2.16	64#

Report No.: RXM160918052-20

Note:

- 1. KDB 447498 D01 A duty factor of 50% should be applied to determine compliance for radios with maximum operating duty factors \leq 50%. The 50% duty factor only applies to exposure conditions where the radio operates with a mechanical PTT button.
- 2. Passive body-worn and audio accessories generally do not apply to the head SAR of PTT radios.
- 3. The whole antenna and radiating structures that may contribute to the measured SAR or influence the SAR distribution has been included in the area scan.

SAR Evaluation Report 29 of 35

SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

Report No.: RXM160918052-20

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.
- When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.
- 5) The same procedures should be adapted for measurements according to occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The Highest Measured SAR Configuration in Each Frequency Band

Head(Face Up)

F	For a (MII-)	ELIT Desition	Meas. SA	R (W/kg)	Largest to
Frequency Band	Freq.(MHz)	EUT Position	Original	Repeated	Smallest SAR Ratio
/	/	/	/	/	/

Body(Body Back)

	F (1911)	DI KO D	Meas. SA	Largest to	
Frequency Band	Freq.(MHz)	EUT Position	Original	Repeated	Smallest SAR Ratio
(350-550 MHz) PTT_FM 12.5kHz _ DMR-5RE	420	Body Back	6.92	6.88	1.01

Note:

- 1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.
- 2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
- 3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements.

SAR Evaluation Report 30 of 35

	Bay Area Compliance Laboratories Corp. (Dongguan)	Report No.: RXM160918052-20
Please Refer to the Attachment.	SAR Plots	
	Please Refer to the Attachment.	

SAR Evaluation Report 31 of 35

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Report No.: RXM160918052-20

Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)				
Measurement system											
Probe calibration	6.55	N	1	1	1	6.6	6.6				
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7				
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0				
Boundary effect	1.0	R	√3	1	1	0.6	0.6				
Linearity	4.7	R	√3	1	1	2.7	2.7				
Detection limits	1.0	R	√3	1	1	0.6	0.6				
Readout electronics	0.3	N	1	1	1	0.3	0.3				
Response time	0.0	R	√3	1	1	0.0	0.0				
Integration time	0.0	R	√3	1	1	0.0	0.0				
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6				
RF ambient conditions–reflections	1.0	R	√3	1	1	0.6	0.6				
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5				
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9				
Post-processing	2.0	R	√3	1	1	1.2	1.2				
		Test sample	erelated								
Test sample positioning	2.8	N	1	1	1	2.8	2.8				
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3				
Drift of output power	5.0	R	√3	1	1	2.9	2.9				
Phantom and set-up											
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3				
Liquid conductivity target)	5.0	R	√3	0.64	0.43	1.8	1.2				
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1				
Liquid permittivity target)	5.0	R	√3	0.6	0.49	1.7	1.4				
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2				
Combined standard uncertainty		RSS				12.2	12.0				
Expanded uncertainty 95 % confidence interval)						24.3	23.9				

SAR Evaluation Report 32 of 35

Measurement uncertainty evaluation for IEC62209-2 SAR test

Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)				
Measurement system											
Probe calibration	6.55	N	1	1	1	6.6	6.6				
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7				
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0				
Linearity	4.7	R	√3	1	1	2.7	2.7				
Modulation Response	0.0	R	√3	1	1	0.0	0.0				
Detection limits	1.0	R	√3	1	1	0.6	0.6				
Boundary effect	1.0	R	√3	1	1	0.6	0.6				
Readout electronics	0.3	N	1	1	1	0.3	0.3				
Response time	0.0	R	√3	1	1	0.0	0.0				
Integration time	0.0	R	√3	1	1	0.0	0.0				
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6				
RF ambient conditions–reflections	1.0	R	√3	1	1	0.6	0.6				
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5				
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9				
Post-processing	2.0	R	√3	1	1	1.2	1.2				
Test sample related											
Device holder Uncertainty	6.3	N	1	1	1	6.3	6.3				
Test sample positioning	2.8	N	1	1	1	2.8	2.8				
Power scaling	4.5	R	√3	1	1	2.6	2.6				
Drift of output power	5.0	R	√3	1	1	2.9	2.9				
Phantom and set-up											
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3				
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.1	0.9				
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1				
Liquid permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2				
Temp. unc Conductivity	1.7	R	√3	0.78	0.71	0.8	0.7				
Temp. unc Permittivity	0.3	R	√3	0.23	0.26	0.0	0.0				
Combined standard uncertainty		RSS				12.2	12.1				
Expanded uncertainty 95 % confidence interval)						24.5	24.2				

SAR Evaluation Report 33 of 35

34 of 35

SAR Evaluation Report

APPENDIX C CALIBRATION CERTIFICATES

Please Refer to the Attachment.

***** END OF REPORT *****

Report No.: RXM160918052-20

SAR Evaluation Report 35 of 35