



FCC PART 15.247

TEST REPORT

For

PO FUNG ELECTRONIC (HK) INTERNATIONAL GROUP COMPANY LIMITED

Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan Road, Kowloon, Hong Kong

FCC ID: 2AJGM-NA32UV


Report Type: Original Report	Product Name: Amateur Radio
Report Number:	2407A60454E-RF-01
Report Date:	2025-03-05
Reviewed By:	Ash Lin 
Approves By:	Miles Chen
Prepared By:	Bay Area Compliance Laboratories Corp. (Xiamen) Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen Tel: +86-592-3200111 www.baclcorp.com.cn

TABLE OF CONTENTS

REPORT REVISION HISTORY	4
GENERAL INFORMATION	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
OBJECTIVE.....	5
TEST METHODOLOGY	6
MEASUREMENT UNCERTAINTY	6
SYSTEM TEST CONFIGURATION.....	7
TEST MODE AND VOLTAGE	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
★EUT EXERCISE SOFTWARE.....	7
DUTY CYCLE.....	8
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS.....	13
TEST EQUIPMENT LIST	14
FCC §15.203 - ANTENNA REQUIREMENT	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP.....	16
EMI TEST RECEIVER SETUP	16
TEST PROCEDURE	16
RESULT &MARGIN CALCULATION	17
TEST DATA	18
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	22
APPLICABLE STANDARD	22
EUT SETUP.....	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	24
RESULT &MARGIN CALCULATION	25
TEST DATA	25
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH	52
APPLICABLE STANDARD	52
EUT SETUP.....	52
TEST PROCEDURE	52
TEST DATA	52
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER	55
APPLICABLE STANDARD	55
EUT SETUP.....	55
TEST PROCEDURE	55
TEST DATA	55
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	58
APPLICABLE STANDARD	58

EUT SETUP..... 58

TEST PROCEDURE 58

TEST DATA 58

FCC §15.247(e) - POWER SPECTRAL DENSITY 60

APPLICABLE STANDARD 60

EUT SETUP..... 60

TEST PROCEDURE 60

TEST DATA 60

EUT PHOTOGRAPHS..... 63

TEST SETUP PHOTOGRAPHS..... 64

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	2407A60454E-RF-01	R1V1	2025-03-05	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:		PO FUNG ELECTRONIC (HK) INTERNATIONAL GROUP COMPANY LIMITED
Product Name:		Amateur Radio
Tested Model:		UV-32
Series Model:		NA-32UV, BF-32UV, AR-32UV, GT-32UV, TH32UV
Trade Mark:		BAOFENG, pofung, Alervites
Power Supply:		DC 7.4V from battery or DC 5V from adapter or DC 5V from charger
Adapter Information	Model:	A318-050100W-US2
	Input:	AC 100-240V, 50/60Hz, 0.2A
	Output:	DC 5.0V, 1.0A, 5.0W
Charger Information	Model:	TC-UV32
	Input:	DC 5V, 1A
	Output:	DC 5V
Maximum Conducted Peak Output Power:		0.65 dBm
RF Function:		BLE
Operating Band/Frequency:		2402-2480 MHz
Channel Number:		40
Channel Separation:		2 MHz
Modulation Type:		GFSK
★Maximum Antenna Gain:		0 dBi
EUT Received Status:		Good
<i>Note:</i>		
<i>1. The maximum antenna gain is provided by the applicant.</i>		
<i>2. The series model is identify with tested model except for the model name, please refer to declaration letter for more detail.</i>		
<i>3. All measurement and test data in this report was gathered from production sample serial number: 2WIM-3 (Assigned by BACL (Xiamen). The EUT was received on 2024-12-27).</i>		

Objective

This report is prepared on behalf of *PO FUNG ELECTRONIC (HK) INTERNATIONAL GROUP COMPANY LIMITED* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Xiamen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Xiamen) to collect test data is located on the Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen.

Bay Area Compliance Laboratories Corp. (Xiamen) Lab is accredited to ISO/IEC 17025 by A2LA (Certificate Number: 7134.01) and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN1384.

Measurement Uncertainty

Item		U_{lab}
Conducted Emission	150kHz-30MHz	2.33 dB
Radiated Emission	9kHz-30MHz	2.59 dB
	30MHz~200MHz	4.38dB
	200MHz~1GHz	4.50dB
	1GHz~6GHz	4.58dB
	6GHz-18GHz	5.43dB
	18GHz~26.5GHz	5.47dB
Occupied Channel Bandwidth		0.053kHz
Transmitter Conducted Power(Conducted RF power)		0.624 dB
Conducted Spurious Emission		2.52 dB
Power Spectral Density		0.61dB
Duty Cycle		1%
Temperature		1°C
Humidity		5%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Test Mode and Voltage

The system was configured for testing in a typical mode (as normally used by a typical user).	
Test mode:	Test Mode 1: Transmitting
Test voltage:	Test Mode 1: AC 120V/60Hz

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

★EUT Exercise Software

RF Test Tool: RFTest_0720_boxed.exe

Mode	Power level		
	Low channel	Middle channel	High channel
BLE 1Mbps	default	default	default


Note: the applicant declared the power level.

Duty cycle

Test Mode:	Transmitting	Test Engineer:	Jason Hu
Test Date:	2025-01-14	Environment:	Temp.: 22.3°C Humi.: 44% Atm :100.1 kPa

Test Modes	Test Frequency (MHz)	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	VBW Setting (KHz)
BLE 1Mbps	2440	0.107	0.625	17.12	9346	10.00

BLE 1Mbps: Middle Channel

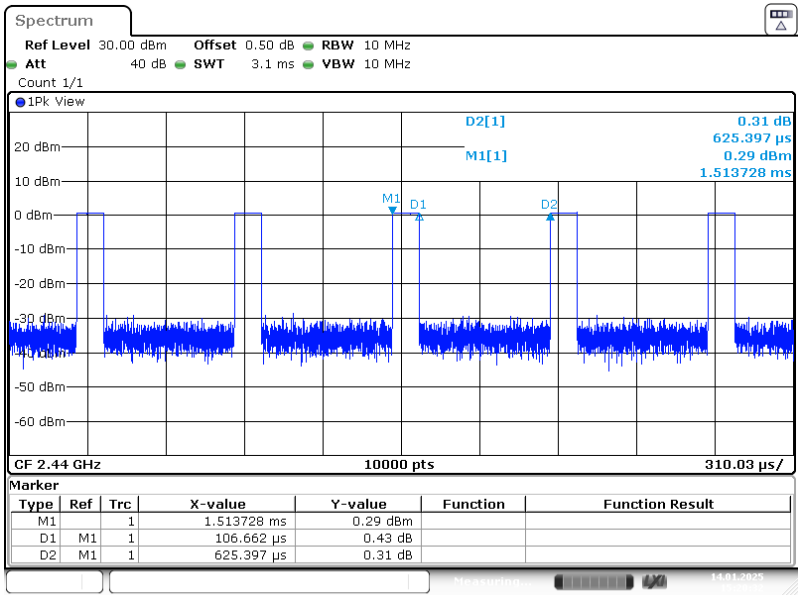

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T480	PF1P5K4F
Unknown	Debug	Unknown	Unknown
JianAohai	Adapter	A318-050100W-US2	Unknown
Unknown	Earphone	Unknown	Unknown


External I/O Cable

Cable Description	Length (m)	From Port	To
Cable	0.1	EUT	Debug
USB Cable	10	Debug	Laptop
Cable	0.5	EUT/ Charger	Adapter


Block Diagram of Test Setup

Conducted Emission:

For Charger Mode

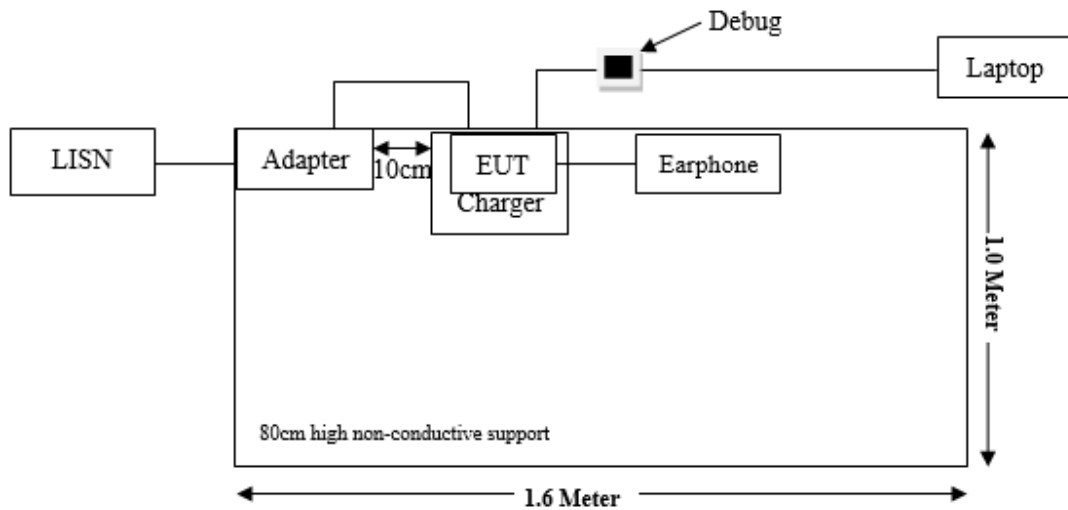


For Adapter Mode

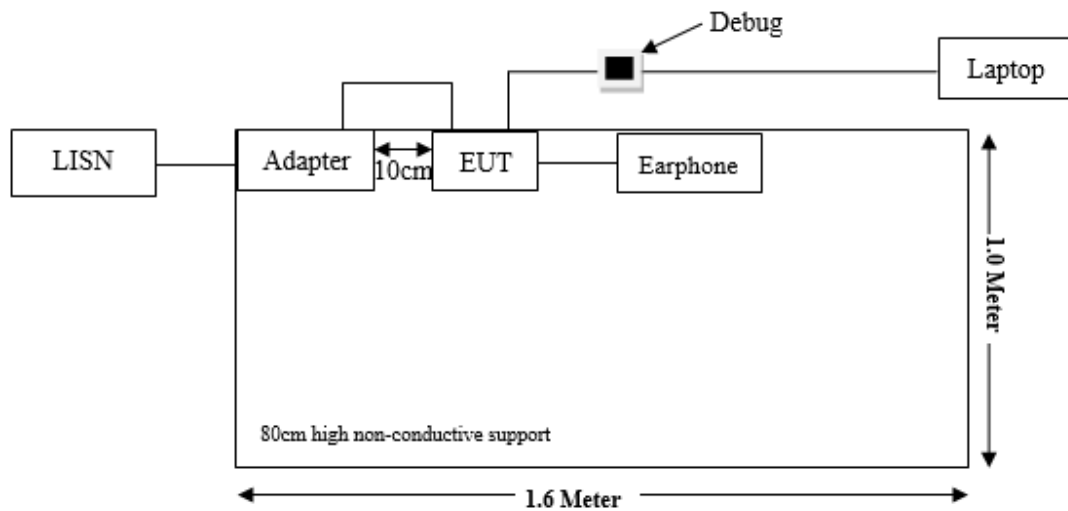


Radiated Emission (below 1GHz)


For Charger Mode

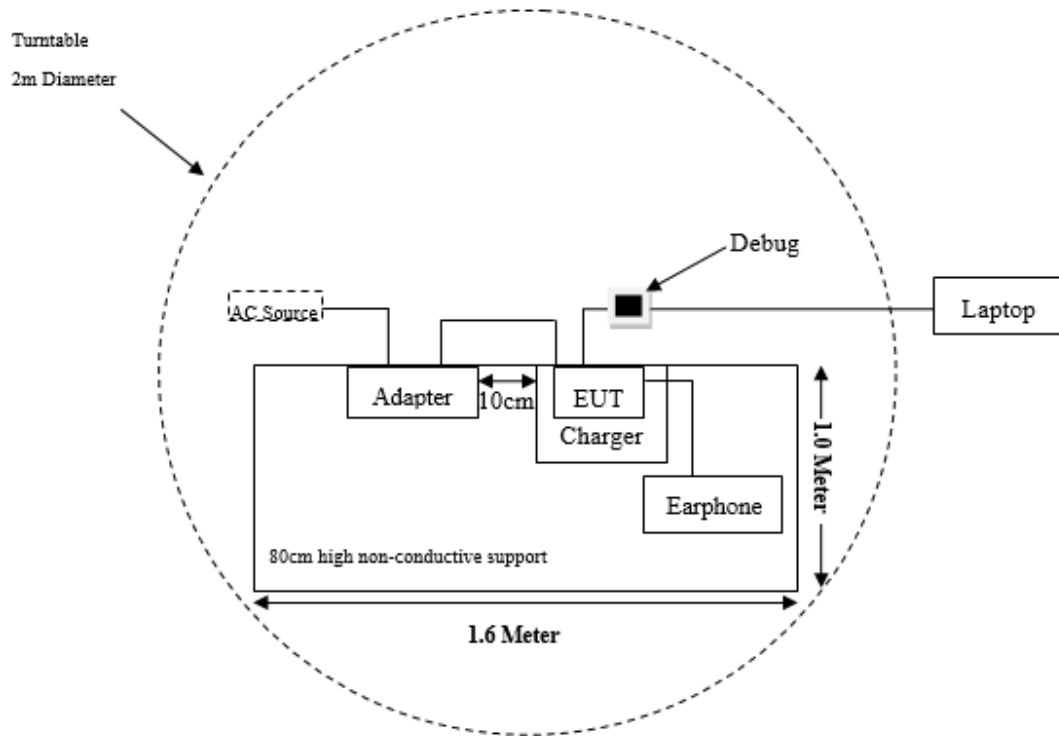


For Adapter Mode

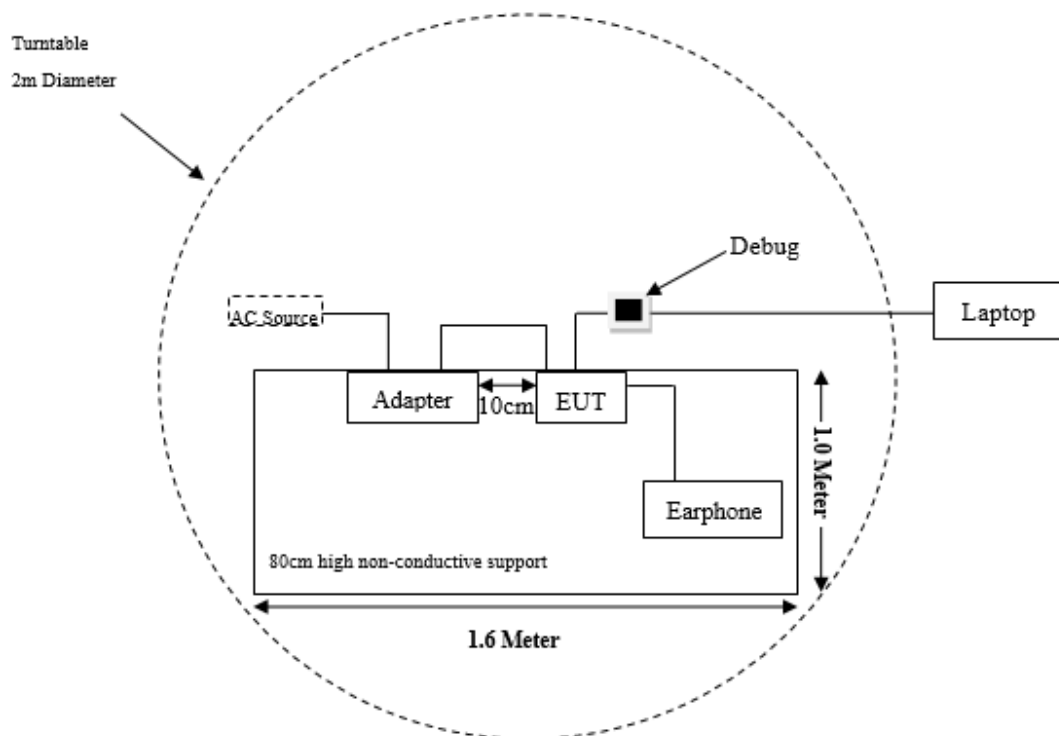

Radiated Emission (Above 1GHz)

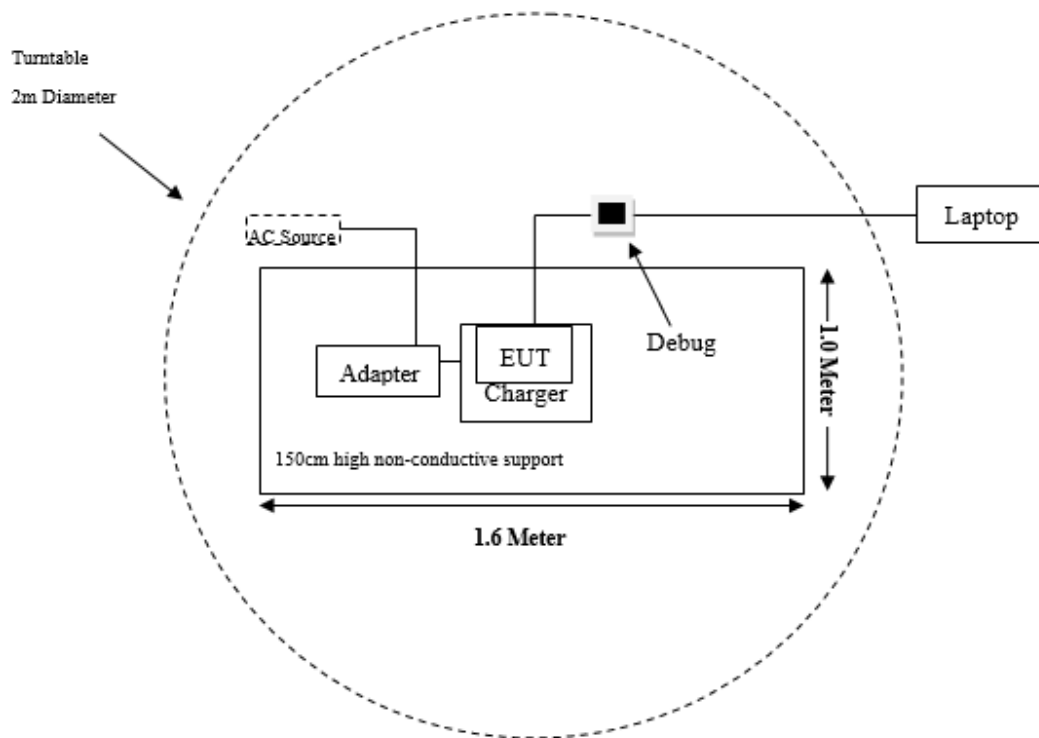

RF Conduction:



Note: The cable assembly insertion loss of 0.5dB was entered as an offset in the Spectrum Analyzer. (Actual cable loss was unavailable at the time of testing, therefore loss of 0.5dB was assumed as worst case.) This was later verified to be true by laboratory.

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247(a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Test Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions					
EMI Test Receiver	Rohde & Schwarz	ESR3	103105	2024/03/29	2025/03/28
LISN	Rohde & Schwarz	ENV216	100129	2024/03/29	2025/03/28
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	0357.8810.54	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC001	2024/03/29	2025/03/28
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESR3	103103	2024/03/29	2025/03/28
Loop Antenna	Rohde & Schwarz	HFH2-Z2	830749/001	2023/07/27	2026/07/26
Antenna	Sunol Sciences	JB6	A122022-5	2023/07/27	2026/07/26
Amplifier	Sonoma	310B	120903	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC002	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH460B-N-2M	CC006	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH460B-N-12M	CC007	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	HFH2-CC	335.3609	2024/03/29	2025/03/28
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Above 1 GHz					
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102051	2024/03/29	2025/03/28
Filter Switch Unit	Decentest	DT7220FSU	DS79904	2025/02/21	2026/02/20
Multiplex Switch Test Control Set	Decentest	DT7220SCU	DS79901	2025/02/21	2026/02/20
Horn Antenna	EMCO	3115	9002-3355	2024/11/19	2027/11/18
Preamplifier	A.H.Systems	PAM-0118P	489	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH800A-N-6M	CC003	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH800A-N-1M	CC005	2024/03/29	2025/03/28
Horn Antenna	EMCO	3116	9407-2232	2023/07/31	2026/07/30
Preamplifier	A.H.Systems	PAM-1840	200	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-3M	CC008	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-1M	CC009	2024/03/29	2025/03/28
Test Software	Audix	E3	18621a	N/A	N/A
RF Conducted Test					
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102051	2024/03/29	2025/03/28
Coaxial Cable	N/A	N/A	N/A	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Xiamen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one PCB antenna arrangement for BLE, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

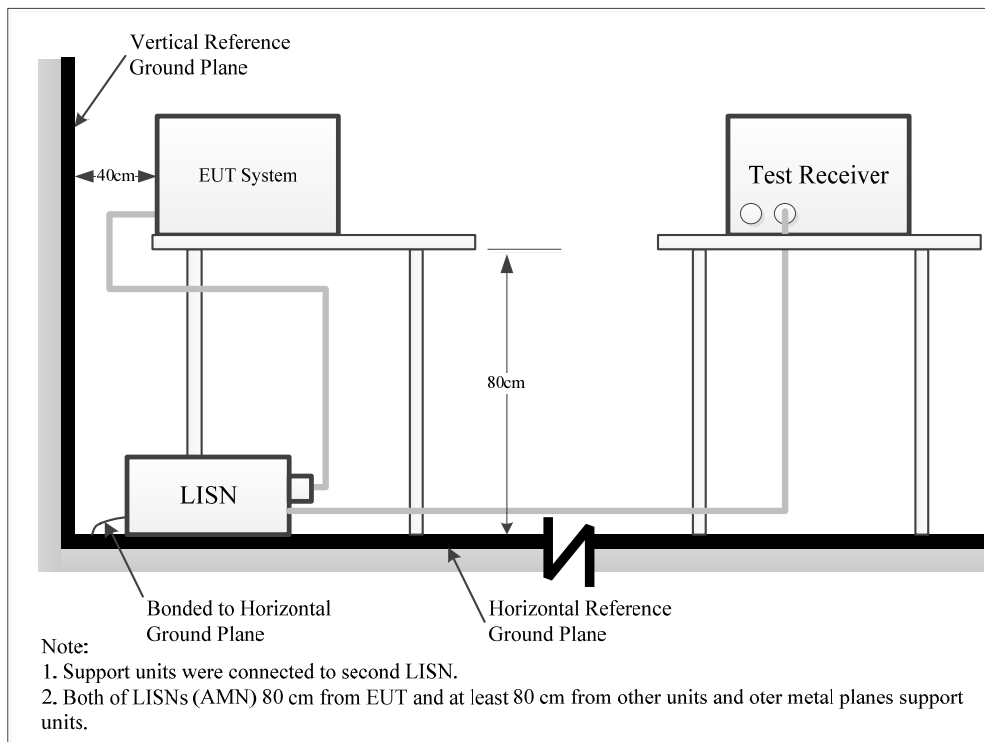

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Result &Margin Calculation

The Result is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Factor (dB)} &= \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)} \\ \text{Result (dB}\mu\text{V)} &= \text{Reading (dB}\mu\text{V)} + \text{Factor (dB)}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Result (dB}\mu\text{V)}$$

Test Data


Test Frequency:	150kHz~30MHz
Temperature:	22.5℃
Relative Humidity:	40%
ATM Pressure:	100.1kPa
Test Date:	2025-03-03
Test Engineer:	Apollo Luo

EUT operation mode: Transmitting in high channel of BLE 1Mbps (worst case)

For Charger


Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32

Temp/Humi/ATM: 22.5℃/40%/100.1kPa
Tested by: Apollo Luo
Power Source: AC 120V/60Hz

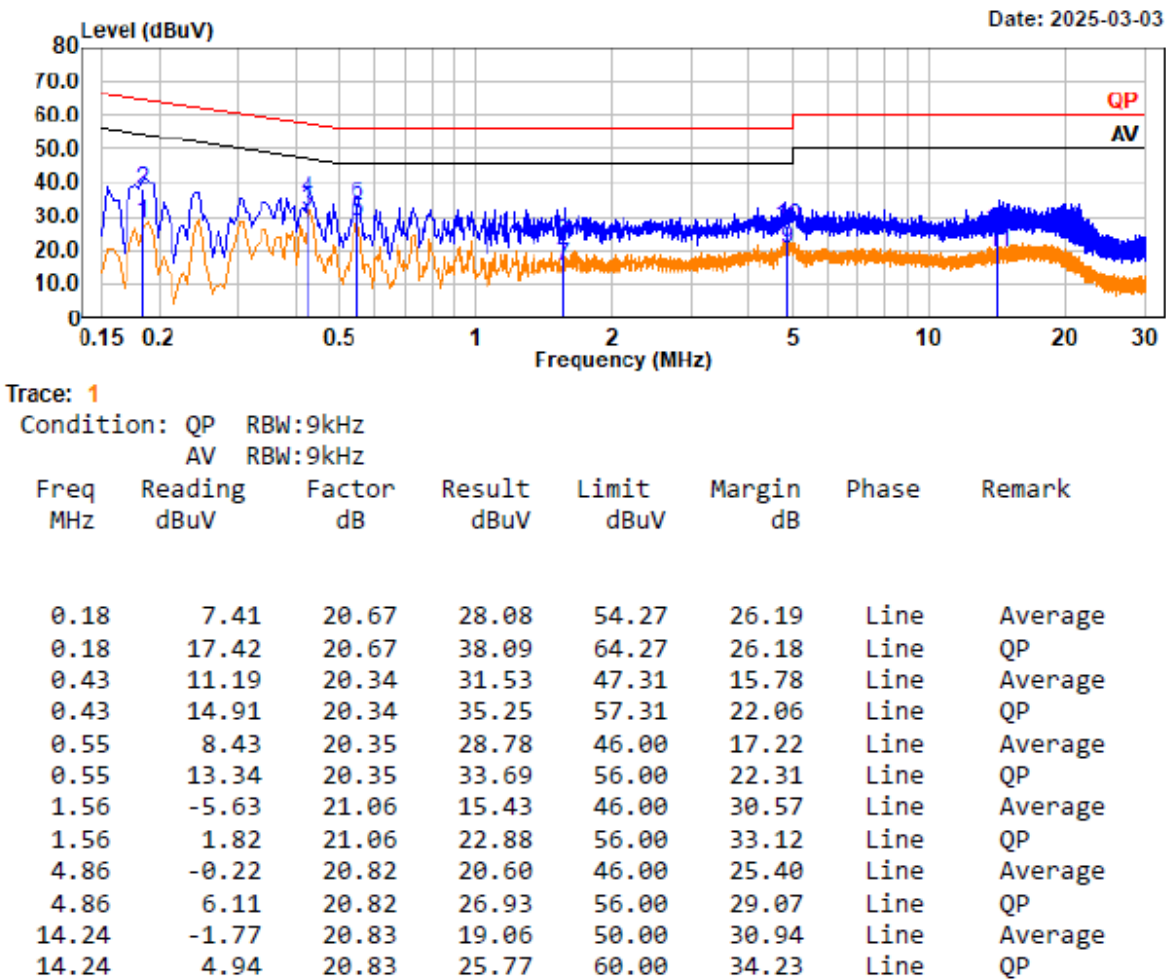

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32

Temp/Humi/ATM: 22.5°C/40%/100.1kPa
Tested by: Apollo Luo
Power Source: AC 120V/60Hz

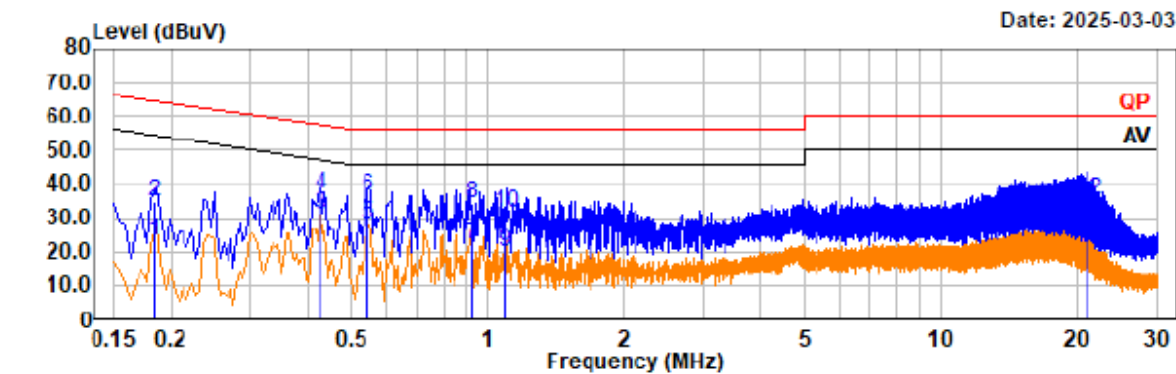


Trace: 1

Condition: QP		RBW:9kHz					
AV		RBW:9kHz					
Freq	Reading	Factor	Result	Limit	Margin	Phase	Remark
MHz	dBuV	dB	dBuV	dBuV	dB		
0.18	2.71	20.69	23.40	54.28	30.88	Neutral	Average
0.18	14.05	20.69	34.74	64.28	29.54	Neutral	QP
0.43	10.45	20.44	30.89	47.29	16.40	Neutral	Average
0.43	16.43	20.44	36.87	57.29	20.42	Neutral	QP
0.55	7.79	20.36	28.15	46.00	17.85	Neutral	Average
0.55	15.82	20.36	36.18	56.00	19.82	Neutral	QP
0.92	1.48	20.78	22.26	46.00	23.74	Neutral	Average
0.92	13.22	20.78	34.00	56.00	22.00	Neutral	QP
1.10	-1.03	20.93	19.90	46.00	26.10	Neutral	Average
1.10	10.33	20.93	31.26	56.00	24.74	Neutral	QP
21.08	-0.42	21.27	20.85	50.00	29.15	Neutral	Average
21.08	13.86	21.27	35.13	60.00	24.87	Neutral	QP

For Adapter

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32

Temp/Humi/ATM: 22.5°C/40%/100.1kPa
Tested by: Apollo Luo
Power Source: AC 120V/60Hz

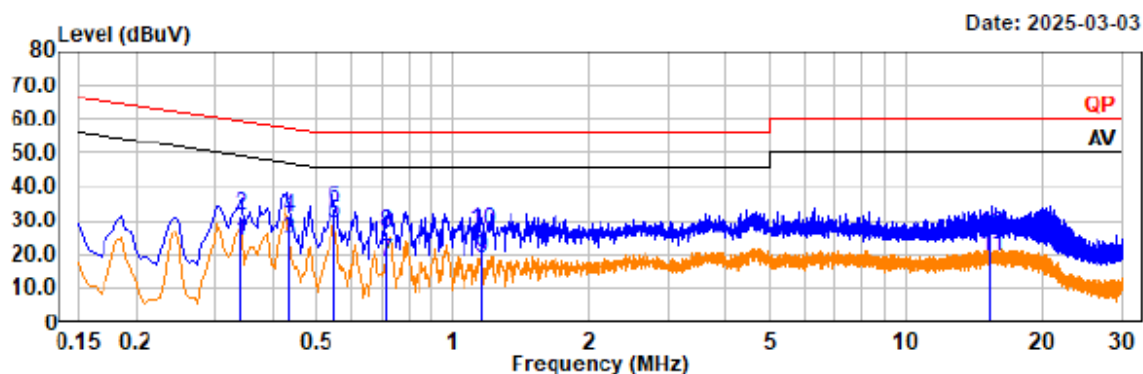


Trace: 1

Condition: QP RBW:9kHz
AV RBW:9kHz

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.34	3.52	20.41	23.93	49.19	25.26	Line	Average
0.34	10.77	20.41	31.18	59.19	28.01	Line	QP
0.44	4.13	20.33	24.46	47.11	22.65	Line	Average
0.44	10.82	20.33	31.15	57.11	25.96	Line	QP
0.55	8.69	20.34	29.03	46.00	16.97	Line	Average
0.55	13.28	20.34	33.62	56.00	22.38	Line	QP
0.72	-2.94	20.52	17.58	46.00	28.42	Line	Average
0.72	5.96	20.52	26.48	56.00	29.52	Line	QP
1.16	-2.04	20.96	18.92	46.00	27.08	Line	Average
1.16	6.19	20.96	27.15	56.00	28.85	Line	QP
15.38	-1.50	20.91	19.41	50.00	30.59	Line	Average
15.38	5.17	20.91	26.08	60.00	33.92	Line	QP

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32

Temp/Humi/ATM: 22.5°C/40%/100.1kPa
Tested by: Apollo Luo
Power Source: AC 120V/60Hz

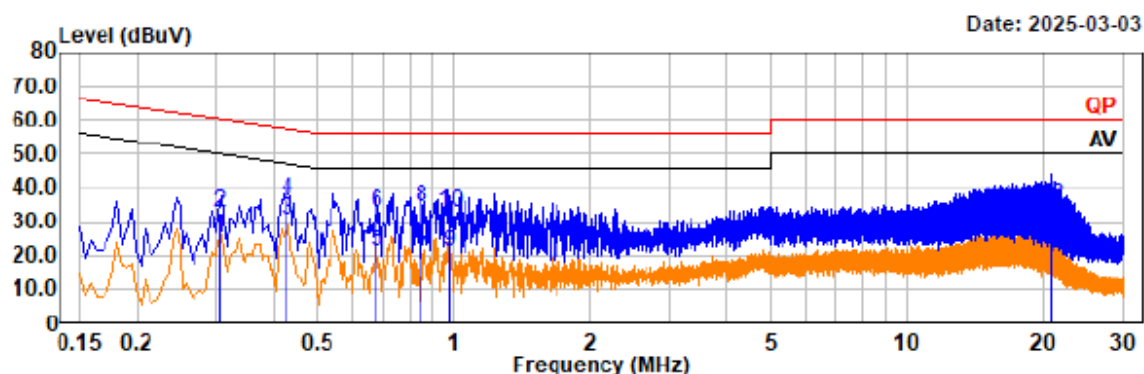

Trace: 1

Condition: QP RBW:9kHz
AV RBW:9kHz

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.31	4.65	20.54	25.19	50.07	24.88	Neutral	Average
0.31	12.05	20.54	32.59	60.07	27.48	Neutral	QP
0.43	9.68	20.44	30.12	47.30	17.18	Neutral	Average
0.43	16.11	20.44	36.55	57.30	20.75	Neutral	QP
0.68	0.59	20.31	20.90	46.00	25.10	Neutral	Average
0.68	12.14	20.31	32.45	56.00	23.55	Neutral	QP
0.85	-1.81	20.64	18.83	46.00	27.17	Neutral	Average
0.85	13.57	20.64	34.21	56.00	21.79	Neutral	QP
0.98	0.34	20.88	21.22	46.00	24.78	Neutral	Average
0.98	11.79	20.88	32.67	56.00	23.33	Neutral	QP
20.70	-0.74	21.26	20.52	50.00	29.48	Neutral	Average
20.70	13.75	21.26	35.01	60.00	24.99	Neutral	QP


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;


EUT Setup

9 kHz-30MHz:

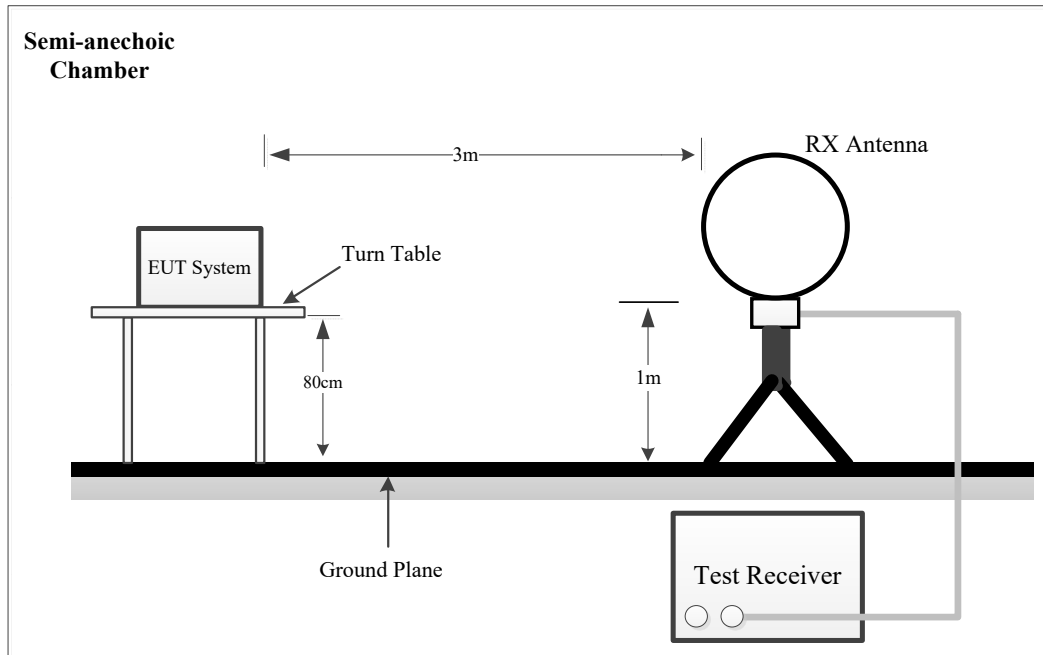

30MHz -1 GHz:

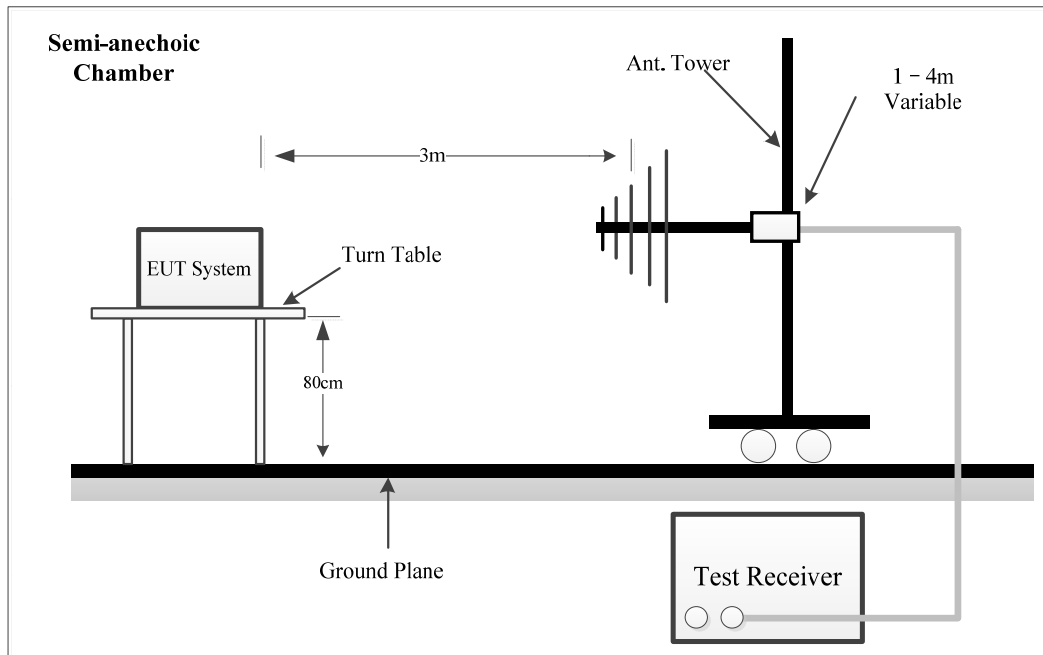

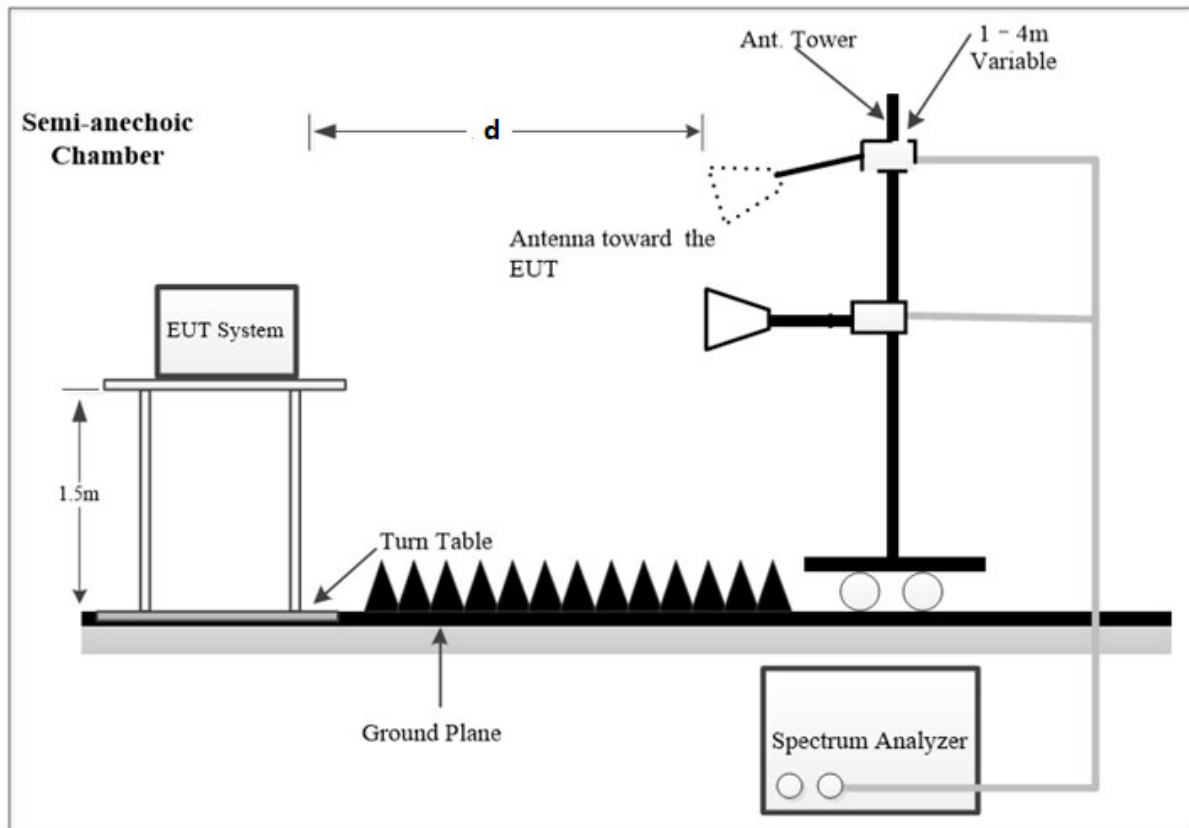Above 1GHz:

The radiated emission tests using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

NOTE: d is testing distance;

For Radiated Emission test (1GHz-18GHz) and Bandedge Emission test, which was performed at 3 m distance.

For Radiated Emission test (18GHz-25GHz), which was performed at 1.0 m distance, according to ANSI C63.10-2013, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.0m.

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.0m]})$ dB = 9.54 dB

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Below 1GHz:

Frequency Range	RBW	VBW	Measurement
9 kHz – 150 kHz	300Hz	1 kHz	PK
	200Hz	/	QP
150 kHz – 30 MHz	10 kHz	30 kHz	PK
	9kHz	/	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	PK
	120kHz	/	QP

Above 1GHz:

Pre-scan:

Duty Cycle	RBW	VBW	Measurement
Any	1MHz	3MHz	PK
>98%	1MHz	5kHz	AV
<98%	1MHz	1/T, not less than 5kHz	AV

Final measurement for emission identified during the pre-scan:

Duty Cycle	RBW	VBW	Measurement
Any	1MHz	3MHz	PK
>98%	1MHz	10Hz	AV
<98%	1MHz	1/T	AV

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP limit more than 6dB, then it is unnecessary to perform an QP measurement.

If the maximized peak measured value complies with under the Average limit, then it is unnecessary to perform an Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable. The report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground parallel) unless the margin is greater than 20 dB, then the following statement shall be made: “all emissions were greater than 20 dB below the limit.”

Below 1GHz, if the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

Above 1GHz, if the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is below the AV emission limit, there's no need to record the measured AV level of the emissions in the report.

Result & Margin Calculation

The Result is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

For 9 kHz to 18GHz Radiated emission test

$$\text{Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

For 18GHz to 25GHz Radiated emission test and Bandedge emissions test

$$\text{Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} - \text{Extrapolation factor (dB)}$$

$$\text{Extrapolation factor} = 9.54\text{dB (distance=1m)}$$

$$\text{Result (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + \text{Factor (dB/m)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Result (dB}\mu\text{V/m)}$$

Test Data

Please refer to the below table and plots.

Frequency Range:	Below 1 GHz	Above 1 GHz
Temperature:	22.1°C	21.3°C
Relative Humidity:	45 %	49%
ATM Pressure:	100.2kPa	100.1kPa
Test Date:	2025-02-28	2025-02-25
Test Engineer:	Wlif Wu	Wlif Wu

1) 9 kHz~30MHz

Pre-scan in parallel, ground-parallel and perpendicular of orientation of loop antenna, ground-parallel is worst case

EUT operation mode: Transmitting in high channel of BLE 1Mbps in parallel (worst case)

For Charger mode

Project No.: 2407A60454E-RF

Temp/Humi/ATM: 22.1°C/45%/100.2kPa


Test Mode: BLE 1M 2480MHz

Tested by: Wlif Wu

EUT Model: UV-32

Power Source: AC 120V/60Hz

Test distance: 3m

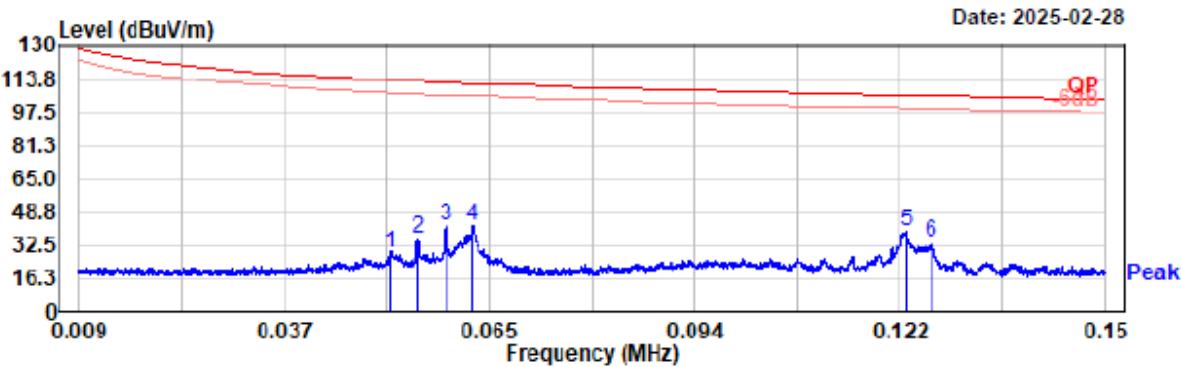


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.052	9.04	19.91	28.95	113.33	84.38	Peak
0.056	15.85	19.91	35.76	112.70	76.94	Peak
0.060	21.91	19.91	41.82	112.11	70.29	Peak
0.063	22.17	19.88	42.05	111.63	69.58	Peak
0.123	19.48	19.73	39.21	105.83	66.62	Peak
0.126	13.92	19.73	33.65	105.60	71.95	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 22.1°C/45%/100.2kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

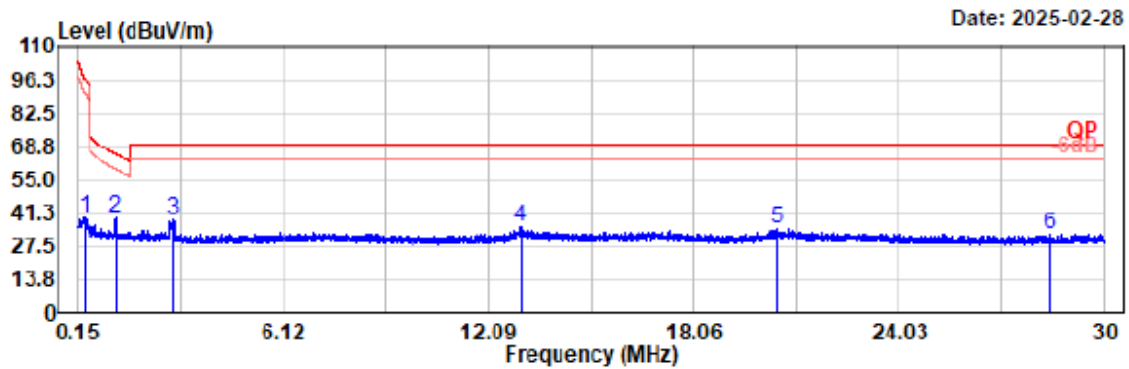

Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.356	20.04	19.75	39.79	96.58	56.79	Peak
1.237	19.43	19.70	39.13	65.76	26.63	Peak
2.929	18.72	19.83	38.55	69.54	30.99	Peak
13.045	15.73	19.74	35.47	69.54	34.07	Peak
20.508	14.75	20.10	34.85	69.54	34.69	Peak
28.403	12.84	20.05	32.89	69.54	36.65	Peak

For Adapter mode

Project No.: 2407A60454E-RF

Test Mode: BLE 1M 2480MHz


EUT Model: UV-32

Test distance: 3m

Temp/Humi/ATM: 22.1°C/45%/100.2kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

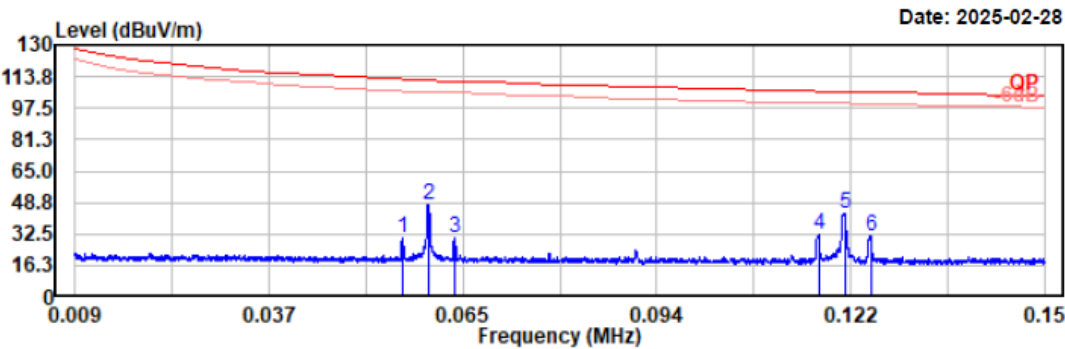


Condition: PK RBW:300Hz VBW:1kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.057	10.31	19.91	30.22	112.54	82.32	Peak
0.060	27.41	19.91	47.32	111.98	64.66	Peak
0.064	10.76	19.87	30.63	111.45	80.82	Peak
0.117	12.34	19.73	32.07	106.23	74.16	Peak
0.121	23.17	19.73	42.90	105.96	63.06	Peak
0.125	11.77	19.73	31.50	105.69	74.19	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 22.1°C/45%/100.2kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

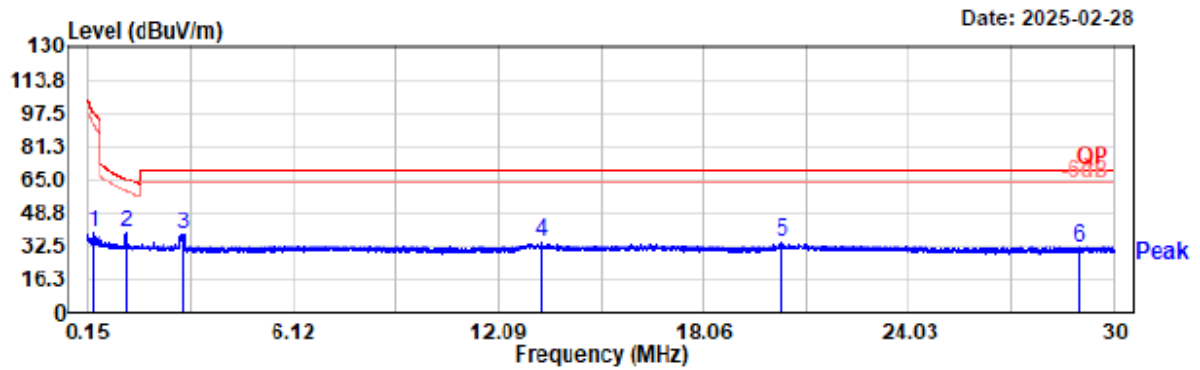

Condition: PK RBW:10kHz VBW:30kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.284	19.79	19.72	39.51	98.53	59.02	Peak
1.240	19.74	19.70	39.44	65.74	26.30	Peak
2.929	18.67	19.83	38.50	69.54	31.04	Peak
13.356	15.16	19.74	34.90	69.54	34.64	Peak
20.326	14.54	20.10	34.64	69.54	34.90	Peak
29.006	12.56	20.01	32.57	69.54	36.97	Peak


2) 30MHz-1GHz

EUT operation mode: Transmitting in high channel of BLE 1Mbps (worst case)

For Charger mode

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 22.1°C/45%/100.2kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

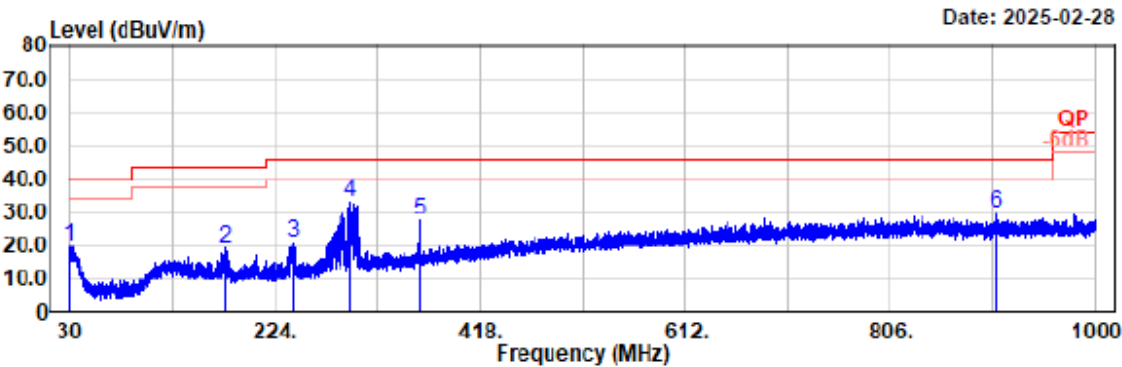


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
30.29	25.57	-5.68	19.89	40.00	20.11	Horizontal	Peak
176.96	31.46	-12.20	19.26	43.50	24.24	Horizontal	Peak
241.65	32.37	-11.61	20.76	46.00	25.24	Horizontal	Peak
295.78	42.14	-9.27	32.87	46.00	13.13	Horizontal	Peak
361.64	35.30	-7.67	27.63	46.00	18.37	Horizontal	Peak
906.98	26.91	2.61	29.52	46.00	16.48	Horizontal	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 22.1°C/45%/100.2kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

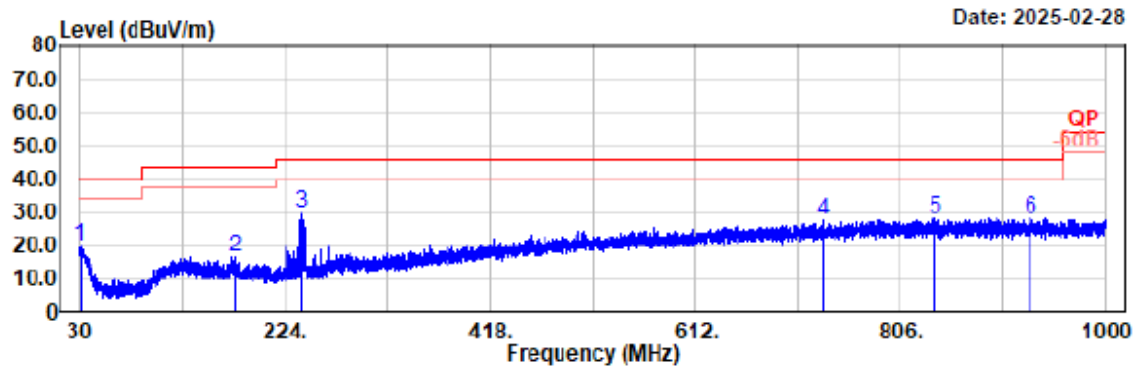

Condition: PK RBW:100kHz VBW:300kHz SWT:auto


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
30.58	25.58	-5.74	19.84	40.00	20.16	Vertical	Peak
176.86	28.85	-12.19	16.66	43.50	26.84	Vertical	Peak
240.01	41.22	-11.69	29.53	46.00	16.47	Vertical	Peak
732.67	27.56	0.21	27.77	46.00	18.23	Vertical	Peak
839.56	26.43	1.80	28.23	46.00	17.77	Vertical	Peak
929.77	25.37	2.86	28.23	46.00	17.77	Vertical	Peak

EUT operation mode: Transmitting in high channel of BLE 1Mbps (worst case)

For Adapter mode

Project No.: 2407A60454E-RF
 Test Mode: BLE 1M 2480MHz
 EUT Model: UV-32
 Test distance: 3m

Temp/Humi/ATM: 22.1°C/45%/100.2kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

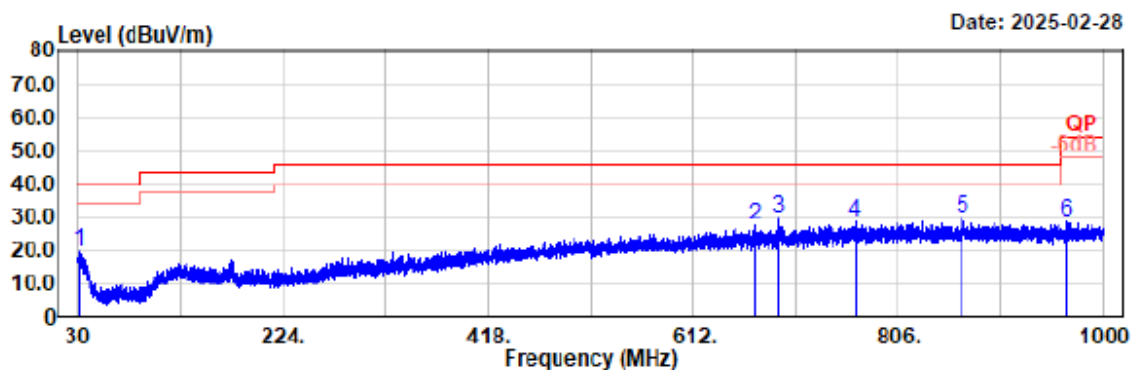


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
31.46	26.10	-6.10	20.00	40.00	20.00	Horizontal	Peak
670.88	28.19	-0.62	27.57	46.00	18.43	Horizontal	Peak
692.80	29.96	-0.44	29.52	46.00	16.48	Horizontal	Peak
765.07	28.05	0.71	28.76	46.00	17.24	Horizontal	Peak
867.40	27.49	2.16	29.65	46.00	16.35	Horizontal	Peak
964.89	25.44	3.49	28.93	54.00	25.07	Horizontal	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 22.1°C/45%/100.2kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

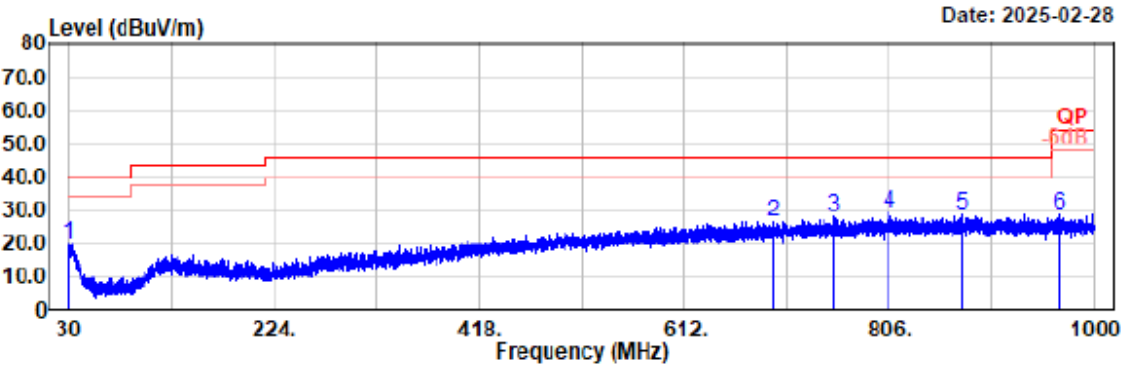

Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
30.19	25.67	-5.65	20.02	40.00	19.98	Vertical	Peak
696.58	27.16	-0.43	26.73	46.00	19.27	Vertical	Peak
754.30	27.51	0.48	27.99	46.00	18.01	Vertical	Peak
805.22	27.81	1.27	29.08	46.00	16.92	Vertical	Peak
876.03	26.65	2.26	28.91	46.00	17.09	Vertical	Peak
967.60	25.32	3.45	28.77	54.00	25.23	Vertical	Peak

3) 1GHz~3GHz

Project No.: 2407A60454E-RF

Test Mode: BLE 1M 2402MHz


EUT Model: UV-32

Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

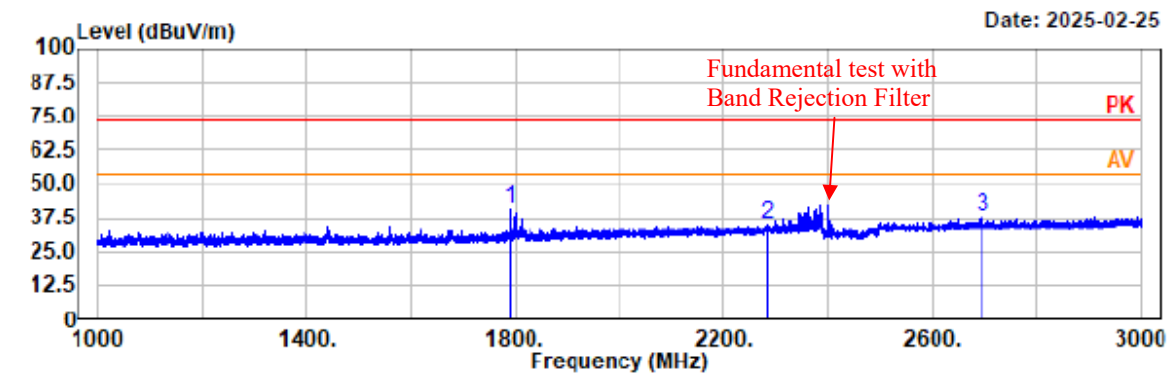


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1791.80	53.62	-13.26	40.36	74.00	33.64	horizontal	Peak
2285.80	46.36	-11.53	34.83	74.00	39.17	horizontal	Peak
2696.40	47.79	-10.01	37.78	74.00	36.22	horizontal	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

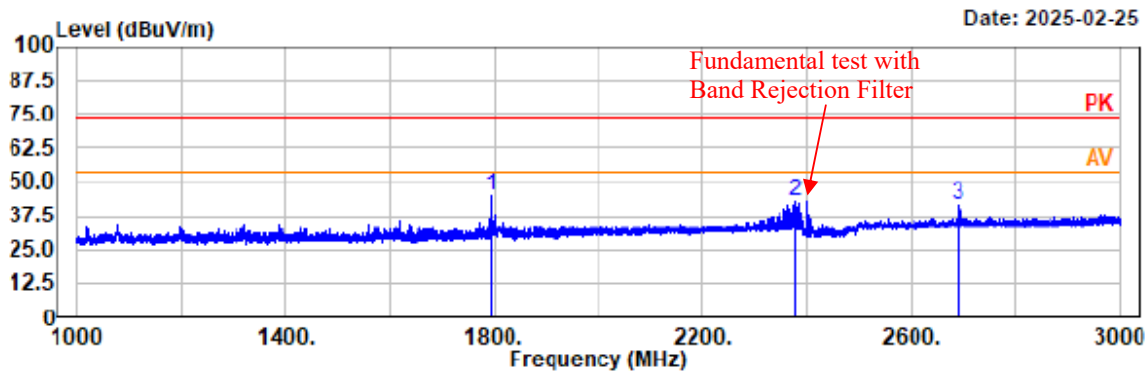


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1795.20	57.87	-13.25	44.62	74.00	29.38	vertical	Peak
2378.20	54.10	-11.21	42.89	74.00	31.11	vertical	Peak
2688.80	51.35	-10.04	41.31	74.00	32.69	vertical	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

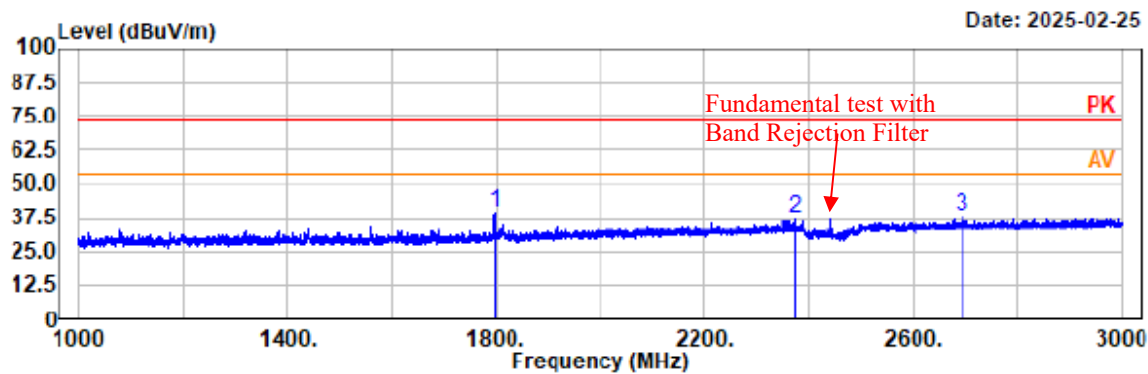


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1798.00	52.24	-13.23	39.01	74.00	34.99	horizontal	Peak
2375.00	48.45	-11.22	37.23	74.00	36.77	horizontal	Peak
2692.20	48.03	-10.03	38.00	74.00	36.00	horizontal	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

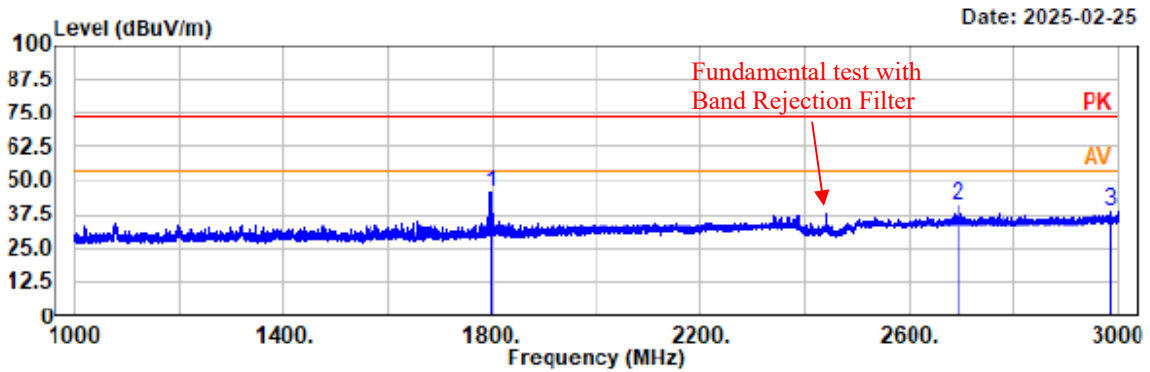


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1798.00	58.93	-13.23	45.70	74.00	28.30	vertical	Peak
2693.00	50.45	-10.03	40.42	74.00	33.58	vertical	Peak
2984.80	47.93	-9.02	38.91	74.00	35.09	vertical	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

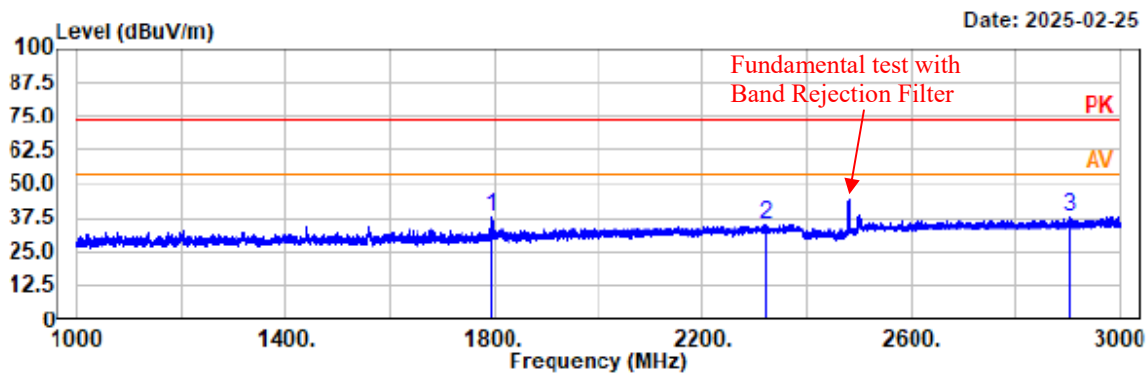


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1794.60	51.02	-13.25	37.77	74.00	36.23	horizontal	Peak
2320.40	46.65	-11.38	35.27	74.00	38.73	horizontal	Peak
2905.60	47.67	-9.51	38.16	74.00	35.84	horizontal	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

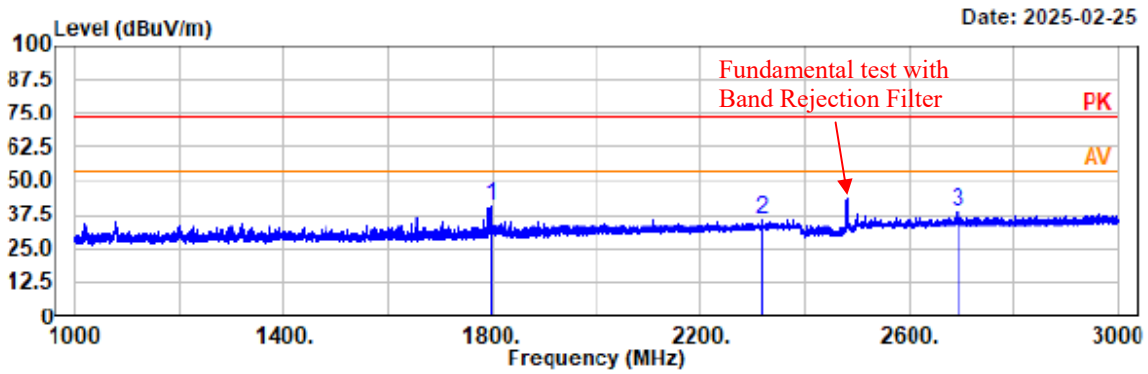

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1797.80	54.14	-13.23	40.91	74.00	33.09	vertical	Peak
2318.20	47.06	-11.38	35.68	74.00	38.32	vertical	Peak
2692.00	48.54	-10.03	38.51	74.00	35.49	vertical	Peak

4) 3 GHz ~18 GHz

Project No.: 2407A60454E-RF

Test Mode: BLE 1M 2402MHz


EUT Model: UV-32

Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

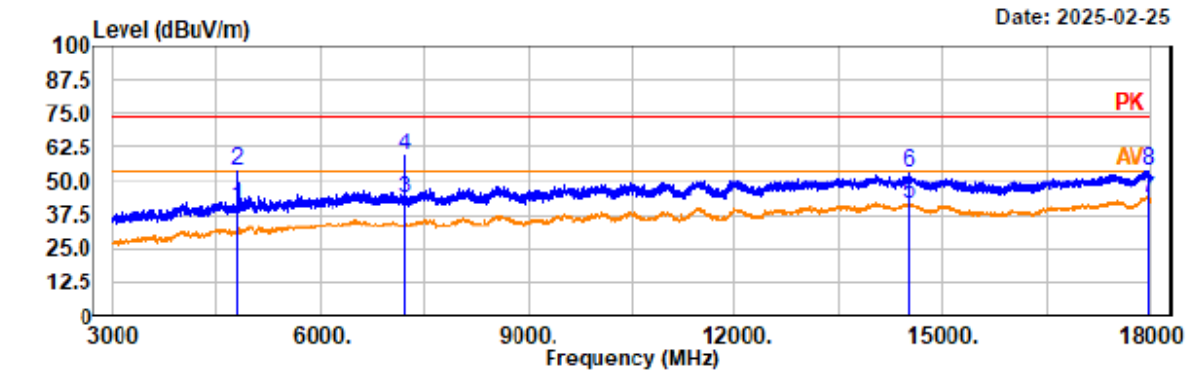


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:10kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.50	45.27	-5.24	40.03	54.00	13.97	horizontal	Average
4804.50	58.93	-5.24	53.69	74.00	20.31	horizontal	Peak
7204.50	46.16	-2.55	43.61	54.00	10.39	horizontal	Average
7204.50	61.70	-2.55	59.15	74.00	14.85	horizontal	Peak
14511.00	36.32	5.06	41.38	54.00	12.62	horizontal	Average
14511.00	47.70	5.06	52.76	74.00	21.24	horizontal	Peak
17980.50	36.78	6.89	43.67	54.00	10.33	horizontal	Average
17980.50	47.15	6.89	54.04	74.00	19.96	horizontal	Peak

Project No.: 2407A60454E-RF
 Test Mode: BLE 1M 2402MHz
 EUT Model: UV-32
 Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

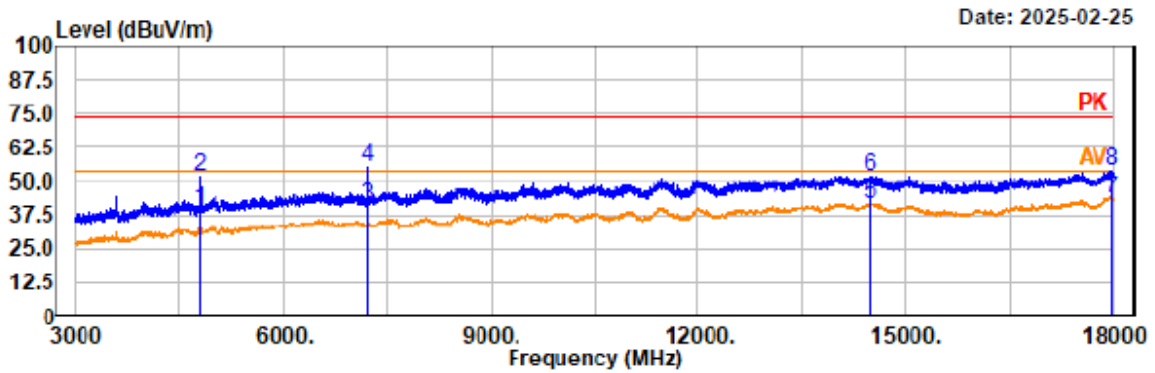

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:10kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	44.78	-5.24	39.54	54.00	14.46	vertical	Average
4804.00	56.80	-5.24	51.56	74.00	22.44	vertical	Peak
7206.00	43.50	-2.55	40.95	54.00	13.05	vertical	Average
7206.00	57.77	-2.55	55.22	74.00	18.78	vertical	Peak
14491.50	36.23	5.08	41.31	54.00	12.69	vertical	Average
14491.50	46.80	5.08	51.88	74.00	22.12	vertical	Peak
17982.00	36.82	6.89	43.71	54.00	10.29	vertical	Average
17982.00	47.17	6.89	54.06	74.00	19.94	vertical	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2440MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

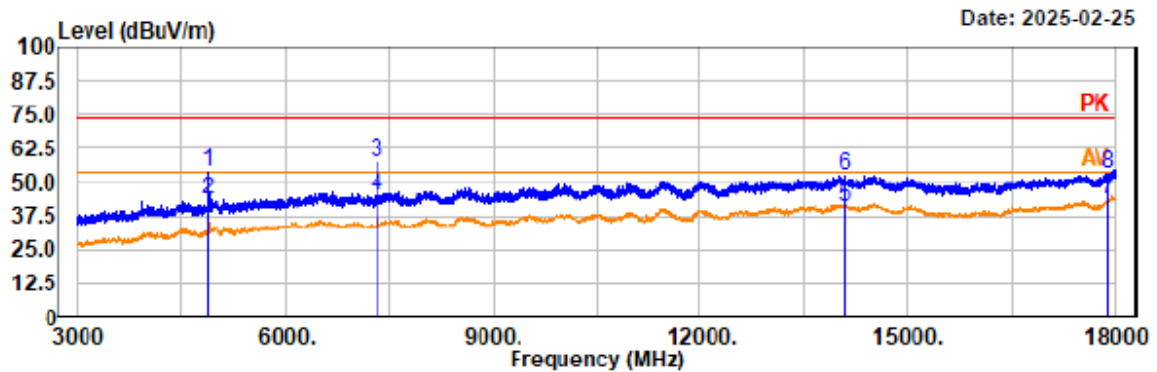

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:10kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4880.00	59.07	-5.30	53.77	74.00	20.23	horizontal	Peak
4880.00	48.67	-5.30	43.37	54.00	10.63	horizontal	Average
7320.00	59.78	-2.25	57.53	74.00	16.47	horizontal	Peak
7320.00	47.03	-2.25	44.78	54.00	9.22	horizontal	Average
14074.50	35.62	5.30	40.92	54.00	13.08	horizontal	Average
14074.50	46.97	5.30	52.27	74.00	21.73	horizontal	Peak
17902.50	36.30	6.81	43.11	54.00	10.89	horizontal	Average
17902.50	46.43	6.81	53.24	74.00	20.76	horizontal	Peak

Project No.: 2407A60454E-RF

Test Mode: BLE 1M 2440MHz


EUT Model: UV-32

Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

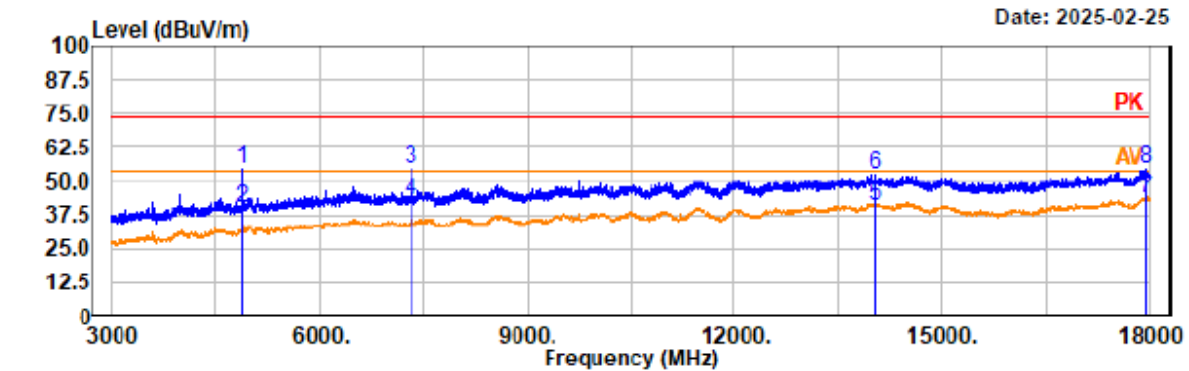

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:10kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4880.00	59.96	-5.30	54.66	74.00	19.34	vertical	Peak
4880.00	45.18	-5.30	39.88	54.00	14.12	vertical	Average
7320.00	56.75	-2.25	54.50	74.00	19.50	vertical	Peak
7320.00	45.13	-2.25	42.88	54.00	11.12	vertical	Average
14026.50	35.63	5.23	40.86	54.00	13.14	vertical	Average
14026.50	47.13	5.23	52.36	74.00	21.64	vertical	Peak
17950.50	36.73	6.86	43.59	54.00	10.41	vertical	Average
17950.50	47.65	6.86	54.51	74.00	19.49	vertical	Peak

Project No.: 2407A60454E-RF
 Test Mode: BLE 1M 2480MHz
 EUT Model: UV-32
 Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

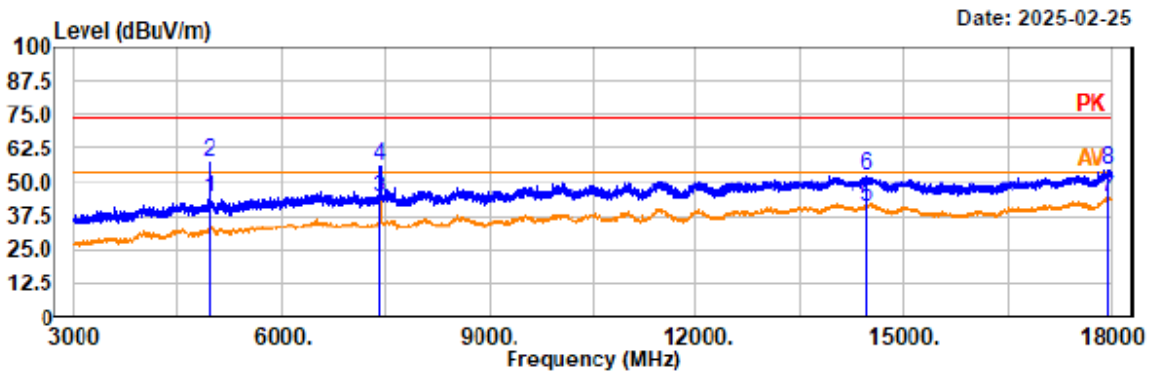

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:10kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	49.54	-5.11	44.43	54.00	9.57	horizontal	Average
4960.50	62.58	-5.11	57.47	74.00	16.53	horizontal	Peak
7438.50	46.47	-2.03	44.44	54.00	9.56	horizontal	Average
7438.50	57.87	-2.03	55.84	74.00	18.16	horizontal	Peak
14457.00	35.79	5.14	40.93	54.00	13.07	horizontal	Average
14457.00	47.34	5.14	52.48	74.00	21.52	horizontal	Peak
17953.50	37.13	6.86	43.99	54.00	10.01	horizontal	Average
17953.50	47.74	6.86	54.60	74.00	19.40	horizontal	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

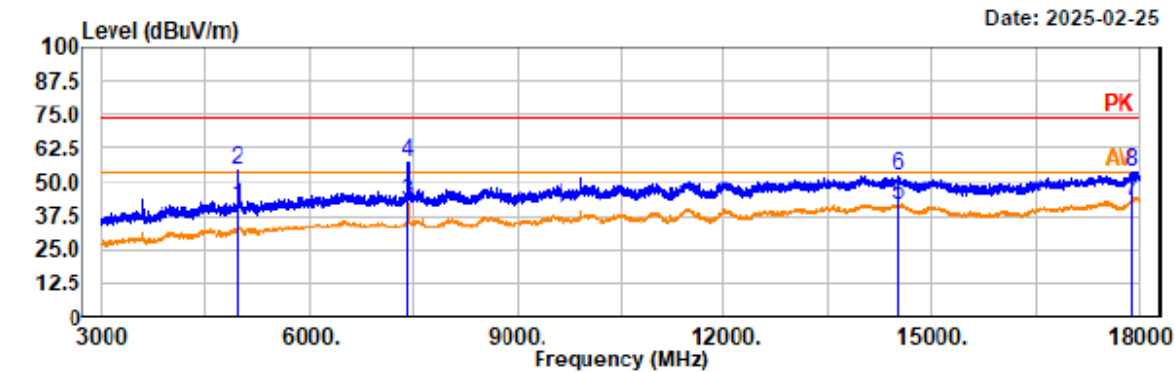

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:10kHz SWT:auto


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4960.50	45.98	-5.11	40.87	54.00	13.13	vertical	Average
4960.50	59.81	-5.11	54.70	74.00	19.30	vertical	Peak
7438.50	44.70	-2.03	42.67	54.00	11.33	vertical	Average
7438.50	59.59	-2.03	57.56	74.00	16.44	vertical	Peak
14515.50	36.52	5.06	41.58	54.00	12.42	vertical	Average
14515.50	47.63	5.06	52.69	74.00	21.31	vertical	Peak
17896.50	36.17	6.79	42.96	54.00	11.04	vertical	Average
17896.50	47.10	6.79	53.89	74.00	20.11	vertical	Peak

5) 18 GHz ~25 GHz

EUT operation mode: Transmitting in high channel of BLE 1Mbps (worst case)

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32
Test distance: 1m

Temp/Humi/ATM: 21.3℃/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

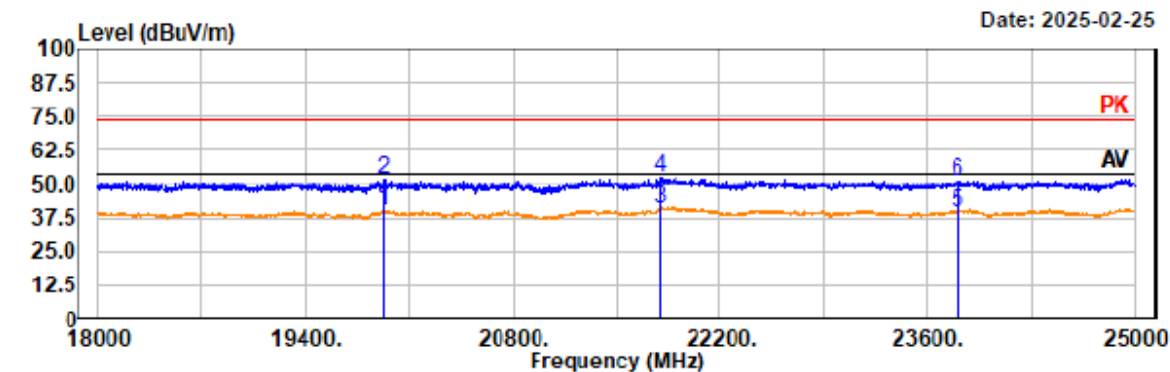


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:10kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
19931.60	39.76	-0.06	39.70	54.00	14.30	horizontal	Average
19931.60	51.86	-0.06	51.80	74.00	22.20	horizontal	Peak
21797.20	39.55	1.45	41.00	54.00	13.00	horizontal	Average
21797.20	51.01	1.45	52.46	74.00	21.54	horizontal	Peak
23805.80	37.88	1.69	39.57	54.00	14.43	horizontal	Average
23805.80	49.63	1.69	51.32	74.00	22.68	horizontal	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32
Test distance: 1m

Temp/Humi/ATM: 21.3℃/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

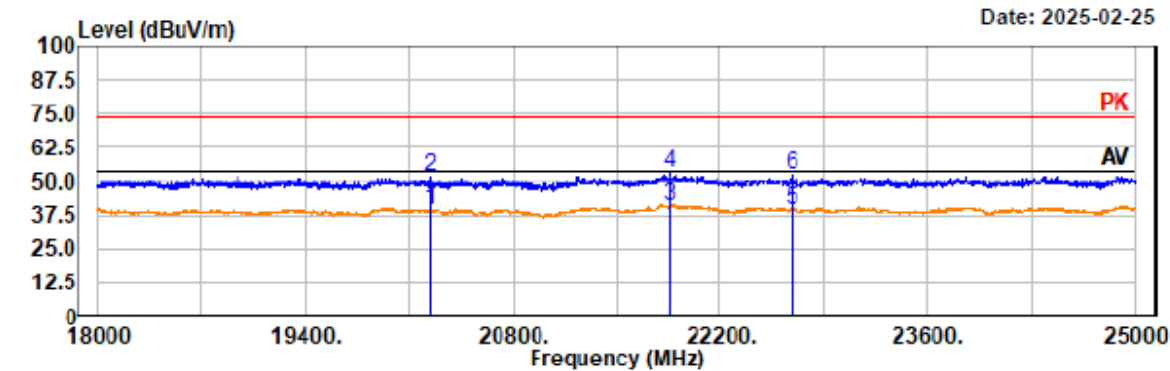

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:10kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
20239.60	38.71	0.36	39.07	54.00	14.93	vertical	Average
20239.60	51.04	0.36	51.40	74.00	22.60	vertical	Peak
21861.00	39.29	1.58	40.87	54.00	13.13	vertical	Average
21861.00	51.26	1.58	52.84	74.00	21.16	vertical	Peak
22679.40	37.95	1.51	39.46	54.00	14.54	vertical	Average
22679.40	51.02	1.51	52.53	74.00	21.47	vertical	Peak

Restricted Bands Emissions:

Project No.: 2407A60454E-RF

Test Mode: BLE 1M 2402MHz


EUT Model: UV-32

Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

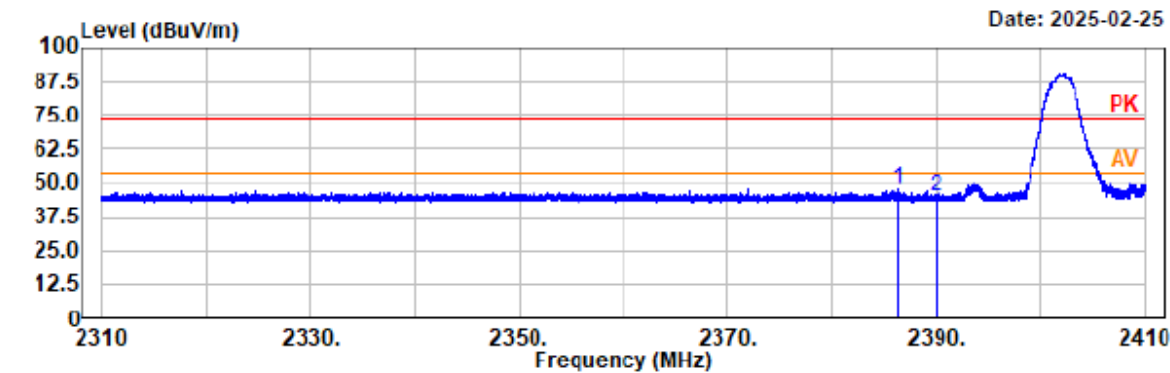


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2386.34	48.60	-1.16	47.44	74.00	26.56	Horizontal	Peak
2390.00	45.89	-1.15	44.74	74.00	29.26	Horizontal	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2402MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

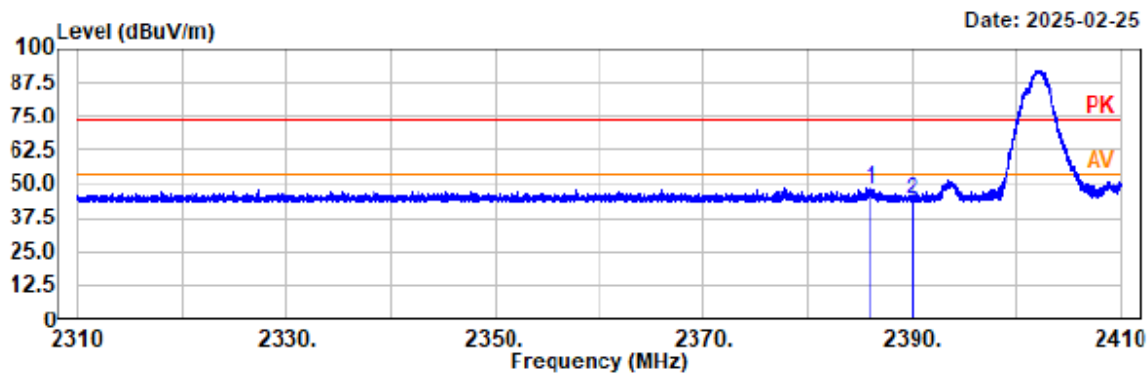


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2386.00	49.44	-1.17	48.27	74.00	25.73	vertical	Peak
2390.00	45.15	-1.15	44.00	74.00	30.00	vertical	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

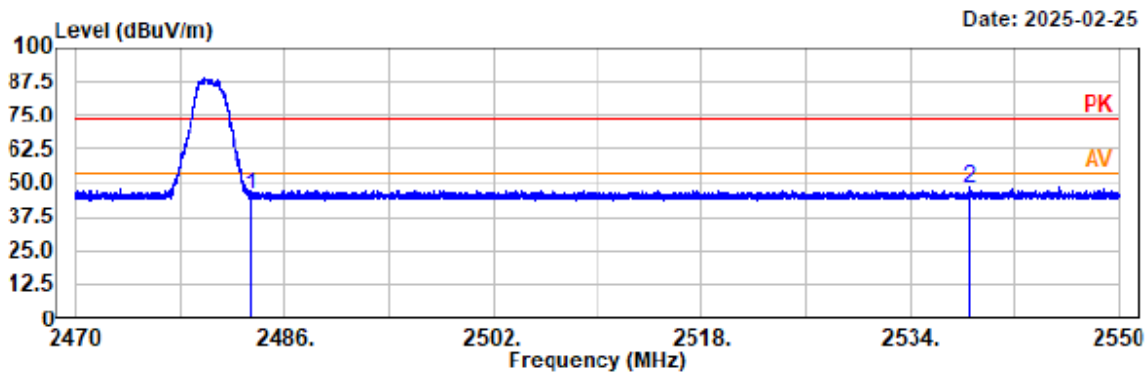


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	46.02	-0.77	45.25	74.00	28.75	Horizontal	Peak
2538.52	49.11	-0.61	48.50	74.00	25.50	Horizontal	Peak

Project No.: 2407A60454E-RF
Test Mode: BLE 1M 2480MHz
EUT Model: UV-32
Test distance: 3m

Temp/Humi/ATM: 21.3°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

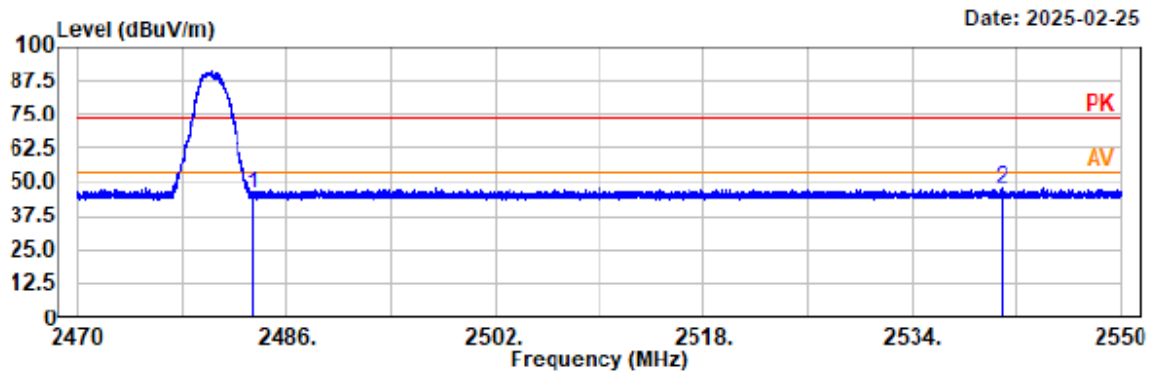


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	46.45	-0.77	45.68	74.00	28.32	vertical	Peak
2540.86	48.31	-0.61	47.70	74.00	26.30	vertical	Peak

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

EUT Setup**Test Procedure**

According to ANSI C63.10-2013 Section 11.8

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “–6 dB down amplitude”. If a marker is below this “–6 dB down amplitude” value, then it shall be as close as possible to this value.


Test Data

Test Mode:	Transmitting	Test Engineer:	Jason Hu
Test Date:	2025-01-14	Environment:	Temp.: 22.3°C Humi.: 44% Atm :100.1 kPa

Test Result: Compliant

Test Modes	Test Channel	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
BLE 1Mbps	Lowest	2402	0.709	≥ 0.5
	Middle	2440	0.673	≥ 0.5
	Highest	2480	0.661	≥ 0.5


1Mbps_Lowest

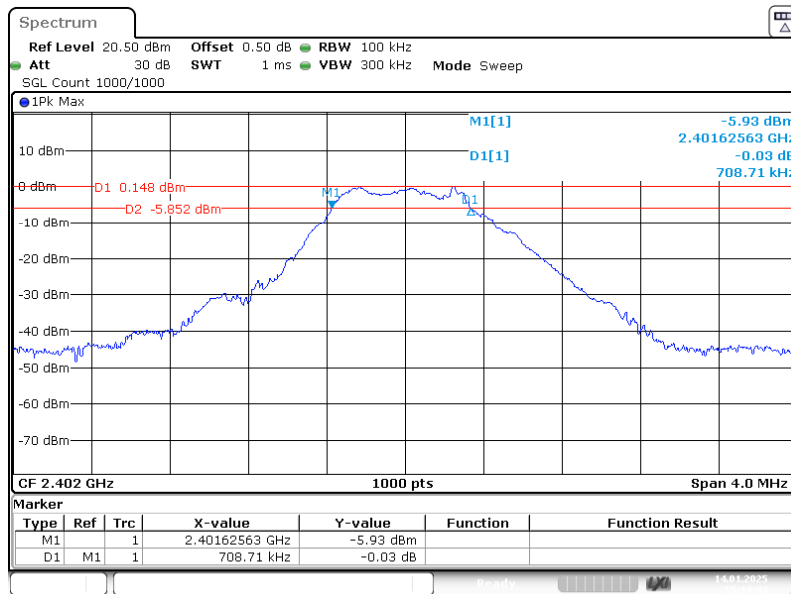

ProjectNo.:2407A60454E-RF Tester:Jason Hu

Date: 14.JAN.2025 15:14:43


1Mbps_Middle

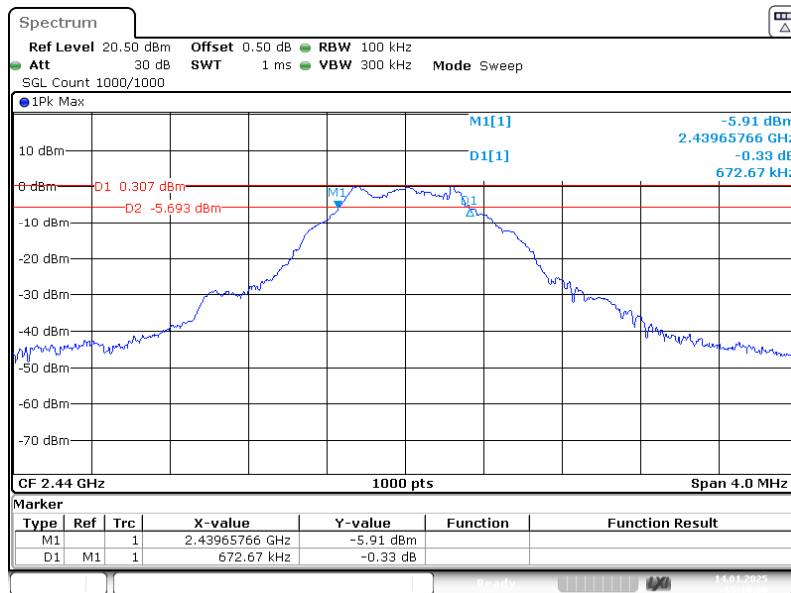

ProjectNo.:2407A60454E-RF Tester:Jason Hu

Date: 14.JAN.2025 15:19:05


1Mbps_Highest

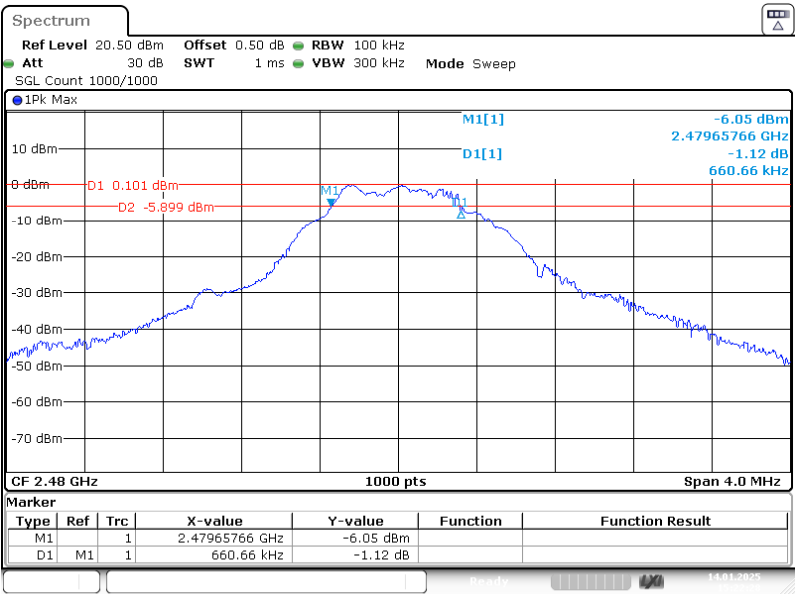

ProjectNo.:2407A60454E-RF Tester:Jason Hu
Date: 14.JAN.2025 15:22:28

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER**Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

EUT Setup**Test Procedure**

According to ANSI C63.10-2013 Section 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Set span $\geq [3 \times \text{RBW}]$.
- Sweep time = No faster than coupled (auto) time.
- Detector = peak.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.


Test Data

Test Mode:	Transmitting	Test Engineer:	Jason Hu
Test Date:	2025-01-14	Environment:	Temp.: 22.3°C Humi.: 44% Atm :100.1 kPa

Test Result: Compliant


Test Modes	Test Channel	Test Frequency (MHz)	Maximum Conducted Peak Output Power(dBm)	Limit (dBm)
BLE 1Mbps	Lowest	2402	0.54	≤ 30
	Middle	2440	0.65	≤ 30
	Highest	2480	0.65	≤ 30

1Mbps_Lowest

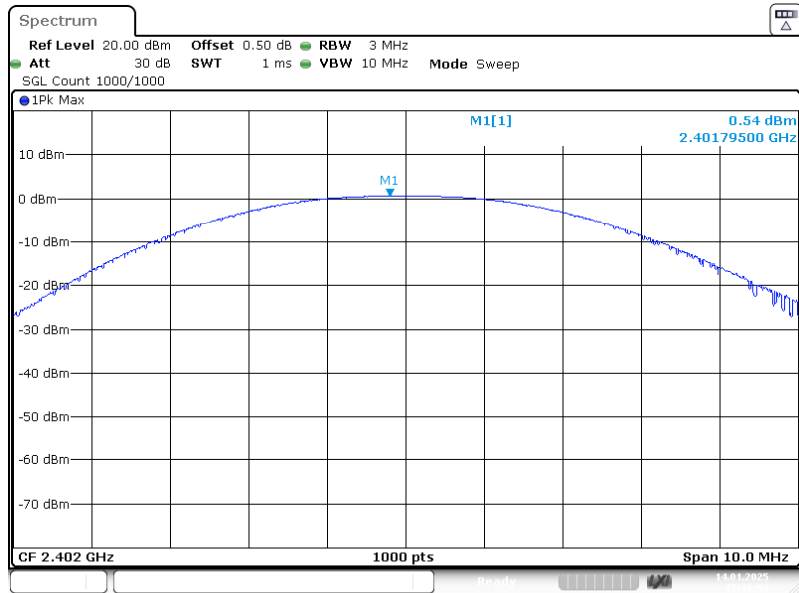


ProjectNo.:2407A60454E-RF Tester:Jason Hu
Date: 14,JAN,2025 15:16:59

1Mbps_Middle

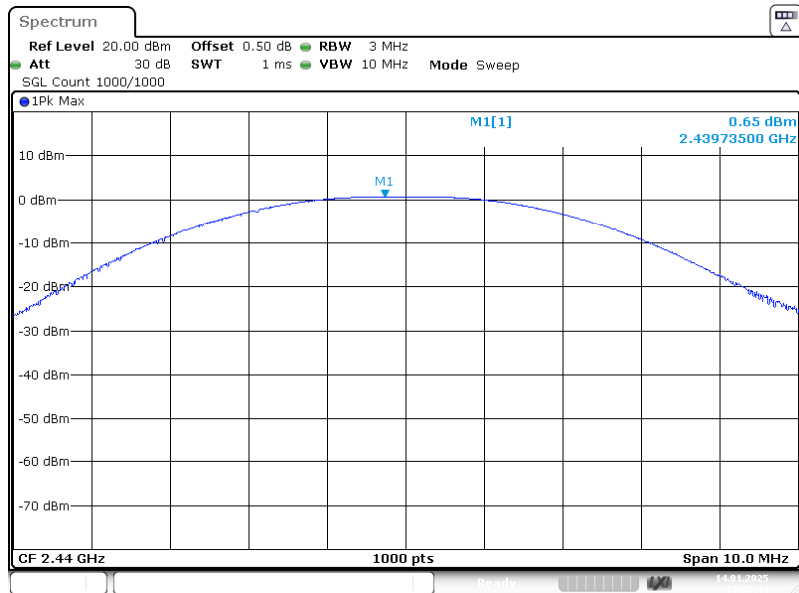

ProjectNo.:2407A60454E-RF Tester:Jason Hu
Date: 14,JAN,2025 15:20:44


1Mbps_Highest

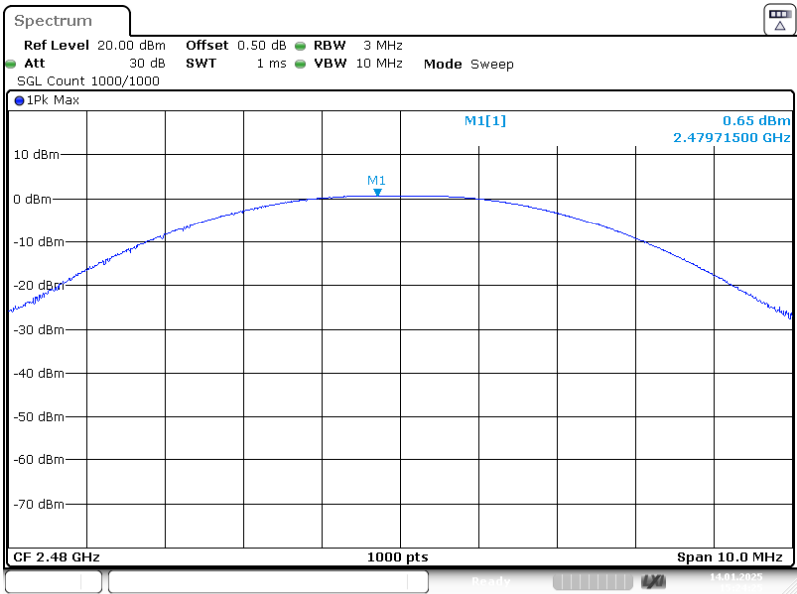

ProjectNo.:2407A60454E-RF Tester:Jason Hu
Date: 14.JAN.2025 15:24:25

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

EUT Setup**Test Procedure**

According to ANSI C63.10-2013 Section 11.11


- a) Set the center frequency and span to encompass frequency range to be measured.
 - b) Set the RBW = 100 kHz.
 - c) Set the VBW $\geq [3 \times \text{RBW}]$.
 - d) Detector = peak.
 - e) Sweep time = No faster than coupled (auto) time.
 - f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use the peak marker function to determine the maximum amplitude level.
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

Test Data

Test Mode:	Transmitting	Test Engineer:	Jason Hu
Test Date:	2025-01-14	Environment:	Temp.: 22.3°C Humi.: 44% Atm :100.1 kPa

Test Result: Compliant


BLE 1Mbps_Lowest

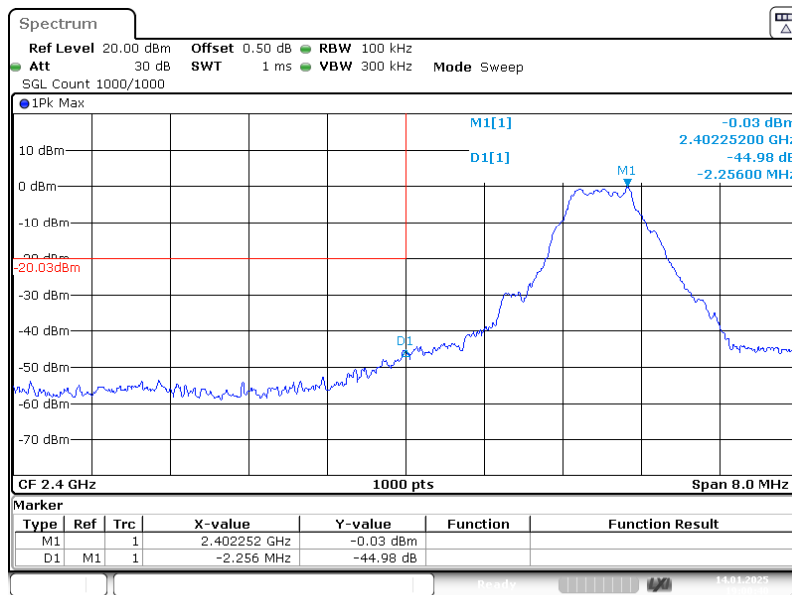

ProjectNo.:2407A60454E-RF Tester:Jason Hu

Date: 14.JAN.2025 19:00:40

BLE 1Mbps_Highest

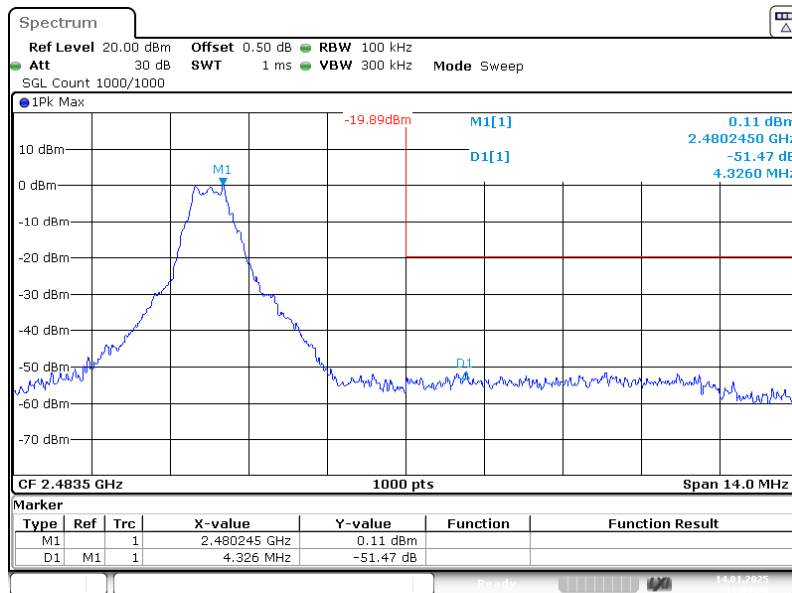

ProjectNo.:2407A60454E-RF Tester:Jason Hu


Date: 14.JAN.2025 19:01:27

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

EUT Setup



Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

- Set analyzer center frequency to DTS channel center frequency.
- Set the span >1.5 times the DTS bandwidth.
- Set the RBW to 3 kHz $\leq$ RBW $\leq$ 100 kHz.
- Set the VBW $\geq$ [3 $\times$ RBW].
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat


Test Data

Test Mode:	Transmitting	Test Engineer:	Jason Hu
Test Date:	2025-01-14	Environment:	Temp.: 22.3°C Humi.: 44% Atm :100.1 kPa

Test Result: Compliant

Test Modes	Test Channel	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BLE 1Mbps	Lowest	2402	-15.61	≤ 8.00
	Middle	2440	-15.4	≤ 8.00
	Highest	2480	-15.37	≤ 8.00


BLE 1Mbps_Lowest

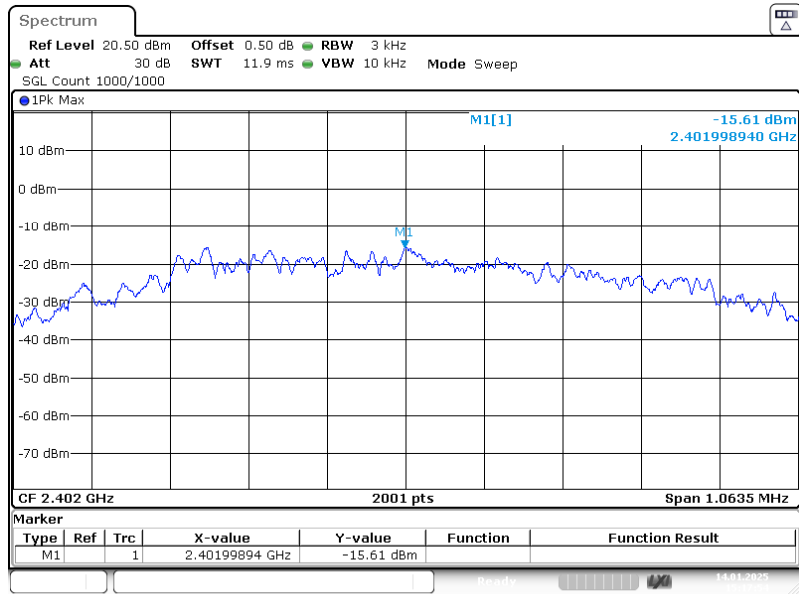

ProjectNo.:2407A60454E-RF Tester:Jason Hu

Date: 14.JAN.2025 15:17:54


BLE 1Mbps_Middle

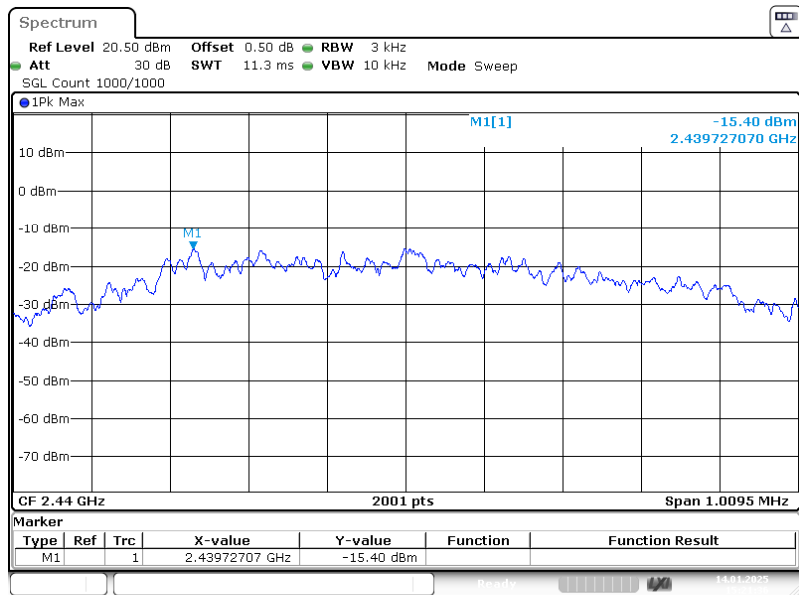

ProjectNo.:2407A60454E-RF Tester:Jason Hu

Date: 14.JAN.2025 15:21:36

BLE 1Mbps_Highest

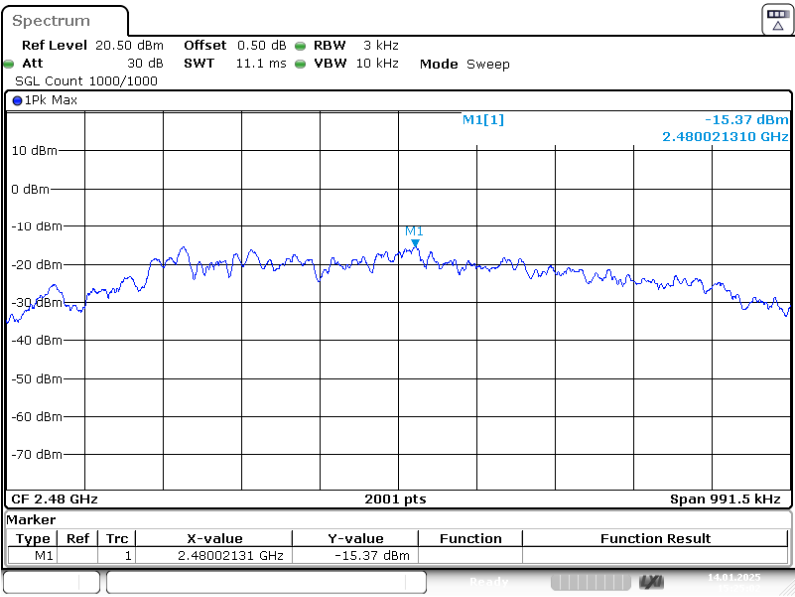

ProjectNo.:2407A60454E-RF Tester:Jason Hu
Date: 14.JAN.2025 15:25:02

EUT PHOTOGRAPHS

Please refer to the attachment 2407A60454E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2407A60454E-RF-INP EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2407A60454E-RF-TSP-02 SETUP PHOTOGRAPHS.

Declarations

1. Bay Area Compliance Laboratories Corp. (Xiamen) is not responsible for authenticity of any information provided by the applicant. Information from the applicant that may affect test results are marked with an asterisk “★”.
2. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested.
3. Unless required by the rule provided by the applicant or product regulations, then decision rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95% confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of Bay Area Compliance Laboratories Corp. (Xiamen).
6. This report is valid only with a valid digital signature. The digital signature may be available only under the adobe software above version 7.0.

******* END OF REPORT *******