

TEST REPORT

Applicant: PO FUNG ELECTRONIC (HK) INTERNATIONAL GROUP
COMPANY LIMITED

Address: Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan
Road, Kowloon, Hong Kong

Product Name: Amateur Radio

FCC ID: 2AJGM-UV28PRO

Standard(s): FCC Part 15B
ANSI C63.4-2014

Report Number: 2402Z61855E-RF-00B


Report Date: 2025/2/7

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).



Reviewed By: Pedro Yun

Title: Project Engineer



Approved By: Gavin Xu

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	3
1. GENERAL INFORMATION	4
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	4
1.2 ACCESSORY INFORMATION	4
1.3 EQUIPMENT MODIFICATIONS	4
2. SUMMARY OF TEST RESULTS	5
3. DESCRIPTION OF TEST CONFIGURATION	6
3.1 OPERATION FREQUENCY AND TEST CHANNEL:	6
3.2 DESCRIPTION OF TEST CONFIGURATION	6
3.3 EUT EXERCISE SOFTWARE	6
3.4 SUPPORT EQUIPMENT LIST AND DETAILS	6
3.5 SUPPORT CABLE LIST AND DETAILS	6
3.6 BLOCK DIAGRAM OF TEST SETUP	7
3.7 TEST FACILITY	8
3.8 MEASUREMENT UNCERTAINTY	8
4. REQUIREMENTS AND TEST PROCEDURES	9
4.1 AC LINE CONDUCTED EMISSIONS	9
4.1.1 Applicable Standard	9
4.1.2 EUT Setup	9
4.1.3 EMI Test Receiver Setup	10
4.1.4 Test Procedure	10
4.1.5 Corrected Amplitude & Margin Calculation	10
4.1.6 Test Result and Data	11
4.2 RADIATION SPURIOUS EMISSIONS	16
4.2.1 Applicable Standard	16
4.2.2 Test System Setup	16
4.2.3 EMI Test Receiver Setup	17
4.2.4 Test Procedure	17
4.2.5 Corrected Result & Margin Calculation	18
4.2.6 Test Result and Data	19
4.3 SCANNING RECEIVERS AND FREQUENCY CONVERTERS USED WITH SCANNING RECEIVERS	64
4.3.1 Applicable Standard	64
4.3.2 Test Procedure	64
4.3.3 Scanning Receivers and Frequency Converters Used with Scanning Receivers	65
EXHIBIT A - EUT PHOTOGRAPHS	66
EXHIBIT B - TEST SETUP PHOTOGRAPHS	67

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402Z61855E-RF-00B	Original Report	2025/2/7

1. GENERAL INFORMATION

1.1 General Description Of Equipment under Test

EUT Name:	Amateur Radio
EUT Model:	UV-28PRO
Multiple Model:	MX-28GB, AR-28GB, AT-28GB, TD-28GB, NA-28GB
Highest Operation Frequency^:	2480MHz
Rated Input Voltage:	DC 7.4V from battery or DC 5V from adapter
Serial Number:	2UW6-1
EUT Received Date:	2024/11/22
EUT Received Status:	Good
Note: The multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter	Jiangxi Jian Aohai Technology Co., Ltd.	A318-050100W-US2	Input: 100-240Vac 50/60Hz 0.2A Output: 5Vdc 1A

1.3 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard Clause	Description of Test	Test Result
FCC§15.107	Conducted emissions	Compliant
FCC§15.109	Radiated emissions	Compliant
FCC§15.121(b)	Scanning receivers and frequency converters used with scanning receivers	Compliant

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency And Test Channel:

Operation Modes	Operation Frequency Range (MHz)	Test Frequency (MHz)
Scanning	108-136	108-136
	136-174	136-174
	220-260	220-260
	350-390	350-390
	400-520	400-520
Receiving	108-136	108.0125, 122, 135.9875
	136-174	136.0125, 155, 173.9875
	220-260	220.0125, 240, 259.9875
	350-390	350.0125, 370, 389.9875
	400-520	400.0125, 460, 519.9875

3.2 Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user). The following summary table is showing all test modes to demonstrate in compliance with the standard:

Test Items	Test Mode(s)
Radiated Spurious Emission :	Test Mode 1: Scanning Test Mode 2: Receiving
AC Line Conducted Emission	Test Mode 1: Scanning Test Mode 2: Receiving

3.3 EUT Exercise Software

No software was used to test.

3.4 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	Antenna	Unknown	Antenna 02
Unknown	Antenna	Unknown	Antenna 01
HP	RF Communications Test Set	8920A	3438A05201

3.5 Support Cable List and Details


Cable Description	Shielding Cable	Ferrite Core	Length (m)	From Port	To
Adapter Cable	No	No	0.8	Adapter	EUT
Earphone Cable	No	No	1.2	Earphone	EUT
Antenna Cable	No	No	10	Antenna	8920A

3.6 Block Diagram of Test Setup

AC Line conducted Emission:

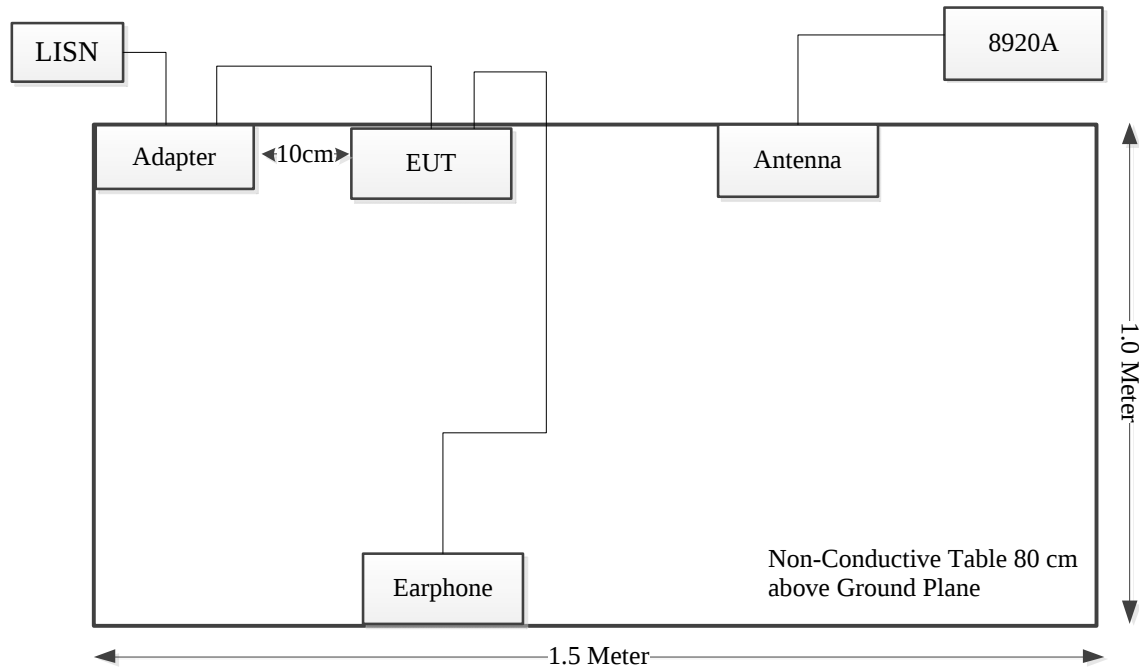

Radiated Emission:

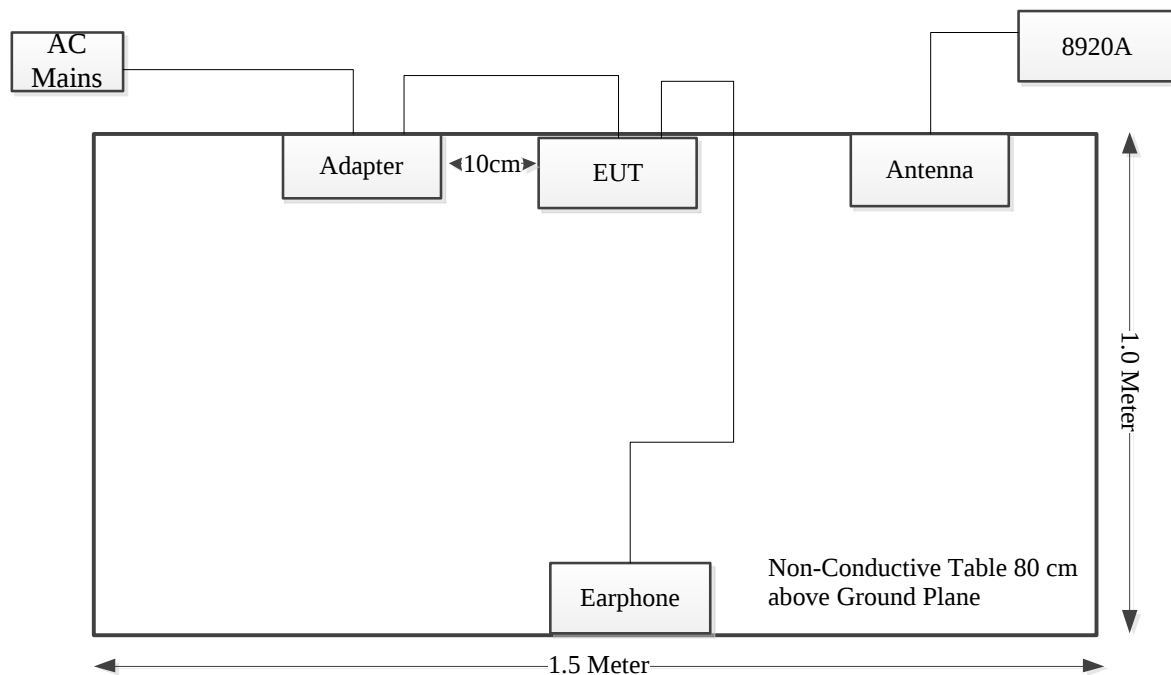

3.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.8 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz: 5.47 dB 26.5GHz~40GHz: 5.63 dB
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard


FCC§15.107

(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

4.1.2 EUT Setup

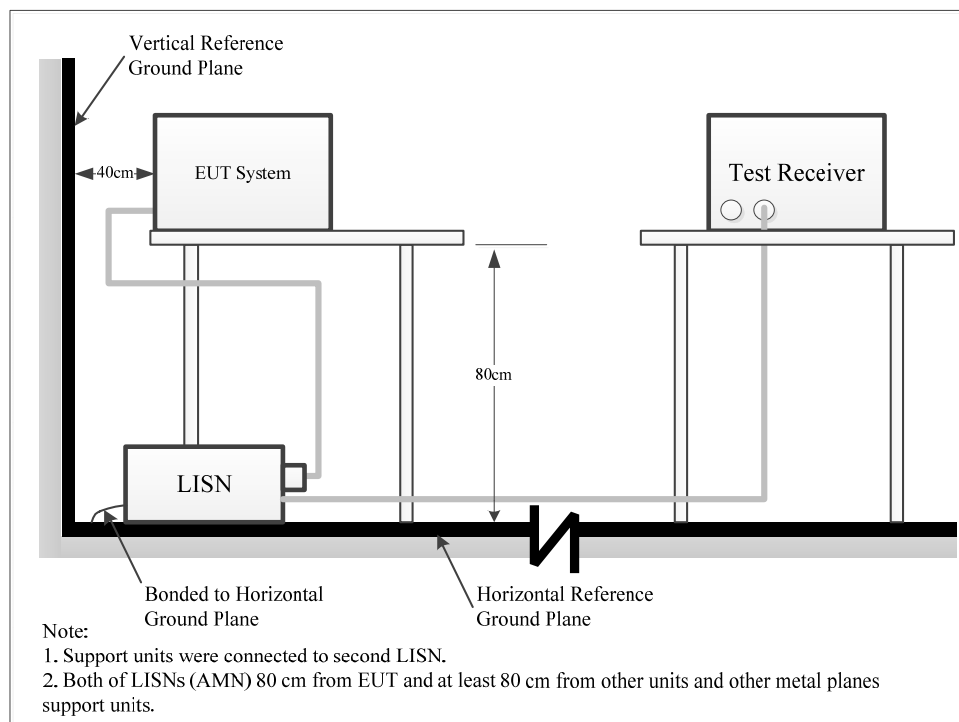

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result and Data

Serial Number:	2UW6-1	Test Date:	2024/12/02
Test Site:	CE	Test Mode:	M1-M2
Tester:	Yukin Qiu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.3	Relative Humidity: (%)	53	ATM Pressure: (kPa)	101.6
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2024/9/5	2025/9/4
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2024/9/5	2025/9/4
R&S	EMI Test Receiver	ESCI	100035	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Scanning Mode(108-136MHz was tested):

Project No.: 2402Z61855E-RF
Port: Line
Test Mode: M1
IF B/W 9KHz PK/AV

Serial No.: 2UW6-1
Tester: Yukin Qiu
Note:

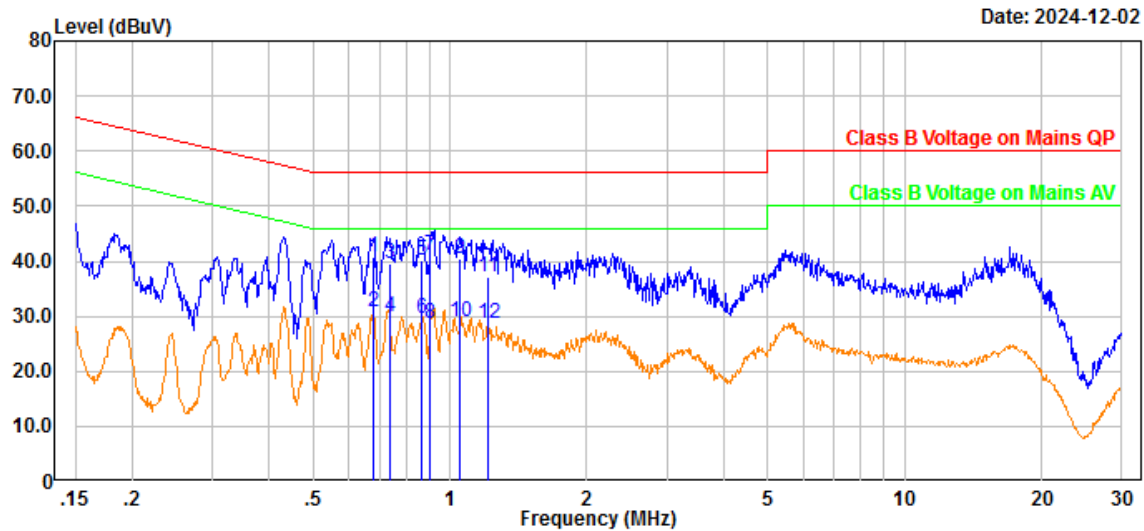


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.68	29.76	10.85	40.61	56.00	15.39	QP
2	0.68	19.87	10.85	30.72	46.00	15.28	Average
3	0.74	28.69	10.86	39.55	56.00	16.45	QP
4	0.74	18.91	10.86	29.77	46.00	16.23	Average
5	0.87	29.35	10.86	40.21	56.00	15.79	QP
6	0.87	18.64	10.86	29.50	46.00	16.50	Average
7	0.91	30.08	10.86	40.94	56.00	15.06	QP
8	0.91	17.92	10.86	28.78	46.00	17.22	Average
9	1.05	29.57	10.85	40.42	56.00	15.58	QP
10	1.05	18.12	10.85	28.97	46.00	17.03	Average
11	1.21	26.35	10.84	37.19	56.00	18.81	QP
12	1.21	17.85	10.84	28.69	46.00	17.31	Average

Project No.: 2402Z61855E-RF
Port: neutral
Test Mode: M1
IF B/W 9KHz PK/AV

Serial No.: 2UW6-1
Tester: Yukin Qiu
Note:

Date: 2024-12-02

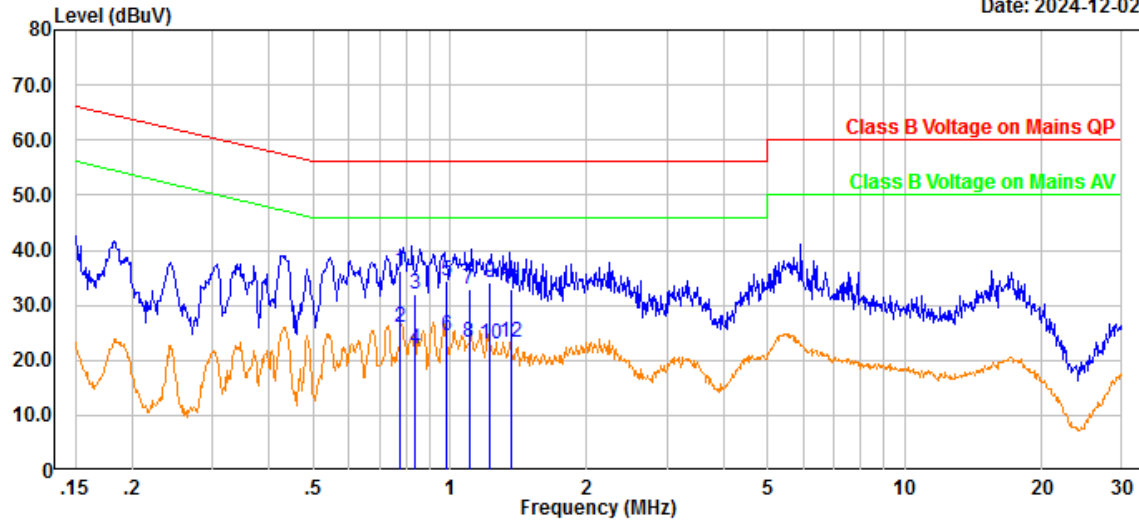


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.78	25.53	10.78	36.31	56.00	19.69	QP
2	0.78	15.33	10.78	26.11	46.00	19.89	Average
3	0.84	21.30	10.80	32.10	56.00	23.90	QP
4	0.84	11.13	10.80	21.93	46.00	24.07	Average
5	0.98	23.56	10.84	34.40	56.00	21.60	QP
6	0.98	13.71	10.84	24.55	46.00	21.45	Average
7	1.10	21.90	10.86	32.76	56.00	23.24	QP
8	1.10	12.27	10.86	23.13	46.00	22.87	Average
9	1.23	23.40	10.86	34.26	56.00	21.74	QP
10	1.23	12.20	10.86	23.06	46.00	22.94	Average
11	1.36	21.93	10.88	32.81	56.00	23.19	QP
12	1.36	12.35	10.88	23.23	46.00	22.77	Average

Receiving Mode(122MHz was tested):

Project No.: 2402Z61855E-RF
Port: Line
Test Mode: M2
IF B/W 9KHz PK/AV

Serial No.: 2UW6-1
Tester: Yukin Qiu
Note:

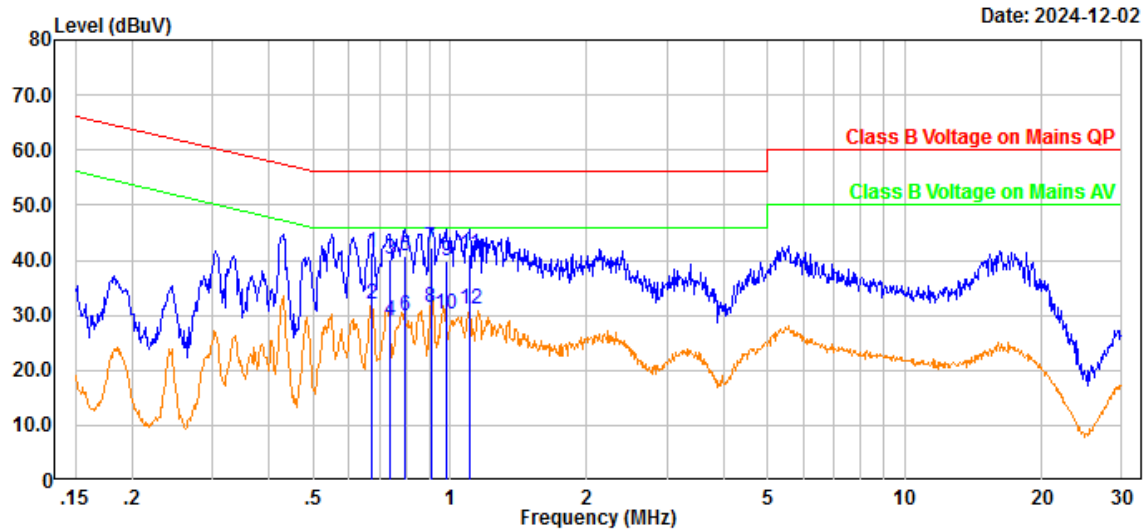


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.67	30.64	10.85	41.49	56.00	14.51	QP
2	0.67	21.17	10.85	32.02	46.00	13.98	Average
3	0.74	29.37	10.86	40.23	56.00	15.77	QP
4	0.74	18.08	10.86	28.94	46.00	17.06	Average
5	0.79	29.77	10.85	40.62	56.00	15.38	QP
6	0.79	19.02	10.85	29.87	46.00	16.13	Average
7	0.91	31.26	10.86	42.12	56.00	13.88	QP
8	0.91	20.44	10.86	31.30	46.00	14.70	Average
9	0.98	29.09	10.85	39.94	56.00	16.06	QP
10	0.98	19.20	10.85	30.05	46.00	15.95	Average
11	1.10	30.19	10.85	41.04	56.00	14.96	QP
12	1.10	20.10	10.85	30.95	46.00	15.05	Average

Project No.: 2402Z61855E-RF
 Port: neutral
 Test Mode: M2
 IF B/W 9KHz PK/AV

Serial No.: 2UW6-1
 Tester: Yukin Qiu
 Note:

Date: 2024-12-02

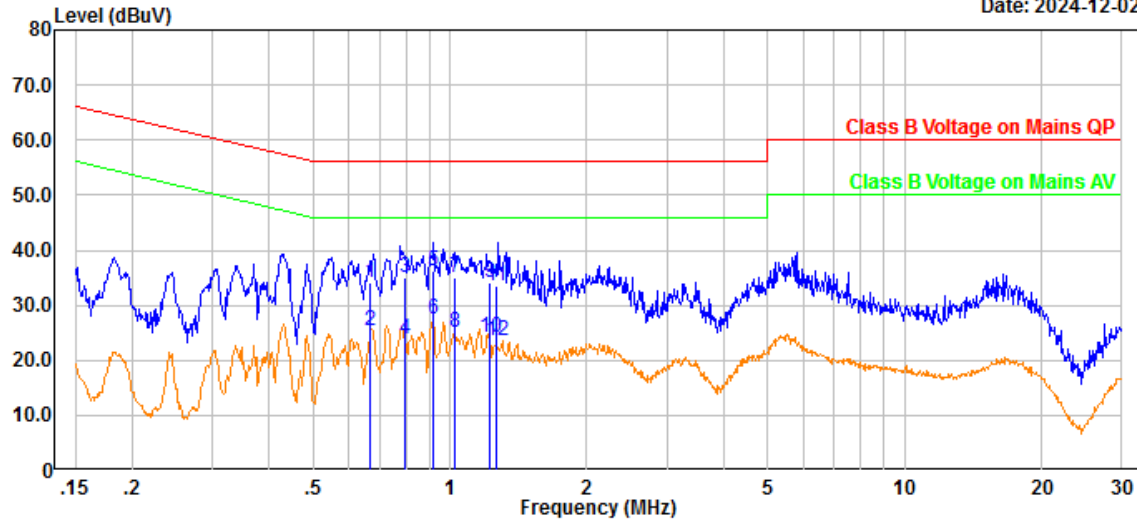

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.67	23.50	10.75	34.25	56.00	21.75	QP
2	0.67	14.53	10.75	25.28	46.00	20.72	Average
3	0.80	24.23	10.78	35.01	56.00	20.99	QP
4	0.80	13.21	10.78	23.99	46.00	22.01	Average
5	0.92	25.51	10.83	36.34	56.00	19.66	QP
6	0.92	16.69	10.83	27.52	46.00	18.48	Average
7	1.02	24.16	10.85	35.01	56.00	20.99	QP
8	1.02	14.27	10.85	25.12	46.00	20.88	Average
9	1.22	23.21	10.86	34.07	56.00	21.93	QP
10	1.22	13.31	10.86	24.17	46.00	21.83	Average
11	1.26	22.76	10.87	33.63	56.00	22.37	QP
12	1.26	12.63	10.87	23.50	46.00	22.50	Average

4.2 Radiation Spurious Emissions

4.2.1 Applicable Standard


FCC§15.109

(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

4.2.2 Test System Setup

Below 1GHz:

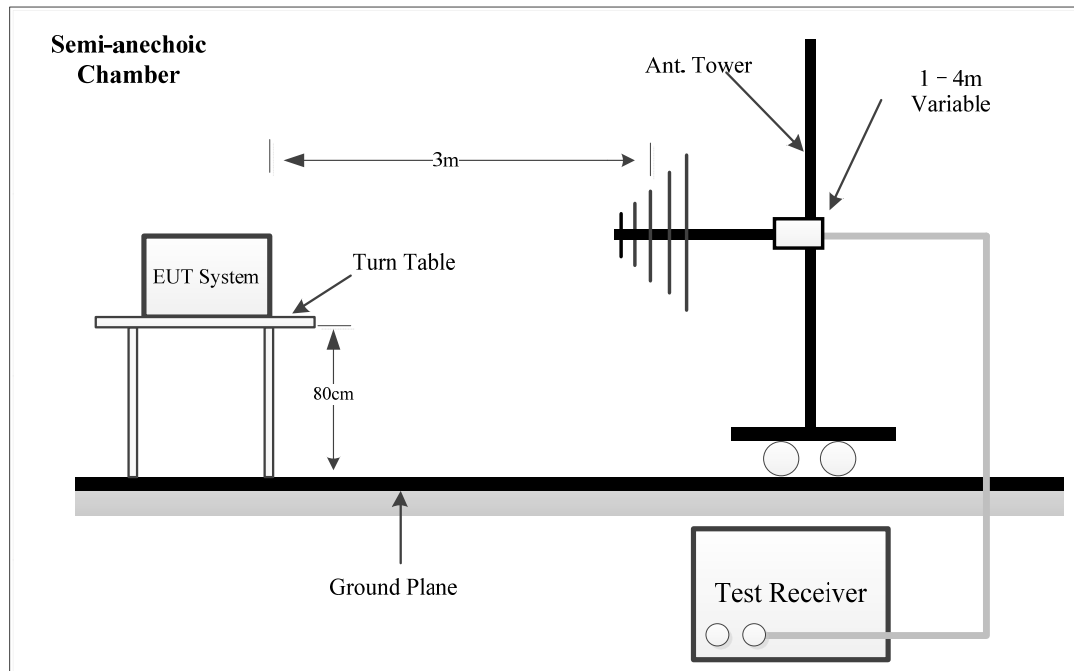

Above 1GHz:

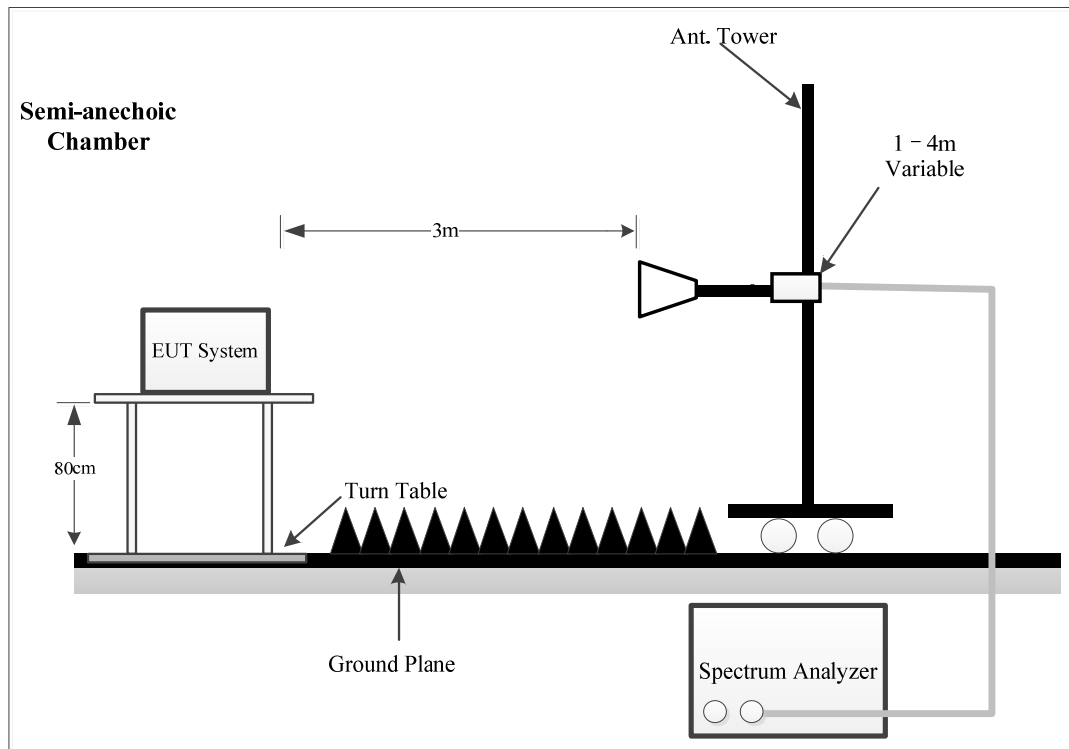

The radiated emission tests were performed at the 3 meters distance, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15B Class B limits.

4.2.3 EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30MHz – 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	10Hz	/	AVG

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

If the maximized peak measured value complies with under the QP limit more than 6dB, then it is unnecessary to perform a QP measurement.

If the maximized peak measured value complies with under the Average limit, then it is unnecessary to perform an Average measurement.

4.2.5 Corrected Result & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Result and Data

Serial Number:	2UW6-1	Test Date:	2025/1/4~2025/1/12
Test Site:	Chamber10m, Chamber B	Test Mode:	M1~M2
Tester:	Zoo Zou, Leo Xiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	19.2~21.6	Relative Humidity: (%)	30~40	ATM Pressure: (kPa)	102.2
----------------------	-----------	---------------------------	-------	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/15
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

1) 30MHz-1GHz:


Scanning Mode:

108-136MHz:

Project No.: 2402Z61855E-RF
Polarization: Horizontal
Test Mode: M1
Note: 108-136
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou


Date: 2025-01-04

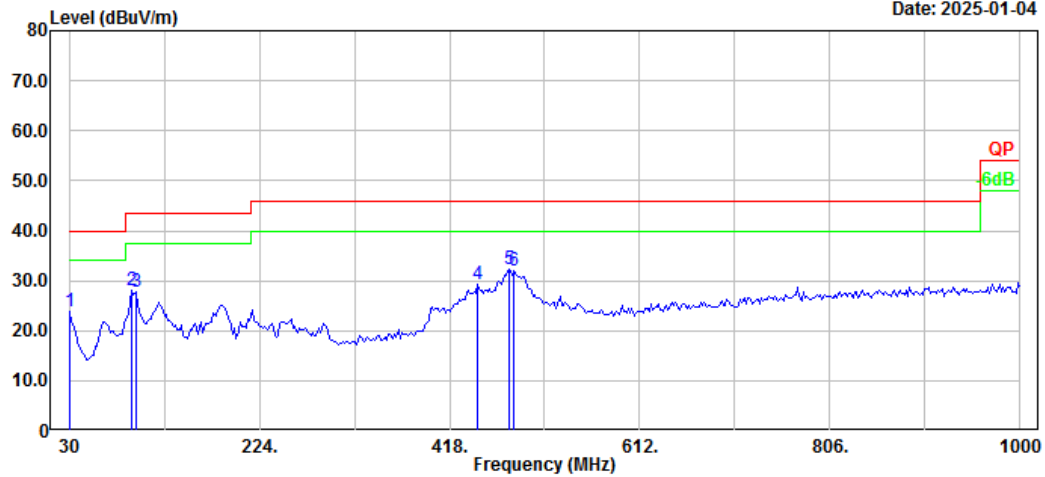

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	27.58	-3.80	23.78	40.00	16.22	Peak
2	94.020	43.72	-15.64	28.08	43.50	15.42	Peak
3	97.900	42.54	-14.83	27.71	43.50	15.79	Peak
4	447.100	34.93	-5.57	29.36	46.00	16.64	Peak
5	478.140	37.01	-4.75	32.26	46.00	13.74	Peak
6	483.960	36.61	-4.62	31.99	46.00	14.01	Peak

Project No.: 2402Z61855E-RF
 Polarization: Vertical
 Test Mode: M1
 Note: 108-136
 RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
 Tester: Zoo Zou

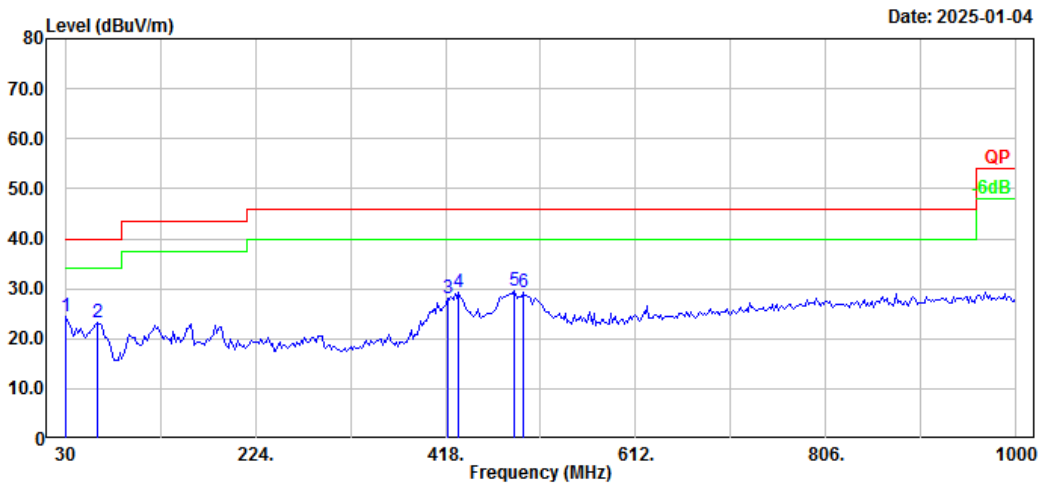


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.37	-3.80	24.57	40.00	15.43	Peak
2	62.980	39.74	-16.56	23.18	40.00	16.82	Peak
3	419.940	34.66	-6.49	28.17	46.00	17.83	Peak
4	431.580	35.41	-6.10	29.31	46.00	16.69	Peak
5	487.840	34.10	-4.54	29.56	46.00	16.44	Peak
6	497.540	33.61	-4.34	29.27	46.00	16.73	Peak

136-174MHz:

Project No.: 2402Z61855E-RF
Polarization: Horizontal
Test Mode: M1
Note: 136-174
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou


Date: 2025-01-04

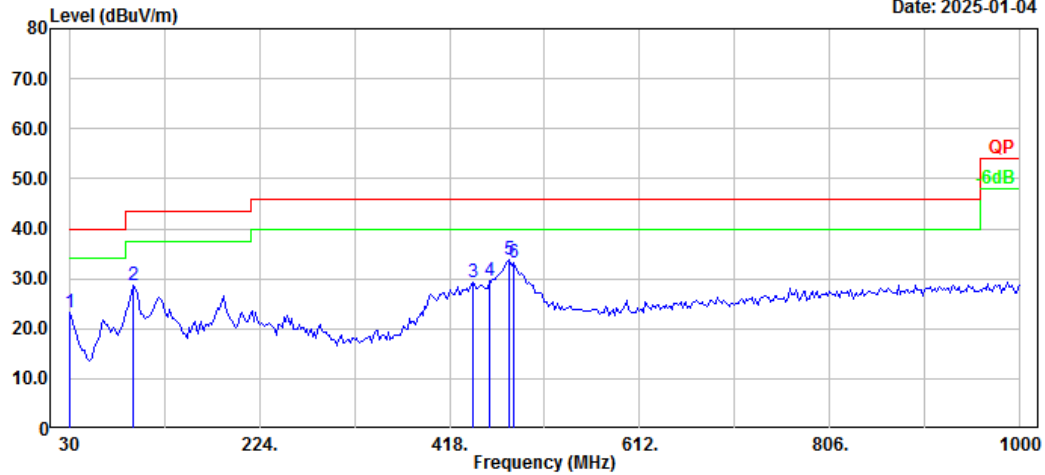

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	27.08	-3.80	23.28	40.00	16.72	Peak
2	95.960	43.80	-15.22	28.58	43.50	14.92	Peak
3	441.280	34.99	-5.78	29.21	46.00	16.79	Peak
4	458.740	34.68	-5.18	29.50	46.00	16.50	Peak
5	478.140	38.64	-4.75	33.89	46.00	12.11	Peak
6	483.960	37.92	-4.62	33.30	46.00	12.70	Peak


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M1
Note: 136-174
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

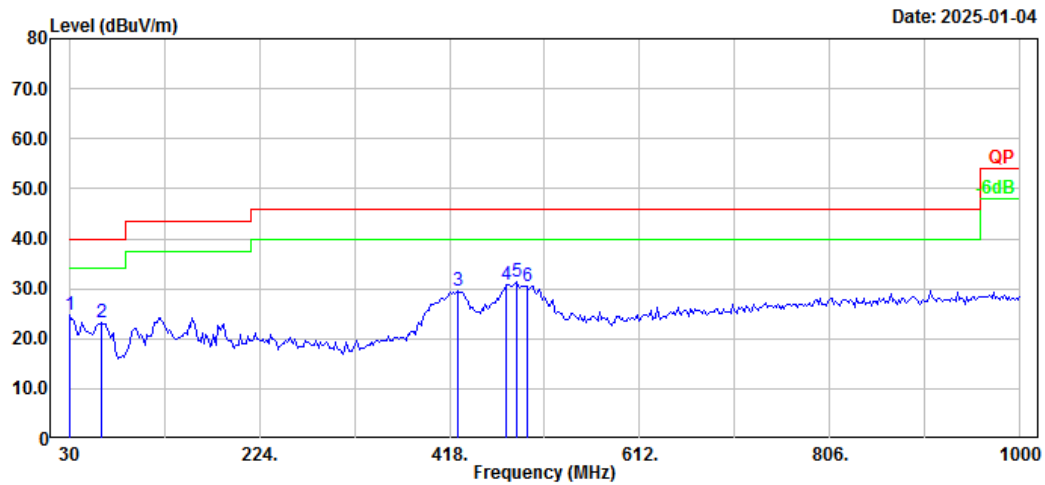


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.41	-3.80	24.61	40.00	15.39	Peak
2	62.980	39.89	-16.56	23.33	40.00	16.67	Peak
3	425.760	35.79	-6.30	29.49	46.00	16.51	Peak
4	476.200	35.63	-4.79	30.84	46.00	15.16	Peak
5	485.900	36.01	-4.58	31.43	46.00	14.57	Peak
6	497.540	34.91	-4.34	30.57	46.00	15.43	Peak

220-260MHz:

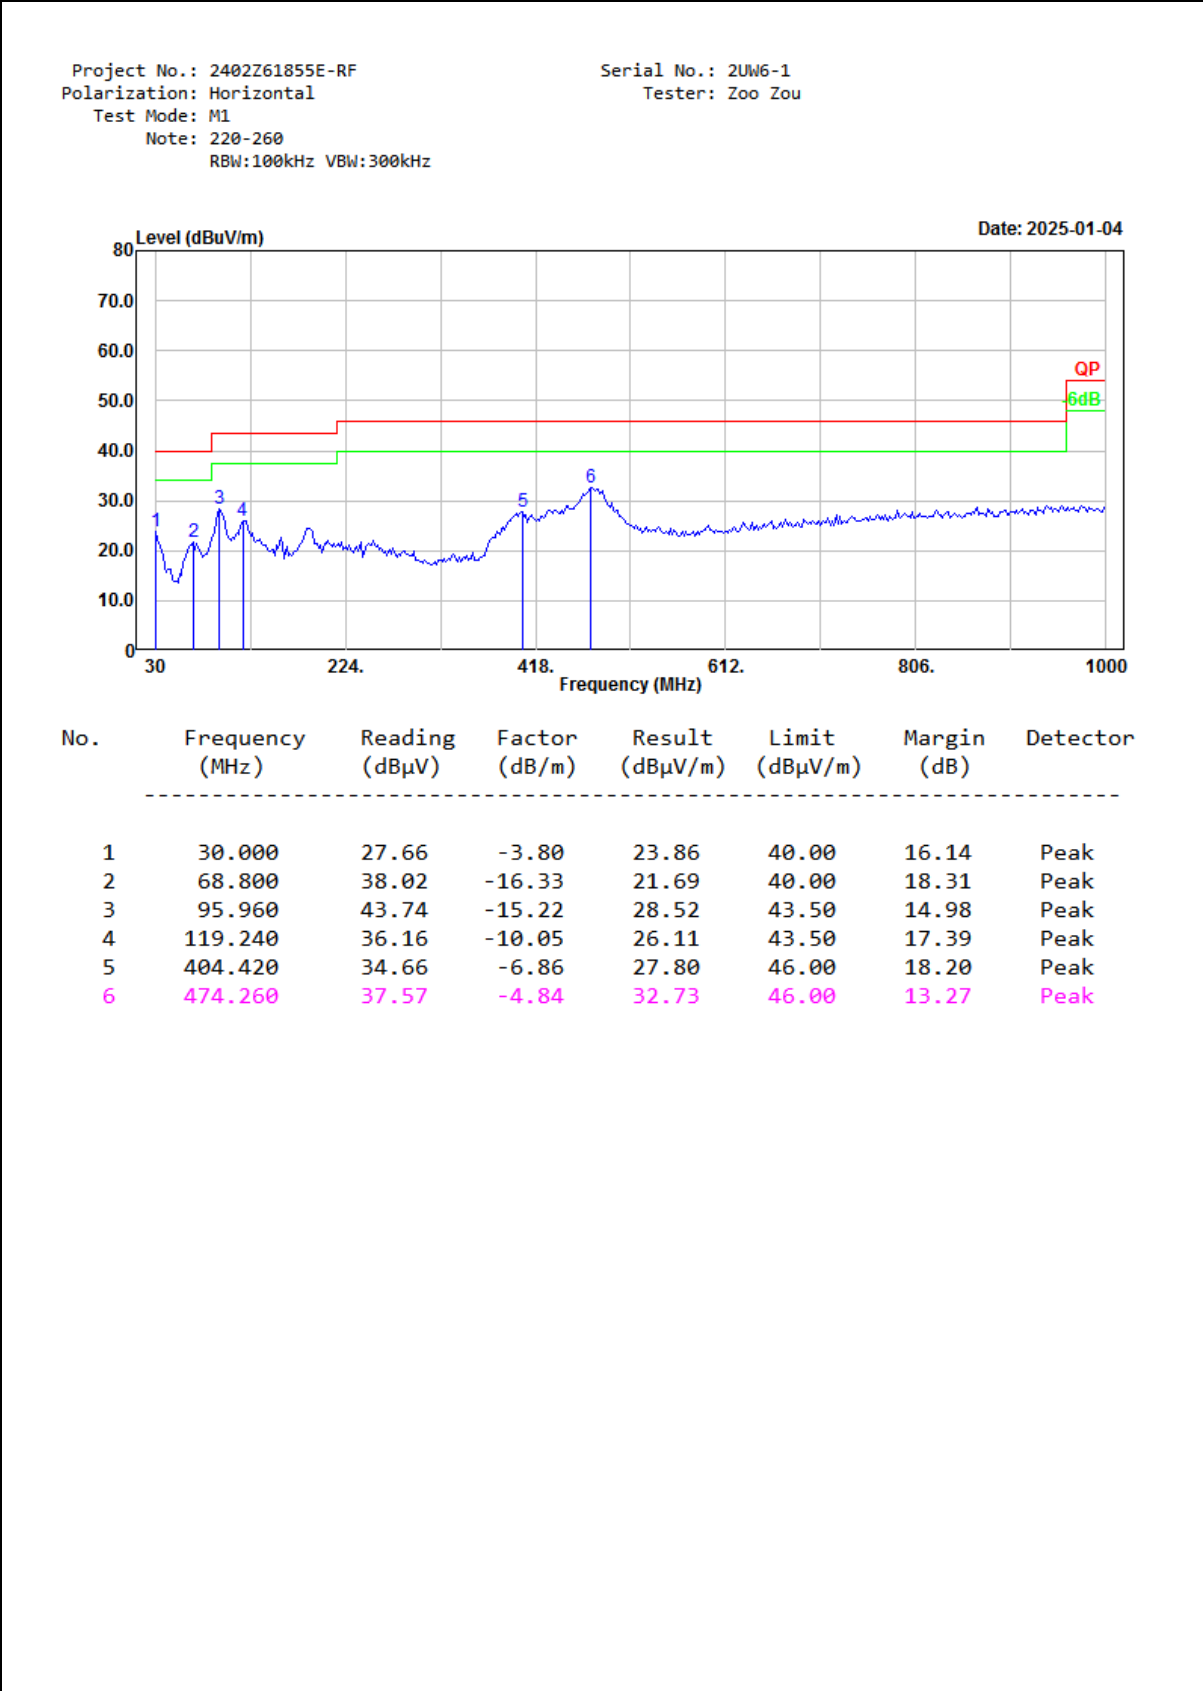

Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M1
Note: 220-260
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

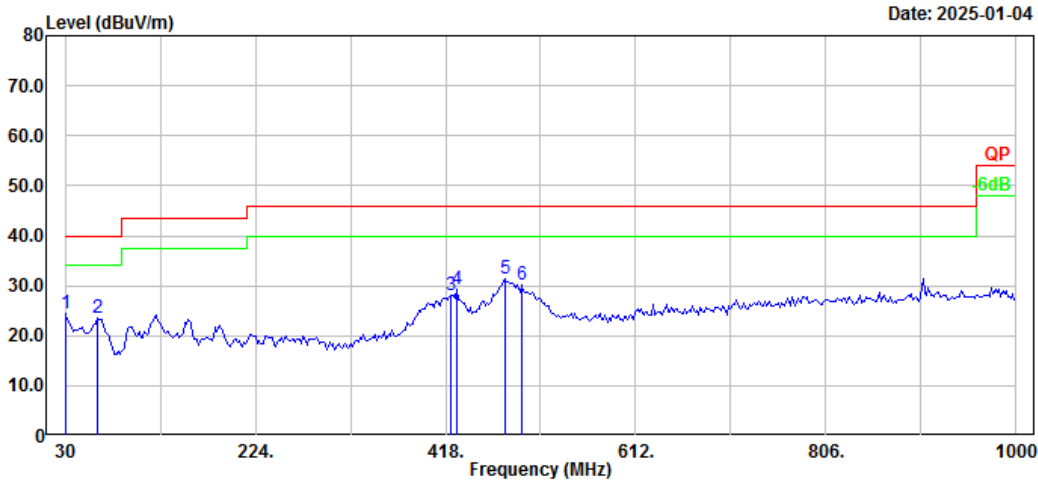


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.19	-3.80	24.39	40.00	15.61	Peak
2	62.980	40.02	-16.56	23.46	40.00	16.54	Peak
3	423.820	34.49	-6.36	28.13	46.00	17.87	Peak
4	429.640	35.38	-6.17	29.21	46.00	16.79	Peak
5	478.140	36.01	-4.75	31.26	46.00	14.74	Peak
6	495.600	34.44	-4.38	30.06	46.00	15.94	Peak

350-390MHz:

Project No.: 2402Z61855E-RF
Polarization: Horizontal
Test Mode: M1
Note: 350-390
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou


Date: 2025-01-04

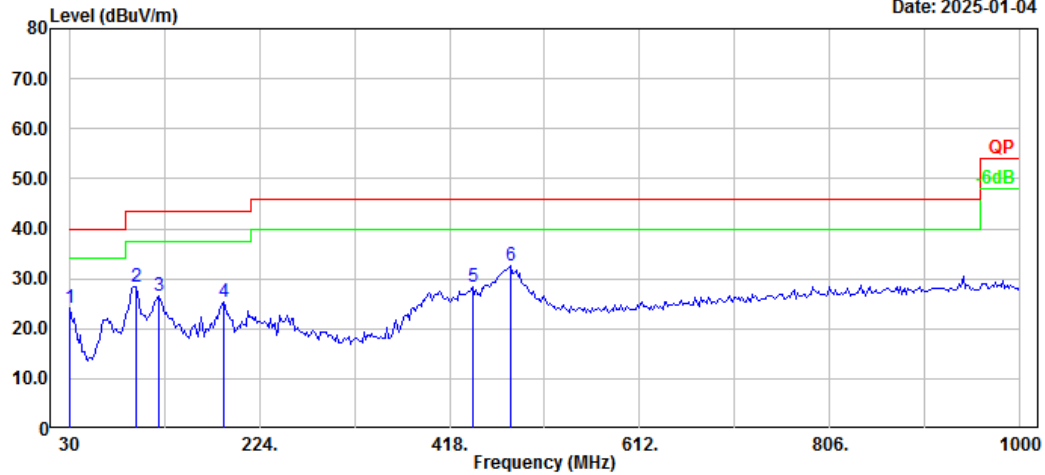

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	27.89	-3.80	24.09	40.00	15.91	Peak
2	97.900	43.22	-14.83	28.39	43.50	15.11	Peak
3	121.180	36.53	-9.94	26.59	43.50	16.91	Peak
4	187.140	37.63	-12.19	25.44	43.50	18.06	Peak
5	441.280	34.11	-5.78	28.33	46.00	17.67	Peak
6	480.080	37.35	-4.71	32.64	46.00	13.36	Peak

Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M1
Note: 350-390
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

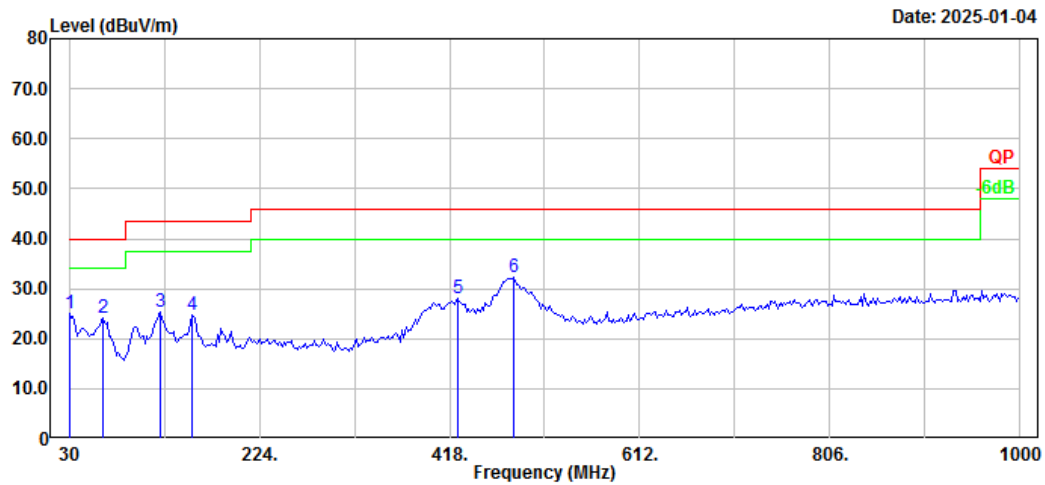


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.89	-3.80	25.09	40.00	14.91	Peak
2	64.920	40.55	-16.50	24.05	40.00	15.95	Peak
3	123.120	35.39	-9.92	25.47	43.50	18.03	Peak
4	156.100	35.94	-11.11	24.83	43.50	18.67	Peak
5	425.760	34.43	-6.30	28.13	46.00	17.87	Peak
6	483.960	36.79	-4.62	32.17	46.00	13.83	Peak

400-520MHz:

Project No.: 2402Z61855E-RF
Polarization: Horizontal
Test Mode: M1
Note: 400-520
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou


Date: 2025-01-04

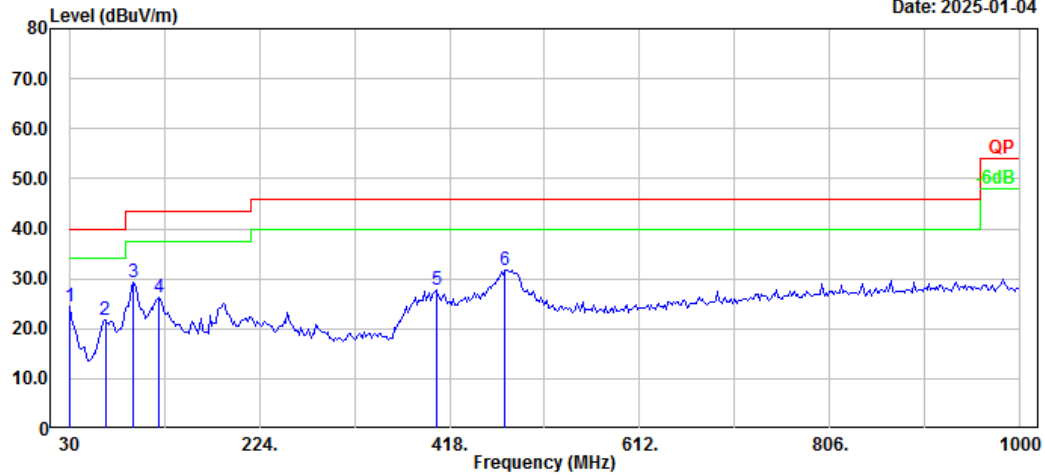

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.19	-3.80	24.39	40.00	15.61	Peak
2	66.860	38.12	-16.42	21.70	40.00	18.30	Peak
3	95.960	44.65	-15.22	29.43	43.50	14.07	Peak
4	121.180	36.23	-9.94	26.29	43.50	17.21	Peak
5	404.420	34.64	-6.86	27.78	46.00	18.22	Peak
6	474.260	36.63	-4.84	31.79	46.00	14.21	Peak


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M1
Note: 400-520
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

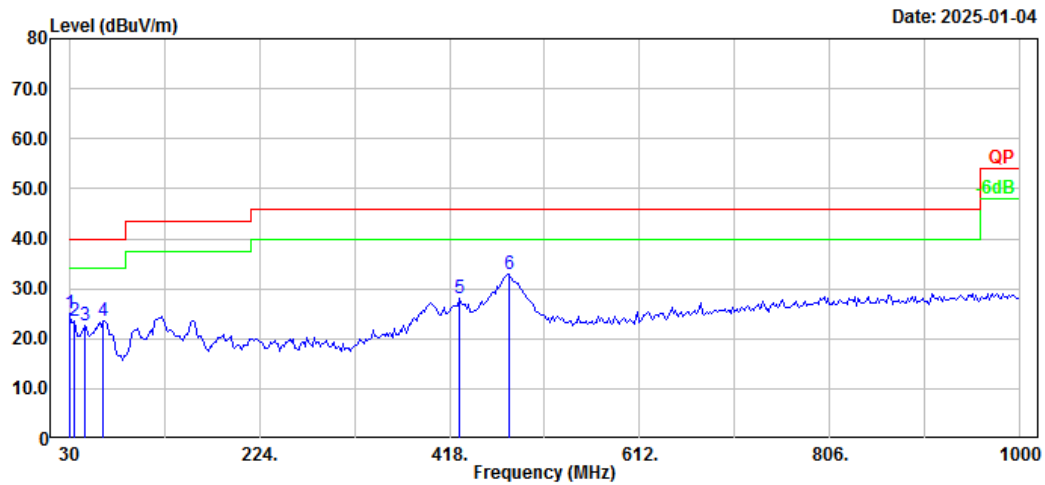


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.000	28.73	-3.80	24.93	40.00	15.07	Peak
2	35.820	31.47	-8.01	23.46	40.00	16.54	Peak
3	45.520	36.50	-13.94	22.56	40.00	17.44	Peak
4	64.920	40.12	-16.50	23.62	40.00	16.38	Peak
5	427.700	34.29	-6.23	28.06	46.00	17.94	Peak
6	478.140	37.53	-4.75	32.78	46.00	13.22	Peak

Receiving Mode:
108.0125MHz:

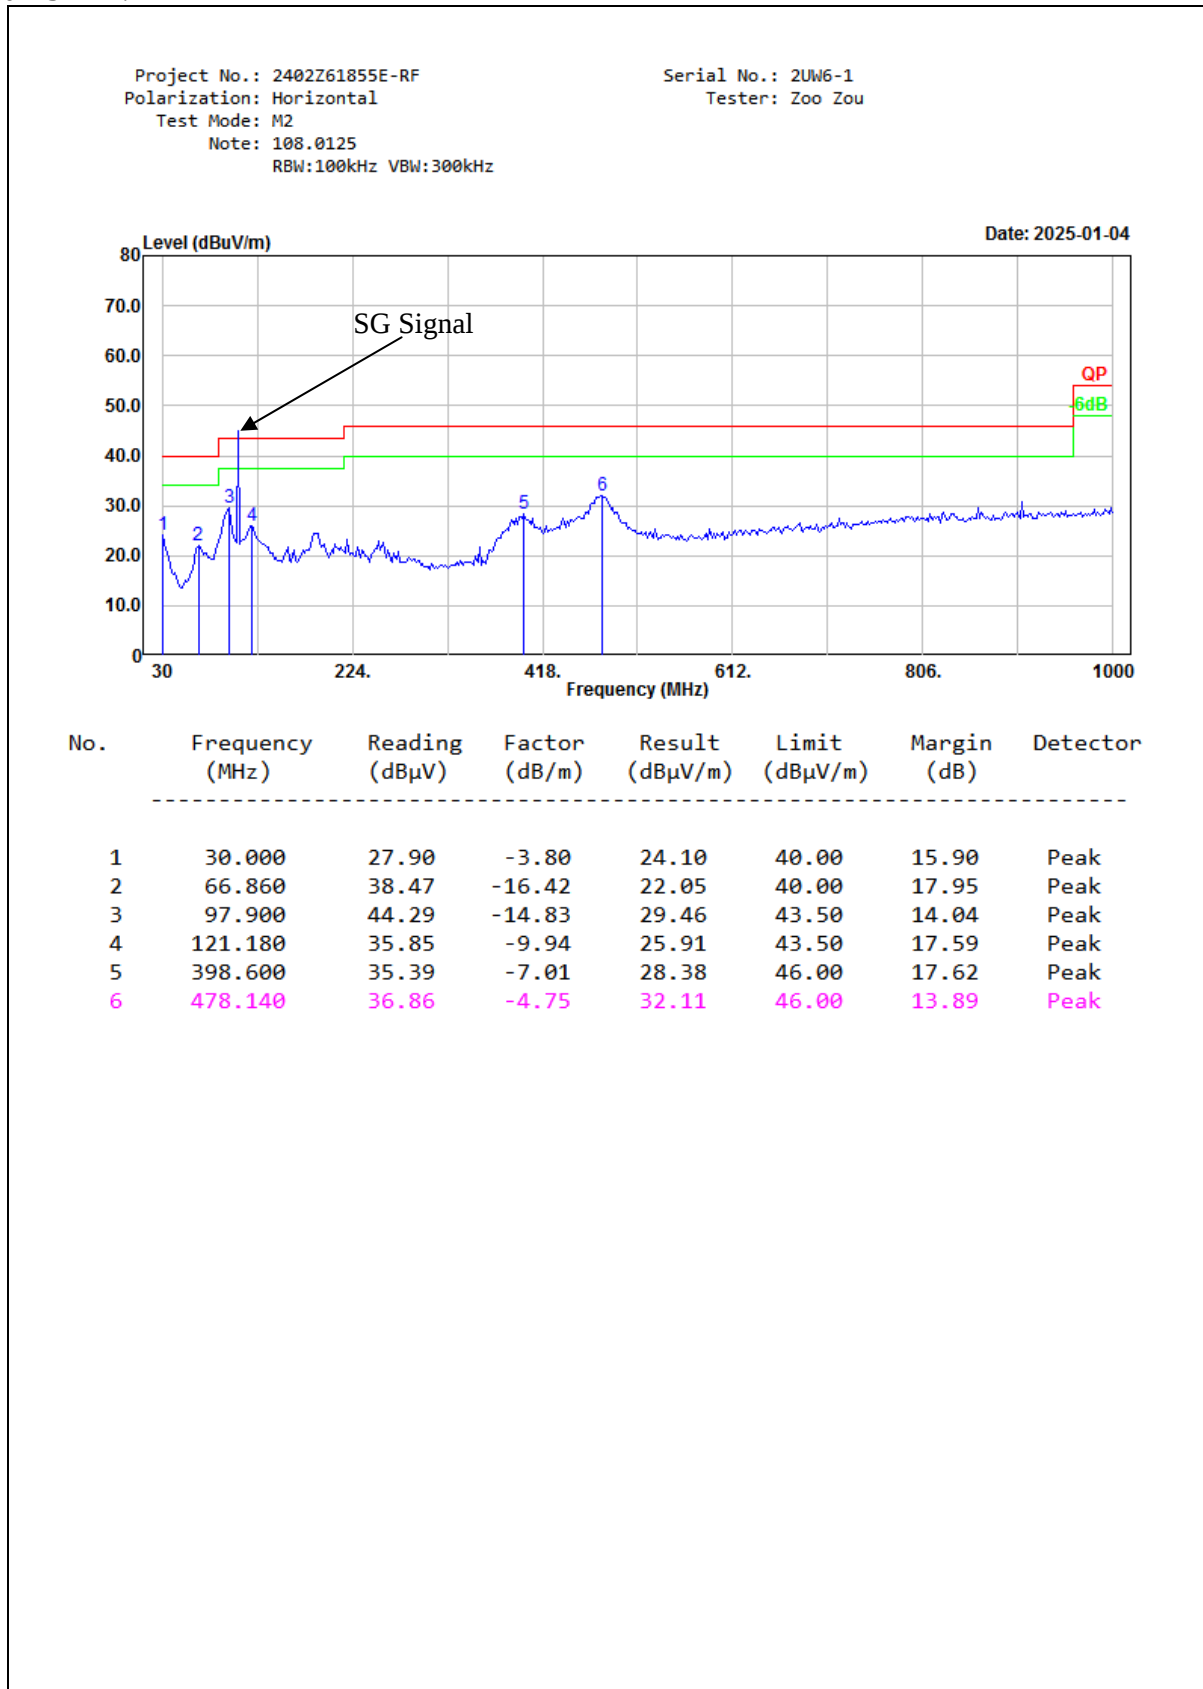


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 108.0125
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

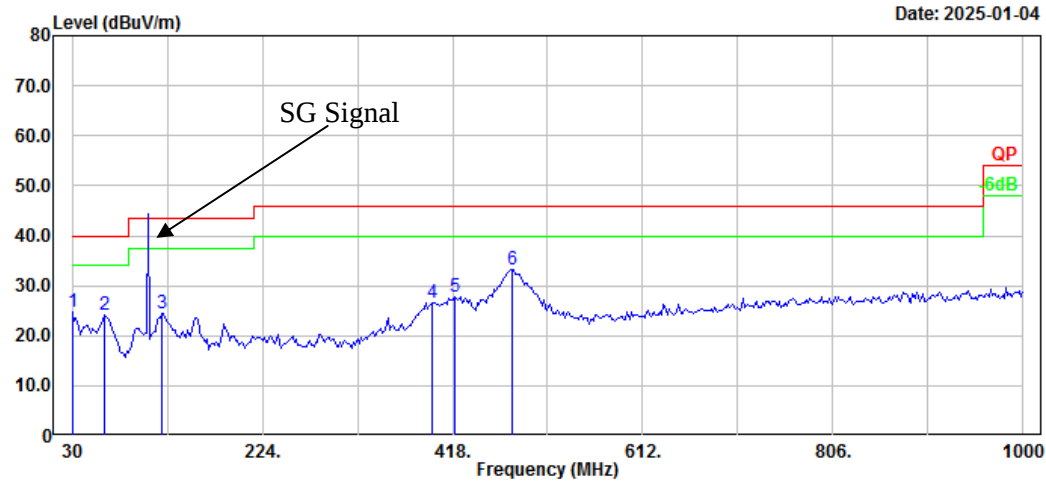


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.50	-3.80	24.70	40.00	15.30	Peak
2	62.980	40.62	-16.56	24.06	40.00	15.94	Peak
3	121.180	34.49	-9.94	24.55	43.50	18.95	Peak
4	396.660	33.74	-7.05	26.69	46.00	19.31	Peak
5	419.940	34.25	-6.49	27.76	46.00	18.24	Peak
6	478.140	38.04	-4.75	33.29	46.00	12.71	Peak

122MHz:

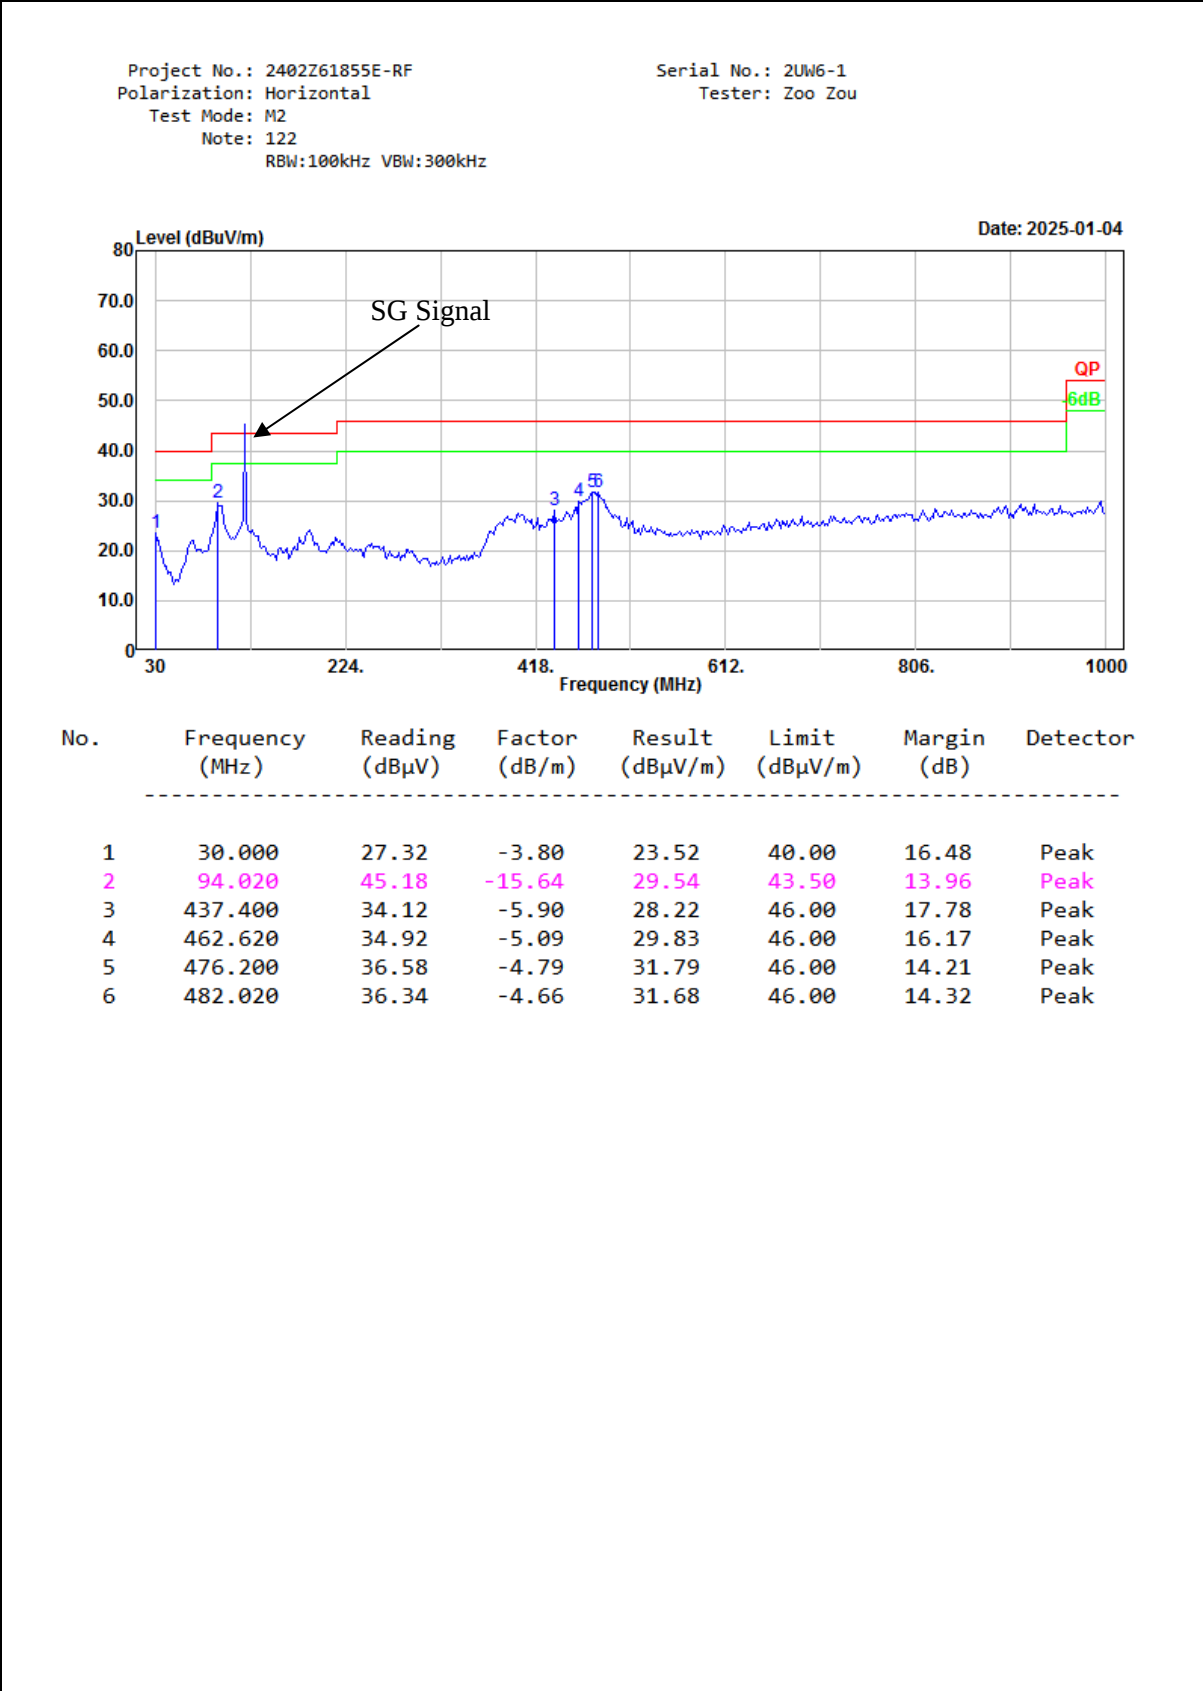


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 122
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

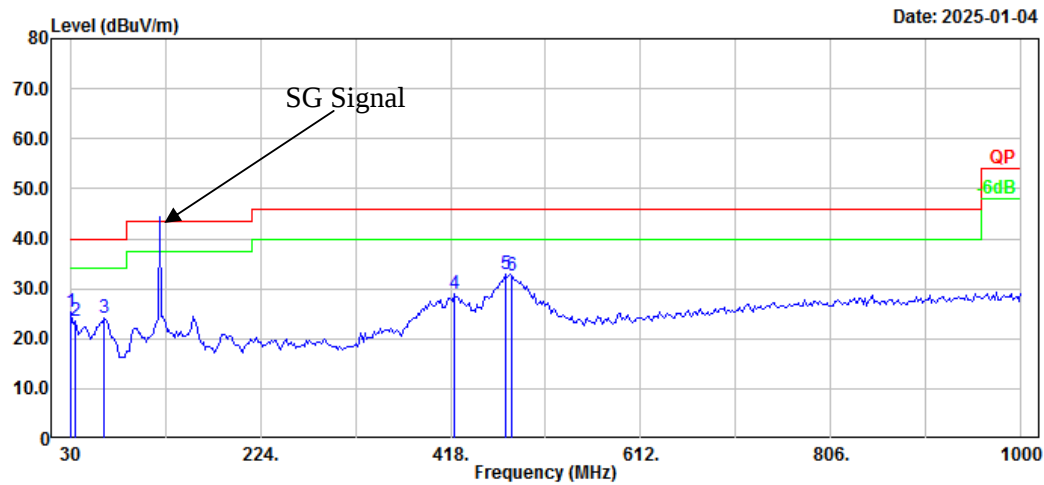


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	29.12	-3.80	25.32	40.00	14.68	Peak
2	35.820	31.48	-8.01	23.47	40.00	16.53	Peak
3	64.920	40.55	-16.50	24.05	40.00	15.95	Peak
4	421.880	35.41	-6.43	28.98	46.00	17.02	Peak
5	474.260	37.75	-4.84	32.91	46.00	13.09	Peak
6	480.080	37.34	-4.71	32.63	46.00	13.37	Peak

135.9875MHz:

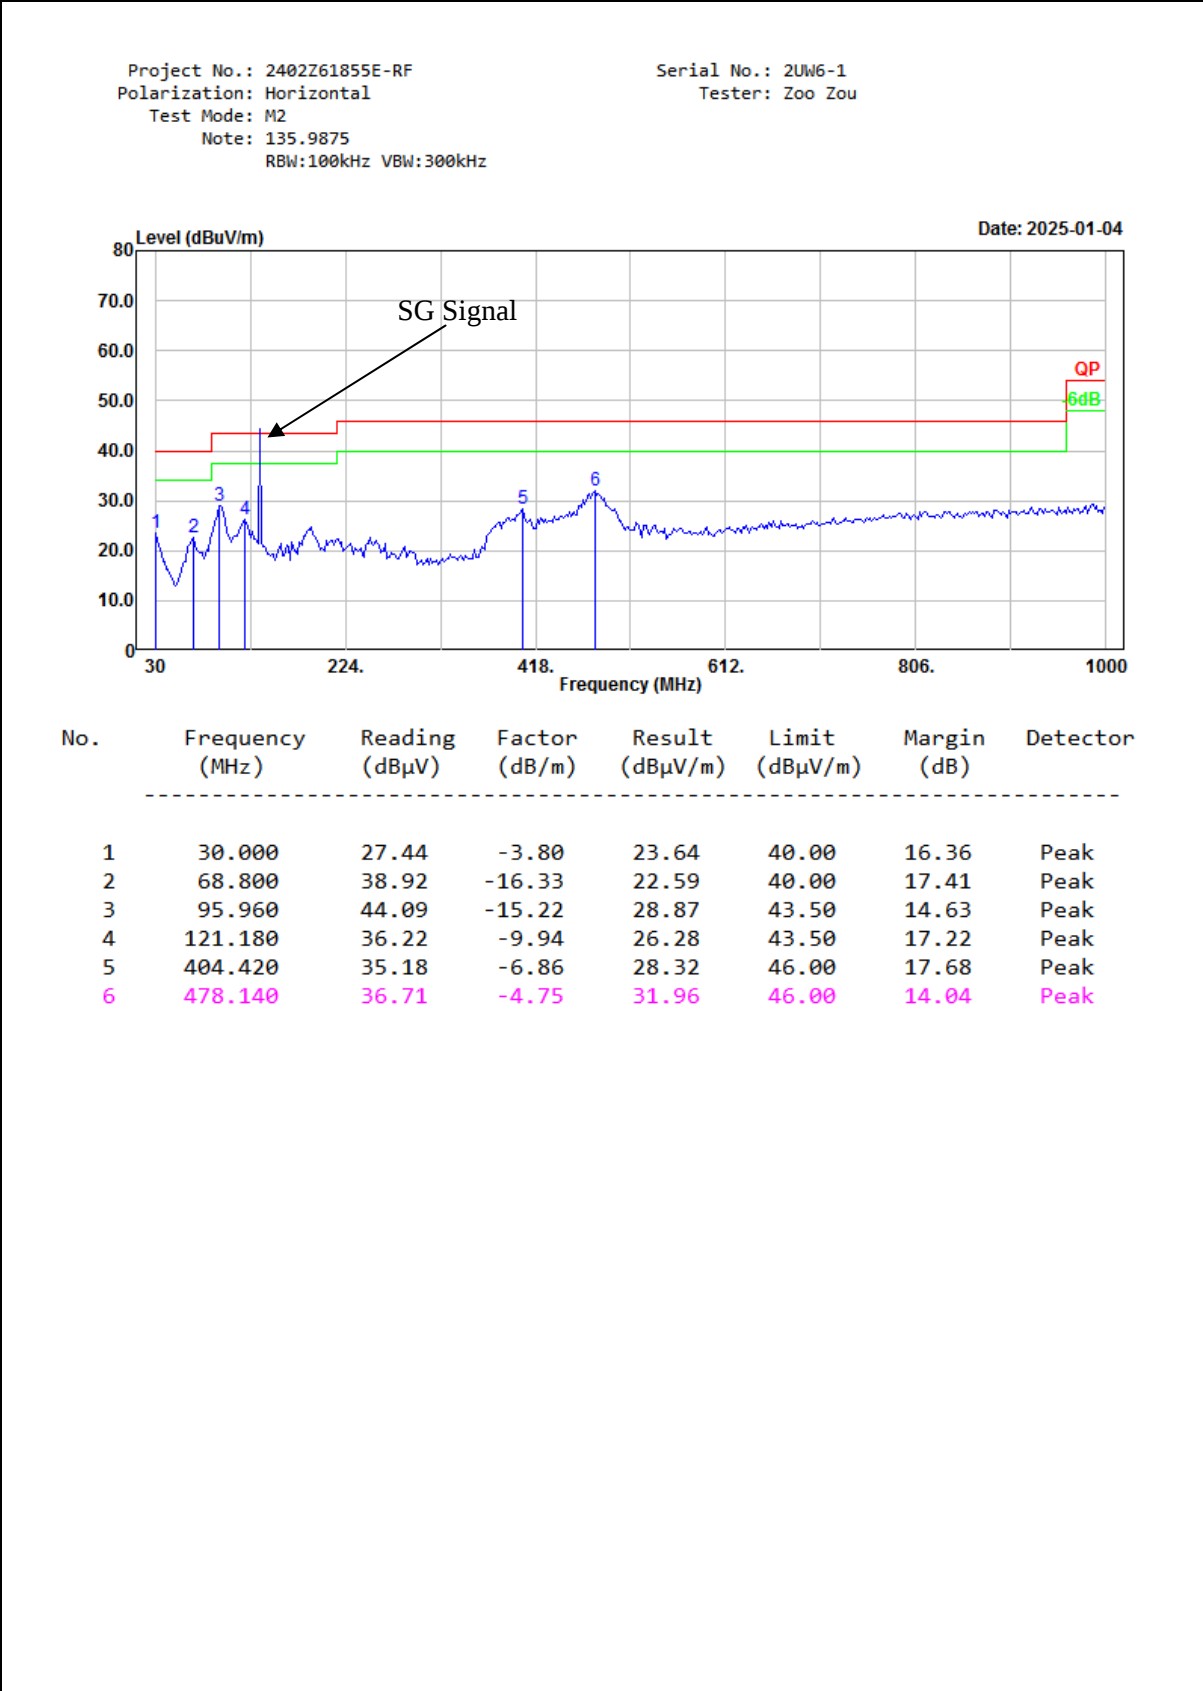


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 135.9875
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

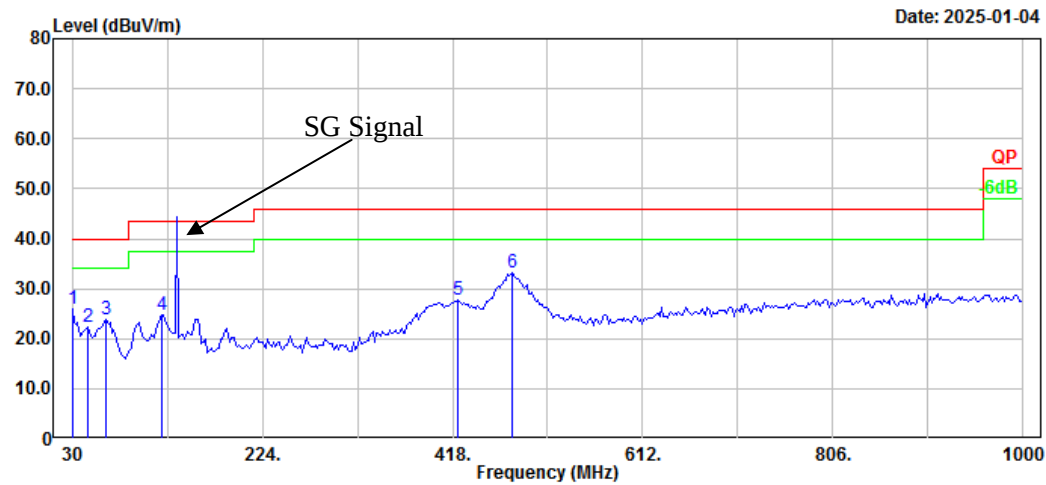


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	29.68	-3.80	25.88	40.00	14.12	Peak
2	45.520	36.28	-13.94	22.34	40.00	17.66	Peak
3	64.920	40.21	-16.50	23.71	40.00	16.29	Peak
4	121.180	34.83	-9.94	24.89	43.50	18.61	Peak
5	423.820	34.05	-6.36	27.69	46.00	18.31	Peak
6	478.140	37.86	-4.75	33.11	46.00	12.89	Peak

136.0125MHz:

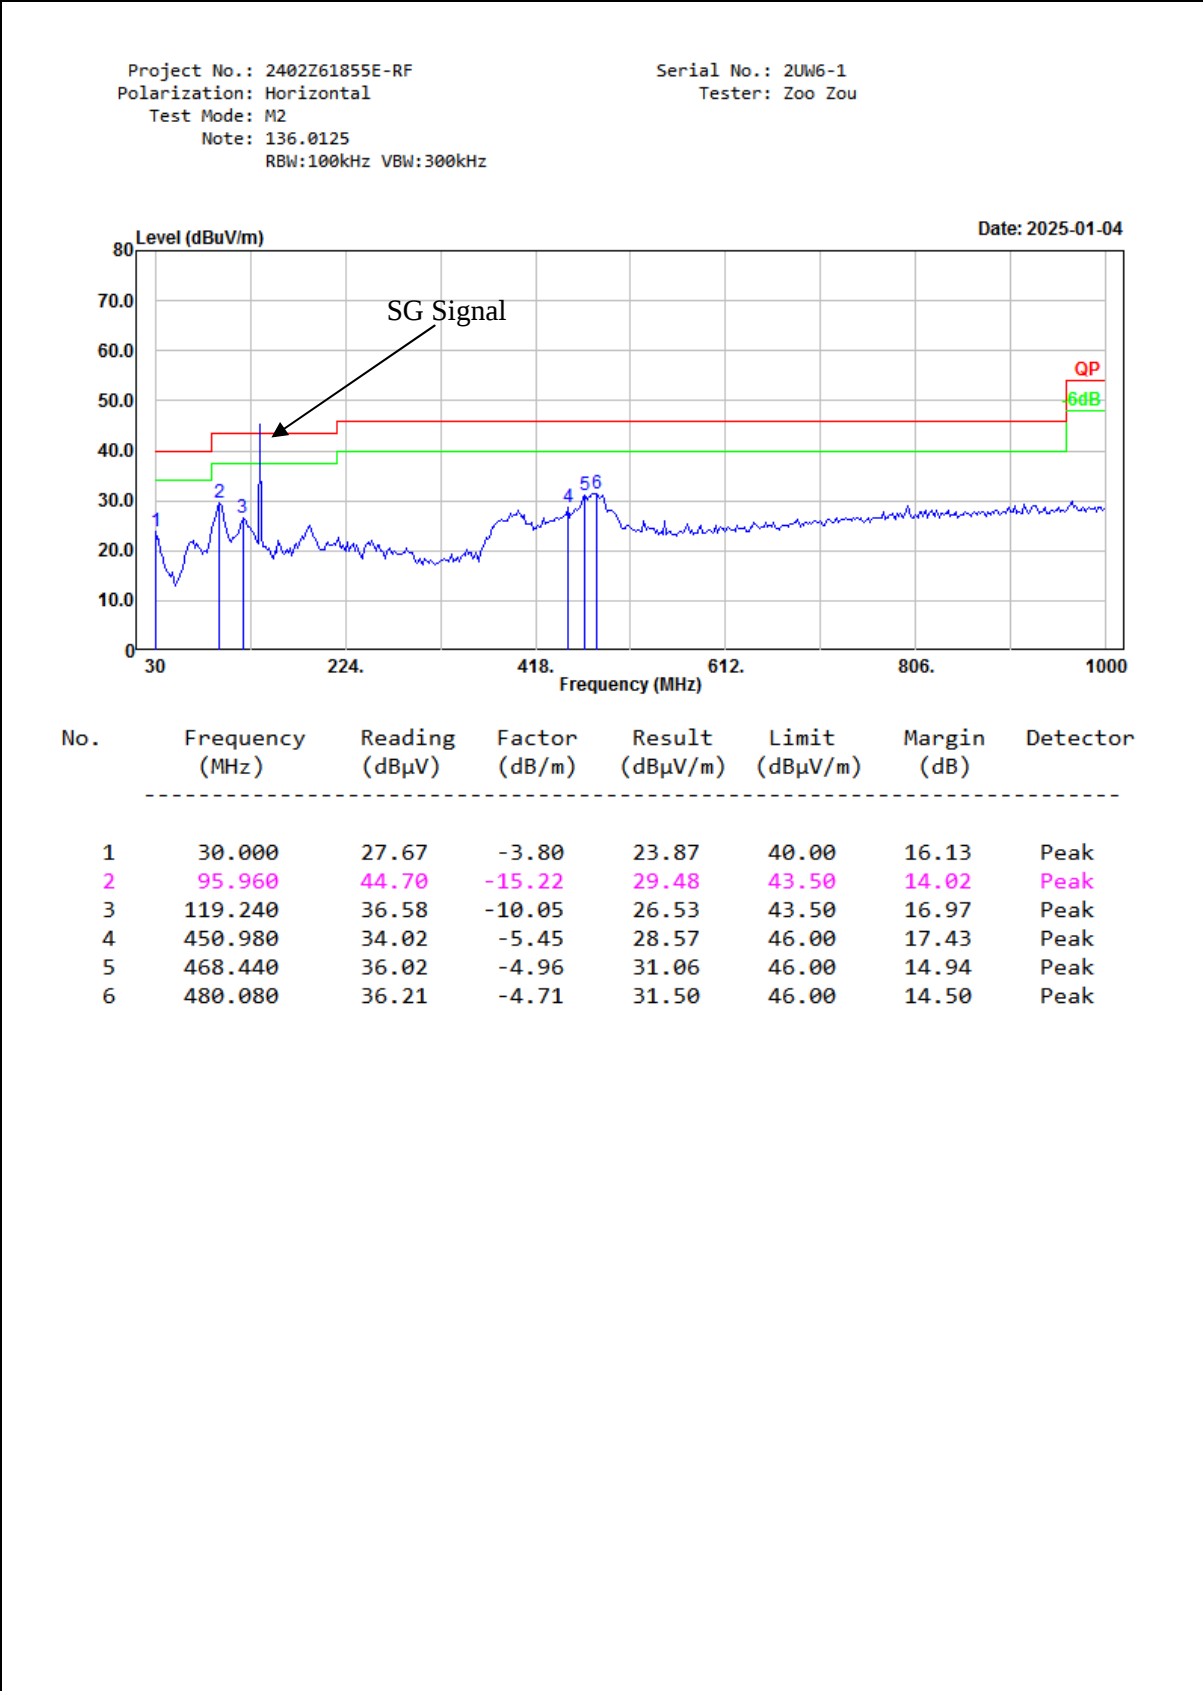


Project No.: 2402Z61855E-RF
 Polarization: Vertical
 Test Mode: M2
 Note: 136.0125
 RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
 Tester: Zoo Zou

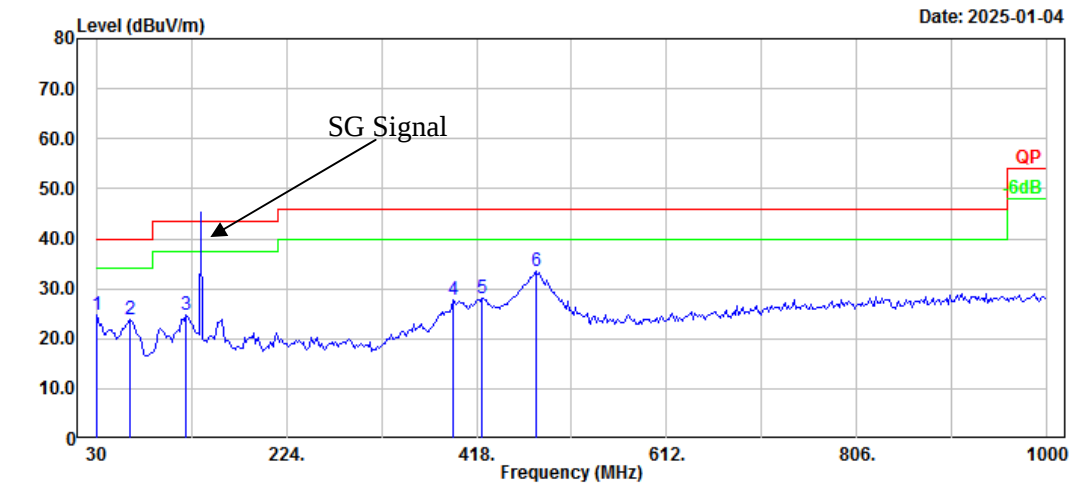

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.56	-3.80	24.76	40.00	15.24	Peak
2	64.920	40.46	-16.50	23.96	40.00	16.04	Peak
3	121.180	34.74	-9.94	24.80	43.50	18.70	Peak
4	394.720	34.92	-7.11	27.81	46.00	18.19	Peak
5	423.820	34.34	-6.36	27.98	46.00	18.02	Peak
6	478.140	38.39	-4.75	33.64	46.00	12.36	Peak


155MHz:

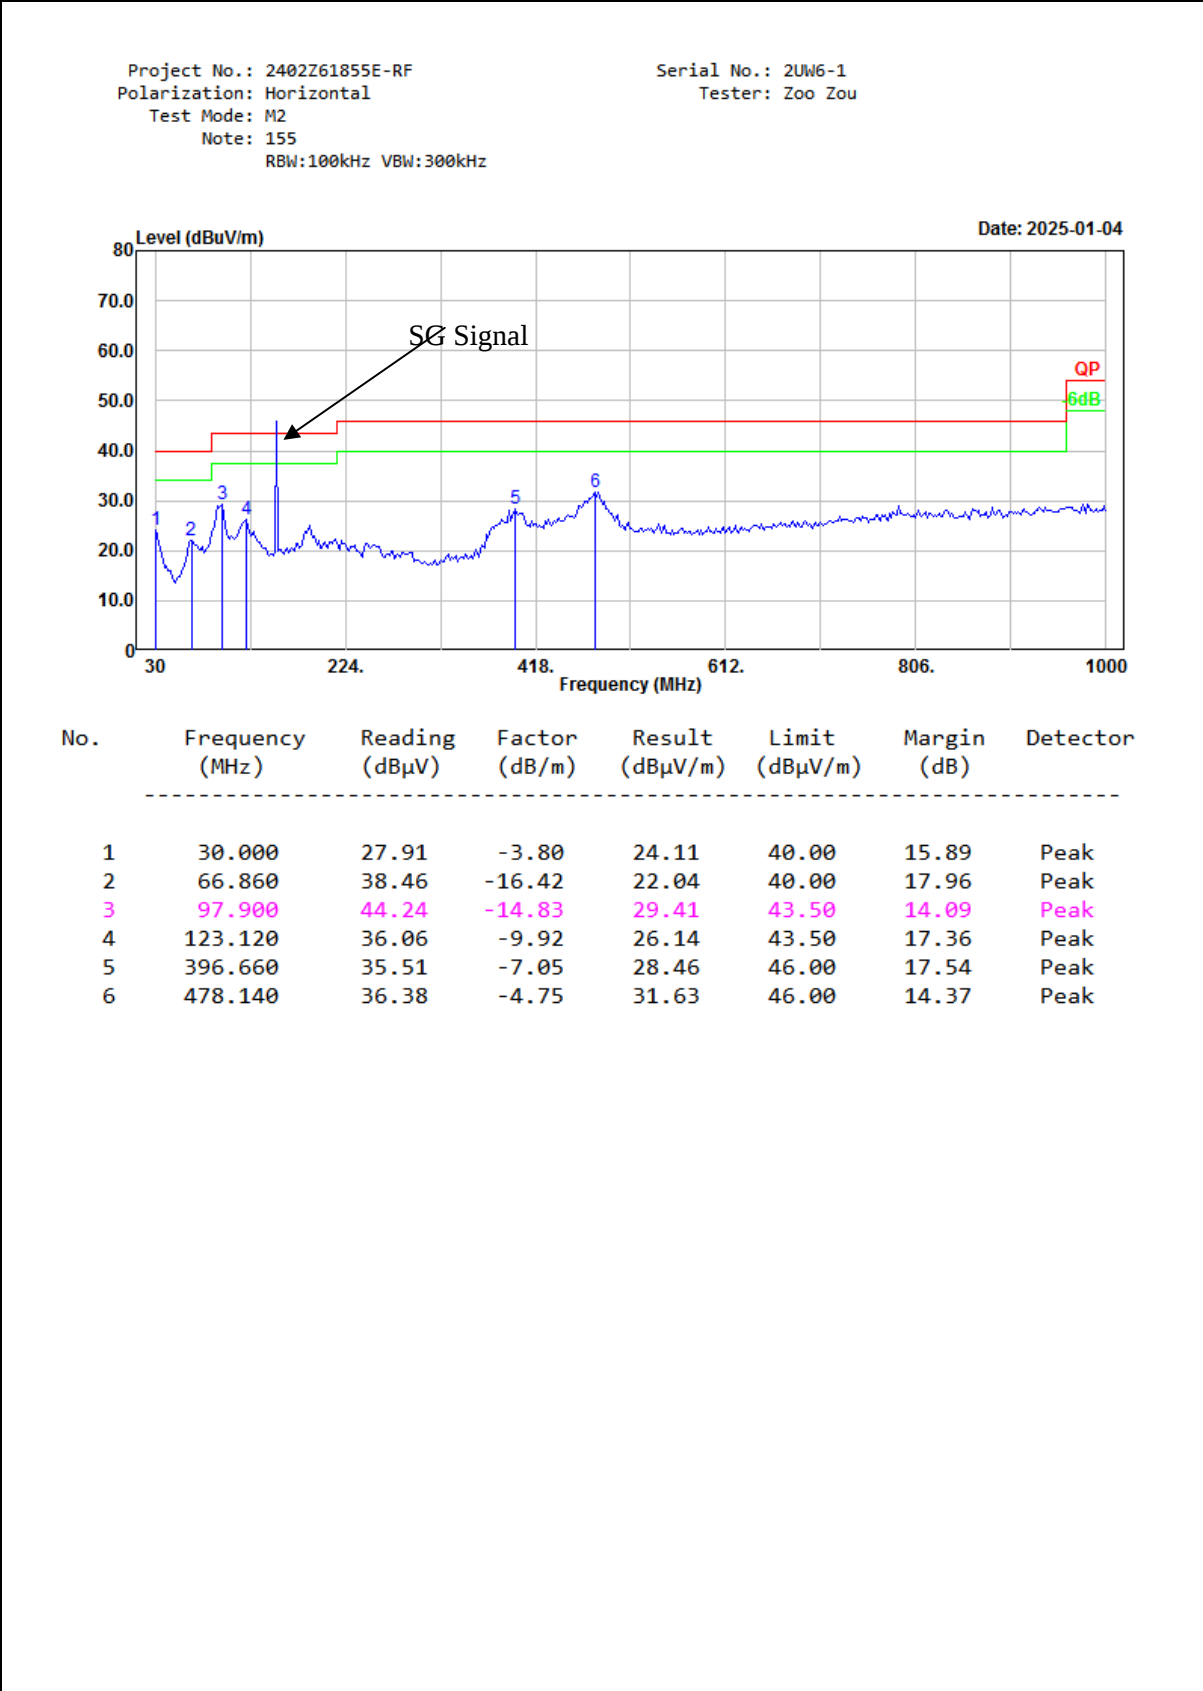

Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 155
RBW:100kHz VBW:300kHz


Serial No.: 2UW6-1
Tester: Zoo Zou

Date: 2025-01-04

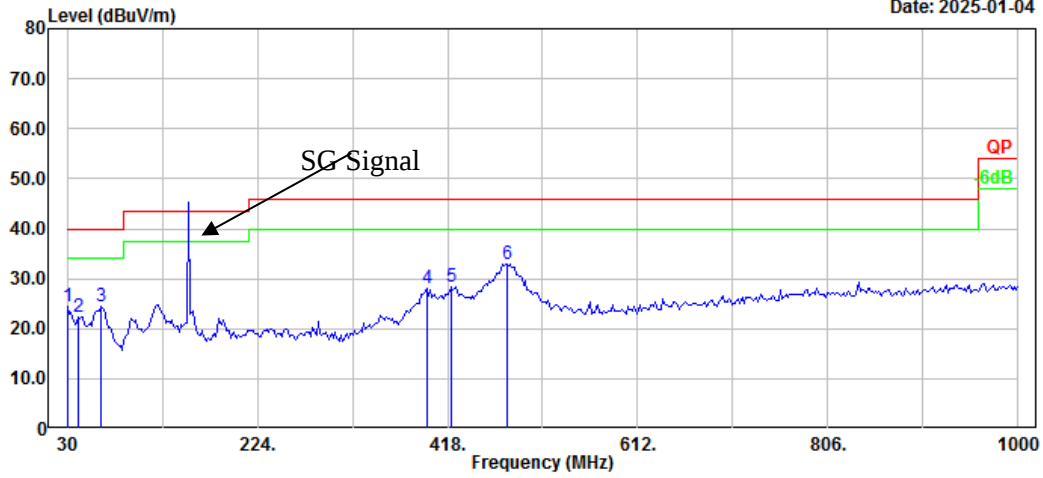


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.22	-3.80	24.42	40.00	15.58	Peak
2	41.640	34.16	-11.82	22.34	40.00	17.66	Peak
3	64.920	40.86	-16.50	24.36	40.00	15.64	Peak
4	396.660	35.21	-7.05	28.16	46.00	17.84	Peak
5	421.880	34.74	-6.43	28.31	46.00	17.69	Peak
6	478.140	37.76	-4.75	33.01	46.00	12.99	Peak

173.9875MHz:

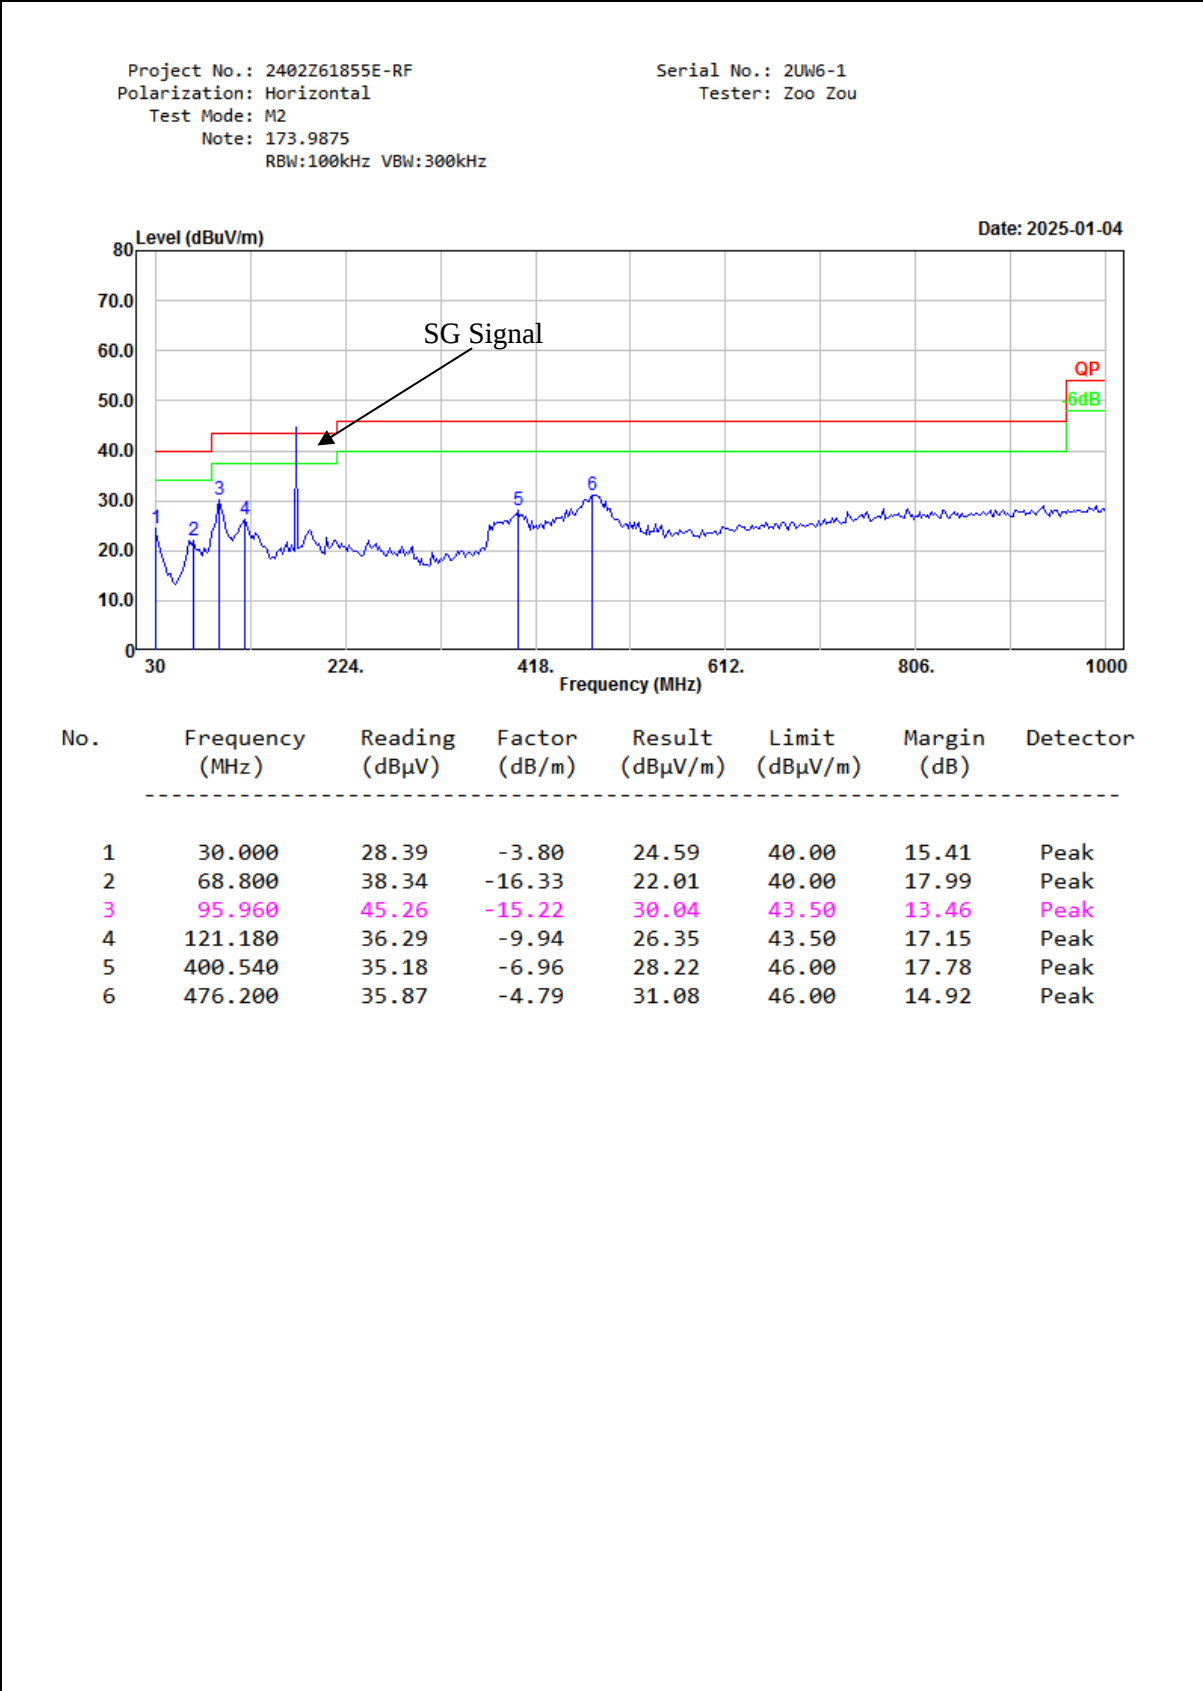

Project No.: 2402Z61855E-RF
 Polarization: Vertical
 Test Mode: M2
 Note: 173.9875
 RBW:100kHz VBW:300kHz


Serial No.: 2UW6-1
 Tester: Zoo Zou

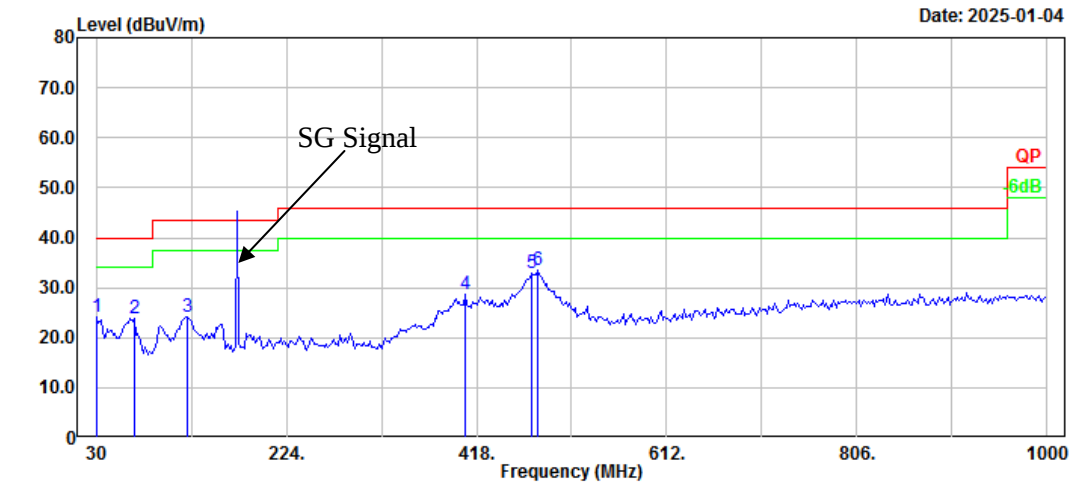

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector


1	30.000	28.08	-3.80	24.28	40.00	15.72	Peak
2	68.800	40.31	-16.33	23.98	40.00	16.02	Peak
3	123.120	34.19	-9.92	24.27	43.50	19.23	Peak
4	406.360	35.50	-6.81	28.69	46.00	17.31	Peak
5	474.260	37.80	-4.84	32.96	46.00	13.04	Peak
6	480.080	38.16	-4.71	33.45	46.00	12.55	Peak

220.0125MHz:

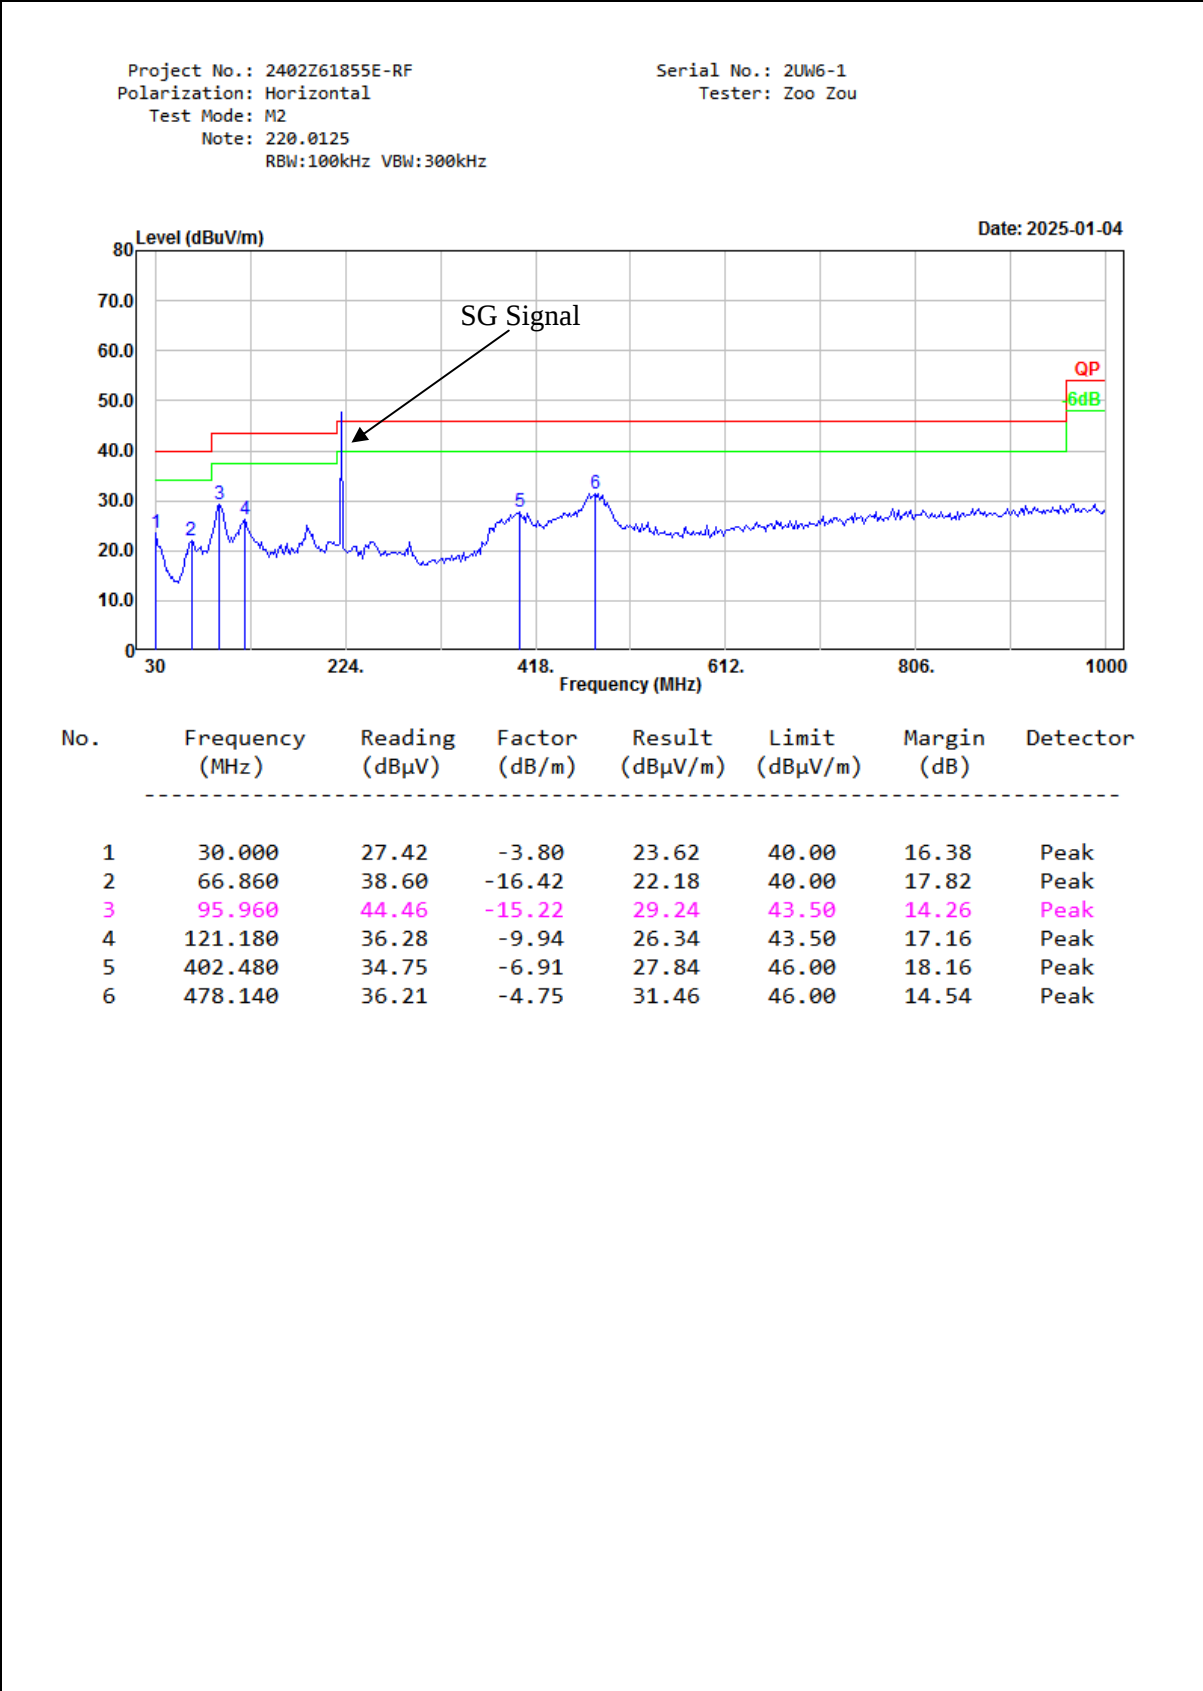


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 220.0125
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

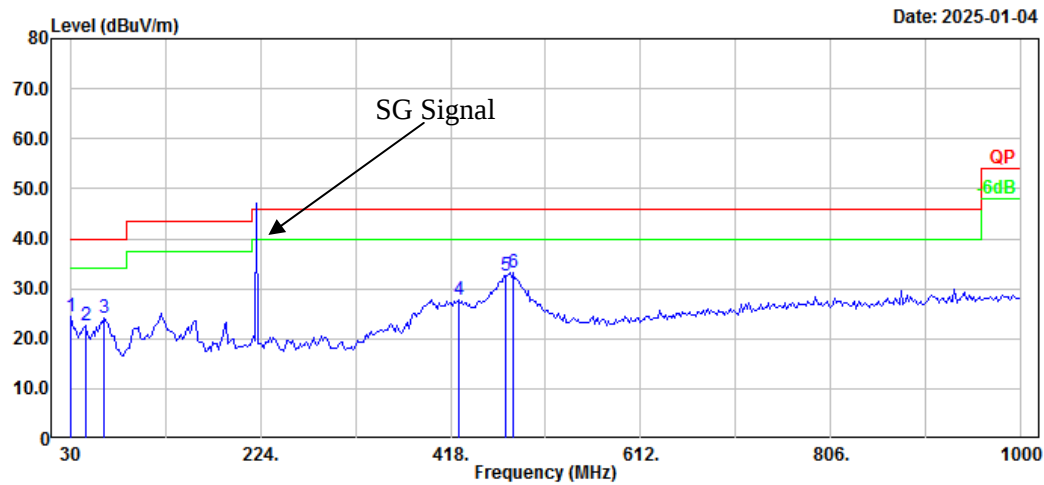


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.24	-3.80	24.44	40.00	15.56	Peak
2	45.520	36.46	-13.94	22.52	40.00	17.48	Peak
3	64.920	40.59	-16.50	24.09	40.00	15.91	Peak
4	425.760	34.20	-6.30	27.90	46.00	18.10	Peak
5	474.260	37.58	-4.84	32.74	46.00	13.26	Peak
6	482.020	37.90	-4.66	33.24	46.00	12.76	Peak

240MHz:

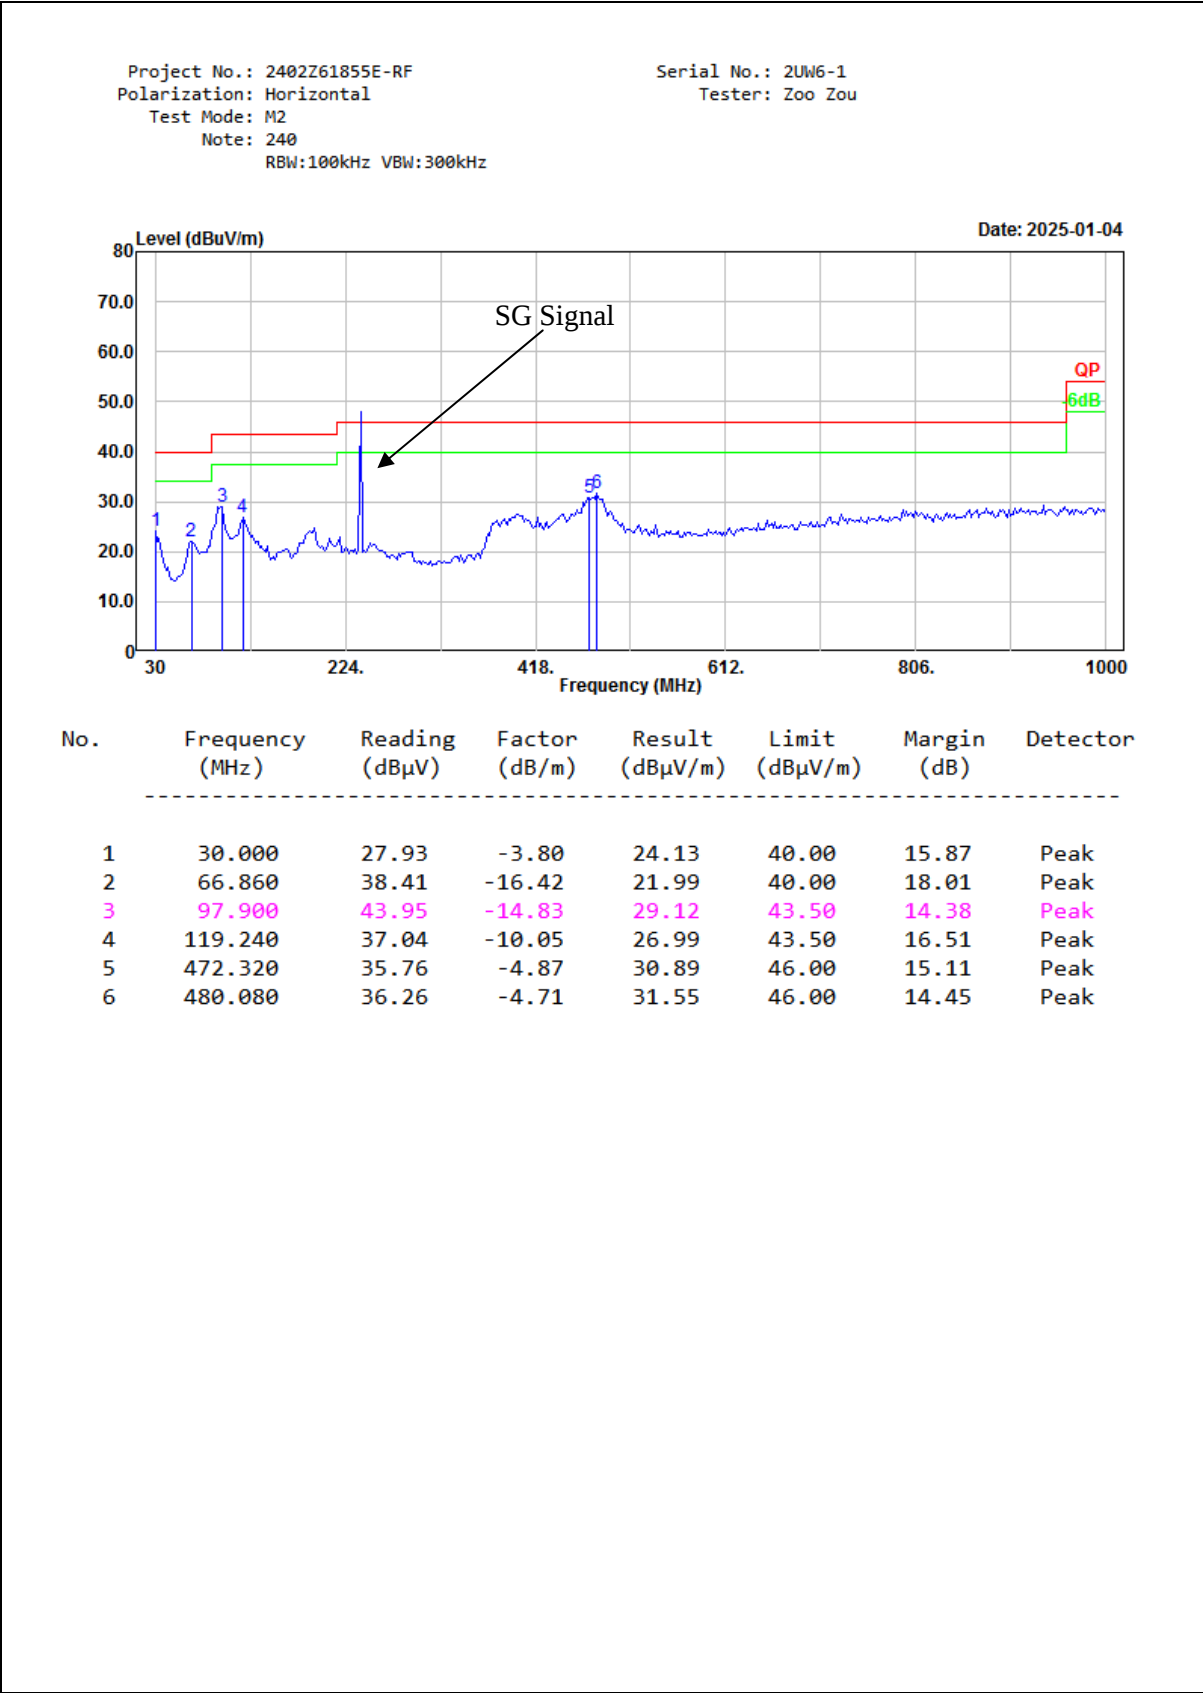


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 240
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

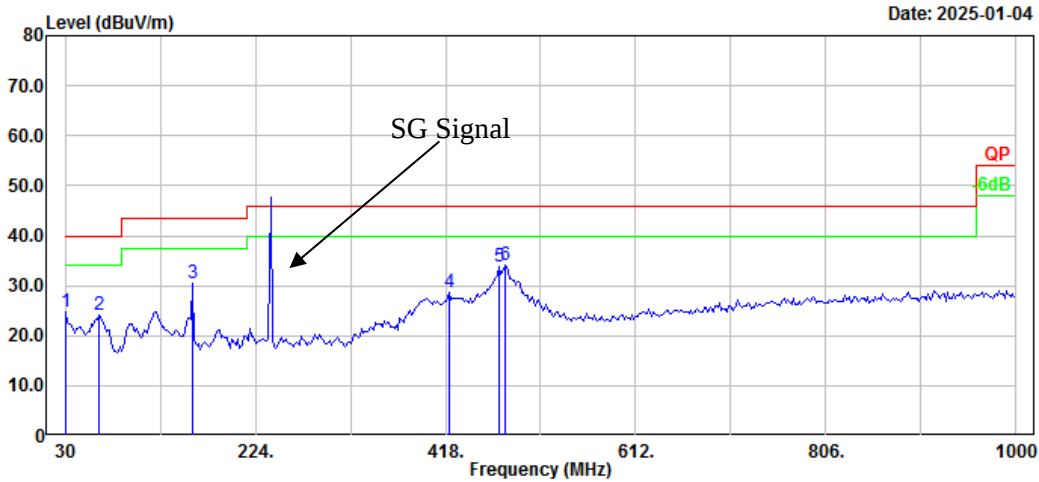


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.59	-3.80	24.79	40.00	15.21	Peak
2	64.920	40.74	-16.50	24.24	40.00	15.76	Peak
3	159.980	41.77	-11.15	30.62	43.50	12.88	Peak
4	421.880	35.25	-6.43	28.82	46.00	17.18	Peak
5	472.320	38.60	-4.87	33.73	46.00	12.27	Peak
6	478.140	38.72	-4.75	33.97	46.00	12.03	Peak

259.9875MHz:

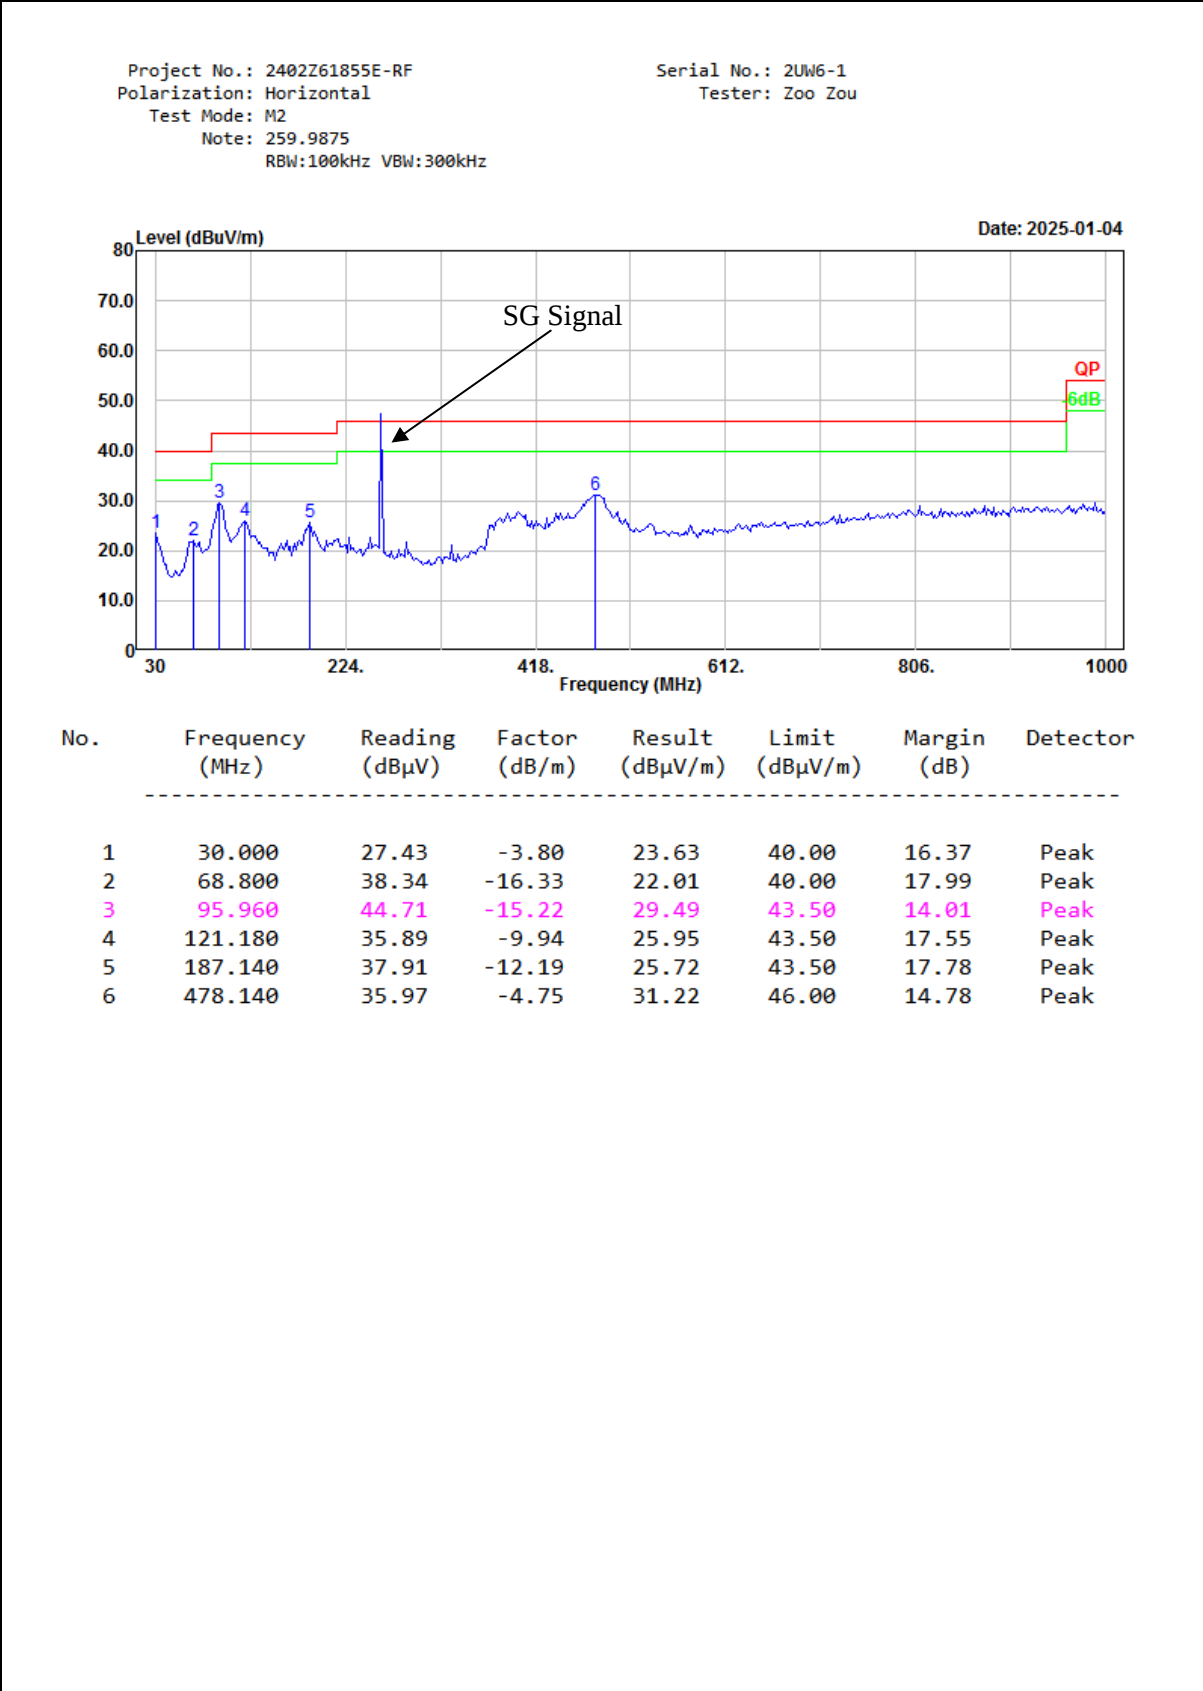


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 259.9875
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

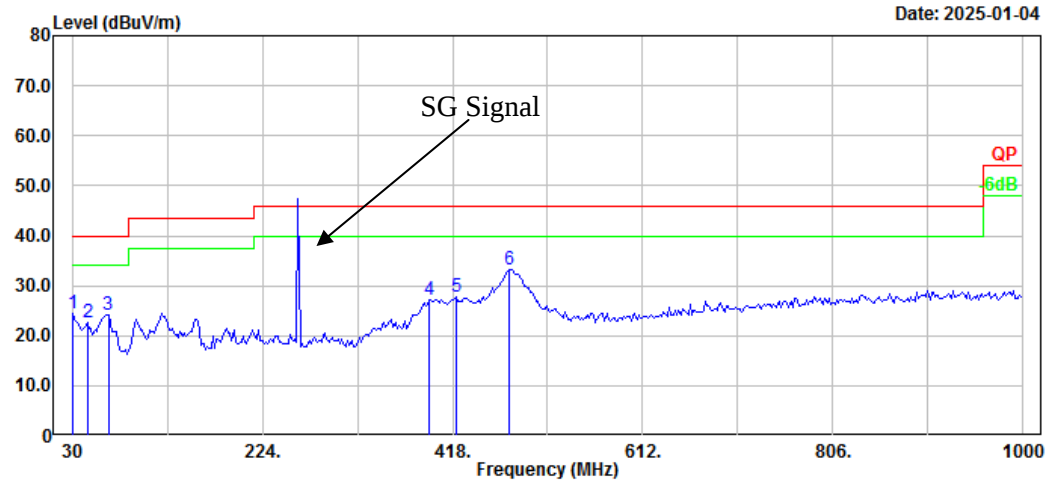


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.24	-3.80	24.44	40.00	15.56	Peak
2	45.520	36.52	-13.94	22.58	40.00	17.42	Peak
3	66.860	40.45	-16.42	24.03	40.00	15.97	Peak
4	394.720	34.31	-7.11	27.20	46.00	18.80	Peak
5	421.880	34.17	-6.43	27.74	46.00	18.26	Peak
6	476.200	38.02	-4.79	33.23	46.00	12.77	Peak

350.0125MHz:

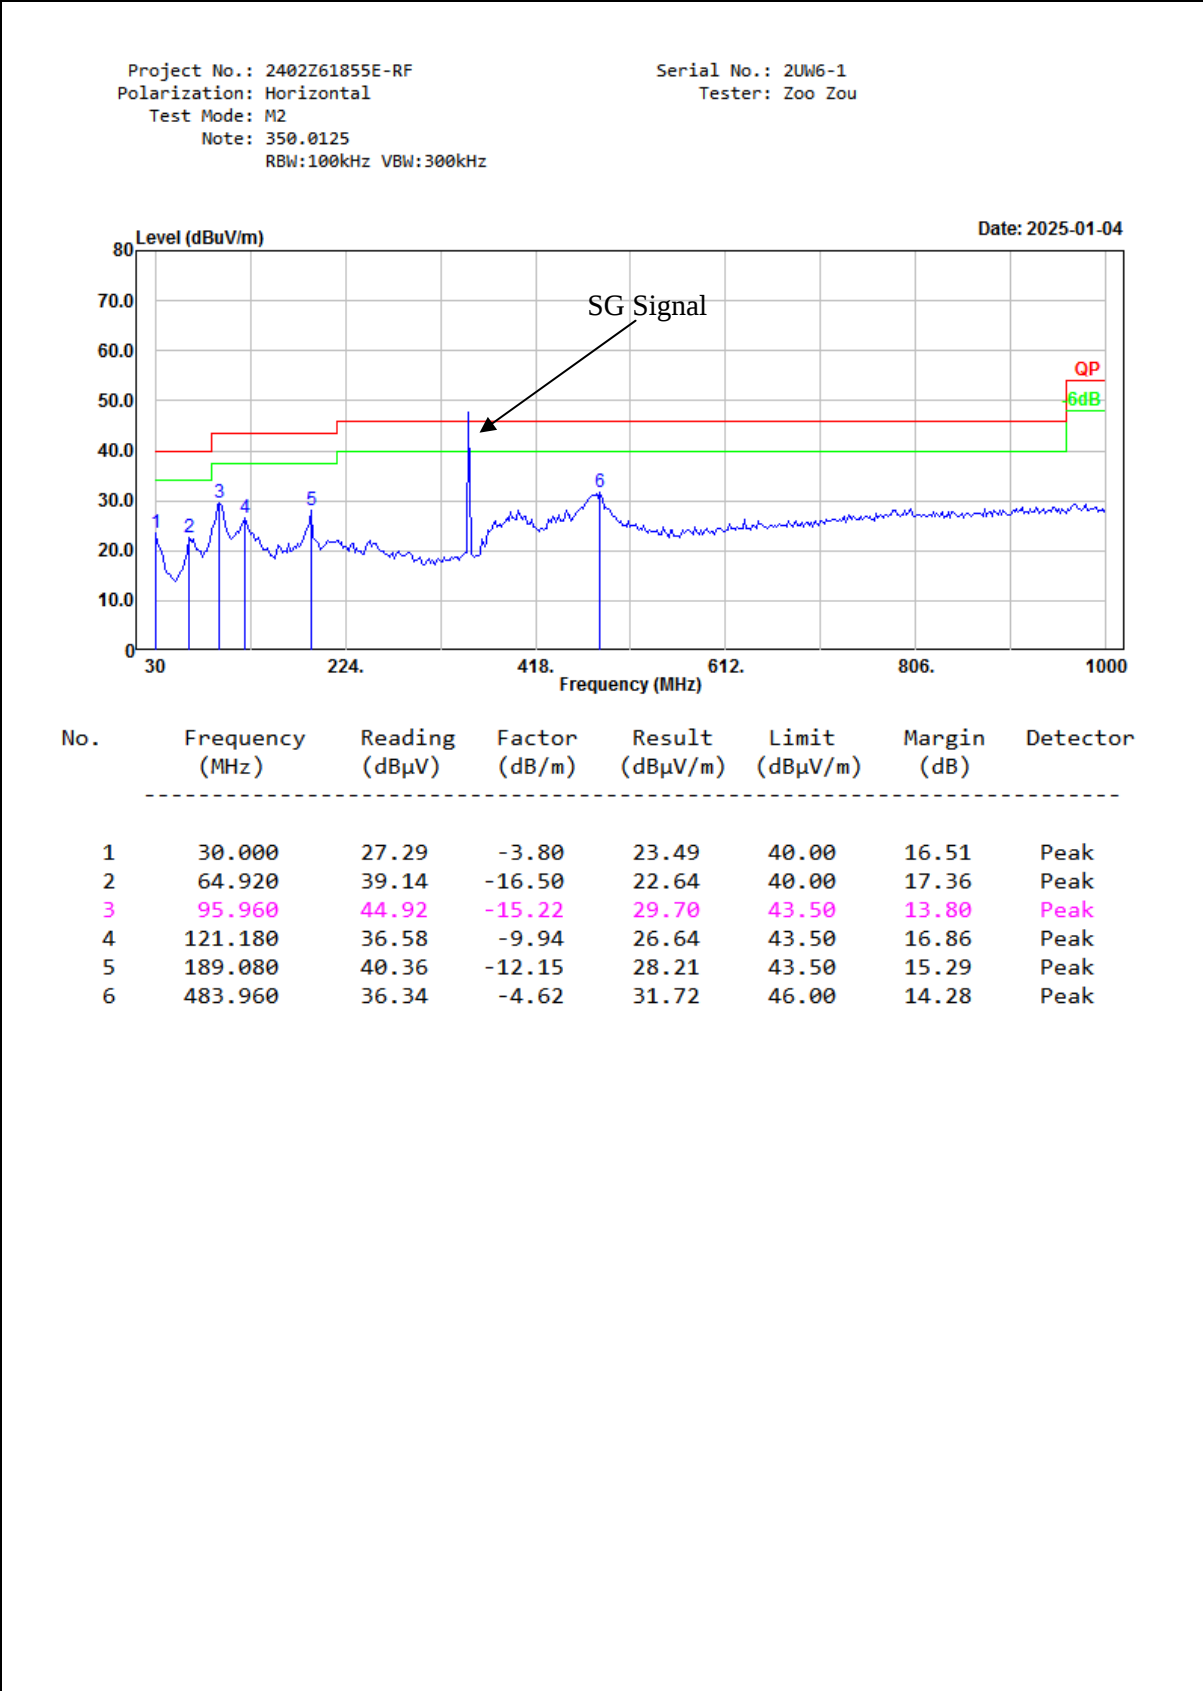


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 350.0125
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

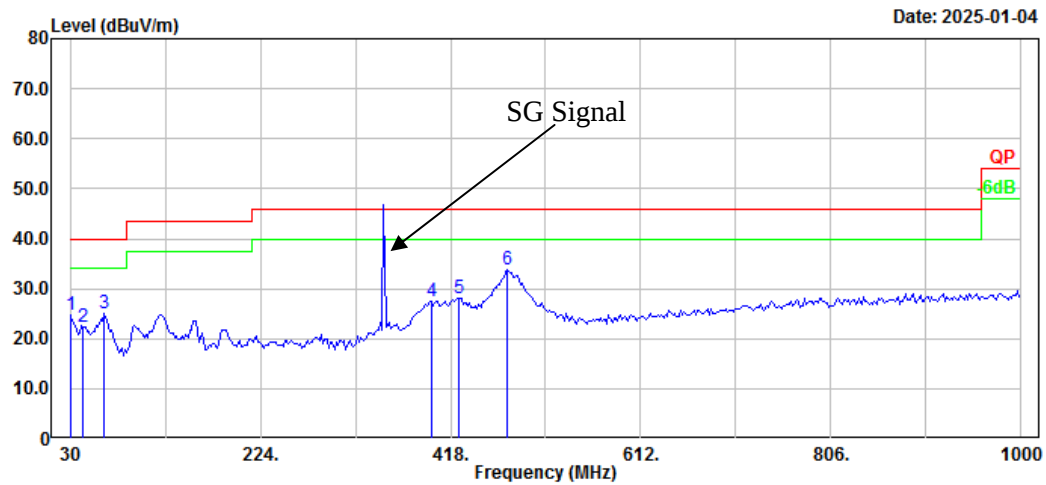


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.55	-3.80	24.75	40.00	15.25	Peak
2	43.580	35.15	-12.88	22.27	40.00	17.73	Peak
3	64.920	41.63	-16.50	25.13	40.00	14.87	Peak
4	398.600	34.53	-7.01	27.52	46.00	18.48	Peak
5	425.760	34.34	-6.30	28.04	46.00	17.96	Peak
6	476.200	38.49	-4.79	33.70	46.00	12.30	Peak

370MHz:

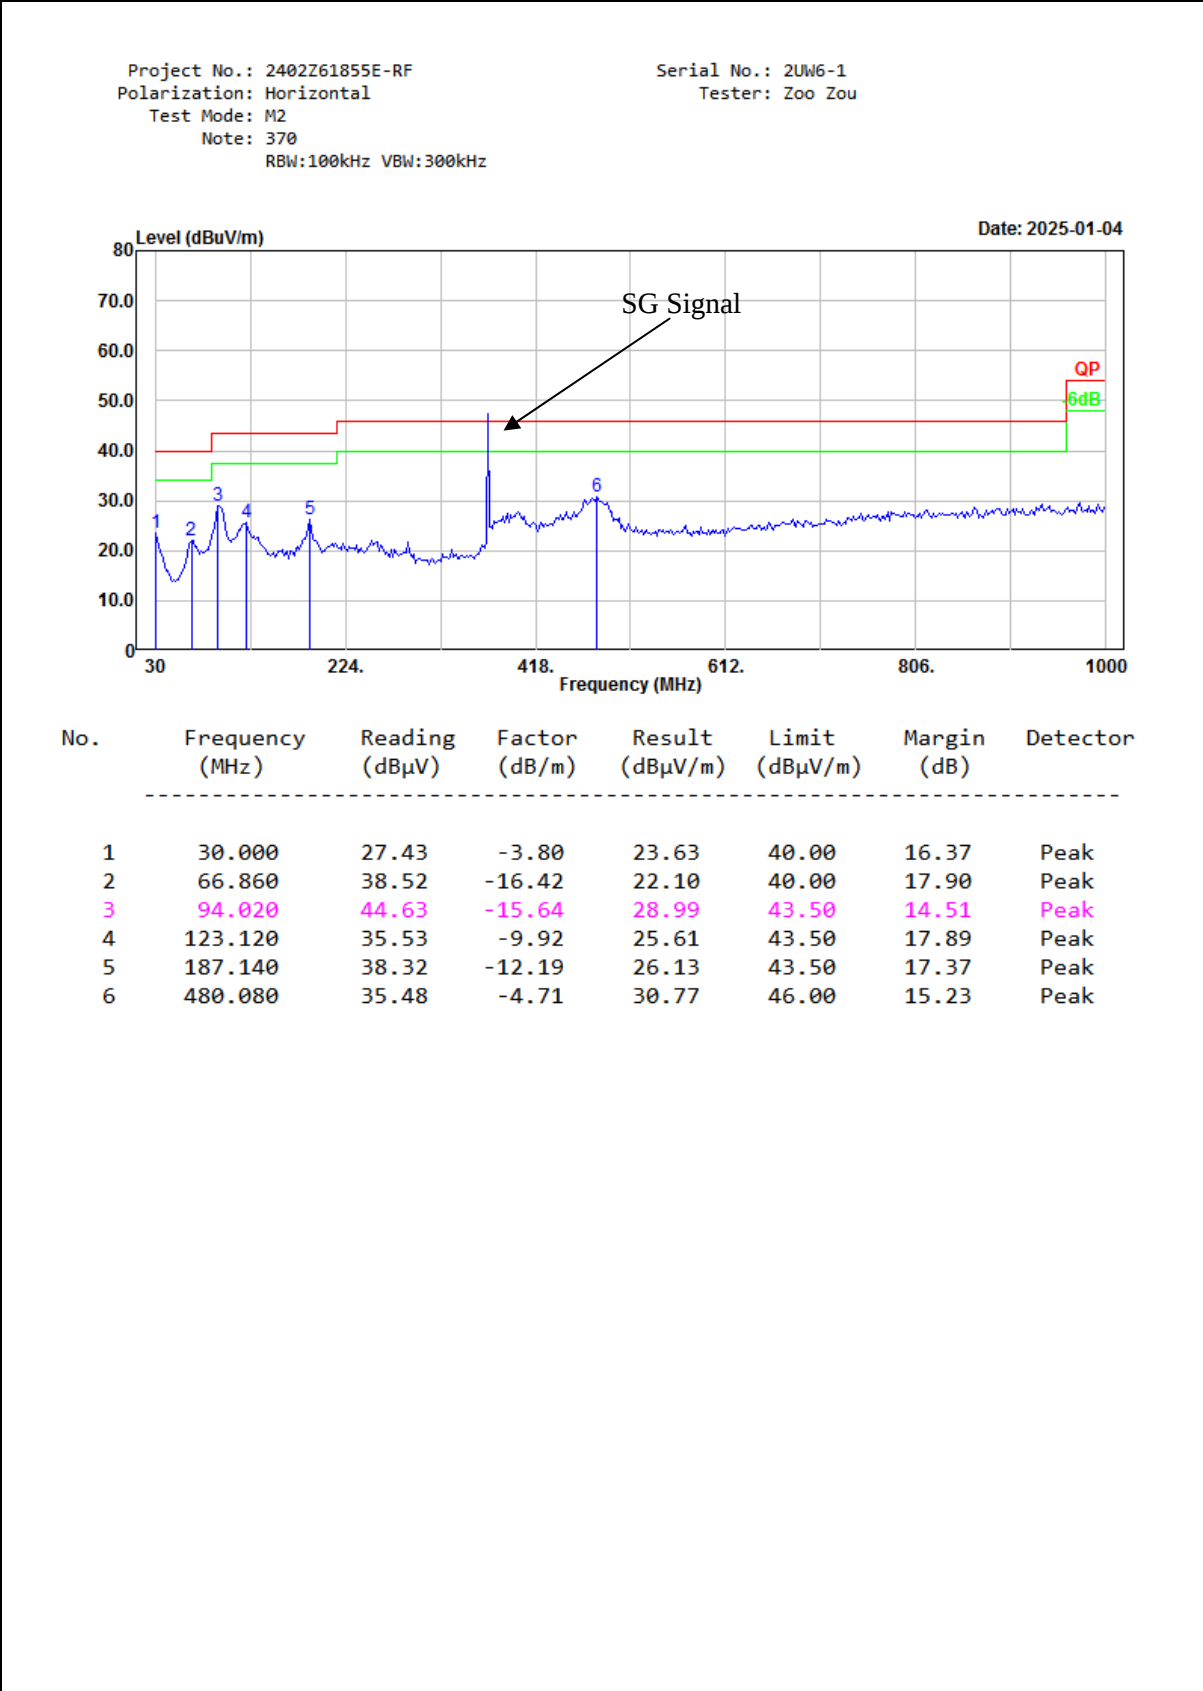


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 370
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

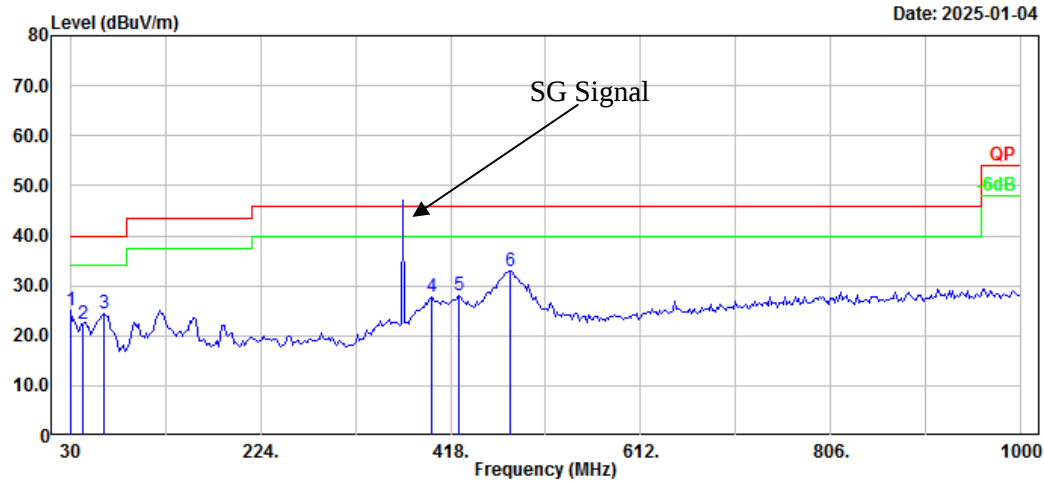


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.74	-3.80	24.94	40.00	15.06	Peak
2	43.580	35.24	-12.88	22.36	40.00	17.64	Peak
3	64.920	40.85	-16.50	24.35	40.00	15.65	Peak
4	398.600	34.65	-7.01	27.64	46.00	18.36	Peak
5	425.760	34.43	-6.30	28.13	46.00	17.87	Peak
6	478.140	37.76	-4.75	33.01	46.00	12.99	Peak

389.9875MHz:

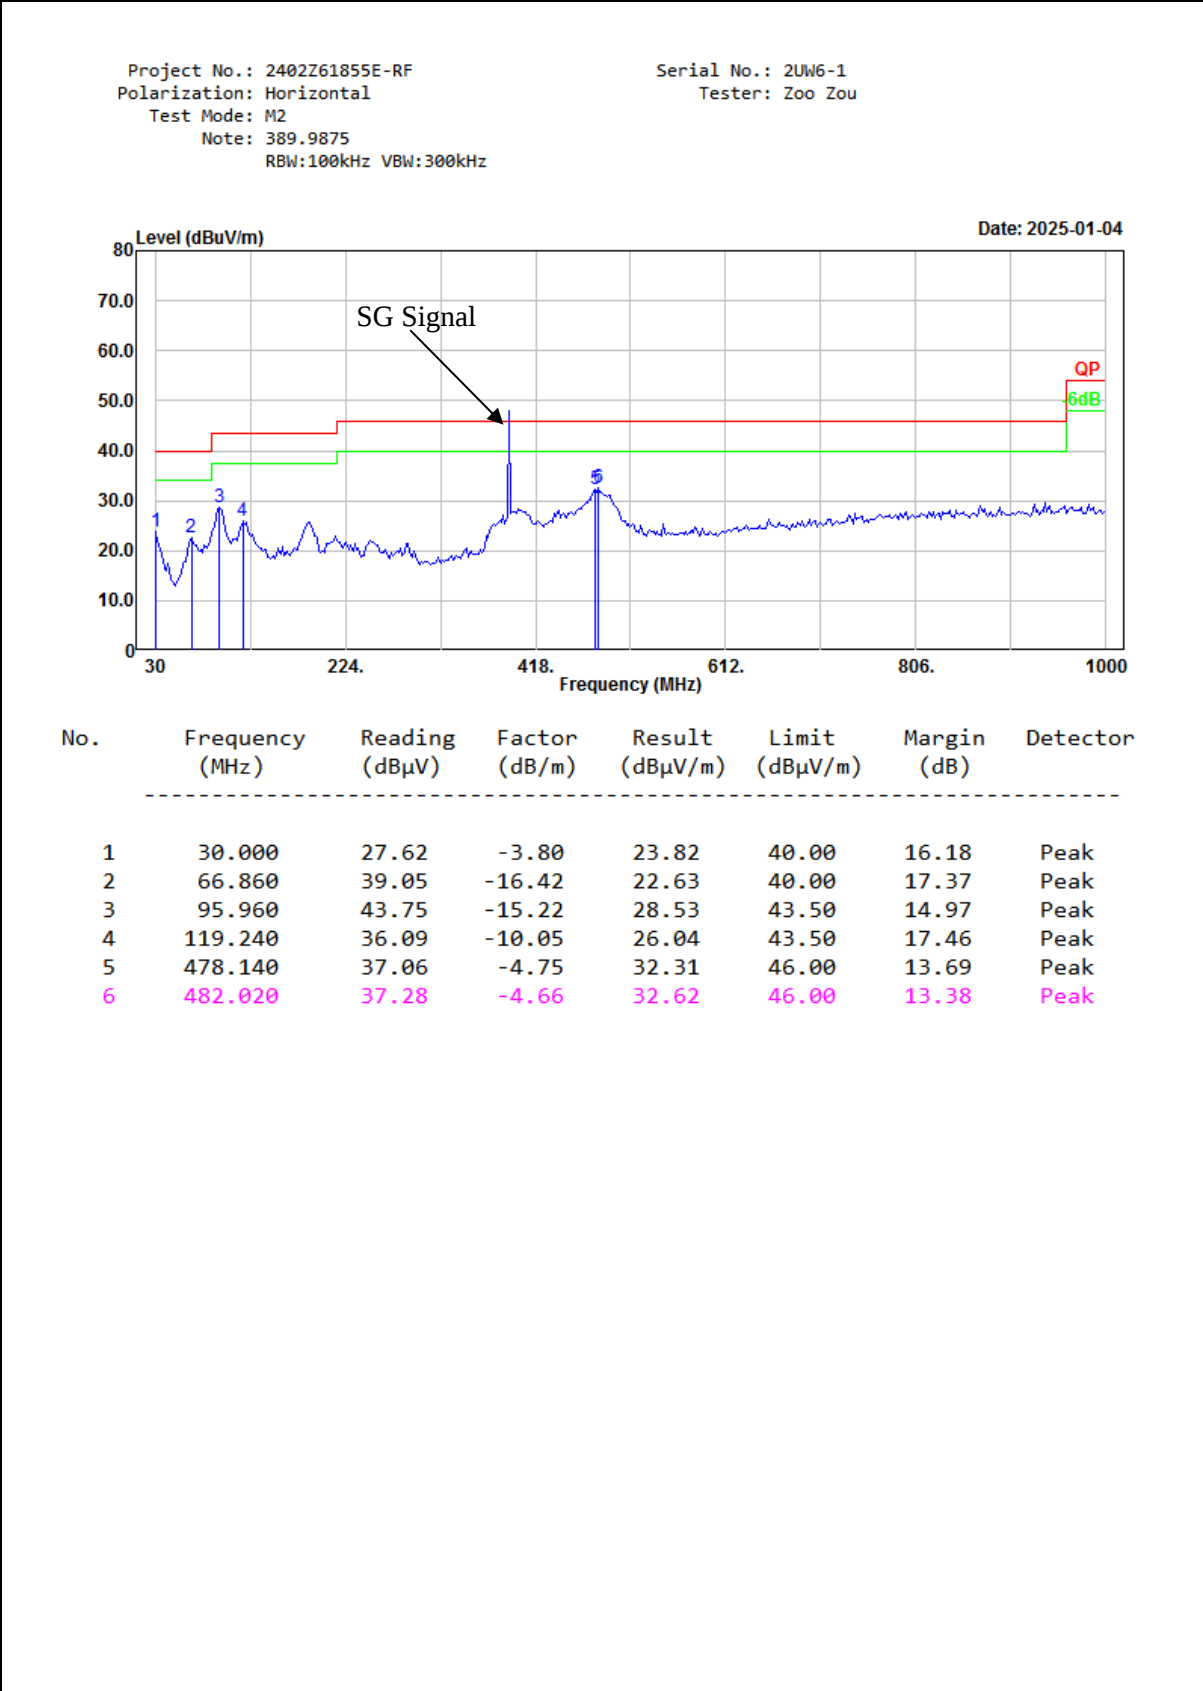


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 389.9875
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

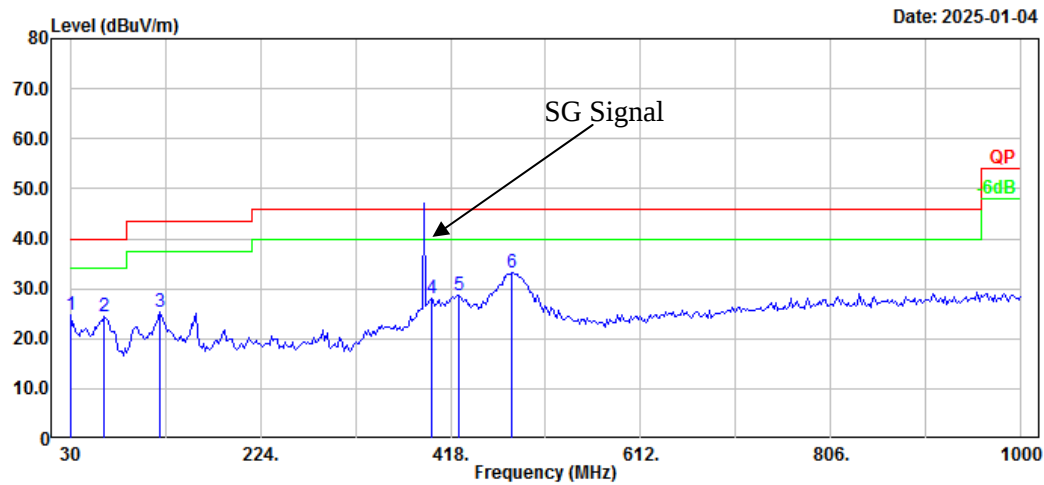


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.54	-3.80	24.74	40.00	15.26	Peak
2	64.920	40.91	-16.50	24.41	40.00	15.59	Peak
3	121.180	35.43	-9.94	25.49	43.50	18.01	Peak
4	398.600	35.14	-7.01	28.13	46.00	17.87	Peak
5	425.760	35.07	-6.30	28.77	46.00	17.23	Peak
6	480.080	38.01	-4.71	33.30	46.00	12.70	Peak

400.0125MHz:

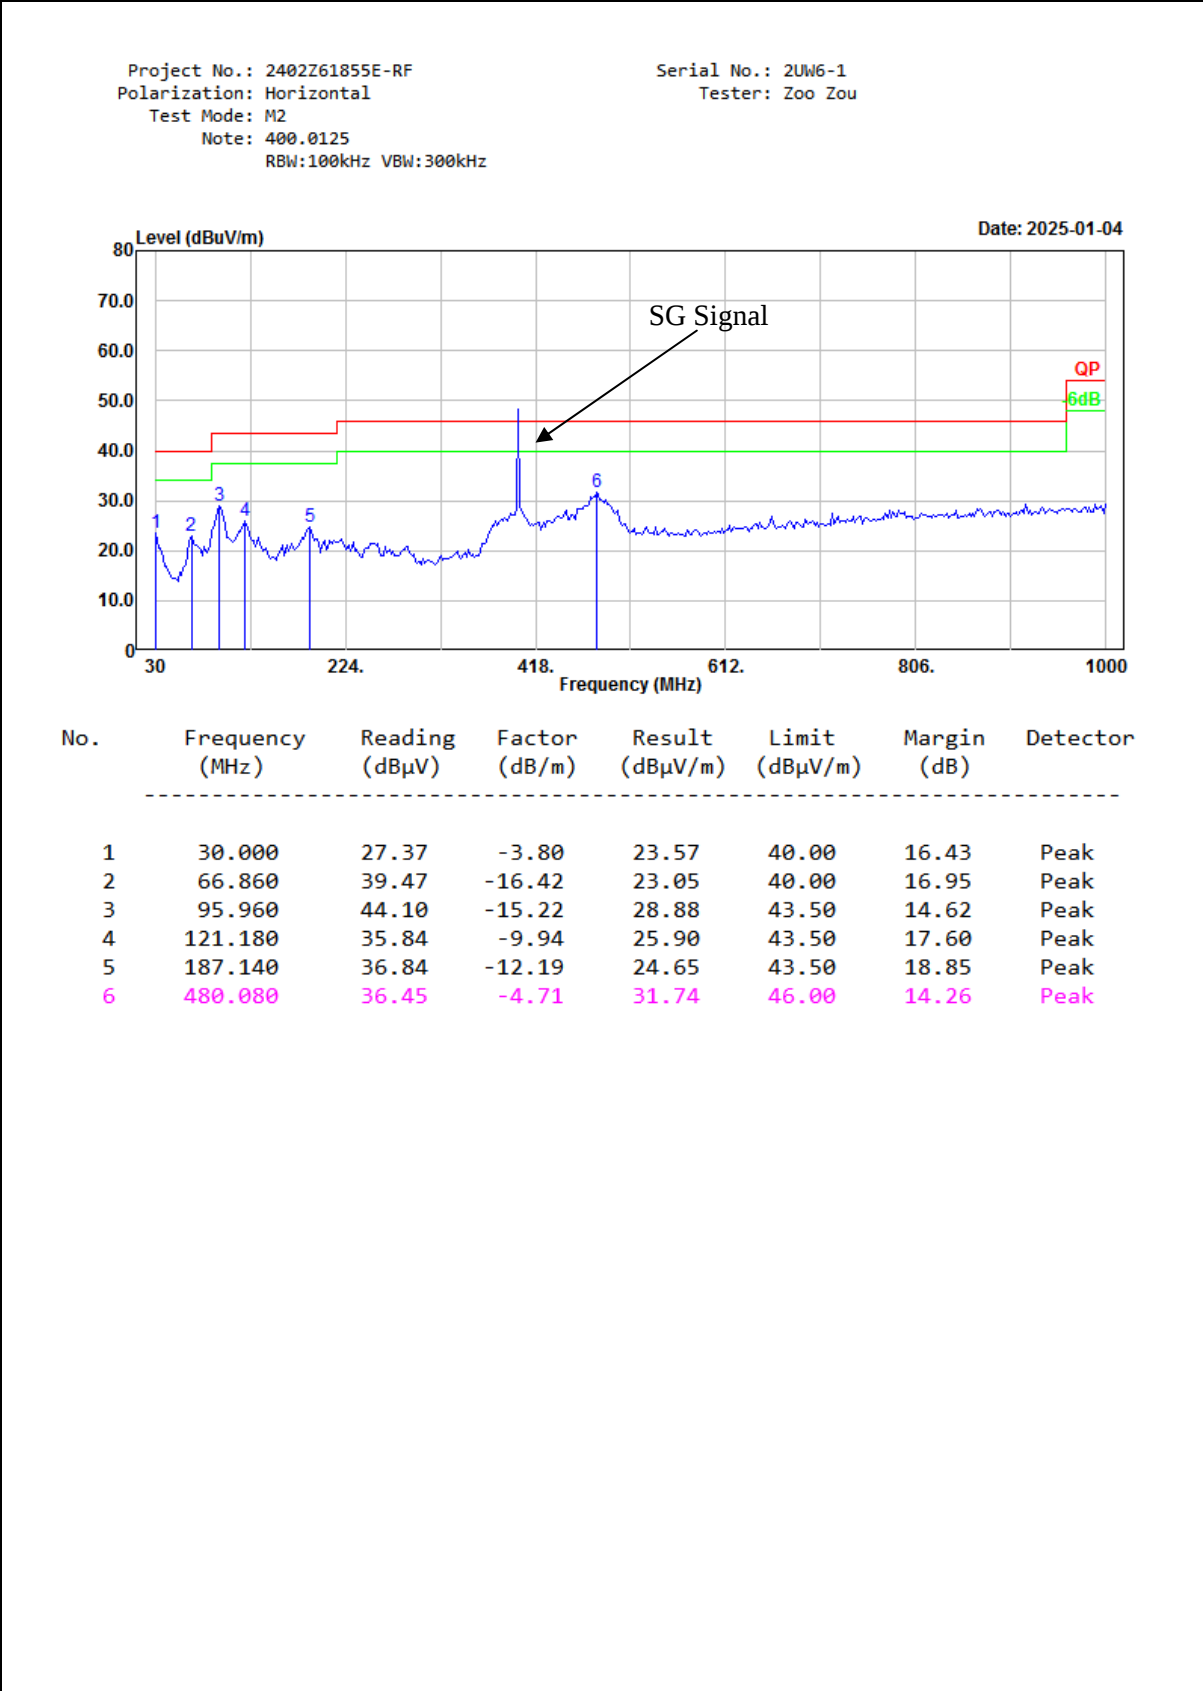


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 400.0125
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

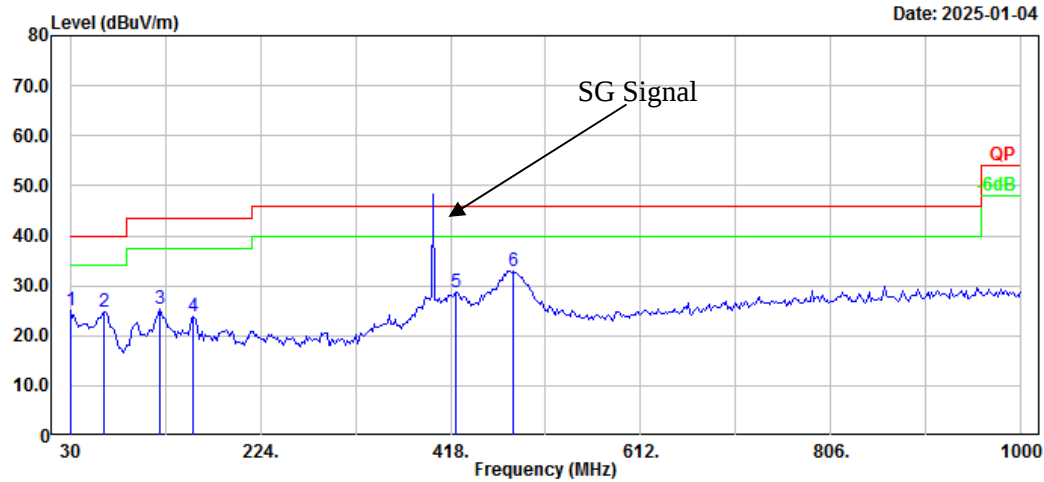


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.71	-3.80	24.91	40.00	15.09	Peak
2	64.920	41.22	-16.50	24.72	40.00	15.28	Peak
3	121.180	35.18	-9.94	25.24	43.50	18.26	Peak
4	156.100	34.84	-11.11	23.73	43.50	19.77	Peak
5	423.820	34.98	-6.36	28.62	46.00	17.38	Peak
6	482.020	37.67	-4.66	33.01	46.00	12.99	Peak

460MHz:

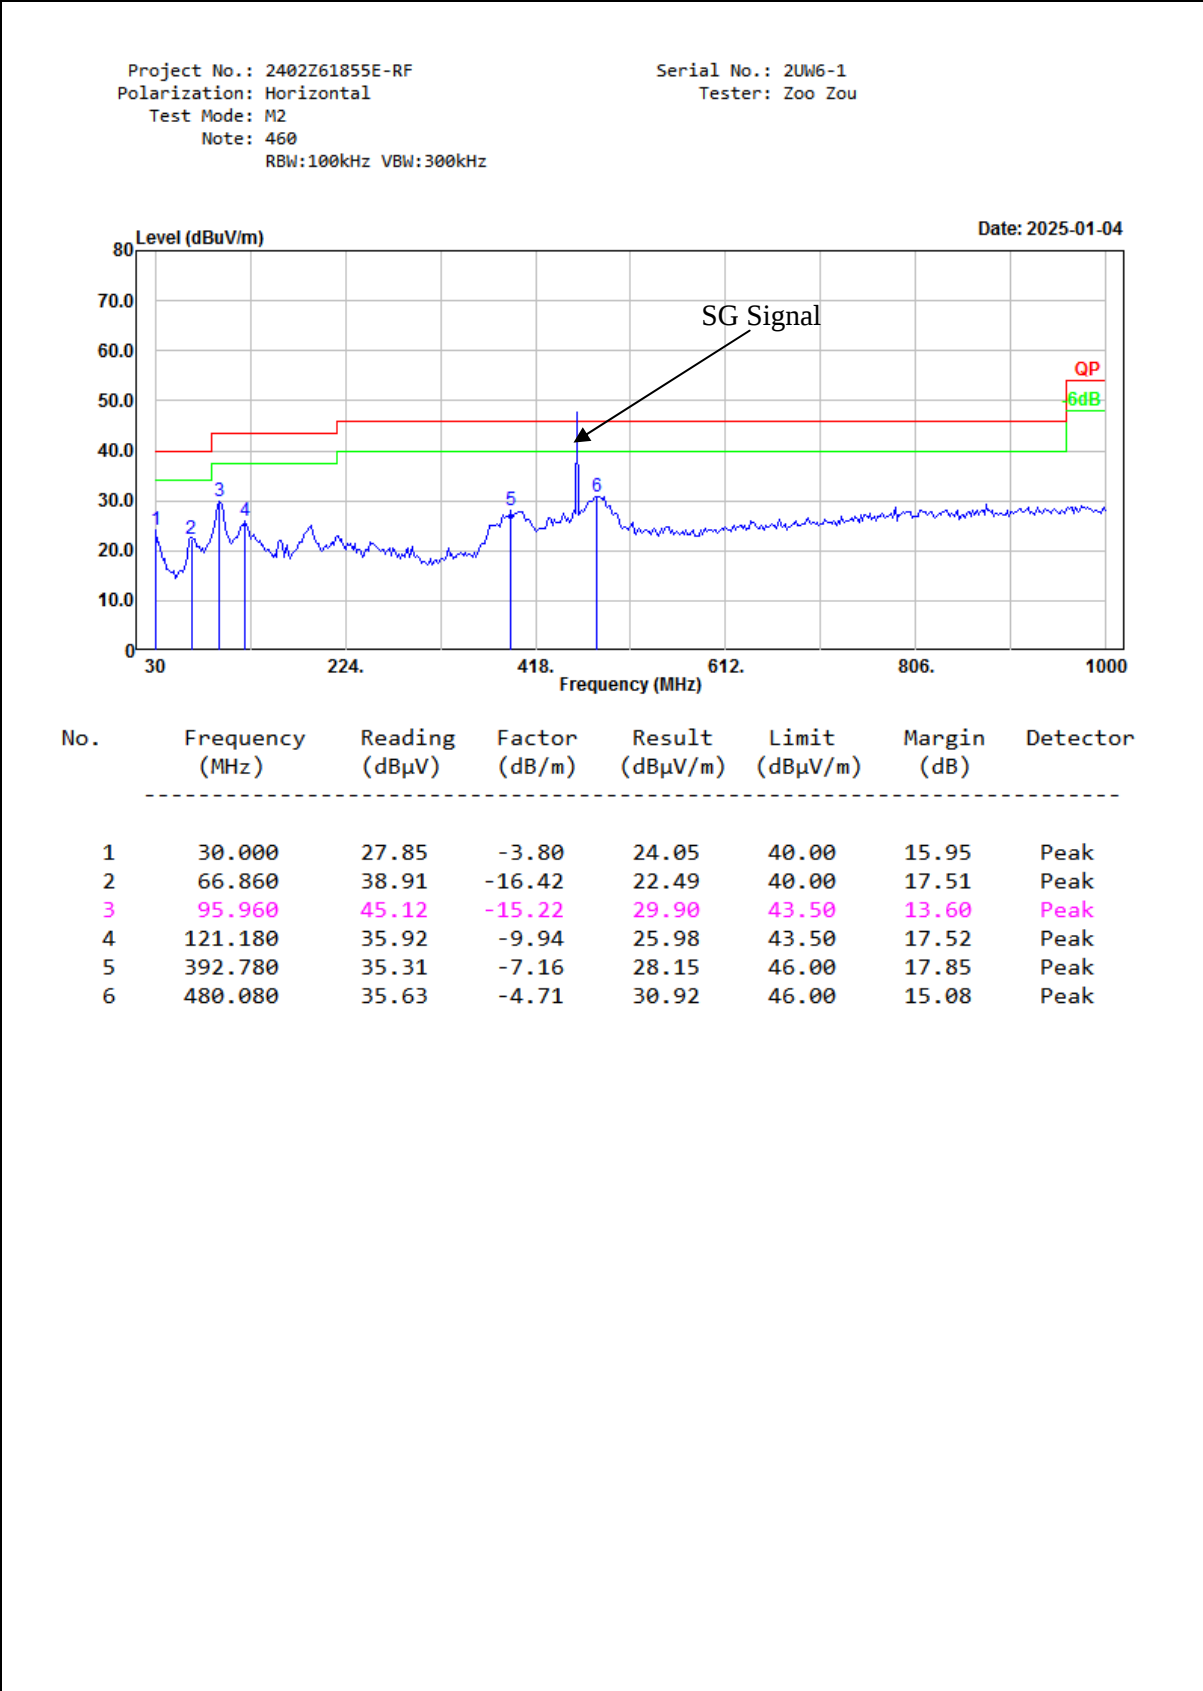


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 460
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

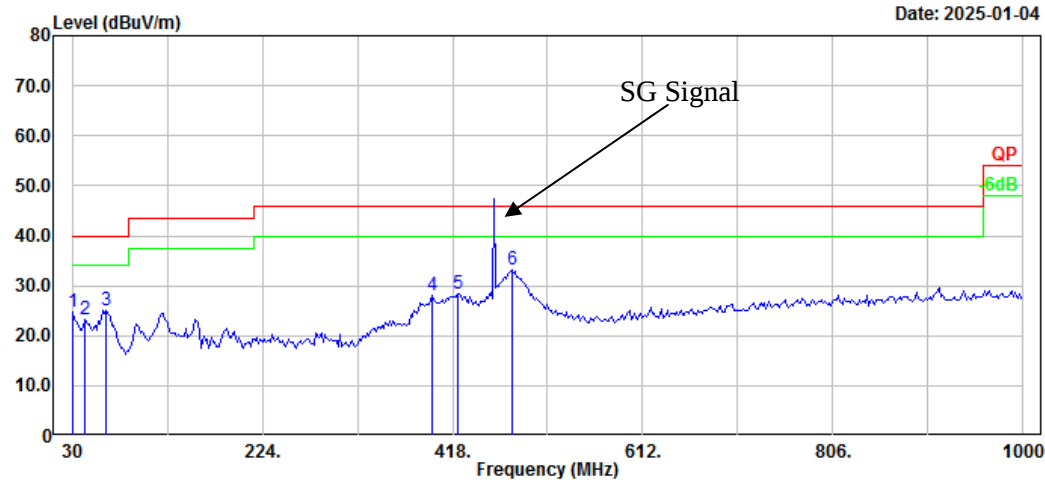


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.54	-3.80	24.74	40.00	15.26	Peak
2	43.580	36.01	-12.88	23.13	40.00	16.87	Peak
3	64.920	41.65	-16.50	25.15	40.00	14.85	Peak
4	396.660	35.23	-7.05	28.18	46.00	17.82	Peak
5	423.820	34.65	-6.36	28.29	46.00	17.71	Peak
6	478.140	37.95	-4.75	33.20	46.00	12.80	Peak

519.9875MHz:

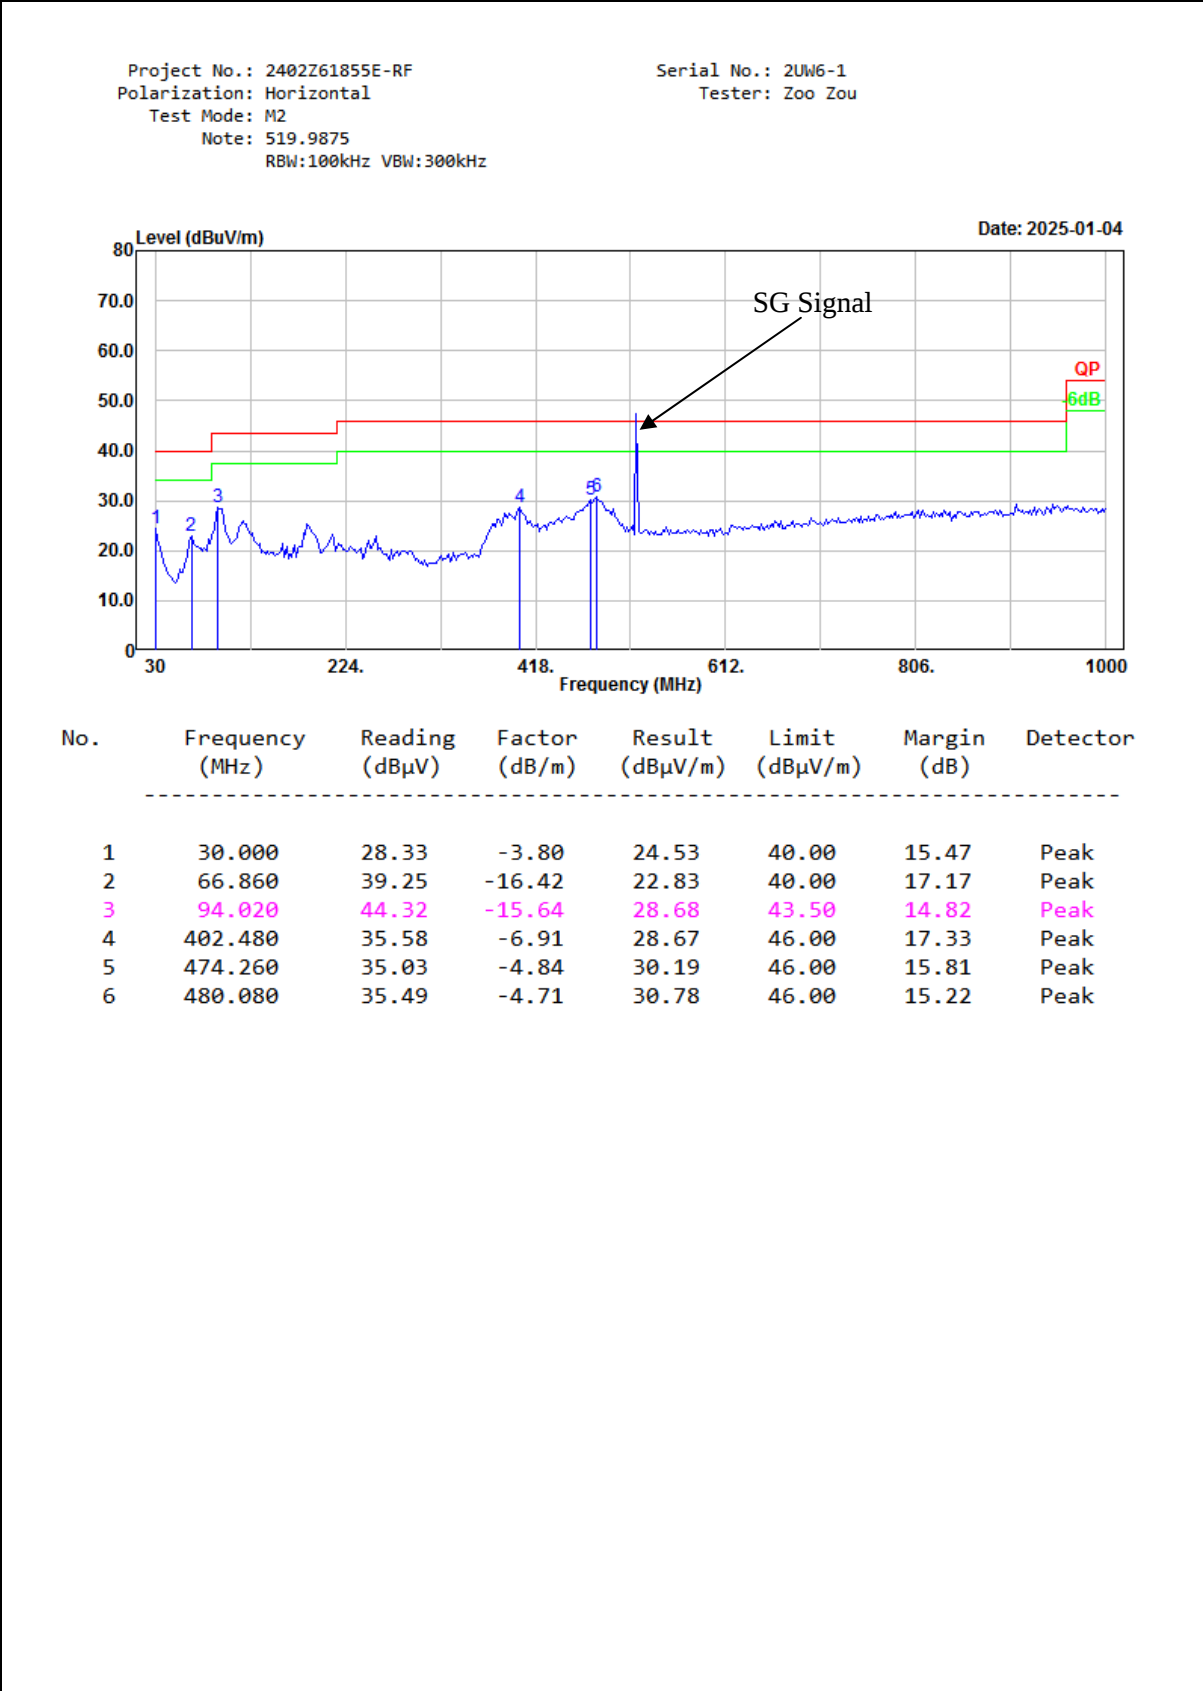


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 519.9875
RBW:100kHz VBW:300kHz

Serial No.: 2UW6-1
Tester: Zoo Zou

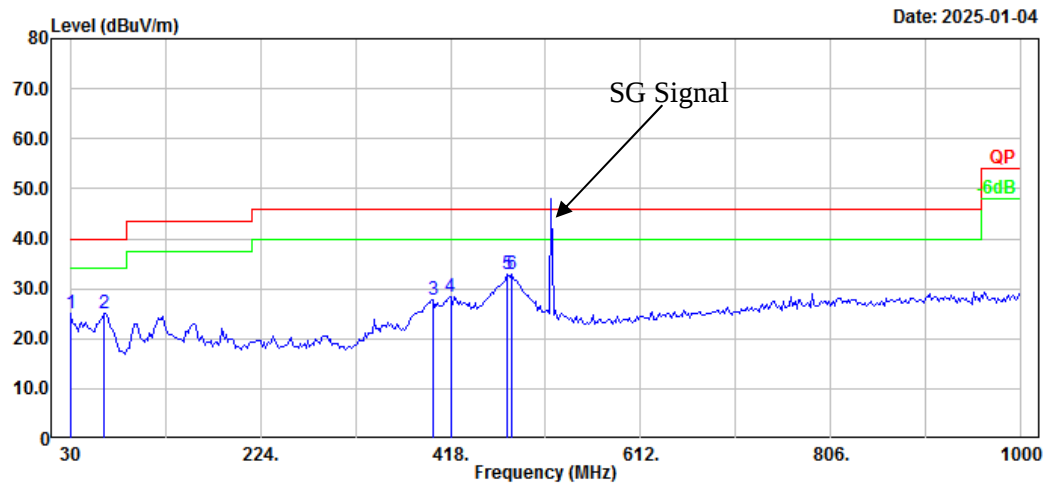


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.97	-3.80	25.17	40.00	14.83	Peak
2	64.920	41.47	-16.50	24.97	40.00	15.03	Peak
3	400.540	34.65	-6.96	27.69	46.00	18.31	Peak
4	418.000	35.03	-6.54	28.49	46.00	17.51	Peak
5	476.200	37.72	-4.79	32.93	46.00	13.07	Peak
6	480.080	37.75	-4.71	33.04	46.00	12.96	Peak

2) 1GHz-13GHz:
Scanning Mode(400-520MHz was the worst):

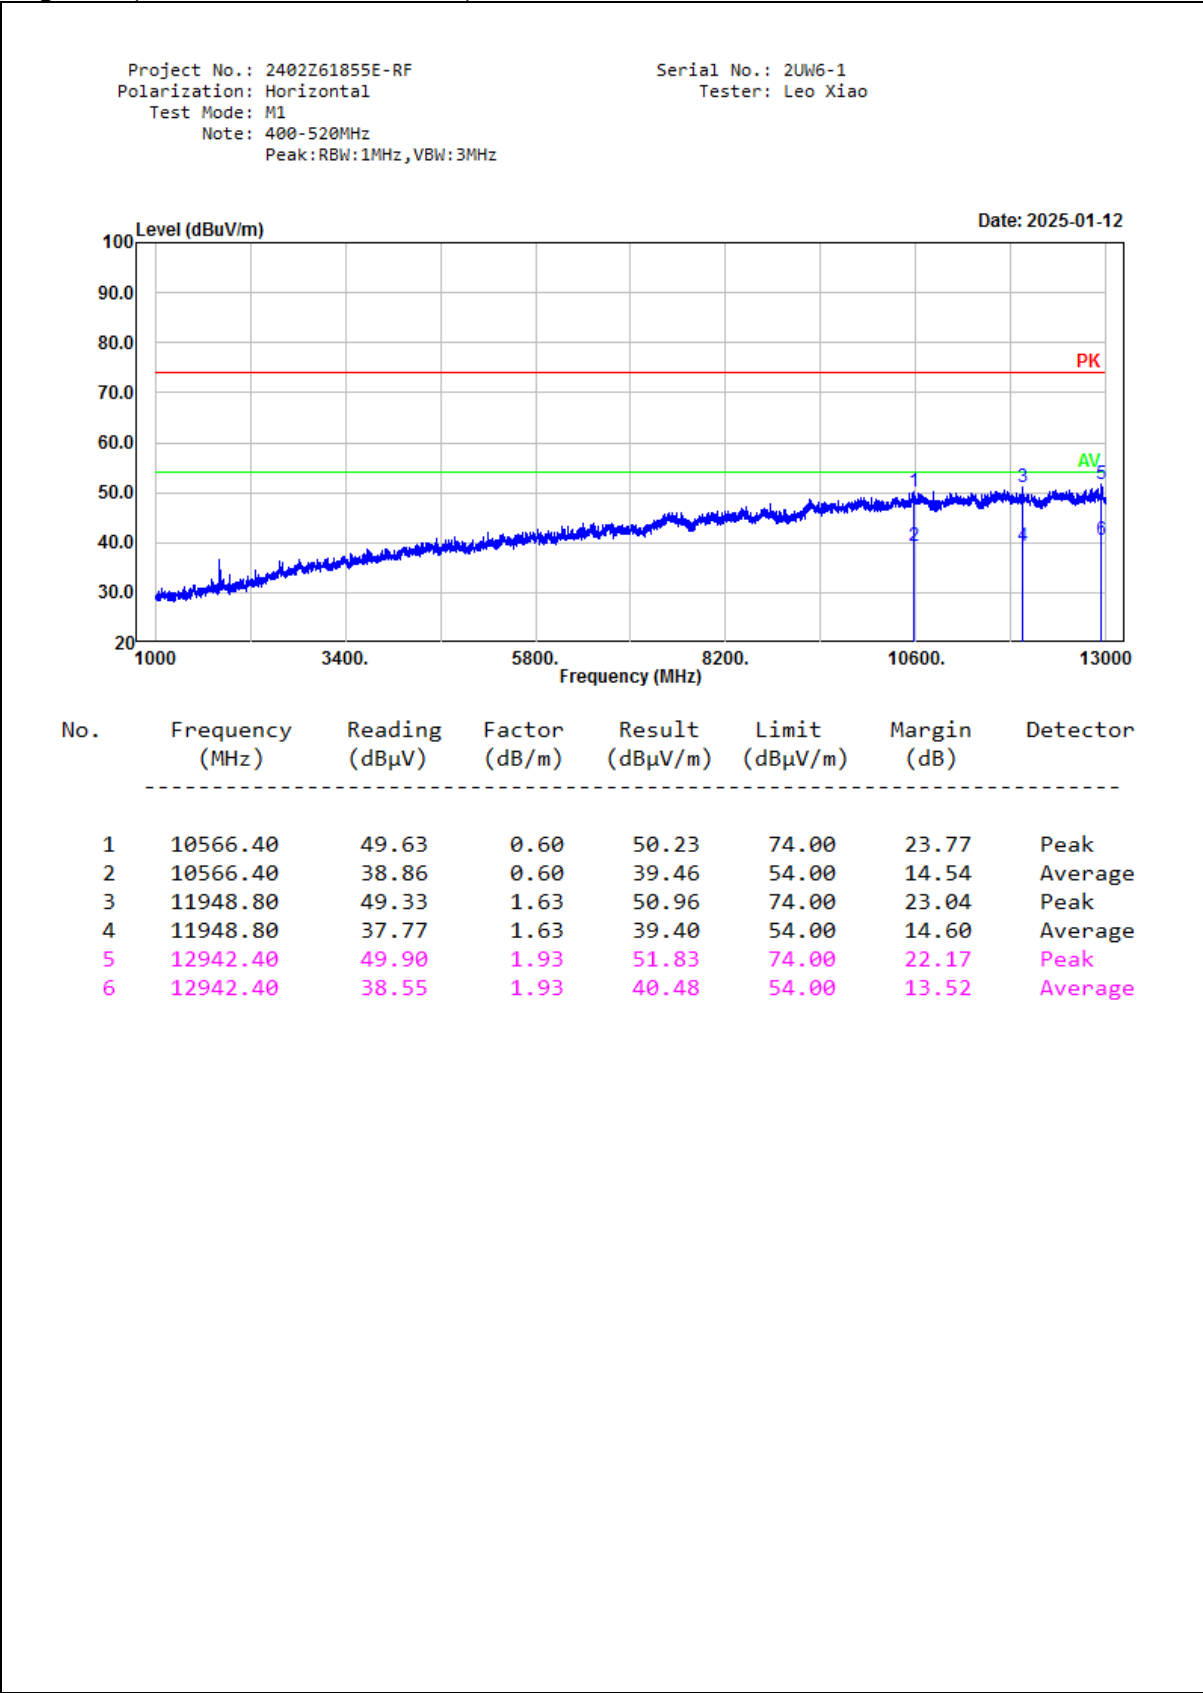


Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M1
Note: 400-520MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 2UW6-1
Tester: Leo Xiao

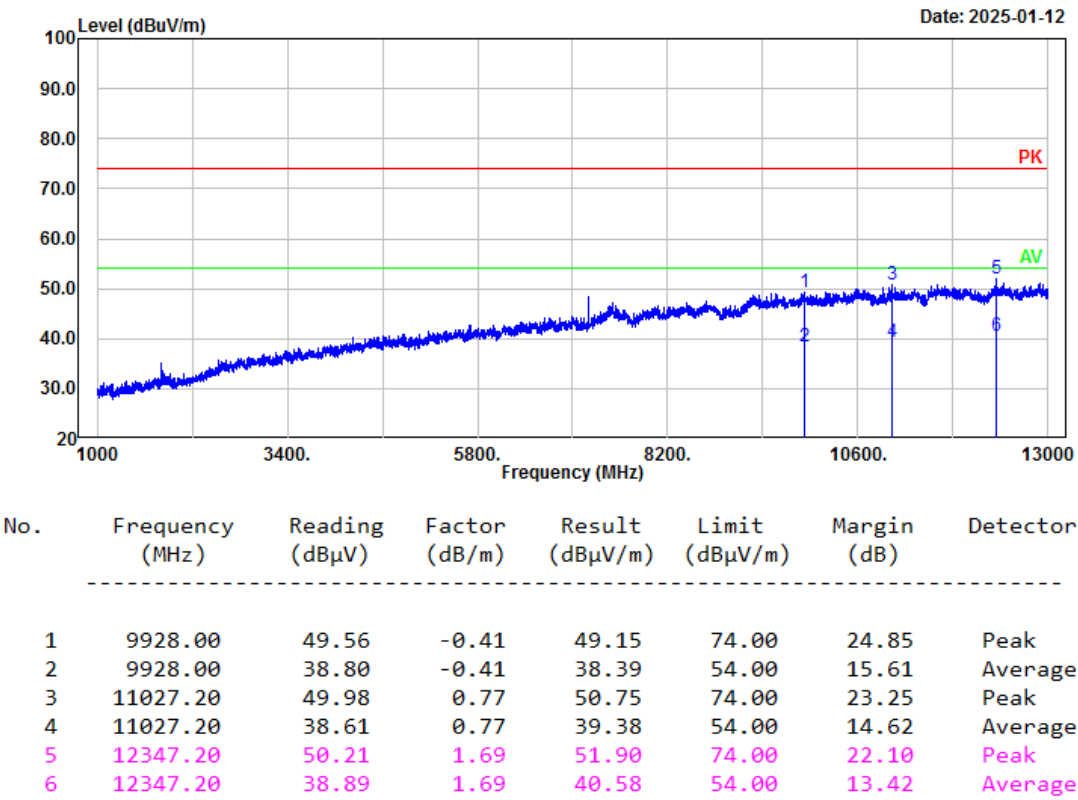


Receiving Mode(519.9875MHz was the worst):

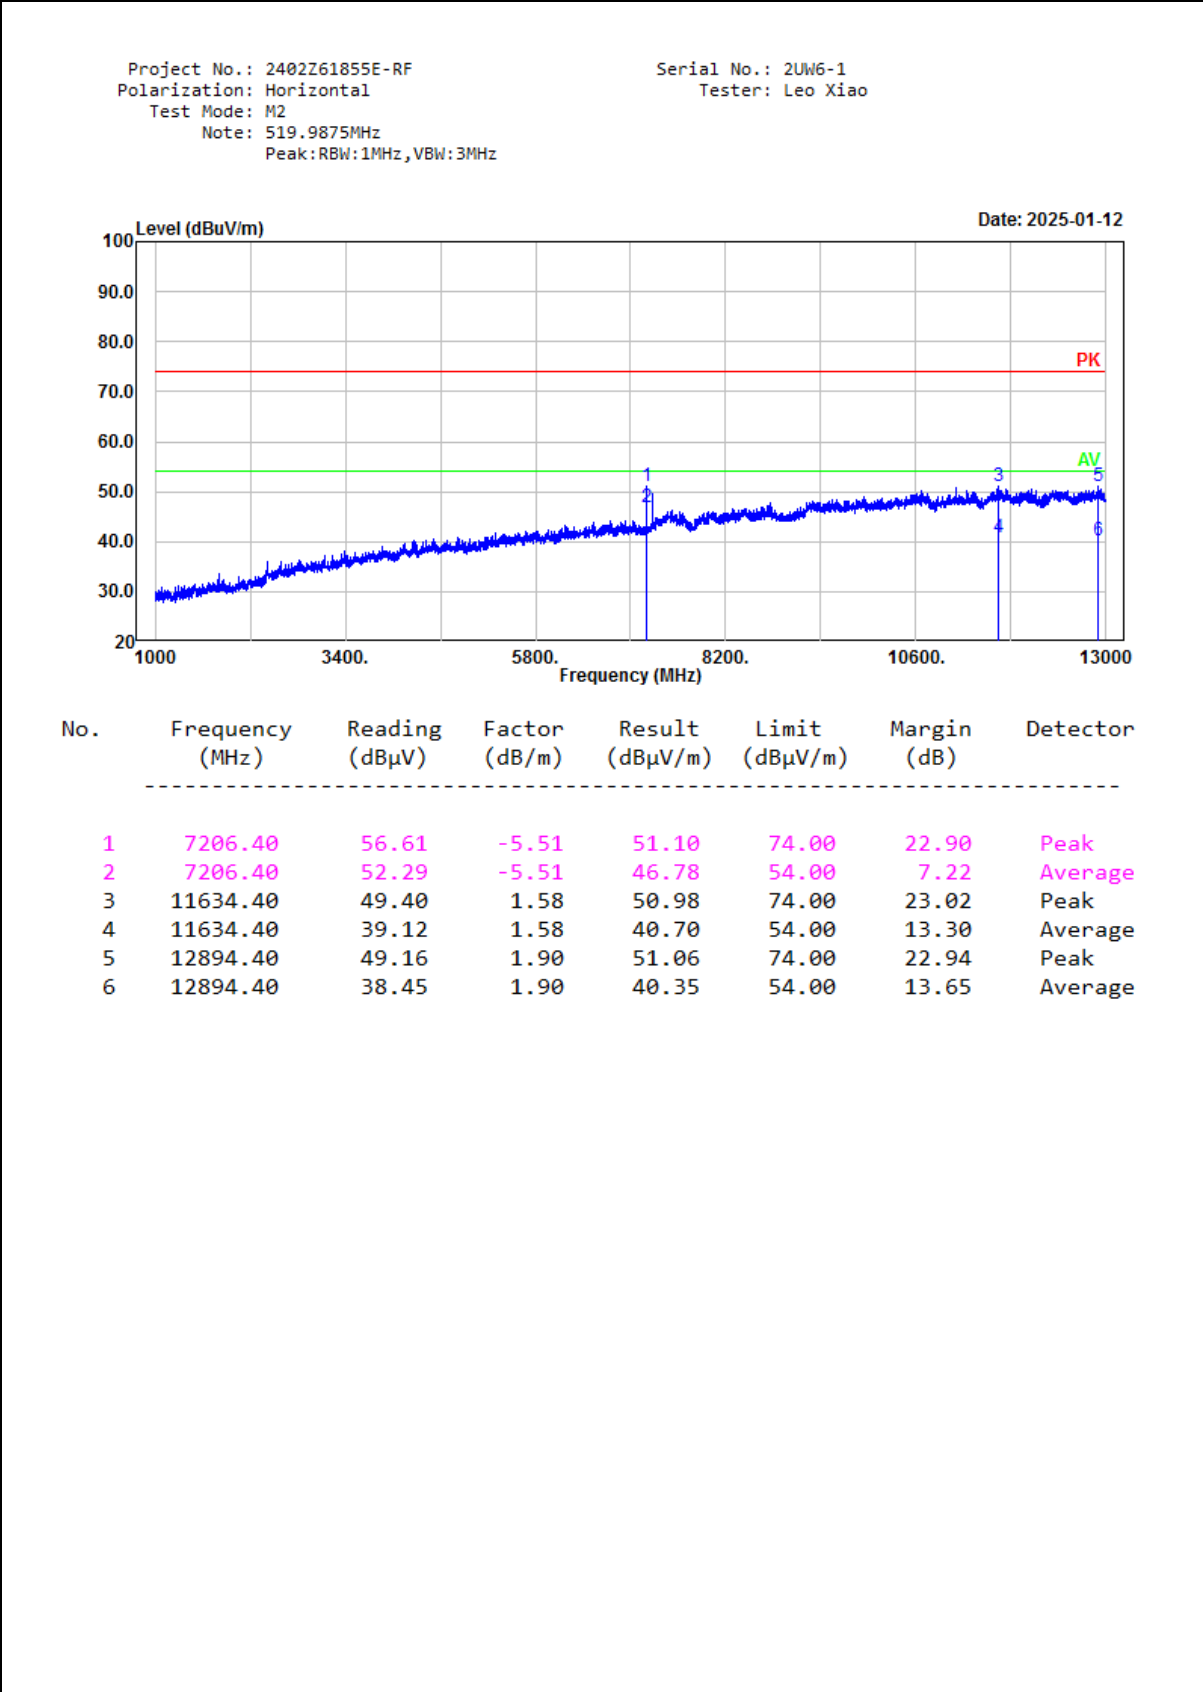

Project No.: 2402Z61855E-RF
Polarization: Vertical
Test Mode: M2
Note: 519.9875MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 2UW6-1
Tester: Leo Xiao

Date: 2025-01-12

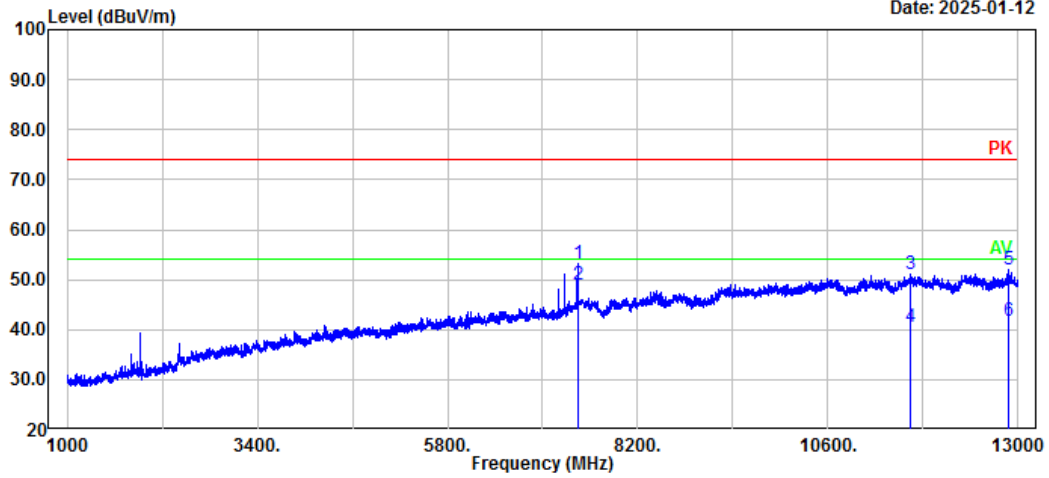

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7439.20	57.67	-4.52	53.15	74.00	20.85	Peak
2	7439.20	53.65	-4.52	49.13	54.00	4.87	Average
3	11634.40	49.54	1.58	51.12	74.00	22.88	Peak
4	11634.40	39.08	1.58	40.66	54.00	13.34	Average
5	12887.20	50.17	1.90	52.07	74.00	21.93	Peak
6	12887.20	39.84	1.90	41.74	54.00	12.26	Average

4.3 Scanning Receivers and Frequency Converters Used with Scanning Receivers


4.3.1 Applicable Standard

FCC §15.121(b).

(b) Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are 38 dB or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

4.3.2 Test Procedure

1. Connected the EUT as the below block diagram;

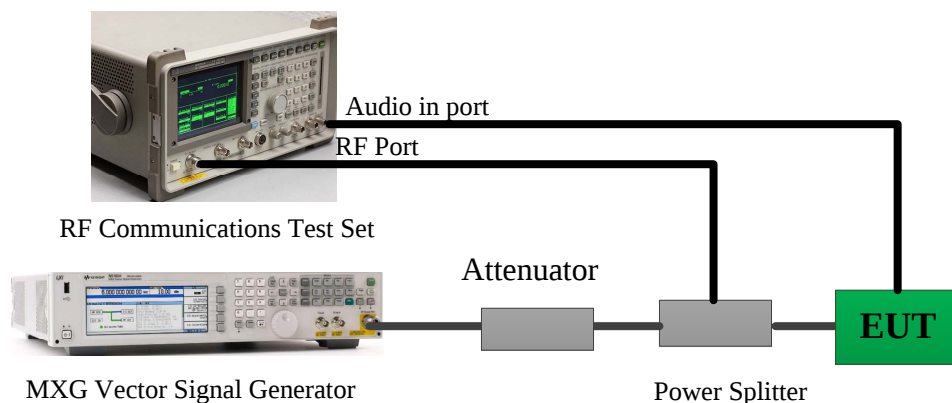

2. Apply a signal to the EUT antenna port at lowest, middle, highest channel frequencies of the operating band;
3. Adjust the audio output level of the EUT to its rated value with the distortion less than 10%;
4. Adjust the 8920 output power to produce 12 dB SINAD without the audio output power dropping by more than 3 dB; These output level of the 8920 at each channel frequency is the sensitivity of the EUT;
5. Select the lowest or worst case sensitivity level for all of the bands as the reference sensitivity;
6. Adjust the Signal Generator output to a level of +60 dB above the reference sensitivity obtained in step 5 and its frequency to the frequency point in the Cellular Band;
7. Set the EUT squelch to threshold, the signal required to open the squelch must be lower than the reference sensitivity level;
8. Set the EUT in a scanning mode and allow it to scan through its complete receiving range;
9. If the EUT un-squelched or stopped on any frequency, receiving at this frequency, then adjust the signal generator output level until 12 dB SINAD is produced, this level is the spurious value and the difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38 dB;
10. Repeat above procedure at the frequencies 824, 836, 849 MHz for the mobile band, and 869, 881.5 and 894 MHz for the Cellular Base Band.

4.3.3 Scanning Receivers and Frequency Converters Used with Scanning Receivers

Serial Number:	2UW6-1	Test Date:	2025/1/15
Test Site:	RF	Test Mode:	Scanning
Tester:	Stu Song	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	21.7	Relative Humidity: (%)	39	ATM Pressure: (kPa)	101.7

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Micro-Coax	Coaxial Cable	UFB205A	323308-015	2024/6/1	2025/5/31
Micro-Coax	Coaxial Cable	UFB205A	323308-018	2024/6/1	2025/5/31
Micro-Coax	Coaxial Cable	UFB205A	323308-012	2024/6/1	2025/5/31
Huaxiang	Coaxial Attenuator	DTS250-30	11022109	2024/6/7	2025/6/6
HP	RF Communications Test Set	8920A	3438A05201	2024/10/17	2025/10/16
Agilent	MXG Vector Signal Generator	N5182B	MY51350142	2024/8/26	2025/8/25
Mini-Circuits	Coaxial Power Splitters & Combiner	ZFRSC-183-S+	SF448201614	2024/2/25	2025/2/24

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Scanning Frequency Range	Test Frequency	Measurement Result	Limit
MHz	MHz	dB	dB
108-136	824, 836, 849, 869, 881.5, 894	41	>38
136-174	824, 836, 849, 869, 881.5, 894	44	>38
220-260	824, 836, 849, 869, 881.5, 894	46	>38
350-390	824, 836, 849, 869, 881.5, 894	43	>38
400-520	824, 836, 849, 869, 881.5, 894	45	>38

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2402Z61855E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2402Z61855E-RF-INP EUT INTERNAL PHOTOGRAPHS

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2402Z61855E-RF-00B-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******