

## FCC TEST REPORT

For

DUNE HD(HK) LIMITED

NETWORK MEDIA PLAYER

Model No.: TV-203U

Additional Model No.: TV-203UW

Prepared for : DUNE HD(HK) LIMITED  
Address : RMs 1101-1104, 11/F., Nan Fung Tower, 173 Des Voeux Road,  
Central, Hong Kong

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an  
District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 11, 2017  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : March 11, 2017~March 30, 2017  
Date of Report : March 30, 2017

**FCC TEST REPORT**  
**FCC CFR 47 PART 15 C(15.247): 2016****Report Reference No. .... : LCS1703111497E**

Date of Issue ..... : March 30, 2017

**Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**Address ..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure ..... : Full application of Harmonised standards ■  
Partial application of Harmonised standards □  
Other standard testing method □**Applicant's Name ..... : DUNE HD(HK) LIMITED**Address ..... : RMs 1101-1104, 11/F., Nan Fung Tower, 173 Des Voeux Road,  
Central, Hong Kong**Test Specification**

Standard ..... : FCC CFR 47 PART 15 C(15.247): 2016

**Test Report Form No. .... : LCSEMC-1.0**

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**EUT Description. .... : NETWORK MEDIA PLAYER**

Trade Mark..... : DUNE HD

Model/ Type reference ..... : TV-203U


Ratings..... : DC 12.0V 1000mA

Result ..... : **Positive****Compiled by:**

Aking Jin/ File administrators

**Supervised by:**

Glin Lu/ Technique principal

**Approved by:**

Gavin Liang/ Manager

## FCC -- TEST REPORT

|                                  |                                 |
|----------------------------------|---------------------------------|
| Test Report No. : LCS1703111497E | March 30, 2017<br>Date of issue |
|----------------------------------|---------------------------------|

|                          |                                                                                   |
|--------------------------|-----------------------------------------------------------------------------------|
| EUT.....                 | : NETWORK MEDIA PLAYER                                                            |
| Type / Model.....        | : TV-203U                                                                         |
| <b>Applicant.....</b>    | <b>: DUNE HD(HK) LIMITED</b>                                                      |
| Address.....             | : RMs 1101-1104, 11/F., Nan Fung Tower, 173 Des Voeux Road,<br>Central, Hong Kong |
| Telephone.....           | : /                                                                               |
| Fax.....                 | : /                                                                               |
| <b>Manufacturer.....</b> | <b>: DUNE HD(HK) LIMITED</b>                                                      |
| Address.....             | : RMs 1101-1104, 11/F., Nan Fung Tower, 173 Des Voeux Road,<br>Central, Hong Kong |
| Telephone.....           | : /                                                                               |
| Fax.....                 | : /                                                                               |
| <b>Factory.....</b>      | <b>: DUNE HD(HK) LIMITED</b>                                                      |
| Address.....             | : RMs 1101-1104, 11/F., Nan Fung Tower, 173 Des Voeux Road,<br>Central, Hong Kong |
| Telephone.....           | : /                                                                               |
| Fax.....                 | : /                                                                               |

|             |          |
|-------------|----------|
| Test Result | Positive |
|-------------|----------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**Revision History**

| Revision | Issue Date     | Revisions     | Revised By  |
|----------|----------------|---------------|-------------|
| 00       | March 30, 2017 | Initial Issue | Gavin Liang |
|          |                |               |             |
|          |                |               |             |

## TABLE OF CONTENTS

|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>                        | <b>6</b>  |
| 1.1. DESCRIPTION OF DEVICE (EUT) .....                     | 6         |
| 1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS .....      | 6         |
| 1.3. EXTERNAL I/O CABLE .....                              | 6         |
| 1.4. DESCRIPTION OF TEST FACILITY .....                    | 7         |
| 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....        | 7         |
| 1.6. MEASUREMENT UNCERTAINTY .....                         | 7         |
| 1.7. DESCRIPTION OF TEST MODES .....                       | 7         |
| <b>2. TEST METHODOLOGY .....</b>                           | <b>9</b>  |
| 2.1. EUT CONFIGURATION.....                                | 9         |
| 2.2. EUT EXERCISE .....                                    | 9         |
| 2.3. GENERAL TEST PROCEDURES .....                         | 9         |
| <b>3. SYSTEM TEST CONFIGURATION.....</b>                   | <b>10</b> |
| 3.1. JUSTIFICATION.....                                    | 10        |
| 3.2. EUT EXERCISE SOFTWARE.....                            | 10        |
| 3.3. SPECIAL ACCESSORIES .....                             | 10        |
| 3.4. BLOCK DIAGRAM/SCHEMATICS.....                         | 10        |
| 3.5. EQUIPMENT MODIFICATIONS .....                         | 10        |
| 3.6. TEST SETUP .....                                      | 10        |
| <b>4. SUMMARY OF TEST RESULTS.....</b>                     | <b>11</b> |
| <b>5. TEST RESULT .....</b>                                | <b>12</b> |
| 5.1. ON TIME AND DUTY CYCLE .....                          | 12        |
| 5.2. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT.....       | 14        |
| 5.3. POWER SPECTRAL DENSITY MEASUREMENT .....              | 16        |
| 5.4. 6 dB SPECTRUM BANDWIDTH MEASUREMENT .....             | 20        |
| 5.5. RADIATED EMISSIONS MEASUREMENT.....                   | 24        |
| 5.6. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST..... | 40        |
| 5.7. AC POWER LINE CONDUCTED EMISSIONS.....                | 48        |
| 5.8. BAND-EDGE MEASUREMENTS FOR RADIATED EMISSIONS .....   | 51        |
| 5.9. ANTENNA REQUIREMENTS.....                             | 57        |
| <b>6. LIST OF MEASURING EQUIPMENTS.....</b>                | <b>58</b> |
| <b>7. TEST SETUP PHOTOGRAPHS OF EUT.....</b>               | <b>59</b> |
| <b>8. EXTERIOR PHOTOGRAPHS OF THE EUT.....</b>             | <b>59</b> |
| <b>9. INTERIOR PHOTOGRAPHS OF THE EUT .....</b>            | <b>59</b> |

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

|                         |                                                                                                                                      |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| EUT                     | : NETWORK MEDIA PLAYER                                                                                                               |
| Model Number            | : TV-203U, TV-203UW                                                                                                                  |
| Model Declaration       | : PCB board, structure and internal of these model(s) are the same, So no additional models were tested.                             |
| Test Model              | : TV-203U                                                                                                                            |
| Hardware version        | : 3                                                                                                                                  |
| Software version        | : 160831_1537_b9b6                                                                                                                   |
| Power Supply            | : DC 12.0V 1000mA                                                                                                                    |
| WLAN                    | : Supported 802.11b/802.11g/802.11n                                                                                                  |
| Operation frequency     | : IEEE 802.11b:2412-2462MHz<br>IEEE 802.11g:2412-2462MHz<br>IEEE 802.11n HT20:2412-2462MHz<br>IEEE 802.11n HT40:2422-2452MHz         |
| Modulation Type         | : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)<br>IEEE 802.11n: OFDM (64QAM, 16QAM,QPSK,BPSK) |
| Channel Number          | : 11 Channels for WIFI 20MHz Bandwidth(802.11b/g/n-HT20)<br>7 Channels for WIFI 40MHz Bandwidth(802.11n-HT40)                        |
| Antenna Type            | : External antenna                                                                                                                   |
| Antenna Gain            | : 2.0dBi (Max.)                                                                                                                      |
| Extreme temp. Tolerance | : -10°C to +50°C                                                                                                                     |
| Extreme vol. Limits     | : 10.8VDC to 13.2VDC (nominal: 12.0VDC)                                                                                              |

### 1.2. Host System Configuration List and Details

| Manufacturer | Description | Model            | Serial Number | Certificate |
|--------------|-------------|------------------|---------------|-------------|
| YINGYUAN     | AC Adapter  | SAW12-120-1000UD | --            | CE          |

### 1.3. External I/O Cable

| I/O Port Description   | Quantity | Cable            |
|------------------------|----------|------------------|
| USB Port               | 2        | 1.2m, unshielded |
| LAN Port               | 1        | 1.2m, unshielded |
| DC 12V Input Port      | 1        | N/A              |
| IR EXT                 | 1        | N/A              |
| HDMI Input Port        | 1        | 1.2m, unshielded |
| 2.4G WLAN Antenna Port | 1        | N/A              |

#### 1.4. Description of Test Facility

CNAS Registration Number. is L4595.  
 FCC Registration Number. is 899208.  
 Industry Canada Registration Number. is 9642A-1.  
 ESMD Registration Number. is ARCB0108.  
 UL Registration Number. is 100571-492.  
 TUV SUD Registration Number. is SCN1081.  
 TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### 1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

#### 1.6. Measurement Uncertainty

| Test Item              |   | Frequency Range | Uncertainty | Note |
|------------------------|---|-----------------|-------------|------|
| Radiation Uncertainty  | : | 9KHz~30MHz      | ±3.10dB     | (1)  |
|                        |   | 30MHz~200MHz    | ±2.96dB     | (1)  |
|                        |   | 200MHz~1000MHz  | ±3.10dB     | (1)  |
|                        |   | 1GHz~26.5GHz    | ±3.80dB     | (1)  |
|                        |   | 26.5GHz~40GHz   | ±3.90dB     | (1)  |
| Conduction Uncertainty | : | 150kHz~30MHz    | ±1.63dB     | (1)  |
| Power disturbance      | : | 30MHz~300MHz    | ±1.60dB     | (1)  |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 150 kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, which was determined to be 802.11b mode (Low Channel).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be 802.11b mode(Low Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

802.11b Mode: 1 Mbps, DSSS.  
 802.11g Mode: 6 Mbps, OFDM.  
 802.11n Mode HT20: MCS0, OFDM.  
 802.11n Mode HT40: MCS7, OFDM.

## Channel List &amp; Frequency

## IEEE 802.11b/g/n HT20

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 2412~2462MHz   | 1           | 2412           | 7           | 2442           |
|                | 2           | 2417           | 8           | 2447           |
|                | 3           | 2422           | 9           | 2452           |
|                | 4           | 2427           | 10          | 2457           |
|                | 5           | 2432           | 11          | 2462           |
|                | 6           | 2437           | --          | --             |

## IEEE 802.11n HT40

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 2422~2452MHz   | 1           | --             | 7           | 2442           |
|                | 2           | --             | 8           | 2447           |
|                | 3           | 2422           | 9           | 2452           |
|                | 4           | 2427           | 10          | --             |
|                | 5           | 2432           | 11          | --             |
|                | 6           | 2437           | --          | --             |

The Radio software & hardware version is same as the product software & hardware version in page6.  
The test software is MP Tool, and test configuration of the software shows as below:

| Test mode | Channel No. | Frequency(MHz) | Software setting value |
|-----------|-------------|----------------|------------------------|
| 802.11b   | 1           | 2412           | 15                     |
|           | 6           | 2437           | 15                     |
|           | 11          | 2462           | 16                     |
| 802.11g   | 1           | 2412           | 14                     |
|           | 6           | 2437           | 14                     |
|           | 11          | 2462           | 14                     |
| 802.11n20 | 1           | 2412           | 13                     |
|           | 6           | 2437           | 13                     |
|           | 11          | 2462           | 13                     |
| 802.11n40 | 3           | 2422           | 12                     |
|           | 6           | 2437           | 12                     |
|           | 9           | 2452           | 12                     |

## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB558074 D01 DTS Meas. Guidance v03r05 and KDB 662911 are required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmit condition.

#### 3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (MP Tools) provided by application.

#### 3.3. Special Accessories

N/A

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.

#### 4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C |                                           |           |
|-----------------------------------------|-------------------------------------------|-----------|
| FCC Rules                               | Description of Test                       | Result    |
| /                                       | Duty Cycle                                | Compliant |
| §15.247(b)                              | Maximum Conducted Output Power            | Compliant |
| §15.247(e)                              | Power Spectral Density                    | Compliant |
| §15.247(a)(2)                           | 6dB Bandwidth                             | Compliant |
| §15.247(a)                              | Occupied Bandwidth                        | Compliant |
| §15.209, §15.247(d)                     | Radiated and Conducted Spurious Emissions | Compliant |
| §15.205                                 | Emissions at Restricted Band              | Compliant |
| §15.207(a)                              | Conducted Emissions                       | Compliant |
| §15.203                                 | Antenna Requirements                      | Compliant |
| §15.247(i)§2.1093                       | RF Exposure                               | Compliant |

## 5. TEST RESULT

### 5.1. On Time and Duty Cycle

#### 5.1.1. Standard Applicable

None; for reporting purpose only.


#### 5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipment's list in this report. The following table is the setting of the spectrum analyse.

#### 5.1.3. Test Procedures

1. Set the centre frequency of the spectrum analyse to the transmitting frequency;
2. Set the span=0MHz, RBW=8MHz, VBW=50MHz, Sweep time=5ms;
3. Detector = peak;
4. Trace mode = Single hold.

#### 5.1.4. Test Setup Layout

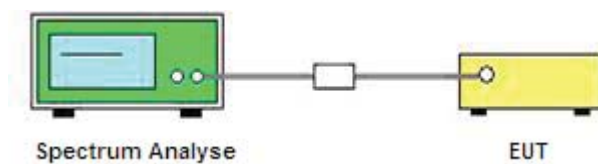



#### 5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 5.1.6. Test result

| Mode             | On Time<br>B<br>(ms) | Period<br>(ms) | Duty Cycle<br>x<br>(Linear) | Duty Cycle<br>(%) | Duty Cycle<br>Correction<br>Factor (dB) | 1/B<br>Minimum<br>VBW(KHz) |
|------------------|----------------------|----------------|-----------------------------|-------------------|-----------------------------------------|----------------------------|
| 802.11b          | 5.0                  | 5.0            | 1                           | 100               | 0                                       | 0.01                       |
| 802.11g          | 5.0                  | 5.0            | 1                           | 100               | 0                                       | 0.01                       |
| 802.11n<br>-HT20 | 5.0                  | 5.0            | 1                           | 100               | 0                                       | 0.01                       |
| 802.11n<br>-HT40 | 5.0                  | 5.0            | 1                           | 100               | 0                                       | 0.01                       |

## Test plot of On Time and Duty Cycle

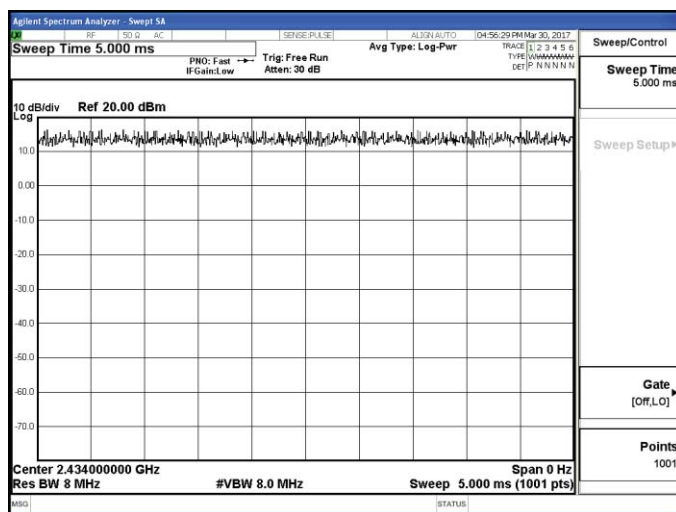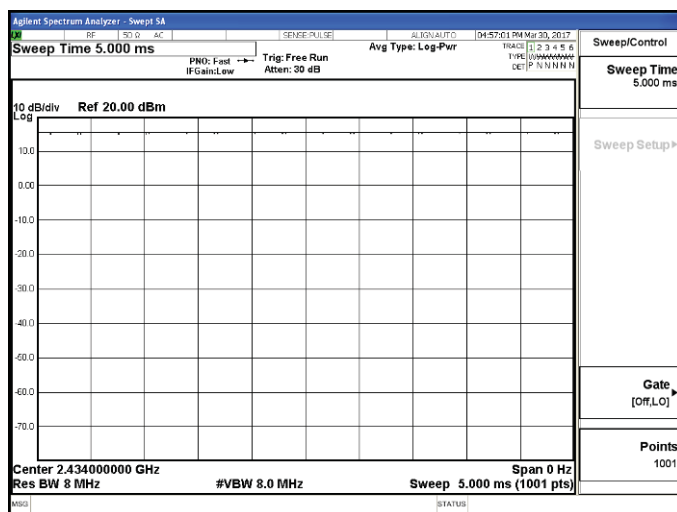

802.11b

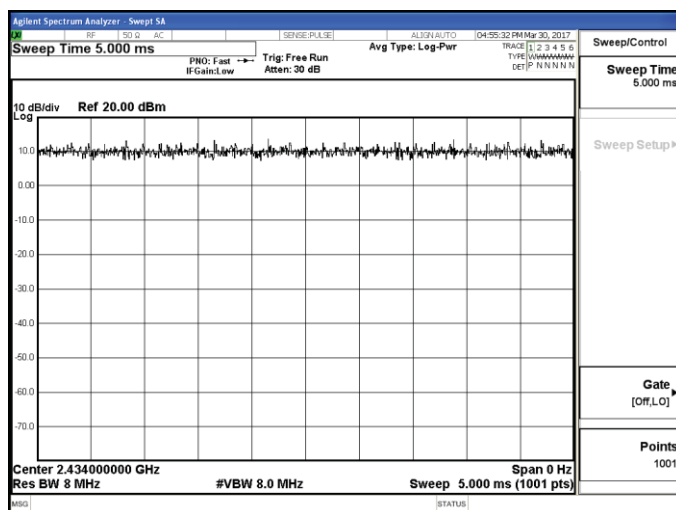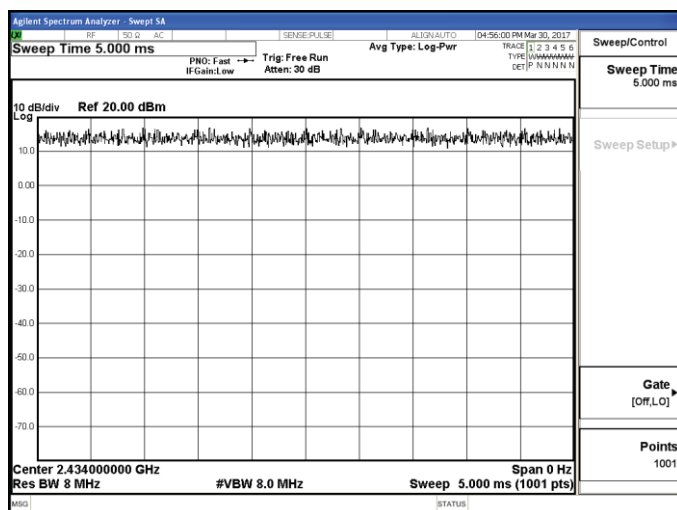

802.11g

802.11n-HT20

802.11n-HT40

## 5.2. Maximum Conducted Output Power Measurement

### 5.2.1. Standard Applicable

According to §15.247(b): For systems using digital modulation in the 2400-2483.5 MHz and 5725-5850 MHz band, the limit for maximum peak conducted output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter peak output power.


### 5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipment's list in this report. The following table is the setting of the power meter.

### 5.2.3. Test Procedures

According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power, 9.1.2 The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

### 5.2.4. Test Setup Layout

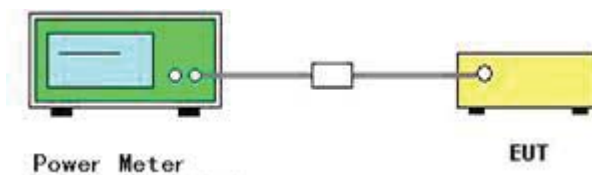

### 5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.2.6. Test Result of Maximum Conducted Output Power

|               |          |                |             |
|---------------|----------|----------------|-------------|
| Temperature   | 25℃      | Humidity       | 60%         |
| Test Engineer | Chaz Liu | Configurations | 802.11b/g/n |

| Test Mode         | Channel | Frequency (MHz) | Measured Peak Output Power (dBm) | Limits (dBm) | Verdict |
|-------------------|---------|-----------------|----------------------------------|--------------|---------|
| IEEE 802.11b      | 1       | 2412            | 18.45                            | $\leq 30$    | PASS    |
|                   | 6       | 2437            | 18.65                            |              |         |
|                   | 11      | 2462            | 18.51                            |              |         |
| IEEE 802.11g      | 1       | 2412            | 18.22                            | $\leq 30$    | PASS    |
|                   | 6       | 2437            | 18.15                            |              |         |
|                   | 11      | 2462            | 18.05                            |              |         |
| IEEE 802.11n HT20 | 1       | 2412            | 17.32                            | $\leq 30$    | PASS    |
|                   | 6       | 2437            | 17.69                            |              |         |
|                   | 11      | 2462            | 17.88                            |              |         |
| IEEE 802.11n HT40 | 3       | 2422            | 17.25                            | $\leq 30$    | PASS    |
|                   | 6       | 2437            | 17.32                            |              |         |
|                   | 9       | 2452            | 17.08                            |              |         |

## Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;

### 5.3. Power Spectral Density Measurement

#### 5.3.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.


#### 5.3.2. Measuring Instruments and Setting

Please refer to section 6 of equipment's list in this report. The following table is the setting of Spectrum Analyzer.

#### 5.3.3. Test Procedures

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 100 kHz.
4. Set the VBW  $\geq 3 \times$  RBW
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
12. The resulting peak PSD level shall not be great than 8dBm.

#### 5.3.4. Test Setup Layout

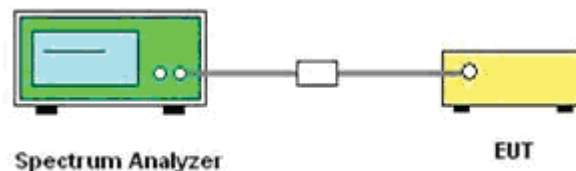

#### 5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.3.6. Test Result of Power Spectral Density


|               |          |                |             |
|---------------|----------|----------------|-------------|
| Temperature   | 25°C     | Humidity       | 60%         |
| Test Engineer | Chaz Liu | Configurations | 802.11b/g/n |

| Test Mode         | Channel | Frequency (MHz) | Measured Peak Power Spectral Density (dBm/3KHz) | Limits (dBm/3KHz) | Verdict |
|-------------------|---------|-----------------|-------------------------------------------------|-------------------|---------|
| IEEE 802.11b      | 1       | 2412            | -6.959                                          | $\leq 8$          | PASS    |
|                   | 6       | 2437            | -5.763                                          |                   |         |
|                   | 11      | 2462            | -7.835                                          |                   |         |
| IEEE 802.11g      | 1       | 2412            | -13.489                                         | $\leq 8$          | PASS    |
|                   | 6       | 2437            | -11.486                                         |                   |         |
|                   | 11      | 2462            | -13.709                                         |                   |         |
| IEEE 802.11n HT20 | 1       | 2412            | -11.986                                         | $\leq 8$          | PASS    |
|                   | 6       | 2437            | -14.716                                         |                   |         |
|                   | 11      | 2462            | -13.986                                         |                   |         |
| IEEE 802.11n HT40 | 3       | 2422            | -18.284                                         | $\leq 8$          | PASS    |
|                   | 6       | 2437            | -16.766                                         |                   |         |
|                   | 9       | 2452            | -17.142                                         |                   |         |


## Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. please refer to following plots;


## Peak Power Spectrum Density

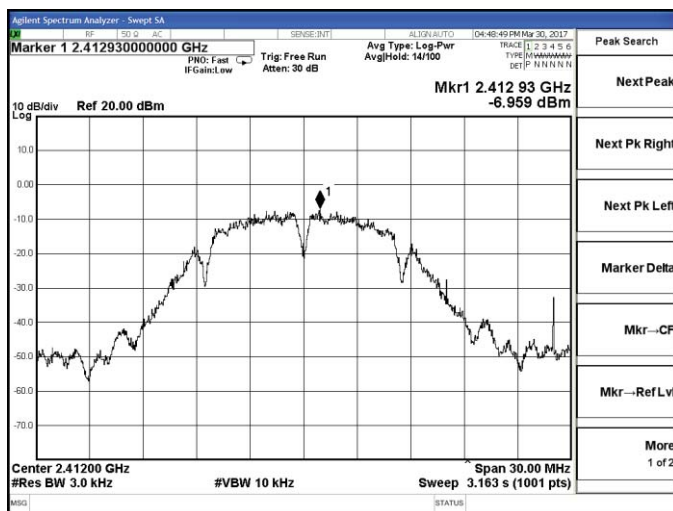


IEEE 802.11b-Channel 1 / 2412 MHz

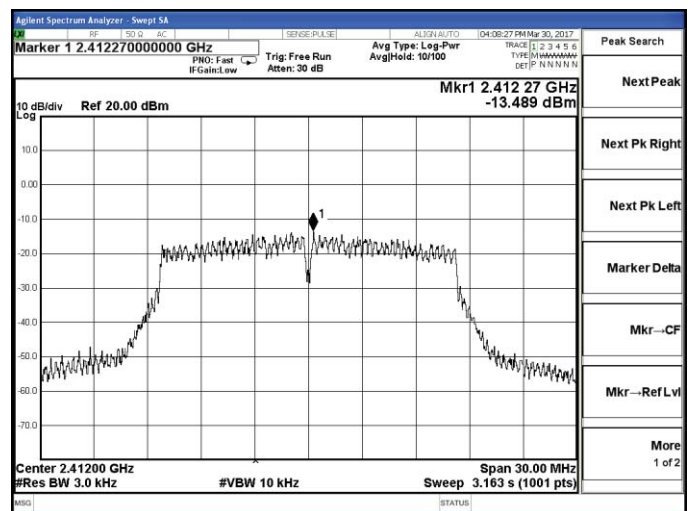


IEEE 802.11g-Channel 1 / 2412 MHz

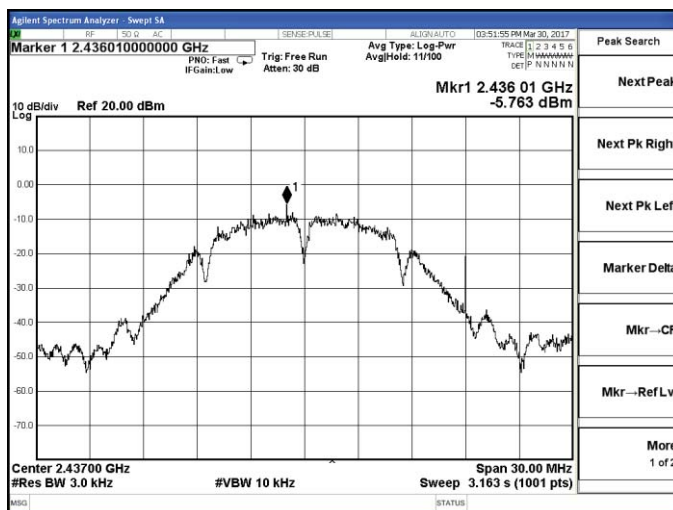


IEEE 802.11b-Channel 6 / 2437 MHz

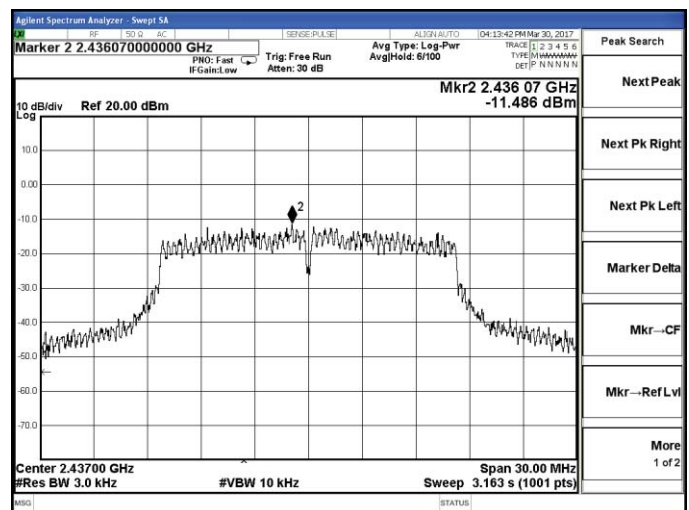

IEEE 802.11g-Channel 6 / 2437 MHz

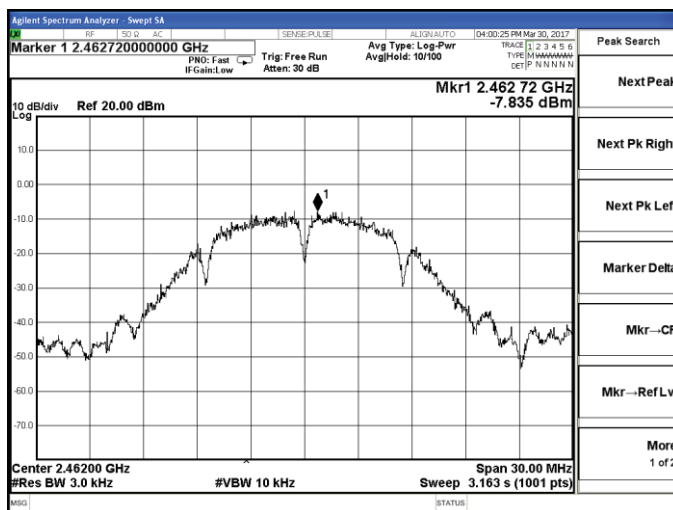


IEEE 802.11b-Channel 11 / 2462 MHz

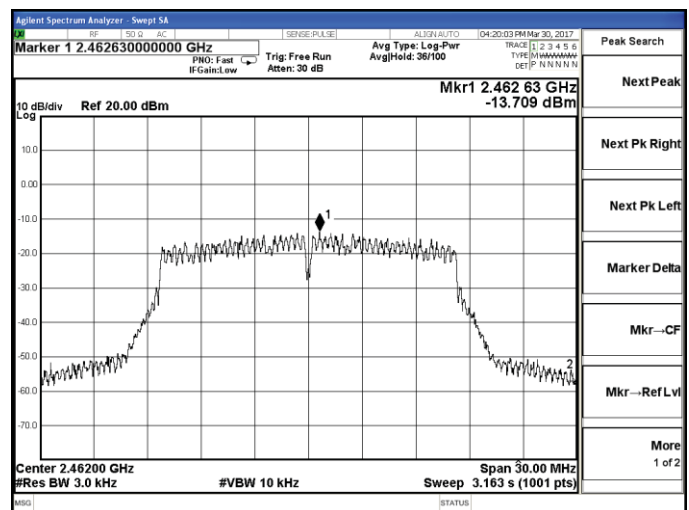


IEEE 802.11g-Channel 11 / 2462 MHz


## Peak Power Spectrum Density

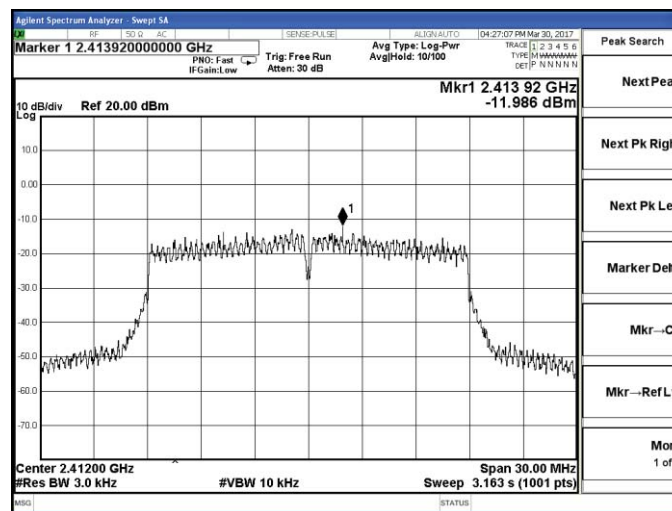


IEEE 802.11n HT20-Channel 1 / 2412 MHz

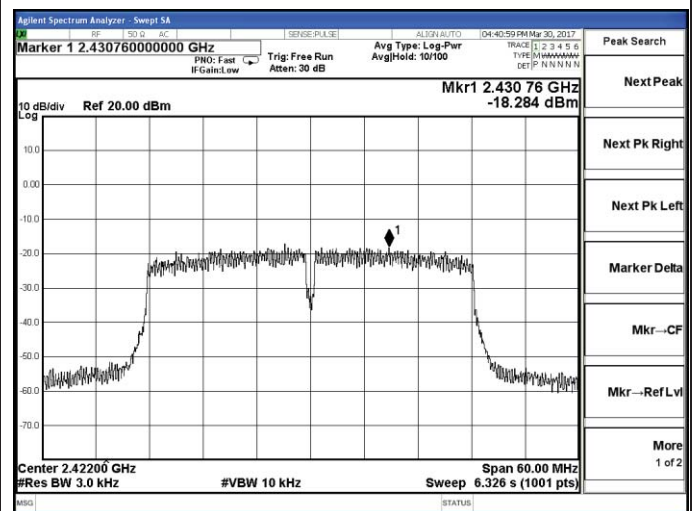


IEEE 802.11n HT40-Channel 3 / 2422 MHz

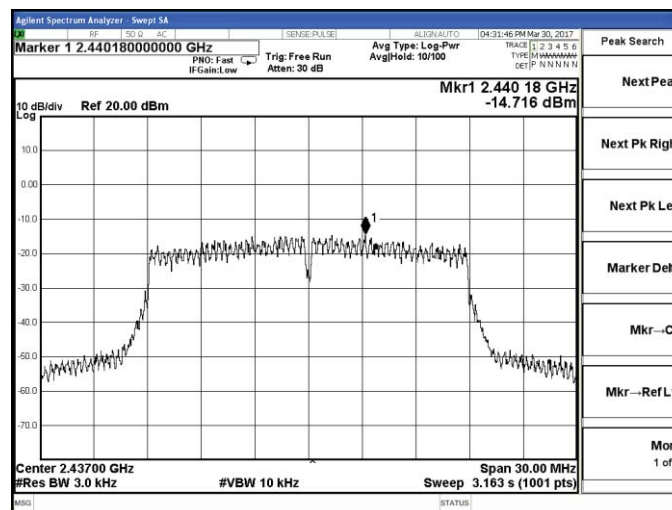


IEEE 802.11n HT20-Channel 6 / 2437 MHz

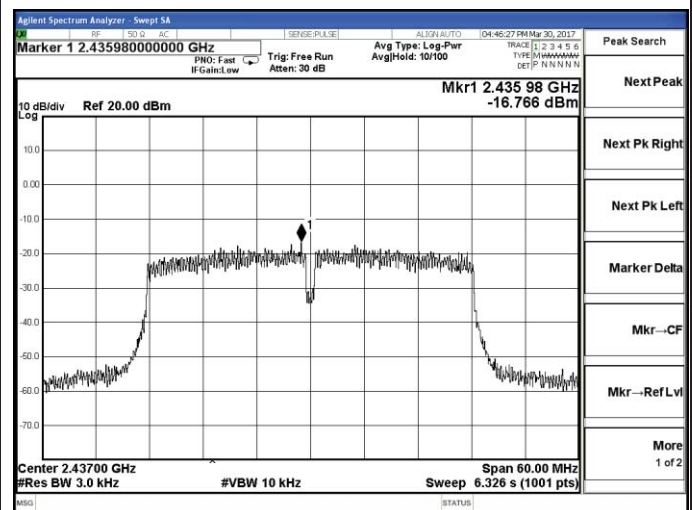

IEEE 802.11n HT40-Channel 6 / 2437 MHz

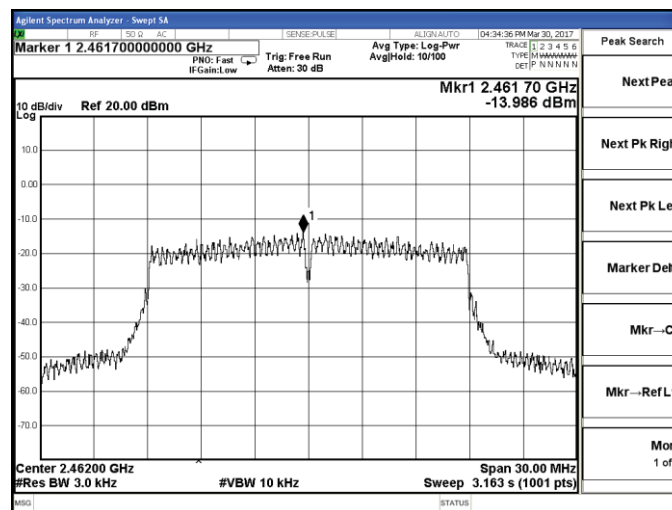

IEEE 802.11n HT20-Channel 11 / 2462 MHz

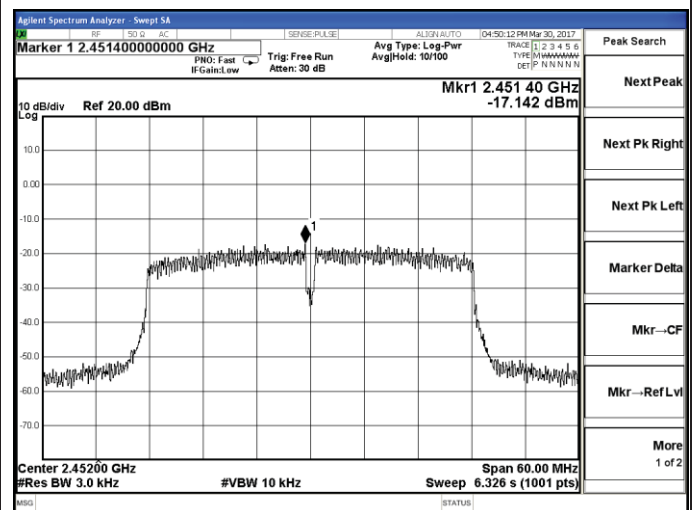

IEEE 802.11n HT40-Channel 9 / 2452 MHz

## 5.4. 6 dB Spectrum Bandwidth Measurement

### 5.4.1. Standard Applicable

According to §15.247(a) (2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.4.2. Measuring Instruments and Setting


Please refer to section 6 of equipment's list in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameter | Setting  |
|--------------------|----------|
| Attenuation        | Auto     |
| Span Frequency     | > RBW    |
| Detector           | Peak     |
| Trace              | Max Hold |
| Sweep Time         | 100ms    |

### 5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to KDB558074.
3. Measured the spectrum width with power higher than 6dB below carrier.

### 5.4.4. Test Setup Layout

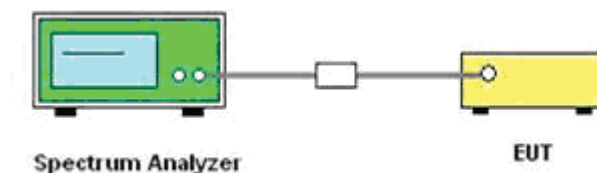

### 5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.4.6. Test Result of 6dB Spectrum Bandwidth


|               |          |                |             |
|---------------|----------|----------------|-------------|
| Temperature   | 25°C     | Humidity       | 60%         |
| Test Engineer | Chaz Liu | Configurations | 802.11b/g/n |

| Test Mode            | Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Limits (MHz) | Verdict |
|----------------------|---------|-----------------|---------------------|--------------|---------|
| IEEE 802.11b         | 1       | 2412            | 10.05               | $\geq 0.500$ | PASS    |
|                      | 6       | 2437            | 10.07               |              |         |
|                      | 11      | 2462            | 10.05               |              |         |
| IEEE 802.11g         | 1       | 2412            | 15.32               | $\geq 0.500$ | PASS    |
|                      | 6       | 2437            | 15.16               |              |         |
|                      | 11      | 2462            | 15.14               |              |         |
| IEEE 802.11n<br>HT20 | 1       | 2412            | 15.12               | $\geq 0.500$ | PASS    |
|                      | 6       | 2437            | 15.16               |              |         |
|                      | 11      | 2462            | 15.16               |              |         |
| IEEE 802.11n<br>HT40 | 3       | 2422            | 35.23               | $\geq 0.500$ | PASS    |
|                      | 6       | 2437            | 35.23               |              |         |
|                      | 9       | 2452            | 35.24               |              |         |

## Remark:


1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. please refer to following plots;

## 6 dB Bandwidth

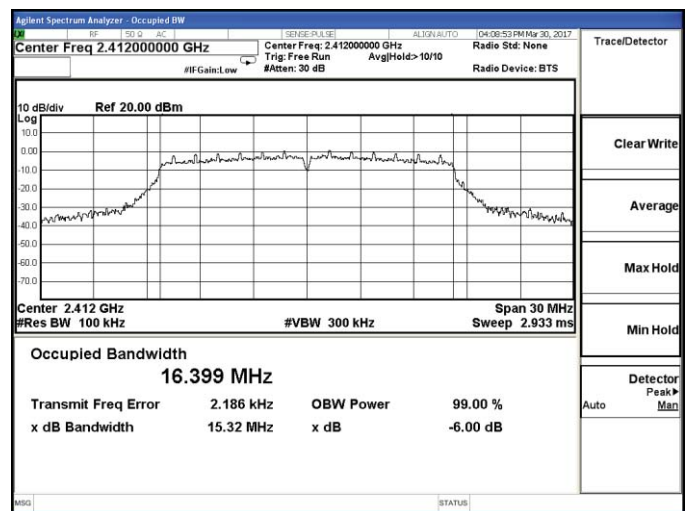



## IEEE 802.11b-Channel 1 / 2412 MHz

## IEEE 802.11g-Channel 1 / 2412 MHz

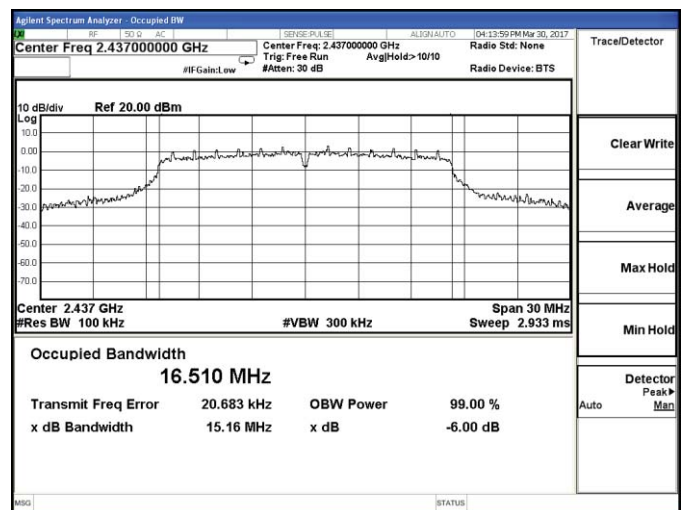

## IEEE 802.11b-Channel 6 / 2437 MHz



## IEEE 802.11g-Channel 6 / 2437 MHz

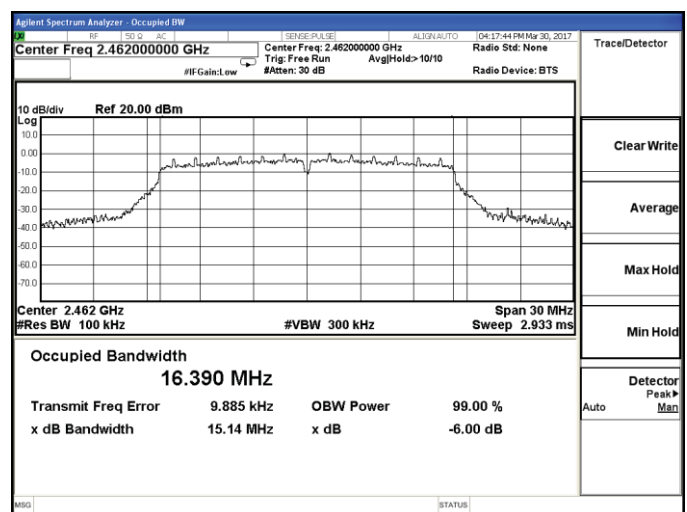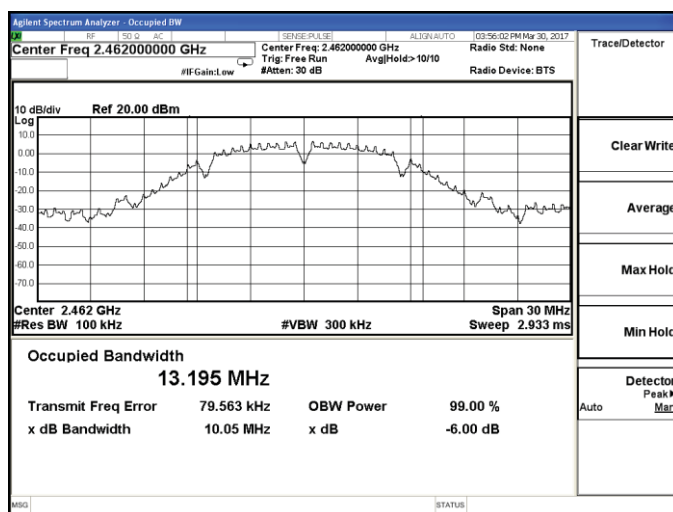


## IEEE 802.11b-Channel 11 / 2462 MHz

## IEEE 802.11g-Channel 11 / 2462 MHz


## 6 dB Bandwidth

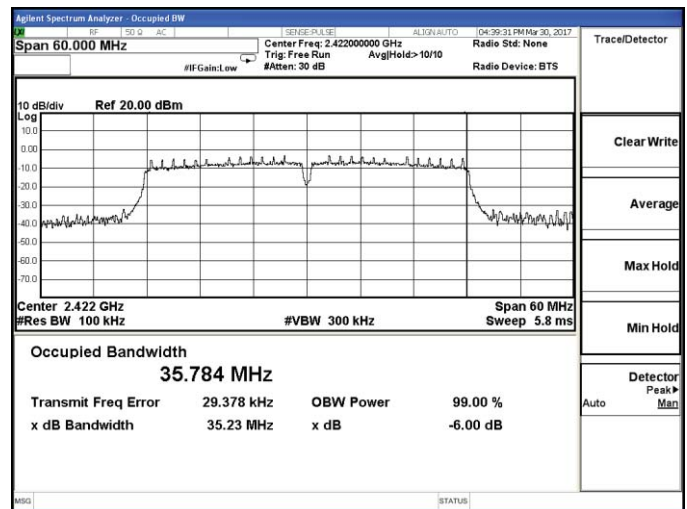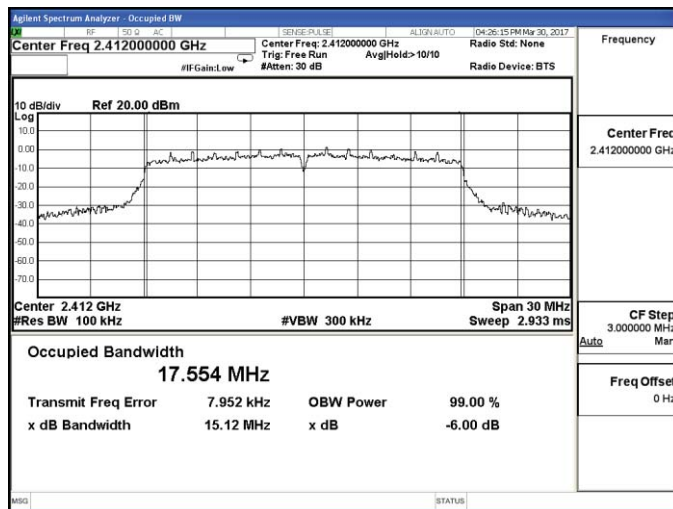


## IEEE 802.11n HT20-Channel 1 / 2412 MHz

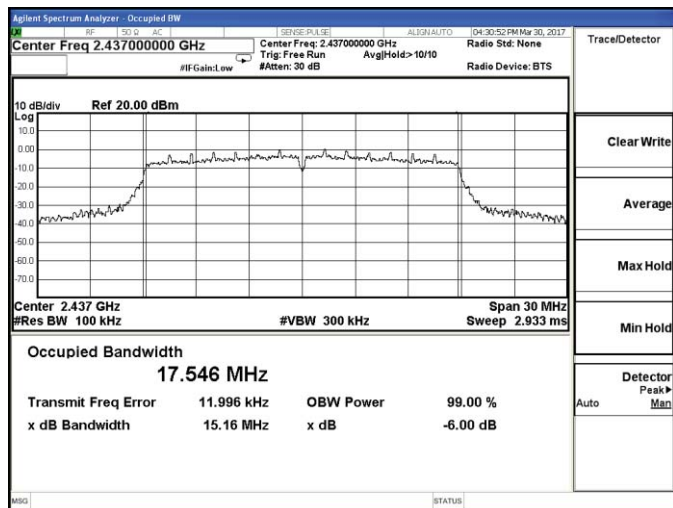


## IEEE 802.11n HT40-Channel 3 / 2422 MHz

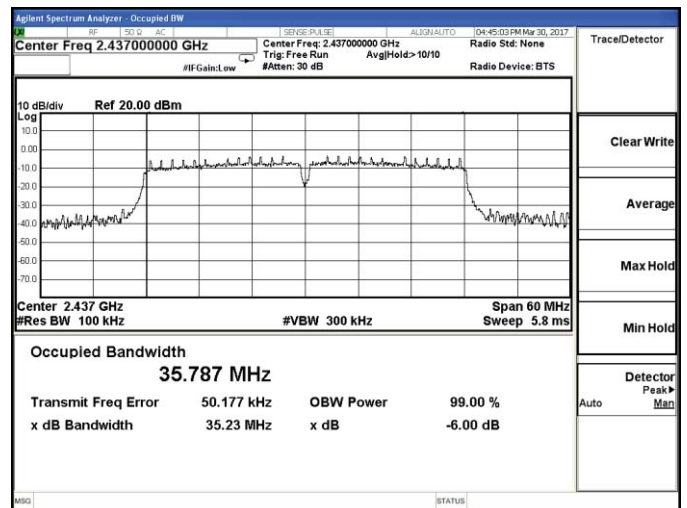

## IEEE 802.11n HT20-Channel 6 / 2437 MHz

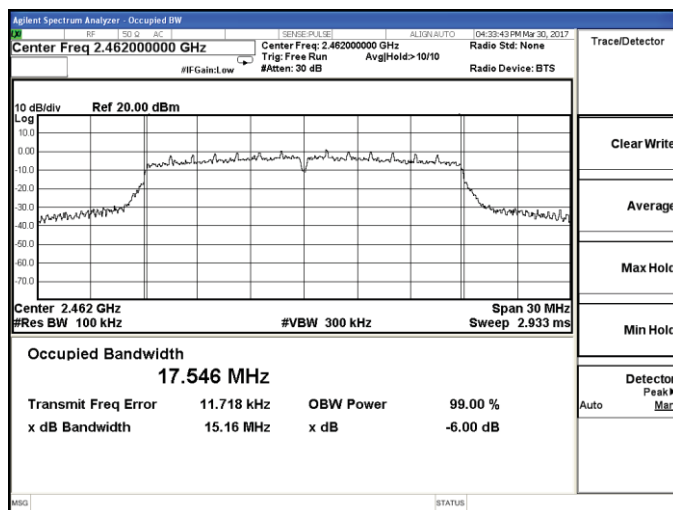

## IEEE 802.11n HT40-Channel 6 / 2437 MHz

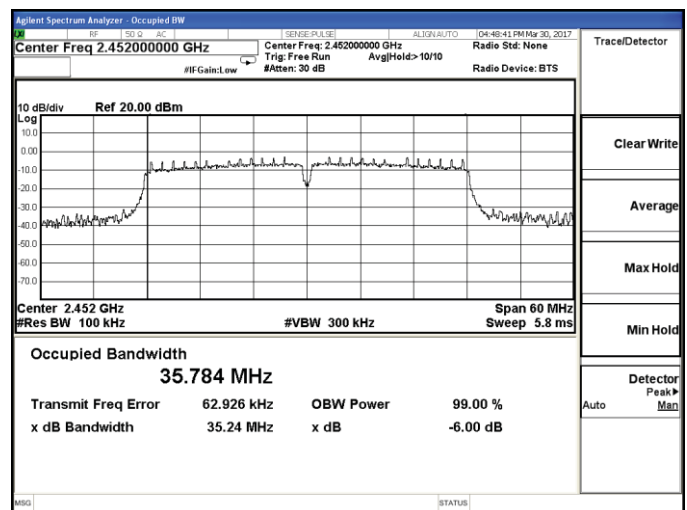

## IEEE 802.11n HT20-Channel 11 / 2462 MHz

## IEEE 802.11n HT40-Channel 9 / 2452 MHz

## 5.5. Radiated Emissions Measurement

### 5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| \1\ 0.495-0.505   | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (\2\)       |
| 13.36-13.41       |                     |               |             |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                        | Setting                                           |
|-------------------------------------------|---------------------------------------------------|
| Attenuation                               | Auto                                              |
| Start Frequency                           | 1000 MHz                                          |
| Stop Frequency                            | 10th carrier harmonic                             |
| RB / VB (Emission in restricted band)     | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |

| Receiver Parameter     | Setting                           |
|------------------------|-----------------------------------|
| Attenuation            | Auto                              |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP/AVG |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 100kHz for QP  |

### 5.5.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### **Premeasurement:**

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### **Final measurement:**

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

**Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


**Premeasurement:**

- The antenna is moved spherical over the EUT in different polarisations of the antenna.


**Final measurement:**

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


## 5.5.4. Test Setup Layout

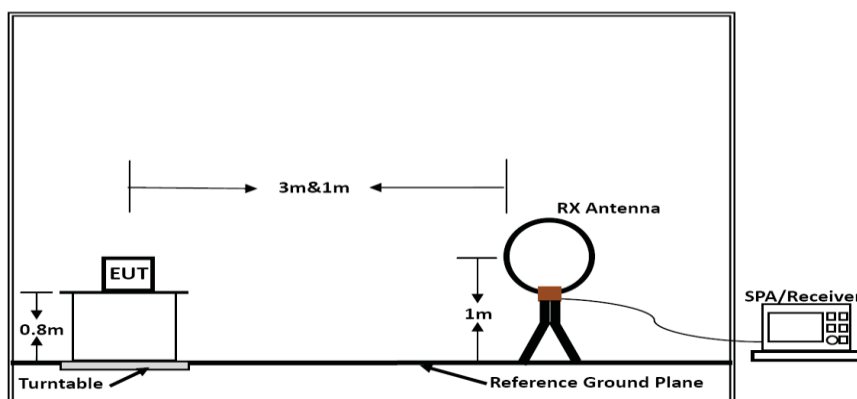

Below 30MHz

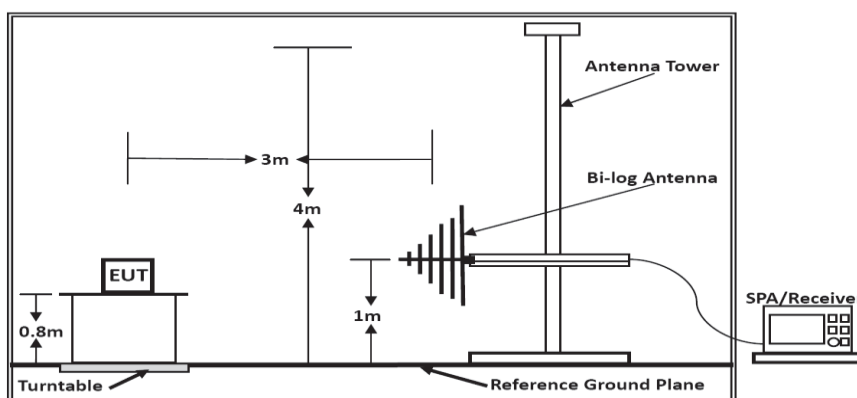

Below 1GHz

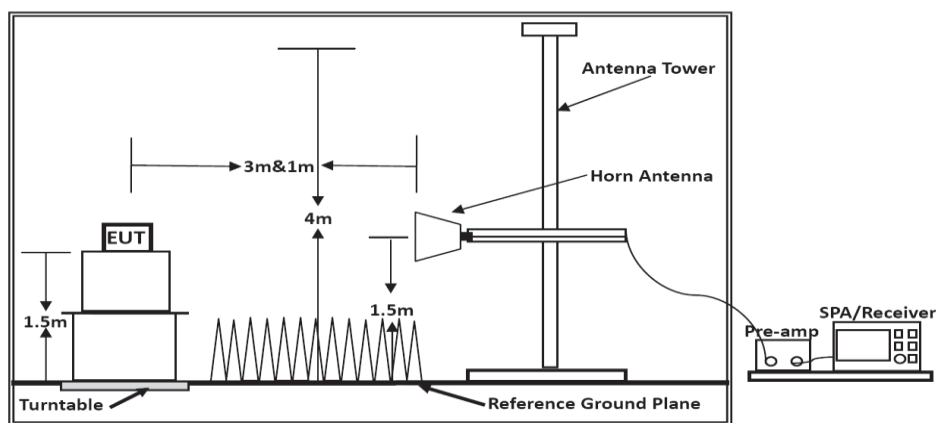

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);  
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

## 5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.5.6. Results of Radiated Emissions (9 KHz~30MHz)

|               |          |                |             |
|---------------|----------|----------------|-------------|
| Temperature   | 25°C     | Humidity       | 60%         |
| Test Engineer | Chaz Liu | Configurations | 802.11b/g/n |

| Freq.<br>(MHz) | Level<br>(dBuV) | Over Limit<br>(dB) | Over Limit<br>(dBuV) | Remark   |
|----------------|-----------------|--------------------|----------------------|----------|
| -              | -               | -                  | -                    | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

## 5.5.7. Results of Radiated Emissions (30MHz~1GHz)

|               |          |                |                  |
|---------------|----------|----------------|------------------|
| Temperature   | 25°C     | Humidity       | 60%              |
| Test Engineer | Chaz Liu | Configurations | 802.11b (Low CH) |

Test result for 802.11b (Low Channel)

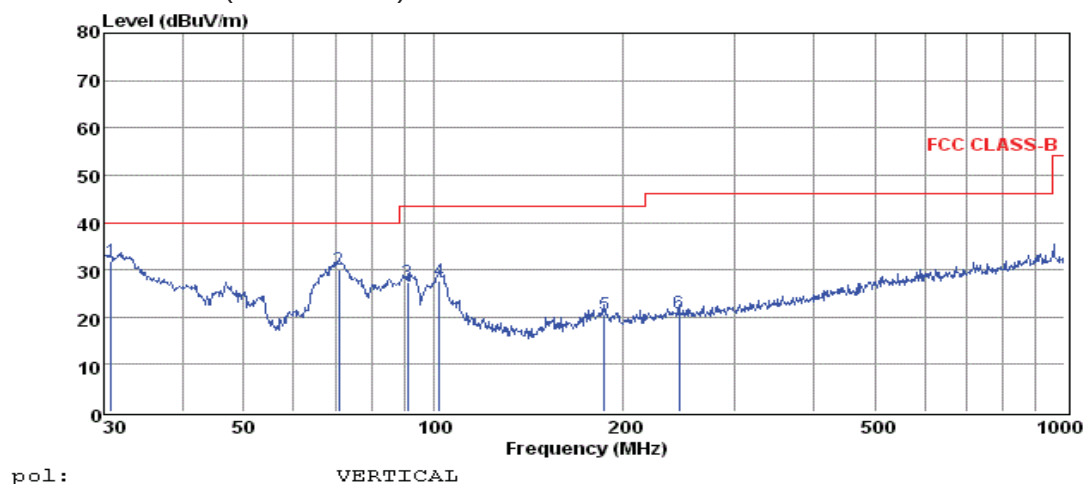


|   | Freq   | Reading | CabLos | Antfac | Measured | Limit  | Over   | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
|   | MHz    | dBuV    | dB     | dB/m   | dBuV/m   | dBuV/m | dB     |        |
| 1 | 30.85  | 19.13   | 0.39   | 12.32  | 31.84    | 40.00  | -8.16  | QP     |
| 2 | 70.83  | 20.88   | 0.55   | 8.51   | 29.94    | 40.00  | -10.06 | QP     |
| 3 | 90.86  | 14.48   | 0.68   | 12.06  | 27.22    | 43.50  | -16.28 | QP     |
| 4 | 102.00 | 14.21   | 0.60   | 12.98  | 27.79    | 43.50  | -15.71 | QP     |
| 5 | 186.44 | 9.33    | 0.98   | 10.25  | 20.56    | 43.50  | -22.94 | QP     |
| 6 | 245.09 | 7.76    | 0.90   | 12.08  | 20.74    | 46.00  | -25.26 | QP     |

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20dB below the official limit are not reported

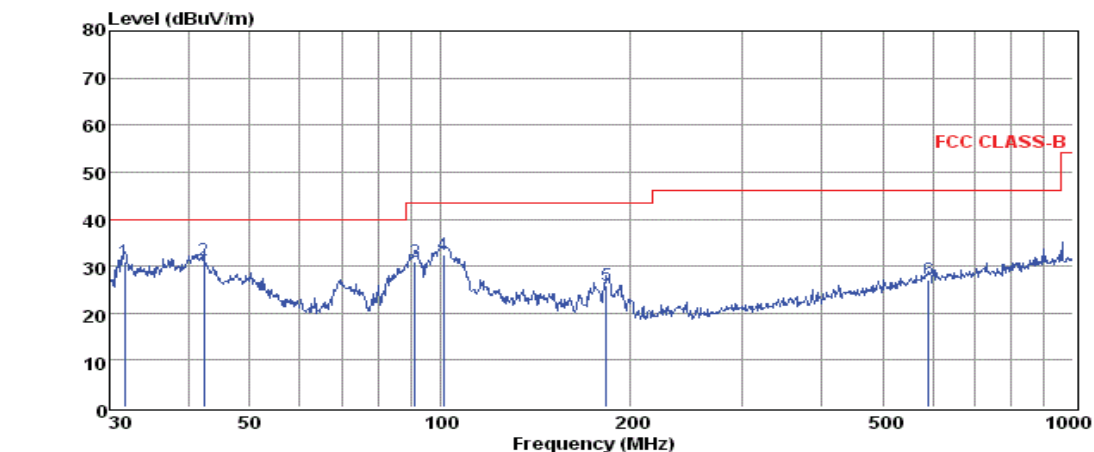

|   | Freq   | Reading | CabLos | Antfac | Measured | Limit  | Over   | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
|   | MHz    | dBuV    | dB     | dB/m   | dBuV/m   | dBuV/m | dB     |        |
| 1 | 31.73  | 18.22   | 0.37   | 12.32  | 30.91    | 40.00  | -9.09  | QP     |
| 2 | 42.30  | 17.06   | 0.50   | 13.57  | 31.13    | 40.00  | -8.87  | QP     |
| 3 | 91.17  | 18.34   | 0.56   | 12.12  | 31.02    | 43.50  | -12.48 | QP     |
| 4 | 101.29 | 18.76   | 0.60   | 13.04  | 32.40    | 43.50  | -11.10 | QP     |
| 5 | 183.20 | 15.27   | 0.70   | 9.96   | 25.93    | 43.50  | -17.57 | QP     |
| 6 | 590.97 | 7.11    | 1.54   | 18.28  | 26.93    | 46.00  | -19.07 | QP     |

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that ate 20db blow the official limit are not reported

Note:

- 1). Pre-scan all mode and recorded the worst case results in this report (802.11b (Low Channel)). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 2). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 5.5.8. Results for Radiated Emissions (Above 1GHz)

Please refer to the following page.

**Above 1GHz**

The result for 802.11b Channel 1 / 2412MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4824.00   | 54.13        | 33.30          | 36.44        | 7.68         | 58.67           | 74           | -15.33    | Peak    | Horizontal |
| 4824.00   | 39.86        | 33.30          | 36.44        | 7.68         | 44.40           | 54           | -9.60     | Average | Horizontal |
| 4824.00   | 51.72        | 33.81          | 36.44        | 7.68         | 56.77           | 74           | -17.23    | Peak    | Vertical   |
| 4824.00   | 40.74        | 33.81          | 36.44        | 7.68         | 45.79           | 54           | -8.21     | Average | Vertical   |
| 7236.00   | 48.10        | 36.87          | 35.28        | 9.32         | 59.01           | 74           | -14.99    | Peak    | Horizontal |
| 7236.00   | 35.89        | 36.87          | 35.28        | 9.32         | 46.80           | 54           | -7.20     | Average | Horizontal |
| 7236.00   | 45.66        | 36.76          | 35.28        | 9.32         | 56.46           | 74           | -17.54    | Peak    | Vertical   |
| 7236.00   | 33.37        | 36.76          | 35.28        | 9.32         | 44.17           | 54           | -9.83     | Average | Vertical   |
| 9648.00   | 41.22        | 38.01          | 35.32        | 9.98         | 53.89           | 74           | -20.11    | Peak    | Horizontal |
| 9648.00   | 30.11        | 38.01          | 35.32        | 9.98         | 42.78           | 54           | -11.22    | Average | Horizontal |
| 9648.00   | 41.84        | 37.73          | 35.32        | 9.98         | 54.23           | 74           | -19.77    | Peak    | Vertical   |
| 9648.00   | 30.31        | 37.73          | 35.32        | 9.98         | 42.70           | 54           | -11.30    | Average | Vertical   |
| 12060.00  | 45.57        | 36.52          | 35.37        | 10.22        | 56.94           | 74           | -17.06    | Peak    | Horizontal |
| 12060.00  | 31.55        | 36.52          | 35.37        | 10.22        | 42.92           | 54           | -11.08    | Average | Horizontal |
| 12060.00  | 39.44        | 36.53          | 35.37        | 10.22        | 50.82           | 74           | -23.18    | Peak    | Vertical   |
| 12060.00  | 32.40        | 36.53          | 35.37        | 10.22        | 43.78           | 54           | -10.22    | Average | Vertical   |
| 14472.00  | 38.76        | 40.34          | 35.66        | 10.34        | 53.78           | 74           | -20.22    | Peak    | Horizontal |
| 14472.00  | 26.00        | 40.34          | 35.66        | 10.34        | 41.02           | 54           | -12.98    | Average | Horizontal |
| 14472.00  | 38.06        | 40.16          | 35.66        | 10.34        | 52.90           | 74           | -21.10    | Peak    | Vertical   |
| 14472.00  | 24.00        | 40.16          | 35.66        | 10.34        | 38.84           | 54           | -15.16    | Average | Vertical   |
| 16884.00  | 38.57        | 38.02          | 35.25        | 10.70        | 52.04           | 74           | -21.96    | Peak    | Horizontal |
| 16884.00  | 23.83        | 38.02          | 35.25        | 10.70        | 37.30           | 54           | -16.70    | Average | Horizontal |
| 16884.00  | 37.27        | 37.93          | 35.25        | 10.70        | 50.65           | 74           | -23.35    | Peak    | Vertical   |
| 16884.00  | 25.20        | 37.93          | 35.25        | 10.70        | 38.58           | 54           | -15.42    | Average | Vertical   |

The result for 802.11b Channel 6 / 2437MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00   | 53.62        | 33.3           | 36.44        | 7.68         | 58.16           | 74           | -15.84    | Peak    | Horizontal |
| 4874.00   | 39.54        | 33.3           | 36.44        | 7.68         | 44.08           | 54           | -9.92     | Average | Horizontal |
| 4874.00   | 52.29        | 33.46          | 36.44        | 7.68         | 56.99           | 74           | -17.01    | Peak    | Vertical   |
| 4874.00   | 40.83        | 33.46          | 36.44        | 7.68         | 45.53           | 54           | -8.47     | Average | Vertical   |
| 7311.00   | 49.28        | 36.92          | 35.12        | 9.36         | 60.44           | 74           | -13.56    | Peak    | Horizontal |
| 7311.00   | 35.02        | 36.92          | 35.12        | 9.36         | 46.18           | 54           | -7.82     | Average | Horizontal |
| 7311.00   | 45.31        | 36.75          | 35.12        | 9.36         | 56.30           | 74           | -17.70    | Peak    | Vertical   |
| 7311.00   | 34.08        | 36.75          | 35.12        | 9.36         | 45.07           | 54           | -8.93     | Average | Vertical   |
| 9748.00   | 42.25        | 38.06          | 35.22        | 10.01        | 55.10           | 74           | -18.90    | Peak    | Horizontal |
| 9748.00   | 30.03        | 38.06          | 35.22        | 10.01        | 42.88           | 54           | -11.12    | Average | Horizontal |
| 9748.00   | 43.01        | 38.02          | 35.22        | 10.01        | 55.82           | 74           | -18.18    | Peak    | Vertical   |
| 9748.00   | 30.82        | 38.02          | 35.22        | 10.01        | 43.63           | 54           | -10.37    | Average | Vertical   |
| 12185.00  | 45.27        | 36.52          | 35.37        | 10.22        | 56.64           | 74           | -17.36    | Peak    | Horizontal |
| 12185.00  | 30.71        | 36.52          | 35.37        | 10.22        | 42.08           | 54           | -11.92    | Average | Horizontal |
| 12185.00  | 39.24        | 36.68          | 35.37        | 10.22        | 50.77           | 74           | -23.23    | Peak    | Vertical   |
| 12185.00  | 31.69        | 36.68          | 35.37        | 10.22        | 43.22           | 54           | -10.78    | Average | Vertical   |
| 14622.00  | 38.32        | 40.34          | 35.66        | 10.34        | 53.34           | 74           | -20.66    | Peak    | Horizontal |
| 14622.00  | 25.87        | 40.34          | 35.66        | 10.34        | 40.89           | 54           | -13.11    | Average | Horizontal |
| 14622.00  | 36.81        | 40.27          | 35.66        | 10.34        | 51.76           | 74           | -22.24    | Peak    | Vertical   |
| 14622.00  | 23.58        | 40.27          | 35.66        | 10.34        | 38.53           | 54           | -15.47    | Average | Vertical   |
| 17059.00  | 38.99        | 40.11          | 35.05        | 11.00        | 55.05           | 74           | -18.95    | Peak    | Horizontal |
| 17059.00  | 25.49        | 40.11          | 35.05        | 11.00        | 41.55           | 54           | -12.45    | Average | Horizontal |
| 17059.00  | 38.39        | 40.00          | 35.05        | 11.00        | 54.34           | 74           | -19.66    | Peak    | Vertical   |
| 17059.00  | 24.18        | 40.00          | 35.05        | 11.00        | 40.13           | 54           | -13.87    | Average | Vertical   |

The result for 802.11b Channel 11 / 2462MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4924.00   | 55.06        | 33.55          | 36.41        | 7.74         | 59.94           | 74           | -14.06    | Peak    | Horizontal |
| 4924.00   | 40.75        | 33.55          | 36.41        | 7.74         | 45.63           | 54           | -8.37     | Average | Horizontal |
| 4924.00   | 52.55        | 33.43          | 36.41        | 7.74         | 57.31           | 74           | -16.69    | Peak    | Vertical   |
| 4924.00   | 41.33        | 33.43          | 36.41        | 7.74         | 46.09           | 54           | -7.91     | Average | Vertical   |
| 7386.00   | 48.21        | 36.92          | 35.12        | 9.36         | 59.37           | 74           | -14.63    | Peak    | Horizontal |
| 7386.00   | 35.81        | 36.92          | 35.12        | 9.36         | 46.97           | 54           | -7.03     | Average | Horizontal |
| 7386.00   | 45.87        | 37.04          | 35.12        | 9.36         | 57.15           | 74           | -16.85    | Peak    | Vertical   |
| 7386.00   | 33.08        | 37.04          | 35.12        | 9.36         | 44.36           | 54           | -9.64     | Average | Vertical   |
| 9848.00   | 42.59        | 38.11          | 35.12        | 10.04        | 55.62           | 74           | -18.38    | Peak    | Horizontal |
| 9848.00   | 30.83        | 38.11          | 35.12        | 10.04        | 43.86           | 54           | -10.14    | Average | Horizontal |
| 9848.00   | 42.36        | 38.13          | 35.12        | 10.04        | 55.41           | 74           | -18.59    | Peak    | Vertical   |
| 9848.00   | 30.46        | 38.13          | 35.12        | 10.04        | 43.51           | 54           | -10.49    | Average | Vertical   |
| 12310.00  | 43.73        | 36.52          | 35.37        | 10.22        | 55.10           | 74           | -18.90    | Peak    | Horizontal |
| 12310.00  | 31.55        | 36.52          | 35.37        | 10.22        | 42.92           | 54           | -11.08    | Average | Horizontal |
| 12310.00  | 40.81        | 36.57          | 35.37        | 10.22        | 52.23           | 74           | -21.77    | Peak    | Vertical   |
| 12310.00  | 31.87        | 36.57          | 35.37        | 10.22        | 43.29           | 54           | -10.71    | Average | Vertical   |
| 14772.00  | 39.36        | 40.34          | 35.66        | 10.34        | 54.38           | 74           | -19.62    | Peak    | Horizontal |
| 14772.00  | 25.66        | 40.34          | 35.66        | 10.34        | 40.68           | 54           | -13.32    | Average | Horizontal |
| 14772.00  | 37.51        | 40.16          | 35.66        | 10.34        | 52.35           | 74           | -21.65    | Peak    | Vertical   |
| 14772.00  | 23.35        | 40.16          | 35.66        | 10.34        | 38.19           | 54           | -15.81    | Average | Vertical   |
| 17234.00  | 37.98        | 40.11          | 35.05        | 11.00        | 54.04           | 74           | -19.96    | Peak    | Horizontal |
| 17234.00  | 24.57        | 40.11          | 35.05        | 11.00        | 40.63           | 54           | -13.37    | Average | Horizontal |
| 17234.00  | 38.21        | 39.86          | 35.05        | 11.00        | 54.02           | 74           | -19.98    | Peak    | Vertical   |
| 17234.00  | 25.36        | 39.86          | 35.05        | 11.00        | 41.17           | 54           | -12.83    | Average | Vertical   |

The result for 802.11g Channel 1 / 2412MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4824.00   | 55.49        | 33.3           | 36.44        | 7.68         | 60.03           | 74           | -13.97    | Peak    | Horizontal |
| 4824.00   | 40.29        | 33.3           | 36.44        | 7.68         | 44.83           | 54           | -9.17     | Average | Horizontal |
| 4824.00   | 52.34        | 33.81          | 36.44        | 7.68         | 57.39           | 74           | -16.61    | Peak    | Vertical   |
| 4824.00   | 40.47        | 33.81          | 36.44        | 7.68         | 45.52           | 54           | -8.48     | Average | Vertical   |
| 7236.00   | 49.49        | 36.87          | 35.28        | 9.32         | 60.40           | 74           | -13.60    | Peak    | Horizontal |
| 7236.00   | 36.21        | 36.87          | 35.28        | 9.32         | 47.12           | 54           | -6.88     | Average | Horizontal |
| 7236.00   | 44.60        | 36.76          | 35.28        | 9.32         | 55.40           | 74           | -18.60    | Peak    | Vertical   |
| 7236.00   | 32.48        | 36.76          | 35.28        | 9.32         | 43.28           | 54           | -10.72    | Average | Vertical   |
| 9648.00   | 42.69        | 38.01          | 35.32        | 9.98         | 55.36           | 74           | -18.64    | Peak    | Horizontal |
| 9648.00   | 29.56        | 38.01          | 35.32        | 9.98         | 42.23           | 54           | -11.77    | Average | Horizontal |
| 9648.00   | 42.43        | 37.73          | 35.32        | 9.98         | 54.82           | 74           | -19.18    | Peak    | Vertical   |
| 9648.00   | 30.36        | 37.73          | 35.32        | 9.98         | 42.75           | 54           | -11.25    | Average | Vertical   |
| 12060.00  | 43.73        | 36.52          | 35.37        | 10.22        | 55.10           | 74           | -18.90    | Peak    | Horizontal |
| 12060.00  | 31.99        | 36.52          | 35.37        | 10.22        | 43.36           | 54           | -10.64    | Average | Horizontal |
| 12060.00  | 39.41        | 36.53          | 35.37        | 10.22        | 50.79           | 74           | -23.21    | Peak    | Vertical   |
| 12060.00  | 31.23        | 36.53          | 35.37        | 10.22        | 42.61           | 54           | -11.39    | Average | Vertical   |
| 14472.00  | 39.10        | 40.34          | 35.66        | 10.34        | 54.12           | 74           | -19.88    | Peak    | Horizontal |
| 14472.00  | 25.65        | 40.34          | 35.66        | 10.34        | 40.67           | 54           | -13.33    | Average | Horizontal |
| 14472.00  | 37.71        | 40.16          | 35.66        | 10.34        | 52.55           | 74           | -21.45    | Peak    | Vertical   |
| 14472.00  | 22.54        | 40.16          | 35.66        | 10.34        | 37.38           | 54           | -16.62    | Average | Vertical   |
| 16884.00  | 37.63        | 38.02          | 35.25        | 10.70        | 51.10           | 74           | -22.90    | Peak    | Horizontal |
| 16884.00  | 23.60        | 38.02          | 35.25        | 10.70        | 37.07           | 54           | -16.93    | Average | Horizontal |
| 16884.00  | 37.77        | 37.93          | 35.25        | 10.70        | 51.15           | 74           | -22.85    | Peak    | Vertical   |
| 16884.00  | 24.99        | 37.93          | 35.25        | 10.70        | 38.37           | 54           | -15.63    | Average | Vertical   |

The result for 802.11g Channel 6 / 2437MHz

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00   | 54.42        | 33.3           | 36.44        | 7.68         | 58.96           | 74           | -15.04    | Peak    | Horizontal |
| 4874.00   | 40.45        | 33.3           | 36.44        | 7.68         | 44.99           | 54           | -9.01     | Average | Horizontal |
| 4874.00   | 52.68        | 33.46          | 36.44        | 7.68         | 57.38           | 74           | -16.62    | Peak    | Vertical   |
| 4874.00   | 40.95        | 33.46          | 36.44        | 7.68         | 45.65           | 54           | -8.35     | Average | Vertical   |
| 7311.00   | 49.24        | 36.92          | 35.12        | 9.36         | 60.40           | 74           | -13.60    | Peak    | Horizontal |
| 7311.00   | 34.50        | 36.92          | 35.12        | 9.36         | 45.66           | 54           | -8.34     | Average | Horizontal |
| 7311.00   | 44.30        | 36.75          | 35.12        | 9.36         | 55.29           | 74           | -18.71    | Peak    | Vertical   |
| 7311.00   | 33.46        | 36.75          | 35.12        | 9.36         | 44.45           | 54           | -9.55     | Average | Vertical   |
| 9748.00   | 42.75        | 38.06          | 35.22        | 10.01        | 55.60           | 74           | -18.40    | Peak    | Horizontal |
| 9748.00   | 30.67        | 38.06          | 35.22        | 10.01        | 43.52           | 54           | -10.48    | Average | Horizontal |
| 9748.00   | 41.77        | 38.02          | 35.22        | 10.01        | 54.58           | 74           | -19.42    | Peak    | Vertical   |
| 9748.00   | 31.22        | 38.02          | 35.22        | 10.01        | 44.03           | 54           | -9.97     | Average | Vertical   |
| 12185.00  | 43.93        | 36.52          | 35.37        | 10.22        | 55.30           | 74           | -18.70    | Peak    | Horizontal |
| 12185.00  | 31.37        | 36.52          | 35.37        | 10.22        | 42.74           | 54           | -11.26    | Average | Horizontal |
| 12185.00  | 40.96        | 36.68          | 35.37        | 10.22        | 52.49           | 74           | -21.51    | Peak    | Vertical   |
| 12185.00  | 31.57        | 36.68          | 35.37        | 10.22        | 43.10           | 54           | -10.90    | Average | Vertical   |
| 14622.00  | 38.93        | 40.34          | 35.66        | 10.34        | 53.95           | 74           | -20.05    | Peak    | Horizontal |
| 14622.00  | 25.98        | 40.34          | 35.66        | 10.34        | 41.00           | 54           | -13.00    | Average | Horizontal |
| 14622.00  | 37.78        | 40.27          | 35.66        | 10.34        | 52.73           | 74           | -21.27    | Peak    | Vertical   |
| 14622.00  | 22.84        | 40.27          | 35.66        | 10.34        | 37.79           | 54           | -16.21    | Average | Vertical   |
| 17059.00  | 37.84        | 40.11          | 35.05        | 11.00        | 53.90           | 74           | -20.10    | Peak    | Horizontal |
| 17059.00  | 25.27        | 40.11          | 35.05        | 11.00        | 41.33           | 54           | -12.67    | Average | Horizontal |
| 17059.00  | 38.10        | 40             | 35.05        | 11.00        | 54.05           | 74           | -19.95    | Peak    | Vertical   |
| 17059.00  | 25.74        | 40             | 35.05        | 11.00        | 41.69           | 54           | -12.31    | Average | Vertical   |

The result for 802.11g Channel 11 / 2462MHz

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4924.00   | 54.85        | 33.55          | 36.41        | 7.74         | 59.73           | 74           | -14.27    | Peak    | Horizontal |
| 4924.00   | 40.30        | 33.55          | 36.41        | 7.74         | 45.18           | 54           | -8.82     | Average | Horizontal |
| 4924.00   | 52.12        | 33.43          | 36.41        | 7.74         | 56.88           | 74           | -17.12    | Peak    | Vertical   |
| 4924.00   | 41.50        | 33.43          | 36.41        | 7.74         | 46.26           | 54           | -7.74     | Average | Vertical   |
| 7386.00   | 49.60        | 36.92          | 35.12        | 9.36         | 60.76           | 74           | -13.24    | Peak    | Horizontal |
| 7386.00   | 34.91        | 36.92          | 35.12        | 9.36         | 46.07           | 54           | -7.93     | Average | Horizontal |
| 7386.00   | 44.99        | 37.04          | 35.12        | 9.36         | 56.27           | 74           | -17.73    | Peak    | Vertical   |
| 7386.00   | 32.70        | 37.04          | 35.12        | 9.36         | 43.98           | 54           | -10.02    | Average | Vertical   |
| 9848.00   | 42.10        | 38.11          | 35.12        | 10.04        | 55.13           | 74           | -18.87    | Peak    | Horizontal |
| 9848.00   | 30.50        | 38.11          | 35.12        | 10.04        | 43.53           | 54           | -10.47    | Average | Horizontal |
| 9848.00   | 42.25        | 38.13          | 35.12        | 10.04        | 55.30           | 74           | -18.70    | Peak    | Vertical   |
| 9848.00   | 29.72        | 38.13          | 35.12        | 10.04        | 42.77           | 54           | -11.23    | Average | Vertical   |
| 12310.00  | 44.82        | 36.52          | 35.37        | 10.22        | 56.19           | 74           | -17.81    | Peak    | Horizontal |
| 12310.00  | 30.50        | 36.52          | 35.37        | 10.22        | 41.87           | 54           | -12.13    | Average | Horizontal |
| 12310.00  | 40.99        | 36.57          | 35.37        | 10.22        | 52.41           | 74           | -21.59    | Peak    | Vertical   |
| 12310.00  | 31.09        | 36.57          | 35.37        | 10.22        | 42.51           | 54           | -11.49    | Average | Vertical   |
| 14772.00  | 37.41        | 40.34          | 35.66        | 10.34        | 52.43           | 74           | -21.57    | Peak    | Horizontal |
| 14772.00  | 26.42        | 40.34          | 35.66        | 10.34        | 41.44           | 54           | -12.56    | Average | Horizontal |
| 14772.00  | 37.74        | 40.16          | 35.66        | 10.34        | 52.58           | 74           | -21.42    | Peak    | Vertical   |
| 14772.00  | 23.81        | 40.16          | 35.66        | 10.34        | 38.65           | 54           | -15.35    | Average | Vertical   |
| 17234.00  | 37.29        | 40.11          | 35.05        | 11.00        | 53.35           | 74           | -20.65    | Peak    | Horizontal |
| 17234.00  | 23.99        | 40.11          | 35.05        | 11.00        | 40.05           | 54           | -13.95    | Average | Horizontal |
| 17234.00  | 38.66        | 39.86          | 35.05        | 11.00        | 54.47           | 74           | -19.53    | Peak    | Vertical   |
| 17234.00  | 24.43        | 39.86          | 35.05        | 11.00        | 40.24           | 54           | -13.76    | Average | Vertical   |

The result for 802.11n HT20 Channel 1 / 2412MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4824.00   | 53.66        | 33.3           | 36.44        | 7.68         | 58.20           | 74           | -15.80    | Peak    | Horizontal |
| 4824.00   | 40.33        | 33.3           | 36.44        | 7.68         | 44.87           | 54           | -9.13     | Average | Horizontal |
| 4824.00   | 52.75        | 33.81          | 36.44        | 7.68         | 57.80           | 74           | -16.20    | Peak    | Vertical   |
| 4824.00   | 40.36        | 33.81          | 36.44        | 7.68         | 45.41           | 54           | -8.59     | Average | Vertical   |
| 7236.00   | 49.57        | 36.87          | 35.28        | 9.32         | 60.48           | 74           | -13.52    | Peak    | Horizontal |
| 7236.00   | 35.67        | 36.87          | 35.28        | 9.32         | 46.58           | 54           | -7.42     | Average | Horizontal |
| 7236.00   | 45.93        | 36.76          | 35.28        | 9.32         | 56.73           | 74           | -17.27    | Peak    | Vertical   |
| 7236.00   | 33.40        | 36.76          | 35.28        | 9.32         | 44.20           | 54           | -9.80     | Average | Vertical   |
| 9648.00   | 42.38        | 38.01          | 35.32        | 9.98         | 55.05           | 74           | -18.95    | Peak    | Horizontal |
| 9648.00   | 29.23        | 38.01          | 35.32        | 9.98         | 41.90           | 54           | -12.10    | Average | Horizontal |
| 9648.00   | 42.35        | 37.73          | 35.32        | 9.98         | 54.74           | 74           | -19.26    | Peak    | Vertical   |
| 9648.00   | 30.95        | 37.73          | 35.32        | 9.98         | 43.34           | 54           | -10.66    | Average | Vertical   |
| 12060.00  | 45.53        | 36.52          | 35.37        | 10.22        | 56.90           | 74           | -17.10    | Peak    | Horizontal |
| 12060.00  | 31.11        | 36.52          | 35.37        | 10.22        | 42.48           | 54           | -11.52    | Average | Horizontal |
| 12060.00  | 39.21        | 36.53          | 35.37        | 10.22        | 50.59           | 74           | -23.41    | Peak    | Vertical   |
| 12060.00  | 32.81        | 36.53          | 35.37        | 10.22        | 44.19           | 54           | -9.81     | Average | Vertical   |
| 14472.00  | 38.38        | 40.34          | 35.66        | 10.34        | 53.40           | 74           | -20.60    | Peak    | Horizontal |
| 14472.00  | 25.82        | 40.34          | 35.66        | 10.34        | 40.84           | 54           | -13.16    | Average | Horizontal |
| 14472.00  | 38.03        | 40.16          | 35.66        | 10.34        | 52.87           | 74           | -21.13    | Peak    | Vertical   |
| 14472.00  | 23.06        | 40.16          | 35.66        | 10.34        | 37.90           | 54           | -16.10    | Average | Vertical   |
| 16884.00  | 37.55        | 38.02          | 35.25        | 10.70        | 51.02           | 74           | -22.98    | Peak    | Horizontal |
| 16884.00  | 24.29        | 38.02          | 35.25        | 10.70        | 37.76           | 54           | -16.24    | Average | Horizontal |
| 16884.00  | 37.87        | 37.93          | 35.25        | 10.70        | 51.25           | 74           | -22.75    | Peak    | Vertical   |
| 16884.00  | 25.71        | 37.93          | 35.25        | 10.70        | 39.09           | 54           | -14.91    | Average | Vertical   |

The result for 802.11n HT20 Channel 6 / 2437MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00   | 54.13        | 33.3           | 36.44        | 7.68         | 58.67           | 74           | -15.33    | Peak    | Horizontal |
| 4874.00   | 40.35        | 33.3           | 36.44        | 7.68         | 44.89           | 54           | -9.11     | Average | Horizontal |
| 4874.00   | 51.70        | 33.46          | 36.44        | 7.68         | 56.40           | 74           | -17.60    | Peak    | Vertical   |
| 4874.00   | 40.22        | 33.46          | 36.44        | 7.68         | 44.92           | 54           | -9.08     | Average | Vertical   |
| 7311.00   | 49.24        | 36.92          | 35.12        | 9.36         | 60.40           | 74           | -13.60    | Peak    | Horizontal |
| 7311.00   | 35.05        | 36.92          | 35.12        | 9.36         | 46.21           | 54           | -7.79     | Average | Horizontal |
| 7311.00   | 44.13        | 36.75          | 35.12        | 9.36         | 55.12           | 74           | -18.88    | Peak    | Vertical   |
| 7311.00   | 33.07        | 36.75          | 35.12        | 9.36         | 44.06           | 54           | -9.94     | Average | Vertical   |
| 9748.00   | 41.64        | 38.06          | 35.22        | 10.01        | 54.49           | 74           | -19.51    | Peak    | Horizontal |
| 9748.00   | 29.94        | 38.06          | 35.22        | 10.01        | 42.79           | 54           | -11.21    | Average | Horizontal |
| 9748.00   | 42.98        | 38.02          | 35.22        | 10.01        | 55.79           | 74           | -18.21    | Peak    | Vertical   |
| 9748.00   | 30.49        | 38.02          | 35.22        | 10.01        | 43.30           | 54           | -10.70    | Average | Vertical   |
| 12185.00  | 45.69        | 36.52          | 35.37        | 10.22        | 57.06           | 74           | -16.94    | Peak    | Horizontal |
| 12185.00  | 31.40        | 36.52          | 35.37        | 10.22        | 42.77           | 54           | -11.23    | Average | Horizontal |
| 12185.00  | 39.74        | 36.68          | 35.37        | 10.22        | 51.27           | 74           | -22.73    | Peak    | Vertical   |
| 12185.00  | 31.13        | 36.68          | 35.37        | 10.22        | 42.66           | 54           | -11.34    | Average | Vertical   |
| 14622.00  | 38.80        | 40.34          | 35.66        | 10.34        | 53.82           | 74           | -20.18    | Peak    | Horizontal |
| 14622.00  | 26.38        | 40.34          | 35.66        | 10.34        | 41.40           | 54           | -12.60    | Average | Horizontal |
| 14622.00  | 36.76        | 40.27          | 35.66        | 10.34        | 51.71           | 74           | -22.29    | Peak    | Vertical   |
| 14622.00  | 22.58        | 40.27          | 35.66        | 10.34        | 37.53           | 54           | -16.47    | Average | Vertical   |
| 17059.00  | 37.42        | 40.11          | 35.05        | 11.00        | 53.48           | 74           | -20.52    | Peak    | Horizontal |
| 17059.00  | 25.15        | 40.11          | 35.05        | 11.00        | 41.21           | 54           | -12.79    | Average | Horizontal |
| 17059.00  | 39.02        | 40             | 35.05        | 11.00        | 54.97           | 74           | -19.03    | Peak    | Vertical   |
| 17059.00  | 24.92        | 40             | 35.05        | 11.00        | 40.87           | 54           | -13.13    | Average | Vertical   |

The result for 802.11n HT20 Channel 11 / 2462MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4924.00   | 55.09        | 33.55          | 36.41        | 7.74         | 59.97           | 74           | -14.03    | Peak    | Horizontal |
| 4924.00   | 40.05        | 33.55          | 36.41        | 7.74         | 44.93           | 54           | -9.07     | Average | Horizontal |
| 4924.00   | 53.21        | 33.43          | 36.41        | 7.74         | 57.97           | 74           | -16.03    | Peak    | Vertical   |
| 4924.00   | 40.72        | 33.43          | 36.41        | 7.74         | 45.48           | 54           | -8.52     | Average | Vertical   |
| 7386.00   | 47.83        | 36.92          | 35.12        | 9.36         | 58.99           | 74           | -15.01    | Peak    | Horizontal |
| 7386.00   | 35.76        | 36.92          | 35.12        | 9.36         | 46.92           | 54           | -7.08     | Average | Horizontal |
| 7386.00   | 44.33        | 37.04          | 35.12        | 9.36         | 55.61           | 74           | -18.39    | Peak    | Vertical   |
| 7386.00   | 33.05        | 37.04          | 35.12        | 9.36         | 44.33           | 54           | -9.67     | Average | Vertical   |
| 9848.00   | 42.46        | 38.11          | 35.12        | 10.04        | 55.49           | 74           | -18.51    | Peak    | Horizontal |
| 9848.00   | 30.03        | 38.11          | 35.12        | 10.04        | 43.06           | 54           | -10.94    | Average | Horizontal |
| 9848.00   | 41.72        | 38.13          | 35.12        | 10.04        | 54.77           | 74           | -19.23    | Peak    | Vertical   |
| 9848.00   | 29.26        | 38.13          | 35.12        | 10.04        | 42.31           | 54           | -11.69    | Average | Vertical   |
| 12310.00  | 44.49        | 36.52          | 35.37        | 10.22        | 55.86           | 74           | -18.14    | Peak    | Horizontal |
| 12310.00  | 32.04        | 36.52          | 35.37        | 10.22        | 43.41           | 54           | -10.59    | Average | Horizontal |
| 12310.00  | 40.37        | 36.57          | 35.37        | 10.22        | 51.79           | 74           | -22.21    | Peak    | Vertical   |
| 12310.00  | 32.92        | 36.57          | 35.37        | 10.22        | 44.34           | 54           | -9.66     | Average | Vertical   |
| 14772.00  | 39.26        | 40.34          | 35.66        | 10.34        | 54.28           | 74           | -19.72    | Peak    | Horizontal |
| 14772.00  | 25.31        | 40.34          | 35.66        | 10.34        | 40.33           | 54           | -13.67    | Average | Horizontal |
| 14772.00  | 38.32        | 40.16          | 35.66        | 10.34        | 53.16           | 74           | -20.84    | Peak    | Vertical   |
| 14772.00  | 23.42        | 40.16          | 35.66        | 10.34        | 38.26           | 54           | -15.74    | Average | Vertical   |
| 17234.00  | 37.88        | 40.11          | 35.05        | 11.00        | 53.94           | 74           | -20.06    | Peak    | Horizontal |
| 17234.00  | 24.74        | 40.11          | 35.05        | 11.00        | 40.80           | 54           | -13.20    | Average | Horizontal |
| 17234.00  | 38.39        | 39.86          | 35.05        | 11.00        | 54.20           | 74           | -19.80    | Peak    | Vertical   |
| 17234.00  | 25.41        | 39.86          | 35.05        | 11.00        | 41.22           | 54           | -12.78    | Average | Vertical   |

The result for 802.11n HT40 Channel 3 / 2422MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4844.00   | 55.32        | 33.30          | 36.44        | 7.68         | 59.86           | 74           | -14.14    | Peak    | Horizontal |
| 4844.00   | 40.70        | 33.30          | 36.44        | 7.68         | 45.24           | 54           | -8.76     | Average | Horizontal |
| 4844.00   | 51.84        | 33.10          | 36.44        | 7.68         | 56.18           | 74           | -17.82    | Peak    | Vertical   |
| 4844.00   | 41.35        | 33.10          | 36.44        | 7.68         | 45.69           | 54           | -8.31     | Average | Vertical   |
| 7266.00   | 47.72        | 36.87          | 35.28        | 9.32         | 58.63           | 74           | -15.37    | Peak    | Horizontal |
| 7266.00   | 36.01        | 36.87          | 35.28        | 9.32         | 46.92           | 54           | -7.08     | Average | Horizontal |
| 7266.00   | 44.43        | 36.71          | 35.28        | 9.32         | 55.18           | 74           | -18.82    | Peak    | Vertical   |
| 7266.00   | 33.61        | 36.71          | 35.28        | 9.32         | 44.36           | 54           | -9.64     | Average | Vertical   |
| 9688.00   | 41.21        | 38.01          | 35.32        | 9.98         | 53.88           | 74           | -20.12    | Peak    | Horizontal |
| 9688.00   | 29.83        | 38.01          | 35.32        | 9.98         | 42.50           | 54           | -11.50    | Average | Horizontal |
| 9688.00   | 42.91        | 37.97          | 35.32        | 9.98         | 55.54           | 74           | -18.46    | Peak    | Vertical   |
| 9688.00   | 30.13        | 37.97          | 35.32        | 9.98         | 42.76           | 54           | -11.24    | Average | Vertical   |
| 12110.00  | 44.35        | 36.52          | 35.37        | 10.22        | 55.72           | 74           | -18.28    | Peak    | Horizontal |
| 12110.00  | 31.84        | 36.52          | 35.37        | 10.22        | 43.21           | 54           | -10.79    | Average | Horizontal |
| 12110.00  | 40.81        | 36.52          | 35.37        | 10.22        | 52.18           | 74           | -21.82    | Peak    | Vertical   |
| 12110.00  | 32.63        | 36.52          | 35.37        | 10.22        | 44.00           | 54           | -10.00    | Average | Vertical   |
| 14532.00  | 37.42        | 40.34          | 35.66        | 10.34        | 52.44           | 74           | -21.56    | Peak    | Horizontal |
| 14532.00  | 25.79        | 40.34          | 35.66        | 10.34        | 40.81           | 54           | -13.19    | Average | Horizontal |
| 14532.00  | 37.33        | 40.52          | 35.66        | 10.34        | 52.53           | 74           | -21.47    | Peak    | Vertical   |
| 14532.00  | 22.91        | 40.52          | 35.66        | 10.34        | 38.11           | 54           | -15.89    | Average | Vertical   |
| 16954.00  | 37.30        | 38.02          | 35.25        | 10.70        | 50.77           | 74           | -23.23    | Peak    | Horizontal |
| 16954.00  | 24.99        | 38.02          | 35.25        | 10.70        | 38.46           | 54           | -15.54    | Average | Horizontal |
| 16954.00  | 39.15        | 37.93          | 35.25        | 10.70        | 52.53           | 74           | -21.47    | Peak    | Vertical   |
| 16954.00  | 24.73        | 37.93          | 35.25        | 10.70        | 38.11           | 54           | -15.89    | Average | Vertical   |

The result for 802.11n HT40 Channel 6 / 2437MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00   | 54.99        | 33.3           | 36.44        | 7.68         | 59.53           | 74           | -14.47    | Peak    | Horizontal |
| 4874.00   | 40.84        | 33.3           | 36.44        | 7.68         | 45.38           | 54           | -8.62     | Average | Horizontal |
| 4874.00   | 51.95        | 33.46          | 36.44        | 7.68         | 56.65           | 74           | -17.35    | Peak    | Vertical   |
| 4874.00   | 40.42        | 33.46          | 36.44        | 7.68         | 45.12           | 54           | -8.88     | Average | Vertical   |
| 7311.00   | 49.02        | 36.92          | 35.12        | 9.36         | 60.18           | 74           | -13.82    | Peak    | Horizontal |
| 7311.00   | 34.40        | 36.92          | 35.12        | 9.36         | 45.56           | 54           | -8.44     | Average | Horizontal |
| 7311.00   | 45.84        | 36.75          | 35.12        | 9.36         | 56.83           | 74           | -17.17    | Peak    | Vertical   |
| 7311.00   | 33.51        | 36.75          | 35.12        | 9.36         | 44.50           | 54           | -9.50     | Average | Vertical   |
| 9748.00   | 42.93        | 38.06          | 35.22        | 10.01        | 55.78           | 74           | -18.22    | Peak    | Horizontal |
| 9748.00   | 30.44        | 38.06          | 35.22        | 10.01        | 43.29           | 54           | -10.71    | Average | Horizontal |
| 9748.00   | 42.47        | 38.02          | 35.22        | 10.01        | 55.28           | 74           | -18.72    | Peak    | Vertical   |
| 9748.00   | 29.41        | 38.02          | 35.22        | 10.01        | 42.22           | 54           | -11.78    | Average | Vertical   |
| 12185.00  | 45.15        | 36.52          | 35.37        | 10.22        | 56.52           | 74           | -17.48    | Peak    | Horizontal |
| 12185.00  | 31.87        | 36.52          | 35.37        | 10.22        | 43.24           | 54           | -10.76    | Average | Horizontal |
| 12185.00  | 39.63        | 36.68          | 35.37        | 10.22        | 51.16           | 74           | -22.84    | Peak    | Vertical   |
| 12185.00  | 32.29        | 36.68          | 35.37        | 10.22        | 43.82           | 54           | -10.18    | Average | Vertical   |
| 14622.00  | 39.35        | 40.34          | 35.66        | 10.34        | 54.37           | 74           | -19.63    | Peak    | Horizontal |
| 14622.00  | 25.38        | 40.34          | 35.66        | 10.34        | 40.40           | 54           | -13.60    | Average | Horizontal |
| 14622.00  | 37.73        | 40.27          | 35.66        | 10.34        | 52.68           | 74           | -21.32    | Peak    | Vertical   |
| 14622.00  | 24.18        | 40.27          | 35.66        | 10.34        | 39.13           | 54           | -14.87    | Average | Vertical   |
| 17059.00  | 37.53        | 40.11          | 35.05        | 11.00        | 53.59           | 74           | -20.41    | Peak    | Horizontal |
| 17059.00  | 24.81        | 40.11          | 35.05        | 11.00        | 40.87           | 54           | -13.13    | Average | Horizontal |
| 17059.00  | 37.63        | 40.00          | 35.05        | 11.00        | 53.58           | 74           | -20.42    | Peak    | Vertical   |
| 17059.00  | 24.06        | 40.00          | 35.05        | 11.00        | 40.01           | 54           | -13.99    | Average | Vertical   |

The result for 802.11n HT40 Channel 9 / 2452MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4904.00   | 55.36        | 33.55          | 36.41        | 7.74         | 60.24           | 74           | -13.76    | Peak    | Horizontal |
| 4904.00   | 41.11        | 33.55          | 36.41        | 7.74         | 45.99           | 54           | -8.01     | Average | Horizontal |
| 4904.00   | 51.79        | 33.63          | 36.41        | 7.74         | 56.75           | 74           | -17.25    | Peak    | Vertical   |
| 4904.00   | 40.17        | 33.63          | 36.41        | 7.74         | 45.13           | 54           | -8.87     | Average | Vertical   |
| 7356.00   | 48.67        | 36.92          | 35.12        | 9.36         | 59.83           | 74           | -14.17    | Peak    | Horizontal |
| 7356.00   | 36.20        | 36.92          | 35.12        | 9.36         | 47.36           | 54           | -6.64     | Average | Horizontal |
| 7356.00   | 44.45        | 36.64          | 35.12        | 9.36         | 55.33           | 74           | -18.67    | Peak    | Vertical   |
| 7356.00   | 32.94        | 36.64          | 35.12        | 9.36         | 43.82           | 54           | -10.18    | Average | Vertical   |
| 9808.00   | 41.23        | 38.11          | 35.12        | 10.04        | 54.26           | 74           | -19.74    | Peak    | Horizontal |
| 9808.00   | 30.39        | 38.11          | 35.12        | 10.04        | 43.42           | 54           | -10.58    | Average | Horizontal |
| 9808.00   | 41.81        | 38.22          | 35.12        | 10.04        | 54.95           | 74           | -19.05    | Peak    | Vertical   |
| 9808.00   | 30.41        | 38.22          | 35.12        | 10.04        | 43.55           | 54           | -10.45    | Average | Vertical   |
| 12260.00  | 45.52        | 36.52          | 35.37        | 10.22        | 56.89           | 74           | -17.11    | Peak    | Horizontal |
| 12260.00  | 31.05        | 36.52          | 35.37        | 10.22        | 42.42           | 54           | -11.58    | Average | Horizontal |
| 12260.00  | 39.89        | 36.35          | 35.37        | 10.22        | 51.09           | 74           | -22.91    | Peak    | Vertical   |
| 12260.00  | 32.54        | 36.35          | 35.37        | 10.22        | 43.74           | 54           | -10.26    | Average | Vertical   |
| 14712.00  | 39.17        | 40.34          | 35.66        | 10.34        | 54.19           | 74           | -19.81    | Peak    | Horizontal |
| 14712.00  | 25.53        | 40.34          | 35.66        | 10.34        | 40.55           | 54           | -13.45    | Average | Horizontal |
| 14712.00  | 36.69        | 40.05          | 35.66        | 10.34        | 51.42           | 74           | -22.58    | Peak    | Vertical   |
| 14712.00  | 23.25        | 40.05          | 35.66        | 10.34        | 37.98           | 54           | -16.02    | Average | Vertical   |
| 17164.00  | 38.21        | 40.11          | 35.05        | 11.00        | 54.27           | 74           | -19.73    | Peak    | Horizontal |
| 17164.00  | 23.95        | 40.11          | 35.05        | 11.00        | 40.01           | 54           | -13.99    | Average | Horizontal |
| 17164.00  | 39.01        | 39.91          | 35.05        | 11.00        | 54.87           | 74           | -19.13    | Peak    | Vertical   |
| 17164.00  | 24.22        | 39.91          | 35.05        | 11.00        | 40.08           | 54           | -13.92    | Average | Vertical   |

**Notes:**

1. Measuring frequencies from 9k~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;

## 5.6. Conducted Spurious Emissions and Band Edges Test

### 5.6.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 5.6.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter                        | Setting       |
|-------------------------------------------|---------------|
| Detector                                  | Peak          |
| Attenuation                               | Auto          |
| RB / VB (Emission in restricted band)     | 100KHz/300KHz |
| RB / VB (Emission in non-restricted band) | 100KHz/300KHz |

### 5.6.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 kHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### 5.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.

### 5.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 5.6.6. Test Results of Conducted Spurious Emissions


|               |          |                |                  |
|---------------|----------|----------------|------------------|
| Temperature   | 25℃      | Humidity       | 60%              |
| Test Engineer | Chaz Liu | Configurations | IEEE 802.11b/g/n |

| Test Mode         | Channel | Frequency (MHz) | Reading Frequency (MHz) | Conducted Spurious Emission | Limits (dBc) | Verdict |
|-------------------|---------|-----------------|-------------------------|-----------------------------|--------------|---------|
| IEEE 802.11b      | 1       | 2412            | 5781.00                 | -55.869                     | <20          | PASS    |
|                   | 6       | 2437            | 9748.00                 | -46.471                     |              |         |
|                   | 11      | 2462            | 9848.10                 | -48.187                     |              |         |
| IEEE 802.11g      | 1       | 2412            | 3615.90                 | -55.176                     | <20          | PASS    |
|                   | 6       | 2437            | 5907.50                 | -57.215                     |              |         |
|                   | 11      | 2462            | 3696.80                 | -54.365                     |              |         |
| IEEE 802.11n HT20 | 1       | 2412            | 5812.10                 | -49.833                     | <20          | PASS    |
|                   | 6       | 2437            | 6083.70                 | -56.567                     |              |         |
|                   | 11      | 2462            | 6737.60                 | -56.472                     |              |         |
| IEEE 802.11n HT40 | 3       | 2422            | 5340.40                 | -57.172                     | <20          | PASS    |
|                   | 6       | 2437            | 6650.20                 | -56.815                     |              |         |
|                   | 9       | 2452            | 6116.20                 | -56.978                     |              |         |


**Remark:**

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. “---“means that the fundamental frequency not for 15.209 limits requirement.
5. please refer to following plots;


## Test plot of Conducted Spurious Emission

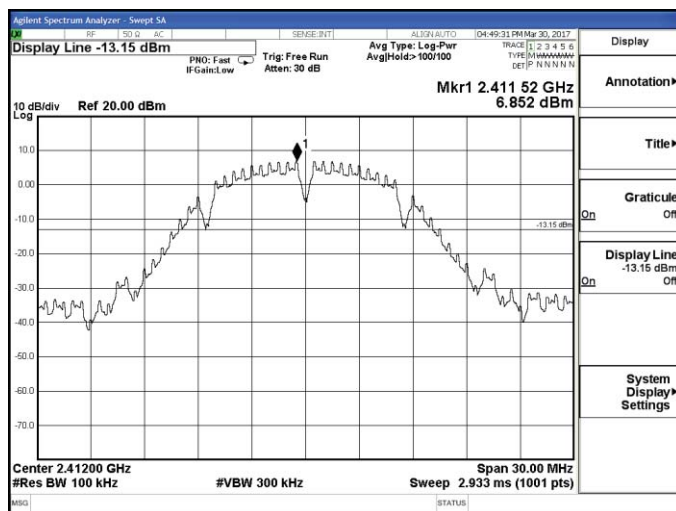


802.11b-Low channel Reference

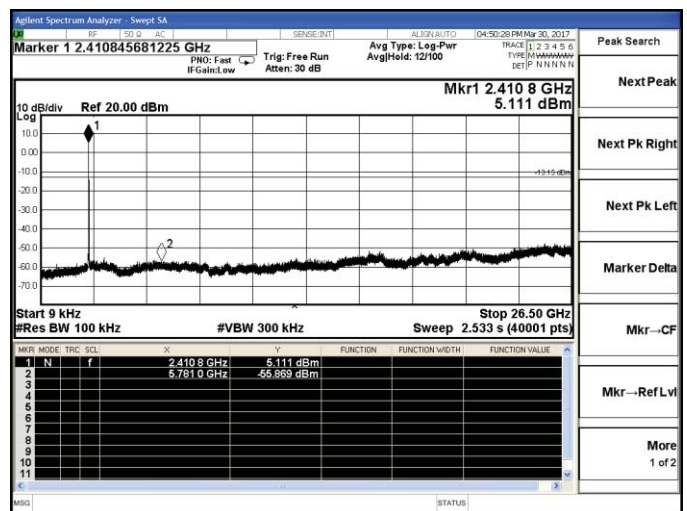


802.11b-Low channel

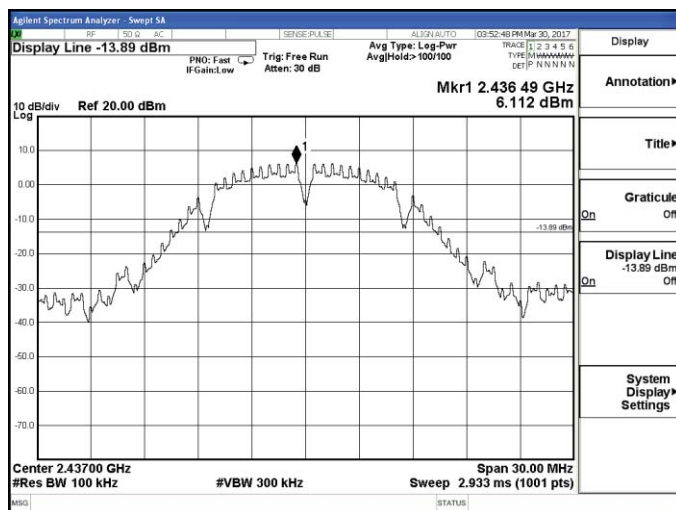


802.11b-Middle channel Reference

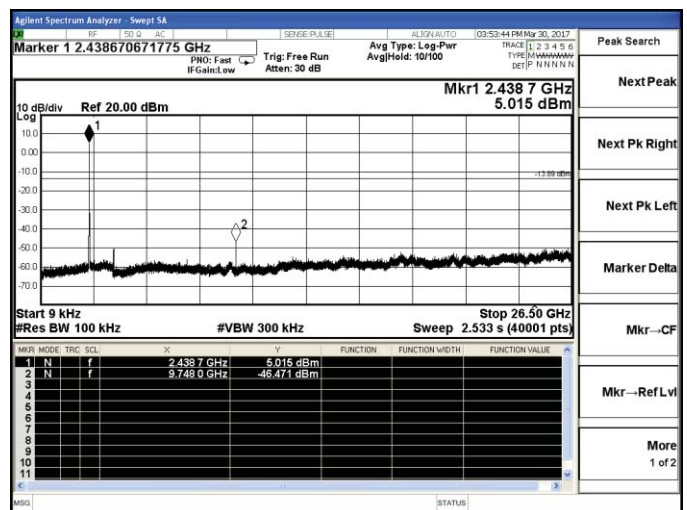

802.11b-Middle channel

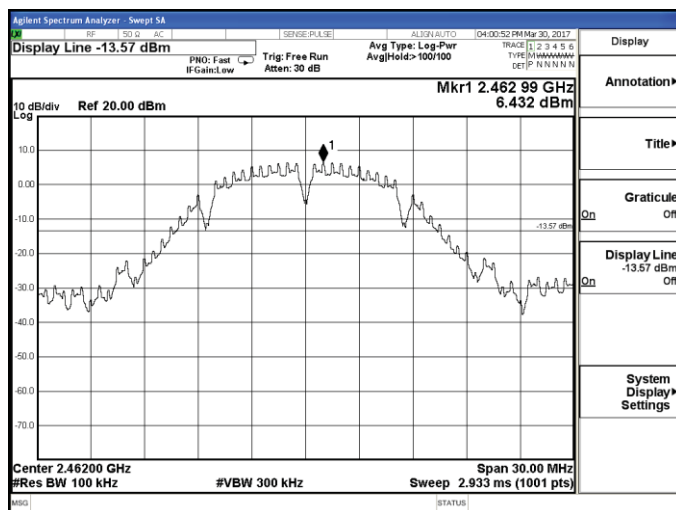


802.11b-High channel Reference

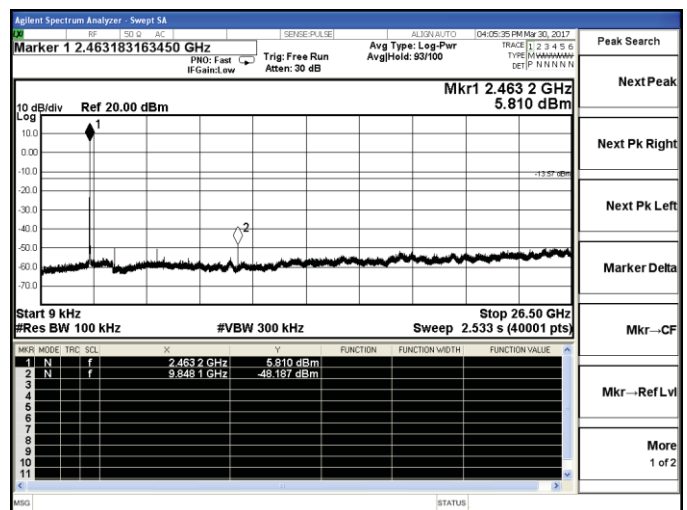


802.11b-High channel


## Test plot of Conducted Spurious Emission

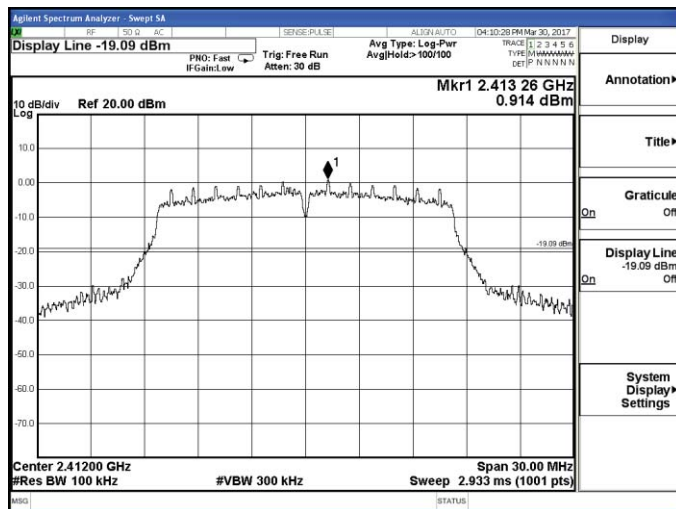


802.11g-Low channel Reference

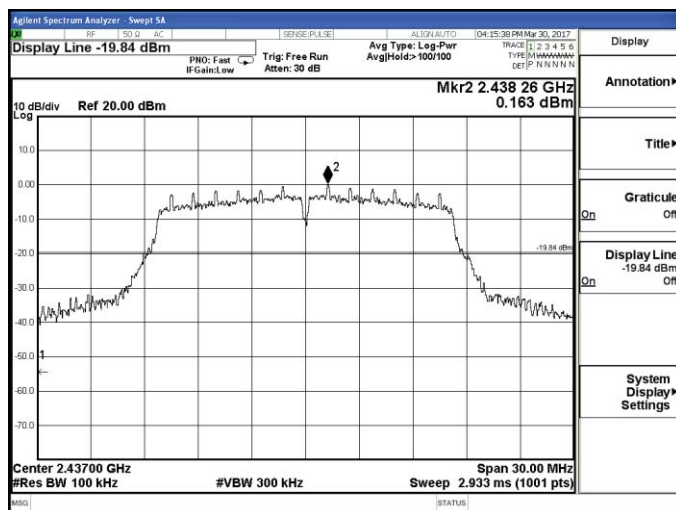


802.11g-Middle channel Reference

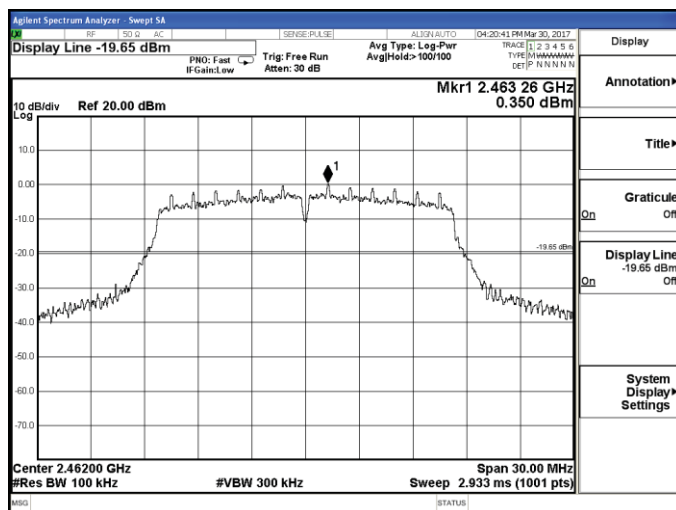


802.11g-High channel Reference

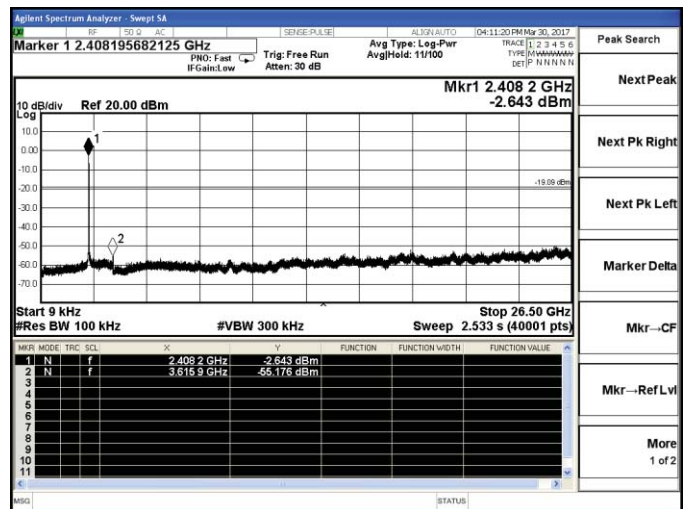

802.11g-Low channel

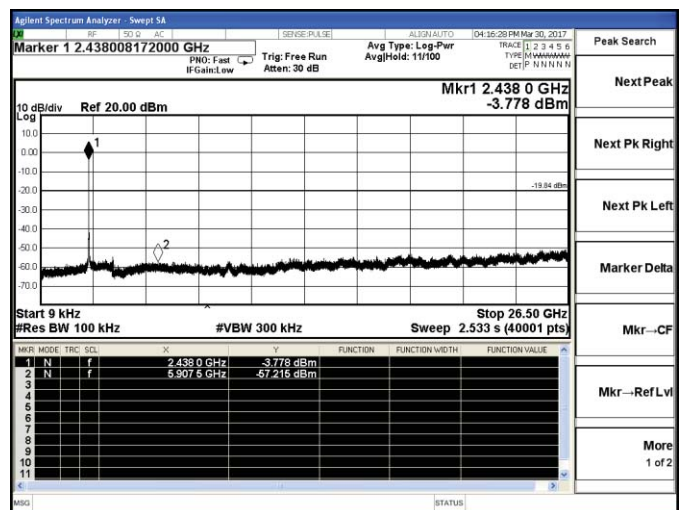


802.11g-Middle channel

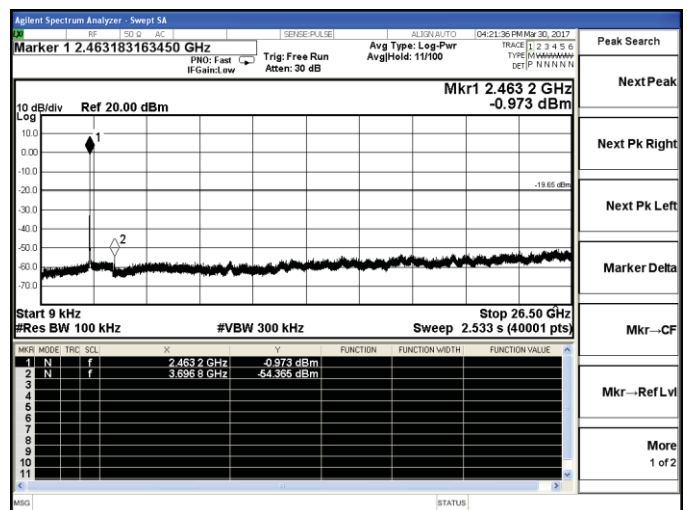


802.11g-High channel


## Test plot of Conducted Spurious Emission

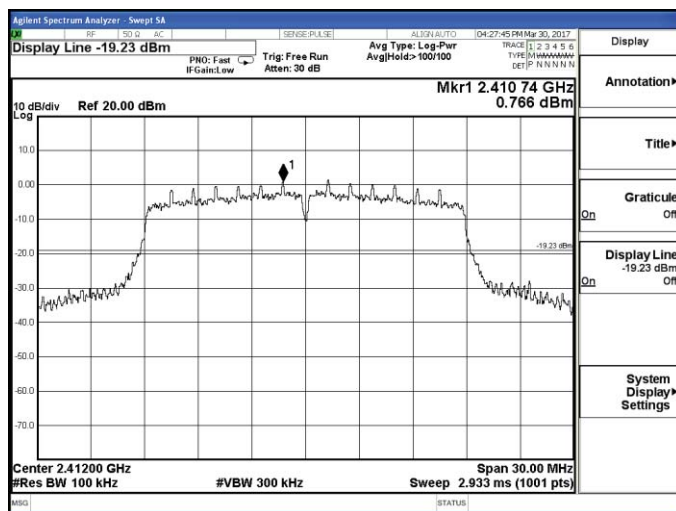


802.11n-HT20-Low channel Reference

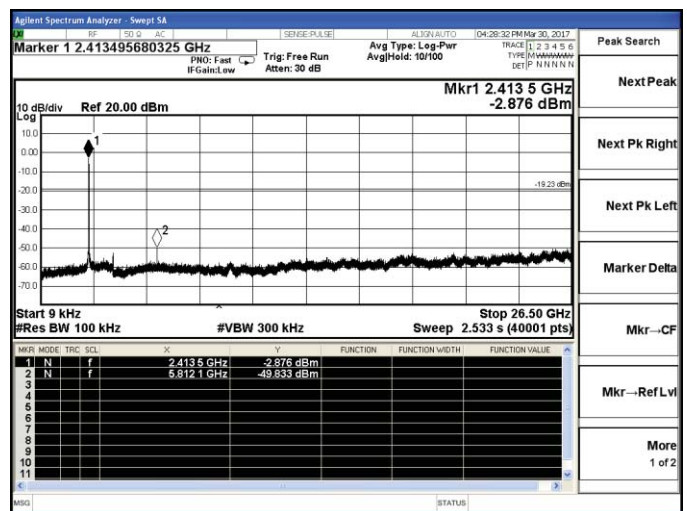


802.11n-HT20-Low channel

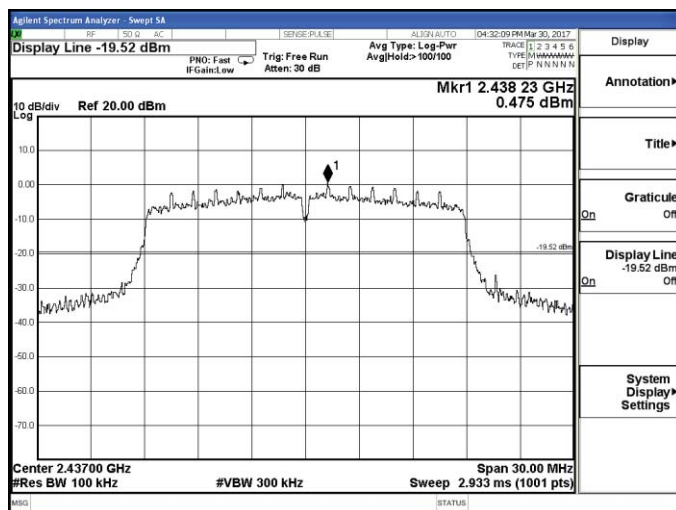


802.11n-HT20-Middle channel Reference

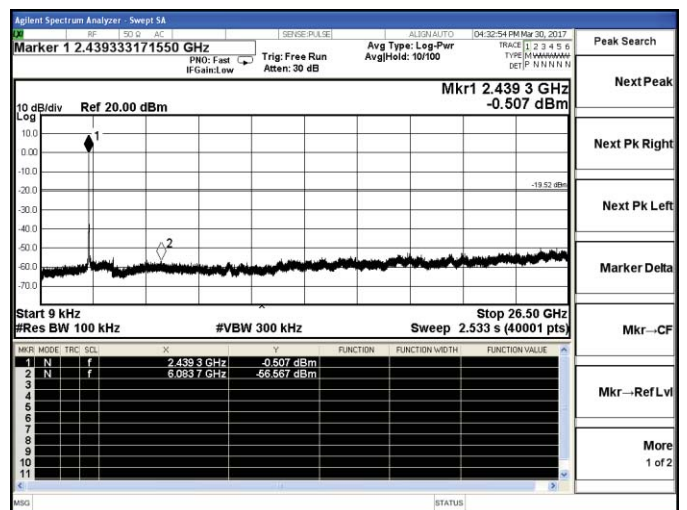

802.11n-HT20-Middle channel

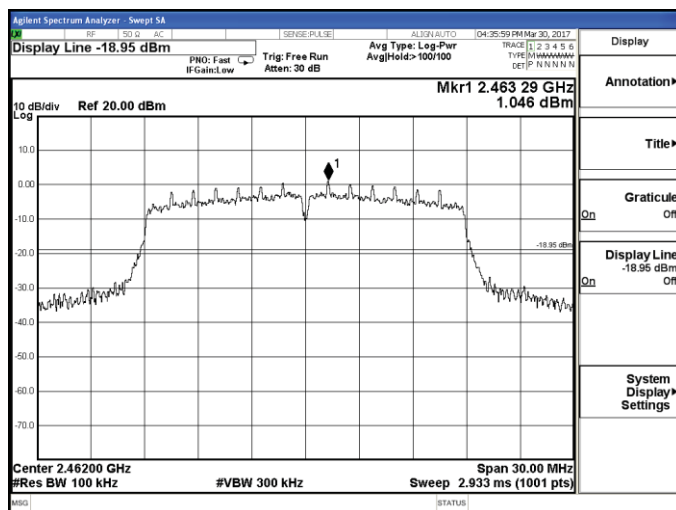


802.11n-HT20-High channel Reference

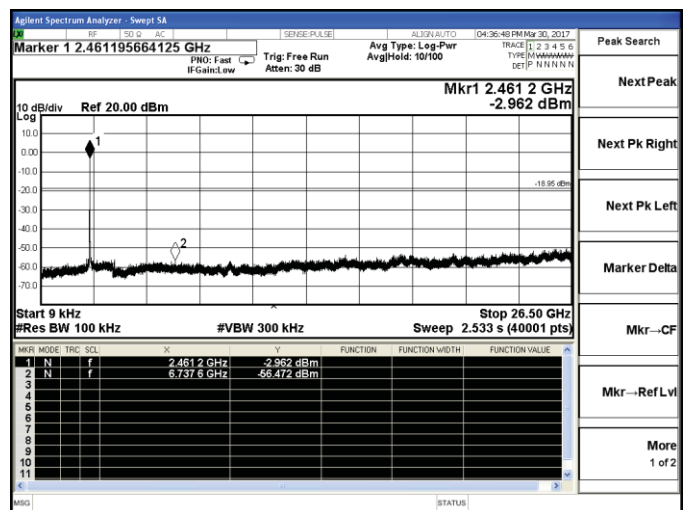


802.11n-HT20-High channel


## Test plot of Conducted Spurious Emission

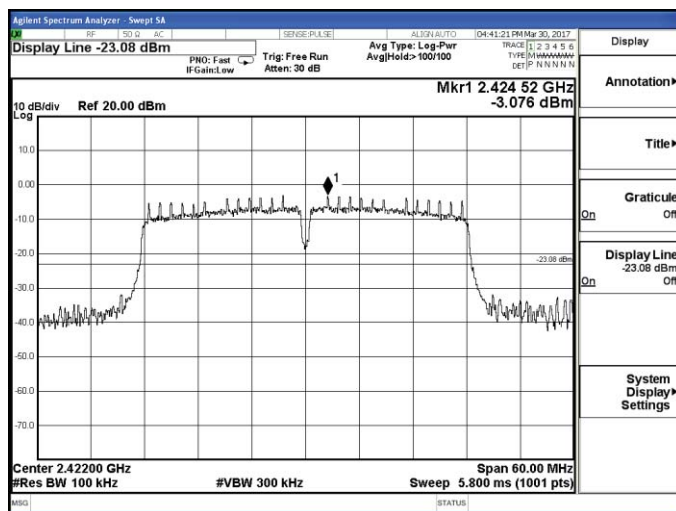


802.11n-HT40-Low channel Reference

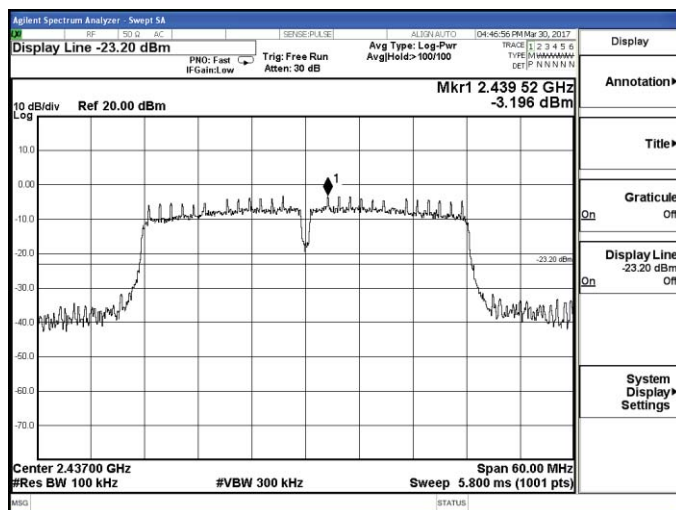


802.11n-HT40-Middle channel Reference

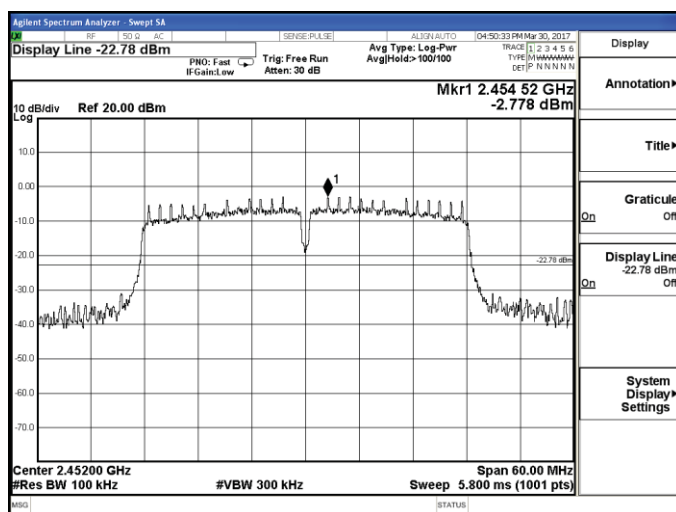


802.11n-HT40-High channel Reference

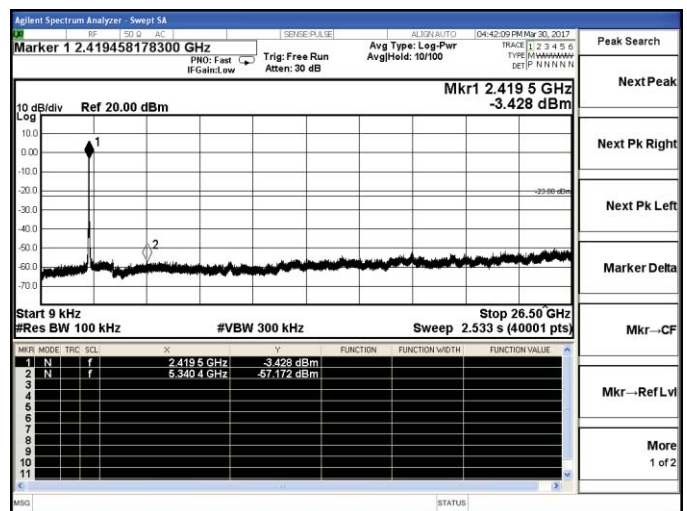

802.11n-HT40-Low channel

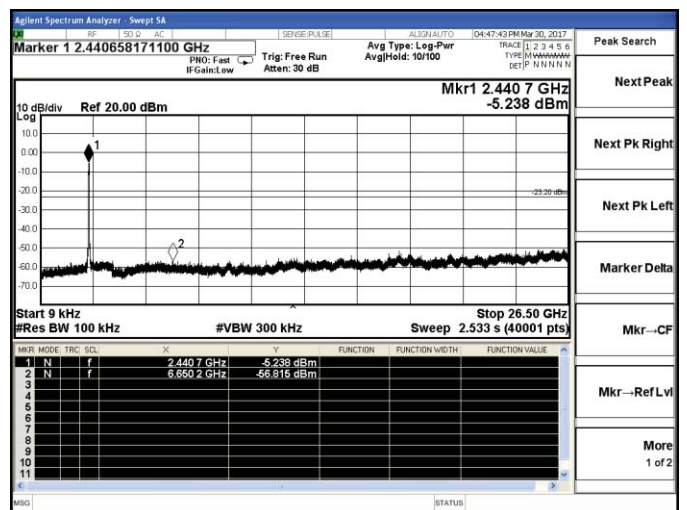


802.11n-HT40-Middle channel

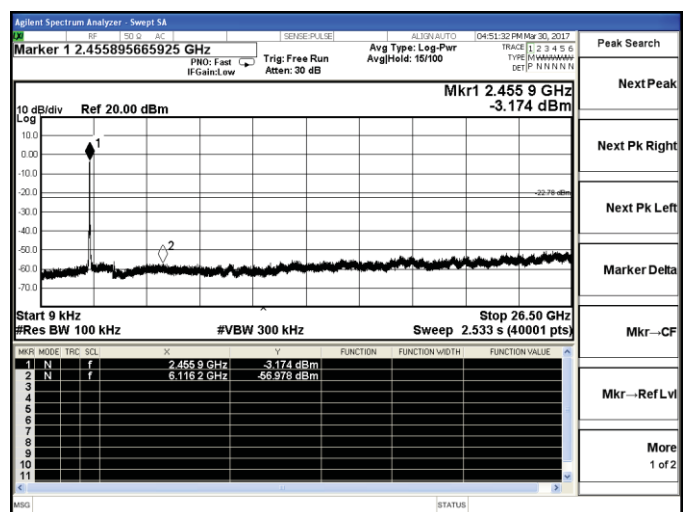



802.11n-HT40-High channel

## Test plot of Band Edges Test

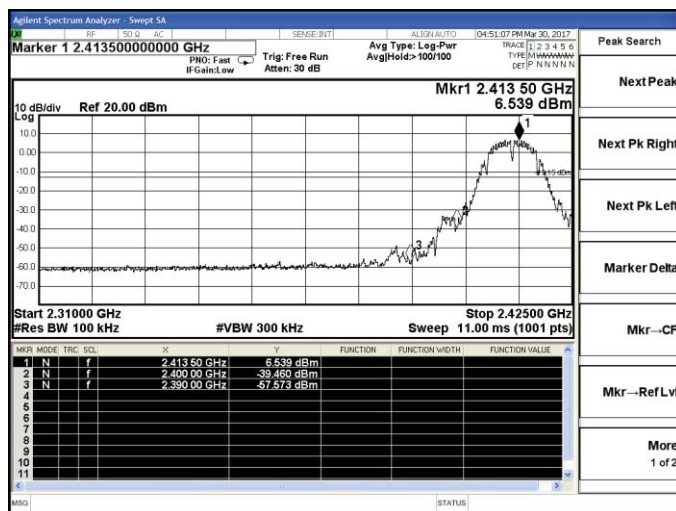



802.11b-Low channel

802.11b-High channel

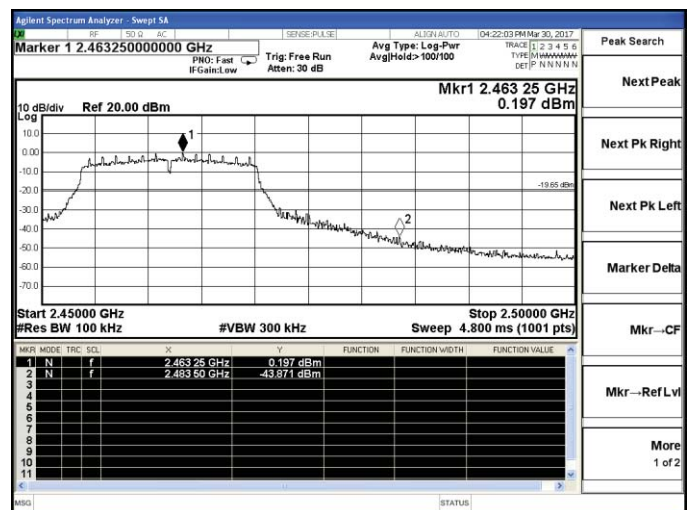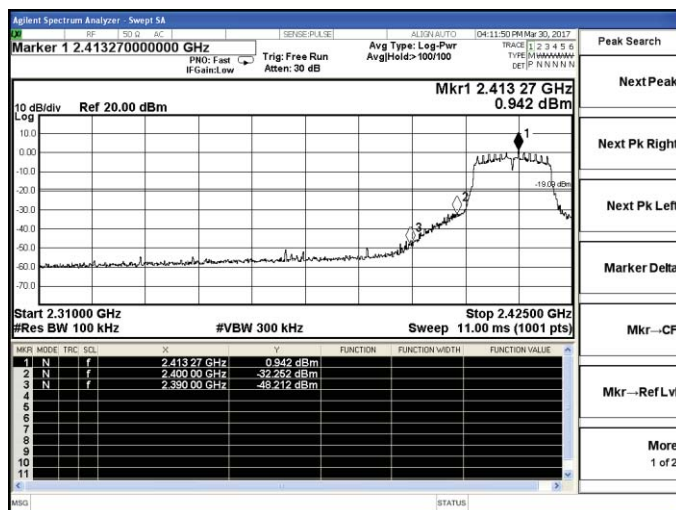

802.11g-Low channel


802.11g-High channel

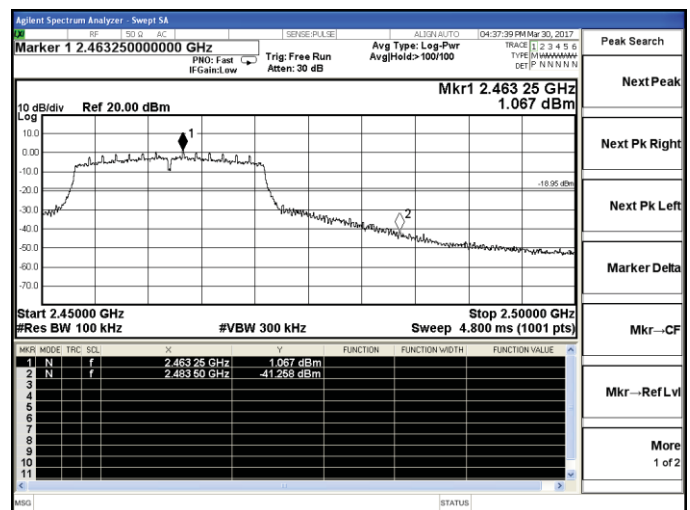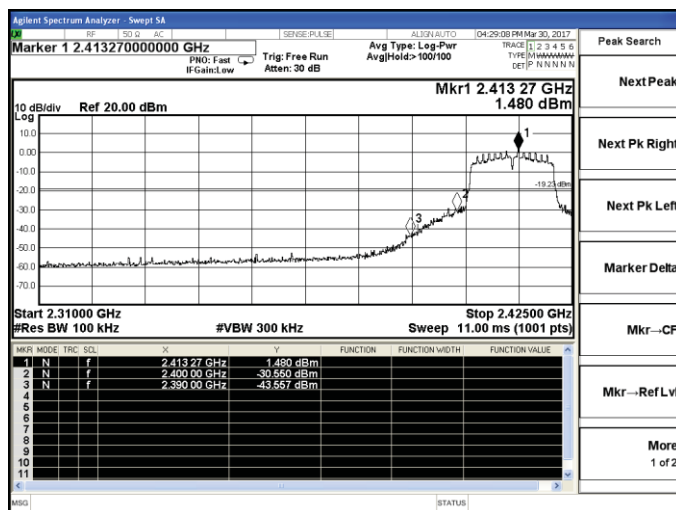


802.11n-HT20-Low channel

802.11n-HT20-High channel

## Test plot of Band Edges Test

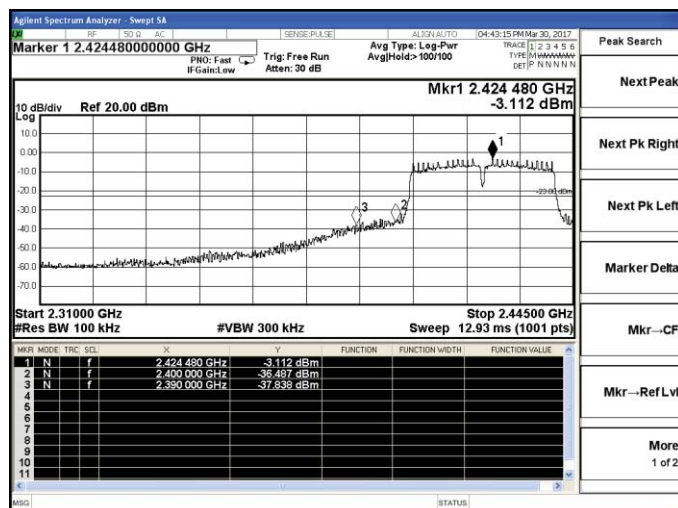

802.11n-HT40-Low channel

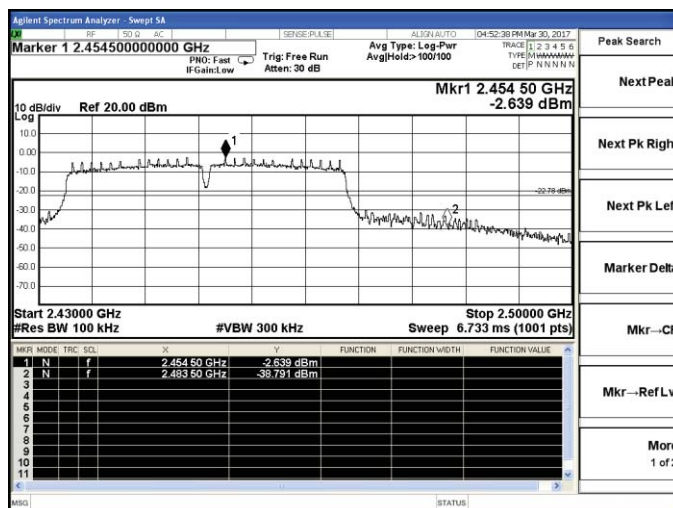

802.11n-HT40-High channel


## 5.7. AC Power line conducted emissions

### 5.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range<br>(MHz) | Limits (dB $\mu$ V) |          |
|--------------------------|---------------------|----------|
|                          | Quasi-peak          | Average  |
| 0.15 to 0.50             | 66 to 56            | 56 to 46 |
| 0.50 to 5                | 56                  | 46       |
| 5 to 30                  | 60                  | 50       |


### 5.7.2 Block Diagram of Test Setup

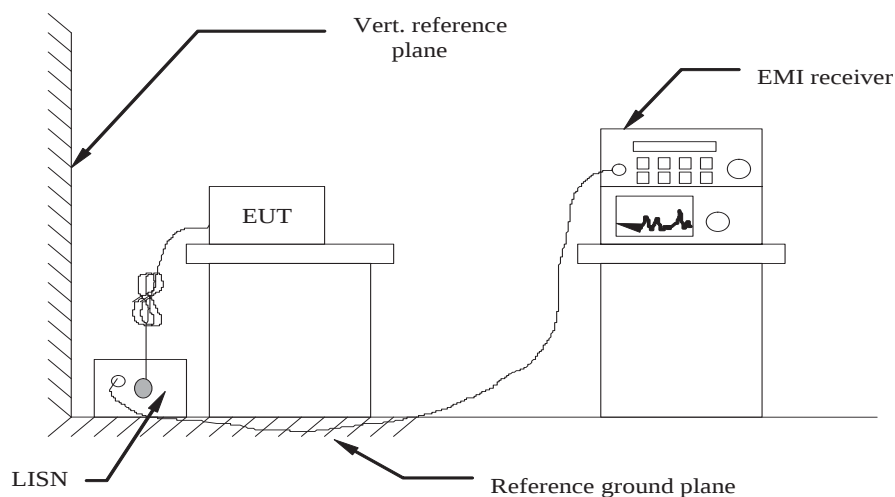

### 5.7.3 Test Results


**PASS.**

The test data please refer to following page.

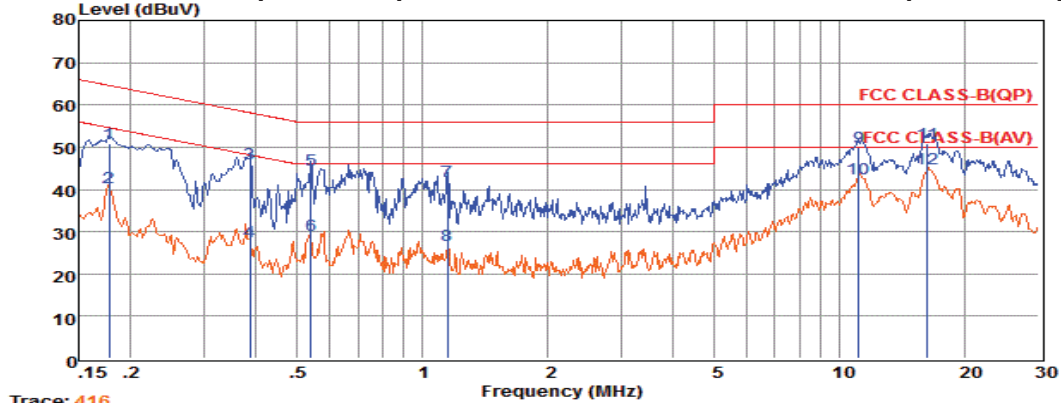**AC Conducted Emission of power adapter @ AC 120V/60Hz @ IEEE 802.11b (worst case)**


|    | Freq  | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over   | Remark  |
|----|-------|---------|---------|--------|---------|----------|-------|--------|---------|
|    | MHz   | dBuV    | dB      | dB     | dB      | dB       | dBuV  | dBuV   | dB      |
| 1  | 0.18  | 31.26   | 9.64    | 0.02   | 10.00   | 50.92    | 64.59 | -13.67 | QP      |
| 2  | 0.18  | 20.93   | 9.63    | 0.02   | 10.00   | 40.58    | 54.59 | -14.01 | Average |
| 3  | 0.39  | 26.56   | 9.61    | 0.04   | 10.00   | 46.21    | 58.17 | -11.96 | QP      |
| 4  | 0.39  | 7.99    | 9.61    | 0.04   | 10.00   | 27.64    | 48.16 | -20.52 | Average |
| 5  | 0.54  | 25.10   | 9.62    | 0.04   | 10.00   | 44.76    | 56.00 | -11.24 | QP      |
| 6  | 0.54  | 9.50    | 9.62    | 0.04   | 10.00   | 29.16    | 46.00 | -16.84 | Average |
| 7  | 1.15  | 22.40   | 9.63    | 0.05   | 10.00   | 42.08    | 56.00 | -13.92 | QP      |
| 8  | 1.15  | 7.12    | 9.63    | 0.05   | 10.00   | 26.80    | 46.00 | -19.20 | Average |
| 9  | 11.14 | 30.02   | 9.73    | 0.09   | 10.00   | 49.84    | 60.00 | -10.16 | QP      |
| 10 | 11.14 | 22.59   | 9.73    | 0.09   | 10.00   | 42.41    | 50.00 | -7.59  | Average |
| 11 | 16.23 | 30.94   | 9.75    | 0.11   | 10.00   | 50.80    | 60.00 | -9.20  | QP      |
| 12 | 16.23 | 25.07   | 9.75    | 0.11   | 10.00   | 44.93    | 50.00 | -5.07  | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
2. The emission levels that are 20dB below the official limit are not reported.

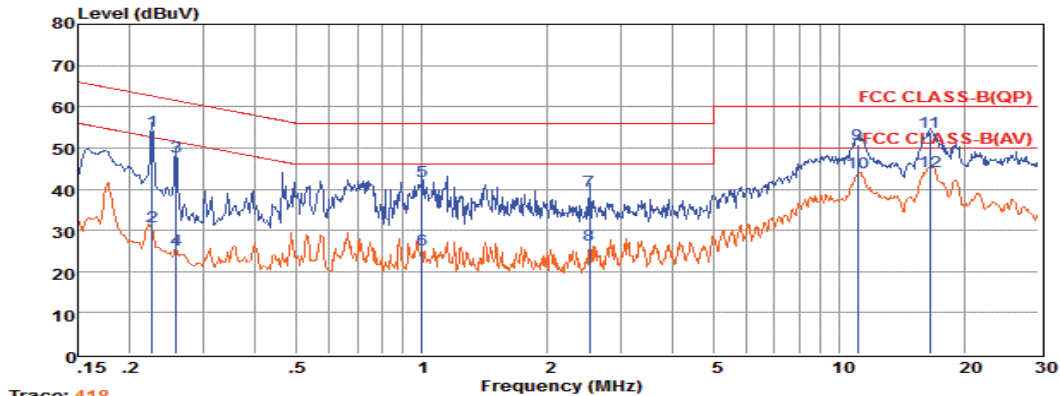


|    | Freq  | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over   | Remark  |
|----|-------|---------|---------|--------|---------|----------|-------|--------|---------|
|    | MHz   | dBuV    | dB      | dB     | dB      | dB       | dBuV  | dBuV   | dB      |
| 1  | 0.23  | 34.56   | 9.63    | 0.03   | 10.00   | 54.22    | 62.61 | -8.39  | QP      |
| 2  | 0.23  | 11.24   | 9.63    | 0.03   | 10.00   | 30.90    | 52.61 | -21.71 | Average |
| 3  | 0.26  | 28.20   | 9.63    | 0.03   | 10.00   | 47.86    | 61.51 | -13.65 | QP      |
| 4  | 0.26  | 5.62    | 9.63    | 0.03   | 10.00   | 25.28    | 51.51 | -26.23 | Average |
| 5  | 1.00  | 22.28   | 9.63    | 0.05   | 10.00   | 41.96    | 56.00 | -14.04 | QP      |
| 6  | 1.00  | 5.68    | 9.63    | 0.05   | 10.00   | 25.36    | 46.00 | -20.64 | Average |
| 7  | 2.53  | 19.75   | 9.64    | 0.05   | 10.00   | 39.44    | 56.00 | -16.56 | QP      |
| 8  | 2.53  | 6.67    | 9.64    | 0.05   | 10.00   | 26.36    | 46.00 | -19.64 | Average |
| 9  | 11.08 | 31.10   | 9.70    | 0.09   | 10.00   | 50.89    | 60.00 | -9.11  | QP      |
| 10 | 11.08 | 24.15   | 9.70    | 0.09   | 10.00   | 43.94    | 50.00 | -6.06  | Average |
| 11 | 16.49 | 34.00   | 9.73    | 0.11   | 10.00   | 53.84    | 60.00 | -6.16  | QP      |
| 12 | 16.49 | 24.56   | 9.73    | 0.11   | 10.00   | 44.40    | 50.00 | -5.60  | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
2. The emission levels that are 20dB below the official limit are not reported.

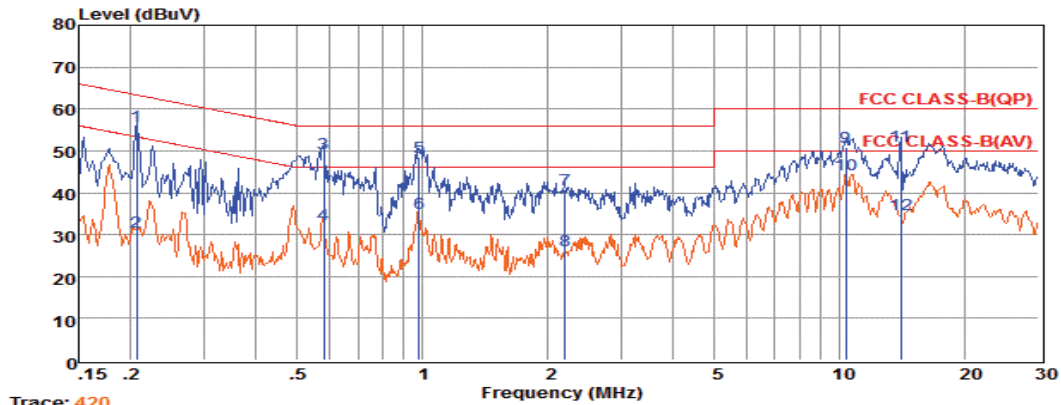**AC Conducted Emission of power adapter @ AC 240V/60Hz @ IEEE 802.11b (worst case)**

|    | Freq  | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over   | Remark  |
|----|-------|---------|---------|--------|---------|----------|-------|--------|---------|
|    | MHz   | dBuV    | dB      | dB     | dB      | dB       | dBuV  | dBuV   | dB      |
| 1  | 0.21  | 36.13   | 9.63    | 0.03   | 10.00   | 55.79    | 63.36 | -7.57  | QP      |
| 2  | 0.21  | 10.88   | 9.63    | 0.03   | 10.00   | 30.54    | 53.36 | -22.82 | Average |
| 3  | 0.58  | 29.70   | 9.63    | 0.04   | 10.00   | 49.37    | 56.00 | -6.63  | QP      |
| 4  | 0.58  | 12.64   | 9.63    | 0.04   | 10.00   | 32.31    | 46.00 | -13.69 | Average |
| 5  | 0.98  | 28.87   | 9.63    | 0.05   | 10.00   | 48.55    | 56.00 | -7.45  | QP      |
| 6  | 0.98  | 15.44   | 9.63    | 0.05   | 10.00   | 35.12    | 46.00 | -10.88 | Average |
| 7  | 2.20  | 20.95   | 9.64    | 0.05   | 10.00   | 40.64    | 56.00 | -15.36 | QP      |
| 8  | 2.20  | 6.46    | 9.64    | 0.05   | 10.00   | 26.15    | 46.00 | -19.85 | Average |
| 9  | 10.34 | 31.15   | 9.69    | 0.08   | 10.00   | 50.92    | 60.00 | -9.08  | QP      |
| 10 | 10.34 | 24.58   | 9.69    | 0.08   | 10.00   | 44.35    | 50.00 | -5.65  | Average |
| 11 | 13.99 | 31.40   | 9.71    | 0.10   | 10.00   | 51.21    | 60.00 | -8.79  | QP      |
| 12 | 13.99 | 14.90   | 9.71    | 0.10   | 10.00   | 34.71    | 50.00 | -15.29 | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
2. The emission levels that are 20dB below the official limit are not reported.

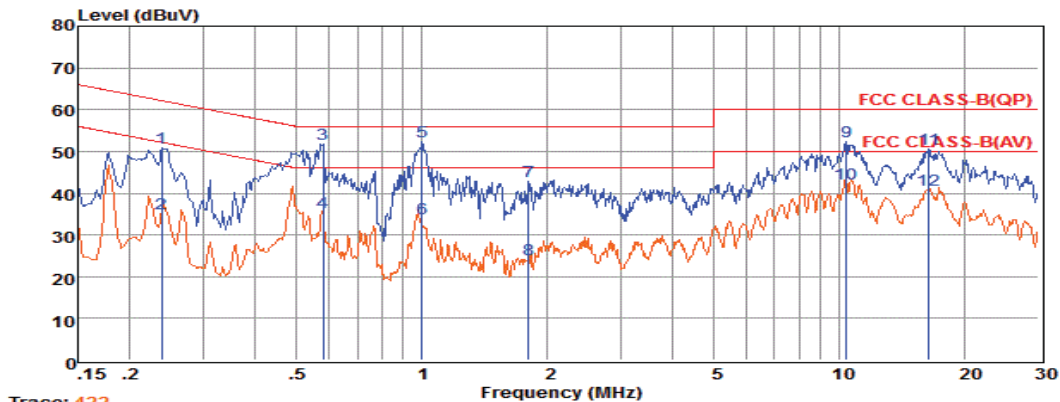

|    | Freq  | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over   | Remark  |
|----|-------|---------|---------|--------|---------|----------|-------|--------|---------|
|    | MHz   | dBuV    | dB      | dB     | dB      | dB       | dBuV  | dBuV   | dB      |
| 1  | 0.24  | 31.36   | 9.60    | 0.03   | 10.00   | 50.99    | 62.17 | -11.18 | QP      |
| 2  | 0.24  | 15.40   | 9.60    | 0.03   | 10.00   | 35.03    | 52.17 | -17.14 | Average |
| 3  | 0.58  | 32.04   | 9.62    | 0.04   | 10.00   | 51.70    | 56.00 | -4.30  | QP      |
| 4  | 0.58  | 15.78   | 9.62    | 0.04   | 10.00   | 35.44    | 46.00 | -10.56 | Average |
| 5  | 1.00  | 32.75   | 9.63    | 0.05   | 10.00   | 52.43    | 56.00 | -3.57  | QP      |
| 6  | 1.00  | 14.09   | 9.63    | 0.05   | 10.00   | 33.77    | 46.00 | -12.23 | Average |
| 7  | 1.80  | 23.12   | 9.63    | 0.05   | 10.00   | 42.80    | 56.00 | -13.20 | QP      |
| 8  | 1.80  | 4.36    | 9.63    | 0.05   | 10.00   | 24.04    | 46.00 | -21.96 | Average |
| 9  | 10.40 | 32.52   | 9.72    | 0.08   | 10.00   | 52.32    | 60.00 | -7.68  | QP      |
| 10 | 10.40 | 22.56   | 9.72    | 0.08   | 10.00   | 42.36    | 50.00 | -7.64  | Average |
| 11 | 16.40 | 30.69   | 9.75    | 0.11   | 10.00   | 50.55    | 60.00 | -9.45  | QP      |
| 12 | 16.40 | 20.86   | 9.75    | 0.11   | 10.00   | 40.72    | 50.00 | -9.28  | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
2. The emission levels that are 20dB below the official limit are not reported.


\*\*\*Note: Pre-scan all mode and recorded the worst case results in this report (802.11b).

## 5.8. Band-edge measurements for radiated emissions

### 5.8.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.8.2. Test Setup Layout

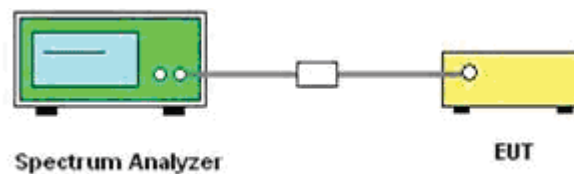

### 5.8.3. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of Spectrum Analyzer.

### 5.8.4. Test Procedures

According to KDB 558074 D01 V03R05 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for AV detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).

9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:  
 $E = \text{EIRP} - 20 \log D + 104.77 = \text{EIRP} + 95.23$

Where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test duress until all measured frequencies were complete.

#### 5.8.5 Test Results

| <b>IEEE 802.11b</b> |                       |                    |                                        |          |                |         |
|---------------------|-----------------------|--------------------|----------------------------------------|----------|----------------|---------|
| Frequency (MHz)     | Conducted Power (dBm) | Antenna Gain (dBi) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 2310.000            | -50.048               | 2.0                | 47.212                                 | Peak     | 74.00          | PASS    |
| 2310.000            | -61.399               | 2.0                | 35.861                                 | AV       | 54.00          | PASS    |
| 2390.000            | -47.322               | 2.0                | 49.938                                 | Peak     | 74.00          | PASS    |
| 2390.000            | -58.025               | 2.0                | 39.235                                 | AV       | 54.00          | PASS    |
| 2483.500            | -48.611               | 2.0                | 48.649                                 | Peak     | 74.00          | PASS    |
| 2483.500            | -58.342               | 2.0                | 38.918                                 | AV       | 54.00          | PASS    |
| 2500.000            | -48.635               | 2.0                | 48.625                                 | Peak     | 74.00          | PASS    |
| 2500.000            | -59.115               | 2.0                | 38.145                                 | AV       | 54.00          | PASS    |

| <b>IEEE 802.11g</b> |                       |                    |                                        |          |                |         |
|---------------------|-----------------------|--------------------|----------------------------------------|----------|----------------|---------|
| Frequency (MHz)     | Conducted Power (dBm) | Antenna Gain (dBi) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 2310.000            | -50.977               | 2.0                | 46.283                                 | Peak     | 74.00          | PASS    |
| 2310.000            | -60.604               | 2.0                | 36.656                                 | AV       | 54.00          | PASS    |
| 2390.000            | -44.660               | 2.0                | 52.600                                 | Peak     | 74.00          | PASS    |
| 2390.000            | -54.235               | 2.0                | 43.025                                 | AV       | 54.00          | PASS    |
| 2483.500            | -42.375               | 2.0                | 54.885                                 | Peak     | 74.00          | PASS    |
| 2483.500            | -54.014               | 2.0                | 43.246                                 | AV       | 54.00          | PASS    |
| 2500.000            | -46.401               | 2.0                | 50.859                                 | Peak     | 74.00          | PASS    |
| 2500.000            | -56.229               | 2.0                | 41.031                                 | AV       | 54.00          | PASS    |

| <b>IEEE 802.11n-HT20</b> |                       |                    |                                        |          |                |         |
|--------------------------|-----------------------|--------------------|----------------------------------------|----------|----------------|---------|
| Frequency (MHz)          | Conducted Power (dBm) | Antenna Gain (dBi) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 2310.000                 | -48.418               | 2.0                | 48.842                                 | Peak     | 74.00          | PASS    |
| 2310.000                 | -60.610               | 2.0                | 36.650                                 | AV       | 54.00          | PASS    |
| 2390.000                 | -34.086               | 2.0                | 63.174                                 | Peak     | 74.00          | PASS    |
| 2390.000                 | -53.255               | 2.0                | 44.005                                 | AV       | 54.00          | PASS    |
| 2483.500                 | -41.240               | 2.0                | 56.020                                 | Peak     | 74.00          | PASS    |
| 2483.500                 | -53.728               | 2.0                | 43.532                                 | AV       | 54.00          | PASS    |
| 2500.000                 | -45.605               | 2.0                | 51.655                                 | Peak     | 74.00          | PASS    |
| 2500.000                 | -56.154               | 2.0                | 41.106                                 | AV       | 54.00          | PASS    |


| <b>IEEE 802.11n-HT40</b> |                       |                    |                                        |          |                |         |
|--------------------------|-----------------------|--------------------|----------------------------------------|----------|----------------|---------|
| Frequency (MHz)          | Conducted Power (dBm) | Antenna Gain (dBi) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 2310.000                 | -50.399               | 2.0                | 46.861                                 | Peak     | 74.00          | PASS    |
| 2310.000                 | -60.983               | 2.0                | 36.277                                 | AV       | 54.00          | PASS    |
| 2390.000                 | -39.255               | 2.0                | 58.005                                 | Peak     | 74.00          | PASS    |
| 2390.000                 | -51.603               | 2.0                | 45.657                                 | AV       | 54.00          | PASS    |
| 2483.500                 | -41.214               | 2.0                | 56.046                                 | Peak     | 74.00          | PASS    |
| 2483.500                 | -53.799               | 2.0                | 43.461                                 | AV       | 54.00          | PASS    |
| 2500.000                 | -45.609               | 2.0                | 51.651                                 | Peak     | 74.00          | PASS    |
| 2500.000                 | -56.341               | 2.0                | 40.919                                 | AV       | 54.00          | PASS    |

Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. “---“means that the fundamental frequency not for 15.209 limits requirement.
5. please refer to following plots;

## Band-edge measurements for conducted emissions

## Test plot of Restricted Bands

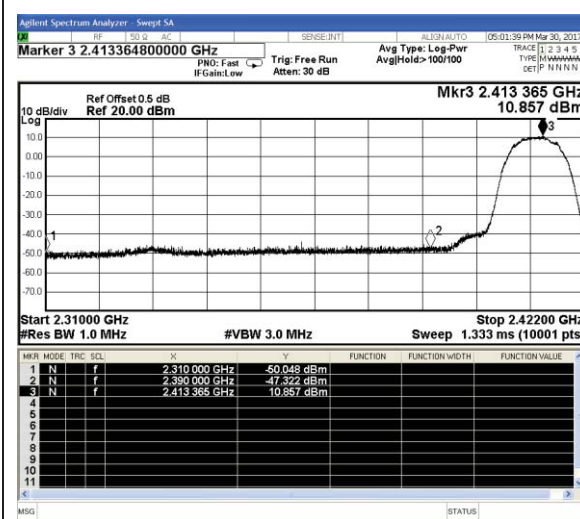

Peak Search

Next Peak

Next Pk Right


Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl

More 1 of 2

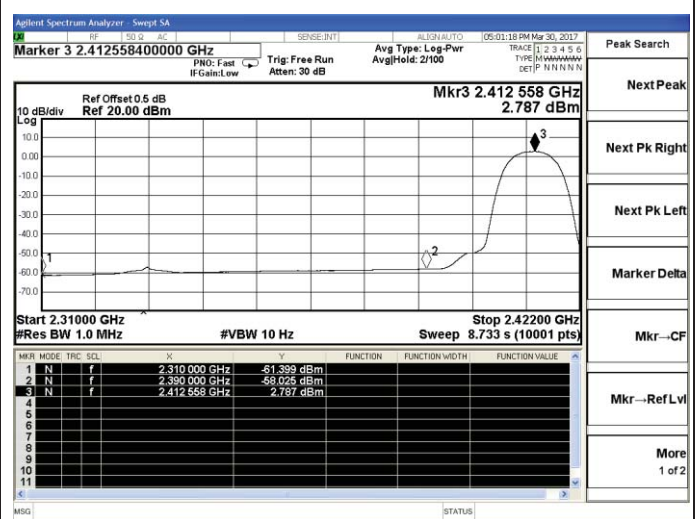

Peak Search

Next Peak

Next Pk Right

Next Pk Left


Marker Delta

Mkr--CF

Mkr--Ref Lvl

More 1 of 2

## 802.11b-Low channel(Peak)

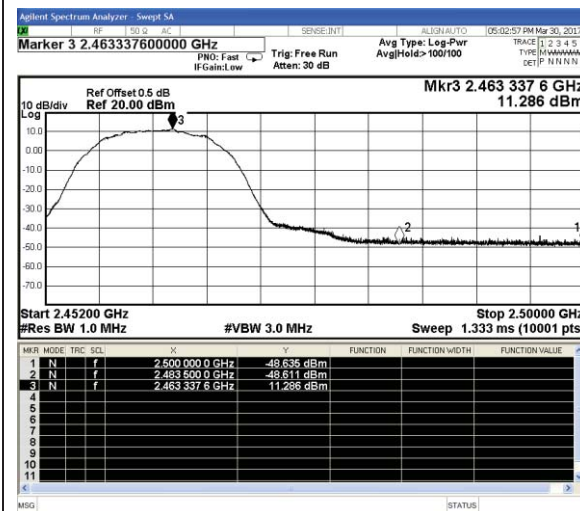

Peak Search

Next Peak

Next Pk Right


Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl

More 1 of 2

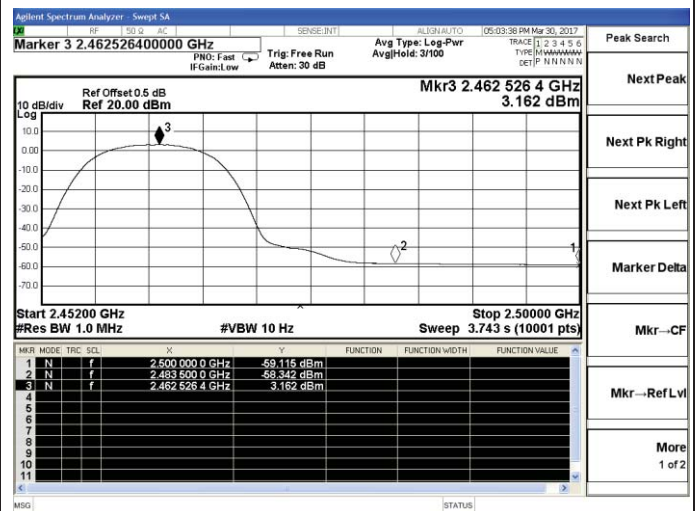

Peak Search

Next Peak

Next Pk Right

Next Pk Left


Marker Delta

Mkr--CF

Mkr--Ref Lvl

More 1 of 2

## 802.11b-High channel(Peak)

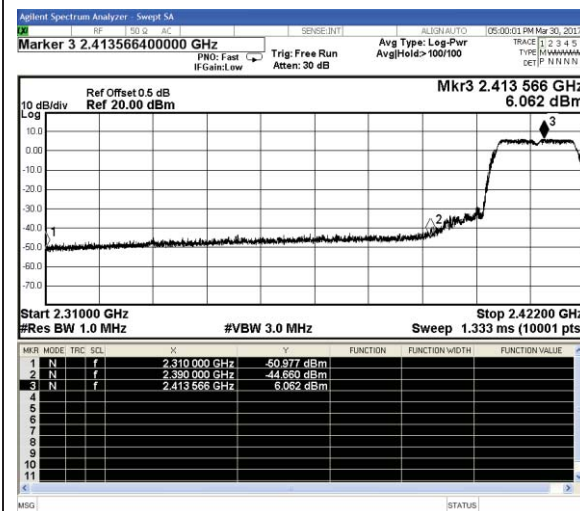

Peak Search

Next Peak

Next Pk Right


Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl

More 1 of 2

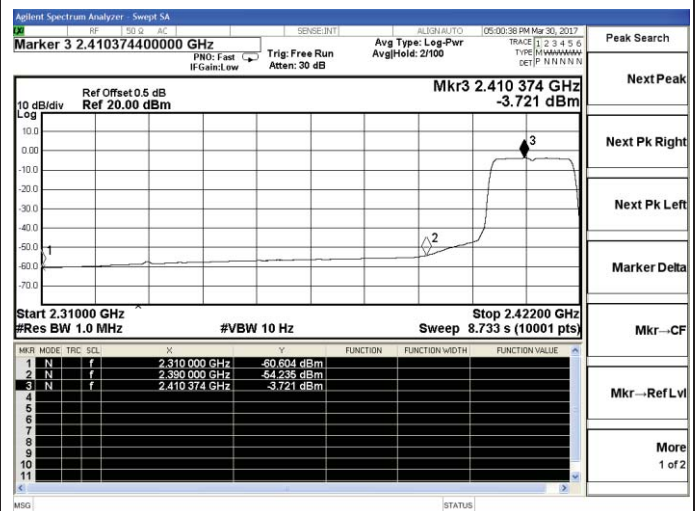

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl


More 1 of 2

## 802.11g-Low channel(Peak)

## 802.11g-Low channel(Average)

## Band-edge measurements for conducted emissions

## Test plot of Restricted Bands

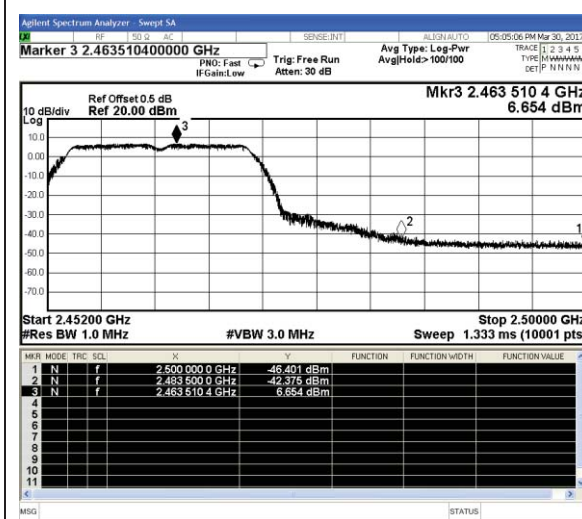

Peak Search

Next Peak

Next Pk Right


Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl

More  
1 of 2

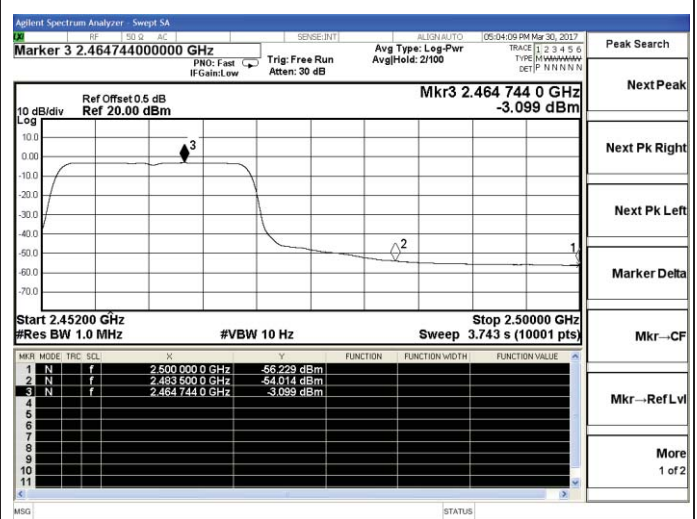

Peak Search

Next Peak

Next Pk Right

Next Pk Left


Marker Delta

Mkr--CF

Mkr--Ref Lvl

More  
1 of 2

## 802.11g-High channel(Peak)

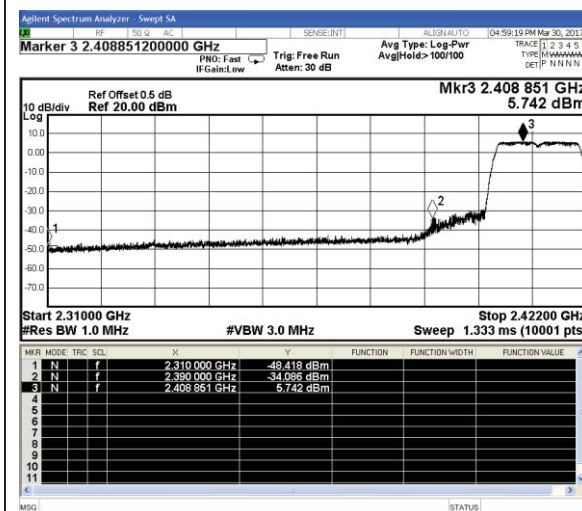

Peak Search

Next Peak

Next Pk Right


Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl

More  
1 of 2

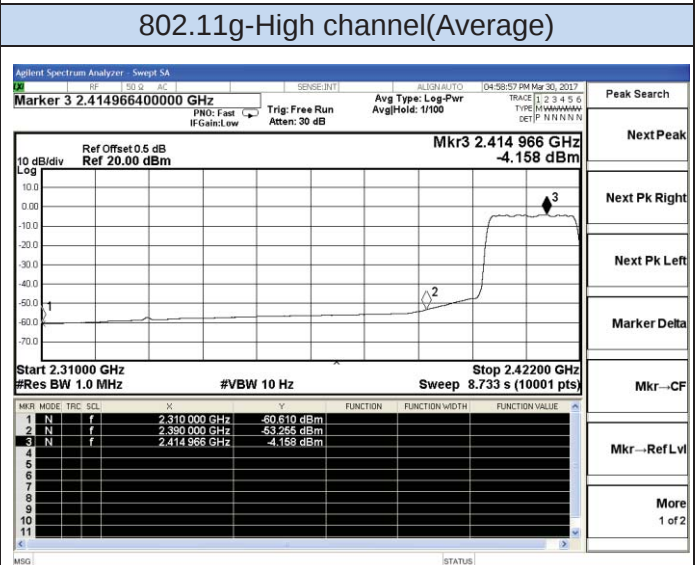

Peak Search

Next Peak

Next Pk Right

Next Pk Left


Marker Delta

Mkr--CF

Mkr--Ref Lvl

More  
1 of 2

## 802.11n-HT20-Low channel(Peak)

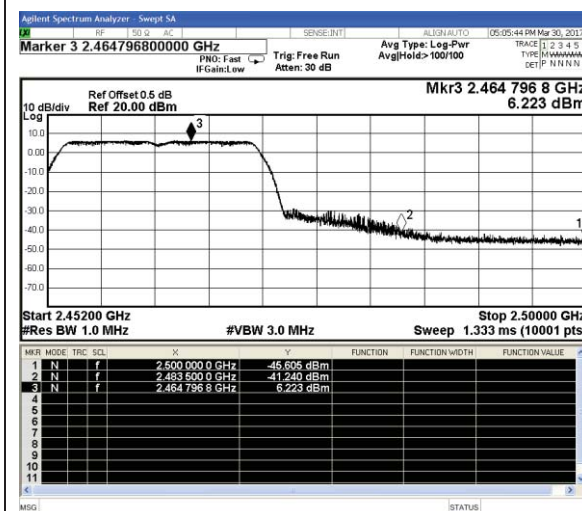

Peak Search

Next Peak

Next Pk Right


Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl

More  
1 of 2

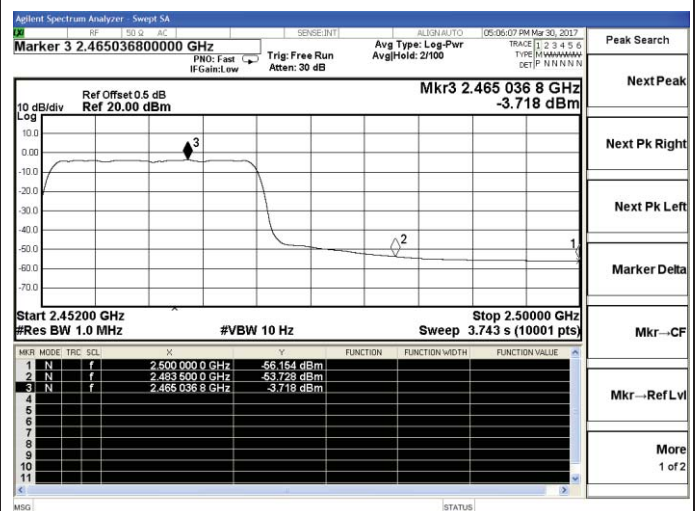

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl



More  
1 of 2

## 802.11n-HT20-High channel(Peak)



## 802.11n-HT20-High channel(Average)

## Band-edge measurements for conducted emissions

## Test plot of Restricted Bands

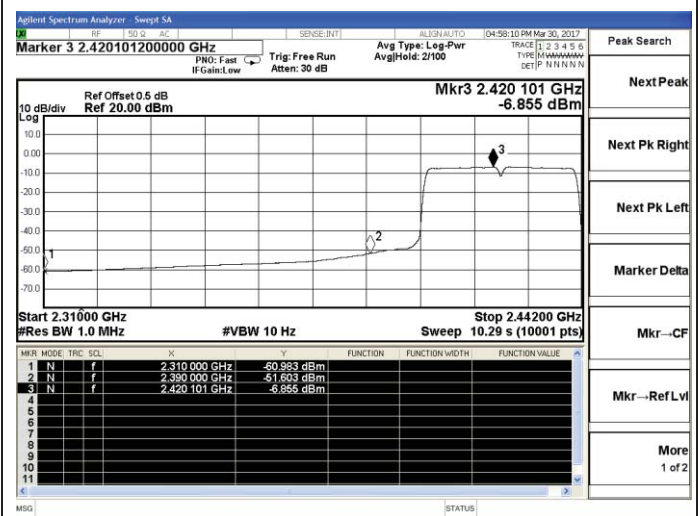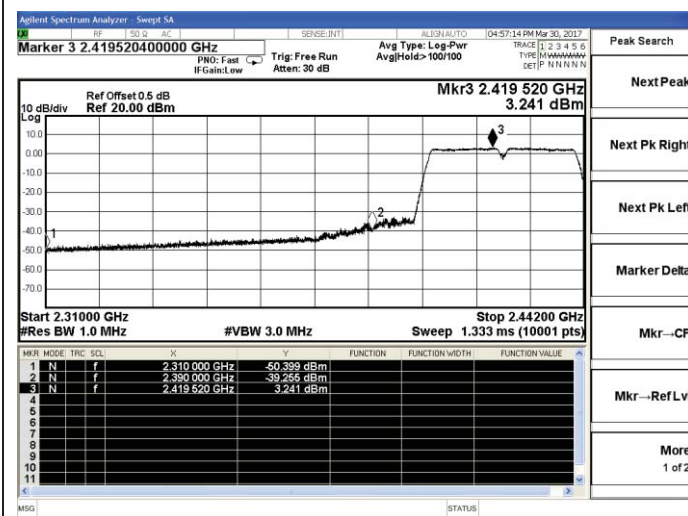

## 802.11n-HT40-Low channel(Peak)

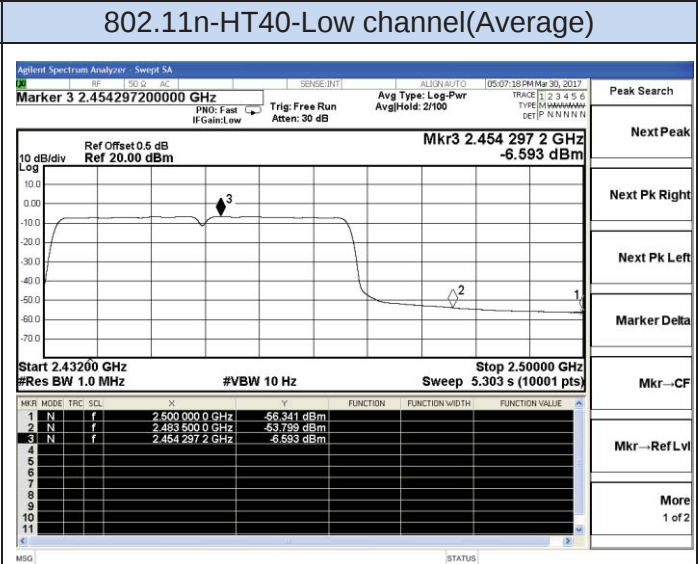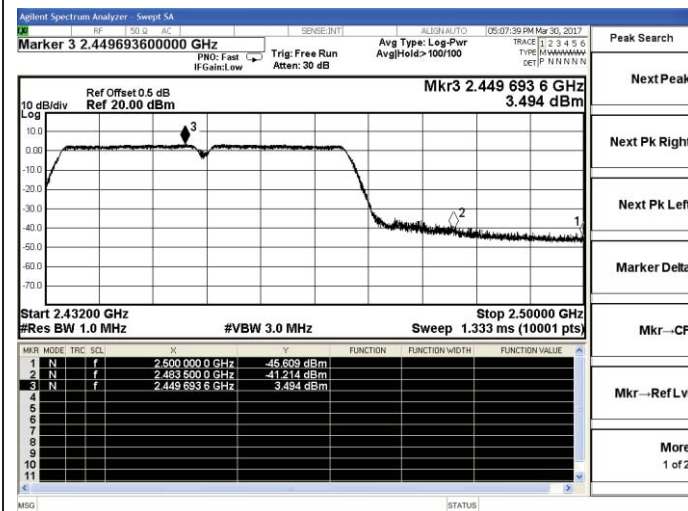

## 802.11n-HT40-High channel(Peak)

## 802.11n-HT40-High channel(Average)

## 5.9. Antenna Requirements

### 5.9.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### 5.9.2 Antenna Connected Construction

#### 5.9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 5.9.2.2. Antenna Connector Construction

The gains of antenna used for transmitting is 2.0dBi, and the antenna is an external antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

#### 5.9.2.3. Results: Compliance.

## 6. LIST OF MEASURING EQUIPMENTS

| Instrument                 | Manufacturer   | Model No.                        | Serial No.  | Characteristics | Cal Date         | Due Date         |
|----------------------------|----------------|----------------------------------|-------------|-----------------|------------------|------------------|
| EMC Receiver               | R&S            | ESCS 30                          | 100174      | 9kHz – 2.75GHz  | June 18, 2016    | June 17, 2017    |
| Signal analyzer            | Agilent        | E4448A(External mixers to 40GHz) | US44300469  | 9kHz~40GHz      | July 16, 2016    | July 15, 2017    |
| Signal analyzer            | Agilent        | N9020A                           | MY50510140  | 9kHz~26.5GHz    | October 27, 2016 | October 27, 2017 |
| LISN                       | MESS Tec       | NNB-2/16Z                        | 99079       | 9KHz-30MHz      | June 18, 2016    | June 17, 2017    |
| LISN (Support Unit)        | EMCO           | 3819/2NM                         | 9703-1839   | 9KHz-30MHz      | June 18, 2016    | June 17, 2017    |
| RF Cable-CON               | UTIFLEX        | 3102-26886-4                     | CB049       | 9KHz-30MHz      | June 18, 2016    | June 17, 2017    |
| ISN                        | SCHAFFNER      | ISN ST08                         | 21653       | 9KHz-30MHz      | June 18, 2016    | June 17, 2017    |
| 3m Semi Anechoic Chamber   | SIDT FRANKONIA | SAC-3M                           | 03CH03-HY   | 30M-18GHz 3m    | June 18, 2016    | June 17, 2017    |
| Amplifier                  | SCHAFFNER      | COA9231A                         | 18667       | 9kHz-2GHz       | June 18, 2016    | June 17, 2017    |
| Amplifier                  | Agilent        | 8449B                            | 3008A02120  | 1GHz-26.5GHz    | July 16, 2016    | July 15, 2017    |
| Amplifier                  | MITEQ          | AMF-6F-260400                    | 9121372     | 26.5GHz-40GHz   | July 16, 2016    | July 15, 2017    |
| Loop Antenna               | R&S            | HFH2-Z2                          | 860004/001  | 9k-30MHz        | June 18, 2016    | June 17, 2017    |
| By-log Antenna             | SCHWARZBECK    | VULB9163                         | 9163-470    | 30MHz-1GHz      | June 10, 2016    | June 09, 2017    |
| Horn Antenna               | EMCO           | 3115                             | 6741        | 1GHz-18GHz      | June 10, 2016    | June 09, 2017    |
| Horn Antenna               | SCHWARZBECK    | BBHA9170                         | BBHA9170154 | 15GHz-40GHz     | June 10, 2016    | June 09, 2017    |
| RF Cable-R03m              | Jye Bao        | RG142                            | CB021       | 30MHz-1GHz      | June 18, 2016    | June 17, 2017    |
| RF Cable-HIGH              | SUHNER         | SUCOFLEX 106                     | 03CH03-HY   | 1GHz-40GHz      | June 18, 2016    | June 17, 2017    |
| Power Meter                | R&S            | NRVS                             | 100444      | DC-40GHz        | June 18, 2016    | June 17, 2017    |
| Power Sensor               | R&S            | NRV-Z51                          | 100458      | DC-30GHz        | June 18, 2016    | June 17, 2017    |
| Power Sensor               | R&S            | NRV-Z32                          | 10057       | 30MHz-6GHz      | June 18, 2016    | June 17, 2017    |
| AC Power Source            | HPC            | HPA-500E                         | HPA-9100024 | AC 0~300V       | June 18, 2016    | June 17, 2017    |
| DC power Source            | GW             | GPC-6030D                        | C671845     | DC 1V-60V       | June 18, 2016    | June 17, 2017    |
| Temp. and Humidity Chamber | Giant Force    | GTH-225-20-S                     | MAB0103-00  | N/A             | June 18, 2016    | June 17, 2017    |
| RF CABLE-1m                | JYE Bao        | RG142                            | CB034-1m    | 20MHz-7GHz      | June 18, 2016    | June 17, 2017    |
| RF CABLE-2m                | JYE Bao        | RG142                            | CB)35-2m    | 20MHz-1GHz      | June 18, 2016    | June 17, 2017    |

Note: All equipment through GRGT EST calibration

## **7. TEST SETUP PHOTOGRAPHS OF EUT**

Please refer to separated files for Test Setup Photos of the EUT.

## **8. EXTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for External Photos of the EUT.

## **9. INTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----