

# Test report

**315046-1TRFWL**

Date of issue: September 13, 2016

Applicant:

**Carmanah Technologies Corp.**

Product:

**Solar Powered LED Lantern**

Model

**M660**

Model variant:

**A660 and OL4A**

FCC id:

**2AJI5-CMH660**

IC Registration number:

**21472-CMH660**

Specifications:

◆ **FCC 47 CFR Part 15 Subpart C, §15.247**

Operation in the 902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz

◆ **RSS-247, Issue 1, May 2015, Section 5**

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSS)  
and Licence-Exempt Local Area Network (LE-LAN) Devices

---

**Test location**

---

|              |  |
|--------------|--|
| Company name | Nemko Canada Inc.                                    |
| Address      | 303 River Road                                       |
| City         | Ottawa   |
| Province     | Ontario  |
| Postal code  | K1V 1H2  |
| Country      | Canada   |
| Telephone    | +1 613 737 9680                                      |
| Facsimile    | +1 613 737 9691                                      |
| Toll free    | +1 800 563 6336                                      |
| Website      | <a href="http://www.nemko.com">www.nemko.com</a>     |
| Site number  | FCC: 176392; IC: 2040A-4 (3 m semi anechoic chamber) |

|                    |   |
|--------------------|---|
| Tested by          | Kevin Rose, Wireless/EMC Specialist   |
| Reviewed by        | David Duchesne, Senior EMC/Wireless Specialist                                      |
| Review date        | September 14, 2016  |
| Reviewer signature |  |

---

**Limits of responsibility**

---

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

---

**Copyright notification**

---

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. © Nemko Canada Inc.

## Table of contents

|  |           |
|--|-----------|
| <b>Table of contents .....</b>   | <b>3</b>  |
| <b>Section 1. Report summary .....</b>   | <b>4</b>  |
| 1.1    Applicant and manufacturer .....  | 4         |
| 1.2    Test specifications .....   | 4         |
| 1.3    Test methods .....  | 4         |
| 1.4    Statement of compliance .....   | 4         |
| 1.5    Exclusions .....  | 4         |
| 1.6    Test report revision history .....  | 4         |
| <b>Section 2. Summary of test results.....</b>   | <b>5</b>  |
| 2.1    FCC Part 15 Subpart C, general requirements test results.....                                 | 5         |
| 2.2    FCC Part 15 Subpart C, intentional radiators test results.....                                | 5         |
| 2.3    IC RSS-GEN, Issue 4, test results.....  | 5         |
| 2.4    IC RSS-247, Issue 1, test results.....  | 6         |
| <b>Section 3. Equipment under test (EUT) details .....</b>   | <b>7</b>  |
| 3.1    Sample information .....  | 7         |
| 3.2    EUT information .....   | 7         |
| 3.3    Technical information .....   | 7         |
| 3.4    Product description and theory of operation .....   | 7         |
| 3.5    EUT exercise details .....  | 7         |
| 3.6    EUT setup diagram .....   | 8         |
| <b>Section 4. Engineering considerations .....</b>   | <b>9</b>  |
| 4.1    Modifications incorporated in the EUT .....   | 9         |
| 4.2    Technical judgment .....  | 9         |
| 4.3    Deviations from laboratory tests procedures .....   | 9         |
| <b>Section 5. Test conditions .....</b>  | <b>10</b> |
| 5.1    Atmospheric conditions .....  | 10        |
| 5.2    Power supply range .....  | 10        |
| <b>Section 6. Measurement uncertainty .....</b>  | <b>11</b> |
| 6.1    Uncertainty of measurement .....  | 11        |
| <b>Section 7. Test equipment .....</b>   | <b>12</b> |
| 7.1    Test equipment list .....   | 12        |
| <b>Section 8. Testing data .....</b>   | <b>13</b> |
| 8.1    FCC 15.247(a)(2) and RSS-247 5.2(1): 6 dB bandwidth (DTS-BLE) .....                           | 13        |
| 8.2    FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements .....    | 15        |
| 8.3    FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) emissions .....                          | 17        |
| 8.4    FCC 15.247(e) and RSS-247 5.2(2) Power spectral density for digitally modulated devices ..... | 24        |
| <b>Section 9. Block diagrams of test set-ups .....</b>   | <b>26</b> |
| 9.1    Radiated emissions set-up for frequencies below 1 GHz.....                                    | 26        |
| 9.2    Radiated emissions set-up for frequencies above 1 GHz.....                                    | 26        |

## Section 1. Report summary

---

### 1.1 Applicant and manufacturer

---

|              |  |
|--------------|--|
| Company name | Carmanah Technologies Corp.                  |
| Address      | 250 Bay Street Victoria, BC, Canada, V9A 3K5 |

### 1.2 Test specifications

---

|   |   |
|---|---|
| FCC 47 CFR Part 15, Subpart C, Clause 15.247<br>RSS-247, Issue 1, May 2015, Section 5 | Operation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.<br>Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |
|---|---|

### 1.3 Test methods

---

|   |   |
|---|---|
| 558074 D01 DTS Meas Guidance v03 r05<br>(April 8, 2016) | Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 |
| ANSI C63.10 v2013                                       | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                |

### 1.4 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

### 1.5 Exclusions

---

None

### 1.6 Test report revision history

---

*Table 1.6-1: Test report revision history*

| Revision # | Details of changes made to test report |
|------------|--|
| TRF        | Original report issued                 |

Notes: None

## Section 2. Summary of test results

### 2.1 FCC Part 15 Subpart C, general requirements test results

**Table 2.1-1: FCC part 15 Subpart C test results**

| Part       | Test description          | Verdict                     |
|------------|---------------------------|-----------------------------|
| §15.207(a) | Conducted limits          | Not applicable <sup>1</sup> |
| §15.31(e)  | Variation of power source | Pass <sup>2</sup>           |
| §15.203    | Antenna requirement       | Pass <sup>3</sup>           |

Notes: <sup>1</sup> The EUT is battery powered

<sup>2</sup> Equipment was tested with new battery.

<sup>3</sup> The antenna is located within the enclosure of EUT and not user accessible.

### 2.2 FCC Part 15 Subpart C, intentional radiators test results

**Table 2.2-1: FCC part 15 Subpart C, §15.247 test results**

| Part               | Test description   | Verdict        |
|--------------------|--|----------------|
| §15.247(a)(1)(i)   | Frequency hopping systems operating in the 902–928 MHz band  | Not applicable |
| §15.247(a)(1)(ii)  | Frequency hopping systems operating in the 5725–5850 MHz band  | Not applicable |
| §15.247(a)(1)(iii) | Frequency hopping systems operating in the 2400–2483.5 MHz band  | Not applicable |
| §15.247(a)(2)      | Minimum 6 dB bandwidth for systems using digital modulation techniques   | Pass           |
| §15.247(b)(1)      | Maximum peak output power of frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band        | Not applicable |
| §15.247(b)(2)      | Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band                                   | Not applicable |
| §15.247(b)(3)      | Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands | Pass           |
| §15.247(c)(1)      | Fixed point-to-point operation with directional antenna gains greater than 6 dBi   | Not applicable |
| §15.247(c)(2)      | Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams                                    | Not applicable |
| §15.247(d)         | Spurious emissions   | Pass           |
| §15.247(e)         | Power spectral density for digitally modulated devices   | Pass           |
| §15.247(f)         | Time of occupancy for hybrid systems   | Not applicable |

Notes: None

### 2.3 IC RSS-GEN, Issue 4, test results

**Table 2.3-1: RSS GEN test results**

| Part  | Test description   | Verdict                     |
|-------|--|-----------------------------|
| 7.1.2 | Receiver radiated emission limits  | Not applicable <sup>1</sup> |
| 7.1.3 | Receiver conducted emission limits                                       | Not applicable <sup>1</sup> |
| 8.8   | Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus | Not applicable <sup>2</sup> |

Notes: <sup>1</sup> According to sections 5.2 and 5.3 of RSS-Gen, Issue 4 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

<sup>2</sup> The EUT is battery powered.

## 2.4 IC RSS-247, Issue 1, test results

**Table 2.4-1: RSS 247 test results**

| Part    | Test description   | Verdict        |
|---------|--|----------------|
| 5.1     | Frequency Hopping Systems (FHSS)   |                |
| 5.1 (1) | Bandwidth of a frequency hopping channel   | Not applicable |
| 5.1 (2) | Minimum channel spacing for frequency hopping systems                                  | Not applicable |
| 5.1 (3) | Frequency hopping systems operating in the 902–928 MHz band                            | Not applicable |
| 5.1 (4) | Frequency hopping systems operating in the 2400–2483.5 MHz band                        | Not applicable |
| 5.1 (5) | Frequency hopping systems operating in the 5725–5850 MHz band                          | Not applicable |
| 5.2     | Digital Transmission Systems (DTSs)  |                |
| 5.2 (1) | Minimum 6 dB bandwidth   | Pass           |
| 5.2 (2) | Maximum power spectral density   | Pass           |
| 5.3     | Hybrid Systems   |                |
| 5.3 (1) | Digital modulation turned off  | Not applicable |
| 5.3 (2) | Frequency hopping turned off   | Not applicable |
| 5.4     | Transmitter output power and e.i.r.p. requirements                                     |                |
| 5.4 (1) | Frequency hopping systems operating in the 902–928 MHz band                            | Not applicable |
| 5.4 (2) | Frequency hopping systems operating in the 2400–2483.5 MHz band                        | Not applicable |
| 5.4 (3) | Frequency hopping systems operating in the 5725–5850 MHz                               | Not applicable |
| 5.4 (4) | Systems employing digital modulation techniques  | Pass           |
| 5.4 (5) | Point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band                       | Not applicable |
| 5.4 (6) | Transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams | Not applicable |
| 5.5     | Out-of-band emissions  | Pass           |

Notes:      None

## Section 3. Equipment under test (EUT) details

---

### 3.1 Sample information

---

|                        |                 |
|------------------------|-----------------|
| Receipt date           | August 11, 2016 |
| Nemko sample ID number | 133002688       |

### 3.2 EUT information

---

|               |                           |
|---------------|---------------------------|
| Product name  | Solar Powered LED Lantern |
| Model         | M660                      |
| Serial number | 1470383732                |

### 3.3 Technical information

---

|   |  |
|---|--|
| Applicant IC company number             | 21472  |
| IC UPN number                           | CMH660   |
| All used IC test site(s) Reg. number    | 2040A-4  |
| RSS number and Issue number             | RSS-247 Issue 1, May 2015  |
| Frequency band                          | 2400–2483.5 MHz  |
| Frequency Min (MHz)                     | 2402   |
| Frequency Max (MHz)                     | 2480   |
| RF power (W), Conducted                 | 0.00255  |
| Field strength, Units @ distance        | N/A  |
| Measured BW (kHz) (6 dB for BLE)        | 880  |
| Calculated BW (kHz), as per TRC-43      | N/A  |
| Type of modulation                      | GFSK   |
| Emission classification (F1D, G1D, D1D) | F1D  |
| Transmitter spurious, Units @ distance  | 52.34 dB $\mu$ V/m Peak and 39.32 dB $\mu$ V/m Average @ 3 m @ 2483.5 MHz  |
| Power requirements                      | 3.65Vdc  |
| Antenna information                     | The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator.<br>PCB antenna peak gain 0 dBi<br>The antennas is integrated into the printed circuit board. |

### 3.4 Product description and theory of operation

---

The EUT was controlled via USB to Serial dongle to change Low, Mid, and High channels.


### 3.5 EUT exercise details

---

The EUT was set for continuous transmission.

### 3.6 EUT setup diagram

---

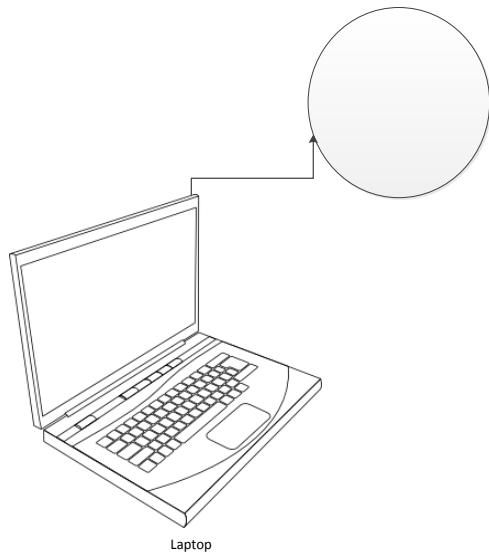

## Section 4. Engineering considerations

---

### 4.1 Modifications incorporated in the EUT

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

Model Numbers:

"M660" (Marine), "A660" (Aviation), "OL4A" (Obstruction)

All models have different features as detailed:

Product Options (indicated on product label):

- LED Color ("BLU" = Blue, "YLW" = Yellow, "GRN" = Green/Cyan, "RED" = Red/Red-Orange, "WHT" = White)
- Switch ("SW" = With Switch, no text indicates no switch)
- Charge Port (MCHRGPT = Military Style Charge Port, CHRGPT = Standard Charge Port. No text indicates no charge port)
- Battery (DUAL = Dual Battery. No text indicates single battery)

### 4.3 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.

## Section 5. Test conditions

---

### 5.1 Atmospheric conditions

---

|                   |               |
|-------------------|---------------|
| Temperature       | 15–30 °C      |
| Relative humidity | 20–75 %       |
| Air pressure      | 860–1060 mbar |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

### 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 6. Measurement uncertainty

---

### 6.1 Uncertainty of measurement

---

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of  $K = 2$  with 95% certainty.

| Test name                     | Measurement uncertainty, dB |
|-------------------------------|-----------------------------|
| All antenna port measurements | 0.55                        |
| Conducted spurious emissions  | 1.13                        |
| Radiated spurious emissions   | 3.78                        |

## Section 7. Test equipment

### 7.1 Test equipment list

*Table 7.1-1: Equipment list*

| Equipment                   | Manufacturer       | Model no.     | Asset no. | Cal cycle | Next cal.   |
|-----------------------------|--------------------|---------------|-----------|-----------|-------------|
| 3 m EMI test chamber        | TDK                | SAC-3         | FA002047  | 1 year    | Dec. 01/16  |
| Receiver/spectrum analyzer  | Rohde & Schwarz    | ESU 26        | FA002043  | 1 year    | Jan. 07/17  |
| Spectrum analyzer           | Rohde & Schwarz    | FSU           | FA001877  | 1 year    | Apr. 15/17  |
| Bilog antenna (20–3000 MHz) | Sunol              | JB3           | FA002108  | 1 year    | Apr. 28/17  |
| Horn antenna (1–18 GHz)     | EMCO               | 3115          | FA000825  | 1 year    | Apr. 26/17  |
| Horn antenna 18–40 GHz      | EMCO               | 3116          | FA001847  | 1 year    | Apr. 15/17  |
| Pre-amplifier (1–18 GHz)    | JCA                | JCA118-503    | FA002091  | 1 year    | April 26/17 |
| Pre-amplifier (18–26 GHz)   | Narda              | BBS-1826N612  | FA001550  | —         | VOU         |
| Notch filter 2400–2483 MHz  | Microwave Circuits | 2400–2483 MHz | FA001940  | —         | VOU         |

Notes: VOU - verify on use

*Table 7.1-2: Test software*

| Test description            | Manufacturer of Software | Details   |
|-----------------------------|--------------------------|---|
| Radiated emissions – Ottawa | Rhode & Schwarz          | EMC32, Software for EMC Measurements, Version 9.26.01 |
| Notes: None                 |                          |   |

## Section 8. Testing data

---

### 8.1 FCC 15.247(a)(2) and RSS-247 5.2(1): 6 dB bandwidth (DTS-BLE)

---

#### 8.1.1 Definitions and limits

---

##### FCC §15.247 (a)(2):

- (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
- (2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

##### RSS-247, Clause 5.2 (1):

The minimum 6 dB bandwidth shall be 500 kHz.

#### 8.1.2 Test summary

---

|             |                   |                   |            |              |           |  |
|-------------|-------------------|-------------------|------------|--------------|-----------|--|
| Verdict     | Pass              |                   |            |              |           |  |
| Test date   | September 8, 2016 | Test engineer     | Kevin Rose |              |           |  |
| Temperature | 24 °C             | Relative humidity | 48 %       | Air pressure | 1003 mbar |  |

#### 8.1.3 Notes

---

Measurements were performed as per 558074 D01 DTS Meas Guidance v03r05 (The test was performed using method described in Section 8.1)

#### 8.1.4 Setup details

---

Spectrum analyser settings: for 6 dB bandwidth test:

|                      |          |  |  |  |
|----------------------|----------|--|--|--|
| Resolution bandwidth | 100 kHz  |  |  |  |
| Video bandwidth      | ≥3 × RBW |  |  |  |
| Frequency span       | 10 MHz   |  |  |  |
| Detector mode        | Peak     |  |  |  |
| Trace mode           | Max Hold |  |  |  |

#### 8.1.5 Test data


---

**Table 8.1-1: 6 dB bandwidth results**

| Frequency, MHz | 6 dB bandwidth, kHz | Minimum limit, kHz | Margin, kHz |
|----------------|---------------------|--------------------|-------------|
| 2402           | 880                 | 500                | 380         |
| 2440           | 820                 | 500                | 320         |
| 2480           | 880                 | 500                | 380         |


Notes: None

### 8.1.6 Test data, continued

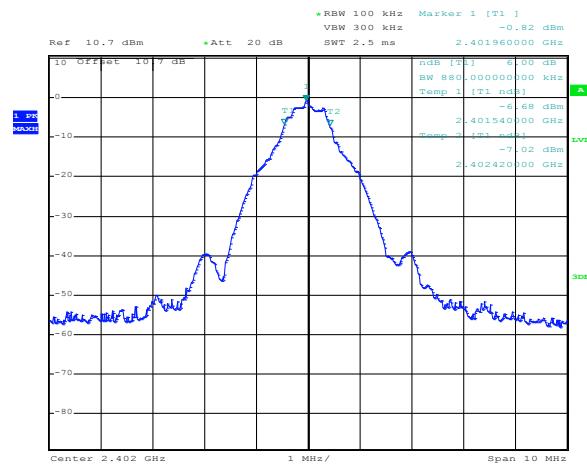


Date: 1.SEP.2016 13:26:00

**Figure 8.1-1: 6 dB bandwidth on low channel**

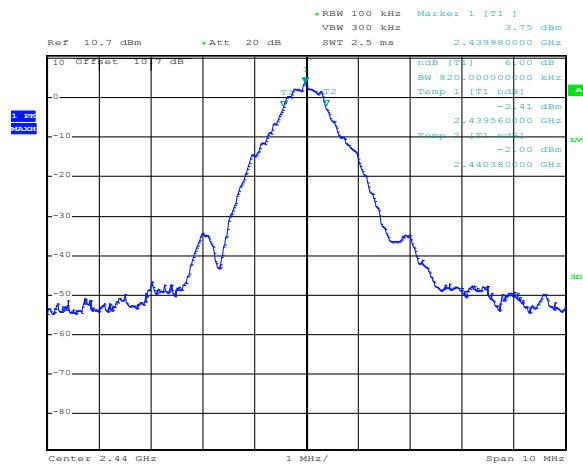

Date: 1.SEP.2016 13:23:58

**Figure 8.1-2: 6 dB bandwidth on mid channel**

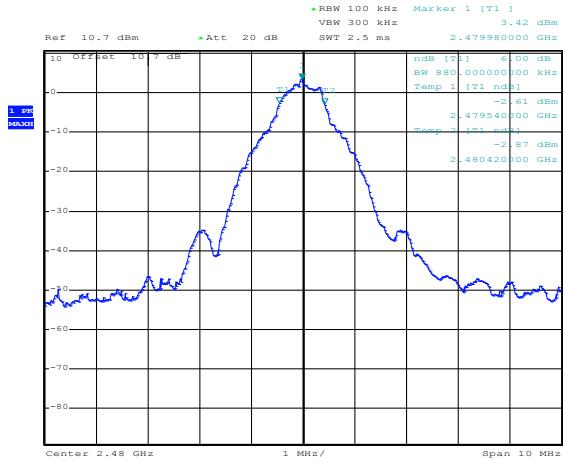

Date: 1.SEP.2016 13:19:26

**Figure 8.1-3: 6 dB bandwidth on high channel**

## 8.2 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements

### 8.2.1 Definitions and limits

#### FCC §15.247 (b)(3,4):

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 W (30 dBm). As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
- (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### RSS-247, Clause 5.4 (4):

For DTSs employing digital modulation techniques operating in the bands 902–928 MHz and 2400–2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W. Fixed point-to-point systems in the bands 2400–2483.5 MHz and 5725–5850 MHz are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding an e.i.r.p. of 4 W.

### 8.2.2 Test summary

|             |                   |                   |            |              |
|-------------|-------------------|-------------------|------------|--------------|
| Verdict     | Pass              |                   |            |              |
| Test date   | September 8, 2016 | Test engineer     | Kevin Rose |              |
| Temperature | 24 °C             | Relative humidity | 48 %       | Air pressure |

### 8.2.3 Notes

- The test was performed according to 558074 D01 DTS Meas Guidance v03r05 (The test was performed using method described in Section 9.1.1: Maximum peak conducted output power.)

### 8.2.4 Setup details

#### Spectrum analyser settings:


|                      |          |
|----------------------|----------|
| Resolution bandwidth | 1 MHz    |
| Video bandwidth      | ≥3 × RBW |
| Frequency span       | 3 MHz    |
| Detector mode        | Peak     |
| Trace mode           | Max Hold |

## 8.2.5 Test data

**Table 8.2-1: Output power measurements results**


| Frequency, MHz | Output power, dBm | Output power limit, dBm | Margin, dB | Antenna gain, dBi | EIRP, dBm | EIRP limit, dBm | EIRP margin, dB |
|----------------|-------------------|-------------------------|------------|-------------------|-----------|-----------------|-----------------|
| 2402           | 4.07              | 30                      | 25.93      | 0                 | 4.07      | 36              | 31.93           |
| 2440           | 3.92              | 30                      | 26.08      | 0                 | 3.92      | 36              | 32.08           |
| 2480           | 3.59              | 30                      | 26.41      | 0                 | 3.59      | 36              | 32.41           |

Notes: EIRP =Conducted output power + Antenna factor

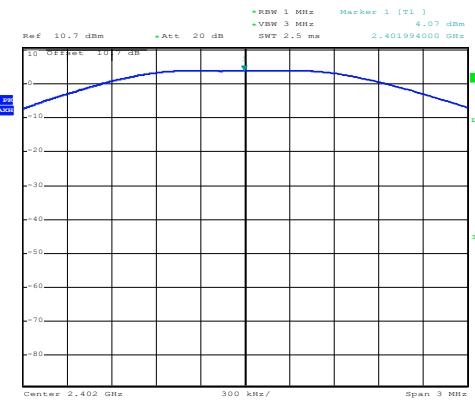


Date: 1.SEP.2016 13:36:04

**Figure 8.2-1: Output power on low channel**

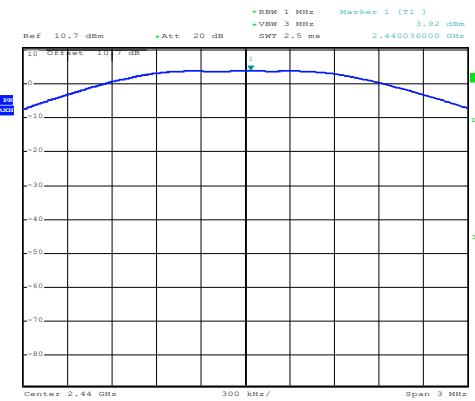

Date: 1.SEP.2016 13:38:17

**Figure 8.2-2: Output power on mid channel**

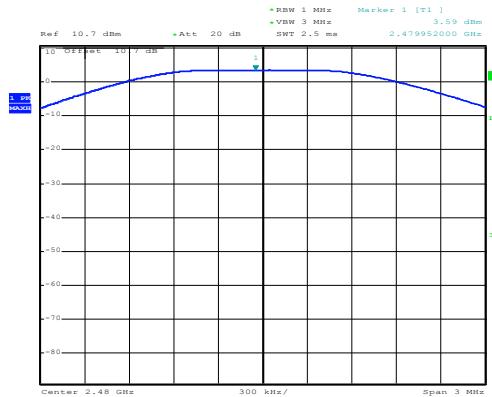

Date: 1.SEP.2016 13:38:58

**Figure 8.2-3: Output power on high channel**

## 8.3 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) emissions

### 8.3.1 Definitions and limits

#### FCC §15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### RSS-247, Clause 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

**Table 8.3-1: FCC §15.209 and RSS-Gen – Radiated emission limits**

| Frequency, MHz | Field strength of emissions |                                   | Measurement distance, m |
|----------------|-----------------------------|-----------------------------------|-------------------------|
|                | µV/m                        | dBµV/m                            |                         |
| 0.009–0.490    | 2400/F                      | 67.6 – 20 × log <sub>10</sub> (F) | 300                     |
| 0.490–1.705    | 24000/F                     | 87.6 – 20 × log <sub>10</sub> (F) | 30                      |
| 1.705–30.0     | 30                          | 29.5                              | 30                      |
| 30–88          | 100                         | 40.0                              | 3                       |
| 88–216         | 150                         | 43.5                              | 3                       |
| 216–960        | 200                         | 46.0                              | 3                       |
| above 960      | 500                         | 54.0                              | 3                       |

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

**Table 8.3-2: IC restricted frequency bands**

| MHz             | MHz                 | MHz           | GHz         |
|-----------------|---------------------|---------------|-------------|
| 0.090–0.110     | 12.51975–12.52025   | 399.9–410     | 5.35–5.46   |
| 2.1735–2.1905   | 12.57675–12.57725   | 608–614       | 7.25–7.75   |
| 3.020–3.026     | 13.36–13.41         | 960–1427      | 8.025–8.5   |
| 4.125–4.128     | 16.42–16.423        | 1435–1626.5   | 9.0–9.2     |
| 4.17725–4.17775 | 16.69475–16.69525   | 1645.5–1646.5 | 9.3–9.5     |
| 4.20725–4.20775 | 16.80425–16.80475   | 1660–1710     | 10.6–12.7   |
| 5.677–5.683     | 25.5–25.67          | 1718.8–1722.2 | 13.25–13.4  |
| 6.215–6.218     | 37.5–38.25          | 2200–2300     | 14.47–14.5  |
| 6.26775–6.26825 | 73–74.6             | 2310–2390     | 15.35–16.2  |
| 6.31175–6.31225 | 74.8–75.2           | 2655–2900     | 17.7–21.4   |
| 8.291–8.294     | 108–138             | 3260–3267     | 22.01–23.12 |
| 8.362–8.366     | 156.52475–156.52525 | 3332–3339     | 23.6–24.0   |
| 8.37625–8.38675 | 156.7–156.9         | 3345.8–3358   | 31.2–31.8   |
| 8.41425–8.41475 | 240–285             | 3500–4400     | 36.43–36.5  |
| 12.29–12.293    | 322–335.4           | 4500–5150     | Above 38.6  |

Notes: Certain frequency bands listed in this table and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

**Table 8.3-3: FCC restricted frequency bands**

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110       | 16.42–16.423        | 399.9–410     | 4.5–5.15    |
| 0.495–0.505       | 16.69475–16.69525   | 608–614       | 5.35–5.46   |
| 2.1735–2.1905     | 16.80425–16.80475   | 960–1240      | 7.25–7.75   |
| 4.125–4.128       | 25.5–25.67          | 1300–1427     | 8.025–8.5   |
| 4.17725–4.17775   | 37.5–38.25          | 1435–1626.5   | 9.0–9.2     |
| 4.20725–4.20775   | 73–74.6             | 1645.5–1646.5 | 9.3–9.5     |
| 6.215–6.218       | 74.8–75.2           | 1660–1710     | 10.6–12.7   |
| 6.26775–6.26825   | 108–121.94          | 1718.8–1722.2 | 13.25–13.4  |
| 6.31175–6.31225   | 123–138             | 2200–2300     | 14.47–14.5  |
| 8.291–8.294       | 149.9–150.05        | 2310–2390     | 15.35–16.2  |
| 8.362–8.366       | 156.52475–156.52525 | 2483.5–2500   | 17.7–21.4   |
| 8.37625–8.38675   | 156.7–156.9         | 2690–2900     | 22.01–23.12 |
| 8.41425–8.41475   | 162.0125–167.17     | 3260–3267     | 23.6–24.0   |
| 12.29–12.293      | 167.72–173.2        | 3332–3339     | 31.2–31.8   |
| 12.51975–12.52025 | 240–285             | 3345.8–3358   | 36.43–36.5  |
| 12.57675–12.57725 | 322–335.4           | 3600–4400     | Above 38.6  |
| 13.36–13.41       |                     |               |             |

### 8.3.2 Test summary

| Verdict     | Pass              |                   |            |
|-------------|-------------------|-------------------|------------|
| Test date   | September 8, 2016 | Test engineer     | Kevin Rose |
| Temperature | 24 °C             | Relative humidity | 48 %       |
|             |                   | Air pressure      | 1003 mbar  |

### 8.3.3 Notes

- The spectrum was searched from 30 MHz to the 10<sup>th</sup> harmonic.
- Since fundamental power was tested using peak method, the spurious emissions limit is –20 dBc/100 kHz
- The radiated spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).
- The EUT was tested in three orthogonal positions to determine worst case emissions.

### 8.3.4 Setup details

Spectrum analyser settings for radiated measurements for spurious out of band emissions:

|                       |          |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz  |
| Video bandwidth:      | 300 kHz  |
| Detector mode:        | Peak     |
| Trace mode:           | Max Hold |

Spectrum analyser settings for radiated measurements within restricted bands below 1 GHz:


|                       |          |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz  |
| Video bandwidth:      | 300 kHz  |
| Detector mode:        | Peak     |
| Trace mode:           | Max Hold |

Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:

|                       |          |
|-----------------------|----------|
| Resolution bandwidth: | 1 MHz    |
| Video bandwidth:      | 3 MHz    |
| Detector mode:        | Peak     |
| Trace mode:           | Max Hold |


### 8.3.5 Test data, continued

#### Conducted spurious out of band emissions (-20 dBc/100 kHz)

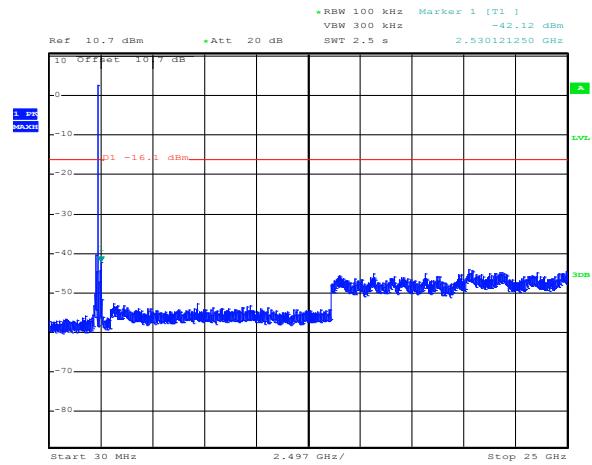


Date: 1.SEP.2016 14:08:39

**Figure 8.3-1: Conducted spurious emissions, low channel, 30 MHz to 25 GHz**

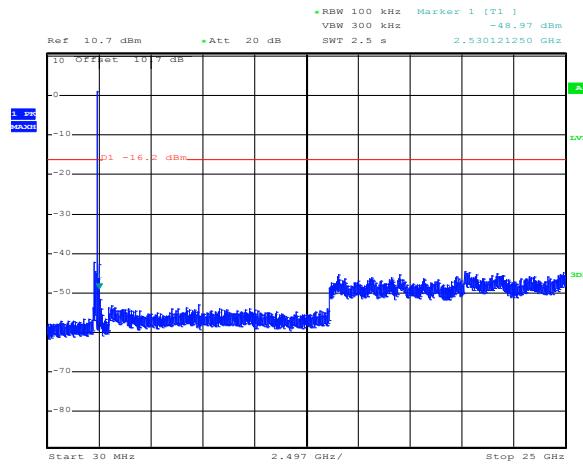

Date: 1.SEP.2016 14:09:59

**Figure 8.3-2: Conducted spurious emissions, mid channel, 30 MHz to 25 GHz**


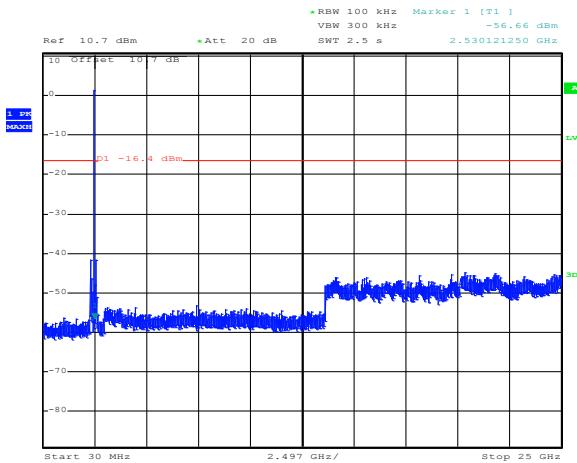


Date: 1.SEP.2016 14:10:33

**Figure 8.3-3: Conducted spurious emissions, high channel, 30 MHz to 25 GHz**

### 8.3.5 Test data, continued

#### Conducted spurious out of band emissions (-20 dBc/100 kHz)

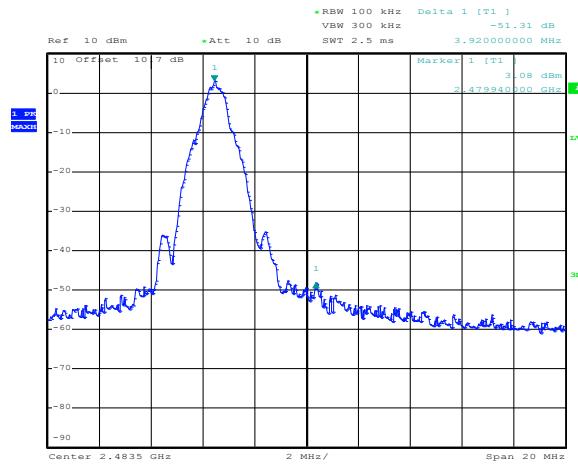
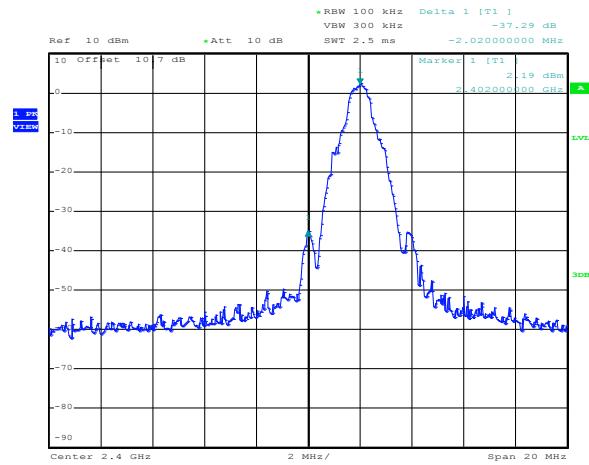


**Figure 8.3-4:** Conducted spurious emissions, low channel, band edge


**Figure 8.3-5:** Conducted spurious emissions, High channel, upper band edge

### 8.3.5 Test data, continued

#### Spurious out of band emissions within restricted bands

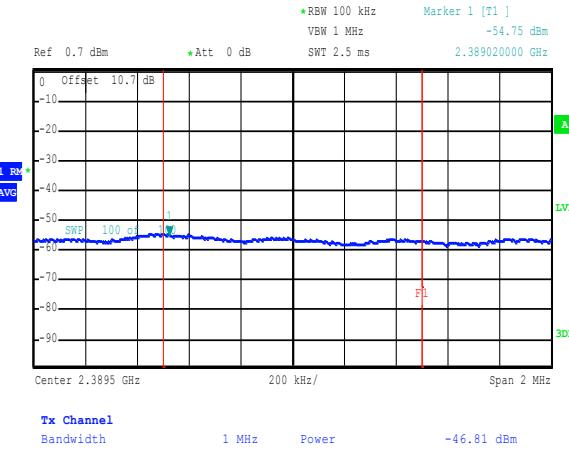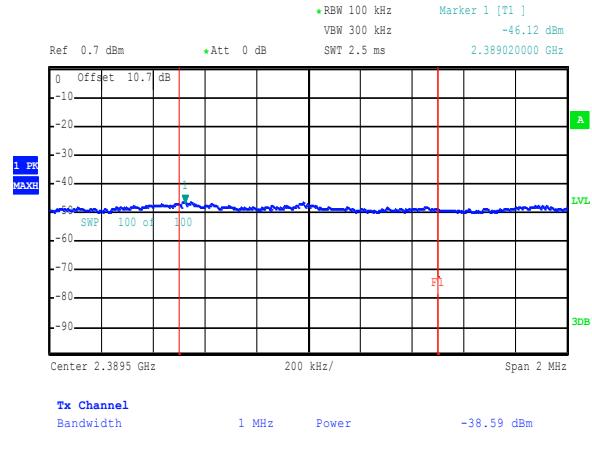


**Figure 8.3-6: Spurious emissions lower band edge emission peak**

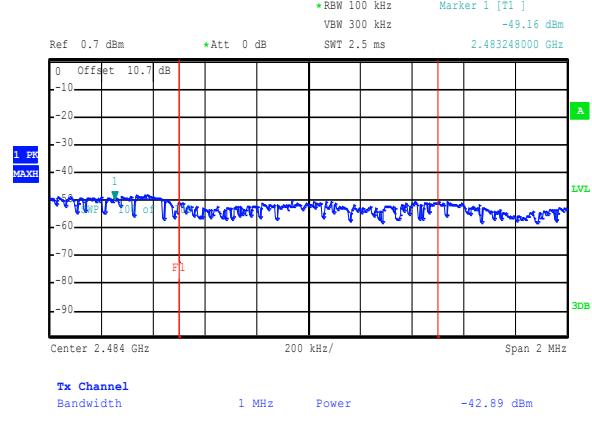

**Figure 8.3-8: Spurious emissions upper band edge emission peak**


**Figure 8.3-7: Spurious emissions lower band edge emission avg.**

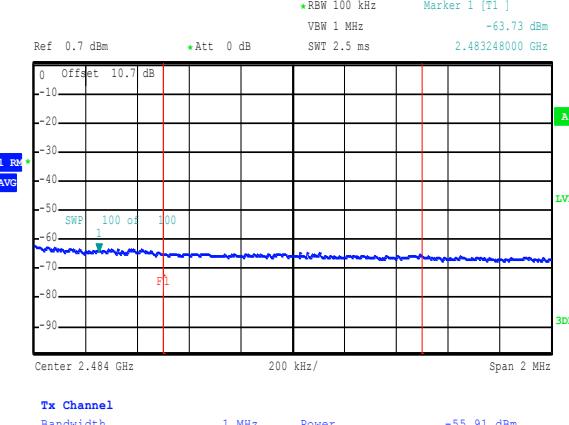


**Figure 8.3-9: Spurious emissions upper band edge emission avg.**

### 8.3.5 Test data, continued


#### Radiated spurious out of band emissions within restricted bands

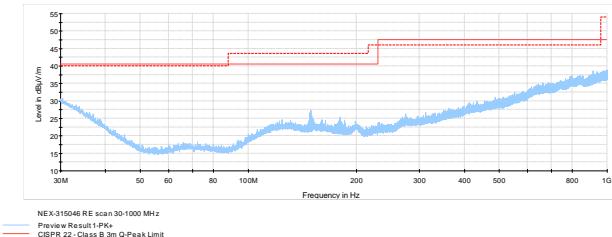


**Figure 8.3-10:** Radiated spurious emissions, low, mid, and high channel, 30 to 1000 MHz

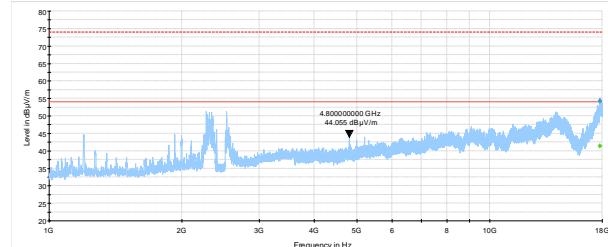

**Figure 8.3-11:** Radiated spurious emissions low channel, 1-18 GHz

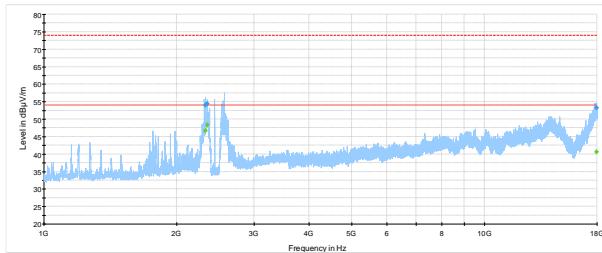


**Figure 8.3-12:** Radiated spurious emissions mid channel, 1-18 GHz

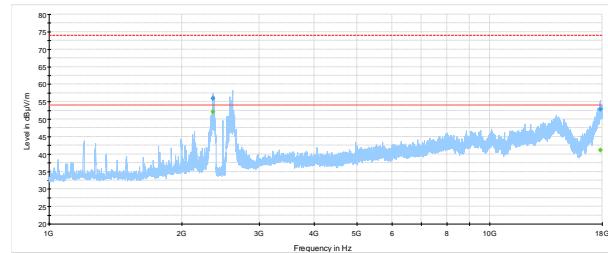


**Figure 8.3-13:** Radiated spurious emissions, high channel, 1-18 GHz

### 8.3.5 Setup photos

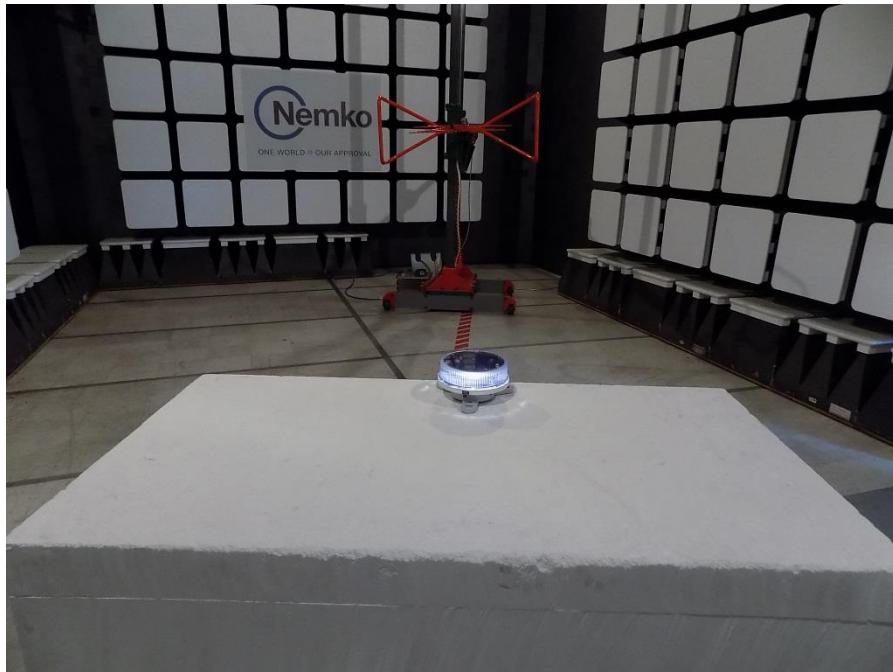

**Figure 8.3-14:** Radiated spurious (out-of-band) emissions setup photo – 30 to 1000 MHz

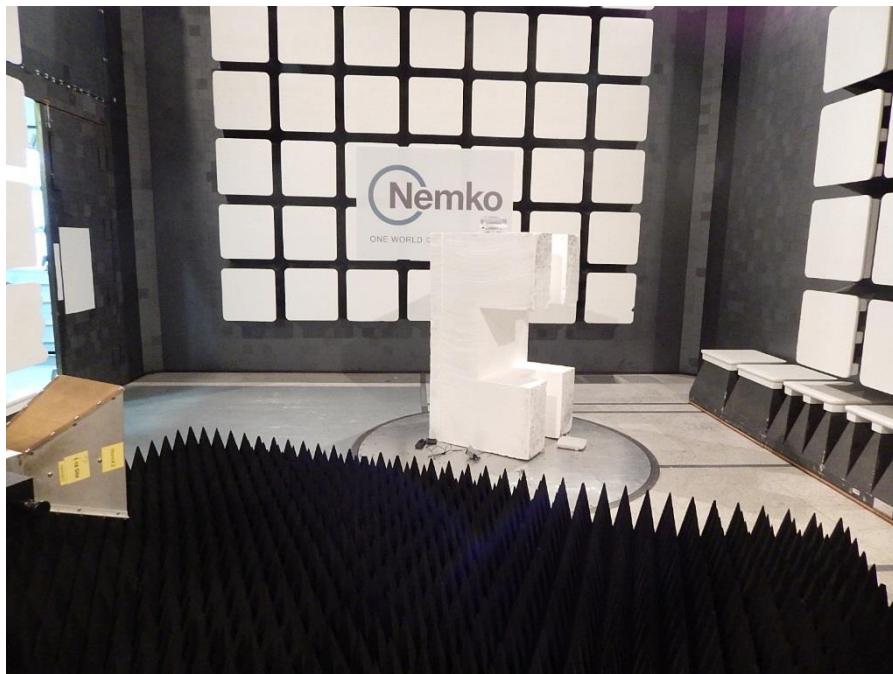

**Figure 8.3-15:** Radiated spurious (out-of-band) emissions setup photo – 1-18 GHz

## 8.4 FCC 15.247(e) and RSS-247 5.2(2) Power spectral density for digitally modulated devices

---

### 8.4.1 Definitions and limits

---

#### FCC §15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### RSS-247, Clause 5.2 (2):

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### 8.4.2 Test summary

---

|             |                   |                   |            |              |           |
|-------------|-------------------|-------------------|------------|--------------|-----------|
| Verdict     | Pass              |                   |            |              |           |
| Test date   | September 1, 2016 | Test engineer     | Kevin Rose |              |           |
| Temperature | 24 °C             | Relative humidity | 48 %       | Air pressure | 1003 mbar |

### 8.4.3 Notes

---

Measurements were performed as per 558074 D01 DTS Meas Guidance v03r05. (The test was performed using method described in section 10.2 Method PKPSD (peak PSD)).

### 8.4.4 Setup details

---

#### Spectrum analyser settings:


|                       |                             |
|-----------------------|-----------------------------|
| Resolution bandwidth: | 3 kHz                       |
| Video bandwidth:      | 10 kHz                      |
| Frequency span:       | 1.5 times the DTS bandwidth |
| Detector mode:        | Peak                        |
| Trace mode:           | Max Hold                    |

## 8.4.5 Test data

**Table 8.4-1: PSD measurements results**


| Freq., MHz | EIRP, dBm /3 kHz | Antenna Factor, dBi | PSD <sup>4</sup> , dBm/3 kHz | PSD limit, dBm/3 kHz | Margin, dB |
|------------|------------------|---------------------|------------------------------|----------------------|------------|
| 2402       | -9.32            | 0                   | -9.32                        | 8                    | 17.32      |
| 2440       | -8.89            | 0                   | -8.89                        | 8                    | 16.89      |
| 2480       | -10.87           | 0                   | -10.87                       | 8                    | 18.87      |

Notes: none

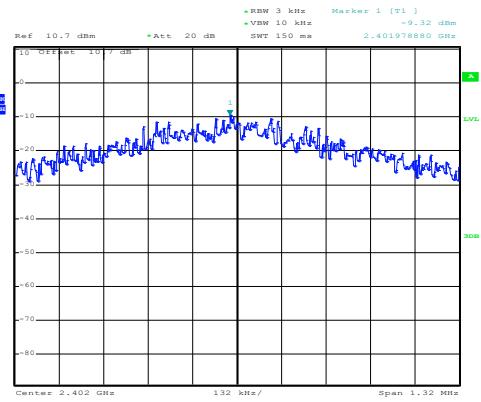


Date: 1.SEP.2016 13:50:43

**Figure 8.4-1: PSD sample plot on low channel**

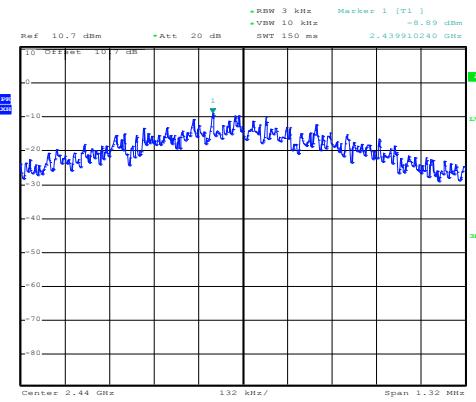

Date: 1.SEP.2016 13:46:47

**Figure 8.4-2: PSD sample plot on mid channel**

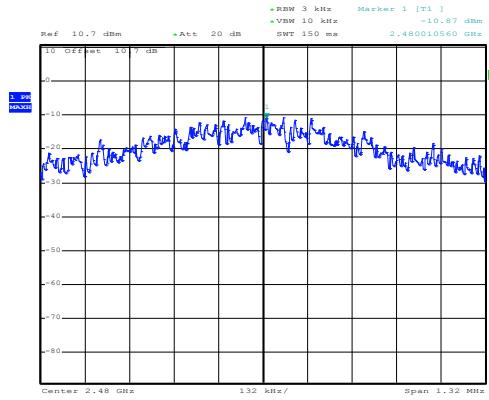


Date: 1.SEP.2016 13:45:41

**Figure 8.4-3: PSD sample plot on high channel**

## Section 9. Block diagrams of test set-ups

### 9.1 Radiated emissions set-up for frequencies below 1 GHz

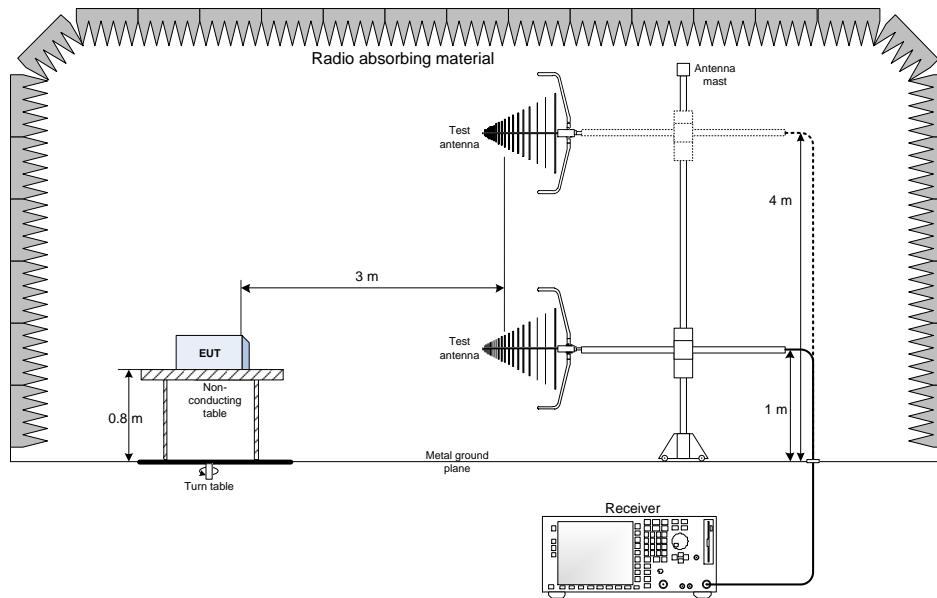

### 9.2 Radiated emissions set-up for frequencies above 1 GHz

