

No. 1 Workshop, M-10, Middle section, Science & Technology Park,

Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Report No.: SZEM180800801702

Fax: +86 (0) 755 2671 0594 Page: 1 of 92

## TEST REPORT

**Application No.:** SZEM1808008017CR **Applicant:** Creative Labs Pte. Ltd.

Address of Applicant: 31 International Business Park, #03-01 Creative Resource, Singapore

609921

Manufacturer: Creative Labs Pte. Ltd.

Address of Manufacturer: 31 International Business Park, #03-01 Creative Resource, Singapore

609921

**Equipment Under Test (EUT):** 

EUT Name: SXFI AIR
Model No.: EF0810
Trade mark: Creative

FCC ID: 2AJIV-EF0810

Standard(s): 47 CFR Part 15, Subpart C 15.247

**Date of Receipt:** 2018-09-10

**Date of Test:** 2018-09-18 to 2018-11-28

**Date of Issue:** 2018-12-03

Test Result: Pass\*



EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document dhereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM180800801702

Page: 2 of 92

	Revision Record							
Version	Chapter	Date	Modifier	Remark				
01		2018-12-03		Original				

Authorized for issue by:		
	Vincent Chen	
	Vincent Chen /Project Engineer	
	EvicFu	
	Eric Fu /Reviewer	



Report No.: SZEM180800801702

Page: 3 of 92

## 2 Test Summary

Radio Spectrum Technical Requirement						
Item	Standard	Method	Requirement	Result		
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass		
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass		

Radio Spectrum Matter Part						
Item	Standard	Method	Requirement	Result		
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass		
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass		
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass		
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass		
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass		
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass		
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass		
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass		
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass		
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass		



Report No.: SZEM180800801702

Page: 4 of 92

#### 3 Contents

			rage
1	COVE	R PAGE	1
2	TEST	SUMMARY	3
3	CONT	ENTS	4
4	GENE	RAL INFORMATION	6
		DETAILS OF E.U.T.	
	4.2	DESCRIPTION OF SUPPORT UNITS	6
		MEASUREMENT UNCERTAINTY	
	4.4	FEST LOCATION	7
		FEST FACILITY	
		DEVIATION FROM STANDARDS	
	4.7 A	ABNORMALITIES FROM STANDARD CONDITIONS	7
5	EQUII	PMENT LIST	8
_	DADI	O SPECTRUM TECHNICAL REQUIREMENT	40
6			
		Antenna Requirement	
	6.1.1	Test Requirement:	
	6.1.2	Conclusion	
		OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM HOPPING SEQUENCE	
	6.2.1	Test Requirement:	
	6.2.2	Conclusion	13
7	RADIO	O SPECTRUM MATTER TEST RESULTS	14
	7.1	CONDUCTED EMISSIONS AT AC POWER LINE (150KHz-30MHz)	14
	7.1.1	E.U.T. Operation	
	7.1.2	Test Setup Diagram	
	7.1.3	Measurement Procedure and Data	
		CONDUCTED PEAK OUTPUT POWER	
	7.2.1	E.U.T. Operation	
	7.2.2	Test Setup Diagram	
	7.2.3	Measurement Procedure and Data	
		20DB BANDWIDTH	
	7.3.1 7.3.2	,	
	7.3.2 7.3.3	Test Setup Diagram Measurement Procedure and Data	
		CARRIER FREQUENCIES SEPARATION	
	7.4.1	E.U.T. Operation	
	7.4.2	Test Setup Diagram	
	7.4.3	Measurement Procedure and Data	
	_	HOPPING CHANNEL NUMBER	
	7.5.1	E.U.T. Operation	
	7.5.2	Test Setup Diagram	
	7.5.3	Measurement Procedure and Data	
		DWELL TIME	
	7.6.1	E.U.T. Operation	
	7.6.2	Test Setup Diagram	
	7.6.3	Measurement Procedure and Data	



Report No.: SZEM180800801702

Page: 5 of 92

7.7	CONDUCTED BAND EDGES MEASUREMENT	23
7	7.7.1 E.U.T. Operation	24
7	7.7.2 Test Setup Diagram	24
7	7.7.3 Measurement Procedure and Data	
7.8	CONDUCTED SPURIOUS EMISSIONS	25
7	7.8.1 E.U.T. Operation	26
7	7.8.2 Test Setup Diagram	26
7	7.8.3 Measurement Procedure and Data	26
7.9	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	27
7	7.9.1 E.U.T. Operation	
7	7.9.2 Test Setup Diagram	
7	7.9.3 Measurement Procedure and Data	29
7.10	0 RADIATED SPURIOUS EMISSIONS	34
7	7.10.1 E.U.T. Operation	
7	7.10.2 Test Setup Diagram	
7	7.10.3 Measurement Procedure and Data	36
8 F	PHOTOGRAPHS	45
8.1	Test Setup	45
8.2	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	45
9 4	APPENDIX	46
9.1	APPENDIX 15.247	46-92



Report No.: SZEM180800801702

Page: 6 of 92

## 4 General Information

#### 4.1 Details of E.U.T.

DC 3.7V/ 1300mAh rechargeable lithium battery	
Charge by DC 5V from USB port	
USB cable 201cm shielded	
Line in cable 158cm unshielded	
Microphone connector	
2402MHz to 2480MHz	
V4.2	
Frequency Hopping Spread Spectrum(FHSS)	
GFSK, π/4DQPSK, 8DPSK	
79	
Adaptive Frequency Hopping systems	
Chip	
-1.18dBi	

#### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Adapter	Apple	A1357 W010A051	REF. No.SEA0500

#### 4.3 Measurement Uncertainty

No.	ltem	Measurement Uncertainty
1	Radio Frequency	± 7.25 x 10 <sup>-8</sup>
2	Duty cycle	± 0.37%
3	Occupied Bandwidth	± 3%
4	RF conducted power	± 0.75dB
5	RF power density	± 2.84dB
6	Conducted Spurious emissions	± 0.75dB
7	DE Dadiated news	± 4.5dB (below 1GHz)
/	RF Radiated power	± 4.8dB (above 1GHz)
8	Dedicted Couriers emission test	± 4.5dB (Below 1GHz)
0	Radiated Spurious emission test	± 4.8dB (Above 1GHz)
9	Temperature test	± 1 ℃
10	Humidity test	± 3%
11	Supply voltages	± 1.5%
12	Time	± 3%



Report No.: SZEM180800801702

Page: 7 of 92

#### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### · CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC

Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

#### FCC –Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

#### Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None



Report No.: SZEM180800801702

Page: 8 of 92

## 5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)						
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date	
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017-05-10	2020-05-09	
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A	
Coaxial Cable	SGS	N/A	SEM024-01	2018-07-12	2019-07-11	
LISN	Rohde & Schwarz	ENV216	SEM007-01	2018-09-25	2019-09-24	
LISN	ETS-LINDGREN	3816/2	SEM007-02	2018-04-02	2019-04-01	
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2018-04-02	2019-04-01	

Conducted Peak Output Power						
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date	
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2018-09-25	2019-09-24	
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2018-09-27	2019-09-26	
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A	
Coaxial Cable	SGS	N/A	SEM031-02	2018-07-12	2019-07-11	
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A	
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018-09-27	2019-09-26	
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018-09-25	2019-09-24	

20dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2018-09-25	2019-09-24
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2018-09-27	2019-09-26
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-02	2018-07-12	2019-07-11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018-09-27	2019-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018-09-25	2019-09-24

Carrier Frequencies Separation						
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date	
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2018-09-25	2019-09-24	
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2018-09-27	2019-09-26	
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A	
Coaxial Cable	SGS	N/A	SEM031-02	2018-07-12	2019-07-11	
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A	
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018-09-27	2019-09-26	
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018-09-25	2019-09-24	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sqs.com/en/Terms-and-Conditions.aspx">http://www.sqs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM180800801702

Page: 9 of 92

Hopping Channel Number						
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date	
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2018-09-25	2019-09-24	
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2018-09-27	2019-09-26	
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A	
Coaxial Cable	SGS	N/A	SEM031-02	2018-07-12	2019-07-11	
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A	
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018-09-27	2019-09-26	
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018-09-25	2019-09-24	

Dwell Time					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2018-09-25	2019-09-24
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2018-09-27	2019-09-26
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-02	2018-07-12	2019-07-11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018-09-27	2019-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018-09-25	2019-09-24

Conducted Band Edges Measurement							
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date		
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2018-09-25	2019-09-24		
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2018-09-27	2019-09-26		
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A		
Coaxial Cable	SGS	N/A	SEM031-02	2018-07-12	2019-07-11		
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A		
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018-09-27	2019-09-26		
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018-09-25	2019-09-24		

Conducted Spurious Emissions						
Equipment	Equipment Manufacturer		Inventory No	Cal Date	Cal Due Date	
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2018-09-25	2019-09-24	
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2018-09-27	2019-09-26	
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A	
Coaxial Cable	SGS	N/A	SEM031-02	2018-07-12	2019-07-11	
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A	
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018-09-27	2019-09-26	
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018-09-25	2019-09-24	



Report No.: SZEM180800801702

Page: 10 of 92

Radiated Emissions (30MHz-1GHz)						
Equipment	Manufacturer	Model No Inventory No		Cal Date	Cal Due Date	
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-08-05	2020-08-04	
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A	
Coaxial Cable	SGS	N/A	SEM025-01	2018-07-12	2019-07-11	
EMI Test Receiver	Agilant Tachnalagias	N9038A	SEM004-05	2017-09-27	2019-09-26	
EIVII Test Receiver	Agilent Technologies	N9036A	SEIVI004-05	2018-09-25	2019-09-24	
BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017-06-27	2020-06-26	
Pre-amplifier (0.1- 1300MHz)	Agilent Technologies	8447D	SEM005-01	2018-04-02	2019-04-01	

Radiated Emissions which fall in the restricted bands and Radiated Spurious Emissions above 1GHz					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018-07-12	2019-07-11
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2018-04-02	2019-04-01
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2018-09-25	2019-09-24
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2018-09-27	2019-09-26
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018-04-02	2019-04-01
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2018-04-02	2019-04-01
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2018-09-25	2019-09-24
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A



Report No.: SZEM180800801702

Page: 11 of 92

General used equipmen	t				
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2018-09-27	2019-09-26
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2018-09-27	2019-09-26
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2018-09-27	2019-09-26
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2018-04-08	2019-04-07



Report No.: SZEM180800801702

Page: 12 of 92

## 6 Radio Spectrum Technical Requirement

#### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

#### 6.1.2 Conclusion

#### Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -1.18dBi.

Antenna location: Refer to Appendix(Internal photos)



Report No.: SZEM180800801702

Page: 13 of 92

## 6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

#### 6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

#### 6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- > Number of shift register stages: 9
- > Length of pseudo-random sequence: 29 -1 = 511 bits
- > Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



Report No.: SZEM180800801702

Page: 14 of 92

## 7 Radio Spectrum Matter Test Results

#### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Francisco of amission/MUs	Conducted limit(dBµV)				
Frequency of emission(MHz)	Quasi-peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			
*Decreases with the logarithm of the frequency.					



Report No.: SZEM180800801702

Page: 15 of 92

#### 7.1.1 E.U.T. Operation

Operating Environment:


Temperature: 22.8 °C Humidity: 49.4 % RH Atmospheric Pressure: 1010 mbar

Test mode: c:Charge + TX\_non-Hop mode\_Keep the EUT in charging and continuously

transmitting mode with GFSK modulation,  $\pi/4DQPSK$  modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is

recorded in the report.

#### 7.1.2 Test Setup Diagram

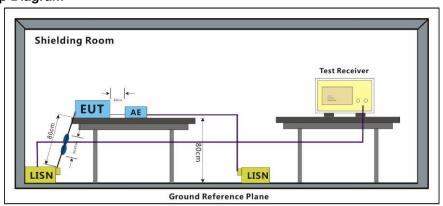

#### 7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50 \text{ohm}/50 \mu\text{H} + 5 \text{ohm}$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor



Report No.: SZEM180800801702

Page: 16 of 92

Mode:c; Line:Live Line

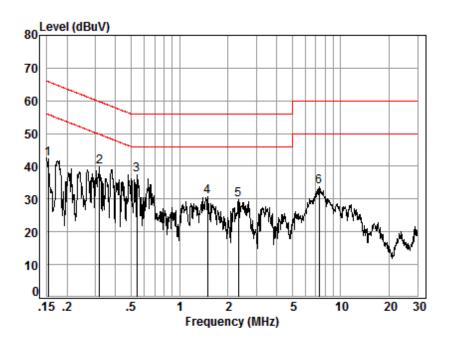

Site : Shielding Room

Condition: Line Job No. : 08017CR

Test mode: c


		Cable	LISN	Read		Limit	0ver	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15	0.01	9.66	32.55	42.22	55.87	-13.65	Peak
2	0.32	0.04	9.67	30.14	39.85	49.75	-9.90	Peak
3	0.54	0.06	9.67	27.61	37.34	46.00	-8.66	Peak
4	1.49	0.13	9.73	20.75	30.61	46.00	-15.39	Peak
5	2.32	0.16	9.71	19.81	29.68	46.00	-16.32	Peak
6	7.33	0.17	9.79	23.75	33.71	50.00	-16.29	Peak



Report No.: SZEM180800801702

Page: 17 of 92

Mode:c; Line:Neutral Line

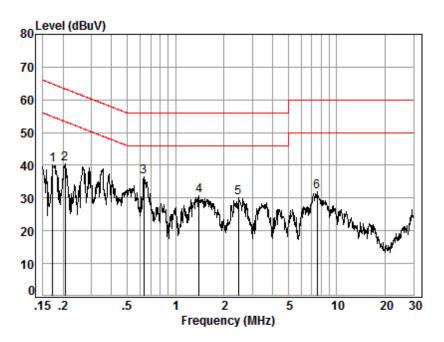

Site : Shielding Room

Condition: Neutral Job No. : 08017CR

Test mode: c

		Cable	LISN	Read		Limit	0ver	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17	0.02	9.64	30.41	40.07	54.81	-14.74	Peak
2	0.21	0.02	9.64	30.65	40.31	53.36	-13.05	Peak
3	0.63	0.07	9.64	26.81	36.52	46.00	-9.48	Peak
4	1.40	0.12	9.70	20.84	30.66	46.00	-15.34	Peak
5	2.46	0.16	9.68	20.14	29.98	46.00	-16.02	Peak
6	7.57	0.17	9.78	21.92	31.87	50.00	-18.13	Peak



Report No.: SZEM180800801702

Page: 18 of 92

#### 7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)
Test Method: ANSI C63.10 (2013) Section 7.8.5

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
	1 for ≥50 hopping channels
902-928	0.25 for 25≤ hopping channels <50
	1 for digital modulation
	1 for ≥75 non-overlapping hopping channels
2400-2483.5	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

#### 7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 23.4 °C Humidity: 51.1 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with GFSK

modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

#### 7.2.2 Test Setup Diagram

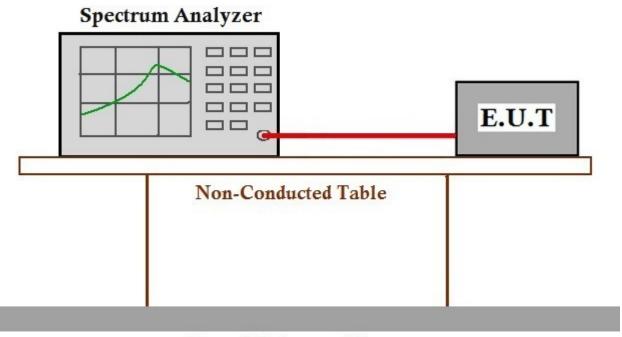

#### Ground Reference Plane

#### 7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, torgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM180800801702

Page: 19 of 92

#### 7.3 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)
Test Method: ANSI C63.10 (2013) Section 7.8.7

#### 7.3.1 E.U.T. Operation

Operating Environment:


Temperature: 23.4 °C Humidity: 51.1 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with GFSK

modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

#### 7.3.2 Test Setup Diagram

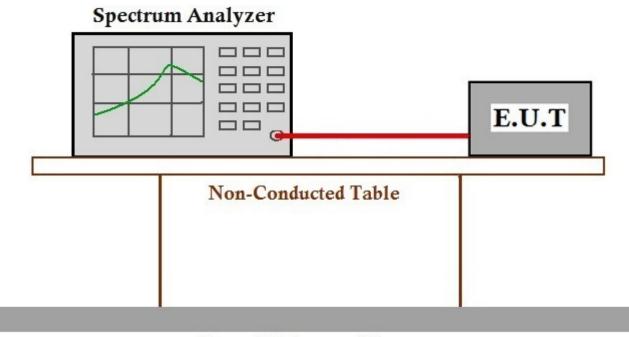

#### Ground Reference Plane

#### 7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



Report No.: SZEM180800801702

Page: 20 of 92

#### 7.4 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)
Test Method: ANSI C63.10 (2013) Section 7.8.2

Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than

0.125W

#### 7.4.1 E.U.T. Operation

Operating Environment:


Temperature: 23.4 °C Humidity: 51.1 % RH Atmospheric Pressure: 1010 mbar

Test mode a:TX\_Hop mode\_Keep the EUT in frequency hopping mode with GFSK

modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

#### 7.4.2 Test Setup Diagram

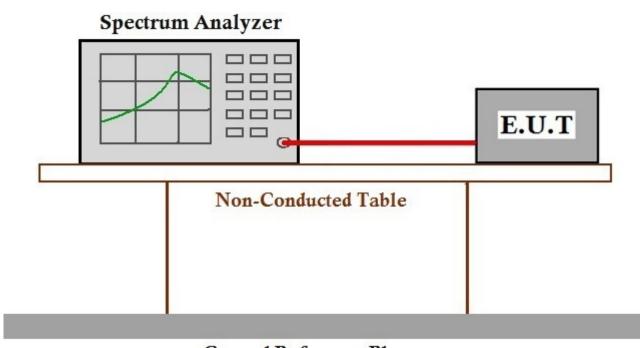

#### Ground Reference Plane

#### 7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



Report No.: SZEM180800801702

Page: 21 of 92

#### 7.5 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)
Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
002 028	50 for 20dB bandwidth <250kHz
902-928	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

#### 7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 23.4 °C Humidity: 51.2 % RH Atmospheric Pressure: 1010 mbar

Test mode a:TX\_Hop mode\_Keep the EUT in frequency hopping mode with GFSK

modulation,  $\pi/4DQPSK$  modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

#### 7.5.2 Test Setup Diagram

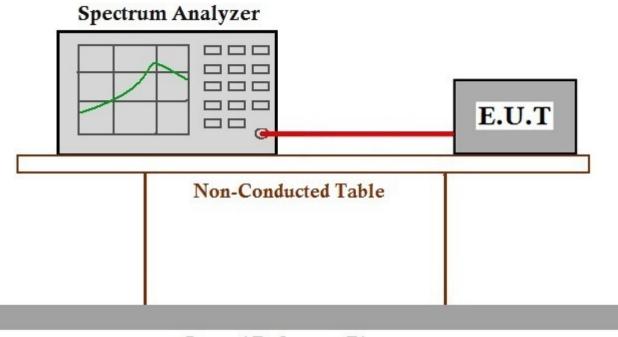

#### Ground Reference Plane

#### 7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, torgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM180800801702

Page: 22 of 92

#### 7.6 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)
Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
902-928	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number
2400-2483.5	of hopping channels
5725-5850	0.4S within a 30S period

#### 7.6.1 E.U.T. Operation

Operating Environment:


Temperature: 23.4 °C Humidity: 51.1 % RH Atmospheric Pressure: 1010 mbar

Test mode a:TX\_Hop mode\_Keep the EUT in frequency hopping mode with GFSK

modulation,  $\pi/4DQPSK$  modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

#### 7.6.2 Test Setup Diagram

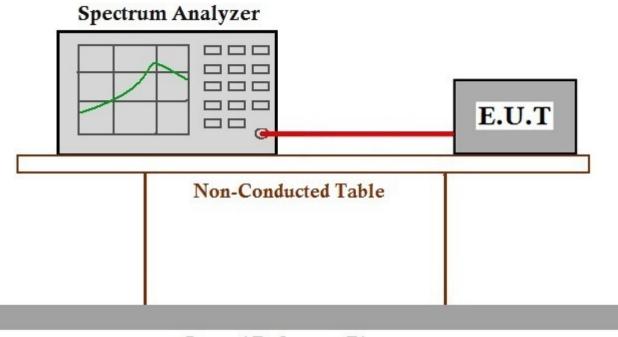

#### Ground Reference Plane

#### 7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sqs.com/en/Terms-and-Conditions/Terms-



Report No.: SZEM180800801702

Page: 23 of 92

#### 7.7 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 7.8.6

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread

spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition,

radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in

§15.209(a) (see §15.205(c)



Report No.: SZEM180800801702

Page: 24 of 92

#### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23.4 °C Humidity: 51 % RH Atmospheric Pressure: 1010 mbar

Pretest these a:TX\_Hop mode\_Keep the EUT in frequency hopping mode with GFSK modulation,  $\pi/4DQPSK$  modulation, 8DPSK modulation. All modes have been

the worst case: tested and only the data of worst case is recorded in the report.

b:TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with GFSK modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

The worst case for final test:

a:TX\_Hop mode\_Keep the EUT in frequency hopping mode with GFSK modulation,  $\pi/4DQPSK$  modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

b:TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with GFSK modulation,  $\pi/4DQPSK$  modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

#### 7.7.2 Test Setup Diagram

# Spectrum Analyzer E.U.T Non-Conducted Table

#### Ground Reference Plane

#### 7.7.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



Report No.: SZEM180800801702

Page: 25 of 92

#### 7.8 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 7.8.8

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread

spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition,

radiated emissions which fall in the restricted bands, as defined in

§15.205(a), must also comply with the radiated emission limits specified in

§15.209(a) (see §15.205(c)



Report No.: SZEM180800801702

Page: 26 of 92

#### 7.8.1 E.U.T. Operation

**Operating Environment:** 


Temperature: 23.4 °C Humidity: 51.1 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with GFSK

modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

#### 7.8.2 Test Setup Diagram

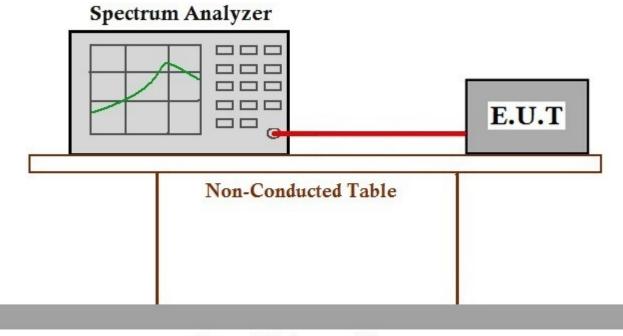

#### Ground Reference Plane

#### 7.8.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



Report No.: SZEM180800801702

Page: 27 of 92

#### 7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



Report No.: SZEM180800801702

Page: 28 of 92

#### 7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C Humidity: 58.1 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:

b:TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with GFSK modulation,  $\pi/4DQPSK$  modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

c:Charge + TX\_non-Hop mode\_Keep the EUT in charging and continuously transmitting mode with GFSK modulation,  $\pi/4DQPSK$  modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is


recorded in the report.


The worst case for final test:

c:Charge + TX\_non-Hop mode\_Keep the EUT in charging and continuously transmitting mode with GFSK modulation,  $\pi/4DQPSK$  modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is

recorded in the report.

#### 7.9.2 Test Setup Diagram





30MHz-1GHz Above 1GHz



Report No.: SZEM180800801702

Page: 29 of 92

#### 7.9.3 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.
- Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Report No.: SZEM180800801702

Page: 30 of 92

Mode:c; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

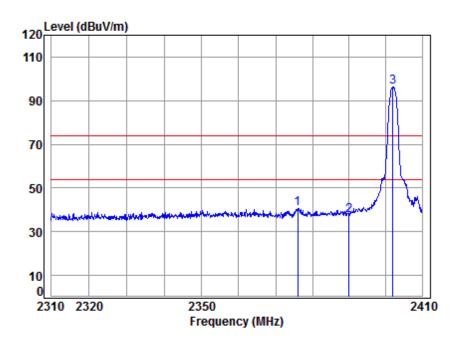

Site : chamber

Condition: 3m HORIZONTAL
Job No : 08016CR/08017CR
Mode : 2402 Band edge

Note : BT


		Cable	Ant	Preamp	Read		Limit	0ver	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2375.926	5.46	28.49	41.87	48.71	40.79	74.00	-33.21	peak
2	2390.000	5.47	28.52	41.87	45.49	37.61	74.00	-36.39	peak
3 рр	2402.000	5.49	28.54	41.88	103.96	96.11	74.00	22.11	peak



Report No.: SZEM180800801702

Page: 31 of 92

Mode:c; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

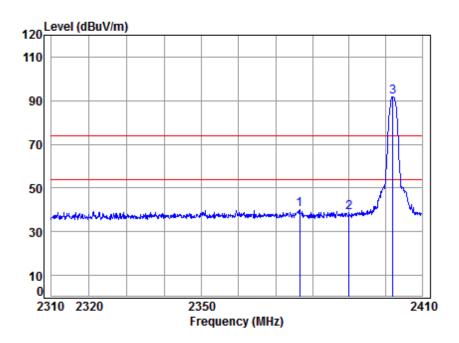

Site : chamber Condition: 3m VERTICAL

Job No : 08016CR/08017CR Mode : 2402 Band edge

Note : BT


			Cable	Ant	Preamp	Read		Limit	0ver	
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	_									
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1		2376.530	5.46	28.50	41.87	48.25	40.34	74.00	-33.66	peak
2		2390.000	5.47	28.52	41.87	46.88	39.00	74.00	-35.00	peak
3	pp	2402.000	5.49	28.54	41.88	99.43	91.58	74.00	17.58	peak



Report No.: SZEM180800801702

Page: 32 of 92

Mode:c; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

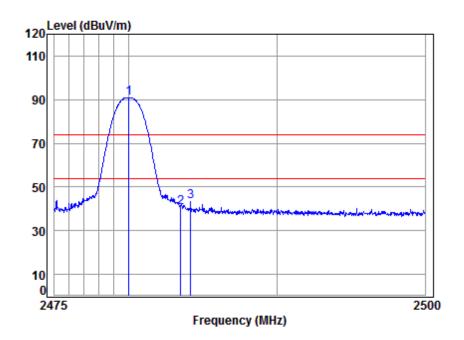

Site : chamber

Condition: 3m HORIZONTAL
Job No : 08016CR/08017CR
Mode : 2480 Band edge

Note : BT


	Freq			Preamp Factor					Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.000	5.59	28.67	41.91	98.52	90.87	74.00	16.87	peak
2	2483.500	5.60	28.67	41.91	48.38	40.74	74.00	-33.26	peak
3	2484.146	5.60	28.67	41.91	50.79	43.15	74.00	-30.85	peak



Report No.: SZEM180800801702

Page: 33 of 92

Mode:c; Polarization:Vertical; Modulation:GFSK; ; Channel:High

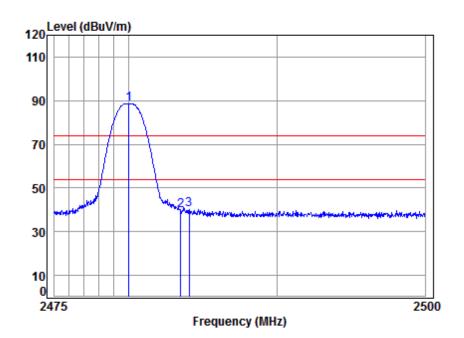

Site : chamber Condition: 3m VERTICAL

Job No : 08016CR/08017CR Mode : 2480 Band edge

Note : BT

1 2 3

		Cable	Ant	Preamp	Read		Limit	0ver		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark	
										_
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
. р	p 2480.000	5.59	28.67	41.91	96.38	88.73	74.00	14.73	peak	
2	2483.500	5.60	28.67	41.91	47.45	39.81	74.00	-34.19	peak	
;	2484.046	5.60	28.67	41.91	47.93	40.29	74.00	-33.71	peak	



Report No.: SZEM180800801702

Page: 34 of 92

#### 7.10 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



Report No.: SZEM180800801702

Page: 35 of 92

#### 7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 25.3 °C Humidity: 58.1 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:

b:TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with GFSK modulation,  $\pi/4DQPSK$  modulation, 8DPSK modulation. All modes have been

tested and only the data of worst case is recorded in the report.

c:Charge + TX\_non-Hop mode\_Keep the EUT in charging and continuously transmitting mode with GFSK modulation,  $\pi/4DQPSK$  modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is


recorded in the report.


The worst case for final test:

c:Charge + TX\_non-Hop mode\_Keep the EUT in charging and continuously transmitting mode with GFSK modulation,  $\pi/4DQPSK$  modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is

recorded in the report.


#### 7.10.2 Test Setup Diagram





Below 30MHz

30MHz-1GHz



Above 1GHz



Report No.: SZEM180800801702

Page: 36 of 92

#### 7.10.3 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

#### Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.




Report No.: SZEM180800801702

Page: 37 of 92

30MHz~1GHz

Mode: c; Polarization: Horizontal

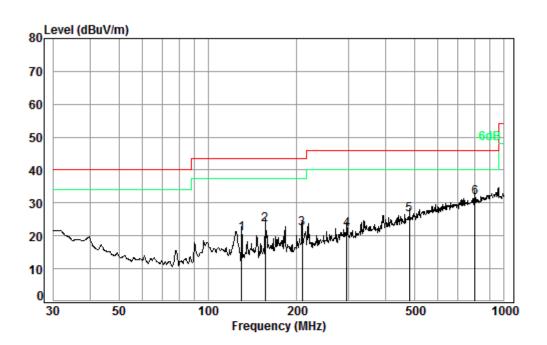

Condition: 3m HORIZONTAL

Job No. : 08017CR

Test mode: c


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	129.92	1.28	13.41	27.52	33.64	20.81	43.50	-22.69
2	155.91	1.33	15.15	27.52	34.37	23.33	43.50	-20.17
3	208.58	1.45	16.81	27.53	31.53	22.26	43.50	-21.24
4	295.15	1.88	19.41	27.54	28.13	21.88	46.00	-24.12
5	480.53	2.53	24.21	27.85	27.51	26.40	46.00	-19.60
6 pp	798.98	3.20	28.49	27.42	27.40	31.67	46.00	-14.33



Report No.: SZEM180800801702

Page: 38 of 92

Mode: c; Polarization: Vertical

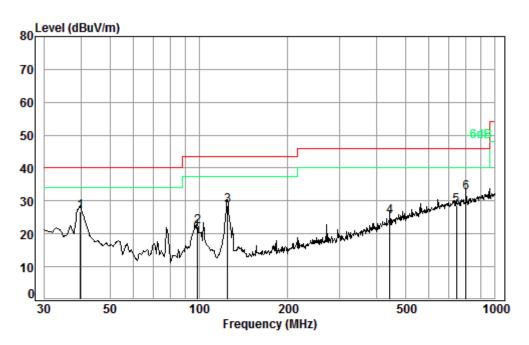

Condition: 3m VERTICAL Job No. : 08017CR

Test mode: c

				Preamp				
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 рр	39.71	0.60	17.62	27.63	36.12	26.71	40.00	-13.29
2	98.83	1.19	13.90	27.51	34.73	22.31	43.50	-21.19
3	125.01	1.26	13.26	27.52	41.51	28.51	43.50	-14.99
4	441.74	2.38	23.38	27.80	27.20	25.16	46.00	-20.84
5	742.26	3.03	28.16	27.49	24.77	28.47	46.00	-17.53
6	798.98	3.20	28.49	27.42	28.14	32.41	46.00	-13.59




Report No.: SZEM180800801702

Page: 39 of 92

Above 1GHz

Mode:c; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

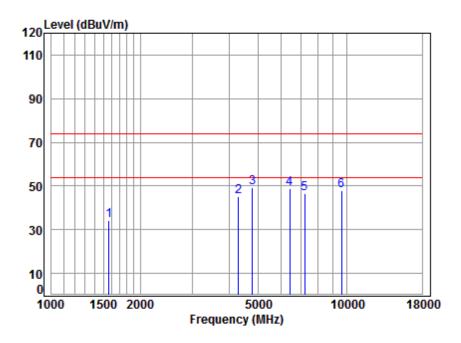

Site : chamber

Condition: 3m HORIZONTAL : 08016CR/08017CR Job No Mode : 2402 TX RSE

: BT Note

1

5

6


Ant Preamp Cable Read Limit 0ver Loss Factor Factor Level Level Line Limit Remark Frea MHz dBuV dBuV/m dBuV/m dΒ dB/m dΒ dB 1569.721 5.39 26.12 41.45 44.33 34.39 74.00 -39.61 peak 2 4304.400 7.34 33.26 42.38 47.12 45.34 74.00 -28.66 peak 3 pp 4804.000 7.89 33.97 42.47 50.03 49.42 74.00 -24.58 peak 4 6414.167 11.38 35.52 41.28 43.24 48.86 74.00 -25.14 peak 7206.000 10.08 36.07 40.71 40.87 46.31 74.00 -27.69 peak 9608.000 10.75 37.67 37.74 37.38 48.06 74.00 -25.94 peak



Report No.: SZEM180800801702

Page: 40 of 92

Mode:c; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

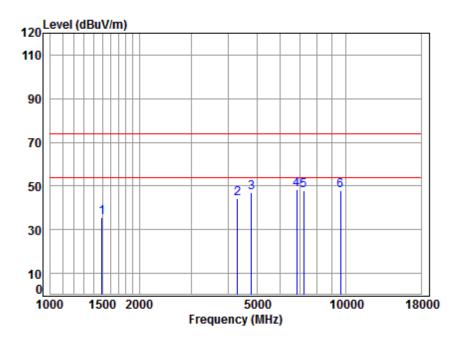

Site : chamber Condition: 3m VERTICAL

Job No : 08016CR/08017CR

Mode : 2402 TX RSE


	Freq			Preamp Factor					Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1494.455	5.46	25.78	41.40	45.81	35.65	74.00	-38.35	peak
2	4304.400	7.34	33.26	42.38	46.02	44.24	74.00	-29.76	peak
3	4804.000	7.89	33.97	42.47	47.79	47.18	74.00	-26.82	peak
4 p	p 6815.551	10.64	35.79	40.98	42.91	48.36	74.00	-25.64	peak
5	7206.000	10.08	36.07	40.71	42.37	47.81	74.00	-26.19	peak
6	9608,000	10.75	37.67	37.74	37.23	47.91	74.00	-26.09	peak



Report No.: SZEM180800801702

Page: 41 of 92

Mode:c; Polarization:Horizontal; Modulation:GFSK; ; Channel:middle

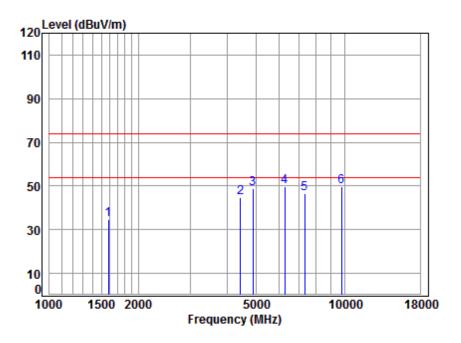

Site : chamber

Condition: 3m HORIZONTAL
Job No : 08016CR/08017CR
Mode : 2441 TX RSE


		Cable	Ant	Preamp	Read		Limit	0ver	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1583.392	5.37	26.18	41.46	44.48	34.57	74.00	-39.43	peak
2	4430.628	7.48	33.48	42.41	46.30	44.85	74.00	-29.15	peak
3	4882.000	7.97	34.06	42.48	49.33	48.88	74.00	-25.12	peak
4	6267.553	11.10	35.37	41.39	44.83	49.91	74.00	-24.09	peak
5	7323.000	10.05	36.16	40.63	40.78	46.36	74.00	-27.64	peak
6	pp 9764.000	10.82	37.76	37.52	38.86	49.92	74.00	-24.08	peak



Report No.: SZEM180800801702

Page: 42 of 92

Mode:c; Polarization:Vertical; Modulation:GFSK; ; Channel:middle

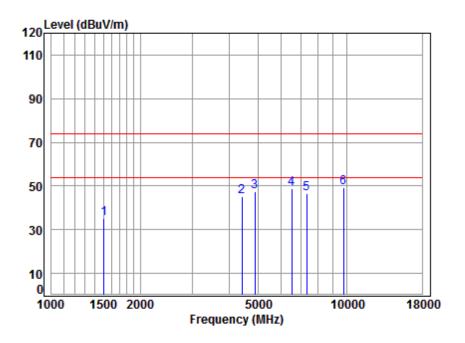

Site : chamber Condition: 3m VERTICAL

Job No : 08016CR/08017CR

Mode : 2441 TX RSE


		Cable	Ant	Preamp	Read		Limit	0ver	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1507.470	5.47	25.83	41.41	45.17	35.06	74.00	-38.94	peak
2	4417.841	7.47	33.46	42.40	46.67	45.20	74.00	-28.80	peak
3	4882.000	7.97	34.06	42.48	48.01	47.56	74.00	-26.44	peak
4	6526.373	11.46	35.62	41.20	42.75	48.63	74.00	-25.37	peak
5	7323.000	10.05	36.16	40.63	40.80	46.38	74.00	-27.62	peak
6 рр	9764.000	10.82	37.76	37.52	38.36	49.42	74.00	-24.58	peak



Report No.: SZEM180800801702

Page: 43 of 92

Mode:c; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

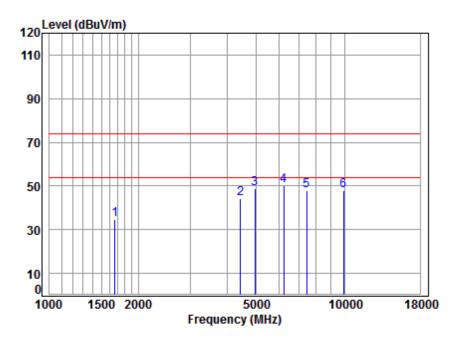

Site : chamber

Condition: 3m HORIZONTAL
Job No : 08016CR/08017CR
Mode : 2480 TX RSE


			Cable	Ant	Preamp	Read		Limit	0ver	
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1		1667.951	5.27	26.54	41.51	44.28	34.58	74.00	-39.42	peak
2		4443.453	7.50	33.50	42.41	45.82	44.41	74.00	-29.59	peak
3		4960.000	8.05	34.15	42.49	49.10	48.81	74.00	-25.19	peak
4	pp	6213.441	10.99	35.32	41.44	45.18	50.05	74.00	-23.95	peak
5		7440.000	10.02	36.25	40.56	42.04	47.75	74.00	-26.25	peak
6		9920.000	10.90	37.85	37.31	36.55	47.99	74.00	-26.01	peak



Report No.: SZEM180800801702

Page: 44 of 92

Mode:c; Polarization:Vertical; Modulation:GFSK; ; Channel:High

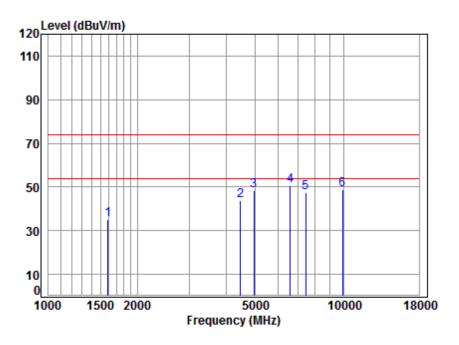

Site : chamber Condition: 3m VERTICAL

Job No : 08016CR/08017CR

Mode : 2480 TX RSE

				Preamp					
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1592.571	5.36	26.22	41.47	45.04	35.15	74.00	-38.85	peak
2	4469.214								•
3	4960.000	8.05	34.15	42.49	48.43	48.14	74.00	-25.86	peak
4 p	op 6602.265	11.24	35.66	41.14	45.06	50.82	74.00	-23.18	peak
5	7440.000	10.02	36.25	40.56	41.52	47.23	74.00	-26.77	peak
6	9920.000	10.90	37.85	37.31	37.53	48.97	74.00	-25.03	peak



Report No.: SZEM180800801702

Page: 45 of 92

#### 8 Photographs

#### 8.1 Test Setup

Refer to Setup Photos

#### 8.2 EUT Constructional Details (EUT Photos)

Refer to EUT external and internal photos



Report No.: SZEM180800801702

Page: 46 of 92

#### 9 Appendix

#### 9.1 Appendix 15.247


#### 1.20 dB Bandwidth

Test Mode	Test Channel	EBW[MHz]	Limit[MHz]	Verdict
DH5	2402	0.998		PASS
DH5	2441	0.994		PASS
DH5	2480	0.998		PASS
2DH5	2402	1.286		PASS
2DH5	2441	1.290		PASS
2DH5	2480	1.288		PASS
3DH5	2402	1.294		PASS
3DH5	2441	1.292		PASS
3DH5	2480	1.290		PASS



Report No.: SZEM180800801702

Page: 47 of 92

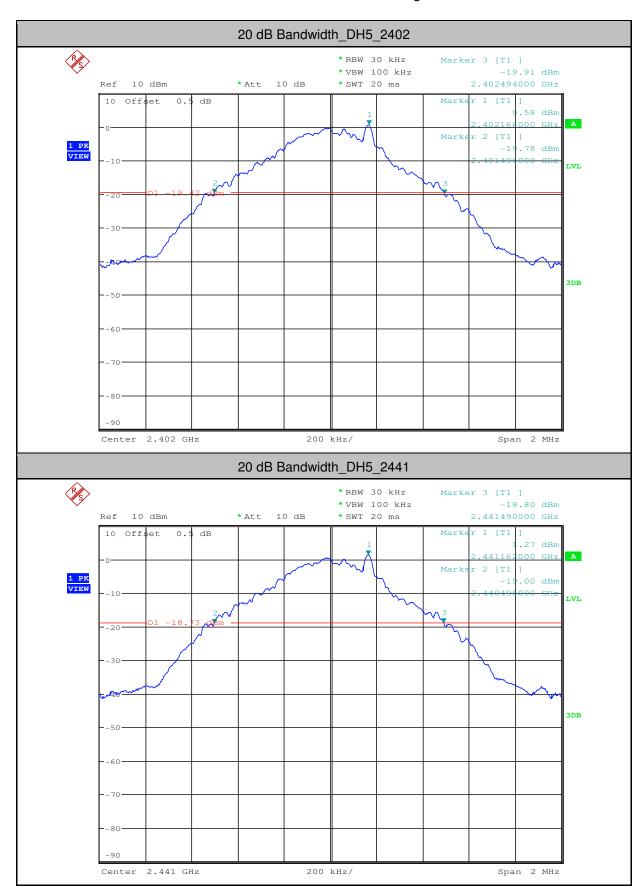


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sqs.com/en/Terms-and-Conditions.aspx">http://www.sqs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sqs.com/en/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and object the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM180800801702


Page: 48 of 92

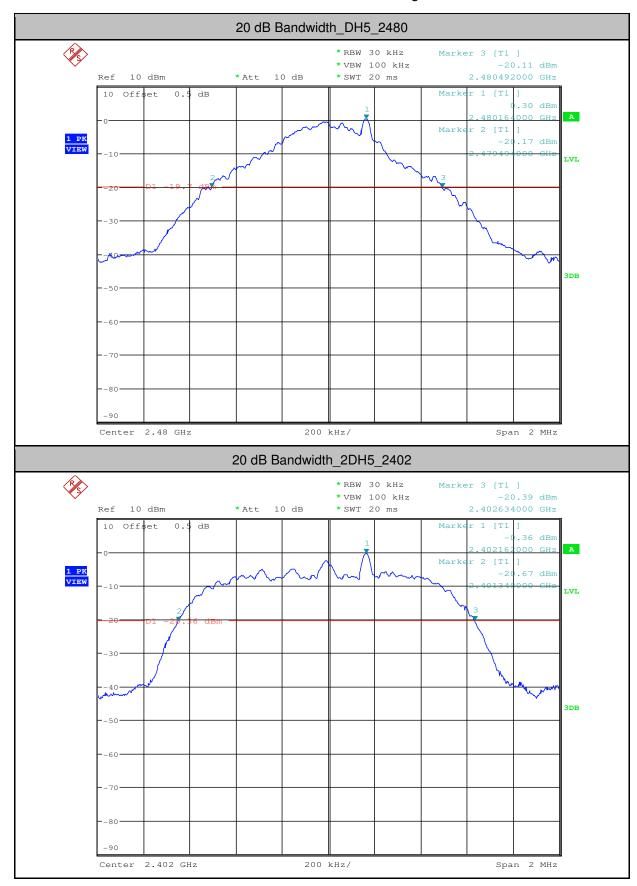



Report No.: SZEM180800801702


Page: 49 of 92

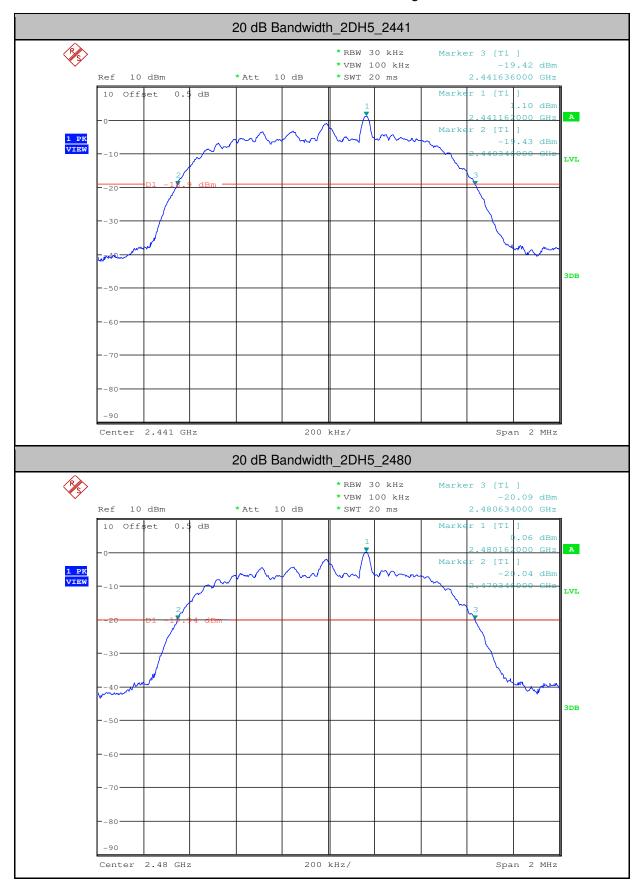



Report No.: SZEM180800801702


Page: 50 of 92

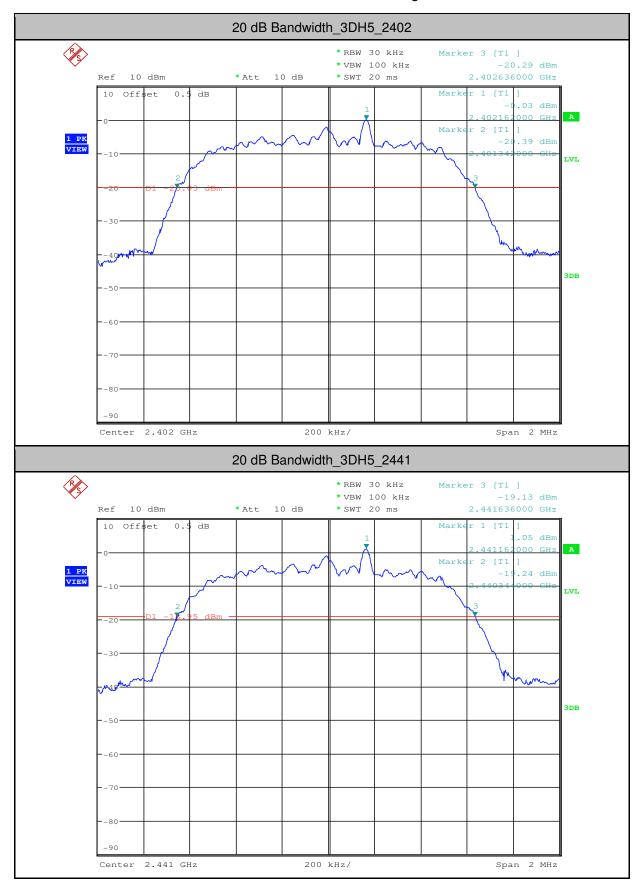



Report No.: SZEM180800801702

Page: 51 of 92

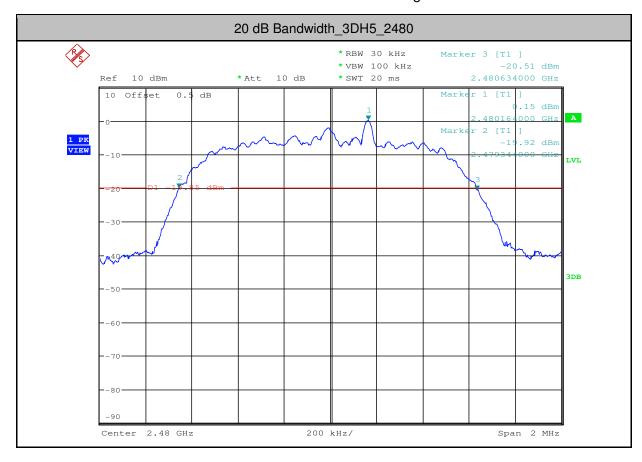



Report No.: SZEM180800801702

Page: 52 of 92


#### 3.Conducted Peak Output Power

Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
DH5	2402	2.56	<=20.97	PASS
DH5	2441	3.3	<=20.97	PASS
DH5	2480	2.46	<=20.97	PASS
2DH5	2402	2.82	<=20.97	PASS
2DH5	2441	3.7	<=20.97	PASS
2DH5	2480	2.91	<=20.97	PASS
3DH5	2402	3.3	<=20.97	PASS
3DH5	2441	3.83	<=20.97	PASS
3DH5	2480	3.46	<=20.97	PASS



Report No.: SZEM180800801702

Page: 53 of 92

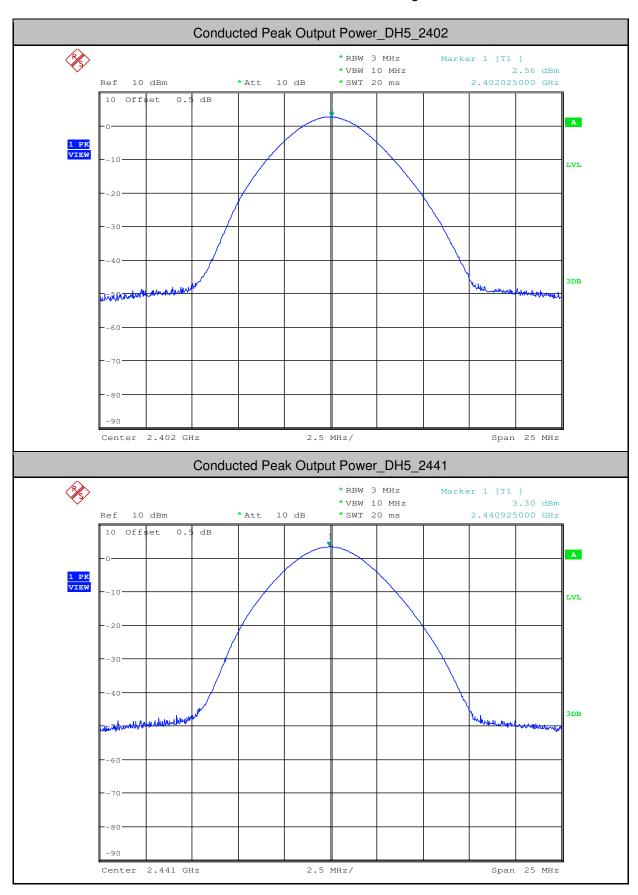


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sqs.com/en/Terms-and-Conditions.aspx">http://www.sqs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sqs.com/en/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and object the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM180800801702


Page: 54 of 92

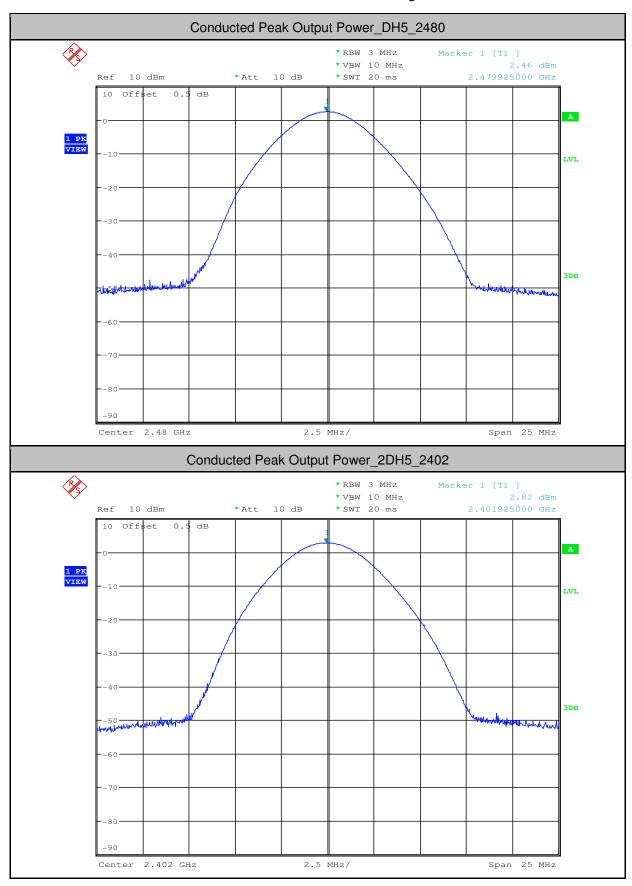



Report No.: SZEM180800801702


Page: 55 of 92

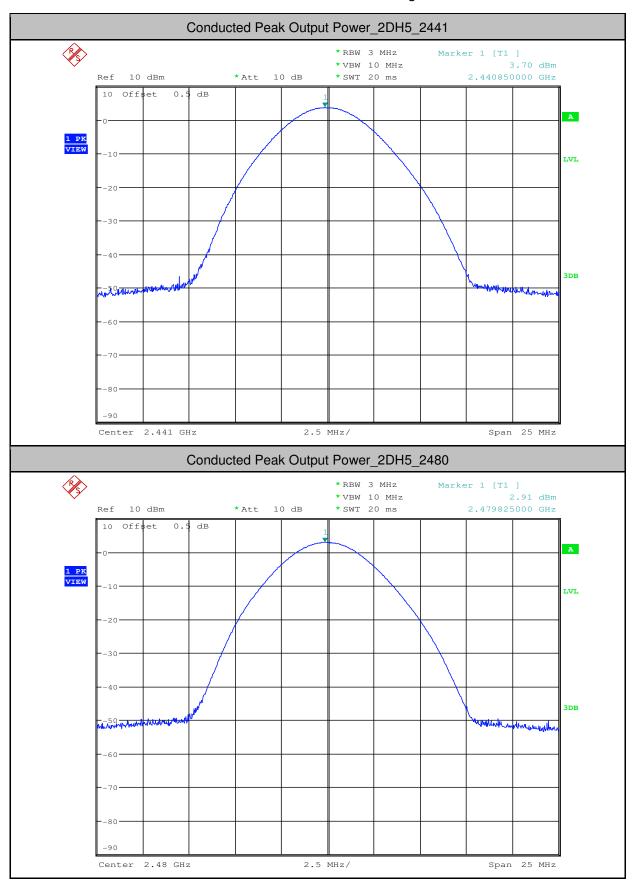



Report No.: SZEM180800801702


Page: 56 of 92

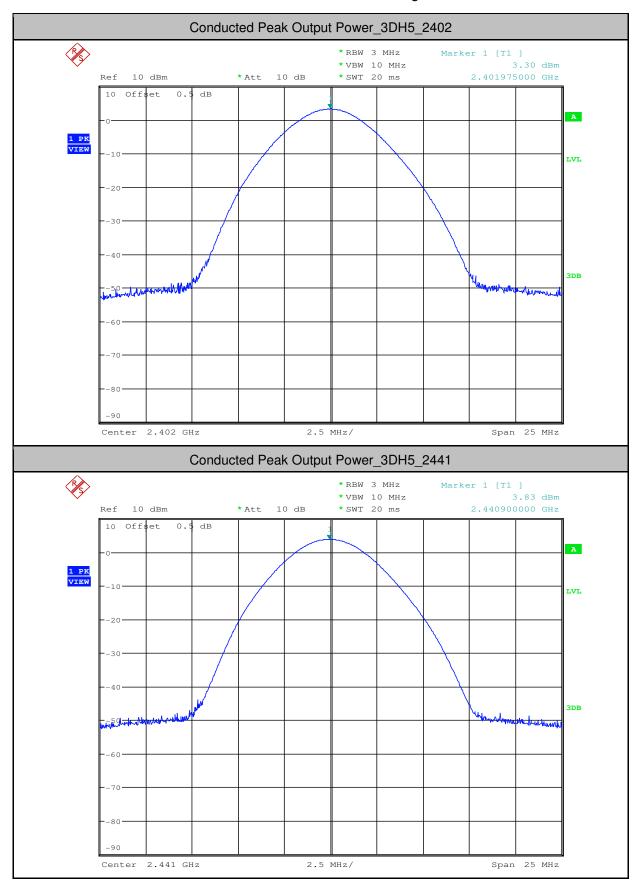



Report No.: SZEM180800801702

Page: 57 of 92

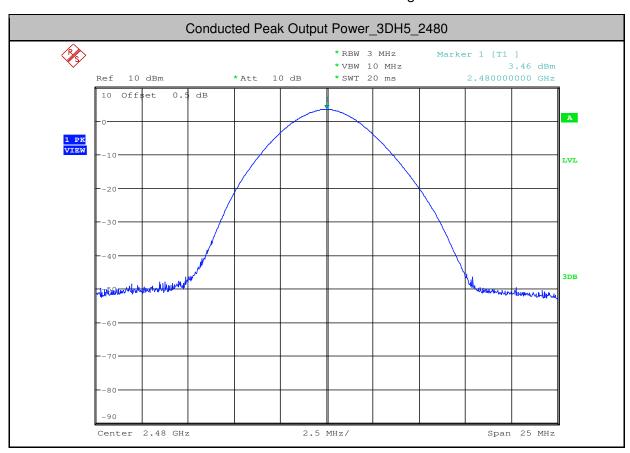


#### 4. Carrier Frequency Separation

Test Mode	Test Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	2441	1.011	>=0.67	PASS
2DH5	2441	0.99	>=0.86	PASS
3DH5	2441	0.996	>=0.86	PASS



Report No.: SZEM180800801702


Page: 58 of 92

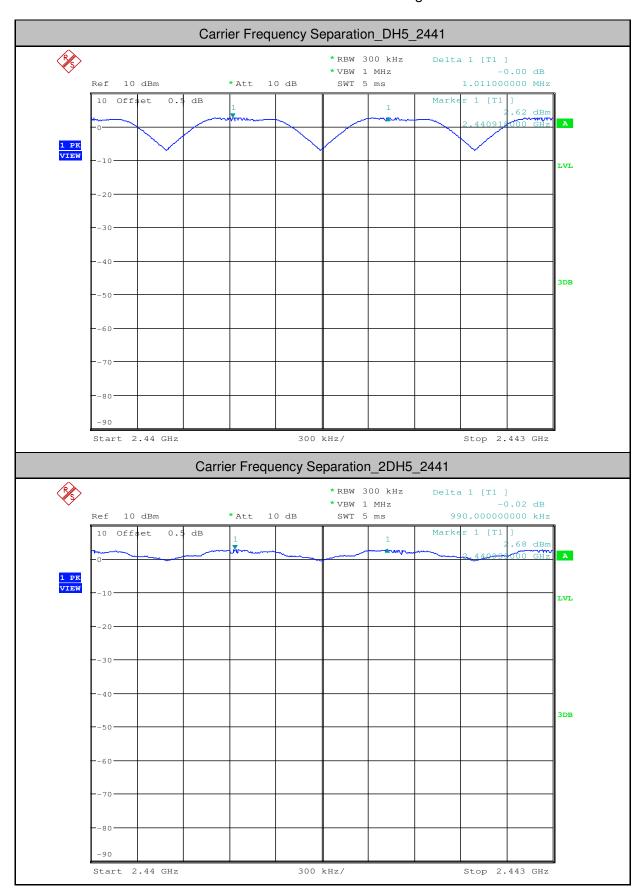



Report No.: SZEM180800801702

Page: 59 of 92

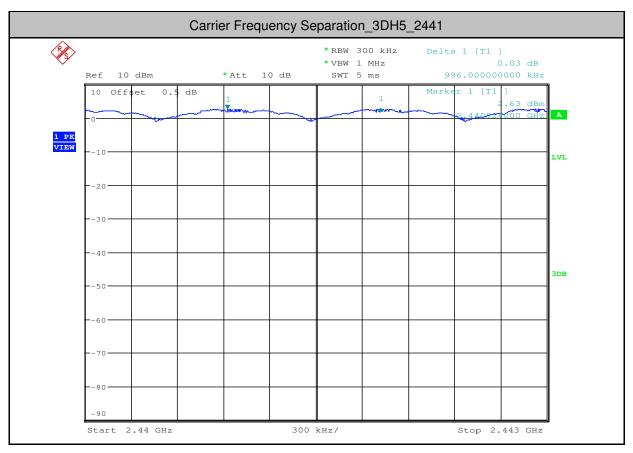


#### 5.Dwell Time

Test Mode	Test Channel	Burst Width[ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Limit[s]	Verdict
DH1	2402	0.39	320	0.125	<0.4	PASS
DH3	2402	1.65	170	0.281	<0.4	PASS
DH5	2402	2.89	120	0.347	<0.4	PASS
2DH1	2402	0.4	320	0.128	<0.4	PASS
2DH3	2402	1.66	120	0.199	<0.4	PASS
2DH5	2402	2.9	100	0.29	<0.4	PASS
3DH1	2402	0.39	300	0.117	<0.4	PASS
3DH3	2402	1.66	190	0.315	<0.4	PASS
3DH5	2402	2.9	50	0.145	<0.4	PASS



Report No.: SZEM180800801702


Page: 60 of 92

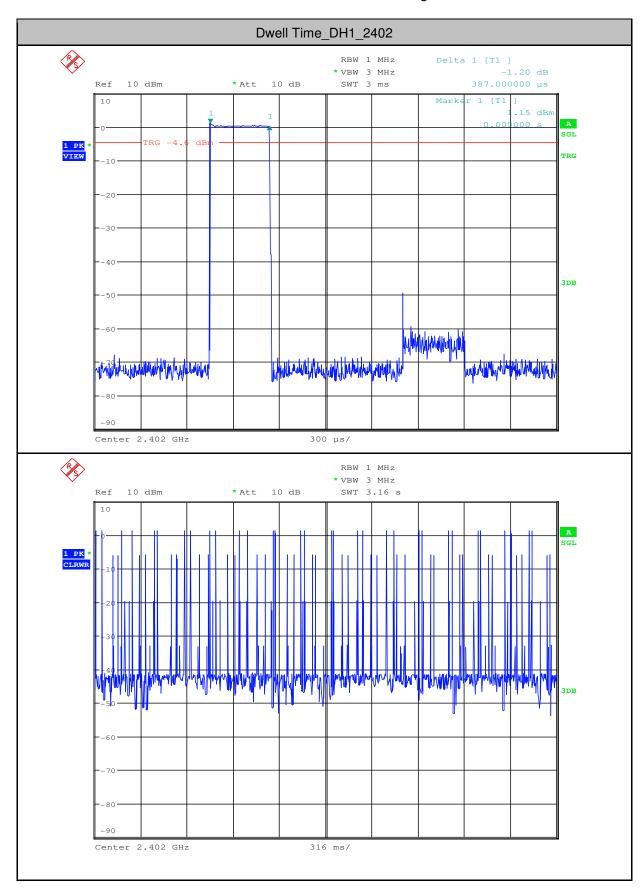



Report No.: SZEM180800801702


Page: 61 of 92

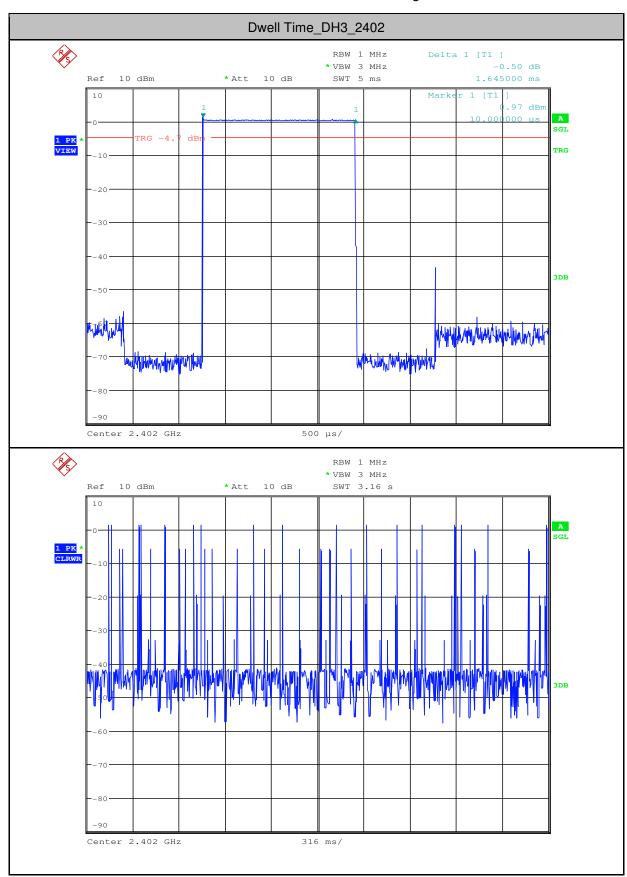



Report No.: SZEM180800801702


Page: 62 of 92

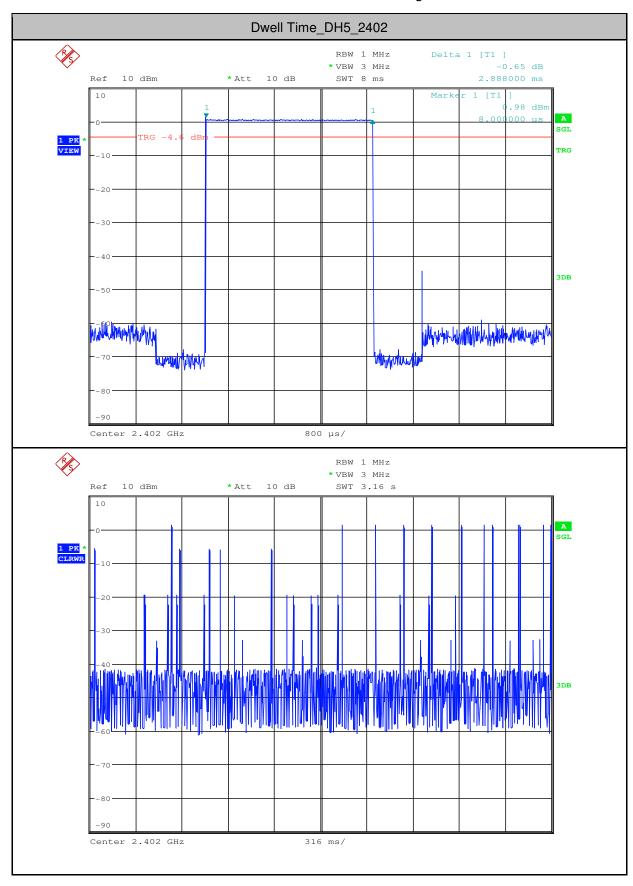



Report No.: SZEM180800801702


Page: 63 of 92

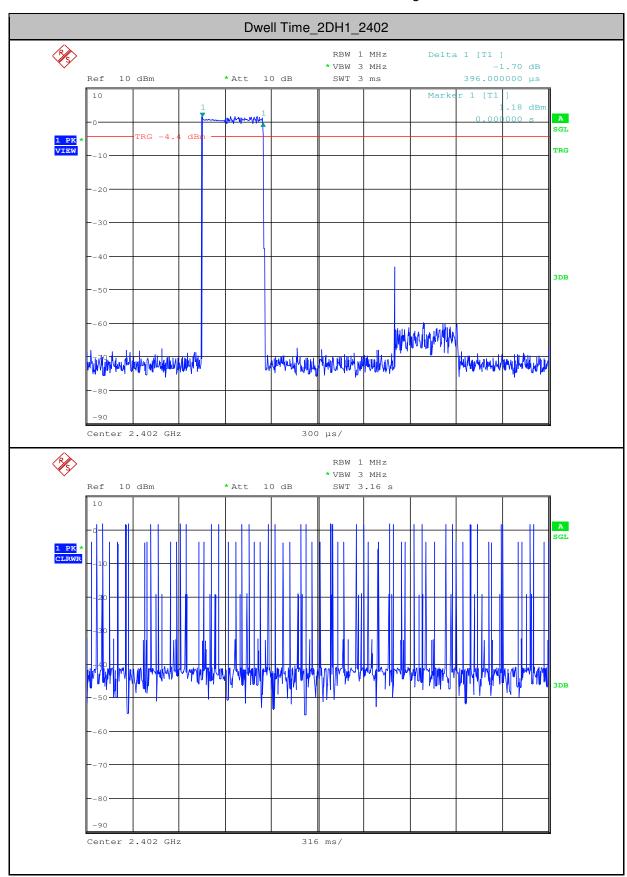



Report No.: SZEM180800801702


Page: 64 of 92

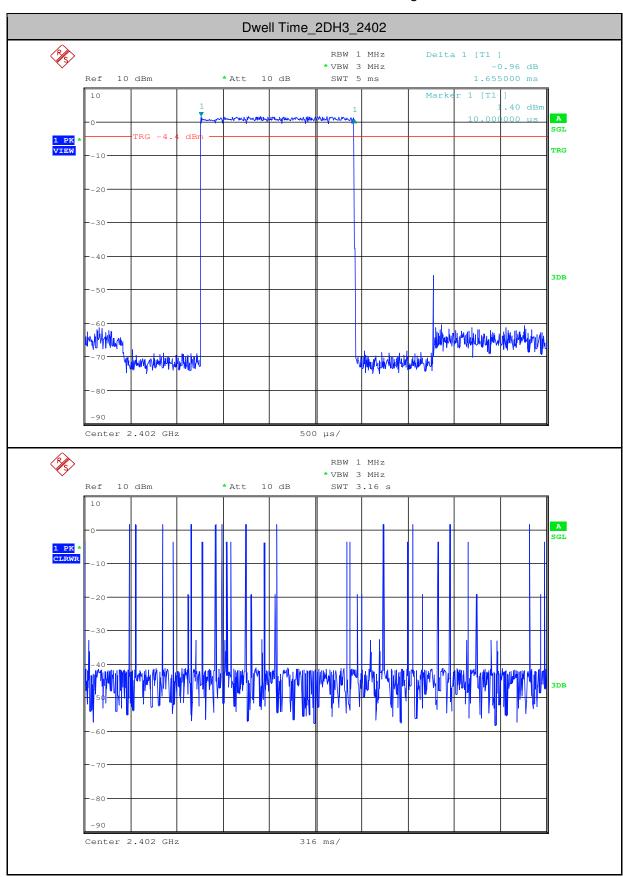



Report No.: SZEM180800801702


Page: 65 of 92

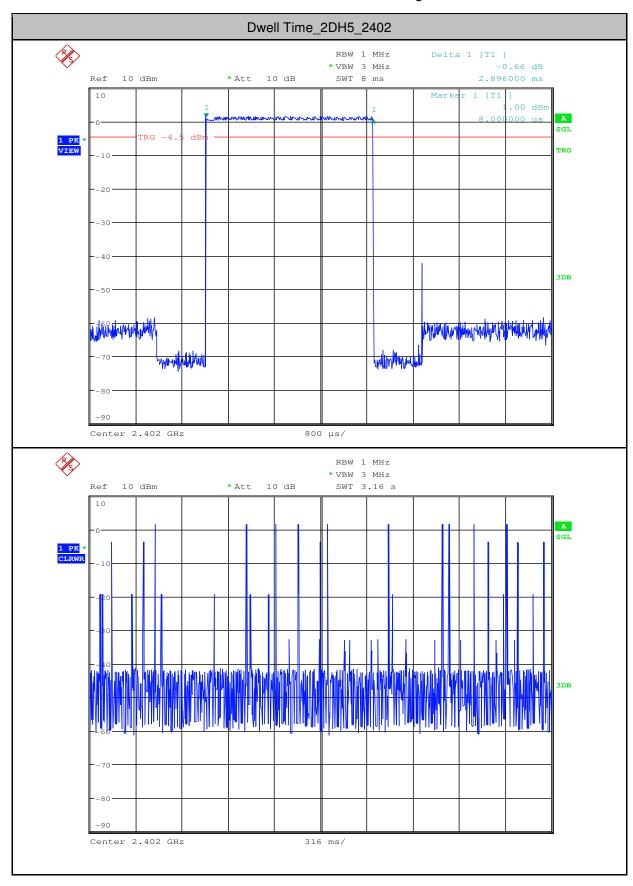



Report No.: SZEM180800801702


Page: 66 of 92

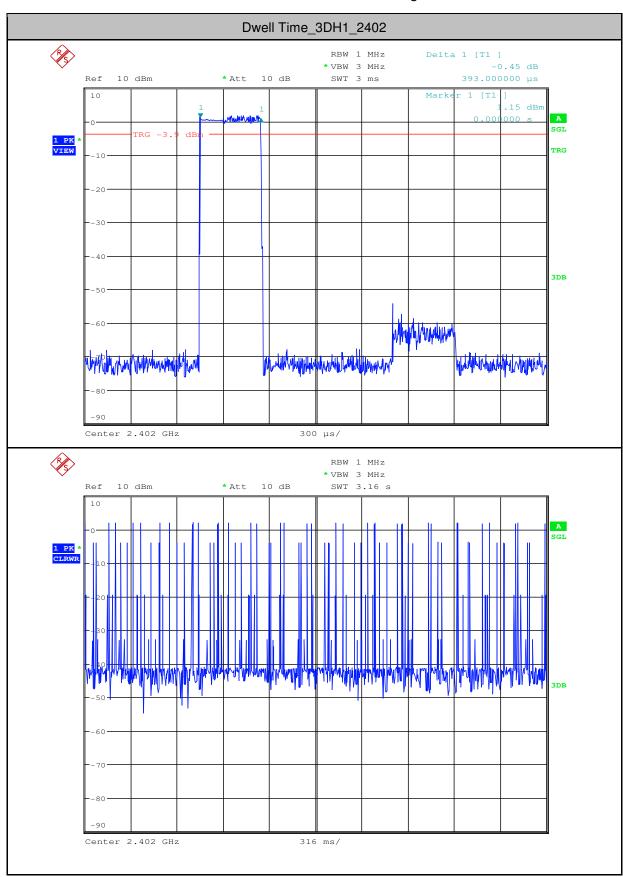



Report No.: SZEM180800801702


Page: 67 of 92

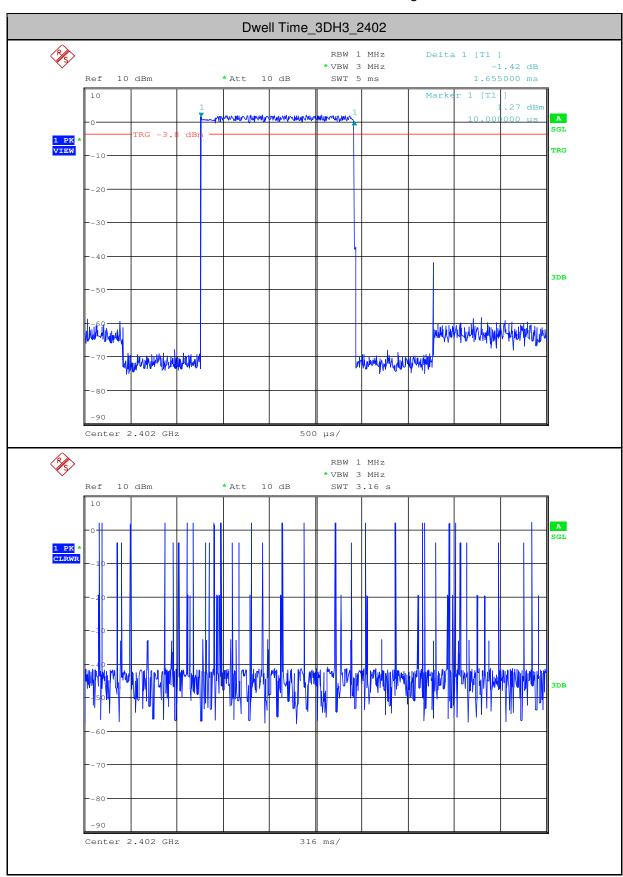



Report No.: SZEM180800801702

Page: 68 of 92

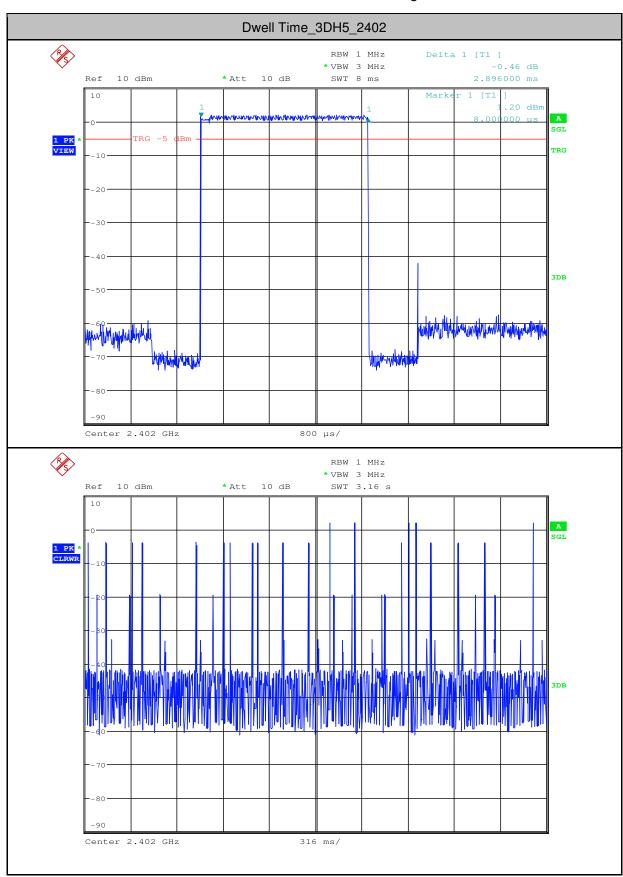



Report No.: SZEM180800801702

Page: 69 of 92


#### **6.Hopping Channel Number**

Test Mode	Test Channel	Number of Hopping Channel[N]	Limit[N]	Verdict
DH5	2402	79	>=15	PASS
2DH5	2402	79	>=15	PASS
3DH5	2402	79	>=15	PASS



Report No.: SZEM180800801702

Page: 70 of 92

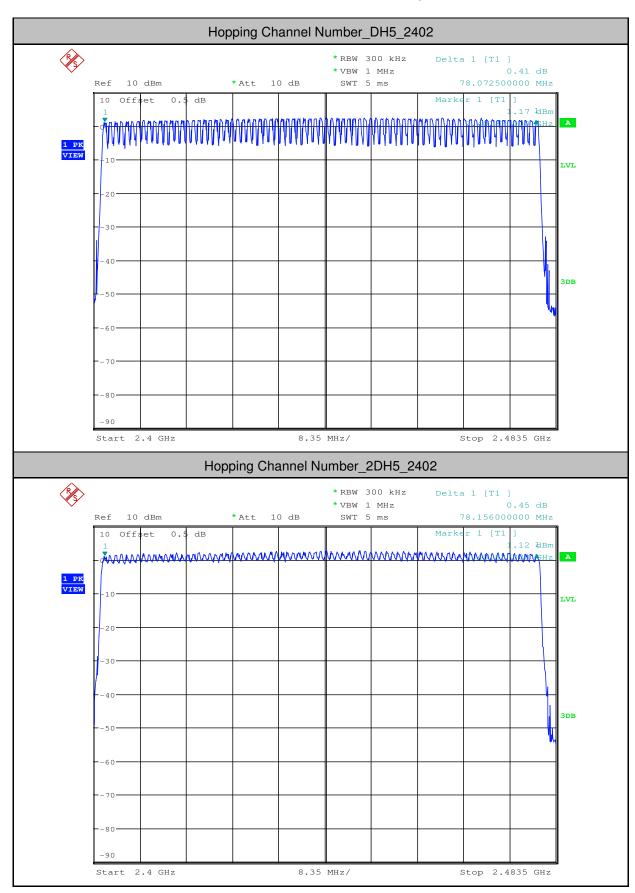


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sqs.com/en/Terms-and-Conditions.aspx">http://www.sqs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sqs.com/en/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and object the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM180800801702

Page: 71 of 92

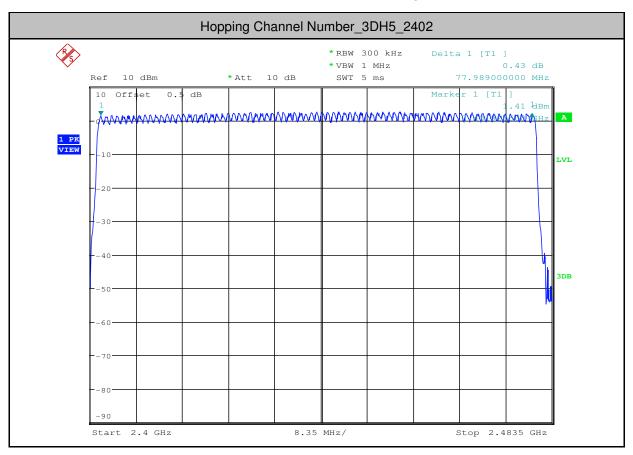


#### 7.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Hopping	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit[dBm]	Verdict
DH5	2402	On	0.410	-60.598	<-19.59	PASS
DH5	2402	Off	0.800	-63.180	<-19.2	PASS
DH5	2480	On	0.530	-59.879	<-19.47	PASS
DH5	2480	Off	1.250	-55.158	<-18.75	PASS
2DH5	2402	On	-0.440	-60.909	<-20.44	PASS
2DH5	2402	Off	0.740	-63.825	<-19.26	PASS
2DH5	2480	On	1.170	-59.530	<-18.83	PASS
2DH5	2480	Off	0.990	-51.475	<-19.01	PASS
3DH5	2402	On	-0.530	-60.406	<-20.53	PASS
3DH5	2402	Off	0.600	-64.271	<-19.4	PASS
3DH5	2480	On	0.800	-60.285	<-19.2	PASS
3DH5	2480	Off	1.090	-55.326	<-18.91	PASS



Report No.: SZEM180800801702


Page: 72 of 92

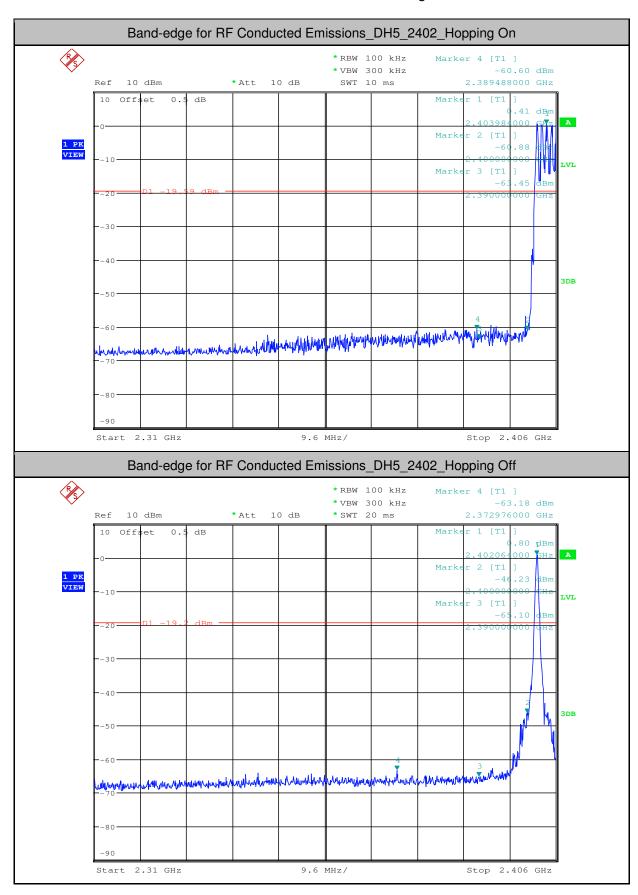



Report No.: SZEM180800801702


Page: 73 of 92

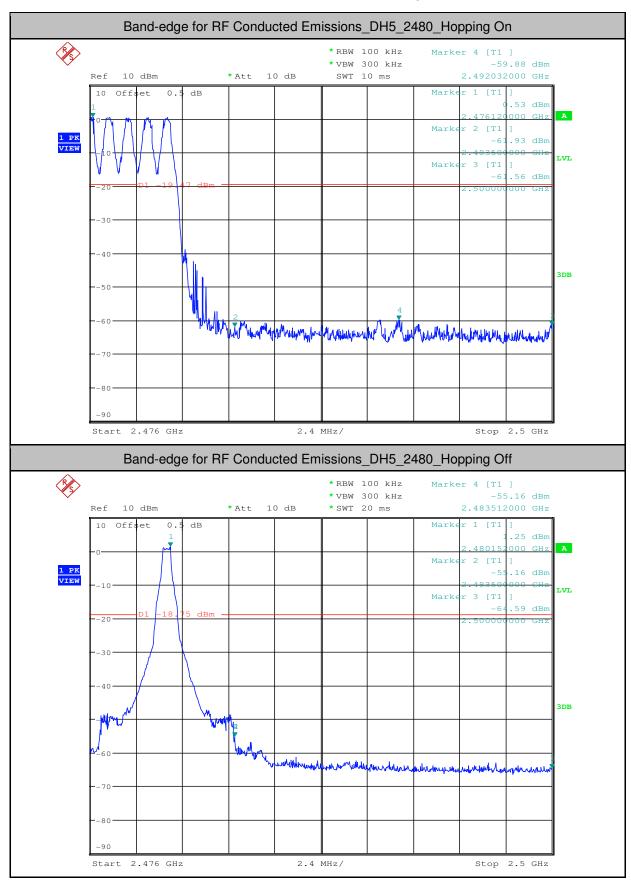



Report No.: SZEM180800801702


Page: 74 of 92

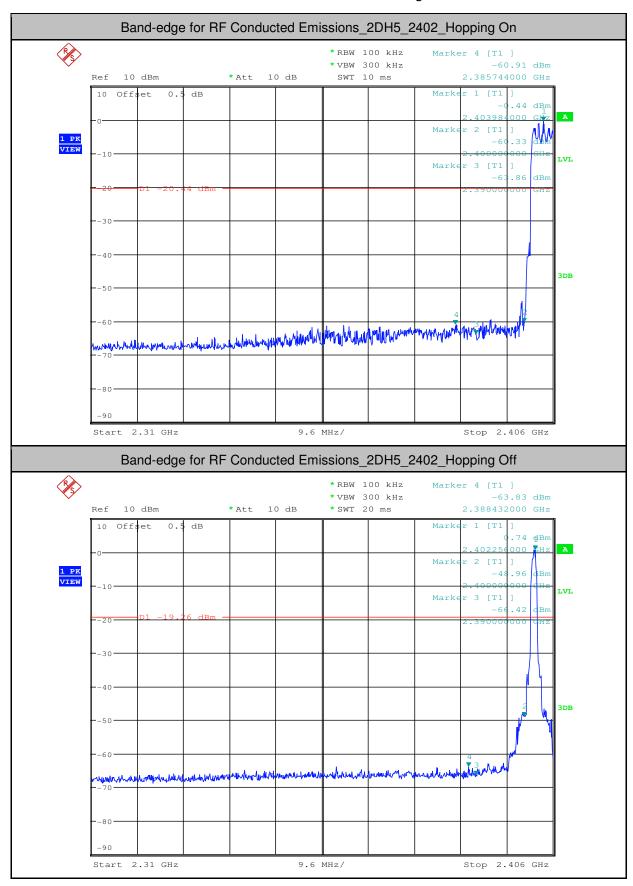



Report No.: SZEM180800801702


Page: 75 of 92

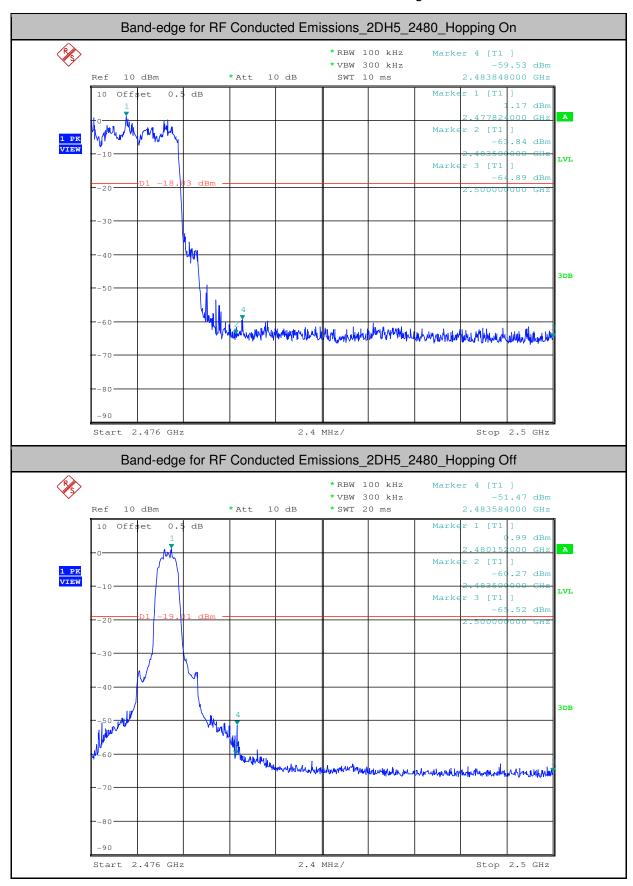



Report No.: SZEM180800801702


Page: 76 of 92

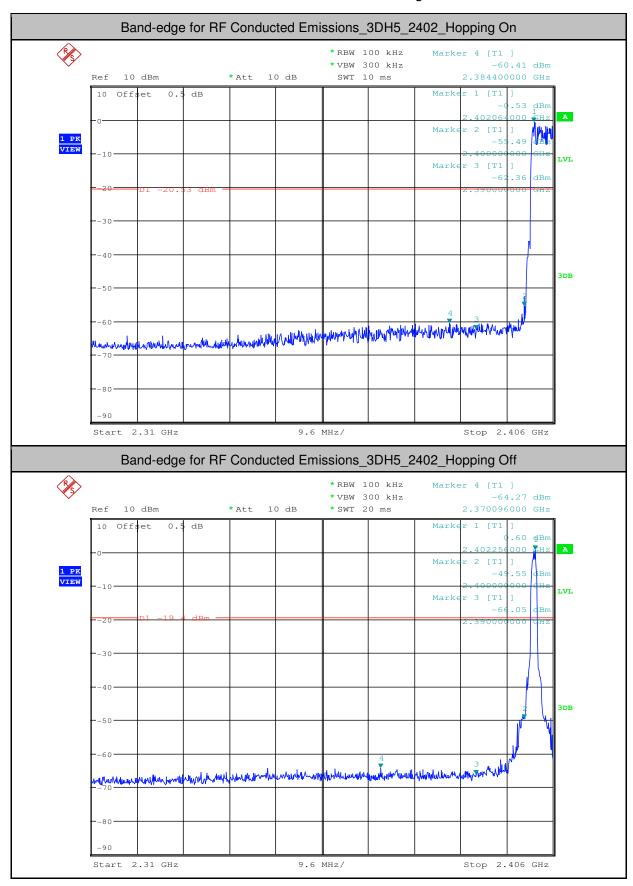



Report No.: SZEM180800801702

Page: 77 of 92

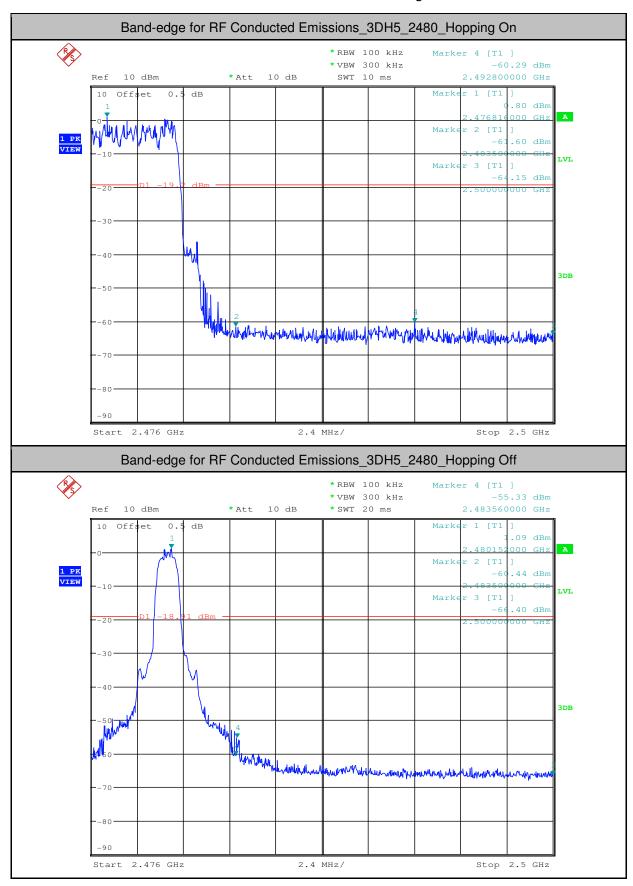



Report No.: SZEM180800801702

Page: 78 of 92


#### 8.RF Conducted Spurious Emissions

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
DH5	2402	30	10000	1000	3000	1.31	-48.590	<- 18.69	PASS
DH5	2402	10000	25000	1000	3000	1.31	-65.530	<- 18.69	PASS
DH5	2441	30	10000	1000	3000	2.19	-47.730	<- 17.81	PASS
DH5	2441	10000	25000	1000	3000	2.19	-65.530	<- 17.81	PASS
DH5	2480	30	10000	1000	3000	1.25	-48.800	<- 18.75	PASS
DH5	2480	10000	25000	1000	3000	1.25	-65.500	<- 18.75	PASS
2DH5	2402	30	10000	1000	3000	0.84	-45.940	<- 19.16	PASS
2DH5	2402	10000	25000	1000	3000	0.84	-64.910	<- 19.16	PASS
2DH5	2441	30	10000	1000	3000	1.98	-46.870	<- 18.02	PASS
2DH5	2441	10000	25000	1000	3000	1.98	-64.630	<- 18.02	PASS
2DH5	2480	30	10000	1000	3000	0.93	-44.340	<- 19.07	PASS
2DH5	2480	10000	25000	1000	3000	0.93	-65.020	<- 19.07	PASS
3DH5	2402	30	10000	1000	3000	0.9	-44.160	<-19.1	PASS
3DH5	2402	10000	25000	1000	3000	0.9	-65.250	<-19.1	PASS
3DH5	2441	30	10000	1000	3000	1.72	-46.850	<- 18.28	PASS
3DH5	2441	10000	25000	1000	3000	1.72	-63.920	<- 18.28	PASS
3DH5	2480	30	10000	1000	3000	1.12	-47.510	<- 18.88	PASS
3DH5	2480	10000	25000	1000	3000	1.12	-65.490	<- 18.88	PASS



Report No.: SZEM180800801702


Page: 79 of 92

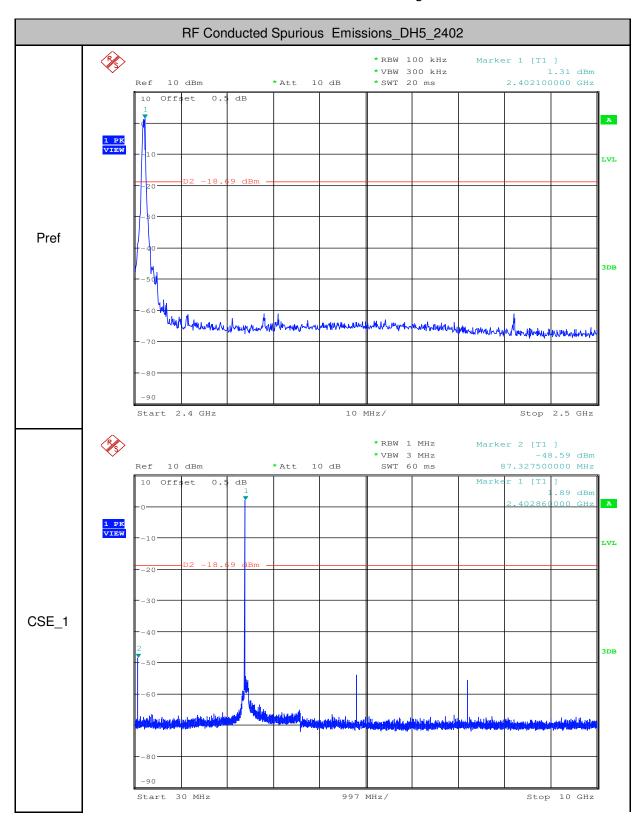



Report No.: SZEM180800801702


Page: 80 of 92

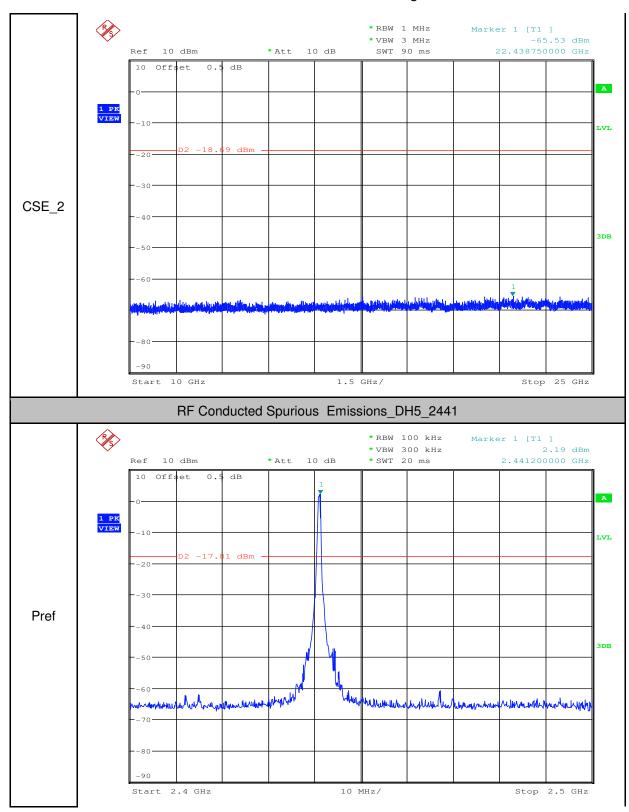



Report No.: SZEM180800801702


Page: 81 of 92

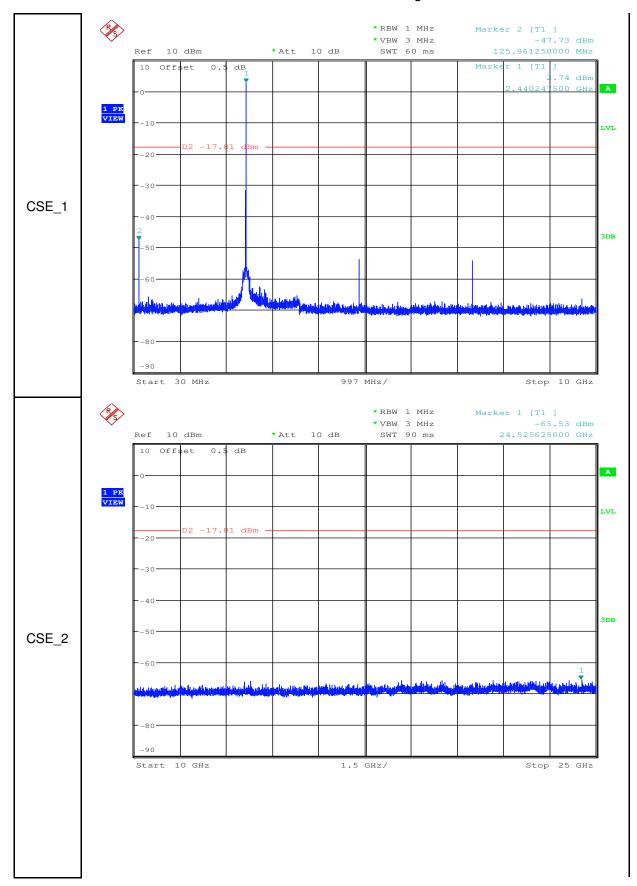



Report No.: SZEM180800801702


Page: 82 of 92

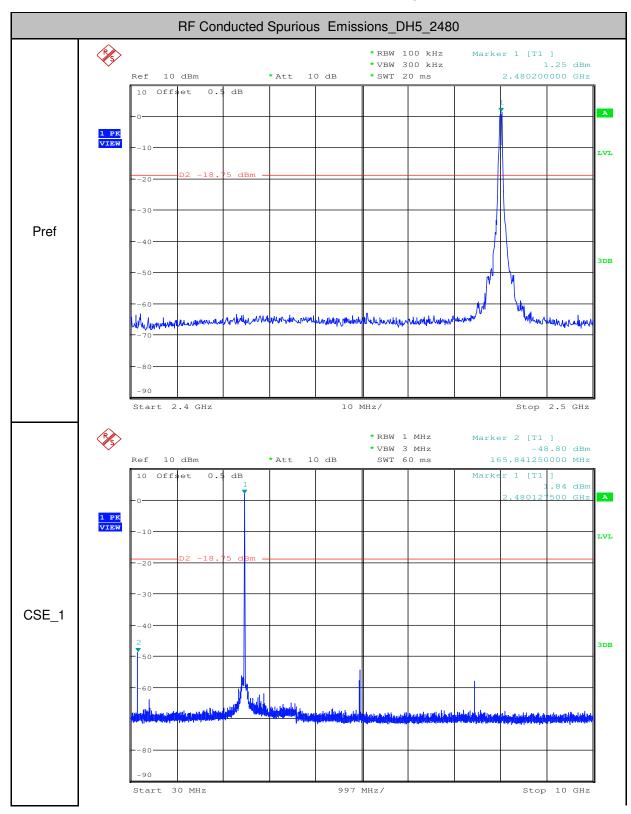



Report No.: SZEM180800801702


Page: 83 of 92

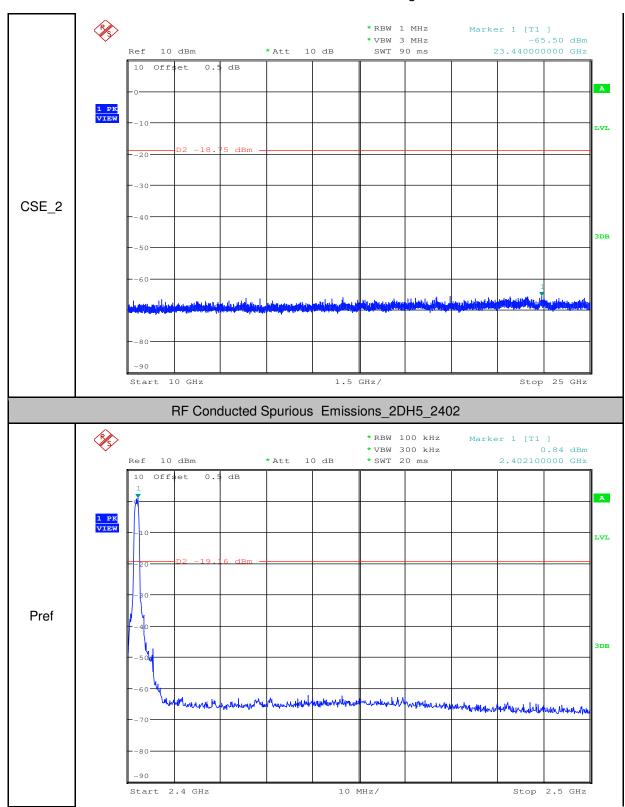



Report No.: SZEM180800801702


Page: 84 of 92

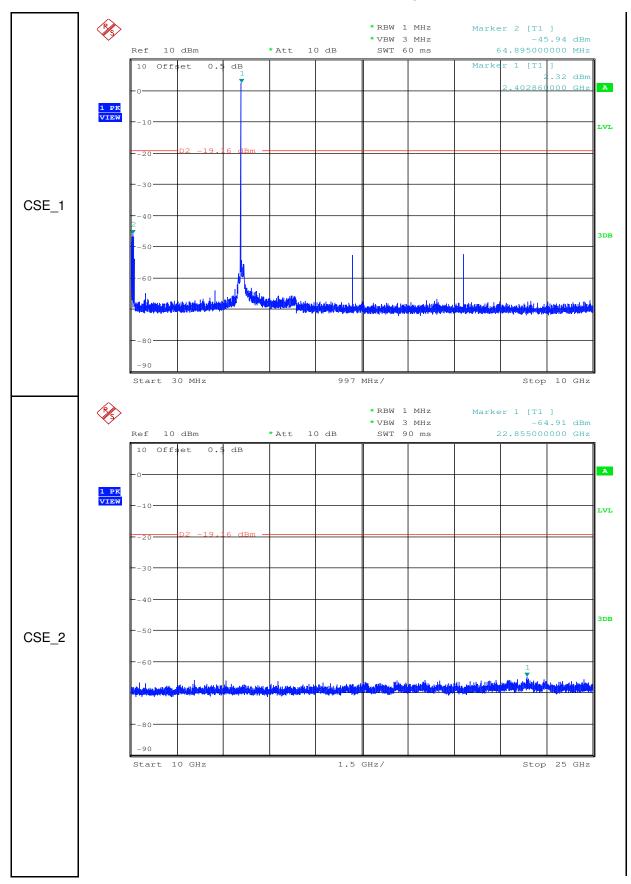




Report No.: SZEM180800801702

Page: 85 of 92

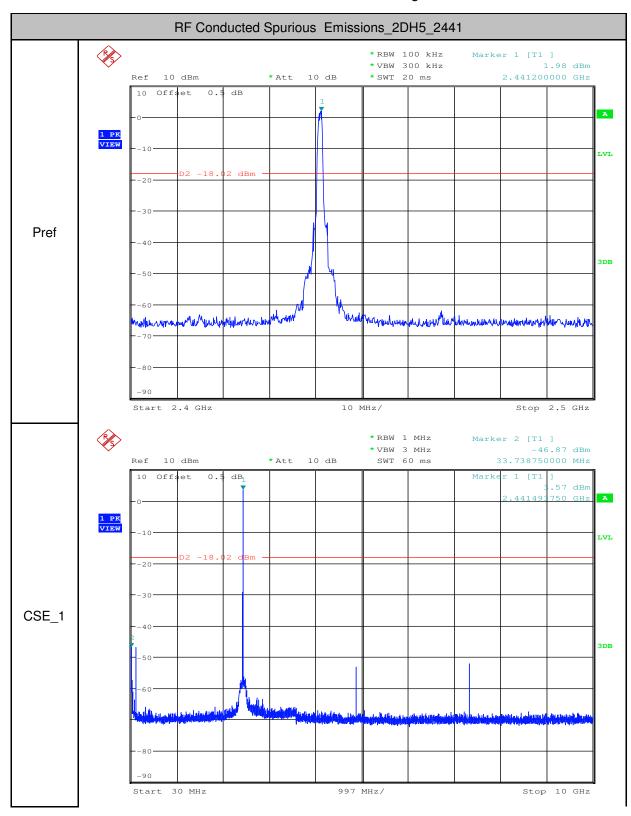



Report No.: SZEM180800801702

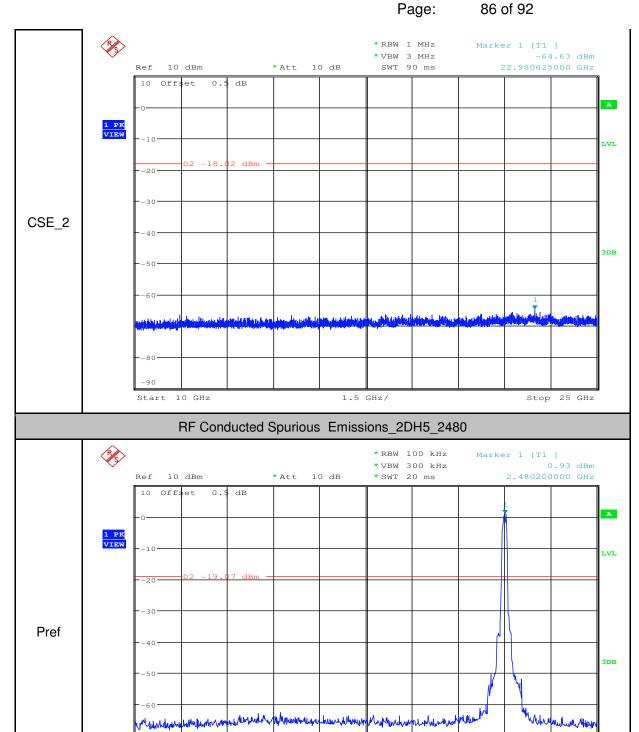

10 MHz/


Stop 2.5 GHz

Start 2.4 GHz



Report No.: SZEM180800801702


Page: 87 of 92

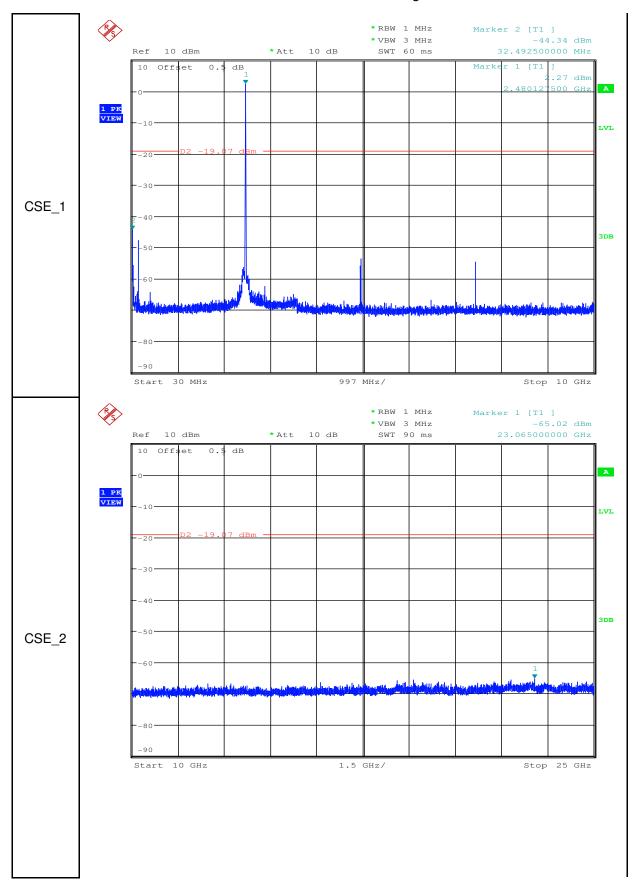



Report No.: SZEM180800801702


Page: 88 of 92

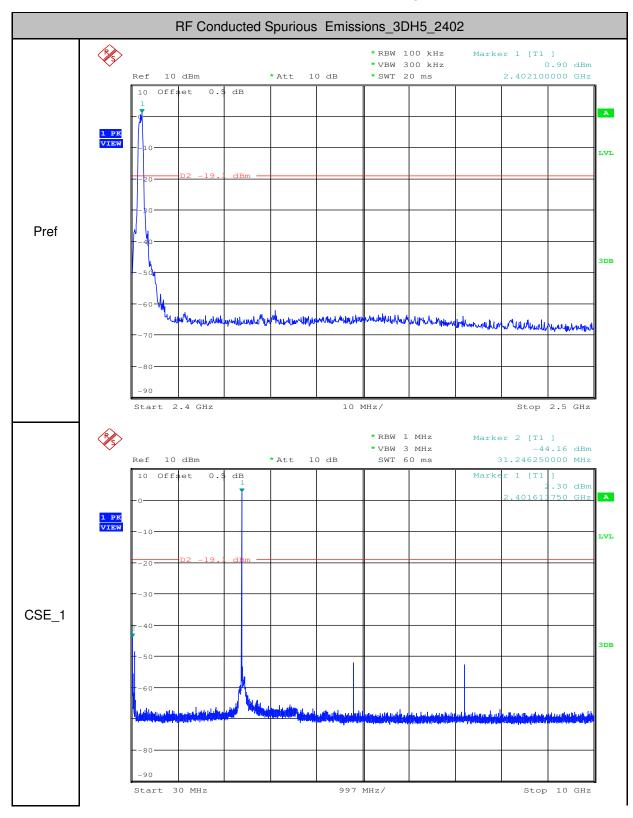



Report No.: SZEM180800801702


Page: 89 of 92

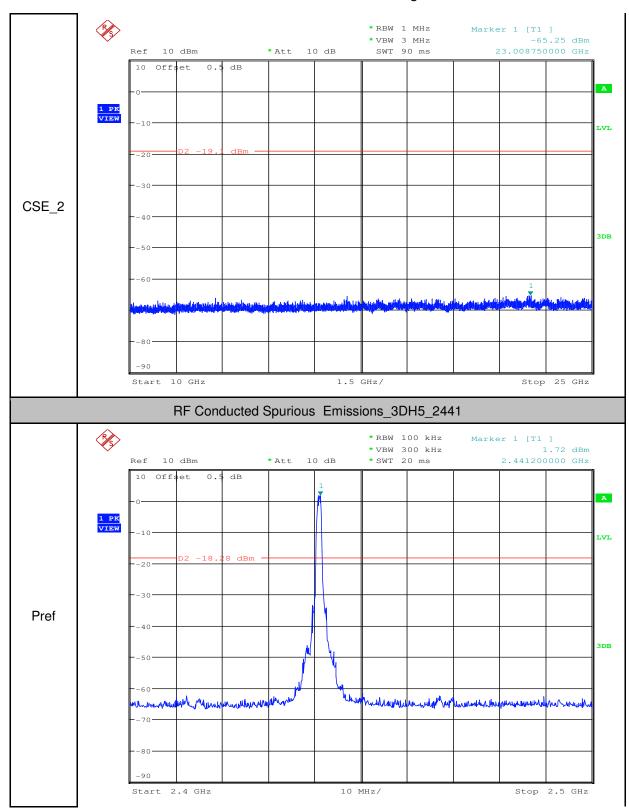



Report No.: SZEM180800801702


Page: 90 of 92

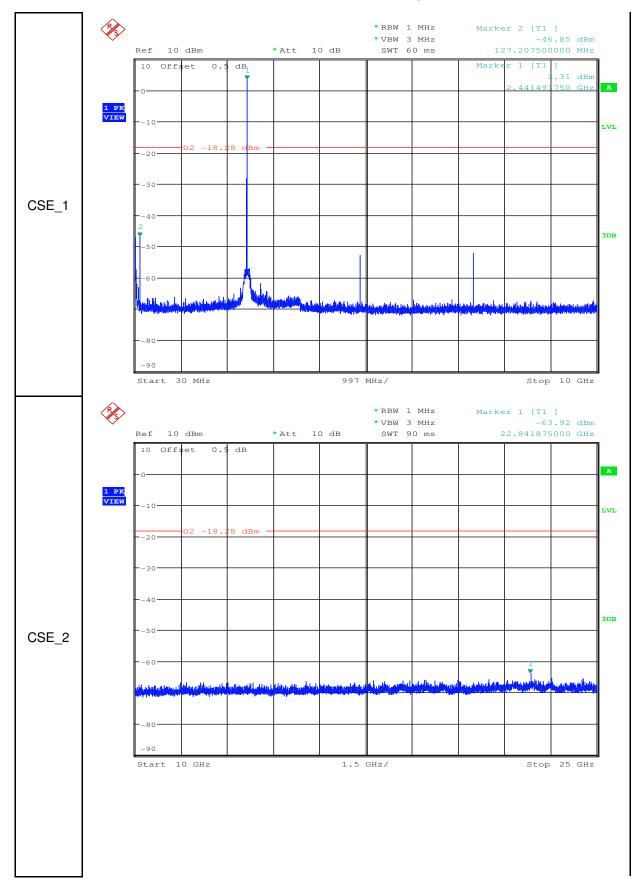



Report No.: SZEM180800801702


Page: 91 of 92

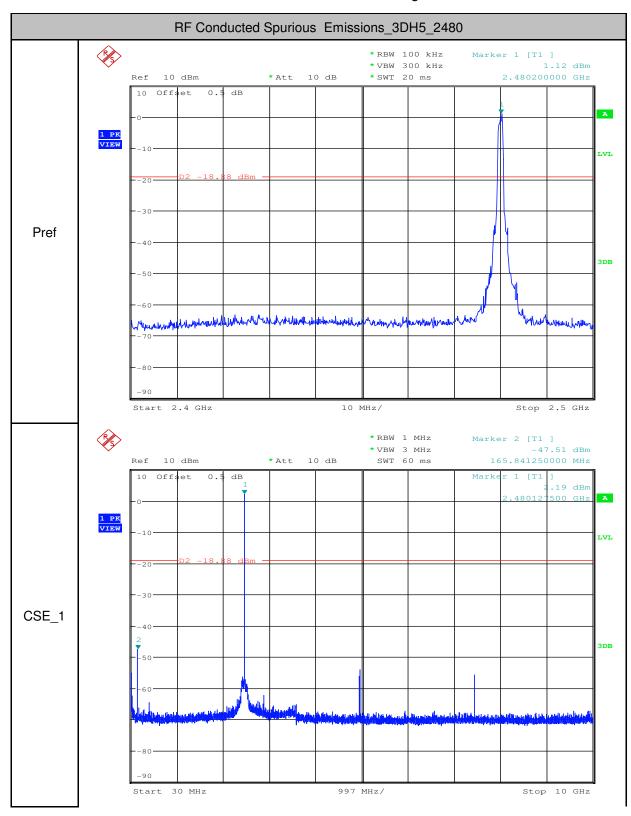



Report No.: SZEM180800801702

Page: 92 of 92

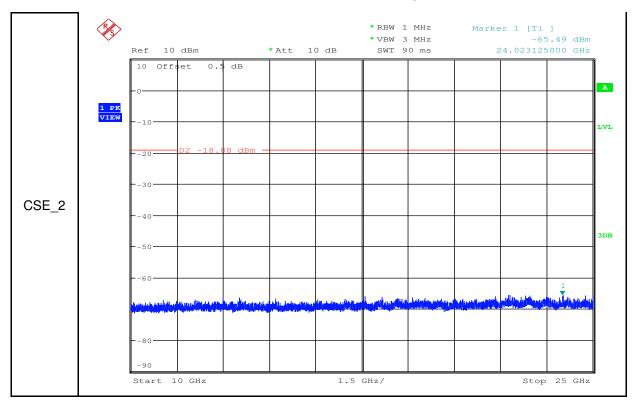

- End of the Report -