

FCC Test Report

Applicant : Shenzhen Maono Technology Co., Ltd.

Address : No. 1307, 13th Floor, Building 4, Phase II of
Tianan Yungu Industrial Park, Gangtou
Community, Bantian Street, Longgang
District, Shenzhen, China

Product Name : WIRELESS CONDENSER MICROPHONE

Report Date : Dec. 16, 2024

Shenzhen Anbotek Compliance Laboratory Limited



Contents

f1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	7
1.4. Description of Test Configuration	7
1.5. Description Of Test Setup	8
1.6. Test Equipment List	9
1.7. Measurement Uncertainty	10
1.8. Description of Test Facility	10
1.9. Disclaimer	11
2. Summary of Test Results	12
3. Conducted Emission Test	13
3.1. Test Standard and Limit	13
3.2. Test Setup	13
3.3. Test Procedure	13
3.4. Test Data	13
4. Radiation Spurious Emission and Band Edge Test	18
4.1. Test Standard and Limit	18
4.2. Test Setup	18
4.3. Test Procedure	19
4.4. Test Data	20
5. Maximum Conducted Output Power Test	29
5.1. Test Standard and Limit	29
5.2. Test Setup	29
5.3. Test Procedure	29
5.4. Test Data	29
6. 20dB Bandwidth and 99% Occupied Bandwidth Test	30
6.1. Test Standard	30
6.2. Test Setup	30
6.3. Test Procedure	30
6.4. Test Data	30
7. Carrier Frequency Separation Test	31
7.1. Test Standard and Limit	31
7.2. Test Setup	31
7.3. Test Procedure	31
7.4. Test Data	31
8. Number of Hopping Channel Test	32
8.1. Test Standard and Limit	32
8.2. Test Setup	32



8.3. Test Procedure 32

8.4. Test Data 32

9. Dwell Time Test33

9.1. Test Standard and Limit 33

9.2. Test Setup 33

9.3. Test Procedure 33

9.4. Test Data 33

10. Conducted Spurious Emission and Band Edge Test 34

10.1. Test Standard and Limit34

10.2. Test Setup 34

10.3. Test Procedure 34

10.4. Test Data 34

11. Antenna Requirement35

11.1. Test Standard and Requirement 35

11.2. Antenna Connected Construction 35

APPENDIX I -- TEST SETUP PHOTOGRAPH 36

APPENDIX II -- EXTERNAL PHOTOGRAPH36

APPENDIX III -- INTERNAL PHOTOGRAPH36



TEST REPORT

Applicant : Shenzhen Maono Technology Co., Ltd.

Manufacturer : Shenzhen Maono Technology Co., Ltd.

Product Name : WIRELESS CONDENSER MICROPHONE

Model No. : DM40, DM40 Pro, DM40 S, DM40 T, DM40 Pro S, DM40 Pro T,
DM40 Neo, DM40 Neo S, DM40 Neo T, DM40 Lite, DM40 Lite S,
DM40 Lite T, DM40 Ultra, DM40 Ultra S, DM40 Ultra T

Trade Mark : N/A

Rating(s) : Input: 5V $\overline{=}$ 2A
Battery capacity 1: DC 3.7V, 1500mAh(used for DM40)
Battery capacity 2: DC 3.7V, 2600mAh(DM40 Pro)

Test Standard(s) : 47 CFR Part 15.247

Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 15.247 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt Nov. 04, 2024

Date of Test Nov. 05, 2024 to Nov.13, 2024

Prepared By

Tu Tu Hong

(TuTu Hong)

Approved & Authorized Signer

Kingkong Jin

(Kingkong Jin)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Dec. 16, 2024



1. General Information

1.1. Client Information

Applicant	:	Shenzhen Maono Technology Co., Ltd.
Address	:	No. 1307, 13th Floor, Building 4, Phase II of Tianan Yungu Industrial Park, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China
Manufacturer	:	Shenzhen Maono Technology Co., Ltd.
Address	:	No. 1307, 13th Floor, Building 4, Phase II of Tianan Yungu Industrial Park, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China
Factory	:	Guangdong Dingchuang Smart Manufacturing Co., Ltd.
Address	:	Room 401, Building 8, Tian An Digital City, Fenggang Section 208 Dongshen Road, Fenggang Town, Dongguan City, Guangdong Province, China

1.2. Description of Device (EUT)

Product Name	:	WIRELESS CONDENSER MICROPHONE
Model No.	:	DM40, DM40 Pro, DM40 S, DM40 T, DM40 Pro S, DM40 Pro T, DM40 Neo, DM40 Neo S, DM40 Neo T, DM40 Lite, DM40 Lite S, DM40 Lite T, DM40 Ultra, DM40 Ultra S, DM40 Ultra T (Note: All samples are the same except the model number & appearance color, battery capacity, so we prepare "DM40" for test only.)
Trade Mark	:	N/A
Test Power Supply	:	AC 120V/60Hz for adapter/DC 3.7V battery inside
Test Sample No.	:	DM40: 1-4-1(Normal Sample), 1-4-2(Engineering Sample) DM40 Pro: 1-4-3(Normal Sample), 1-4-4(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Mode	:	☐ DSSS ☒ FHSS
Operation Frequency	:	2402MHz to 2480MHz
Number of Channel	:	79
Modulation Type	:	GFSK
Antenna Type	:	Ceramic Antenna
Antenna Gain(Peak)	:	1.75dBi
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) DM40 and DM40 Pro are tested for Conducted Emission Test and Radiation Spurious Emission(30~1000MHz), and we prepare DM40 for the RF test only.		



model	The capacity of the battery used
DM40	1500mAh
DM40 Pro, DM40 S, DM40 T, DM40 Pro S, DM40 Pro T, DM40 Neo, DM40 Neo S, DM40 Neo T, DM40 Lite, DM40 Lite S, DM40 Lite T, DM40 Ultra, DM40 Ultra S, DM40 Ultra T	2600mAh

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
Xiaomi 33W adapter	Xiaomi	MDY-11-EX	SA62212LA04358J

1.4. Description of Test Configuration


Operation Band:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461	-	-




1.5. Description Of Test Setup

CE

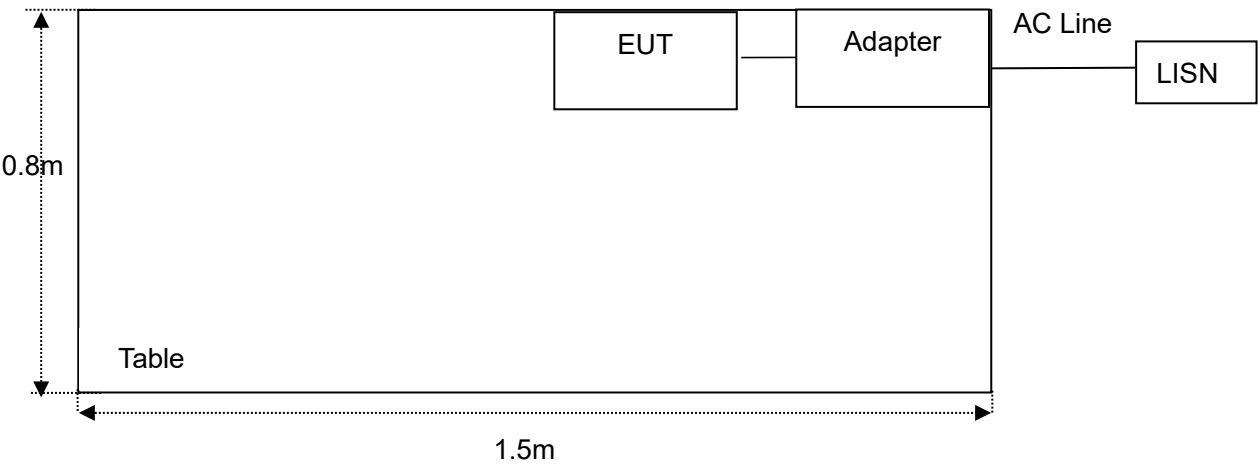

RE

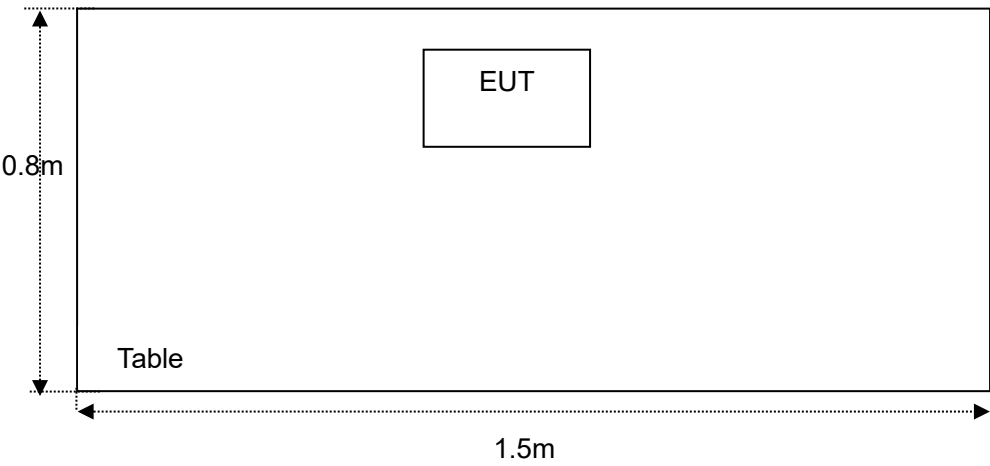

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Jan. 18, 2024	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT00 1	Jan. 17, 2024	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Jan. 17, 2024	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Jan. 23, 2024	1 Year
5.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Sept. 09, 2024	1 Year
6.	EMI Preamplifier	SKET Electronic	LNPA-0118G- 45	SKET-PA-002	Jan. 17, 2024	1 Year
7.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	Oct. 23, 2022	3 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Sept. 12, 2024	1 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	Jan. 22, 2024	3 Year
11.	Pre-amplifier	SONOMA	310N	186860	Jan. 17, 2024	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Sept. 09, 2024	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Feb. 04, 2024	1 Year
15.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 10, 2024	1 Year
16.	DC Power Supply	IVYTECH	IV3605	1804D360510	Sept. 09, 2024	1 Year
17.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 14, 2024	1 Year
18.	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102150	May. 06, 2024	1 Year



1.7. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.8dB
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Dwell Time	5%
Radiated spurious emissions (Below 30MHz)	3.53dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.78dB; 6G-18GHz: 4.88dB 18G-40GHz: 5.68dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.



1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Radiated Spurious Emission and Band Edge	PASS
15.247(b)(1)	Maximum Conducted Output Power	PASS
15.247(a)(1)	20dB Bandwidth	PASS
N/A	99% Occupied Bandwidth	Report only
15.247(a)(1)	Carrier Frequency Separation	PASS
15.247(a)(1)(iii)	Number of Hopping Channel	PASS
15.247(a)(1)(iii)	Dwell Time	PASS
15.247(d)	Conducted Spurious Emission and Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

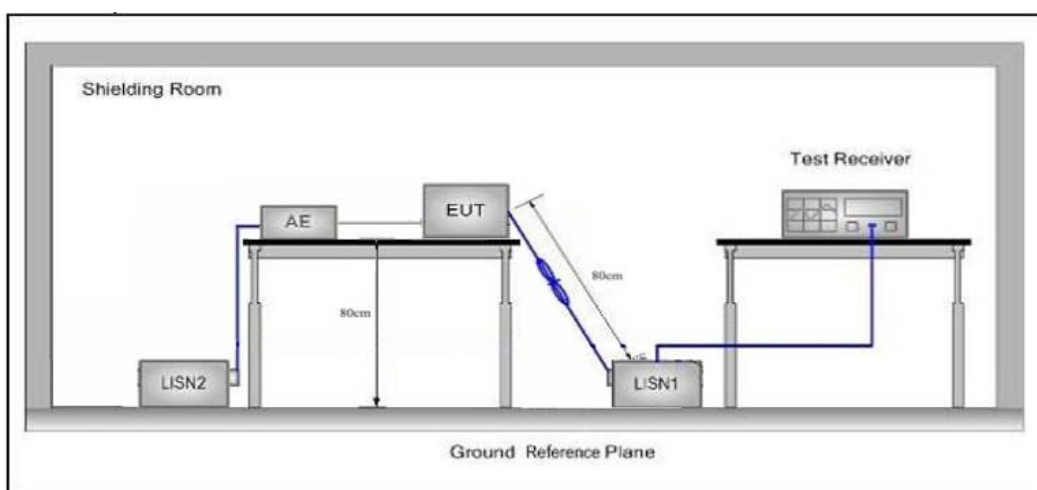

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

PASS


During the test, pre-scan all modes, only the worst case is recorded in the report.

Please to see the following pages.



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Low CH (2402MHz)
Test Specification: AC 120V/60Hz for adapter
Comment: Live Line
Temp.(°C)/Hum.(%RH): 22.8°C/51%RH
DM40+Battery 1:

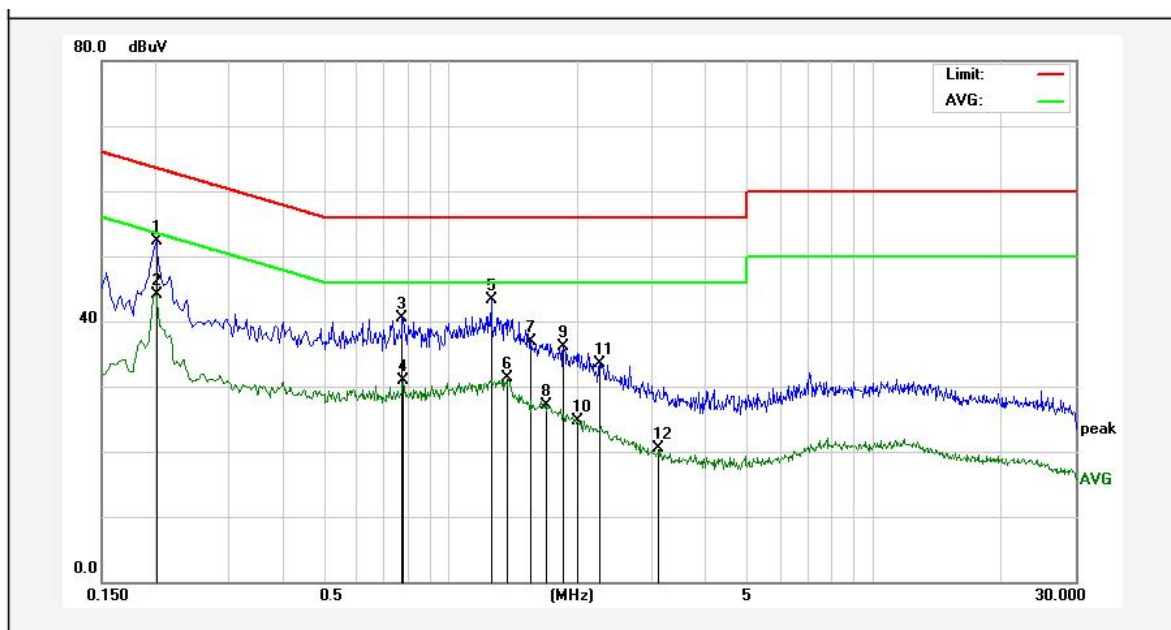


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2020	34.53	17.82	52.35	63.52	-11.17	QP	
2	0.2020	26.26	17.82	44.08	53.52	-9.44	AVG	
3	0.7740	22.61	17.87	40.48	56.00	-15.52	QP	
4	0.7780	13.12	17.87	30.99	46.00	-15.01	AVG	
5	1.2500	25.50	17.85	43.35	56.00	-12.65	QP	
6	1.3779	13.38	17.86	31.24	46.00	-14.76	AVG	
7	1.5580	19.01	17.85	36.86	56.00	-19.14	QP	
8	1.6900	9.33	17.85	27.18	46.00	-18.82	AVG	
9	1.8580	18.17	17.85	36.02	56.00	-19.98	QP	
10	2.0100	6.89	17.85	24.74	46.00	-21.26	AVG	
11	2.2500	15.75	17.85	33.60	56.00	-22.40	QP	
12	3.1099	2.63	17.85	20.48	46.00	-25.52	AVG	



Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Low CH (2402MHz)
Test Specification: AC 120V/60Hz for adapter
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 22.8°C/51%RH
DM40+Battery 1:

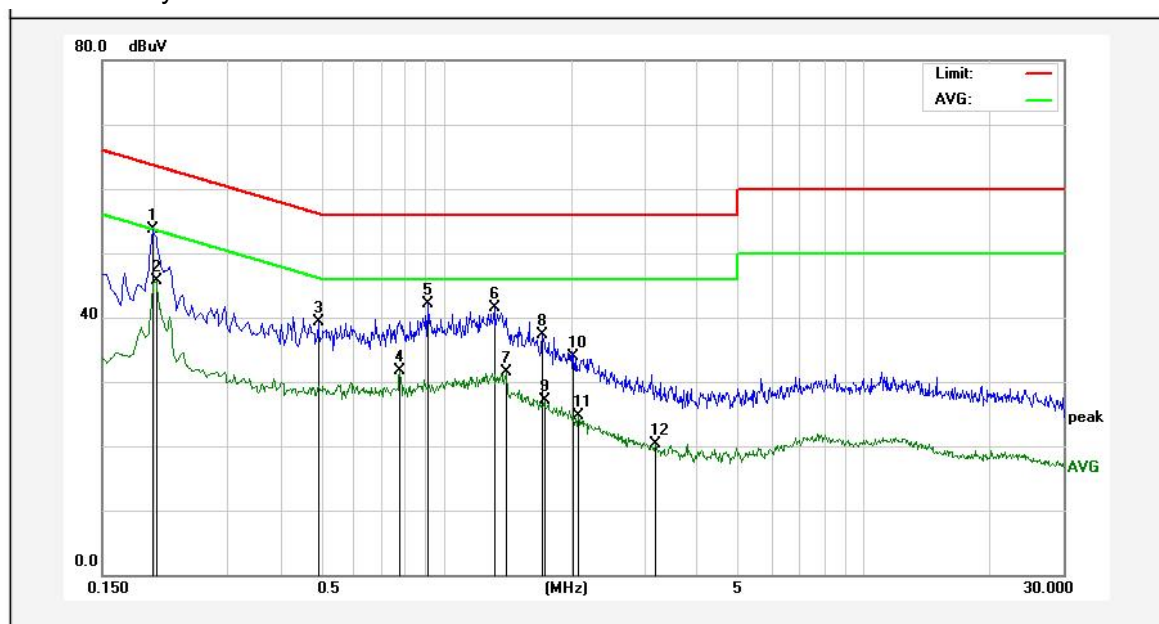

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1980	35.84	17.82	53.66	63.69	-10.03	QP	
2	0.2020	27.86	17.82	45.68	53.52	-7.84	AVG	
3	0.4940	21.53	17.86	39.39	56.10	-16.71	QP	
4	0.7780	13.77	17.87	31.64	46.00	-14.36	AVG	
5	0.9060	24.25	17.86	42.11	56.00	-13.89	QP	
6	1.3060	23.70	17.86	41.56	56.00	-14.44	QP	
7	1.3980	13.61	17.86	31.47	46.00	-14.53	AVG	
8	1.7020	19.44	17.85	37.29	56.00	-18.71	QP	
9	1.7220	9.26	17.85	27.11	46.00	-18.89	AVG	
10	2.0180	16.13	17.85	33.98	56.00	-22.02	QP	
11	2.0700	6.76	17.85	24.61	46.00	-21.39	AVG	
12	3.1619	2.40	17.85	20.25	46.00	-25.75	AVG	



Test Site: 1# Shielded Room
Operating Condition: Low CH (2402MHz)
Test Specification: AC 120V/60Hz for adapter
Comment: Live Line
Temp.(°C)/Hum.(%RH): 22.8°C/51%RH
DM40 Pro+Battery 2:

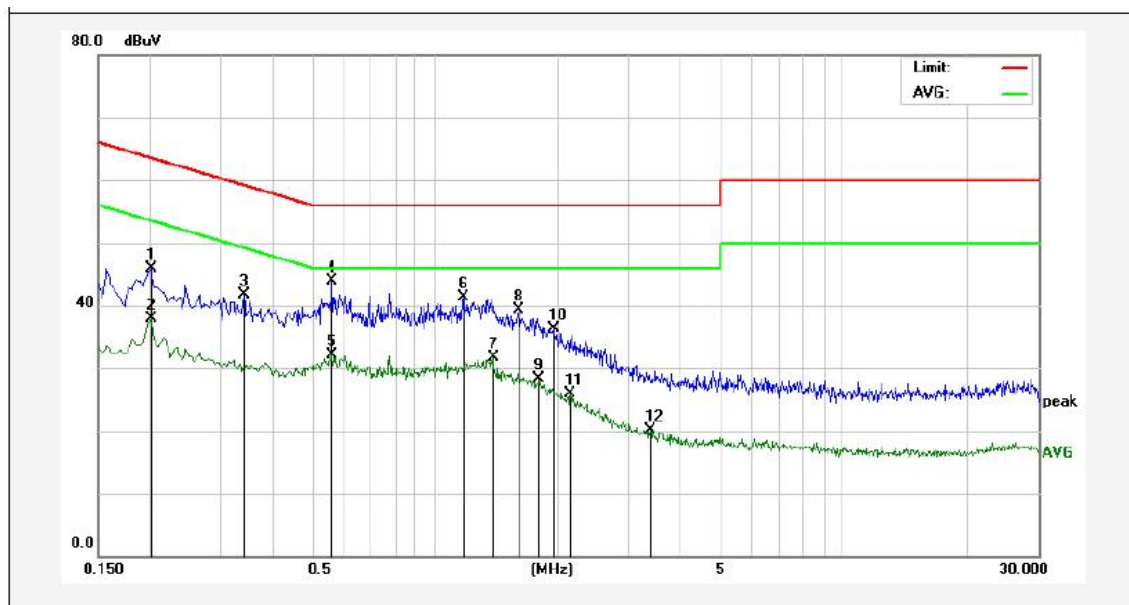


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2020	28.15	17.83	45.98	63.52	-17.54	QP	
2	0.2020	20.04	17.83	37.87	53.52	-15.65	AVG	
3	0.3420	23.98	17.82	41.80	59.15	-17.35	QP	
4	0.5620	26.00	17.86	43.86	56.00	-12.14	QP	
5	0.5620	14.23	17.86	32.09	46.00	-13.91	AVG	
6	1.1740	23.41	17.84	41.25	56.00	-14.75	QP	
7	1.3900	13.78	17.84	31.62	46.00	-14.38	AVG	
8	1.6100	21.39	17.84	39.23	56.00	-16.77	QP	
9	1.8020	10.44	17.84	28.28	46.00	-17.72	AVG	
10	1.9500	18.42	17.83	36.25	56.00	-19.75	QP	
11	2.1500	8.01	17.83	25.84	46.00	-20.16	AVG	
12	3.3780	2.27	17.84	20.11	46.00	-25.89	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Low CH (2402MHz)
Test Specification: AC 120V/60Hz for adapter
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 22.8°C/51%RH
DM40 Pro+Battery 2:

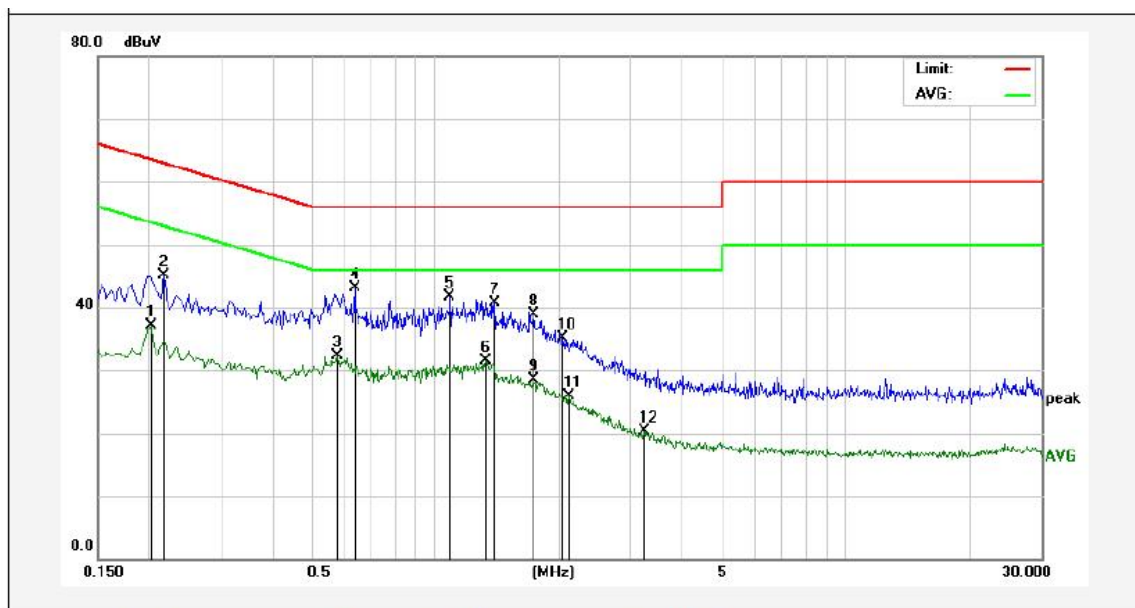

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2020	19.30	17.83	37.13	53.52	-16.39	AVG	
2	0.2180	27.18	17.83	45.01	62.89	-17.88	QP	
3	0.5780	14.37	17.86	32.23	46.00	-13.77	AVG	
4	0.6340	25.28	17.86	43.14	56.00	-12.86	QP	
5	1.0859	23.94	17.85	41.79	56.00	-14.21	QP	
6	1.3260	13.59	17.84	31.43	46.00	-14.57	AVG	
7	1.3980	22.80	17.84	40.64	56.00	-15.36	QP	
8	1.7420	21.00	17.84	38.84	56.00	-17.16	QP	
9	1.7420	10.68	17.84	28.52	46.00	-17.48	AVG	
10	2.0500	17.35	17.83	35.18	56.00	-20.82	QP	
11	2.1180	8.10	17.83	25.93	46.00	-20.07	AVG	
12	3.2300	2.52	17.84	20.36	46.00	-25.64	AVG	



4. Radiation Spurious Emission and Band Edge Test

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

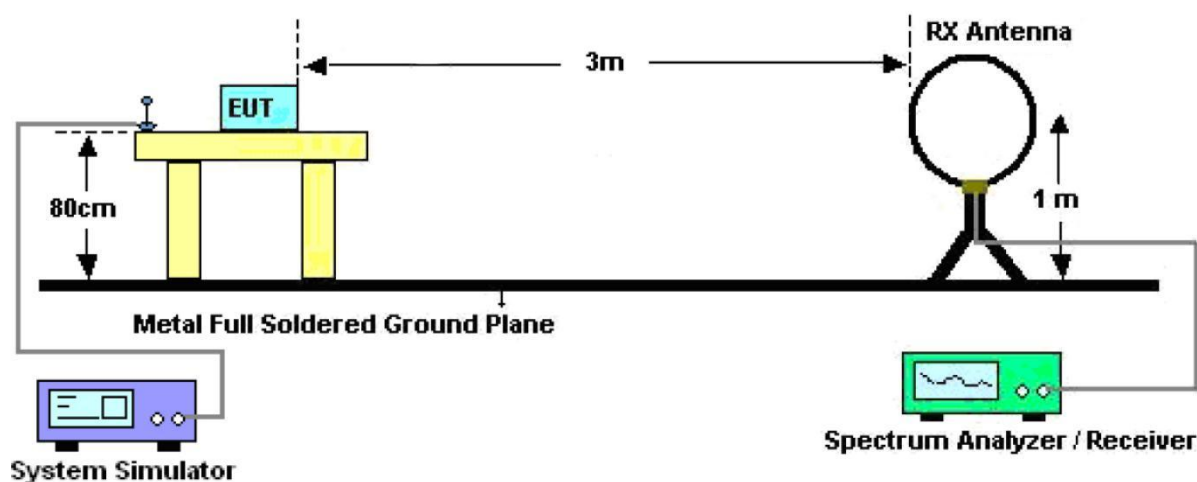


Figure 1. Below 30MHz



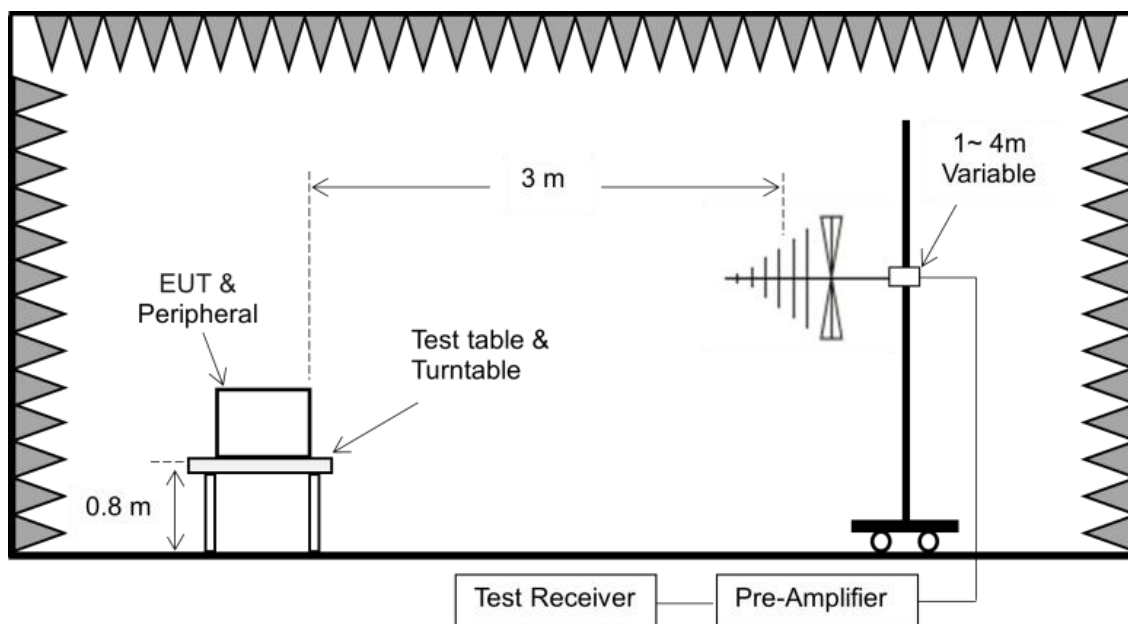


Figure 2. 30MHz to 1GHz

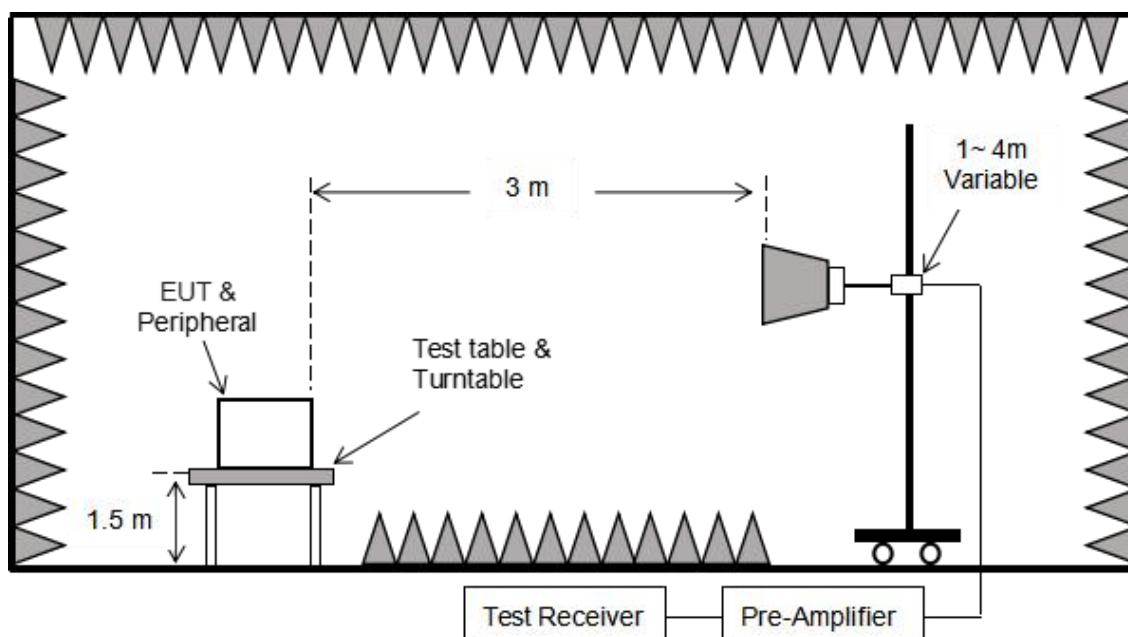


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.



For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 120kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

For average measurement: use duty cycle correction factor method (DCCF)

Average level = Peak level + DCCF

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.



Test Results (30~1000MHz)

Test Mode: Low CH (2402MHz)
Power Source: DC 3.7V battery inside
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 24.1°C/48%RH
DM40+Battery 1:

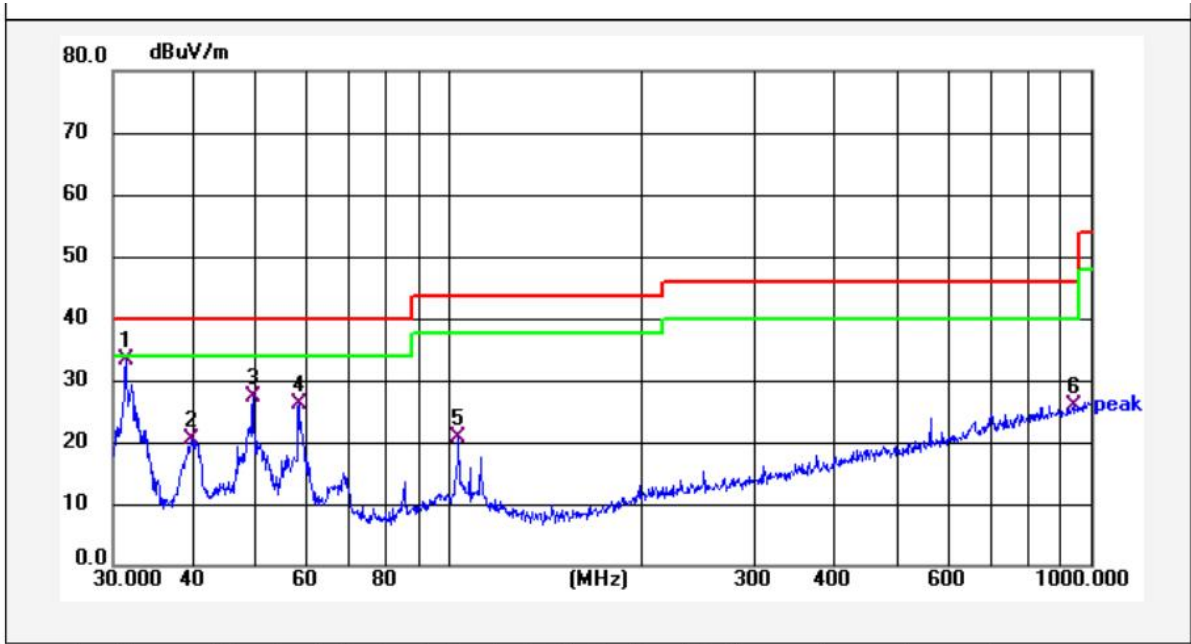


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.413	57.68	-24.33	33.35	40.00	-6.65	QP			
2	39.907	42.87	-22.56	20.31	40.00	-19.69	QP			
3	49.554	48.64	-21.41	27.23	40.00	-12.77	QP			
4	58.433	48.65	-22.42	26.23	40.00	-13.77	QP			
5	103.578	42.62	-21.98	20.64	43.50	-22.86	QP			
6	939.656	34.49	-8.53	25.96	46.00	-20.04	QP			



Test Results (30~1000MHz)

Test Mode: Low CH (2402MHz)
Power Source: DC 3.7V battery inside
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 24.1°C/48%RH
DM40+Battery 1:

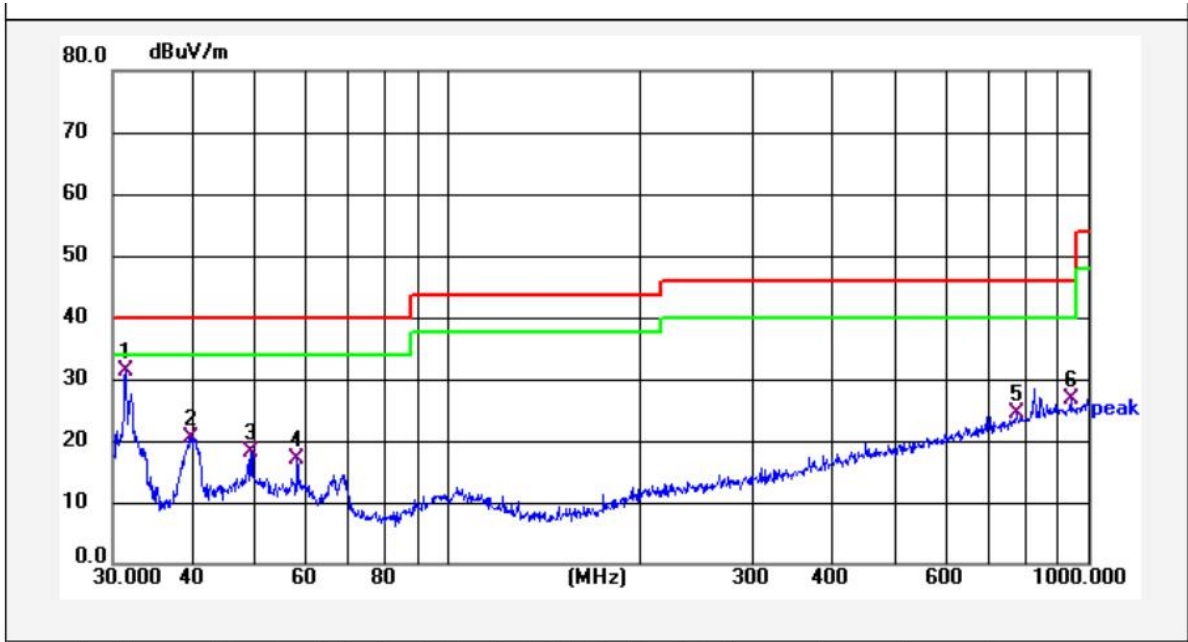


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.441	55.68	-24.33	31.35	40.00	-8.65	QP			
2	39.732	43.06	-22.62	20.44	40.00	-19.56	QP			
3	49.511	39.69	-21.41	18.28	40.00	-21.72	QP			
4	58.407	39.32	-22.42	16.90	40.00	-23.10	QP			
5	773.141	34.95	-10.65	24.30	46.00	-21.70	QP			
6	940.068	35.29	-8.52	26.77	46.00	-19.23	QP			




Test Results (30~1000MHz)

Test Mode: Low CH (2402MHz)
Power Source: DC 3.7V battery inside
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 24.1°C/48%RH
DM40 Pro+Battery 2:

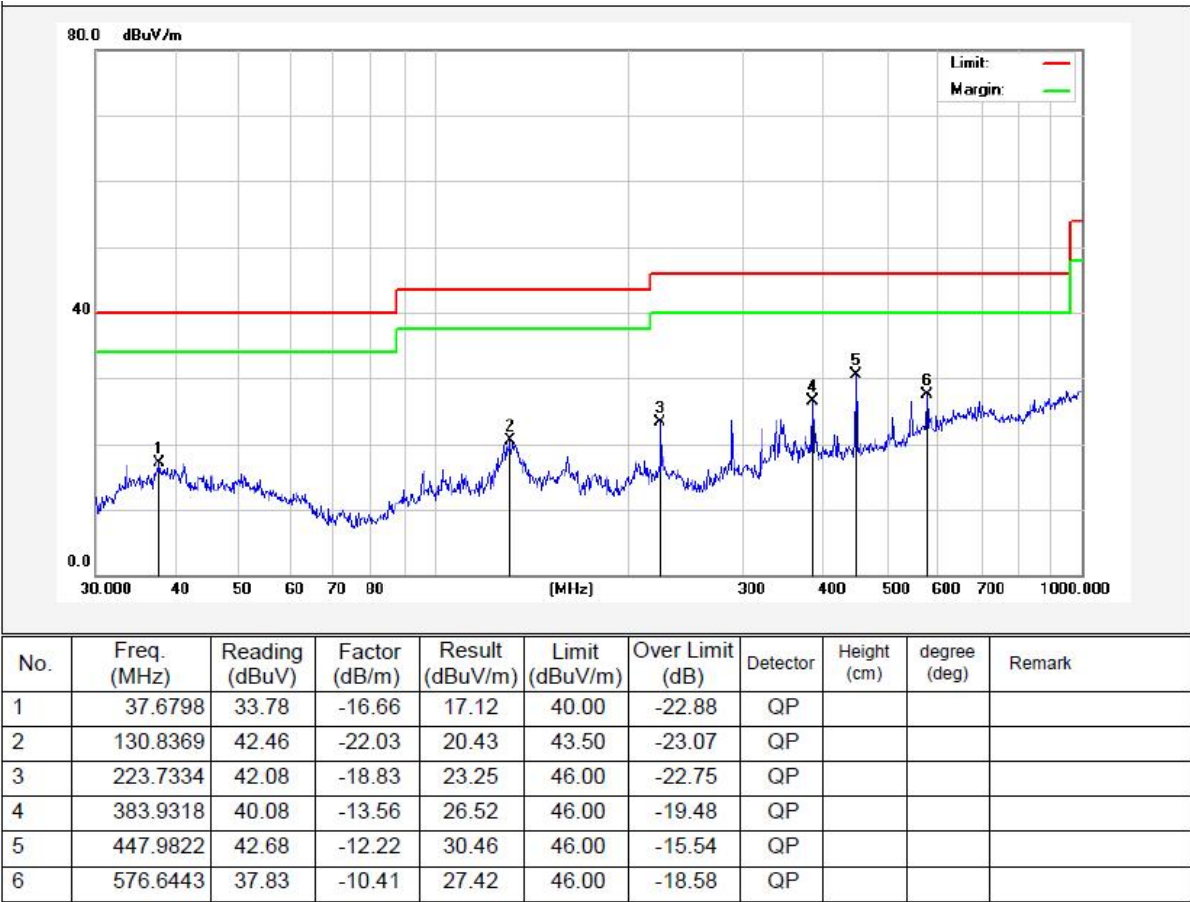

Test Results (30~1000MHz)

Test Mode: Low CH (2402MHz)
Power Source: DC 3.7V battery inside
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 24.1°C/48%RH
DM40 Pro+Battery 2:

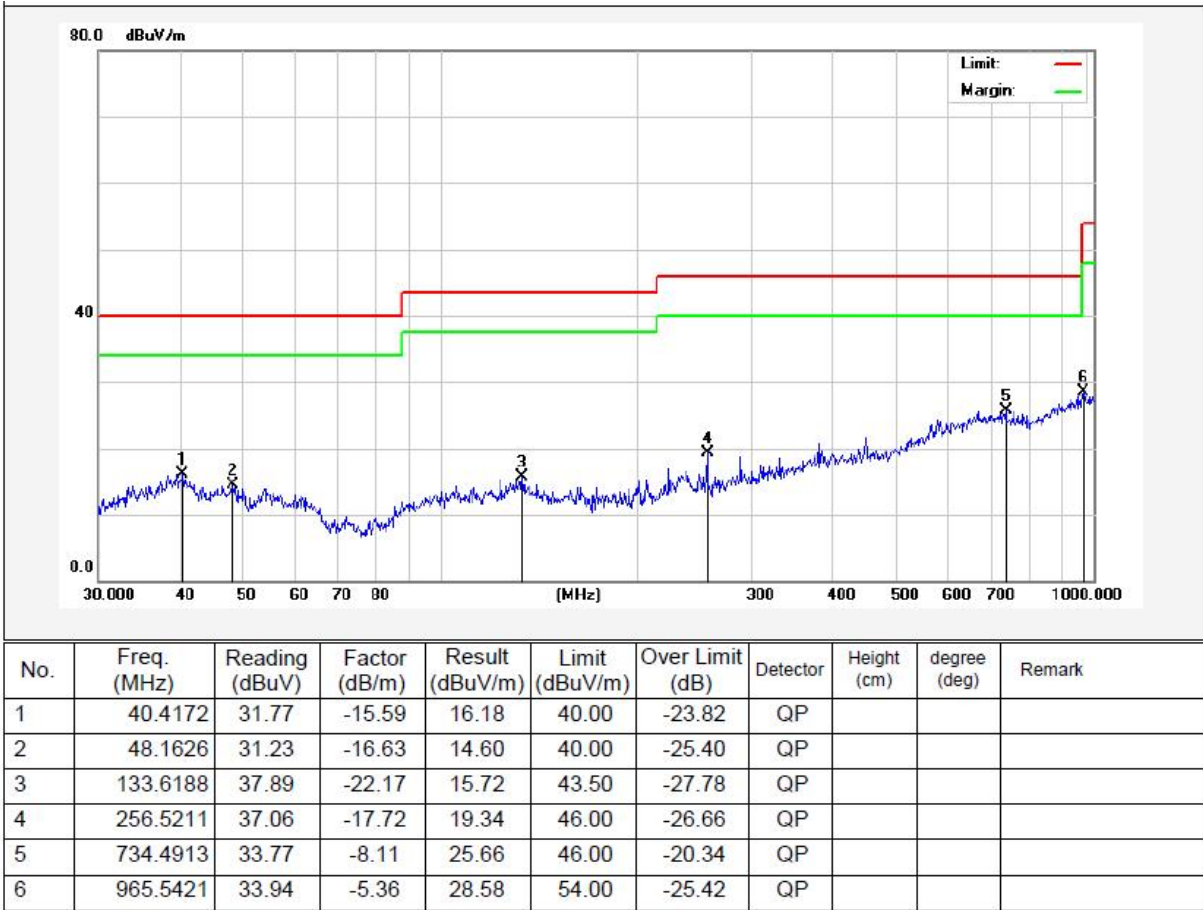

Test Results (1GHz-25GHz)

Test channel: Lowest						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	26.93	15.27	42.20	74.00	-31.80	Vertical
7206.00	28.27	18.09	46.36	74.00	-27.64	Vertical
9608.00	28.97	23.76	52.73	74.00	-21.27	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	27.37	15.27	42.64	74.00	-31.36	Horizontal
7206.00	28.29	18.09	46.38	74.00	-27.62	Horizontal
9608.00	28.27	23.76	52.03	74.00	-21.97	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	16.31	15.27	31.58	54.00	-22.42	Vertical
7206.00	17.30	18.09	35.39	54.00	-18.61	Vertical
9608.00	17.99	23.76	41.75	54.00	-12.25	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	15.72	15.27	30.99	54.00	-23.01	Horizontal
7206.00	17.35	18.09	35.44	54.00	-18.56	Horizontal
9608.00	17.58	23.76	41.34	54.00	-12.66	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal



Test Results (1GHz-25GHz)

Test channel: Middle						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	26.95	15.42	42.37	74.00	-31.63	Vertical
7323.00	28.12	18.02	46.14	74.00	-27.86	Vertical
9764.00	27.98	23.80	51.78	74.00	-22.22	Vertical
12205.00	*			74.00		Vertical
14646.00	*			74.00		Vertical
4882.00	27.07	15.42	42.49	74.00	-31.51	Horizontal
7323.00	28.28	18.02	46.30	74.00	-27.70	Horizontal
9764.00	27.97	23.80	51.77	74.00	-22.23	Horizontal
12205.00	*			74.00		Horizontal
14646.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4882.00	16.04	15.42	31.46	54.00	-22.54	Vertical
7323.00	17.40	18.02	35.42	54.00	-18.58	Vertical
9764.00	17.85	23.80	41.65	54.00	-12.35	Vertical
12205.00	*			54.00		Vertical
14646.00	*			54.00		Vertical
4882.00	15.63	15.42	31.05	54.00	-22.95	Horizontal
7323.00	16.91	18.02	34.93	54.00	-19.07	Horizontal
9764.00	18.09	23.80	41.89	54.00	-12.11	Horizontal
12205.00	*			54.00		Horizontal
14646.00	*			54.00		Horizontal



Test Results (1GHz-25GHz)


Test channel: Highest						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	27.22	15.58	42.80	74.00	-31.20	Vertical
7440.00	28.13	17.93	46.06	74.00	-27.94	Vertical
9920.00	28.53	23.83	52.36	74.00	-21.64	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	27.14	15.58	42.72	74.00	-31.28	Horizontal
7440.00	28.31	17.93	46.24	74.00	-27.76	Horizontal
9920.00	28.65	23.83	52.48	74.00	-21.52	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	17.16	15.58	32.74	54.00	-21.26	Vertical
7440.00	18.41	17.93	36.34	54.00	-17.66	Vertical
9920.00	18.40	23.83	42.23	54.00	-11.77	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	17.07	15.58	32.65	54.00	-21.35	Horizontal
7440.00	18.28	17.93	36.21	54.00	-17.79	Horizontal
9920.00	17.99	23.83	41.82	54.00	-12.18	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

Remark:

1. Result =Reading + Factor
2. Test frequency are from 1GHz to 25GHz, "*"means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Radiated Band Edge:

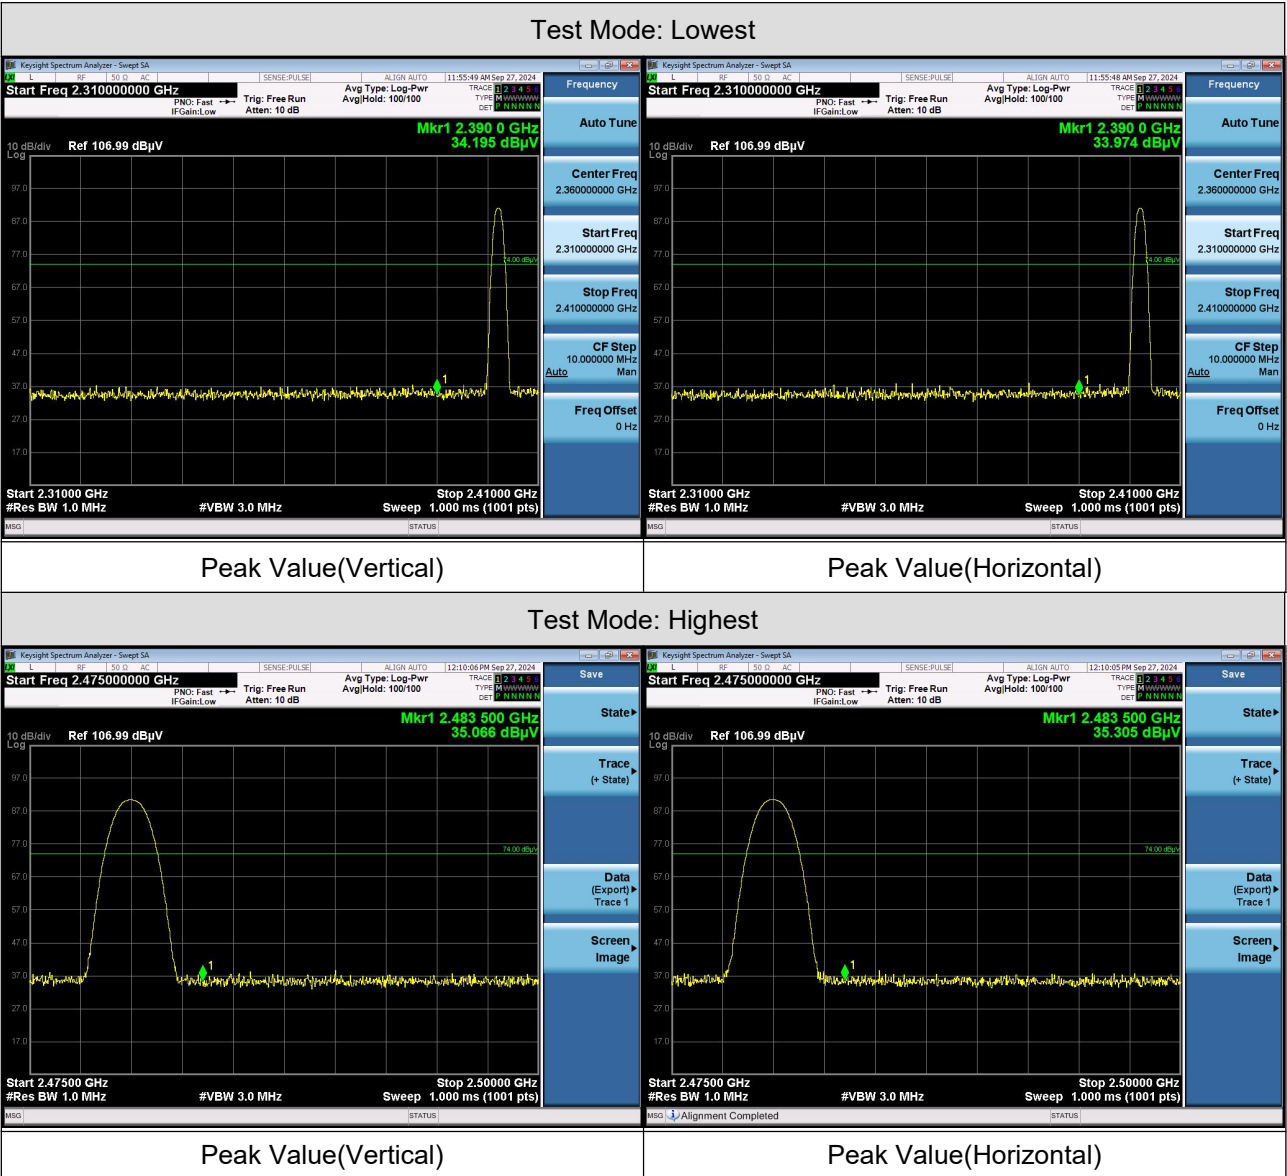

Note: When the PK measure result value is less than the AVG limit value, the AV measure result values test not applicable.




5. Maximum Conducted Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(1)
Test Limit	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.2. Test Setup



5.3. Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 RBW > the 20 dB bandwidth of the emission being measured
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 VBW ≥ RBW
 Sweep = auto
 Detector function = peak
 Trace = max hold

5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.




6. 20dB Bandwidth and 99% Occupied Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

6.2. Test Setup



6.3. Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 5 times the OBW.
2. Set the RBW =1%~5% of the OBW.
3. Set the VBW ≥ 3 RBW
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

6.4. Test Data

Pass

Please refer to Appendix A&B of the Appendix Test Data.




7. Carrier Frequency Separation Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

7.2. Test Setup



7.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW =approximately 30% of the channel spacing.
3. Set the VBW $\geq$ RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

7.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.




8. Number of Hopping Channel Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Limit	>15 channels

8.2. Test Setup



8.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. Set the VBW $\geq$ RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

8.4. Test Data

Pass

Please refer to Appendix F of the Appendix Test Data.




9. Dwell Time Test

9.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Limit	0.4 s

9.2. Test Setup



9.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW $\geq$ RBW.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = clear write.

9.4. Test Data

Pass

Please refer to Appendix E of the Appendix Test Data.




10. Conducted Spurious Emission and Band Edge Test

10.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

10.2. Test Setup



10.3. Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

10.4. Test Data

Pass

Please refer to Appendix G&H of the Appendix Test Data.



11. Antenna Requirement

11.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

11.2. Antenna Connected Construction

The antenna is **Ceramic Antenna** which permanently attached, and the best case gain of the antenna is 1.75dBi. It complies with the standard requirement.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

