




Product function manual

Smart home

HJH37 Ble

一、 Remote control button silicone diagram

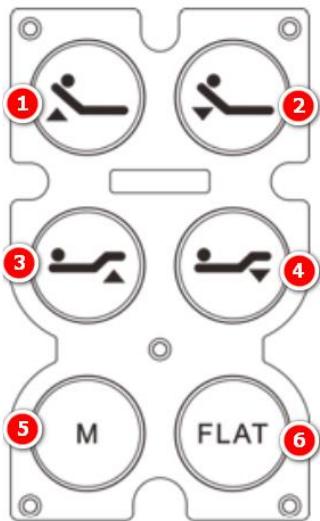

二、 Remote control function description

Button label	Function
1	The head motor extends.
2	The head motor retracts.
3	The foot motor extends.
4	The foot motor retracts.
5	The motor runs to the M position with one button (with initial value). Multiplexing function: long press ZG for about 3s, the backlight flashes, the buzzer sounds, and the current motor position is recorded to ZG. (Clear after power failure)
6	One-key reset, all motors retract to the minimum stroke position

Coding method:
 [Remote control head down + foot up (2, 3) + control box code matching key] The buzzer sounds, indicating successful code matching.

Precautions:

To protect the reliability and safety of the motor and control box, do not switch the buttons frequently.

Caution:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.