

FCC RADIO TEST REPORT

According to
FCC Part 15 Subpart C § 15.247

Equipment : WatchAir OpenArms
Model No : EPUS-100B
Applicant : **EPICT, Inc.**
587-40, Gwahaksaneop 2-ro, Ochang-eup, Cheongwon-gu,
Chungcheongbuk-do, Korea.
Date of reception : August 9, 2016
Date of test : August 10, 2016 to August 29, 2016
Report Number : BWS-16-RC-0004
Report Type : Original Report
Date of issue : August 29, 2016
FCC Rule Part(s) : FCC Part 15 Subpart C §15.247

The product was received on August 9, 2016 and testing was completed on August 30, 2016. We, BWS TECH Inc. would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of BWS TECH Inc. the test report shall not be reproduced except in full.

(Date) 08/29/2016



Tested by **Hyun-Yong, Seol**

(Date)08/29/2016



Reviewed by **Bang-Hyun, Nam**

BWS TECH INC.

#23, Gokhyeon-ro 480 Beon-gil, Mohyeon-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do
449-853, South Korea
TEL: +82-31-333-5997, FAX: +82-31-333-0017
<http://www.bws.co.kr>

TABLE OF CONTENTS

1. General Information.....	3
2. Description of Test Facility.....	4
3. Test Methodology.....	5
4. Summary of Test Results.....	6
5. Test Data.....	7
5.1 AC Power Line Conducted Emission	7
5.2 Peak Output Power	11
5.3 Power Spectral Density	13
5.4 6dB Bandwidth	18
5.5 Radiated Spurious Emission.....	23
5.6 Conducted Spurious Emission and Band Edge Measurement	28
5.7 Antenna Application.....	39
Exhibit 1. Label Sample and Location.....	40
Exhibit 2. Test Setup Photos.....	41
Exhibit 3. External Photos.....	44
Exhibit 4. Internal Photos.....	45

FCC TEST REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

1. General Information

1.1 Applicant

● Company Name	: EPICT, Inc
● Company Address	: 587-40, Gwahaksaneop 2-ro, Ochang-eup, Cheongwon-gu, Chungcheongbuk-do, Korea
● Phone/Fax	: Tel No. : +822-2039-2066 Fax No. : +822-2039-2067

1.2 Manufacturer

● Company Name	: Seers Technology Co., LTD
● Company Address	: #1210 Tech Center, SK Technopark, 124, Sagimakgol-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, South Korea
● Phone/Fax	: Tel No. : +82-31-775-3036 Fax No. : +82-31-776-3039

1.3 EUT Description

● Equipment	: OpenArms
● Model(s)	: EPUS-100B, EPUS-100W
● Operation Frequency	: 802.11 b/g/n(HT20): 2412MHz-2462MHz 802.11 n(HT40): 2422MHz-2462MHz
● Number of Channels	: 802.11 b/g/n(HT20): 11 802.11n(HT40): 9
● Modulation Method	: 802.11 b DSSS(CCK, DQPSK, DBPSK) 802.11 g/n(HT20)/n(HT40) OFDM (64QAM, 16QAM, QPSK, BPSK)
● Input Voltage	: DC 5 V 2A
● Antenna Peak Gain	: 3dBi (Part number: 2108517-1)

1.4 Other Information

● FCC Rule Part(s)	: Part 15 Subpart C §15.247
● FCC ID	: 2AJKJ-EPUS100
● Test Procedure	: ANSI C63.10-2013 KDB 558074 D01 DTS Meas Guidance v03r05
● Date of Test	: August 09, 2016 to August 29, 2016
● Place of Test	: BWS TECH Inc. (FCC Registration Number : 287786) #23, Gokhyeon-ro 480 Beon-gil, Mohyeon-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do 449-853, South Korea TEL: +82 31 333 5997 FAX: +82 31 333 0017

2. Description of Test Facility

Site Description

Test Lab.	 Accredited by Industry Canada, February 10, 2015 The Certificate Registration Number is 4963A-2.
	 Accredited by FCC, September 03, 2013 The Certificate Registration Number is 287786.
	 Accredited by VCCI, September 11, 2015 The Certificate Registration Number is C-4326
	 Accredited by RRA(EMC,RF, SAR), December 16, 2016 The Certificate Registration Number is KR0017
	 Accredited by KOLAS(KS Q ISO/IEC 17025), April 08, 2016 The Certificate Registration Number is KT174
Name of Firm	: BWS TECH Inc.
Site Location	: #23, Gokhyeon-ro 480 Beon-gil, Mohyeon-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do 449-853, South Korea

3. Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and the requirements of FCC Rules Part 15.207, 15.209 and 15.247.

Radio testing was performed according to KDB 558074 D01 DTS Meas Guidance v03r05.

3.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and is operated in a manner that intends to maximize its emission characteristics in a continuous normal application

3.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 FCC Part 15.205 Restricted Bands of Operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

1 Until February 1, 1999, this restricted band shall be 0.490-0.510MHz.

2 Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.4 Description of Test Modes

The EUT has been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below Channel Low (2412MHz), Middle (2441MHz) and High (2462MHz), these were chosen for full testing.

4. Summary of Test Results

Clause	TEST Description	Standard Section	Requirements	Result
5.1	AC Power Line Conducted Emission	§15.207	§15.207(a)	Pass
5.2	Peak Output Power	§15.247(b)(3)	≤30dBm	Pass
5.3	Power Spectral Density	§15.247(e)	≤8dBm/3kHz	Pass
5.4	6dB Bandwidth	§15.247(a)(2)	≥500kHz	Pass
5.5	Radiated Spurious Emission	§15.247(d)	§15.209(a)	Pass
5.6	Conducted Spurious Emission Band Edge Measurement	§15.247(d)	≥20dBc/100kHz §15.209(a)	Pass
5.7	Antenna Application	§15.247(b), §15.203	§15.247(b), §15.203	Pass

5. Test Data

5.1 AC Power Line Conducted Emission

5.1.1 Test Equipment

EQUIPMENT	MODEL	MANUFACTURE	SERIAL NUMBER	Calibration Due date (year/month/date)	Calibration Interval
Test Receiver	ESPI	ROHDE & SCHWARZ	100063	2017/01/08	1 year
#2 Conducted Cable_2.7m	N/A	N/A	N/A	2017/01/08	1 year
LISN	NSLK 8127	SCHWARZBECK	8127-414	2017/01/07	1 year
Impuls-Begrenzer Pulse Limiter	ESH3-Z2	ROHDE & SCHWARZ	100092	2017/01/06	1 year
CE CHAMBER	N/A	SY Corp.	N/A	N/A	1 year
DC POWER SUPPLY	IPS-30B03DD	INTERACT	00420502	2016/09/10	1 year

5.1.2 Test Limit

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.


Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

5.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network(LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

5.1.4 Block Diagram of Test Setup

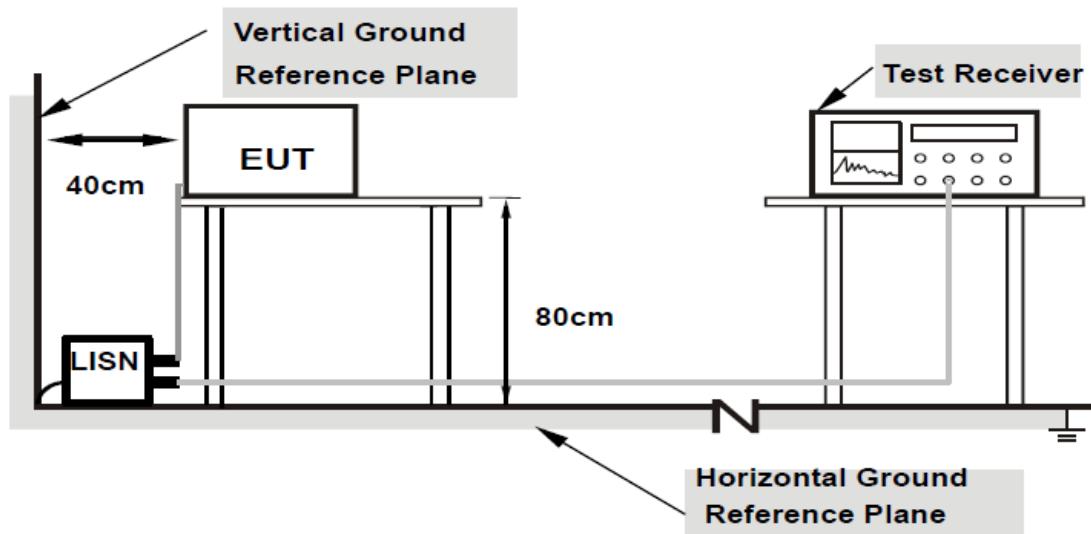


5.1.5 Test Result

Test Report

Common Information

Test Description: Conducted Emission
 Test Site: Shield Room
 Test Line: L1
 Model Name: EPUS-100B

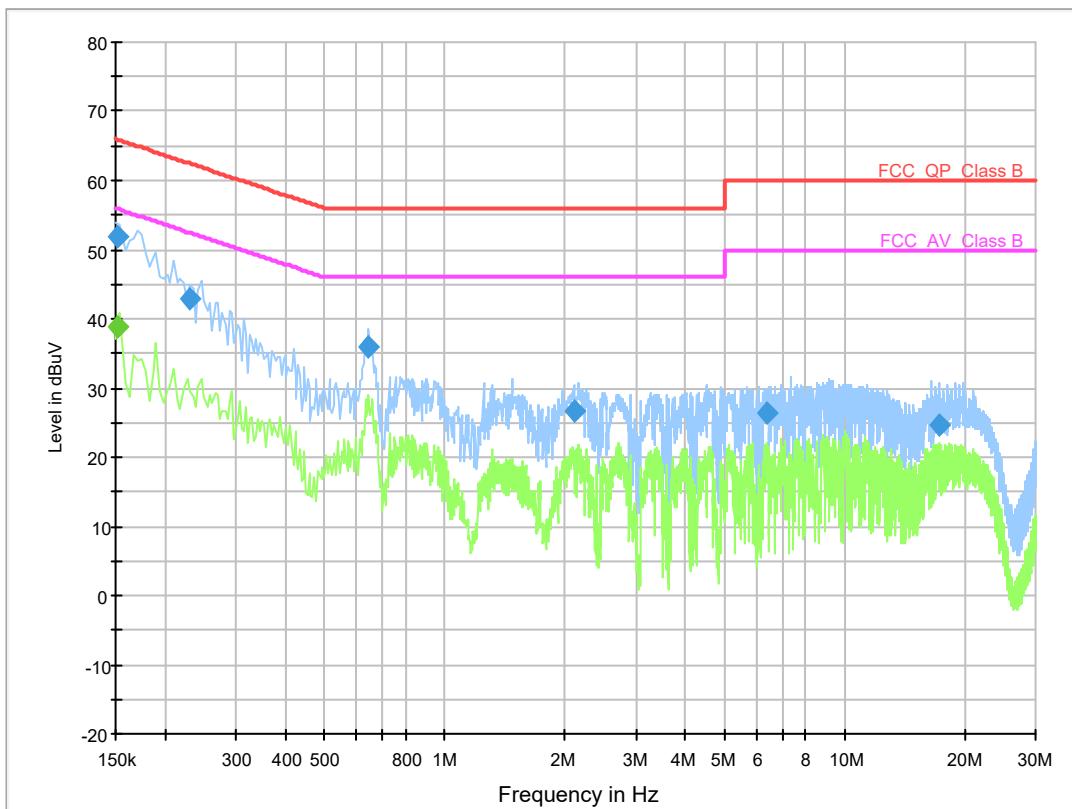

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152250	51.9	1000.0	9.000	GN	L1	0.1	14.0	65.9
0.230750	43.0	1000.0	9.000	GN	L1	0.1	19.4	62.4
0.639250	35.9	1000.0	9.000	GN	L1	0.1	20.1	56.0
2.104750	26.7	1000.0	9.000	GN	L1	0.2	29.3	56.0
6.400000	26.4	1000.0	9.000	GN	L1	0.3	33.6	60.0
17.288500	24.5	1000.0	9.000	GN	L1	0.6	35.5	60.0


Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152250	38.7	1000.0	9.000	GN	L1	0.1	17.2	55.9

Test Report

Common Information

Test Description: Conducted Emission
 Test Site: Shield Room
 Test Line: Neutral
 Model name: EPUS-100B

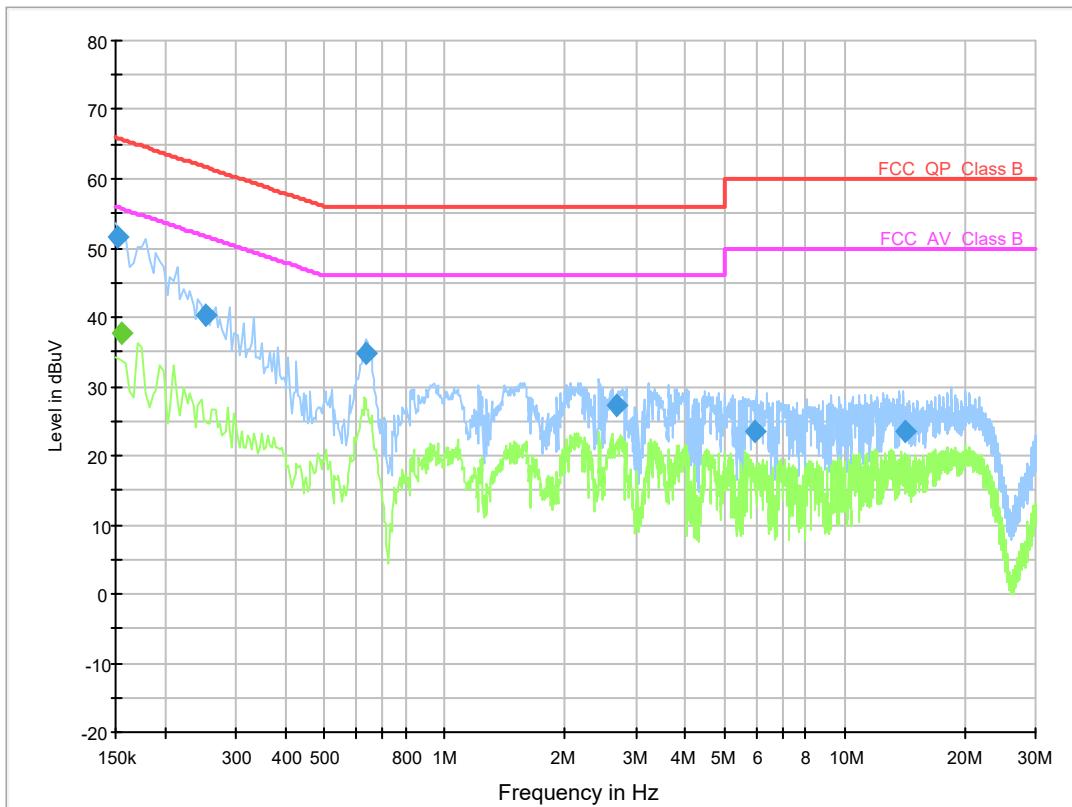

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152250	51.5	1000.0	9.000	GN	N	0.2	14.4	65.9
0.250750	40.3	1000.0	9.000	GN	N	0.1	21.4	61.7
0.635750	34.9	1000.0	9.000	GN	N	0.2	21.1	56.0
2.699500	27.3	1000.0	9.000	GN	N	0.2	28.7	56.0
5.950250	23.5	1000.0	9.000	GN	N	0.3	36.5	60.0
14.123000	23.6	1000.0	9.000	GN	N	0.6	36.4	60.0

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154500	37.7	1000.0	9.000	GN	N	0.2	18.0	55.8

5.2 Peak Output Power Measurement

5.2.1 Test Equipment

EQUIPMENT	MODEL	MANUFACTURE	SERIAL NUMBER	Calibration Due date (year/month/date)	Calibration Interval
Power Meter	RPR3006W	D.A.R.E!! Instruments	14I00048SNO09	2017/04/25	1Year

5.2.2 Test Limit


The maximum peak power shall be less than 1 Watt (30dBm).

Note: If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the direction gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

5.2.3 Measurement Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum output power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.

5.2.4 Test SET-UP (Block Diagram of Configuration)



5.2.5 Test Result**Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
1	2412	12.91	30.00	Pass
6	2437	12.64	30.00	Pass
11	2462	12.23	30.00	Pass

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
1	2412	10.48	30.00	Pass
6	2437	9.45	30.00	Pass
11	2462	9.42	30.00	Pass

Test mode: IEEE 802.11n(40M)

Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
3	2422	7.69	30.00	Pass
6	2437	7.48	30.00	Pass
11	2462	7.44	30.00	Pass

5.3 Power Spectral Density

5.3.1 Test Equipment

EQUIPMENT	MODEL	MANUFACTURE	SERIAL NUMBER	Calibration Due date (year/month/date)	Calibration Interval
Spectrum Analyzer	FSP13SE/K93	ROHED&SCHWARZ	100251	2016/09/12	1 Year
DC Power Supply	UDP-6015R	Unicorn tech	131007	2016/09/10	1 Year


5.3.2 Test Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiated to the Antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

5.3.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set (RBW = 3 kHz, VBW = 10 kHz, Detector = Peak, Span = 1.5 times DTS Channel Bandwidth, Trace mode = Max Hold, Sweep = Auto).
5. Measure and record the results in the test report.

5.3.4 Block Diagram of Test Setup



5.3.5 Test Result

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412	-9.89	8	Pass
6	2437	-9.99	8	Pass
11	2462	-10.71	8	Pass

Test mode: IEEE 802.11g


Channel	Frequency (MHz)	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412	-15.62	8	Pass
6	2437	-15.92	8	Pass
11	2462	-16.39	8	Pass

Test mode: IEEE 802.11n(40M)


Channel	Frequency (MHz)	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422	-20.49	8	Pass
6	2437	-19.77	8	Pass
11	2462	-19.33	8	Pass

5.3.5 Test Plot


Test mode: IEEE 802.11b

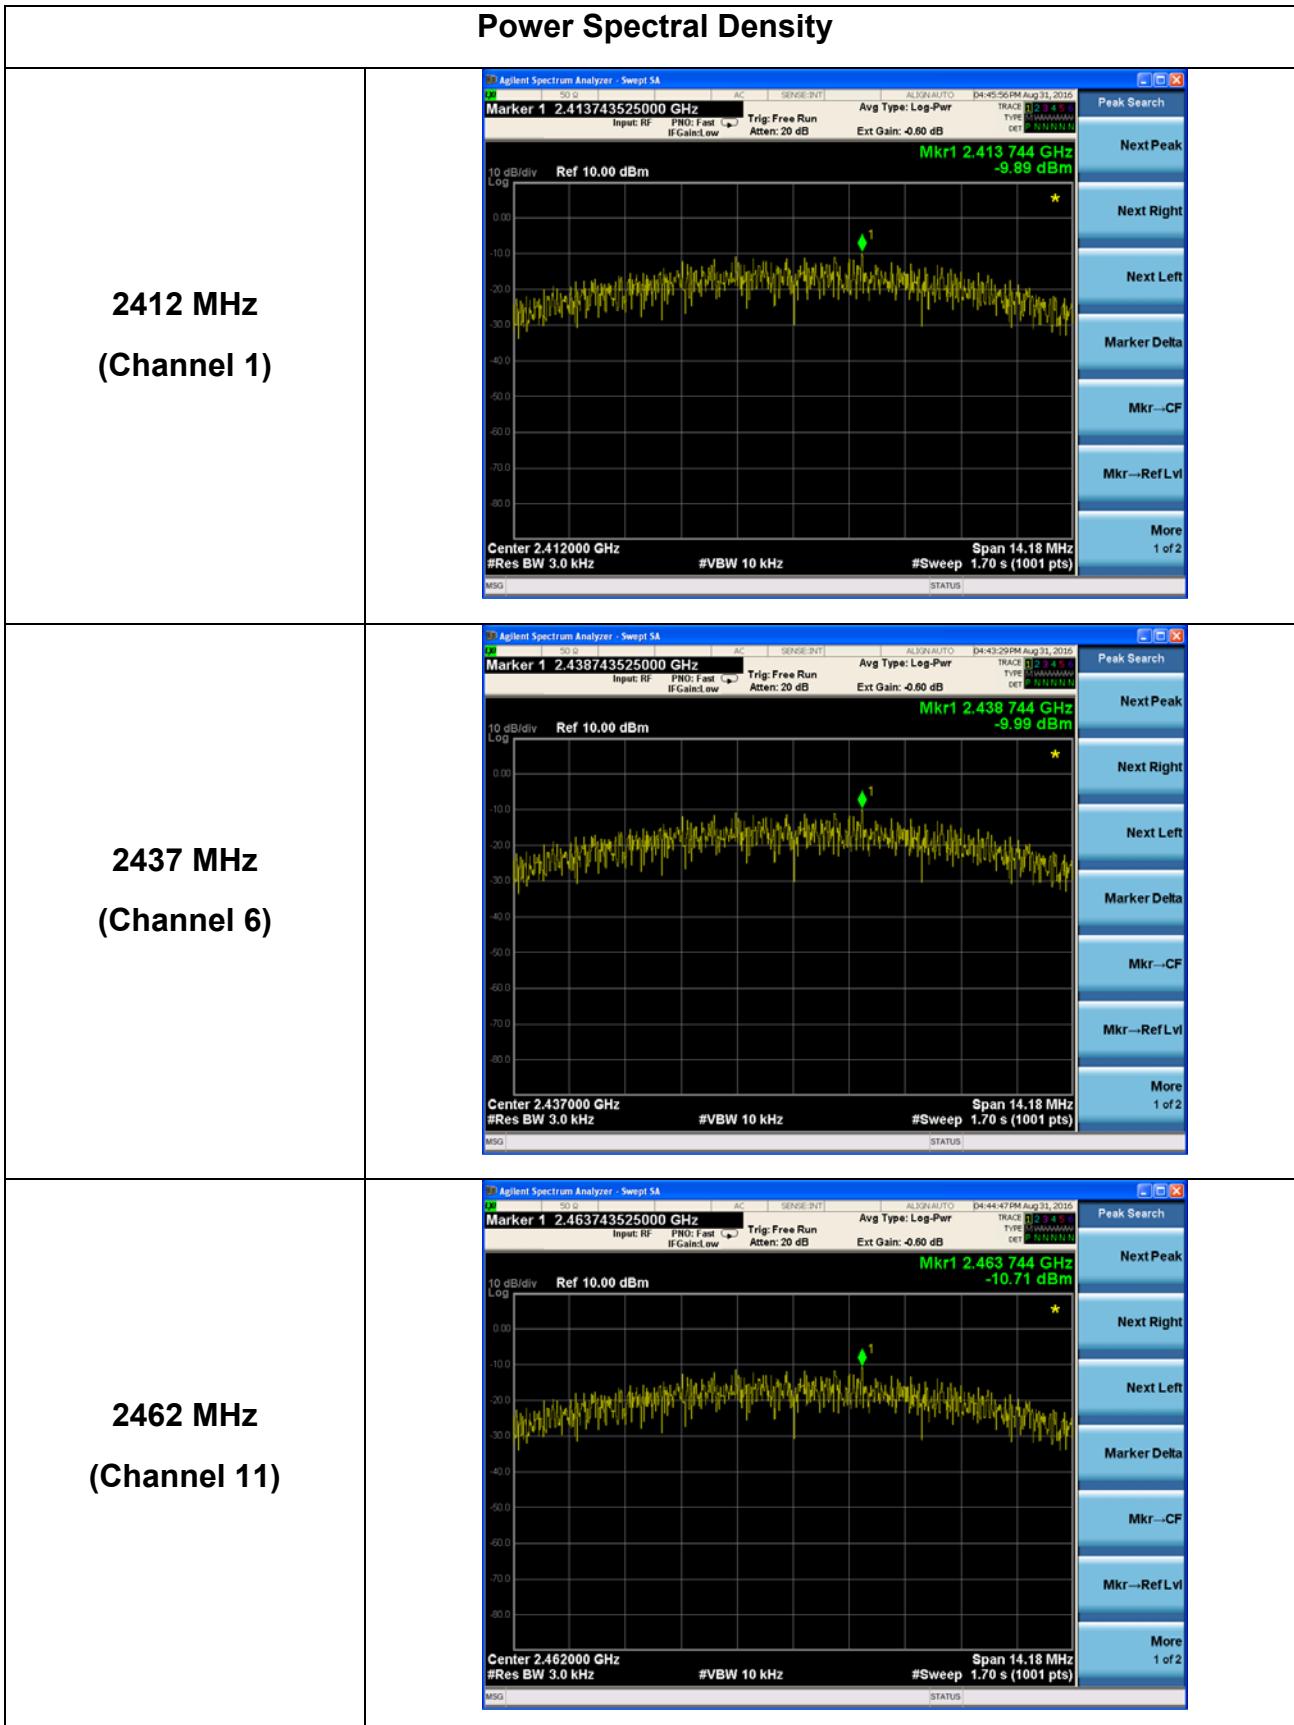

Test mode: IEEE 802.11g

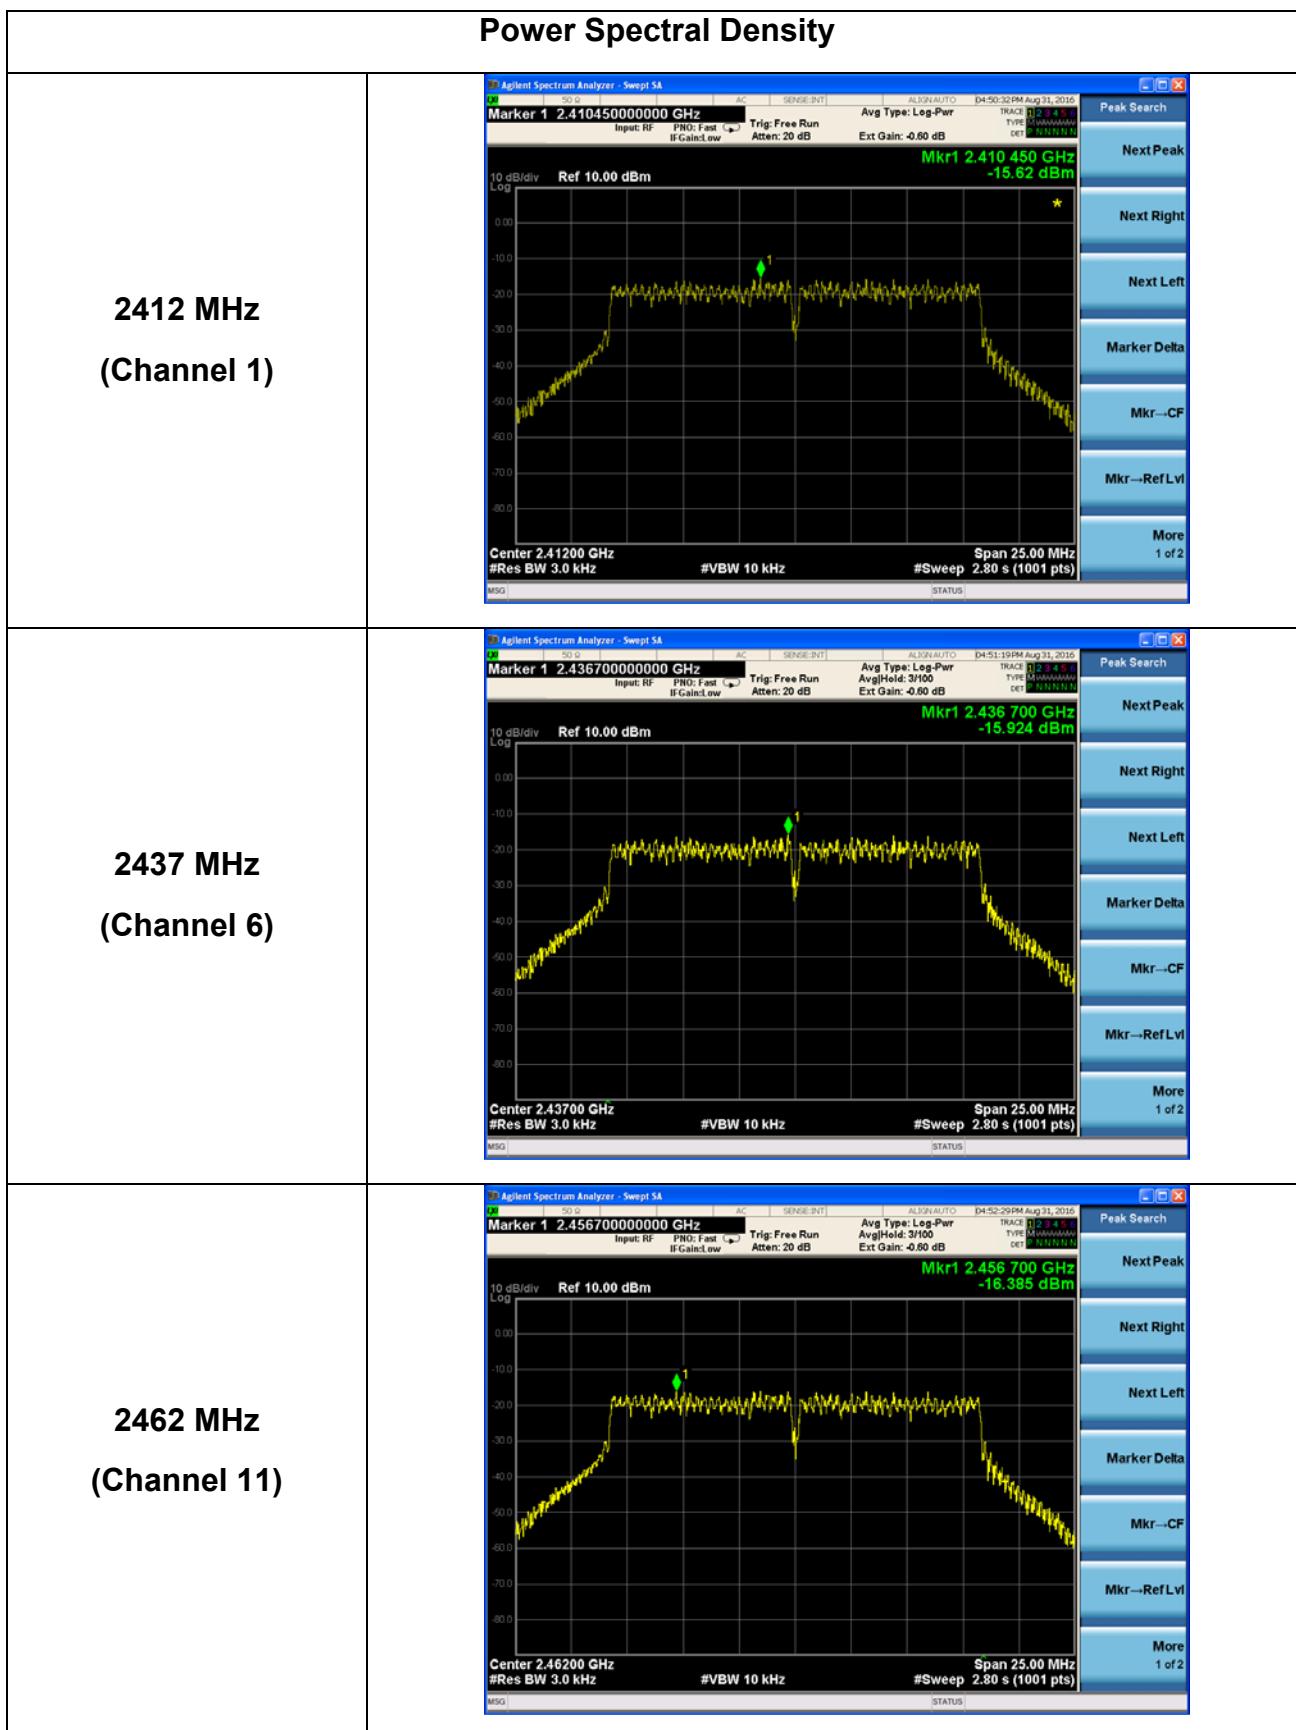

Test mode: IEEE 802.11n(40M)

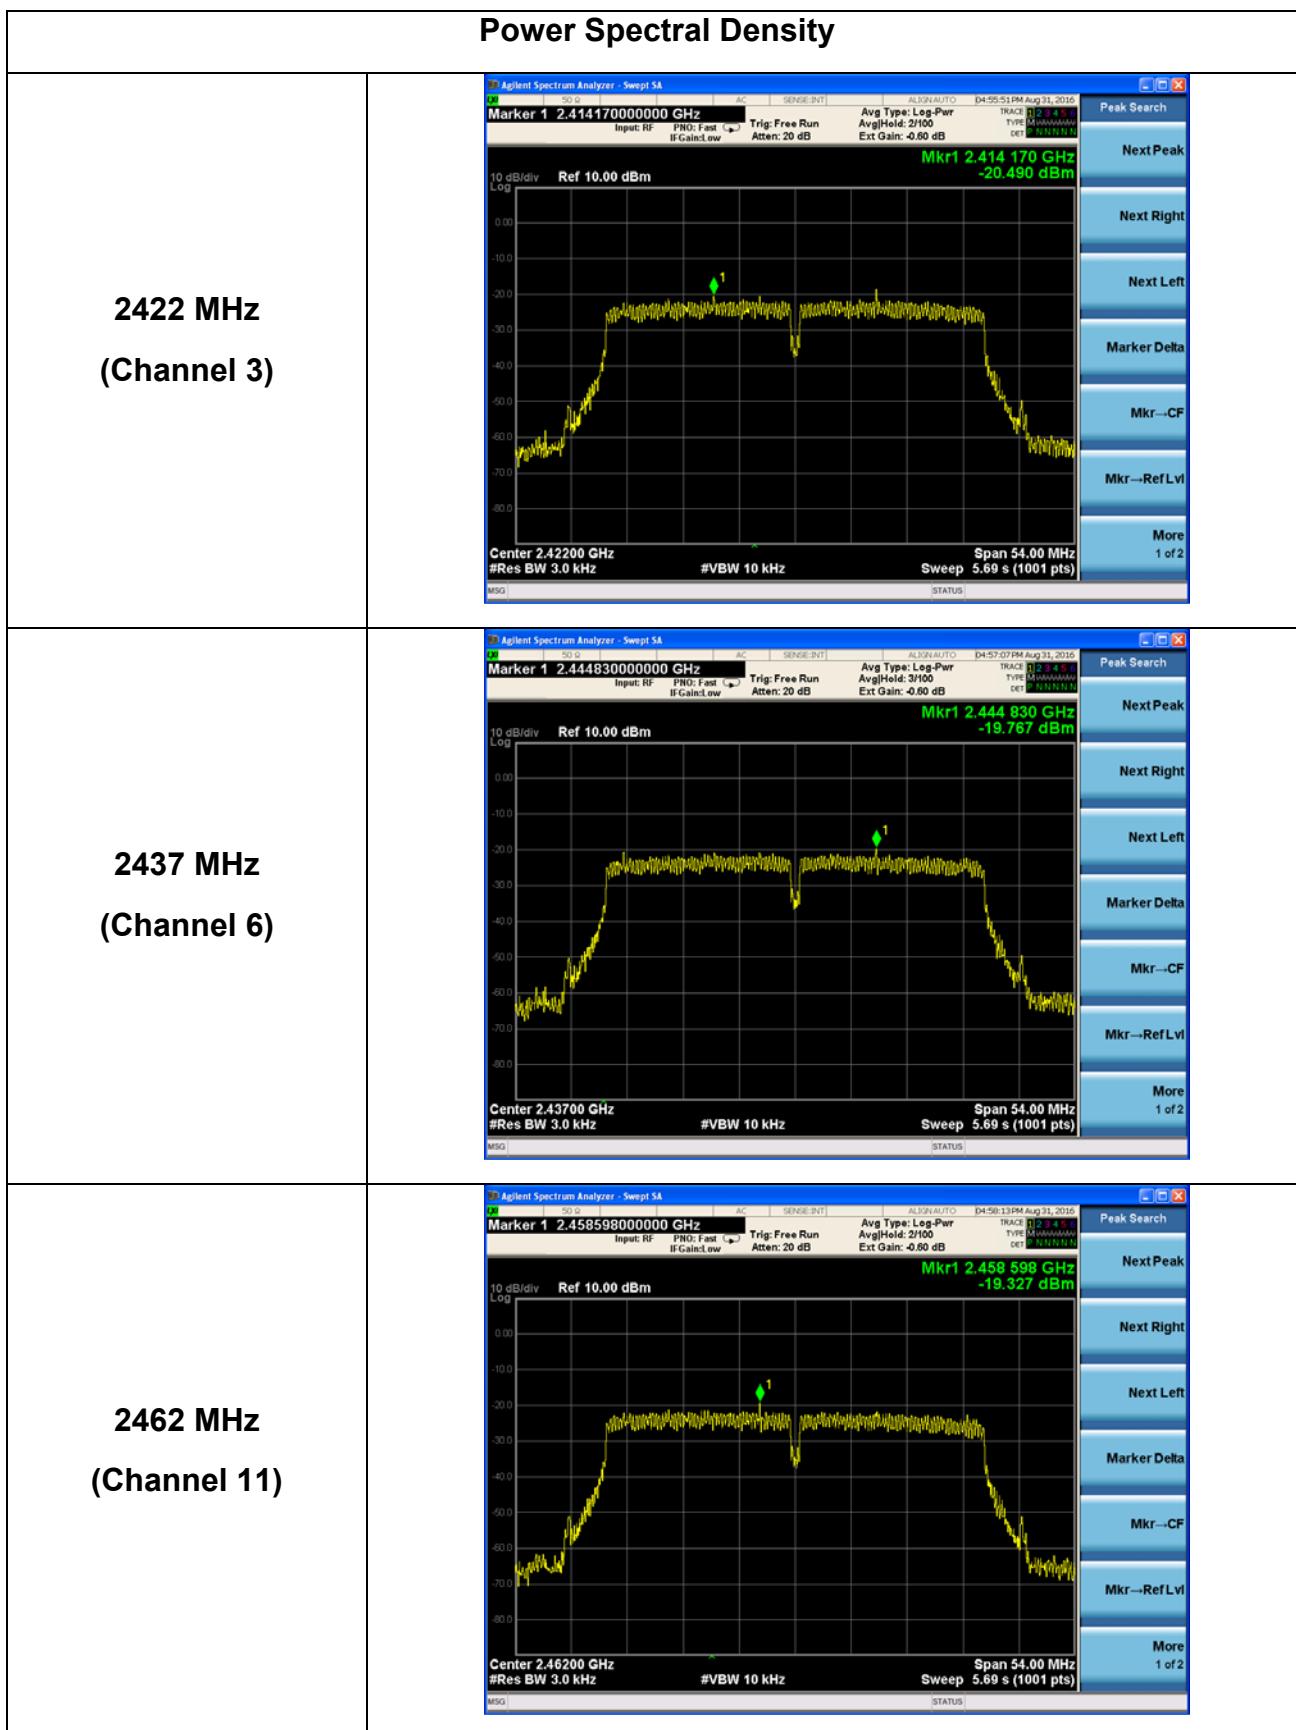

5.4 6dB Spectrum Bandwidth

5.4.1 Test Equipment

EQUIPMENT	MODEL	MANUFACTURE	SERIAL NUMBER	Calibration Due date (year/month/date)	Calibration Interval
Spectrum Analyzer	FSP13SE/K93	ROHED&SCHWARZ	100251	2016/09/12	1 Year
DC Power Supply	UDP-6015R	Unicorn tech	131007	2016/09/10	1 Year

5.4.2 Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

5.4.3 Measurement Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set (RBW = 100 kHz, VBW = 300 kHz, Detector = Peak, Trace mode = Max Hold, Sweep = Auto).
5. Measure and record the results in the test report.

5.4.4 Test SET-UP (Block Diagram of Configuration)



5.4.5 Test Result

5.4.5 Test Result

Test mode: IEEE 802.11b


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Result
1	2412	8.69	14.92	500	Pass
6	2437	8.69	14.91	500	Pass
11	2462	8.69	14.87	500	Pass

Test mode: IEEE 802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Result
1	2412	16.54	16.45	500	Pass
6	2437	16.53	16.46	500	Pass
11	2462	16.53	16.46	500	Pass

Test mode: IEEE 802.11n(40M)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Result
3	2422	36.43	36.08	500	Pass
6	2437	36.42	36.01	500	Pass
11	2462	36.41	35.99	500	Pass

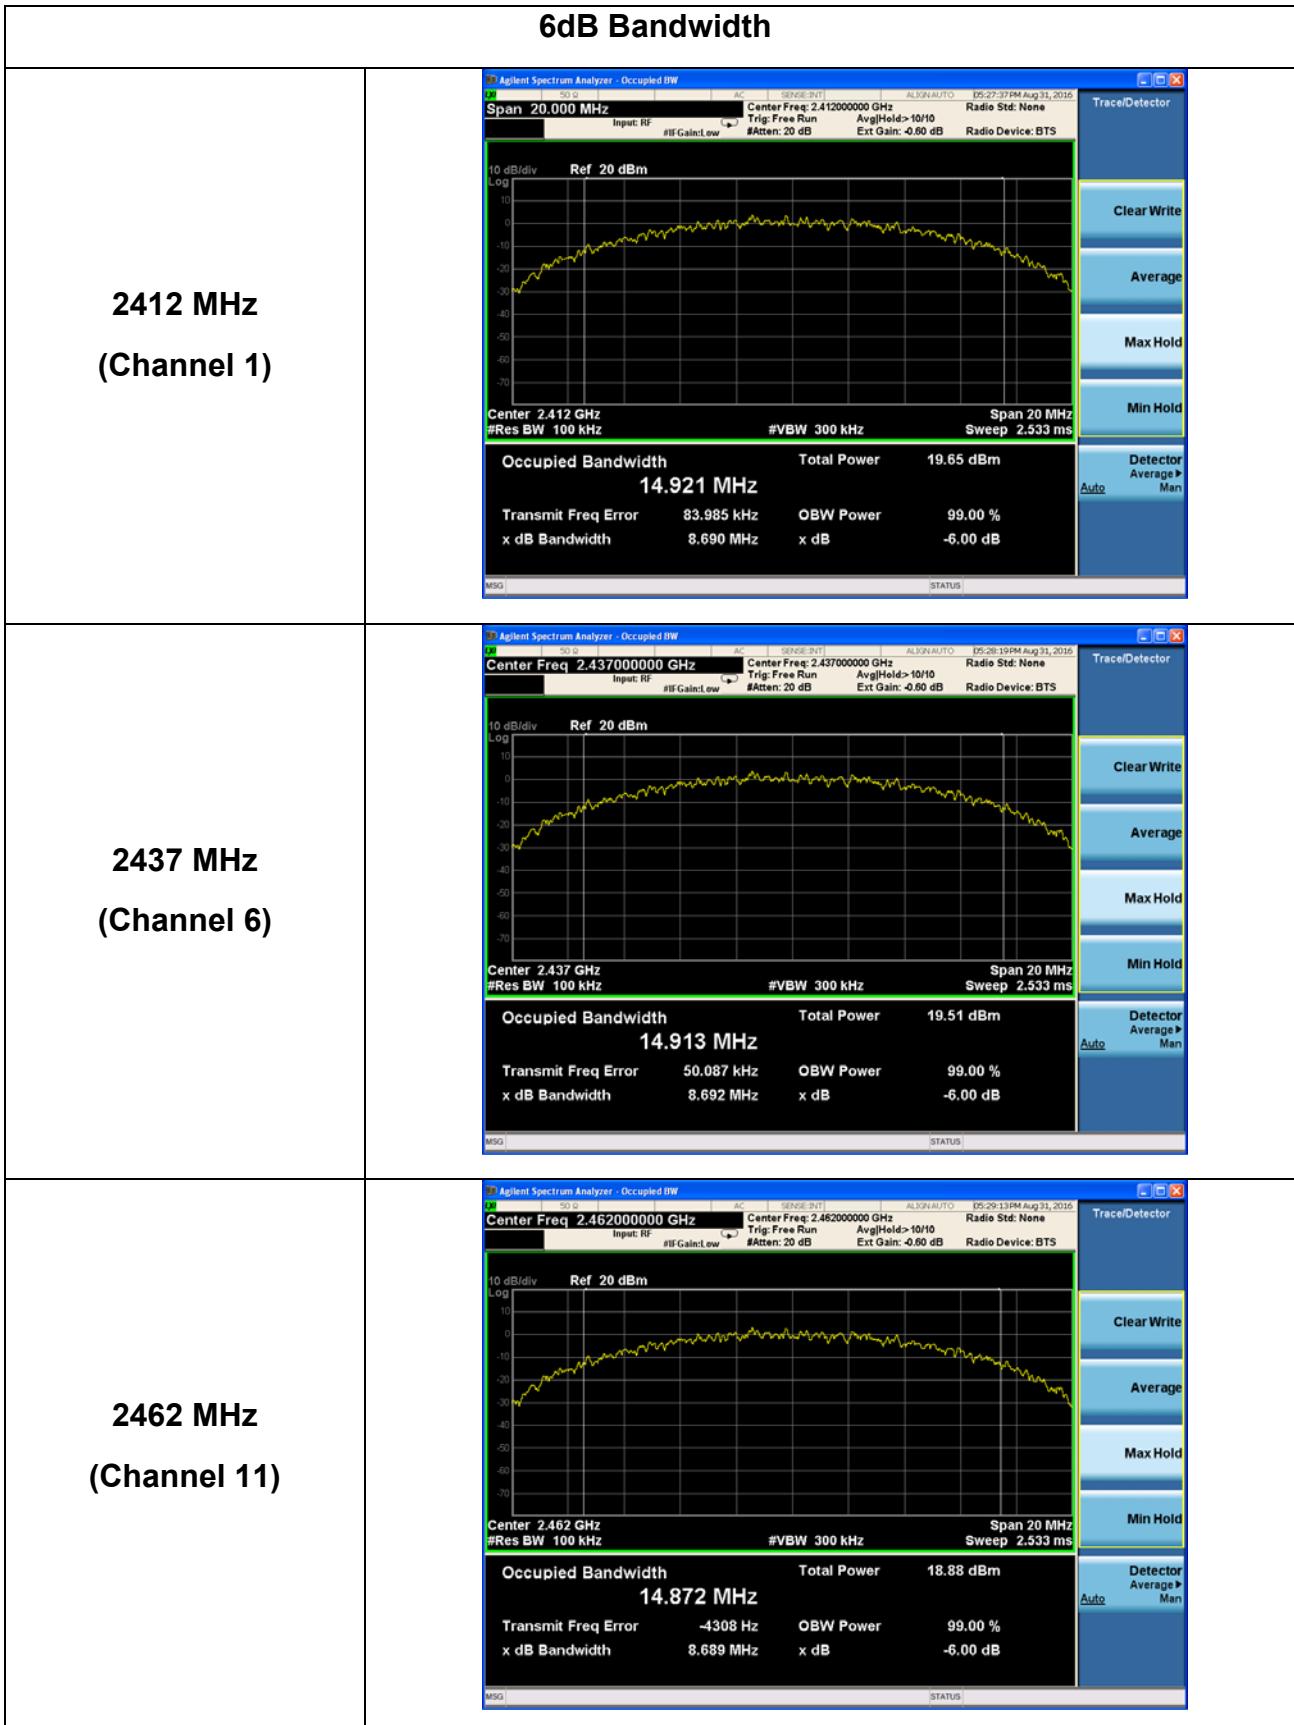5.4.5 Test Plot**Test mode: IEEE 802.11b**

Test mode: IEEE 802.11g

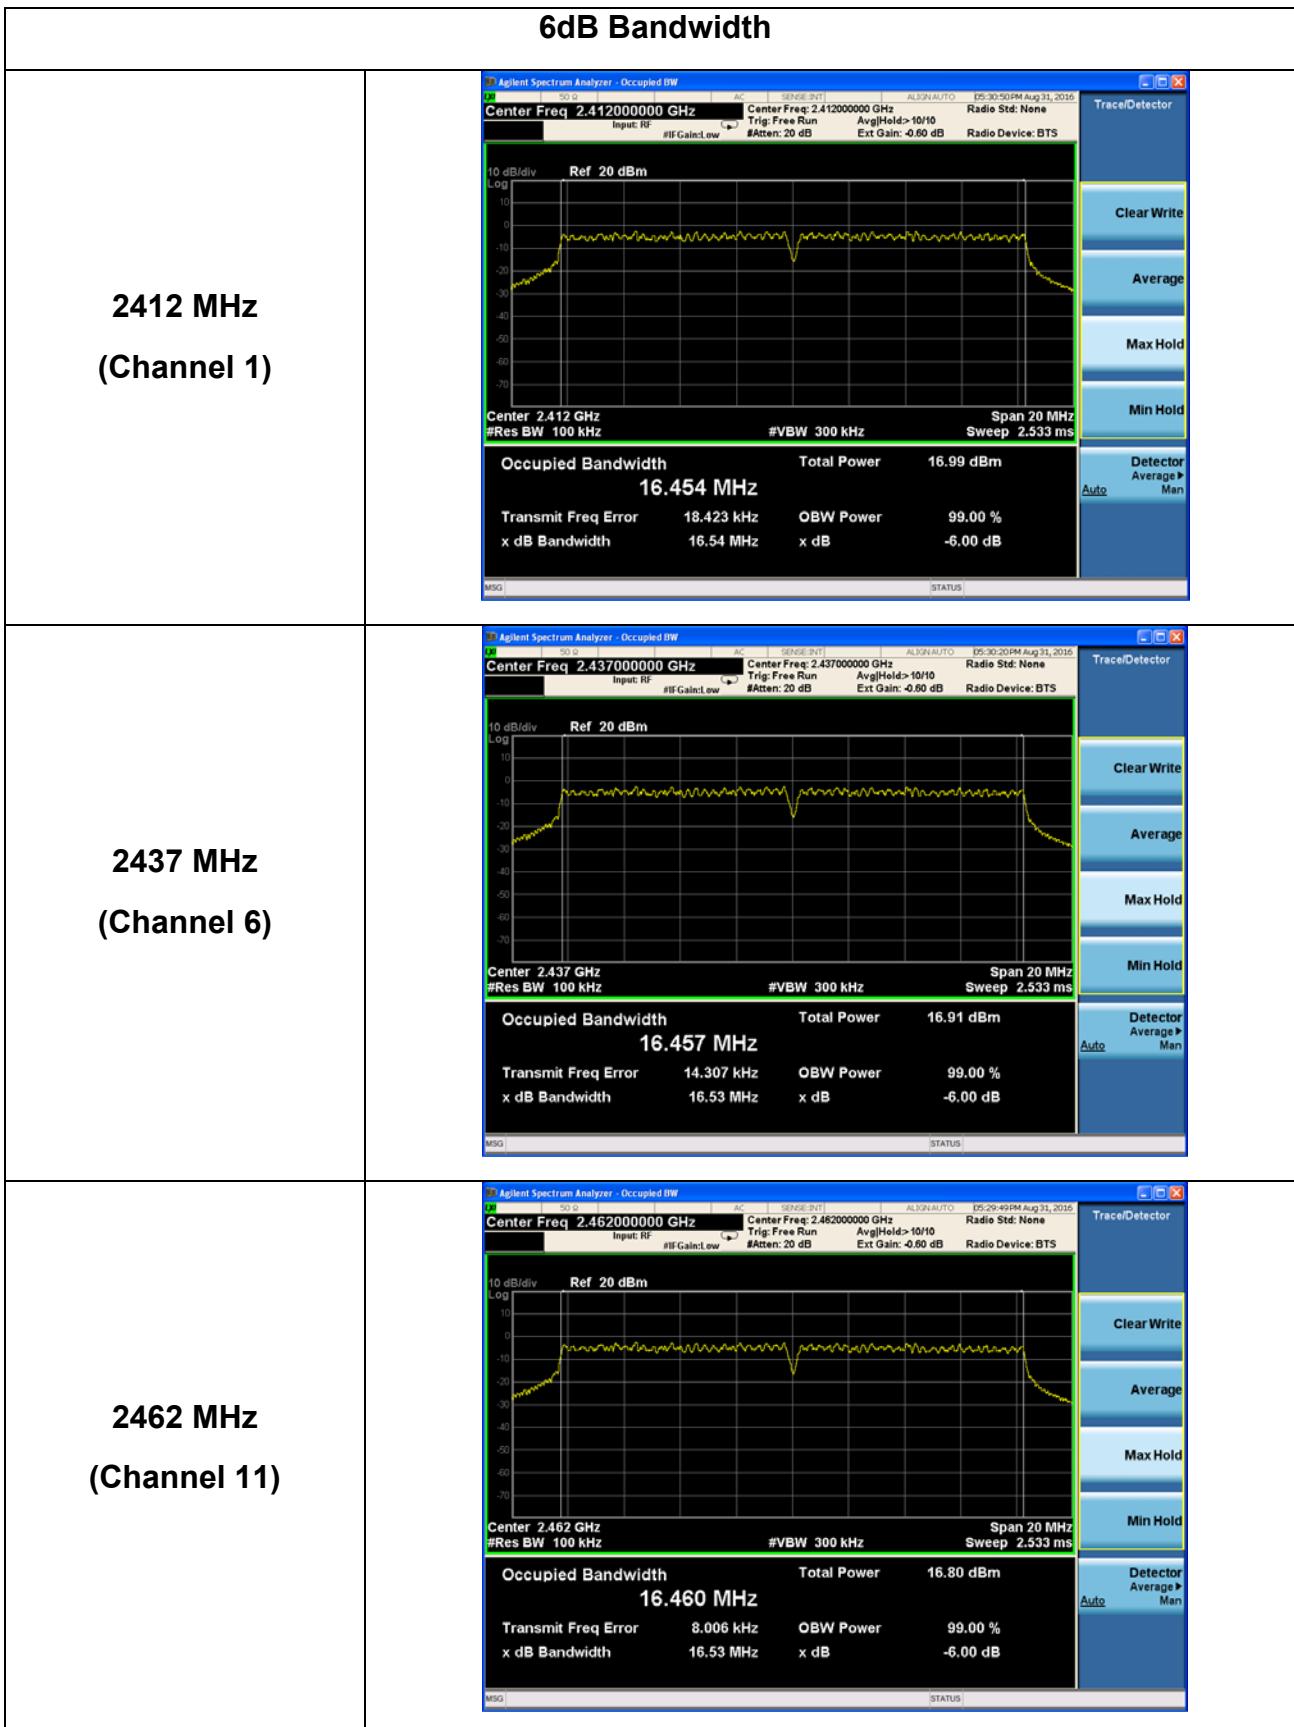

Test mode: IEEE 802.11n(40M)

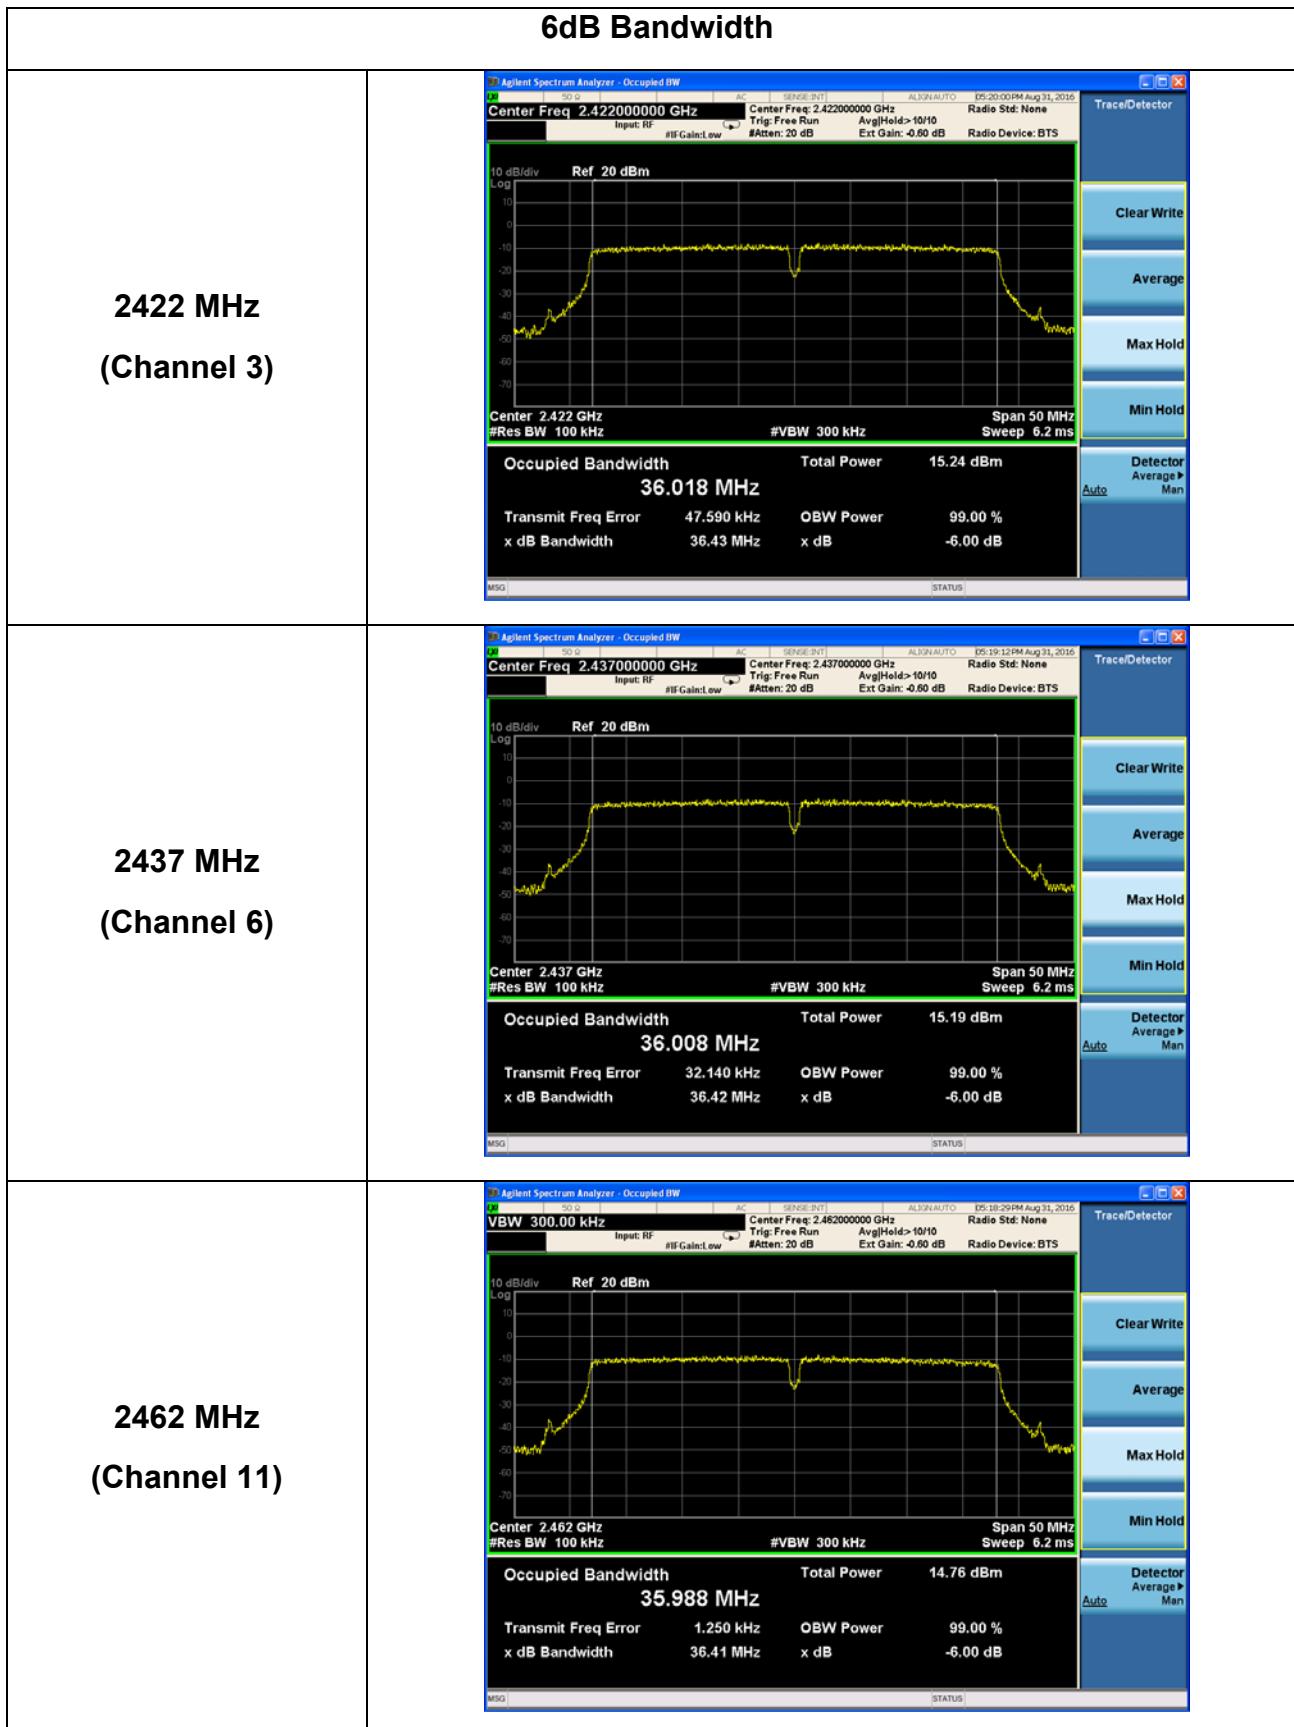

5.5 Radiated Spurious Emission

5.5.1 Test Equipment

EQUIPMENT	MODEL	MANUFACTURE	SERIAL NUMBER	Calibration Due date (year/month/date)	Calibration Interval
EMI Receiver	ESR	Rohde & Schwarz	101320	2017/03/25	1 Year
Bilog Antenna	VULB9160	Schwarzbeck	9160-3052	2017/10/06	2 Year
Antenna Mast(4m)	AM-4.0	MATURO	AM4.0/225/17240915	-	-
Antenna Mast(2m)	AM-2.5	MATURO	AM2.5/226/17240915	-	-
Positioner Controller	CO2000	MATURO	NCU/459/17240915		-
Loop Antenna	HEH2-Z2	Rohde & Schwarz	881056/6	2017/01/06	2 Year
Horn Antenna	BBHA 9120 D	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D 234	2017/09/03	2 Year
Horn Antenna	BBHA 9170	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170157	2017/11/14	2 Year
Amplifier	LPA-10-20	RF Bay	11160801	2017/03/25	1 Year
RF Amplifier	PAM-118A	COM-POWER	551019	2016/07/20	1 Year
RE_10 m CHAMBER #1	N/A	SY Corp.	N/A	N/A	-

5.5.2 Test Limit

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Note: Wireless charger configuration was evaluated.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

5.5.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable. For emissions testing at or below 1 GHz, the table height was 80cm above the reference ground plane. For emission measurements above 1 GHz, the table height was 1.5m.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings and peak emission levels are measured :
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW (9-150kHz: 200Hz, 0.15-30MHz: 9kHz, 30-1000MHz: 120kHz, above 1GHz: 1MHz).
 - (3) VBW \geq 3 x RBW ; Sweep = auto; Detector function = peak; Trace = max hold


For average measurement:

- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


8. Measure and record the results in the test report.

5.5.4 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

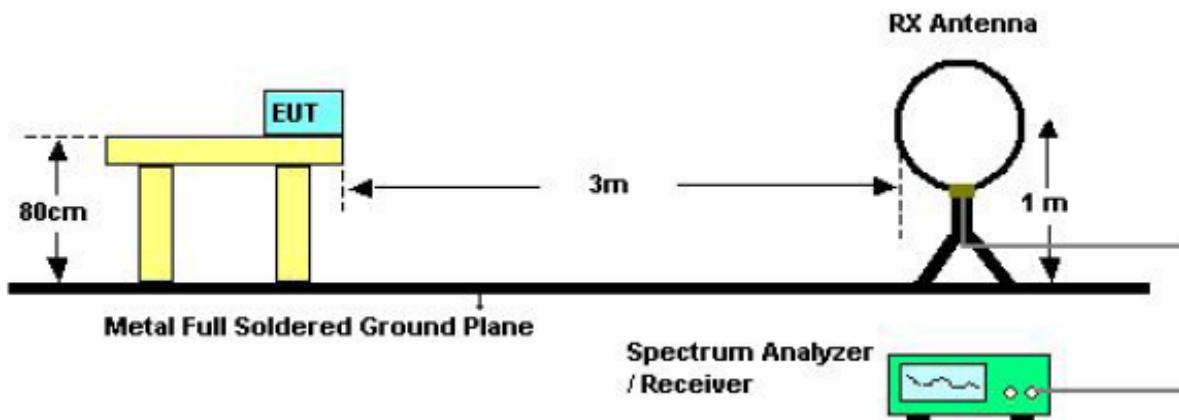

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

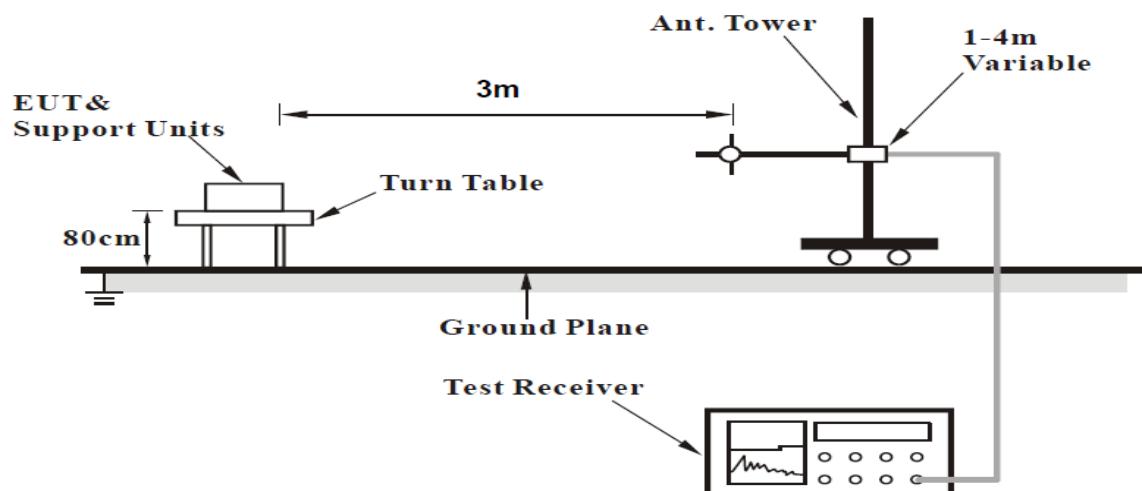

(B) Radiated Emission Test Set-Up, Frequency above 1000MHz

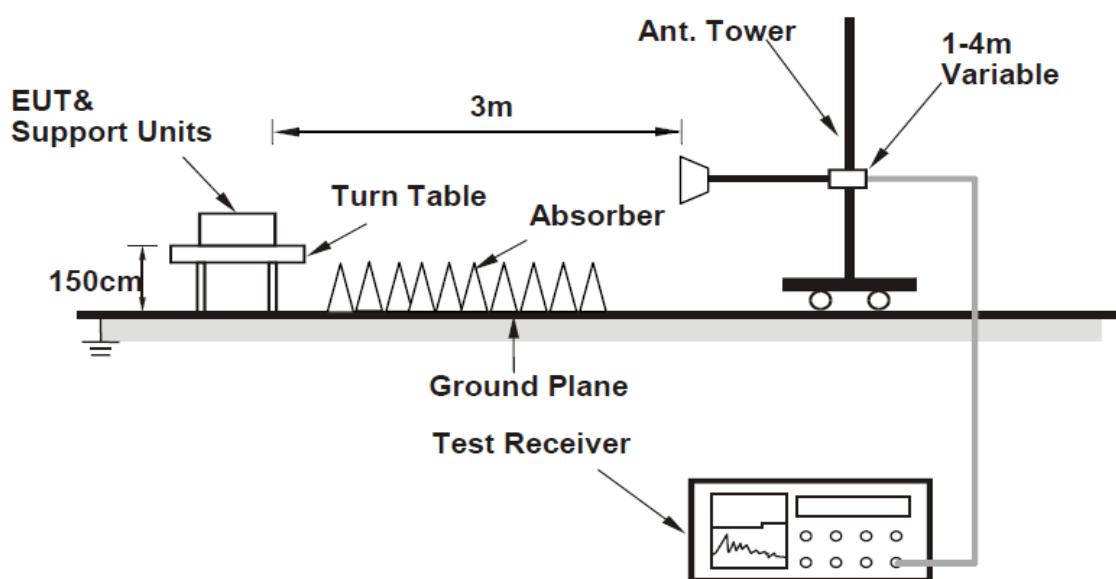

5.5.5 Test Result

5.5.5.1 Frequency Below 30MHz

Frequency [MHz]	Reading [dB μ V]	Polarization [H/V]	Correction Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	State
-	-	-	-	-	-	-	PASS

Remark: §15.31(o) _The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.5.5.2 Frequency Below 1000MHz

Test mode: IEEE 802.11b

Frequency [MHz]	Reading [dB μ V]	Polarization [H/V]	Correction Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector
31.254	50.4	V	-14.5	35.9	40	4.1	QP
49.047	45.5	V	-18.7	26.8	40	13.2	QP
57.066	47.8	V	-19.3	28.5	40	11.5	QP
63.985	53.9	H	-19.5	34.4	40	5.6	QP
69.297	53.9	H	-19.5	34.4	40	5.6	QP

Test mode: IEEE 802.11g

Frequency [MHz]	Reading [dB μ V]	Polarization [H/V]	Correction Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector
31.714	50.7	V	-13.7	37.0	40	3.0	QP
49.004	45.5	V	-17.5	28.0	40	12.0	QP
57.369	46.9	V	-18.0	28.9	40	11.1	QP
63.924	52.1	V	-18.1	34.0	40	6.0	QP
68.937	54.9	H	-18.1	36.8	40	3.2	QP

Test mode: IEEE 802.11n

Frequency [MHz]	Reading [dB μ V]	Polarization [H/V]	Correction Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector
31.424	47.9	V	-13.6	34.3	40	5.7	QP
47.754	45.1	V	-17.4	27.7	40	12.3	QP
57.570	46.9	V	-18.0	28.9	40	11.1	QP
63.337	51.9	H	-18.1	33.8	40	6.2	QP

Remark: Correction Factor[dB] = Antenna Factor[dB] + Cable Factor[dB] – Pre-amplifier Factor[dB],

Result [dB μ V/m] = Reading [dB μ V] + Correction Factor [dB],

Margin[dB] = Limit [dB μ V/m] - Result [dB μ V/m]

5.5.5.3 Frequency above 1 GHz

Test mode: IEEE 802.11b

Frequency [MHz]	Reading [dB μ V]	Polarization [H/V]	Correction Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector
2601.400	55.8	V	-6.4	49.4	74.0	24.6	Peak
2601.400	36.6	V	-6.4	30.2	54.0	23.8	AVG
2999.200	50.3	V	-4.6	45.7	74.0	28.3	Peak
2999.200	45.2	V	-4.6	40.6	54.0	13.4	AVG

Test mode: IEEE 802.11g

Frequency [MHz]	Reading [dB μ V]	Polarization [H/V]	Correction Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector
2623.500	50.2	H	-6.3	43.9	74.0	30.1	Peak
2623.500	32.9	H	-6.3	26.6	54.0	27.4	AVG
2999.200	53.2	H	-4.6	48.6	74.0	25.4	Peak
2999.200	50.0	H	-4.6	45.4	54.0	8.6	AVG

Test mode: IEEE 802.11n

Frequency [MHz]	Reading [dB μ V]	Polarization [H/V]	Correction Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector
2598.000	54.4	V	-6.4	48.0	74.0	26.0	Peak
2598.000	36.8	V	-6.4	30.4	54.0	23.6	AVG
2999.200	50.4	V	-4.6	45.8	74.0	28.2	Peak
2999.200	42.9	V	-4.6	38.3	54.0	15.7	AVG

Remark: Correction Factor[dB] = Antenna Factor[dB] + Cable Factor[dB] – Pre-amplifier Factor[dB],

Result [dB μ V/m] = Reading [dB μ V] + Correction Factor [dB],Margin[dB] = Limit [dB μ V/m] - Result [dB μ V/m]

5.6 Conducted Spurious Emission and Band Edge Measurement

5.6.1 Test Equipment

[Conducted Spurious Emission and Band Edges Test]

EQUIPMENT	MODEL	MANUFACTURE	SERIAL NUMBER	Calibration Due date (year/month/date)	Calibration Interval	
Spectrum analyzer	N9020A	Agilent	US46220101	2016/09/14		1 Year

[Radiated Band Edges Test]

EQUIPMENT	MODEL	MANUFACTURE	SERIAL NUMBER	Calibration Due date (year/month/date)	Calibration Interval
EMI Receiver	ESR	Rohde & Schwarz	101320	2017/03/25	1 Year
Bilog Antenna	VULB9160	Schwarzbeck	9160-3052	2017/10/06	2 Year
Antenna Mast(4m)	AM-4.0	MATURO	AM4.0/225/17240915	-	-
Antenna Mast(2m)	AM-2.5	MATURO	AM2.5/226/17240915	-	-
Positioner Controller	CO2000	MATURO	NCU/459/17240915		-
Loop Antenna	HEH2-Z2	Rohde & Schwarz	881056/6	2017/01/06	2 Year
Horn Antenna	BBHA 9120 D	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D 234	2017/09/03	2 Year
Horn Antenna	BBHA 9120 D	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D 234	2017/09/03	2 Year
Amplifier	LPA-10-20	RF Bay	11160801	2017/03/25	1 Year
RF Amplifier	PAM-118A	COM-POWER	551019	2016/07/20	1 Year
RE_10 m CHAMBER #1	N/A	SY Corp.	N/A	N/A	-

5.6.2 Test Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

5.6.3 Test Procedure

The EUT is placed on a turntable, which is 0.8m above the ground plane.

The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:


PEAK: RBW=VBW=1MHz / Sweep=AUTO

AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

5.6.4 Test SET-UP (Block Diagram of Configuration)

(a) Conducted Emission Test Set-Up, Frequency above 1000MHz




(b) Radiated Emission Test Set-Up, Frequency above 1000MHz

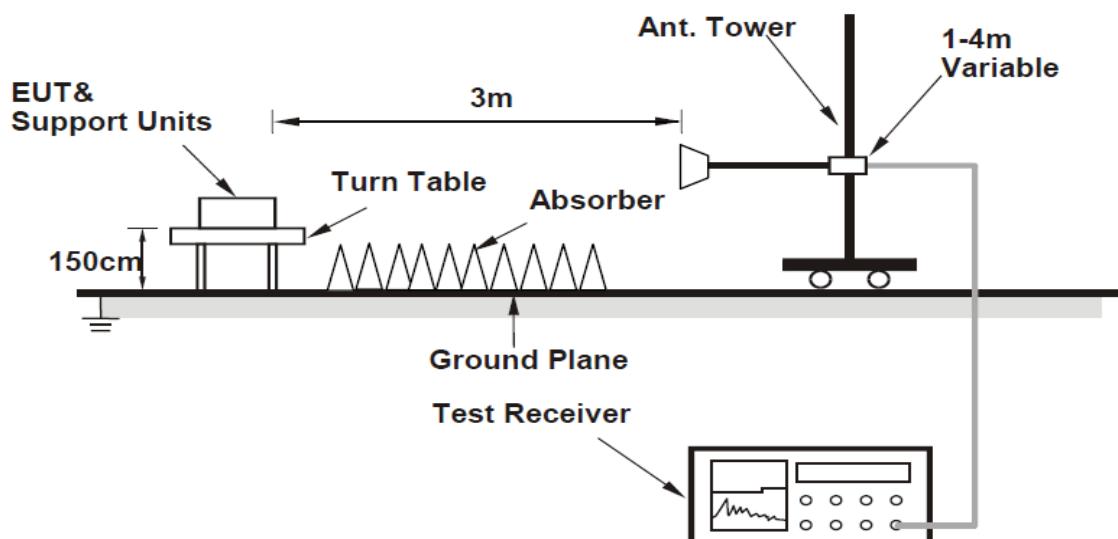


5.6.5 Test Result

[Conducted Spurious Emission Test]


Test mode: IEEE 802.11b Channel 1(2412MHz)

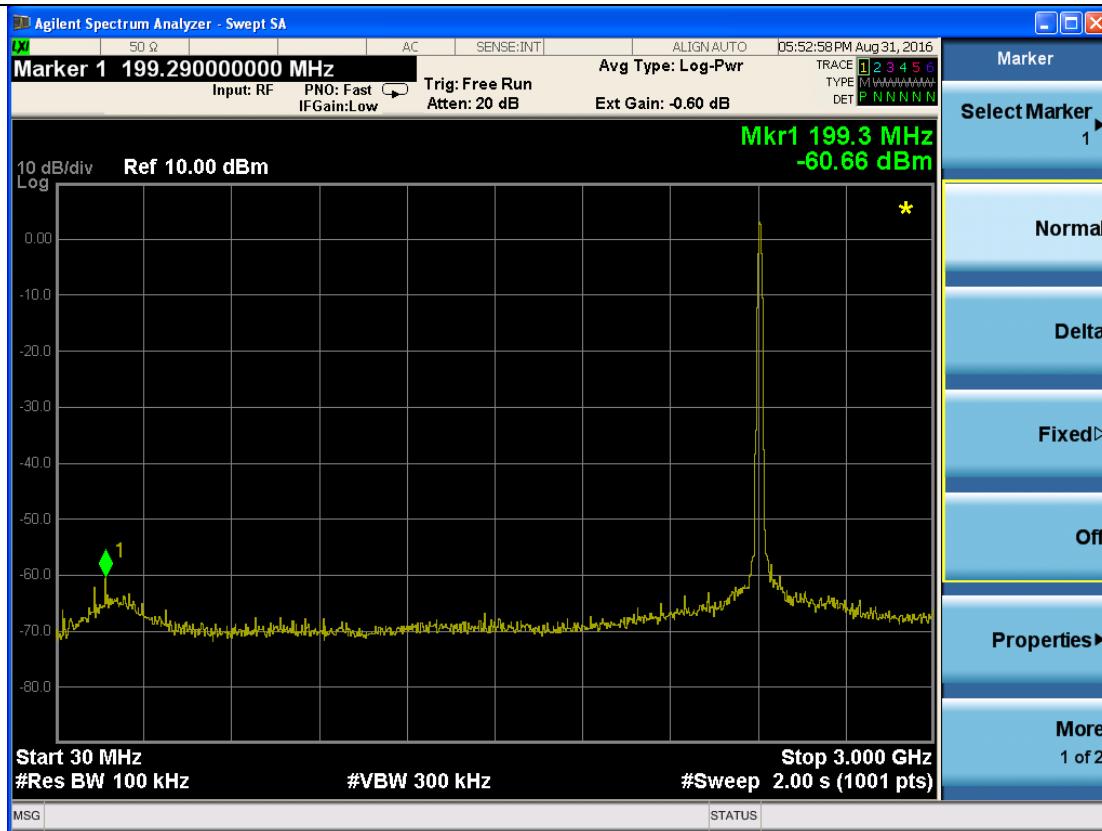


Test mode: IEEE 802.11b Channel 11(2462MHz)

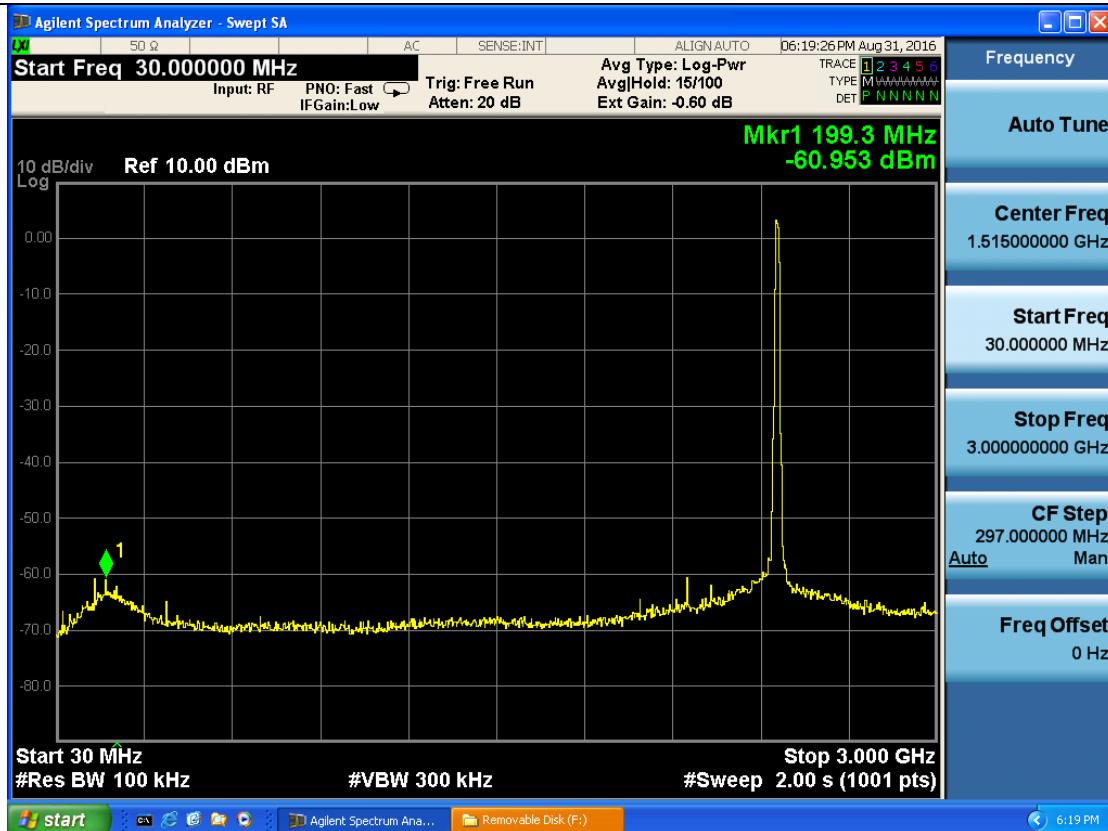


Test mode: IEEE 802.11g Channel 1(2412MHz)

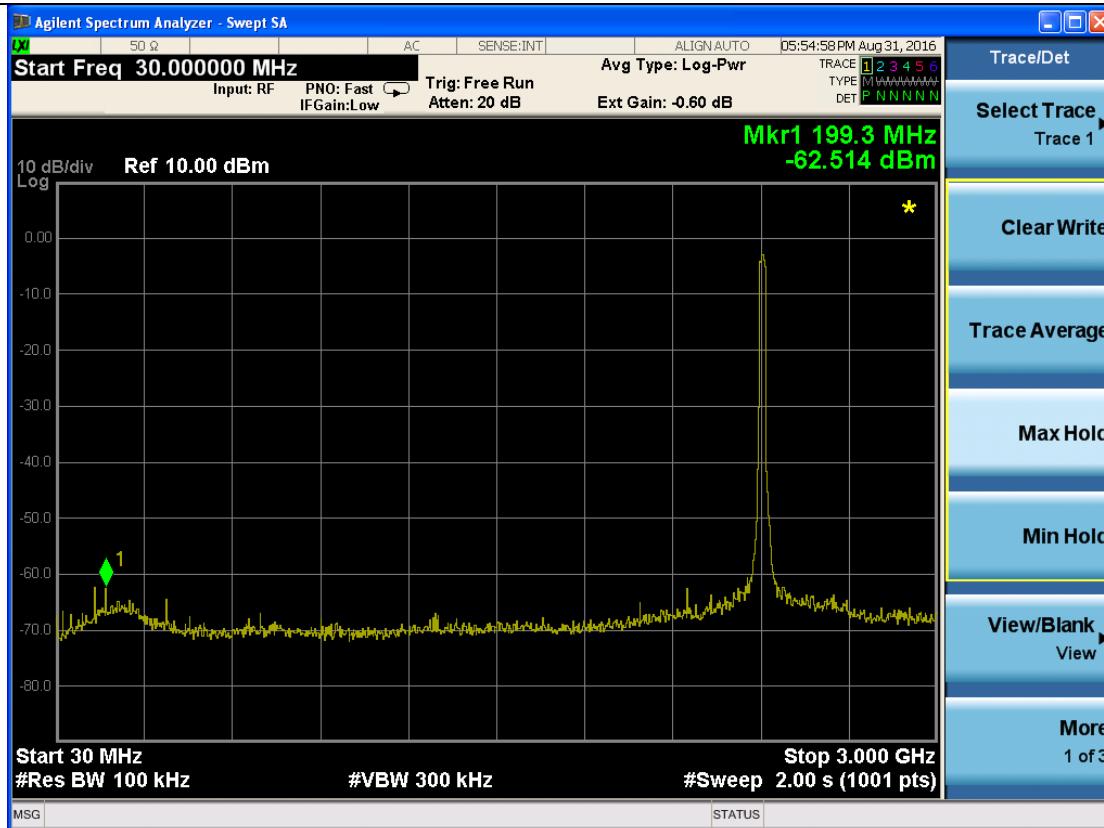


Test mode: IEEE 802.11g Channel 11(2462MHz)

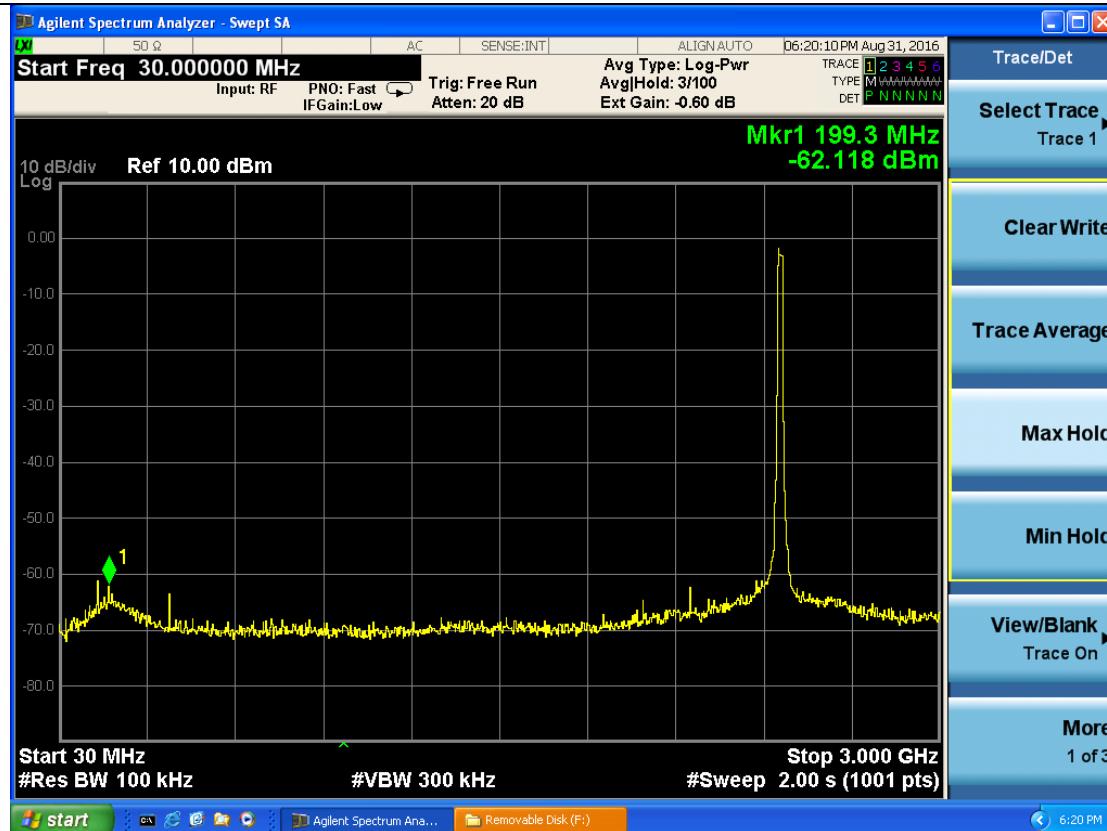

Test mode: IEEE 802.11n Channel 3(2422MHz)

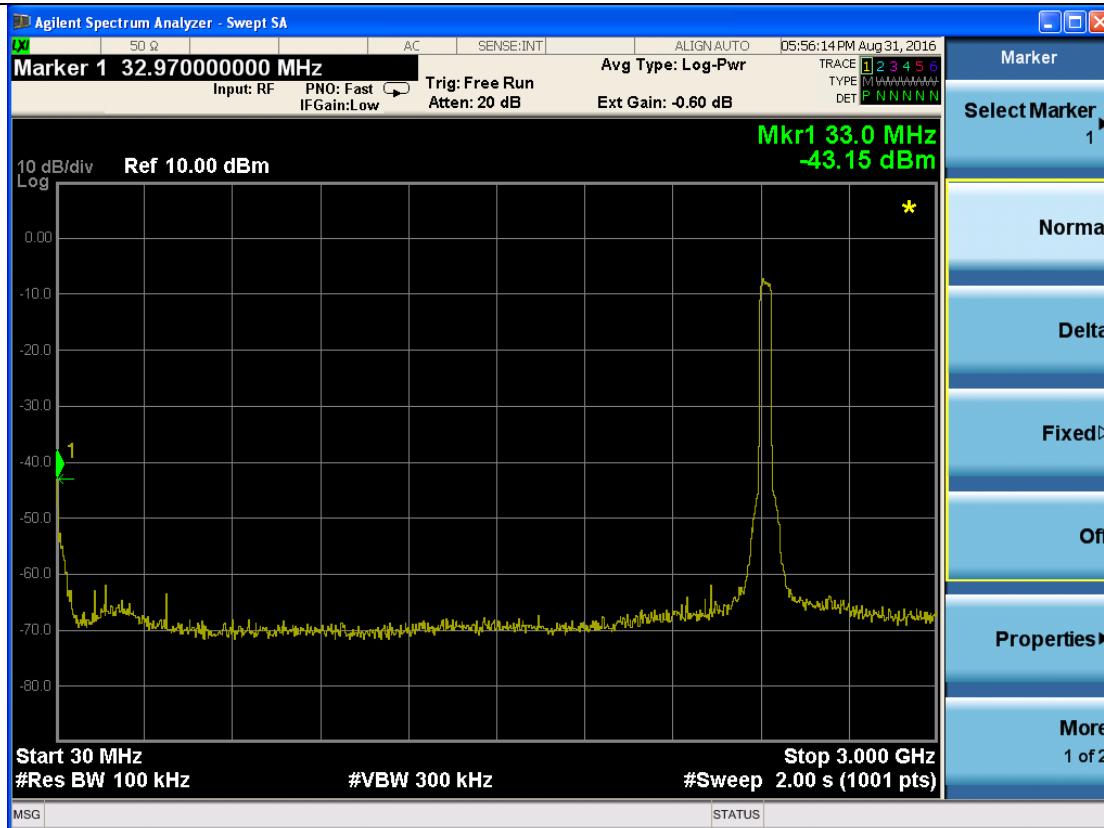


Test mode: IEEE 802.11n Channel 11(2462MHz)

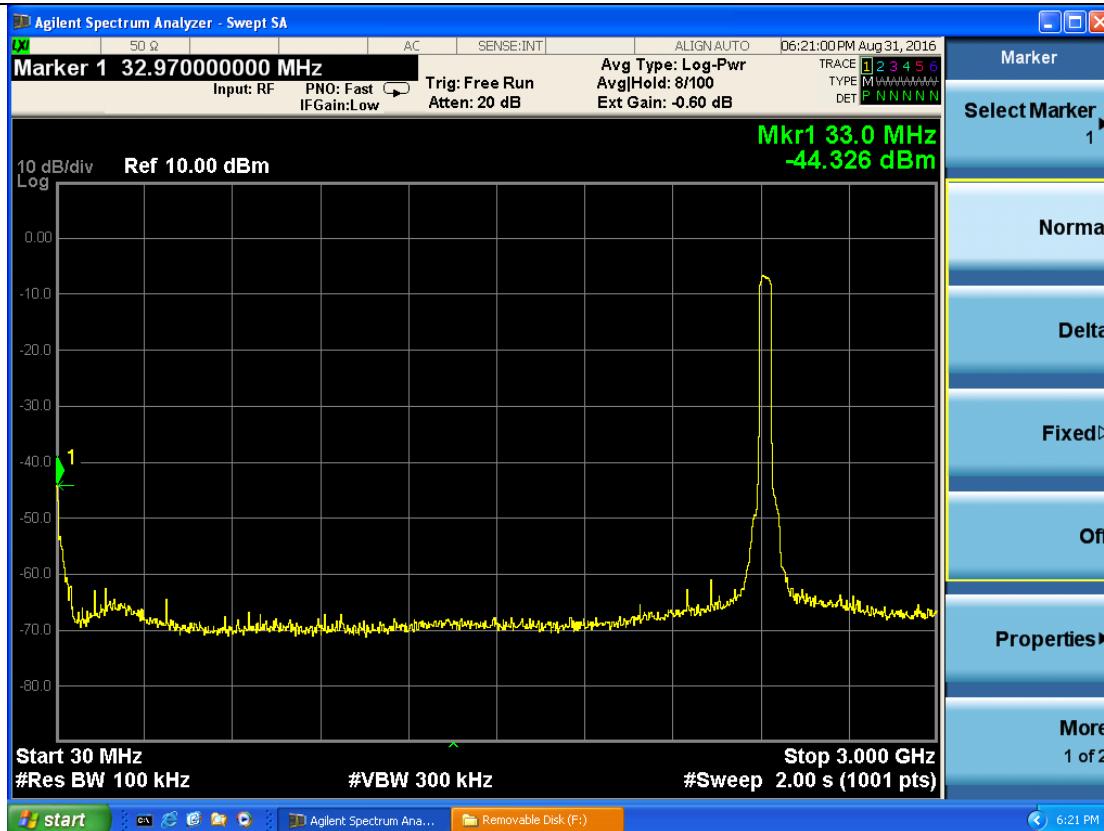

[Conducted Band Edges Test]

Test mode: IEEE 802.11b Channel 1(2412MHz)

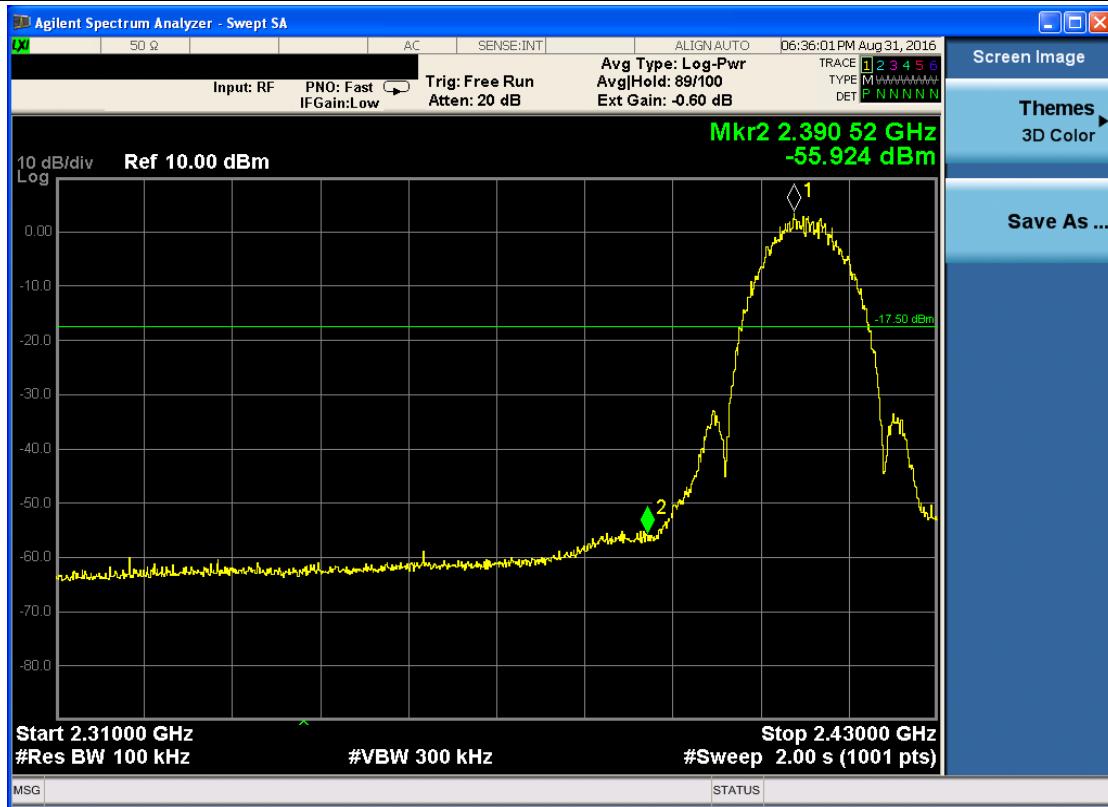


Test mode: IEEE 802.11b Channel 11(2462MHz)



Test mode: IEEE 802.11g Channel 1(2412MHz)




Test mode: IEEE 802.11g Channel 11(2462MHz)

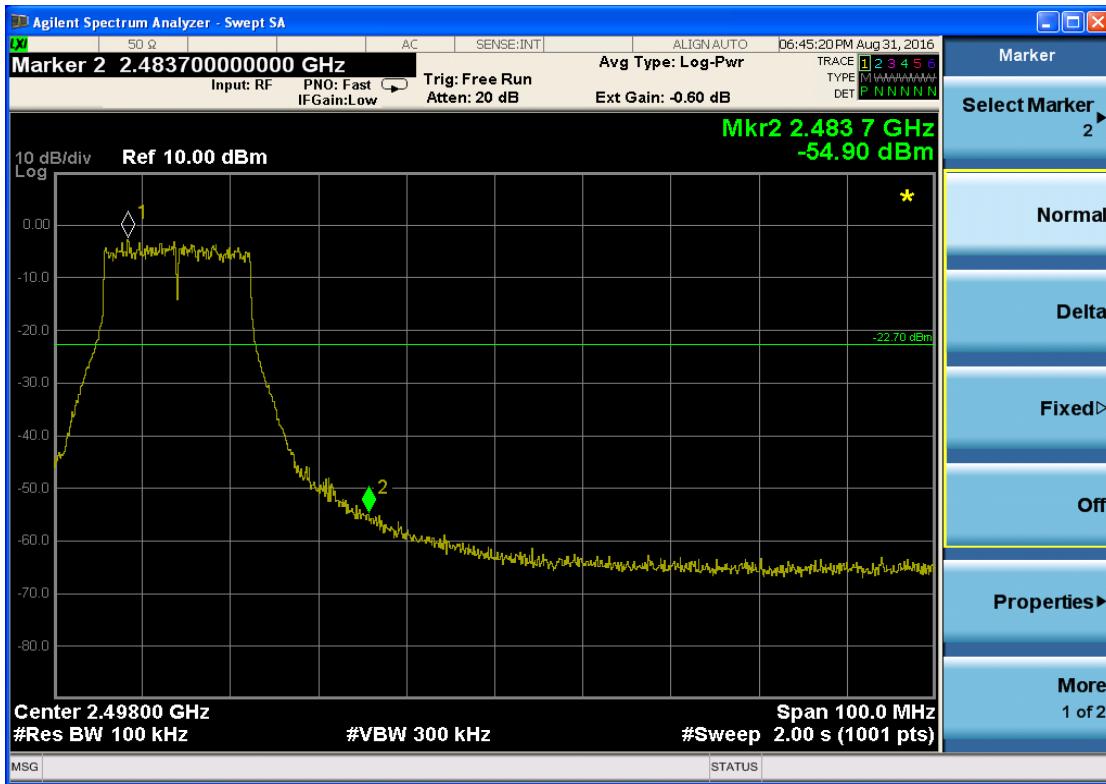

Test mode: IEEE 802.11n Channel 3(2422MHz)



Test mode: IEEE 802.11n Channel 11(2462MHz)

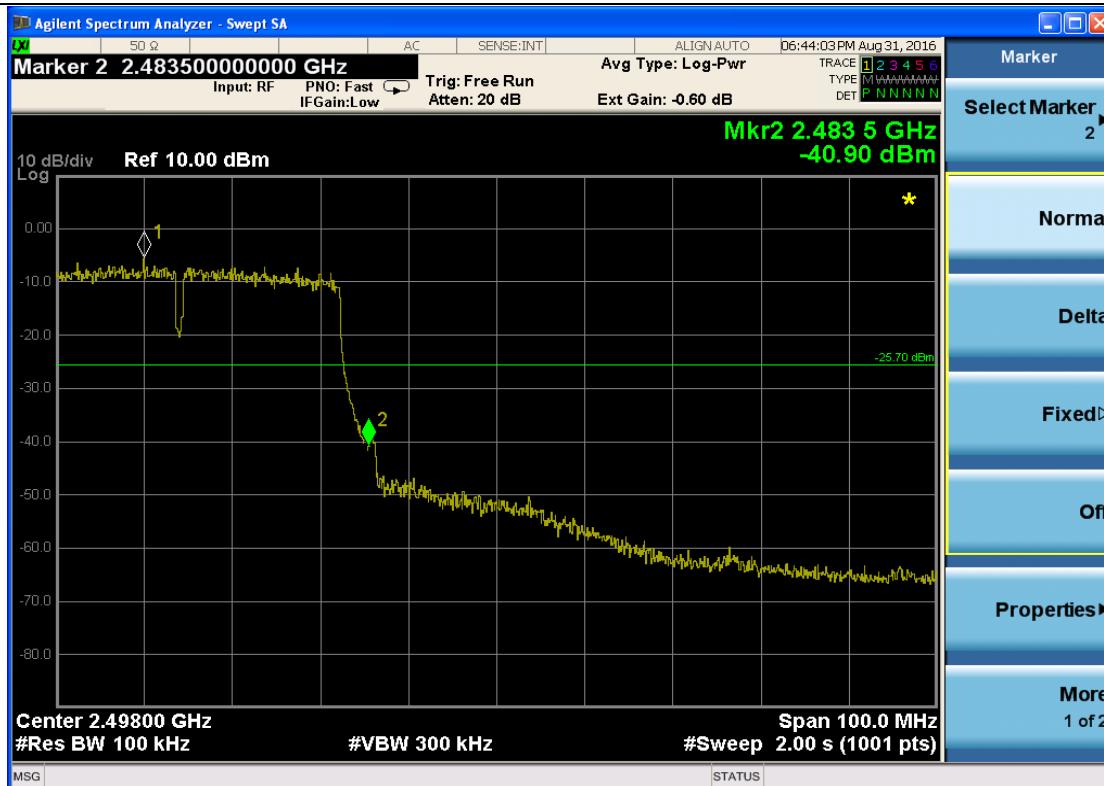


[Radiated Band Edges Test]

EUT Name: WatchAir OpenArms
 Manufacturer: EPICT, Inc.
 Model Name: EPUS-100B
 Test Mode: 802.11b-Channel 1: 2412MHz



BWS TECH INC

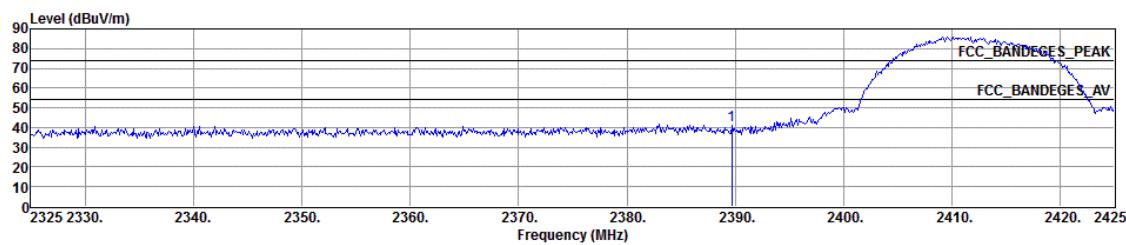

Site : SVSWR Chamber
 Condition: FCC_BANDEGES_PEAK 3m 100 230

	ReadAntenna	Preamp	Cable	Limit	Over	A/Pos	T/Pos	Remark	
Freq	Level	Factor	Loss	Level	Line				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1	2389.70	38.96	27.40	31.20	5.72	40.88	74.00	-33.12	100 130 Peak

Remark: Correction Factor[dB] = Antenna Factor[dB] + Cable Factor[dB] – Pre-amplifier Factor[dB],


Result [dB μ V/m] = Reading [dB μ V] + Correction Factor [dB],

Margin[dB] = Limit [dB μ V/m] - Result [dB μ V/m]

EUT Name: WatchAir OpenArms
 Manufacturer: EPICT, Inc.
 Model Name: EPUS-100B
 Test Mode: 802.11b-Channel 11: 2462MHz



BWS TECH INC

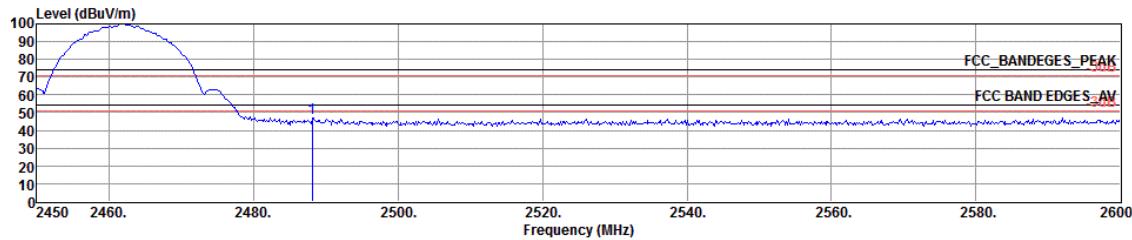

Site : SVSWR Chamber
 Condition: FCC_BANDEGES_PEAK 3m


Freq	ReadAntenna	Preamp	Cable	Limit	Over	A/Pos	T/Pos	Remark	
	Level	Factor	Loss	Level	Line	Limit	dB		
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2488.10	45.39	26.87	30.96	5.55	46.85	74.00	-27.15	100 248 Peak

Remark: Correction Factor[dB] = Antenna Factor[dB] + Cable Factor[dB] – Pre-amplifier Factor[dB],

Result [dB μ V/m] = Reading [dB μ V] + Correction Factor [dB],

Margin[dB] = Limit [dB μ V/m] - Result [dB μ V/m]

EUT Name: WatchAir OpenArms
 Manufacturer: EPICT, Inc.
 Model Name: EPUS-100B
 Test Mode: 802.11g-Channel 1: 2412MHz

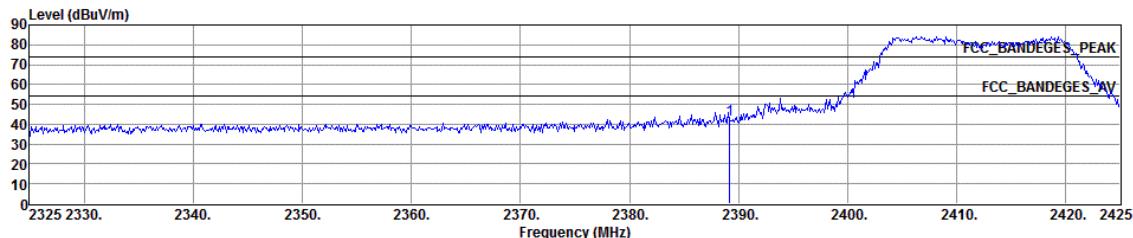

Site : SVSWR Chamber
 Condition: FCC_BANDEGES_PEAK 3m

Freq	Read	Antenna	Preamp	Cable	Limit	Over	A/Pos	T/Pos	Remark
	Level	Factor	Factor	Loss	Level	Line	Limit	cm	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 2389.20	40.32	27.39	31.20	5.72	42.23	74.00	-31.77	100	238 Peak

Remark: Correction Factor[dB] = Antenna Factor[dB] + Cable Factor[dB] – Pre-amplifier Factor[dB],


Result [dB μ V/m] = Reading [dB μ V] + Correction Factor [dB],

Margin[dB] = Limit [dB μ V/m] - Result [dB μ V/m]

EUT Name: WatchAir OpenArms
 Manufacturer: EPICT, Inc.
 Model Name: EPUS-100B
 Test Mode: 802.11g-Channel 11: 2462MHz



BWS TECH INC

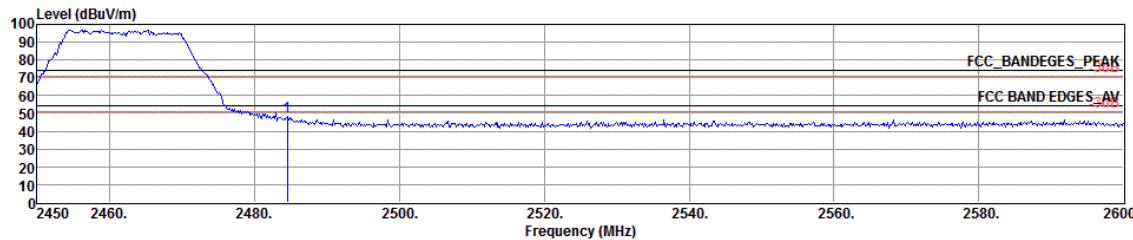

Site : SVSWR Chamber
 Condition: FCC_BANDEGES_PEAK 3m


Freq	ReadAntenna	Preamp	Cable	Limit	Over	A/Pos	T/Pos	Remark	
	Level	Factor	Loss						
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1	2484.50	46.92	26.86	30.96	5.56	48.38	74.00	-25.62	100 200 Peak

Remark: Correction Factor[dB] = Antenna Factor[dB] + Cable Factor[dB] – Pre-amplifier Factor[dB],

Result [dB μ V/m] = Reading [dB μ V] + Correction Factor [dB],

Margin[dB] = Limit [dB μ V/m] - Result [dB μ V/m]

EUT Name: WatchAir OpenArms
 Manufacturer: EPICT, Inc.
 Model Name: EPUS-100B
 Test Mode: 802.11n-Channel 3: 2422MHz

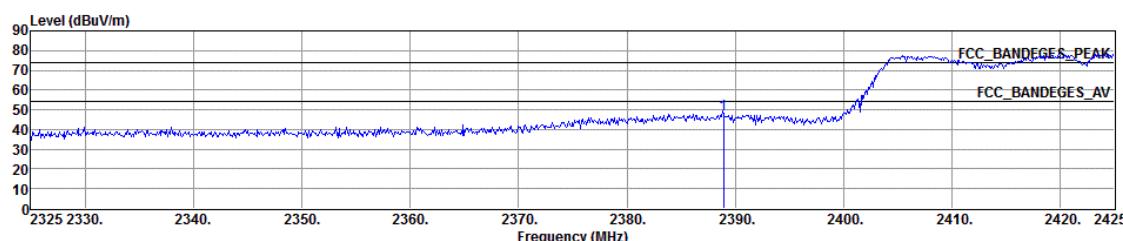

Site : SVSWR Chamber
 Condition: FCC_BANDEGES_PEAK 3m

Freq	Read	Antenna	Preampl	Cable	Limit	Over	A/Pos	T/Pos	Remark
	Level	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 2388.90	45.74	27.39	31.20	5.72	47.65	74.00	-26.35	100	200
									Peak

Remark: Correction Factor[dB] = Antenna Factor[dB] + Cable Factor[dB] – Pre-amplifier Factor[dB],


Result [dB μ V/m] = Reading [dB μ V] + Correction Factor [dB],

Margin[dB] = Limit [dB μ V/m] - Result [dB μ V/m]

EUT Name: WatchAir OpenArms
Manufacturer: EPICT, Inc.
Model Name: EPUS-100B
Test Mode: 802.11n-Channel 11: 2462MHz

BWS Testing Laboratory

BWS TECH INC

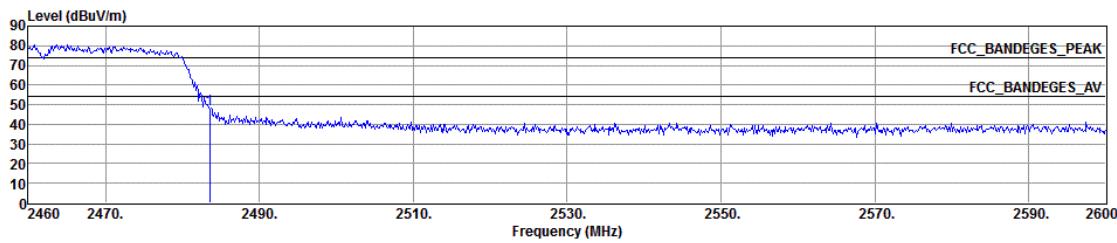

Site : SVSWR Chamber
Condition: FCC_BANDEGES_PEAK 3m

Freq	ReadAntenna		Preamp		Cable		Limit		Over		A/Pos	T/Pos	Remark
	Level	Factor	Factor		Loss	Level	Line	Limit					
MHz	dBuV	dB/m	dB		dB	dBuV/m	dBuV/m		dB	cm	deg		
1	2483.52	45.46	27.57	30.97	5.56	47.62	74.00	-26.38		100	200	Peak	

Remark: Correction Factor[dB] = Antenna Factor[dB] + Cable Factor[dB] – Pre-amplifier Factor[dB].

Result [dB μ V/m] = Reading [dB μ V] + Correction Factor [dB],

$$\text{Margin[dB]} = \text{Limit [dB } \mu\text{V/m]} - \text{Result [dB } \mu\text{V/m]}$$

5.8 Antenna Application

5.8.1 Antenna Requirement

Standard	Requirement
FCC CFR Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Type	Frequency	Antenna Gain	Limit
Dual Standard Antenna	2.4GHz	3dBi	≤6dBi

5.8.2 Result

PASS