



FCC 47 CFR § 2.1093
IEEE Std 1528-2013

SAR EVALUATION REPORT

FOR
Airway Clearance System

MODEL NUMBER: PMACS14G

FCC ID: 2AJKO-PMACS14G

REPORT NUMBER: 4787846868-S1V1

ISSUE DATE: 3/16/2017

Prepared for
Hill-Rom Services Private Limited
1 Yishun Avenue 7, 768923, Singapore

Prepared by
UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Revision History

Rev.	Date	Revisions	Revised By
V1	3/16/2017	Initial Issue	Sunghoon Kim

Table of Contents

1. Attestation of Test Results	5
2. Test Specification, Methods and Procedures.....	6
3. Facilities and Accreditation.....	6
4. SAR Measurement System & Test Equipment	7
4.1. <i>SAR Measurement System.....</i>	7
4.2. <i>SAR Scan Procedures.....</i>	8
4.3. <i>Test Equipment.....</i>	10
5. Measurement Uncertainty.....	10
6. Device Under Test (DUT) Information	11
6.1. <i>DUT Description</i>	11
6.2. <i>Wireless Technologies.....</i>	11
6.3. <i>Nominal and Maximum Output Power from Tune-up Procedure</i>	11
6.4. <i>General LTE SAR Test and Reporting Considerations.....</i>	12
7. RF Exposure Conditions (Test Configurations)	13
7.1. <i>Standalone SAR Test Exclusion Considerations.....</i>	13
7.2. <i>Required Test Configurations</i>	13
8. Dielectric Property Measurements & System Check	14
8.1. <i>Dielectric Property Measurements</i>	14
8.2. <i>System Check.....</i>	15
9. Conducted Output Power Measurements.....	17
9.1. <i>LTE.....</i>	17
9.2. <i>Bluetooth</i>	19
10. Measured and Reported (Scaled) SAR Results.....	20
10.1. <i>LTE Band 4 (20MHz Bandwidth)</i>	21
10.2. <i>LTE Band 13 (10MHz Bandwidth)</i>	21
10.3. <i>Bluetooth.....</i>	21
11. SAR Measurement Variability.....	22
12. Simultaneous Transmission SAR Analysis	23
12.1. <i>Sum of the SAR for Wi-Fi & BT</i>	24
Appendices	25
4787846868-S1V1 FCC Report SAR_App A_Photos & Ant. Locations.....	25
4787846868-S1V1 FCC Report SAR_App B_Highest SAR Test Plots.....	25


4787846868-S1V1 FCC Report SAR_App C_System Check Plots.....	25
4787846868-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients	25
4787846868-S1V1 FCC Report SAR_App E_Probe Cal. Certificates	25
4787846868-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates.....	25

1. Attestation of Test Results

Applicant Name	Hill-Rom Services Private Limited			
FCC ID	2AJKO-PMACS14G			
Model Number	PMACS14G			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg) Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure	1.6			
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	Licensed	DTS	U-NII	DSS (BT)
Standalone	0.519	N/A	N/A	N/A
Simultaneous TX	0.605	N/A	N/A	N/A
Date Tested	2/20/2017 to 2/24/2017			
Test Results	Pass			

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released By:	Prepared By:
	
Justin Park Senior Engineer UL Korea, Ltd. Suwon Laboratory	Sunghoon Kim Laboratory Engineer UL Korea, Ltd. Suwon Laboratory

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D05 SAR for LTE Devices v02r05

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 2 Room
SAR 3 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

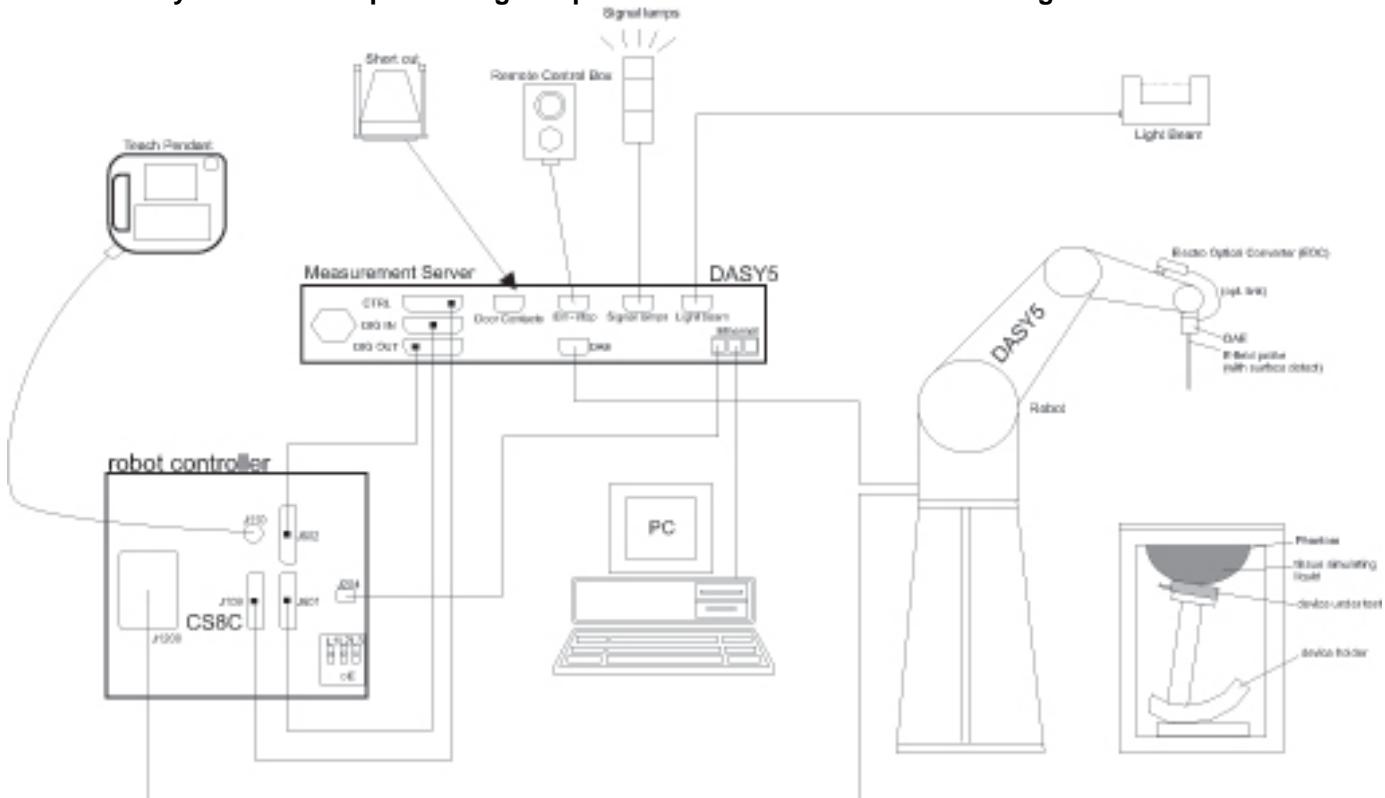

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$ graded grid	≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface $\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 4 mm $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the area scan based *1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	8-18-2017
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	7-26-2017
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3424	8-17-2017
Thermometer	Lutron	MHB-382SD	AH.91478	8-10-2017

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-16-2017
Power Sensor	Agilent	U2000A	MY54260010	8-17-2017
Power Sensor	Agilent	U2000A	MY54260007	8-17-2017
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	8-17-2017
Directional Coupler	Agilent	772D	MY52180193	8-17-2017
Low Pass Filter	MICROLAB	LA-15N	03943	8-17-2017
Low Pass Filter	FILTRON	L14012FL	1410003S	8-17-2017
Attenuator	Agilent	8491B/003	MY39269292	8-17-2017
Attenuator	Agilent	8491B/010	MY39269315	8-17-2017
Attenuator	Agilent	8491B/020	MY39269298	8-17-2017
E-Field Probe (SAR2)	SPEAG	EX3DV4	7313	1-30-2018
E-Field Probe (SAR3)	SPEAG	EX3DV4	7314	9-27-2017
Data Acquisition Electronics (SAR2)	SPEAG	DAE4	1468	9-8-2017
Data Acquisition Electronics (SAR3)	SPEAG	DAE4	1494	7-18-2017
System Validation Dipole	SPEAG	D750V3	1122	8-30-2017
System Validation Dipole	SPEAG	D1750V2	1125	8-26-2017
Thermometer (SAR2)	Lutron	MHB-382SD	AH.50215	8-17-2017
Thermometer (SAR3)	Lutron	MHB-382SD	AH.50213	8-17-2017

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150313	8-16-2017
Base Station Simulator	R & S	CMW500	150314	8-16-2017

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Refer of 4787846868-S1V1 FCC Report SAR_App A_Photos & Ant. Locations		
Back Cover	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.		
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.		
Wireless Router (Hotspot)	Hotspot mode is not support.		
Test sample information	No.	S/N	Notes
	1	R350VM0033	Conduction & SAR

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
LTE	FDD Band 4	QPSK	100% (FDD)
	FDD Band 13	16QAM <input checked="" type="checkbox"/> Rel. 10 Does not support Carrier Aggregation (CA)	
Bluetooth	2.4 GHz	Version 4.0 LE	76.85%

6.3. Nominal and Maximum Output Power from Tune-up Procedure

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Upper limit (dB): -2.0 ~ 0.5		Max. RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
LTE Band 4	QPSK, 16QAM	24.0	24.5
LTE Band 13	QPSK, 16QAM	23.5	24.0

Upper limit (dB): 0.5		Max. RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
Bluetooth		8.0	8.5
Bluetooth LE		4.0	4.5

6.4. General LTE SAR Test and Reporting Considerations

Item	Description																																												
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 4	Frequency range: 1710-1755 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5																																								
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5																																								
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5																																								
	Band 13	Frequency range: 777 - 787 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
		Low			23205/ 779.5																																								
	Mid			23230/ 782	23230/ 782																																								
	High				23255/ 784.5																																								
LTE transmitter and antenna implementation	LTE has 1 Main TX/RX. Refer to Appendix A...																																												
Supported Bandwidth and modulation	This device supports LTE band 13 with bandwidths of 5/10 MHz for QPSK and 5MHz for 16QAM; and LTE band 4 with bandwidths of 5/10/15/20 MHz for QPSK and 5MHz for 16QAM.																																												
Maximum power reduction (MPR)	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr> <tr> <th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr> </thead> <tbody> <tr> <td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr> <tr> <td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr> <tr> <td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr> </tbody> </table> <p>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</p>							Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																						
Power reduction	No																																												
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																												

7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

7.1. Standalone SAR Test Exclusion Considerations

Dedicated Host Approach is applied, the standalone SAR test exclusion procedure in KDB 447498 § 4.3.1 is applied to determine the minimum test separation distance:

- When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
- When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.

SAR Test Exclusion Calculations for WWAN and Bluetooth

WWAN and Bluetooth Antennas ≤ 50 mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
WWAN Antenna Max Power															
LTE Band 4	1752.5	24.50	282	26	198	31	107	162	11	14.4 -MEASURE-	> 50 mm	12 -MEASURE-	> 50 mm	> 50 mm	33.9 -MEASURE-
LTE Band 13	784.5	24.00	251	26	198	31	107	162	11	8.6 -MEASURE-	> 50 mm	7.2 -MEASURE-	> 50 mm	> 50 mm	20.2 -MEASURE-
Bluetooth Antenna Max Power															
Bluetooth	2480	8.50	7	43	198	163	125	38	26	0.3 -EXEMPT-	> 50 mm	> 50 mm	> 50 mm	0.3 -EXEMPT-	0.4 -EXEMPT-

Note(s):

According to KDB 447498, if the calculated threshold value is > 3 then SAR testing is required.

WWAN and Bluetooth Antennas > 50 mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
WWAN Antenna Max Power															
LTE Band 4	1752.5	24.50	282	26	198	31	107	162	11	< 50 mm 1593.3 mW -EXEMPT-	< 50 mm 683.3 mW -EXEMPT-	< 50 mm 1233.3 mW -EXEMPT-	< 50 mm 467.5 mW -EXEMPT-	< 50 mm 755.1 mW -EXEMPT-	< 50 mm
LTE Band 13	784.5	24.00	251	26	198	31	107	162	11	< 50 mm 943.4 mW -EXEMPT-	< 50 mm 1575.3 mW -EXEMPT-	< 50 mm 1225.3 mW -EXEMPT-	< 50 mm 845.3 mW -EXEMPT-	< 50 mm 1225.3 mW -EXEMPT-	< 50 mm
Bluetooth Antenna Max Power															
Bluetooth	2480	8.50	7	43	198	163	125	38	26	< 50 mm 1575.3 mW -EXEMPT-	< 50 mm 1225.3 mW -EXEMPT-	< 50 mm 845.3 mW -EXEMPT-	< 50 mm 1225.3 mW -EXEMPT-	< 50 mm 845.3 mW -EXEMPT-	< 50 mm

Note(s):

According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.

7.2. Required Test Configurations

The table below identifies the standalone test configurations required for this device according to the findings in Section 7.1:

Test Configurations	Rear	Edge 1		Edge 2		Edge 3		Edge 4		Front
		(Top Edge)	(Right Edge)	(Bottom Edge)	(Left Edge)	(Top Edge)	(Right Edge)	(Bottom Edge)	(Left Edge)	
LTE Band 4	Yes	No	Yes	No	Yes	No	Yes	No	Yes	Yes
LTE Band 13	Yes	No	Yes	No	Yes	No	Yes	No	Yes	Yes
Bluetooth	No	No	No	No	No	No	No	No	No	No

Note(s):

Yes = Testing is required. No = Testing is not required.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

SAR 2 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit \pm (%)	
2-23-2017	Body 750	e'	55.8000	Relative Permittivity (ϵ_r):	55.80	55.55	0.46	5
		e''	23.0000	Conductivity (σ):	0.96	0.96	-0.41	5
	Body 700	e'	56.2800	Relative Permittivity (ϵ_r):	56.28	55.74	0.97	5
		e''	23.4500	Conductivity (σ):	0.91	0.96	-4.85	5
	Body 790	e'	55.4200	Relative Permittivity (ϵ_r):	55.42	55.39	0.05	5
		e''	22.6700	Conductivity (σ):	1.00	0.97	3.07	5

SAR 3 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit \pm (%)	
2-20-2017	Body 1750	e'	54.5300	Relative Permittivity (ϵ_r):	54.53	53.44	2.04	5
		e''	14.7400	Conductivity (σ):	1.43	1.49	-3.49	5
	Body 1710	e'	54.6400	Relative Permittivity (ϵ_r):	54.64	53.54	2.05	5
		e''	14.7800	Conductivity (σ):	1.41	1.46	-3.85	5
	Body 1755	e'	54.5200	Relative Permittivity (ϵ_r):	54.52	53.43	2.04	5
		e''	14.7300	Conductivity (σ):	1.44	1.49	-3.48	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 \pm 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be \geq 15.0 cm for SAR measurements \leq 3 GHz and \geq 10.0 cm for measurements $>$ 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1122	8-30-2016	750	1g	8.32	8.69
				10g	5.41	5.72
D1750V2	1125	8-26-2016	1750	1g	36.90	37.20
				10g	19.50	19.80

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 2 Room

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
2-23-2017	D750V3	1122	Body	1g	0.86	8.64	8.69	-0.58	1, 2
				10g	0.57	5.73	5.72	0.17	

SAR 3 Room

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
2-20-2017	D1750V2	1125	Body	1g	3.64	36.40	37.20	-2.15	3, 4
				10g	1.92	19.20	19.80	-3.03	

9. Conducted Output Power Measurements

9.1. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 4 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	23.1		
			1	49	0	22.9		
			1	99	0	24.2		
			50	0	1	22.0		
			50	24	1	22.1		
			50	50	1	22.5		
			100	0	1	22.3		
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	22.8	22.0	23.3
			1	36	0	23.1	23.2	24.3
			1	74	0	22.0	22.7	22.3
			36	0	1	22.5	21.5	23.0
			36	18	1	22.4	22.1	23.0
			36	37	1	21.7	22.1	22.9
			75	0	1	22.0	21.8	23.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	22.9	22.0	23.3
			1	25	0	23.2	22.6	23.8
			1	49	0	22.0	22.2	22.4
			25	0	1	22.1	21.2	22.7
			25	12	1	22.2	21.5	22.7
			25	25	1	21.8	21.6	22.2
			50	0	1	22.0	21.3	22.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	23.2	22.5	23.5
			1	12	0	23.3	22.6	23.6
			1	24	0	23.0	22.8	23.0
			12	0	1	22.4	21.4	22.6
			12	6	1	22.4	21.6	22.5
			12	11	1	22.3	21.7	22.3
			25	0	1	22.3	21.6	22.5
		16QAM	1	0	1	22.3	21.6	23.0
			1	12	1	22.5	21.8	23.0
			1	24	1	22.1	21.9	22.3
			12	0	2	21.4	20.6	21.6
			12	6	2	21.4	20.6	21.5
			12	11	2	21.3	20.7	21.2
			25	0	2	21.4	20.6	21.4

Note(s):

20 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 13 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)
						782 MHz
LTE Band 13	10	QPSK	1	0	0	23.1
			1	25	0	23.5
			1	49	0	23.9
			25	0	1	22.4
			25	12	1	22.6
			25	25	1	22.7
			50	0	1	22.6
			1	0	0	23.4
LTE Band 13	5	QPSK	1	12	0	23.5
			1	24	0	23.7
			12	0	1	22.3
			12	6	1	22.3
			12	11	1	22.4
			25	0	1	22.4
			1	0	1	22.5
		16QAM	1	12	1	22.6
			1	24	1	22.9
			12	0	2	21.3
			12	6	2	21.3
			12	11	2	21.4
			25	0	2	21.3

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

9.2. Bluetooth

Maximum tune-up tolerance limit is 8.5 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$
- $\leq 0.6 \text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4 \text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200 \text{ MHz}$

KDB 941225 D05 SAR for LTE Devices:

SAR must be measured with the maximum TTI(transmit time interval) supported by the device in each LTE configuration.

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is $> 0.8 \text{ W/kg}$, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are $> 0.8 \text{ W/kg}$. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation $< 1.45 \text{ W/kg}$.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is $< 1.45 \text{ W/Kg}$ and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is $< 1.45 \text{ W/Kg}$ and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

10.1. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Standalone	QPSK	0	Front	20175	1732.5	1	99	24.5	24.2	0.484	0.519	1
						50	50	23.5	22.5	0.388	0.488	
			Rear	20175	1732.5	1	99	24.5	24.2	0.098	0.105	
						50	50	23.5	22.5	0.082	0.103	
			Edge 2	20175	1732.5	1	99	24.5	24.2	0.191	0.205	
						50	50	23.5	22.5	0.152	0.191	

10.2. LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Standalone	QPSK	0	Front	23230	782.0	1	49	24.0	23.9	0.210	0.215	2
						25	25	23.0	22.7	0.156	0.167	
			Rear	23230	782.0	1	49	24.0	23.9	0.082	0.084	
						25	25	23.0	22.7	0.039	0.041	
			Edge 2	23230	782.0	1	49	24.0	23.9	0.174	0.178	
						25	25	23.0	22.7	0.123	0.132	

10.3. Bluetooth

Maximum tune-up tolerance limit is 8.5 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing. And Estimated SAR is calculated for Simultaneous Transmission SAR Analysis. Please refer to Estimated SAR in Sec.12

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio
750	LTE Band 13	Standalone	Front	No	0.210	N/A	N/A
1750	LTE Band 4	Standalone	Front	No	0.484	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri \leq 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations		
Standalone	1	LTE	+	BT

Estimated SAR for Simultaneous Transmission SAR Analysis

Considerations for SAR estimation

1. When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
2. Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
 - o When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
 - o When the separation distance from the antenna to an adjacent edge is > 5 mm but ≤ 50 mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
 - o When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg
3. Please refer to Estimated SAR Tables to see which test positions are inherently compliant as they consist of only estimated SAR values for all applicable transmitters and consequently will always have sum of SAR values ≤ 0.8 W/kg. Simultaneous transmission SAR analysis was therefore not performed for these test positions.

Estimated SAR for WWAN and Bluetooth

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Estimated 1-g SAR Value (W/kg)					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
WWAN Antenna Max Power															
LTE Band 4	1752.5	24.50	282	26	198	31	107	162	11	-MEASURE-	0.400	-MEASURE-	0.400	0.400	-MEASURE-
LTE Band 13	784.5	24.00	251	26	198	31	107	162	11	-MEASURE-	0.400	-MEASURE-	0.400	0.400	-MEASURE-
Bluetooth Antenna Max Power															
Bluetooth	2480	8.50	7	43	198	163	125	38	26	0.034	0.400	0.400	0.400	0.039	0.057

12.1. Sum of the SAR for Wi-Fi & BT

Test Position	Standalone SAR (W/kg)		\sum 1-g SAR (W/kg)
	DTS ①	Bluetooth ②	DTS + Bluetooth ① + ②
Front	0.519	0.057	0.576
Rear	0.105	0.034	0.139
Edge 2	0.205	0.400	0.605

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

Appendices

Refer to separated files for the following appendixes.

4787846868-S1V1 FCC Report SAR_App A_Photos & Ant. Locations

4787846868-S1V1 FCC Report SAR_App B_Highest SAR Test Plots

4787846868-S1V1 FCC Report SAR_App C_System Check Plots

4787846868-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients

4787846868-S1V1 FCC Report SAR_App E_Probe Cal. Certificates

4787846868-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates

END OF REPORT