

TEST REPORT

OF

FCC CFR 47 part 1, 1.1307(b), 1.1310

FCC ID : 2AJJKSKSC100G2

Equipment Under Test : WIRELESS CHARGER

Model Name : KSC-100G2

Applicant : Kum Oh Electronics Co., Ltd.

Manufacturer : Kum Oh Electronics Co., Ltd.

Date of Receipt : 2016.12.14

Date of Test(s) : 2016.12.26 ~ 2016.12.28

Date of Issue : 2017.01.12

In the configuration tested, the EUT complied with the standards specified above.

Tested By:

Date:

2017.01.12

Aileen Jeong

Technical
Manager:

Date:

2017.01.12

Alvin Kim

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>
RTT5041-20(2015.10.01)(3) Tel. +82 31 428 5700 / Fax. +82 31 427 2370 A4(210 mm x 297 mm)

Table of contents

1. General information -----	3
2. Test Result -----	6

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

1. General information

1.1. Testing laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

1.2. Details of applicant

Applicant : Kum Oh Electronics Co., Ltd.
Address : 35, Gilju-ro 444beon-gil, Wonmi-gu, Bucheon-si, Gyeonggi-do, 14556 Korea
Contact Person : Park, Chan-Hong
Phone No. : +82 10 4407 6607

1.3. Description of EUT

Kind of Product	WIRELESS CHARGER
Model Name	KSC-100G2
Power Supply	DC 5.0 V
Frequency Range	120 kHz ~ 190 kHz
Antenna Type	Inductive loop coil antenna
Operating Temperature	-20 °C ~ 60 °C
H/W Version	rev0.6
S/W Version	SAORBISO_30_OPT1_8_18_15b(3s)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

1.4. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Spectrum Analyzer	R&S	FSV30	103102	Jun. 08, 2016	Annual	Jun. 08, 2017
E-Field Probe	D.A.R.E!! Instruments	RadiSense 4	13I00444SNO04	Aug. 02, 2016	Annual	Aug. 02, 2017
Magnetic Field Sensor	HIOKI	0850-B1	3471	Jul. 22, 2016	Annual	Jul. 22, 2017
Magnetic Field Hitester	HIOKI	FT3470-50	140430999	Jul. 22, 2016	Annual	Jul. 22, 2017
DC Power Supply	R&S	HMP2020	019922876	Apr. 26, 2016	Annual	Apr. 26, 2017
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N/A	N.C.R.	N/A	N.C.R.

► Support equipment

Description	Manufacturer	Model	FCC ID
Smart Wearable Device	Samsung Electronics Co., Ltd.	SM-R720	A3LSMR720

1.5. Test report revision

Revision	Report number	Date of Issue	Description
0	F690501/RF-RTL010695	2016.12.29	Initial
1	F690501/RF-RTL010695-1	2017.01.12	Corrected typo

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm × 297 mm)

1.6. Worst case of test configurations

In order to check all kinds of possible configurations, EUT was evaluated with appropriate client and under each charging condition as below table.

EUT configuration	Description
Charging Mode with client device (Model : SM-R720, FCC ID : A3LSMR720)	Less than 1 % of battery
	Less than 50 % of battery
	100 % full charging of battery

EUT setup configuration:

- The EUT can be capable of charging one client at a time.
- The measurement is performed with a typical WPT client device on the power transfer zone.


Operating configurations:

Client device (SM-R720)

- While the wireless charger is charging with the client device turned off. (Trace#1 "M1")
- While the client device was in airplane mode (Trace#2 "M2")
- While the client device was connected to an active data connection (Trace#3 "M3")

The device was tested under all modes and bands like WLAN and Bluetooth Low Energy.

In the result, **WLAN / 2.4 GHz Band** was found in **Middle channel**.

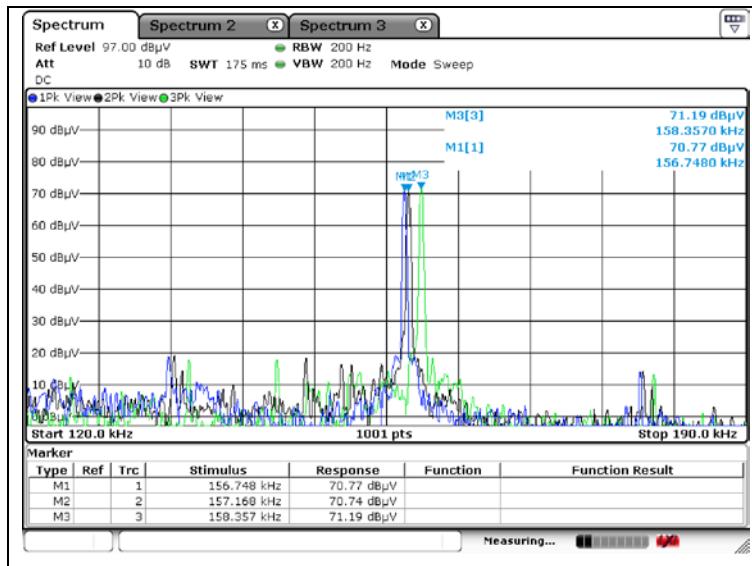

Plot – fundamental emission comparison


- The level of Trace#3 was higher than Trace#1 and 2. So Trace#3 was selected.
- Trace#3 as **WLAN / 2.4 GHz Band** which was found in **Middle channel** should be tested with the client device as a worst case.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

2. Test Result

2.1. Test Setup

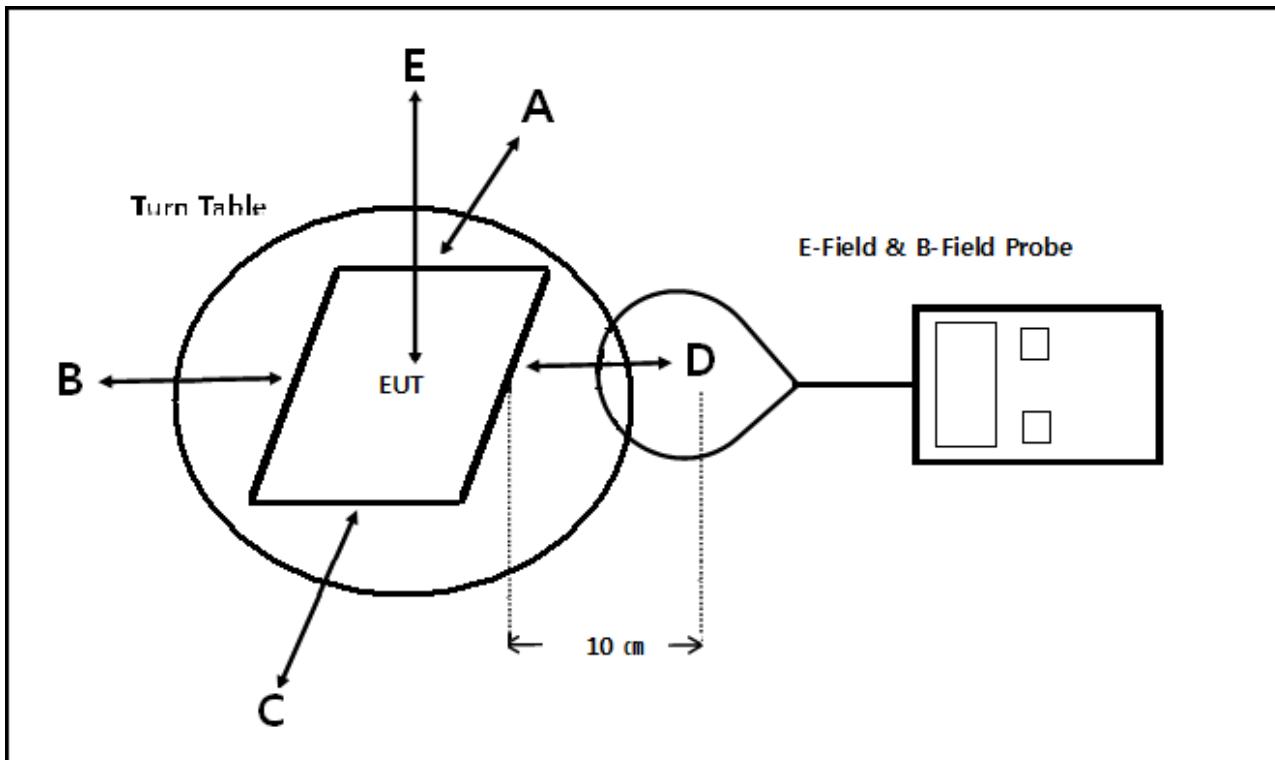

2.2. Measurement procedure

- The RF exposure test was performed in anechoic chamber.
- The measurement probe was placed at test distance (10 cm) which is between the edge of the charger and the geometric center of probe.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT was measured according to the dictates of KDB 680106 D01 v02.

Remark:

The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.3. Equipment Approval Considerations item 5.2 of KDB 680106 D01 v02.

- a) Power transfer frequency is less than 1 MHz.
 - The device operates at a frequency of 120 kHz to 190 kHz.
- b) Output power from each primary coil is less than 5 watts.
 - Output power from each primary coil : 5 watts.
- c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
 - The transfer system including a charging system with only single primary coils is to detect and allow only between individual pairs of coils.
- d) Client device is inserted in or placed directly in contact with the transmitter.
 - Client device is placed directly in contact with the transmitter.
- e) The maximum coupling surface area of the transmit (charging) device is between 60 cm² and 400 cm².
 - The EUT coupling surface area :
(Type : Circle)
$$\pi \times \text{Radius of width}^2 (\text{cm}^2) = 3.14 \times 2.114^2 (\text{cm}^2) = 14.03 \text{ cm}^2 < 60 \text{ cm}^2$$
- f) Aggregate leakage fields at 10 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 30 % of the MPE limit.
 - Refer to following test results.
The EUT E-Field Strength levels at 10 cm < 30 % of the MPE E-Field Strength limit 614 V/m
8.81 V/m (Max. at 10 cm) < 184.20 V/m

The EUT H-Field Strength levels at 10 cm < 30 % of the MPE H-Field Strength limit 1.63 A/m
0.043 A/m (Max. at 10 cm) < 0.489 A/m

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

2.4. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

§1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter

TABLE 1 - LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength(V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational /Control Exposures				
0.3 – 3.0	614	1.63	*(100)	6
3.0 – 30	1842/f	4.89/f	*(900/f ²)	6
30 – 300	61.4	0.163	1.0	6
300 – 1 500			f/300	6
1 500 – 100 000			5	6
(B) Limits for General Population / Uncontrol Exposures				
<u>0.3 – 1.34</u>	<u>614</u>	<u>1.63</u>	*(100)	30
1.34 – 30	824/f	2.19/f	*(180/f ²)	30
30 – 300	27.5	0.073	0.2	30
300 – 1 500			f/1 500	30
1 500 – 100 000			1.0	30

f = frequency in MHz

* = Plane wave equivalent power density

Note 1 to Table 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2 to Table 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.5. E and H field strength

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

2.5.1. E-Field Strength at 10 cm from the edges surrounding the EUT

Test mode: Charging mode (less than 1 % battery status of client device)

Frequency Range (kHz)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Limits (V/m)
120 ~ 190	8.43	7.66	7.59	7.85	8.81	614.00

Test mode: Charging mode (less than 50 % battery status of client device)

Frequency Range (kHz)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Limits (V/m)
120 ~ 190	8.42	7.67	7.59	7.84	8.79	614.00

Test mode: Charging mode (100 % battery status of client device)

Frequency Range (kHz)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Limits (V/m)
120 ~ 190	8.42	7.65	7.58	7.84	8.77	614.00

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.5.2. H-Field Strength at 10 cm from the edges surrounding the EUT

Test condition: Charging mode (less than 1 % battery status of client device)

Frequency Range (kHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Limits (A/m)
120 ~ 190	0.037	0.038	0.039	0.041	0.043	1.630

Test condition: Charging mode (less than 50 % battery status of client device)

Frequency Range (kHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Limits (A/m)
120 ~ 190	0.036	0.038	0.038	0.041	0.042	1.630

Test condition: Charging mode (100 % battery status of client device)

Frequency Range (kHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Limits (A/m)
120 ~ 190	0.036	0.038	0.037	0.040	0.041	1.630

- End of the Test Report -

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>