



TESTING LABORATORY  
CERTIFICATE#4323.01



## FCC PART 15.225


### TEST REPORT

For

**Shanghai SmartPeak Technology Co.,Ltd.**

Block 2, No.20 Xuhongzhong Rd, Xuhui District, Shanghai, China

**FCC ID: 2AJMSP1000**

<b>Report Type:</b> Original Report	<b>Product Type:</b> POS Terminal
<b>Test Engineer:</b> <u>Hope Zhang</u> 	
<b>Report Number:</b> <u>RSHA181219001-00E</u>	
<b>Report Date:</b> <u>2019-01-25</u>	
<b>Reviewed By:</b> <u>Oscar Ye</u> <u>RF Leader</u> 	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>.3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	.3
OBJECTIVE.....	.3
RELATED SUBMITTAL(S)/GRANT(S).....	.3
TEST METHODOLOGY.....	.3
MEASUREMENT UNCERTAINTY.....	.4
TEST FACILITY.....	.4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>.5</b>
JUSTIFICATION .....	.5
EUT EXERCISE SOFTWARE .....	.5
EQUIPMENT MODIFICATIONS .....	.5
SUPPORT EQUIPMENT LIST AND DETAILS .....	.5
EXTERNAL I/O CABLE.....	.5
BLOCK DIAGRAM OF TEST SETUP .....	.6
<b>SUMMARY OF TEST RESULTS.....</b>	<b>.7</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>.8</b>
<b>FCC§15.203 - ANTENNA REQUIREMENT.....</b>	<b>.9</b>
APPLICABLE STANDARD .....	.9
ANTENNA CONNECTED CONSTRUCTION .....	.9
<b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>.10</b>
APPLICABLE STANDARD .....	.10
EUT SETUP .....	.10
EMI TEST RECEIVER SETUP.....	.10
TEST PROCEDURE .....	.10
CORRECTED FACTOR & MARGIN CALCULATION .....	.11
TEST RESULTS SUMMARY.....	.11
TEST DATA .....	.11
<b>FCC§15.225, §15.205 &amp; §15.209 - RADIATED EMISSIONS TEST .....</b>	<b>.14</b>
APPLICABLE STANDARD .....	.14
EUT SETUP .....	.14
EMI TEST RECEIVER SETUP.....	.15
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	.15
TEST RESULTS SUMMARY.....	.15
TEST DATA .....	.15
<b>FCC§15.225(E) - FREQUENCY STABILITY.....</b>	<b>.20</b>
APPLICABLE STANDARD .....	.20
TEST PROCEDURE .....	.20
TEST DATA .....	.21
<b>§15.215(C) - 20DB EMISSION BANDWIDTH TESTING .....</b>	<b>.22</b>
REQUIREMENT .....	.22
TEST PROCEDURE .....	.22
TEST DATA .....	.22

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant	Shanghai SmartPeak Technology Co.,Ltd.
Tested Model	P1000
Product Type	POS Terminal
Dimension	170mm(L)*82mm(W)*56mm(H)
Power Supply	DC 5V from adapter and DC 7.4V from battery

#### Adapter information:

Model: ASSA65w-050200  
Input: AC 100-240V, 50/60Hz 0.45A  
Output: DC 5.0V, 2.0A

*\*All measurement and test data in this report was gathered from production sample serial number: 20181219001.  
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-12-19)*

### Objective

This Type approval report is prepared on behalf of Shanghai SmartPeak Technology Co.,Ltd. in accordance with Part 2- Subpart J, and Part 15-Subparts A and C of the Federal Communication Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS, Part 15.247 DTS, Part 22H24E,Part 27, PART 90 PCB submissions with FCC ID: 2AJMSP1000.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

Item	Uncertainty	
AC Power Lines Conducted Emissions	3.19 dB	
RF conducted test with spectrum	0.9dB	
Radiated emission	9kHz~30MHz	6.07dB
	30MHz~1GHz	6.11dB
Occupied Bandwidth	0.5kHz	
Temperature	1.0°C	
Humidity	6%	

**Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

## **SYSTEM TEST CONFIGURATION**

### **Justification**

The system was configured for testing in a typical fashion (as normally used by a typical user).

### **EUT Exercise Software**

The EUT is tested in the engineering mode.

### **Equipment Modifications**

No modification on the EUT.

### **Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
/	/	/	/

### **External I/O Cable**


Cable Description	Length (m)	From Port	To
Power Cable	0.8	EUT	Adapter

**Block Diagram of Test Setup**

For Conducted Emissions:

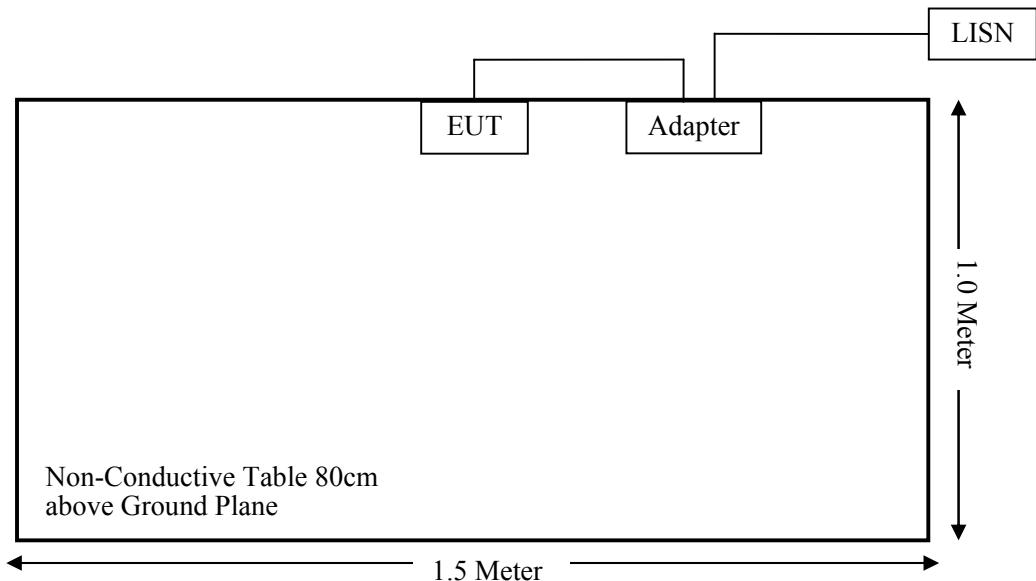

For Radiated Emissions(Below &amp; Above 30MHz):

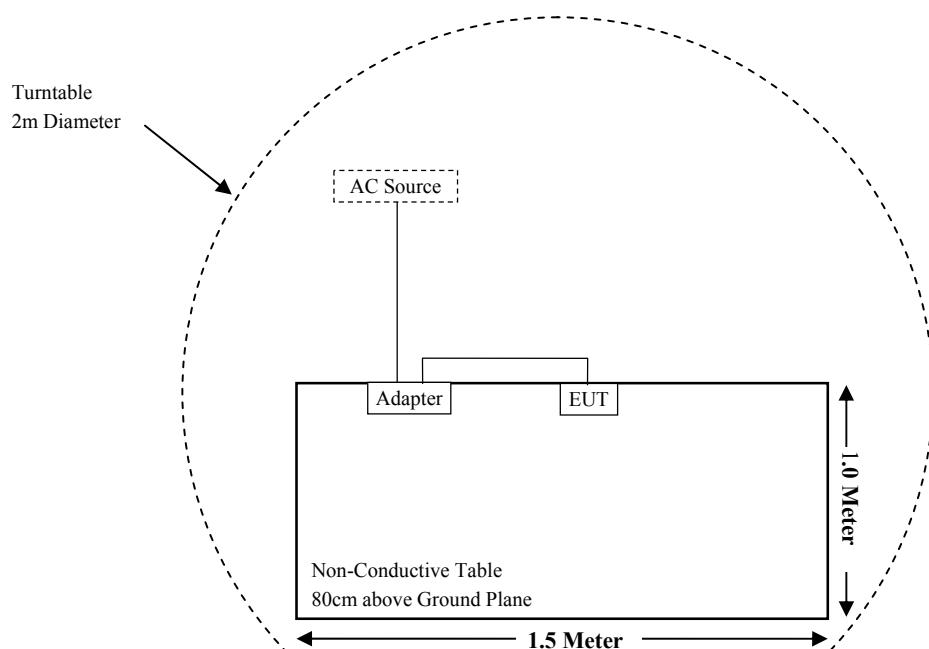

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.225 §15.209 §15.205	Radiated Emission Test	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	20dB Emission Bandwidth Testing	Compliance

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test (Chamber 1#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-12	2019-11-11
ETS-LINDGREN	PASSIVE LOOP	6512	108100	2016-01-09	2019-01-08
ETS-LINDGREN	PASSIVE LOOP	6512	108100	2019-01-09	2022-01-08
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrunent	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
<b>RF Conducted Test</b>					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-12	2019-11-11
BEST	DC Power Supply	PS-1502D+	DC001	2018-10-10	2019-10-09
BACL	Temperature & Humidity Chamber	BTH-150	30023	2018-10-10	2019-10-09
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2018-11-12	2019-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-12	2019-11-11
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **FCC§15.203 - ANTENNA REQUIREMENT**

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connected Construction**

The EUT has a coil antenna and antenna gain is 0dBi, which was permanently attached, fulfill the requirement of this section, please refer to the EUT photos.


**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207(a)

### EUT Setup

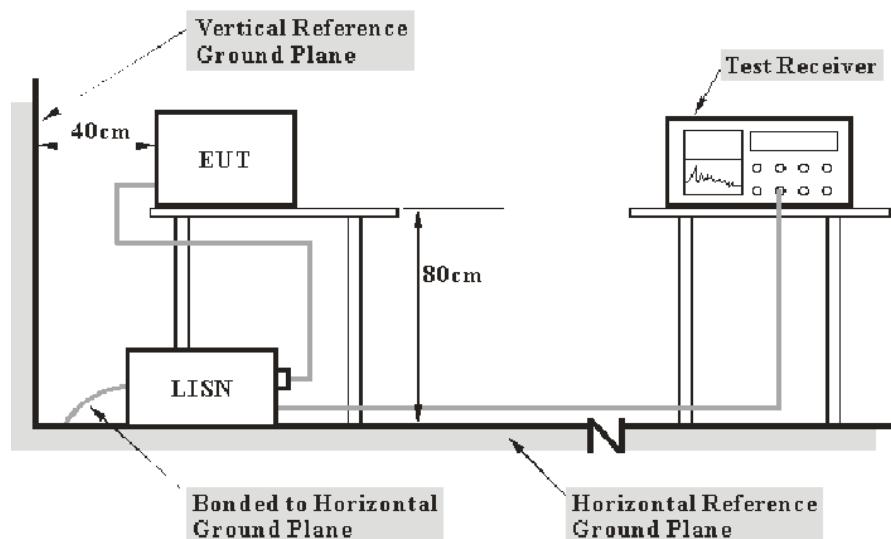

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Reading}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

## Test Data


### Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

*The testing was performed by Hope Zhang on 2019-01-03.*


*EUT operation mode: Transmitting*

## AC 120V/60 Hz, Line

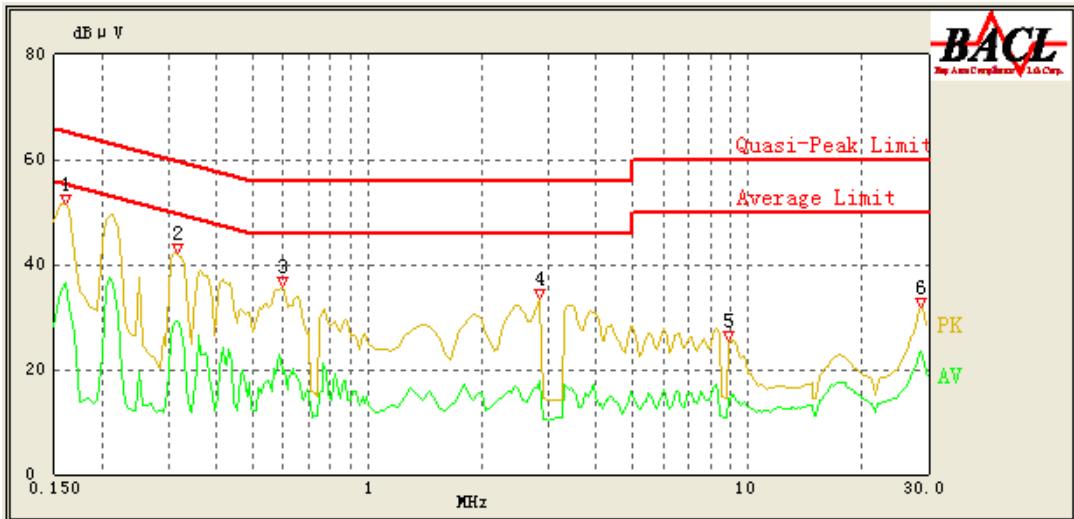

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Detector (QP/AV/AV)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Comment
0.160	51.66	QP	9.000	L1	16.05	65.46	13.80	Compliance
0.160	36.56	AV	9.000	L1	16.05	55.46	18.90	Compliance
0.315	42.26	QP	9.000	L1	16.04	59.84	17.58	Compliance
0.315	29.01	AV	9.000	L1	16.04	49.84	20.83	Compliance
0.600	35.87	QP	9.000	L1	16.02	56.00	20.13	Compliance
0.600	19.62	AV	9.000	L1	16.01	46.00	26.38	Compliance
2.850	33.43	QP	9.000	L1	15.85	56.00	22.57	Compliance
2.850	17.76	AV	9.000	L1	15.85	46.00	28.24	Compliance
8.950	25.66	QP	9.000	L1	16.03	60.00	34.34	Compliance
8.950	14.60	AV	9.000	L1	16.03	50.00	35.40	Compliance
28.700	31.98	QP	9.000	L1	16.56	60.00	28.02	Compliance
28.700	23.51	AV	9.000	L1	16.55	50.00	26.49	Compliance

## AC 120V/60 Hz, Neutral

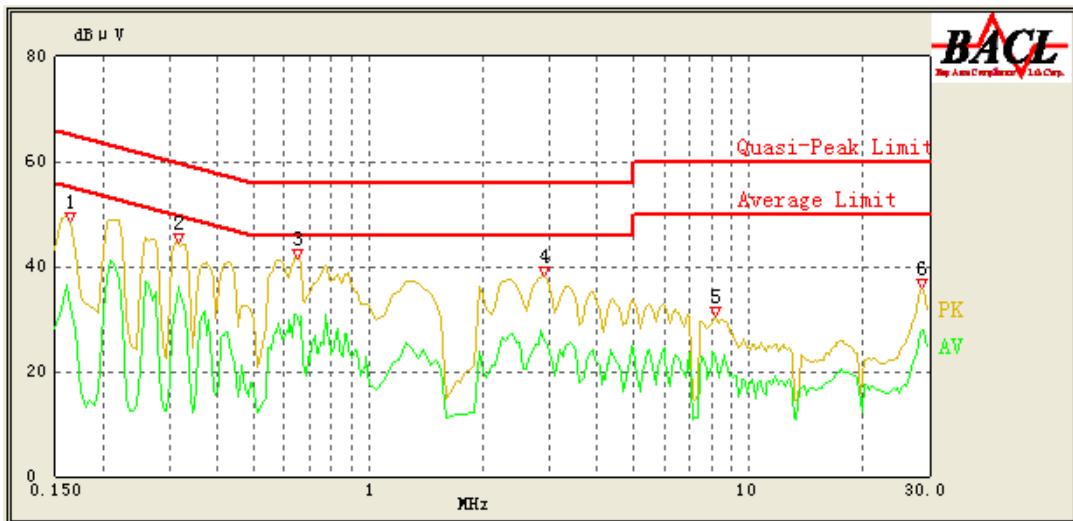

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Detector (QP/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Comment
0.165	48.55	QP	9.000	N	16.06	65.21	16.66	Compliance
0.165	32.44	AV	9.000	N	16.06	55.21	22.77	Compliance
0.315	44.48	QP	9.000	N	16.07	59.84	15.36	Compliance
0.315	36.33	AV	9.000	N	16.07	49.84	13.51	Compliance
0.650	41.51	QP	9.000	N	16.02	56.00	14.49	Compliance
0.650	30.53	AV	9.000	N	16.02	46.00	15.47	Compliance
2.900	38.02	QP	9.000	N	15.90	56.00	17.98	Compliance
2.900	25.96	AV	9.000	N	15.90	46.00	20.04	Compliance
8.150	30.66	QP	9.000	N	15.95	60.00	29.34	Compliance
8.150	23.67	AV	9.000	N	15.94	50.00	26.33	Compliance
28.600	35.90	QP	9.000	N	16.31	60.00	24.10	Compliance
28.600	27.91	AV	9.000	N	16.31	50.00	22.09	Compliance


**Note:**

- 1) Corrected Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation
- 2) Margin = Limit – Reading

**FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST****Applicable Standard**

As per FCC Part 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

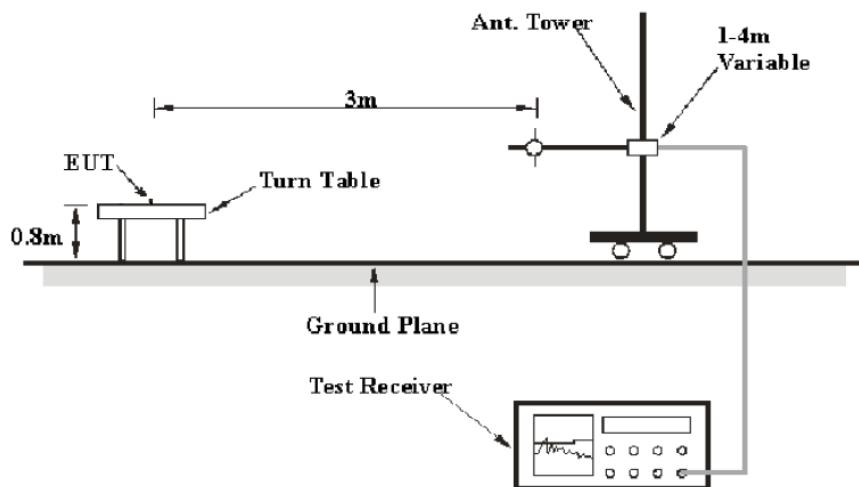**EUT Setup**

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI C63.10. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	200 Hz	1 kHz	/	QP
150 kHz – 30 MHz	9 kHz	30 kHz	/	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Factor = Antenna Factor + Cable Loss- Amplifier Gain

Corrected Amplitude = Meter Reading + Corrected Factor

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209, 15.205, 15.225.

## Test Data


### Environmental Conditions

Temperature:	23.2-24.2 °C
Relative Humidity:	48-50 %
ATM Pressure:	100.2-101.3 kPa

*The testing was performed by Hope Zhang from 2019-01-01 to 2019-01-25.*

*Test mode: Transmitting*

## 1) Spurious Emissions (9 kHz~150kHz):

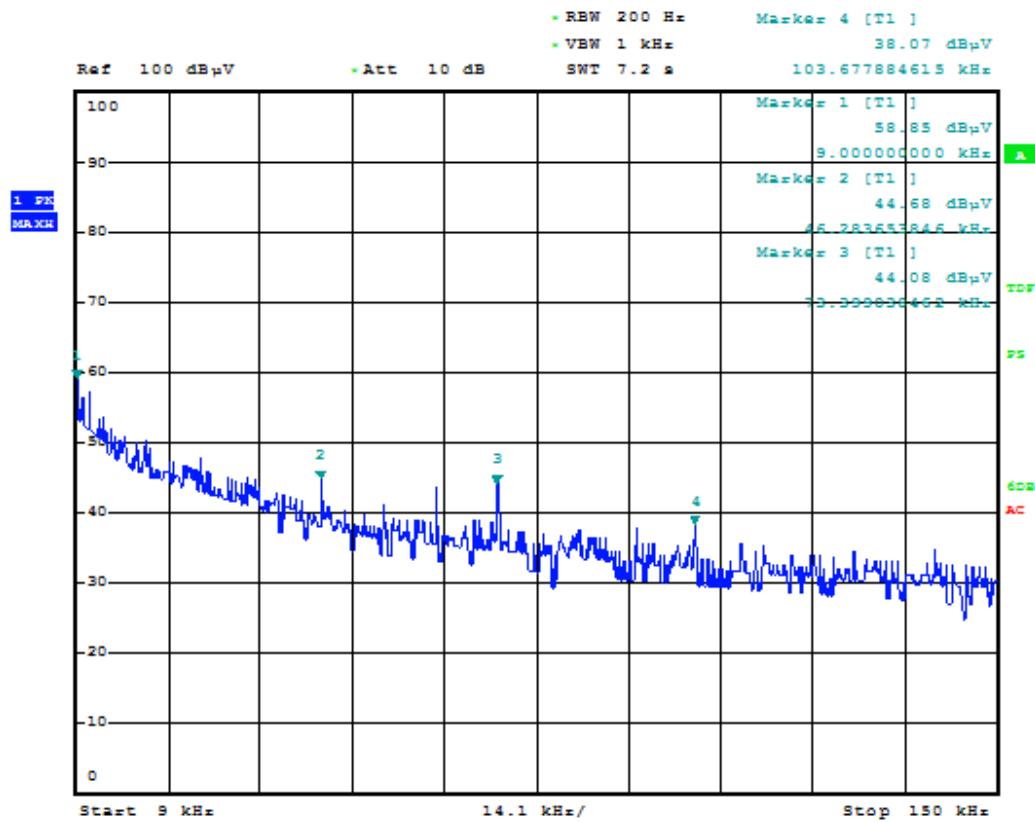


Date: 1.JAN.2019 14:55:06

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	FCC Part 15.225\15.209	
				Limit (dBμV/m) @3m	Margin (dB)
0.009000	58.85	PK	86.20	128.52	69.67
0.046283	44.68	PK	73.59	114.30	69.62
0.073399	44.08	PK	69.34	110.29	66.21
0.103678	38.07	PK	66.30	107.29	69.22
0.112642	35.64	PK	65.67	106.57	70.93
0.124893	34.29	PK	65.00	105.67	71.38

Note: The EMI Test Receiver only can mark 4 points, and there are 2 points recorded by manual. The average emissions which fall into frequencies 9-90 kHz, 110-490 kHz was not recorded, because the peak emissions are below the average limit.

## 2) Spurious Emissions (150 kHz~30MHz):

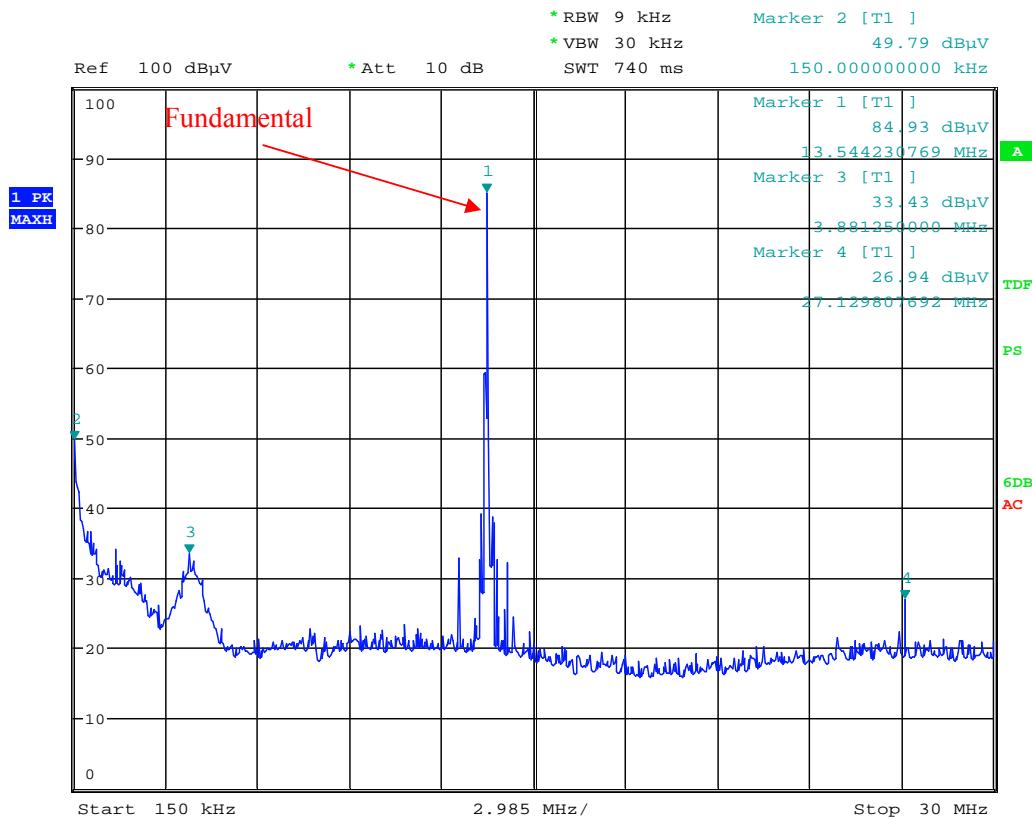


Date: 1.JAN.2019 14:52:20

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	FCC Part 15.225\15.209	
				Limit (dB $\mu$ V/m) @3m	Margin (dB)
0.15000	49.79	PK	63.60	104.08	54.29
2.88125	33.43	PK	39.89	69.54	36.11
13.5442	84.93	PK	35.31	124.00	39.07
14.3685	31.02	PK	35.25	69.54	38.52
18.2564	21.24	PK	35.04	69.54	48.30
27.1298	26.94	PK	34.50	69.54	42.60

Note: The EMI Test Receiver only can mark 4 points, and there are 2 points recorded by manual.

Note: The average emissions which fall into frequencies 9-90 kHz, 110-490 kHz was not recorded, because the peak emissions are below the average limit.


## 3) Spurious Emissions (13MHz~14MHz):

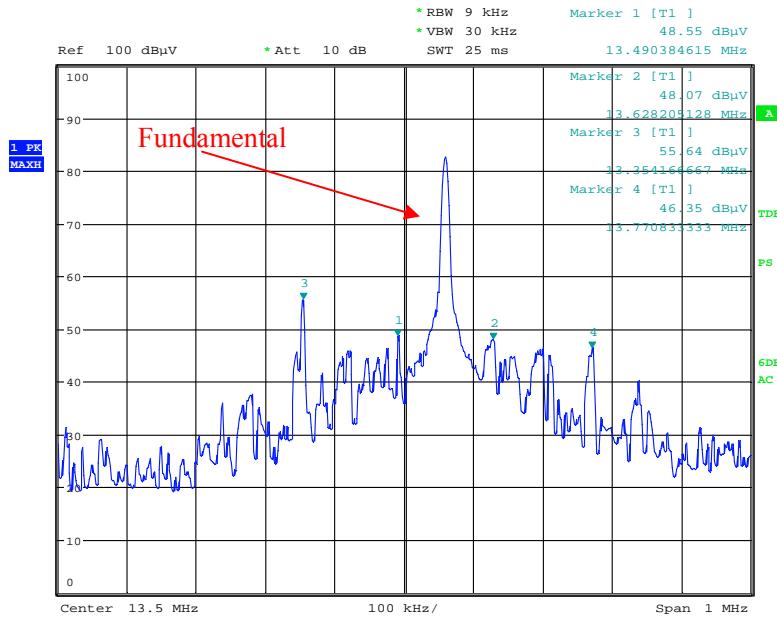

Date: 25.JAN.2019 09:02:00

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	FCC Part 15.225\15.209	
				Limit (dB $\mu$ V/m) @3m	Margin (dB)
13.490	48.55	PK	35.31	90.50	41.95
13.628	48.07	PK	35.32	90.50	42.43
13.354	55.64	PK	35.31	80.50	24.86
13.712	64.10	PK	35.32	80.50	16.40

## 3) Spurious Emissions (30 MHz ~1 GHz):

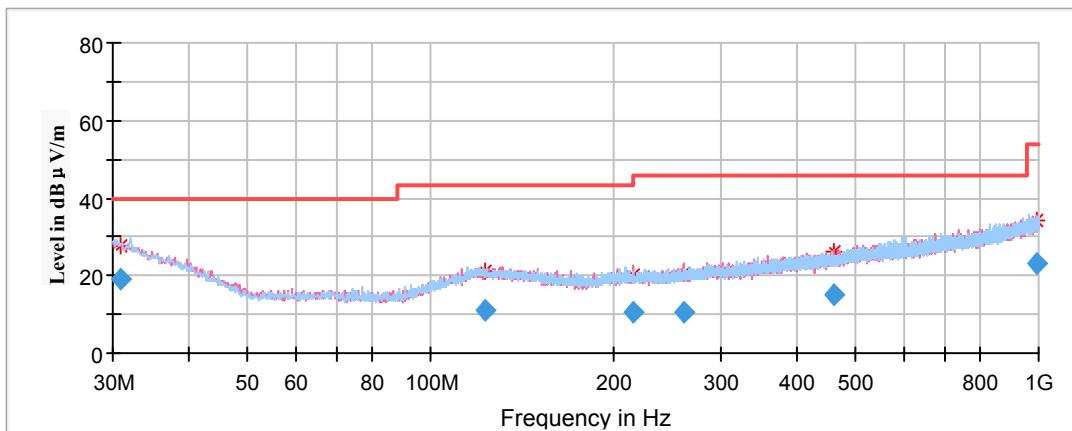

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V/m)	Height (cm)	Polar (H/V)				
31.002550	18.89	198.0	H	77.0	-4.6	40.00	21.11
122.427150	11.11	198.0	H	197.0	-11.3	43.50	32.39
215.232900	10.32	198.0	V	0.0	-12.3	43.50	33.18
260.993150	10.61	198.0	V	336.0	-11.7	46.00	35.39
459.312050	15.18	198.0	V	253.0	-7.2	46.00	30.82
992.945150	23.23	198.0	V	336.0	2.1	53.90	30.67

**Note:**

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (Rx) + cable loss – amplifier factor

Margin = Limit - Corrected Amplitude

## FCC§15.225(e) - FREQUENCY STABILITY

### Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from  $85\%$  to  $115\%$  of the rated supply voltage at a temperature of  $20$  degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### Test Procedure

- a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.
- b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g.,  $15$  cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.  
NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.
- c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at  $2$  minutes,  $5$  minutes, and  $10$  minutes after the EUT is energized. Four measurements in total are made.
- g) Measure the frequency at each of frequencies specified in 5.6.
- h) Switch OFF the EUT but do not switch OFF the oscillator heater.
- i) Lower the chamber temperature by not more than  $10$  °C, and allow the temperature inside the chamber to stabilize.
- j) Repeat step f) through step i) down to the lowest specified temperature.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	23.2 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.3 kPa

The testing was performed by Hope Zhang on 2019-01-03.

Test Mode: Transmitting.

Test Result: Pass

$F_0=13.56\text{MHz}$				
<b>Power Supply(V<sub>DC</sub>)</b>	<b>Temperature (°C)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Error</b>	<b>Part 15.225 Limit</b>
7.4	-20	13.55941	-0.00435%	±0.01%
	-10	13.55842	-0.00428%	±0.01%
	0	13.55792	-0.00796%	±0.01%
	10	13.55624	-0.00782%	±0.01%
	20	13.55648	0.00354%	±0.01%
	30	13.55942	-0.00428%	±0.01%
	40	13.55912	-0.00649%	±0.01%
	50	13.55874	-0.00929%	±0.01%
7.0	20	13.55648	-0.00760%	±0.01%
8.4	20	13.55672	-0.00944%	±0.01%

## **§15.215(c) - 20dB EMISSION BANDWIDTH TESTING**

### **Requirement**

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

### **Test Data**

#### **Environmental Conditions**


<b>Temperature:</b>	23.2 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.3 kPa

*The testing was performed by Hope Zhang on 2019-01-04.*

*Test Mode: Transmitting*

*Test Result: Pass*

Frequency (MHz)	20 dB Bandwidth (kHz)
13.56	5.31

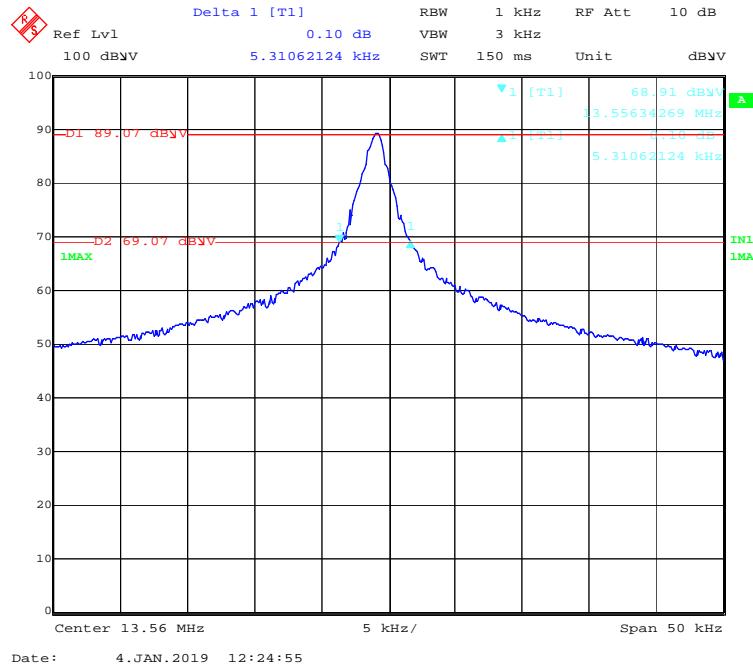**20 dB Emission Bandwidth****\*\*\*\*\* END OF REPORT \*\*\*\*\***