



REPORT No. : SZ17050133S05

# RF EXPOSURE EVALUATION REPORT

**APPLICANT** : Pycom Ltd

**PRODUCT NAME** : Double Network (WiFi and Bluetooth) IoT development Module powered by MicroPython.

**MODEL NAME** : W01 1.0

**TRADE NAME** : WiPy OEM

**BRAND NAME** : Pycom

**FCC ID** : 2AJMTWIPY01R

**STANDARD(S)** : 47CFR 2.1091  
KDB 447498 D01 General RF Exposure Guidance v06

**ISSUE DATE** : 2017-09-01

**SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.**

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB GROUP**

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, Shenzhen , GuangDong Province, P. R. China

Tel: 86-755-36698555  
Fax: 86-755-36698525  
Http://www.morlab.com  
E-mail: service@morlab.cn



## DIRECTORY

<b>TEST REPORT DECLARATION</b>	<b>3</b>
<b>1. TECHNICAL INFORMATION</b>	<b>3</b>
<b>1.1. IDENTIFICATION OF APPLICANT</b>	<b>4</b>
<b>1.2. IDENTIFICATION OF MANUFACTURER</b>	<b>4</b>
<b>1.3. EQUIPMENT UNDER TEST (EUT)</b>	<b>4</b>
1.3.1. PHOTOGRAPHS OF THE EUT	5
1.3.2. IDENTIFICATION OF ALL USED EUT	6
<b>1.4. APPLIED REFERENCE DOCUMENTS</b>	<b>6</b>
<b>2. DEVICE CATEGORY AND RF EXPOSURE LIMIT</b>	<b>7</b>
<b>3. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER</b>	<b>8</b>
<b>4. RF EXPOSURE EVALUATION</b>	<b>9</b>
<b>ANNEX C GENERAL INFORMATION</b>	<b>10</b>

Change History		
Issue	Date	Reason for change
1.0	2017-09-01	First edition



## TEST REPORT DECLARATION

Applicant	Pycom Ltd
Applicant Address	Registered Office 57 Avenue Road Cranleigh, Surrey GU6 7LJ UK
Manufacturer	In-Tech Electronics Ltd
Manufacturer Address	2/F Rhythm Home, 119 Shazui Road, Futian, Shenzhen, Guangdong, P.R.China
Product Name	Double Network (WiFi and Bluetooth) IoT development Module powered by MicroPython.
Model Name	W01 1.0
Brand Name	Pycom
HW Version	1.0r
SW Version	1.0
Test Standards	47CFR 2.1091; KDB 447498 D01 General RF Exposure Guidance v06
Issue Date	2017-09-01
SAR Evaluation	Not Required

Tested by

Peng Fuwei (Test engineer)

Approved by

Peng Huarui (Supervisor)



## 1. TECHNICAL INFORMATION

Note: the following data is based on the information by the applicant.

### 1.1. Identification of Applicant

Company Name:	Pycom Ltd
Address:	Registered Office 57 Avenue Road Cranleigh, Surrey GU6 7LJ UK

### 1.2. Identification of Manufacturer


Company Name:	In-Tech Electronics Ltd
Address:	2/F Rhythm Home, 119 Shazui Road, Futian, Shenzhen, Guangdong, P.R.China

### 1.3. Equipment Under Test (EUT)


Model Name:	Double Network (WiFi and Bluetooth) IoT development Module powered by MicroPython.
Trade Name:	WiPy OEM
Brand Name:	Pycom
Hardware Version:	1.0r
Software Version:	1.0
Frequency Bands:	Bluetooth 4.0:2402-2480MHz; Wifi802.11b/g/n:2412-2484MHz;
Modulation Mode:	Bluetooth 4.0: GFSK; Wifi802.11b: DSSS; Wifi802.11g/n: OFDM;
Antenna 1 type:	Ceramic Antenna
Antenna 1 Gain:	-0.5dBi
Antenna 2 type:	External Antenna
Antenna 2 type:	2.0dBi

### 1.3.1. Photographs of the EUT

#### 1. EUT rear view

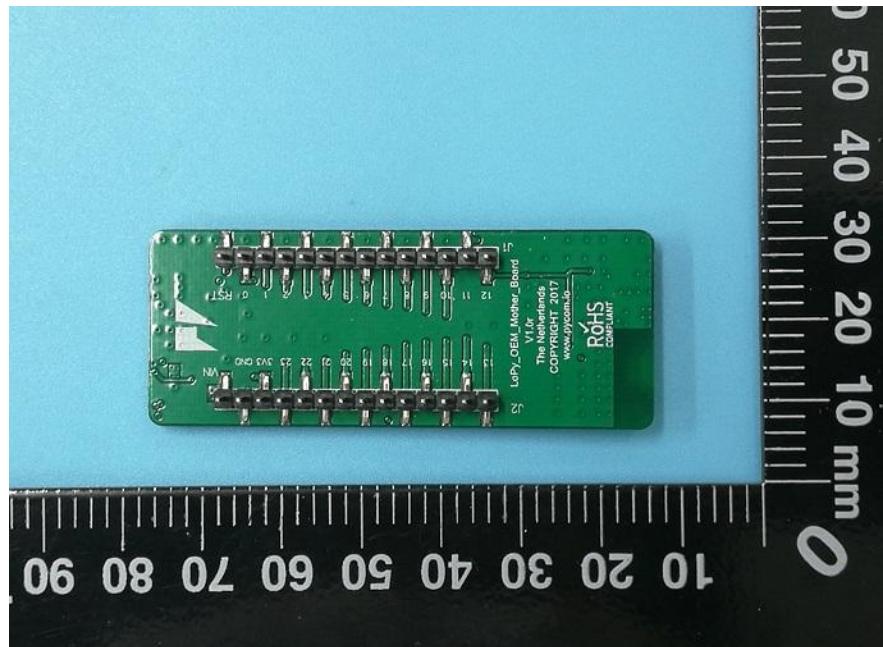

#### 2. EUT front view

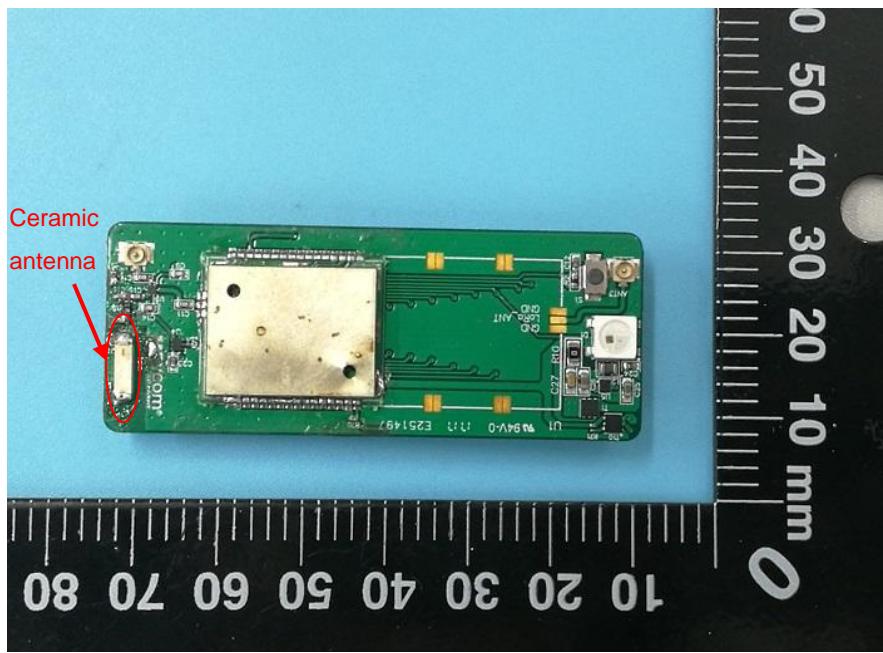



## 3. EUT External antenna view

**1.3.2. Identification of all used EUT**

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	1.0r	1.0

**1.4. Applied Reference Documents**

Leading reference documents for testing:

No.	Identity	Document Title
1	<b>47 CFR§2.1091</b>	Radiofrequency Radiation Exposure Evaluation: mobile devices
2	<b>KDB 447498 D01v06</b>	General RF Exposure Guidance



## 2. DEVICE CATEGORY AND RF EXPOSURE LIMIT

Per user manual, Based on 47CFR 2.1091, this device belongs to mobile device category with General Population/Uncontrolled exposure.

### Mobile Devices:

47CFR 2.1091(b)

For purposes of this section, a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons. In this context, the term "fixed location" means that the device is physically secured at one location and is not able to be easily moved to another location. Transmitting devices designed to be used by consumers or workers that can be easily re-located, such as wireless devices associated with a personal computer, are considered to be mobile devices if they meet the 20 centimeter separation requirement.

### GENERAL POPULATION / UNCONTROLLED EXPOSURE

The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	f/1500	30
1500-100,000	-	-	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density



### 3. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER

#### 1. Bluetooth Average output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			GFSK	$\pi/4$ -DQPSK	8-DPSK
BT 2.1+EDR	0	2402	5.01	6.86	7.19
	19	2440	5.15	7.02	7.29
	39	2480	4.49	6.26	6.62

Band	Channel	Frequency (MHz)	Output Power(dBm)
			GFSK
BT4.0	0	2402	-2.31
	19	2440	-1.52
	39	2480	-0.65

#### 2. Wifi Average output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			802.11b (DSSS)	802.11g (OFDM)	802.11n20 (OFDM)
Wifi	1	2412	9.41	9.09	9.03
	6	2437	10.84	10.59	10.53
	11	2462	13.39	12.94	13.09

Band	Channel	Frequency (MHz)	Output Power(dBm)
			802.11n40 (OFDM)
Wifi	3	2422	6.91
	6	2437	7.93
	9	2452	9.11



## 4 RF EXPOSURE EVALUATION

### Standalone transmission MPE evaluation

#### Antenna 1:

Bands	Frequency (MHz)	Antenna Gain (dBi)	Conducted Average Power (dBm)	Time -averaging EIRP (mW)	Power density (mW/cm <sup>2</sup> )	Limit for MPE (mW/cm <sup>2</sup> )
BT2.1+EDR	2440	-0.5	7.29	0.44	0.0001	2.705
BT4.0	2480	-0.5	-0.65	0.77	0.0002	2.736
2.4GHz	2462	-0.5	13.39	19.45	0.0039	2.722

#### Antenna 2:

Bands	Frequency (MHz)	Antenna Gain (dBi)	Conducted Average Power (dBm)	Time -averaging EIRP (mW)	Power density (mW/cm <sup>2</sup> )	Limit for MPE (mW/cm <sup>2</sup> )
BT2.1+EDR	2440	2.0	7.29	7.09	0.0014	2.705
BT4.0	2480	2.0	-0.65	1.36	0.0003	2.736
2.4GHz	2462	2.0	13.39	34.59	0.0069	2.722



## ANNEX C GENERAL INFORMATION

### 1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

### 2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

\*\*\*\*\* END OF REPORT \*\*\*\*\*