

# FCC Radio Test Report

## FCC ID: 2AJN7-LN500CG3

**Report No.** : BTL-FCCP-1-2101T085  
**Equipment** : Notebook Computer  
**Model Name** : Lenovo 500e Chromebook Gen 3  
**Brand Name** : Lenovo  
**Applicant** : LC Future Center  
**Address** : 7F., No. 780, Beian Rd., Zhongshan Dist., Taipei City 104, Taiwan

**Radio Function** : WCDMA Band V, LTE Band 5, 26

**FCC Rule Part(s)** : 47 CFR FCC Part 22 Subpart H  
**Measurement** : ANSI C63.26-2015  
**Procedure(s)** : ANSI/TIA-603-E-2016  
FCC KDB 971168 D01 Power Meas License Digital Systems v03r01


**Date of Receipt** : 2021/1/18  
**Date of Test** : 2021/1/18 ~ 2021/4/6  
**Issued Date** : 2021/4/23

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by

  
Peter Chen, Engineer

Approved by

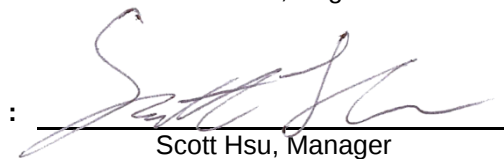:   
Scott Hsu, Manager



**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299

Fax: +886-2-2657-3331

Web: [www.newbtl.com](http://www.newbtl.com)

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

**CONTENTS**

|            |                                                          |    |
|------------|----------------------------------------------------------|----|
| 1          | SUMMARY OF TEST RESULTS                                  | 5  |
| 1.1        | TEST FACILITY                                            | 6  |
| 1.2        | MEASUREMENT UNCERTAINTY                                  | 6  |
| 1.3        | TEST ENVIRONMENT CONDITIONS                              | 6  |
| 2          | GENERAL INFORMATION                                      | 7  |
| 2.1        | DESCRIPTION OF EUT                                       | 7  |
| 2.2        | TEST MODES                                               | 7  |
| 2.3        | BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 8  |
| 2.4        | SUPPORT UNITS                                            | 8  |
| 3          | AC POWER LINE CONDUCTED EMISSIONS TEST                   | 9  |
| 3.1        | LIMIT                                                    | 9  |
| 3.2        | TEST PROCEDURE                                           | 9  |
| 3.3        | DEVIATION FROM TEST STANDARD                             | 9  |
| 3.4        | TEST SETUP                                               | 10 |
| 3.5        | TEST RESULT                                              | 10 |
| 4          | RADIATED SPURIOUS EMISSIONS MEASUREMENT                  | 11 |
| 4.1        | LIMIT                                                    | 11 |
| 4.2        | TEST PROCEDURE                                           | 11 |
| 4.3        | DEVIATION FROM TEST STANDARD                             | 11 |
| 4.4        | TEST SETUP                                               | 12 |
| 4.5        | EUT OPERATING CONDITIONS                                 | 12 |
| 4.6        | TEST RESULT                                              | 12 |
| 5          | LIST OF MEASURING EQUIPMENTS                             | 13 |
| 6          | EUT TEST PHOTO                                           | 14 |
| 7          | EUT PHOTOS                                               | 14 |
| APPENDIX A | AC POWER LINE CONDUCTED EMISSIONS                        | 15 |
| APPENDIX B | RADIATED SPURIOUS EMISSIONS                              | 20 |

**REVISION HISTORY**

| Report No.          | Version | Description                                    | Issued Date |
|---------------------|---------|------------------------------------------------|-------------|
| BTL-FCCP-1-2101T085 | R00     | Original Report.                               | 2021/4/12   |
| BTL-FCCP-1-2101T085 | R01     | Modified applicant information and model name. | 2021/4/23   |

## 1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

| FCC Clause No       | Description                       | Test Result | Judgement | Remark |
|---------------------|-----------------------------------|-------------|-----------|--------|
| 15.207              | AC Power Line Conducted Emissions | APPENDIX A  | Pass      | -----  |
| 2.1053<br>22.917(a) | Radiated Spurious Emissions       | APPENDIX B  | Pass      | -----  |

**NOTE:**

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) The spot check test channels were verified based on the worst channel results reported in the original FCC ID (ZMOL850GL) filing test report.  
Since the RF module has been certificated, after evaluation, above test items were criticized and reconfirmed in this report.
- (4) After spot check, this revision does not change original radio parameters.

### 1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

☒ C05      ☐ CB08      ☐ CB11      ☒ CB15      ☐ CB16

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k = 2$ , providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

A. AC power line conducted emissions test:

| Test Site | Method | Measurement Frequency Range | U (dB) |
|-----------|--------|-----------------------------|--------|
| C05       | CISPR  | 150 kHz ~ 30MHz             | 3.44   |

B. Radiated emissions test :

| Test Site | Measurement Frequency Range | U,(dB) |
|-----------|-----------------------------|--------|
| CB15      | 0.03 GHz ~ 0.2 GHz          | 4.17   |
|           | 0.2 GHz ~ 1 GHz             | 4.72   |
|           | 1 GHz ~ 6 GHz               | 5.21   |
|           | 6 GHz ~ 18 GHz              | 5.51   |
|           | 18 GHz ~ 26 GHz             | 3.69   |
|           | 26 GHz ~ 40 GHz             | 4.23   |

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

| Test Item                         | Environment Condition | Test Voltage | Tested by   |
|-----------------------------------|-----------------------|--------------|-------------|
| AC Power Line Conducted Emissions | 24 °C, 68 %           | AC 120V      | Vincent Lee |
| Radiated Spurious Emissions       | Refer to data         | AC 120V      | Jay Kao     |

## 2 GENERAL INFORMATION

### 2.1 DESCRIPTION OF EUT

|                     |                                                                                                                                 |                    |                    |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------------|
| Equipment           | Notebook Computer                                                                                                               |                    |                    |
| Model Name          | Lenovo 500e Chromebook Gen 3                                                                                                    |                    |                    |
| Brand Name          | Lenovo                                                                                                                          |                    |                    |
| Model Difference    | N/A                                                                                                                             |                    |                    |
| Power Source        | DC voltage supplied from External Power Supply.                                                                                 |                    |                    |
| Power Rating        | Brand : Lenovo<br>M/N : ADLX65YAC3D<br>I/P: 100-240V~1.8A, 50-60Hz<br>O/P: 20V---3.25A 65W / 15V---3A / 9V---2A / 5V---2A 10.0W |                    |                    |
|                     | Brand : Lenovo<br>M/N : ADLX45YLC2D<br>I/P: 100-240V~1.3A 50-60Hz<br>O/P: 20V---2.25A 45W / 15V---3A / 9V---2A / 5V---2A 10.0W  |                    |                    |
| Products Covered    | 2 * Adapter: Lenovo/ ADLX65YAC3D, ADLX45YLC2D                                                                                   |                    |                    |
| WWAN Module         | Fibocom / L850-GL                                                                                                               |                    |                    |
| Operation Frequency | Band                                                                                                                            | UL Frequency (MHz) | DL Frequency (MHz) |
|                     | WCDMA V                                                                                                                         | 824 ~ 849          | 869 ~ 894          |
|                     | LTE 5                                                                                                                           | 824 ~ 849          | 869 ~ 894          |
|                     | LTE 26                                                                                                                          | 824 ~ 849          | 869 ~ 894          |
| Test Model          | Lenovo 500e Chromebook Gen 3                                                                                                    |                    |                    |
| Sample Status       | Engineering Sample                                                                                                              |                    |                    |
| EUT Modification(s) | N/A                                                                                                                             |                    |                    |

**NOTE:**

(1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

(2) Table for Filed Antenna:

| Antenna | Manufacturer | Parts Number | Type | Connector | Gain (dBi) | Note         |
|---------|--------------|--------------|------|-----------|------------|--------------|
| Main    | INPAQ        | DC33001TN00  | PIFA | I-PEX     | -1.93      | WCDMA Band V |
|         |              |              |      |           | -1.93      | LTE Band 5   |
| Aux     | INPAQ        | DC33001TN10  | PIFA | I-PEX     | -          | LTE Band 26  |
|         |              |              |      |           |            | RX only      |

### 2.2 TEST MODES

| Test Items                        | Band         | Test Mode                      | Note |
|-----------------------------------|--------------|--------------------------------|------|
| AC Power Line Conducted Emissions | -            | Normal/Idle                    | -    |
| Radiated Spurious Emissions       | WCDMA Band V | TX Mode (CH 4357/4407/4458)    | -    |
|                                   | LTE Band 5   | TX Mode (CH 20450/20525/20600) | -    |
|                                   | LTE Band 26  | TX Mode (CH 26865/26915/26965) | -    |

**NOTE:**

(1) The Radiated emissions test was verified based on the worst conducted power and Bandwidth test results reported in the original report.


(2) The EUT includes two adapters and both are evaluated. Only the worst case is used for final test.

(3) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.


### 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC Power Line Conducted Emissions Test

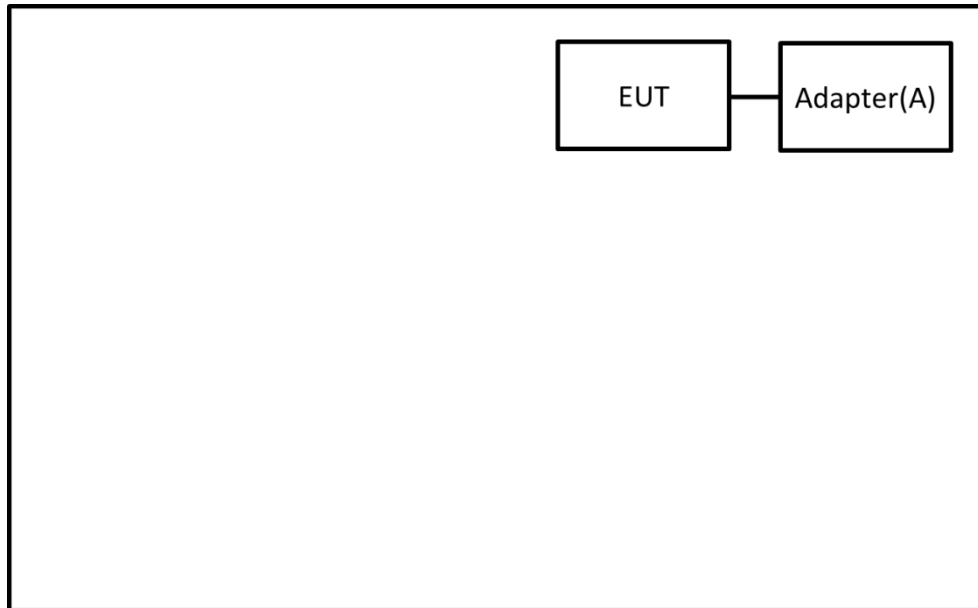

Radiated Emissions Test

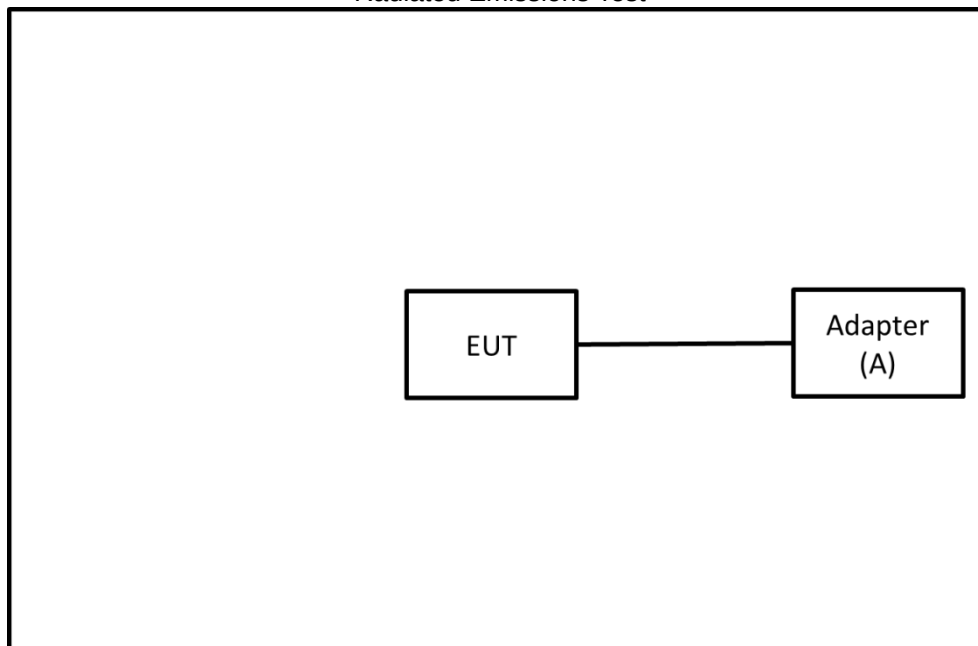

### 2.4 SUPPORT UNITS

| Item | Equipment | Brand  | Model No.   | Series No. | Remarks                     |
|------|-----------|--------|-------------|------------|-----------------------------|
| A    | Adapter   | Lenovo | ADLX65YAC3D | N/A        | Supplied by test requester. |

| Item | Shielded | Ferrite Core | Length | Cable Type | Remarks                |
|------|----------|--------------|--------|------------|------------------------|
| 1    | N/A      | N/A          | 0.9m   | Power Cord | Furnished by test lab. |

### 3 AC POWER LINE CONDUCTED EMISSIONS TEST

#### 3.1 LIMIT

| Frequency<br>(MHz) | Limit (dBμV) |           |
|--------------------|--------------|-----------|
|                    | Quasi-peak   | Average   |
| 0.15 - 0.5         | 66 - 56 *    | 56 - 46 * |
| 0.50 - 5.0         | 56           | 46        |
| 5.0 - 30.0         | 60           | 50        |

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)  
 Margin Level = Measurement Value – Limit Value  
 Calculation example:

| Reading Level |   | Correct Factor |   | Measurement Value |
|---------------|---|----------------|---|-------------------|
| 38.22         | + | 3.45           | = | 41.67             |

| Measurement Value |   | Limit Value |   | Margin Level |
|-------------------|---|-------------|---|--------------|
| 41.67             | - | 60          | = | -18.33       |

The following table is the setting of the receiver.

| Receiver Parameter | Setting  |
|--------------------|----------|
| Attenuation        | 10 dB    |
| Start Frequency    | 0.15 MHz |
| Stop Frequency     | 30 MHz   |
| IF Bandwidth       | 9 KHz    |

#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).  
 All other support equipment were powered from an additional LISN(s).  
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.  
 The end of the cable will be terminated, using the correct terminating impedance.  
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.  
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation.

### 3.4 TEST SETUP

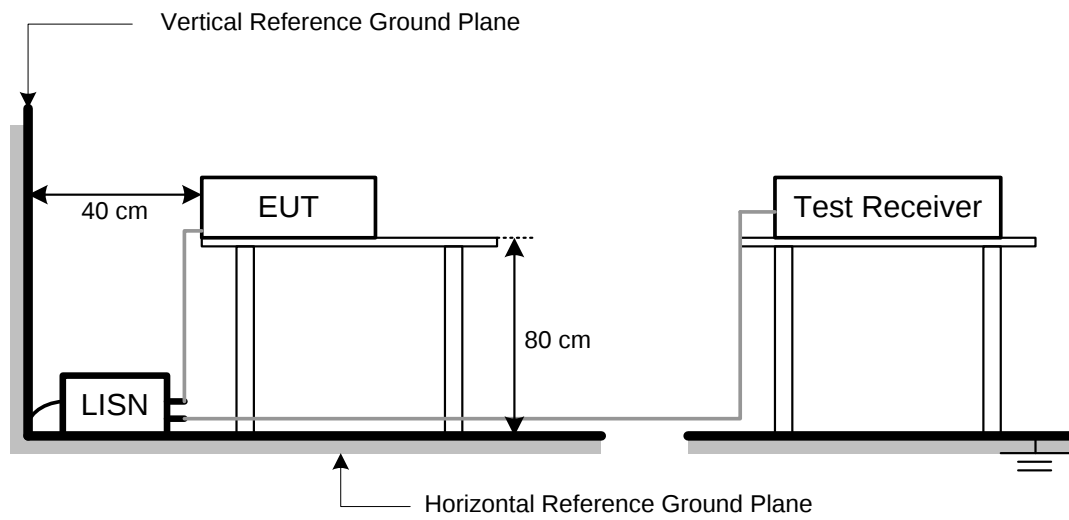

### 3.5 TEST RESULT

Please refer to the APPENDIX A.

## 4 RADIATED SPURIOUS EMISSIONS MEASUREMENT

### 4.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

| Reading Level |   | Correct Factor |   | Measurement Value |
|---------------|---|----------------|---|-------------------|
| -50.43        | + | -2.11          | = | -52.54            |

| Measurement Value |   | Limit Value |   | Margin Level |
|-------------------|---|-------------|---|--------------|
| -52.54            | - | -13         | = | -39.54       |

### 4.2 TEST PROCEDURE


The testing follows FCC KDB 971168 v03r01 Section 6.2.

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- ERP can be calculated form EIRP by subtracting the gain of dipole,  $ERP = EIPR - 2.15\text{dBi}$ .
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

### 4.3 DEVIATION FROM TEST STANDARD

No deviation.

## 4.4 TEST SETUP

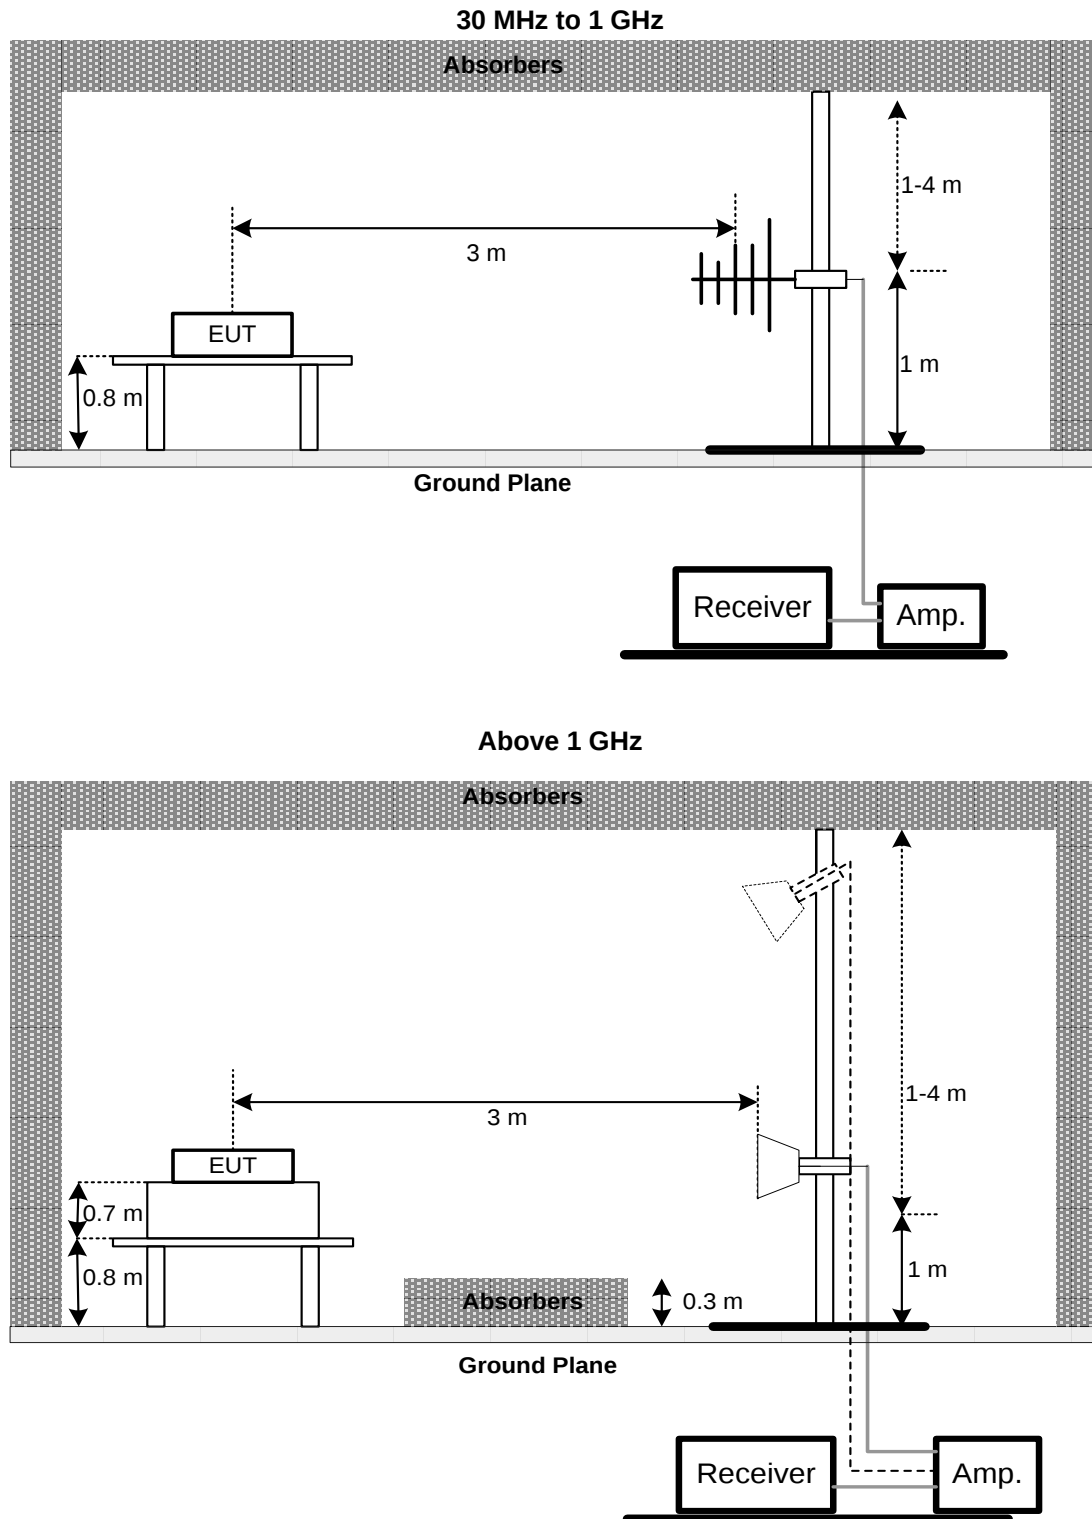

## 4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

## 4.6 TEST RESULT

Please refer to the APPENDIX B.

## 5 LIST OF MEASURING EQUIPMENTS

| AC Power Line Conducted Emissions |                      |              |                             |            |                 |                  |
|-----------------------------------|----------------------|--------------|-----------------------------|------------|-----------------|------------------|
| Item                              | Kind of Equipment    | Manufacturer | Type No.                    | Serial No. | Calibrated Date | Calibrated Until |
| 1                                 | TWO-LINE V-NETWORK   | R&S          | ENV216                      | 101050     | 2020/6/11       | 2021/6/10        |
| 2                                 | Test Cable           | EMCI         | EMC400-BM-BM-5000           | 170501     | 2020/6/8        | 2021/6/7         |
| 3                                 | EMI Test Receiver    | R&S          | ESCI                        | 100080     | 2020/6/15       | 2021/6/14        |
| 4                                 | Measurement Software | EZ           | EZ_EMC (Version NB-03A1-01) | N/A        | N/A             | N/A              |

| Radiated Emissions |                                      |              |                             |               |                 |                  |
|--------------------|--------------------------------------|--------------|-----------------------------|---------------|-----------------|------------------|
| Item               | Kind of Equipment                    | Manufacturer | Type No.                    | Serial No.    | Calibrated Date | Calibrated Until |
| 1                  | Preamplifier                         | EMCI         | EMC02325B                   | 980217        | 2020/4/10       | 2021/4/9         |
| 2                  | Preamplifier                         | EMCI         | EMC012645B                  | 980267        | 2020/4/10       | 2021/4/9         |
| 3                  | Test Cable                           | EMCI         | EMC-SM-SM-1000              | 180809        | 2020/4/10       | 2021/4/9         |
| 4                  | Test Cable                           | EMCI         | EMC104-SM-SM-3000           | 151205        | 2020/4/10       | 2021/4/9         |
| 5                  | Test Cable                           | EMCI         | EMC-SM-SM-7000              | 180408        | 2020/4/10       | 2021/4/9         |
| 6                  | MXE EMI Receiver                     | Agilent      | N9038A                      | MY554200087   | 2020/6/10       | 2021/6/9         |
| 7                  | Signal Analyzer                      | Agilent      | N9010A                      | MY56480554    | 2020/8/25       | 2021/8/24        |
| 8                  | Horn Ant                             | SCHWARZBECK  | BBHA 9120D                  | 9120D-1342    | 2020/6/12       | 2021/6/11        |
| 9                  | Horn Ant                             | Schwarzbeck  | BBHA 9170                   | BBHA 9170340  | 2020/7/9        | 2021/7/8         |
| 10                 | Trilog-Broadband Antenna             | Schwarzbeck  | VULB 9168                   | VULB 9168-352 | 2020/7/24       | 2021/7/23        |
| 11                 | 5dB Attenuator                       | EMCI         | EMCI-N-6-05                 | AT-N0625      | 2020/7/24       | 2021/7/23        |
| 12                 | Measurement Software                 | EZ           | EZ_EMC (Version NB-03A1-01) | N/A           | N/A             | N/A              |
| 13                 | 8960 Series 10 Wireless Com Test Set | Agilent      | E5515C                      | GB47390193    | 2020/6/4        | 2021/6/3         |
| 14                 | Radio Communication Analyzer (LTE)   | Anritsu      | MT8820C                     | 6201525878    | 2020/6/3        | 2021/6/2         |
| 15                 | Radio Communication Analyzer         | Anritsu      | MT8821C                     | 6262044728    | 2020/12/15      | 2021/12/14       |

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.  
All calibration period of equipment list is one year.

**6 EUT TEST PHOTO**


Please refer to document Appendix No.: TP-2101T085-FCCP-1 (APPENDIX-TEST PHOTOS).

**7 EUT PHOTOS**

Please refer to document Appendix No.: EP-2101T085-1 (APPENDIX-EUT PHOTOS).

## **APPENDIX A AC POWER LINE CONDUCTED EMISSIONS**

|                |        |             |           |
|----------------|--------|-------------|-----------|
| Test Mode      | Normal | Tested Date | 2021/3/31 |
| Test Frequency | -      | Phase       | Line      |

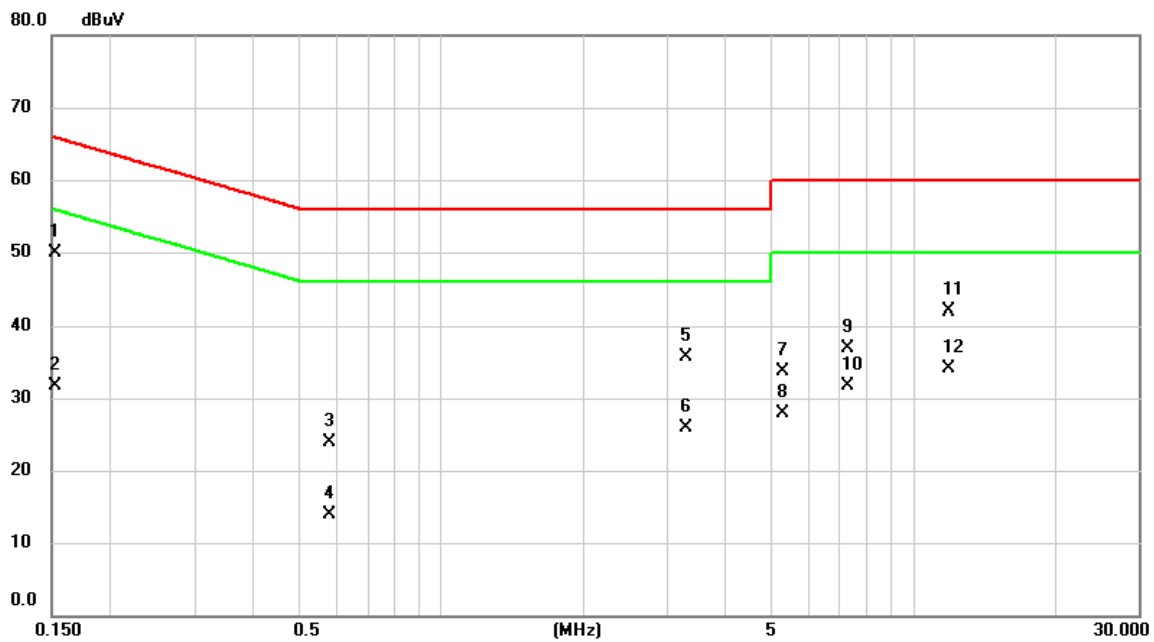


| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Margin |          |         |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector | Comment |
| 1   |     | 0.1522  | 40.27         | 9.68           | 49.95       | 65.88 | -15.93 | QP       |         |
| 2   |     | 0.1522  | 22.07         | 9.68           | 31.75       | 55.88 | -24.13 | AVG      |         |
| 3   |     | 0.5820  | 14.17         | 9.68           | 23.85       | 56.00 | -32.15 | QP       |         |
| 4   |     | 0.5820  | 4.18          | 9.68           | 13.86       | 46.00 | -32.14 | AVG      |         |
| 5   |     | 3.2932  | 25.86         | 9.77           | 35.63       | 56.00 | -20.37 | QP       |         |
| 6   |     | 3.2932  | 16.20         | 9.77           | 25.97       | 46.00 | -20.03 | AVG      |         |
| 7   |     | 5.2867  | 23.82         | 9.83           | 33.65       | 60.00 | -26.35 | QP       |         |
| 8   |     | 5.2867  | 18.14         | 9.83           | 27.97       | 50.00 | -22.03 | AVG      |         |
| 9   |     | 7.2960  | 27.13         | 9.87           | 37.00       | 60.00 | -23.00 | QP       |         |
| 10  |     | 7.2960  | 21.83         | 9.87           | 31.70       | 50.00 | -18.30 | AVG      |         |
| 11  |     | 11.8364 | 32.06         | 9.93           | 41.99       | 60.00 | -18.01 | QP       |         |
| 12  | *   | 11.8364 | 24.26         | 9.93           | 34.19       | 50.00 | -15.81 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |        |             |           |
|----------------|--------|-------------|-----------|
| Test Mode      | Normal | Tested Date | 2021/3/31 |
| Test Frequency | -      | Phase       | Neutral   |

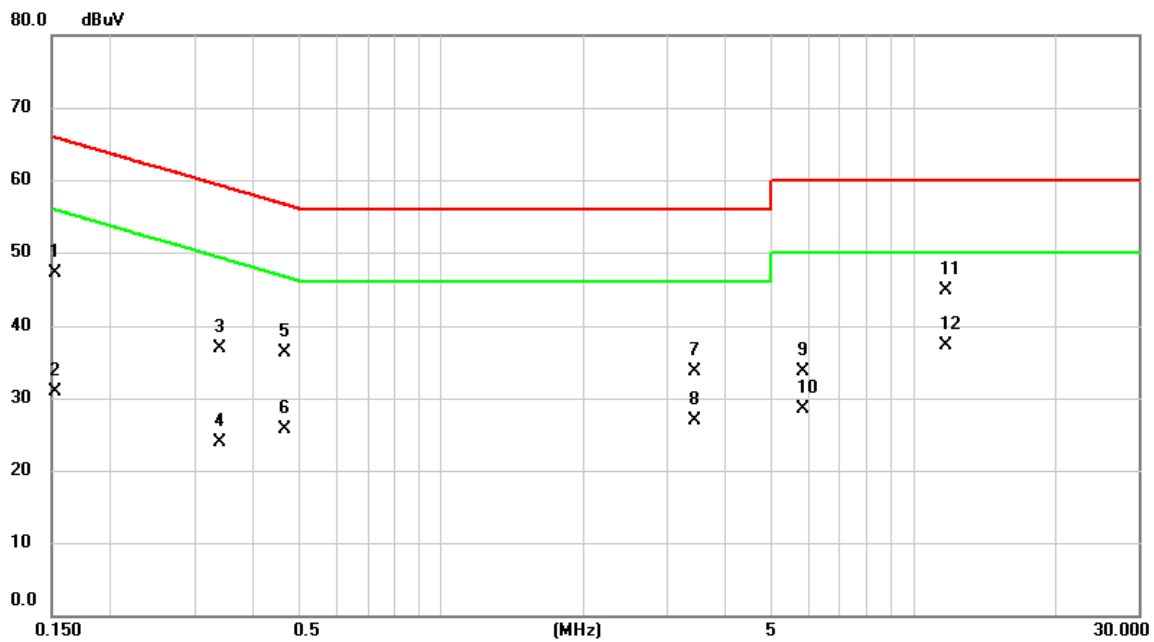


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1522       | 37.33                    | 9.68                    | 47.01                    | 65.88         | -18.87       | QP       |         |
| 2   |     | 0.1522       | 21.24                    | 9.68                    | 30.92                    | 55.88         | -24.96       | AVG      |         |
| 3   |     | 0.3390       | 27.26                    | 9.68                    | 36.94                    | 59.23         | -22.29       | QP       |         |
| 4   |     | 0.3390       | 14.27                    | 9.68                    | 23.95                    | 49.23         | -25.28       | AVG      |         |
| 5   |     | 0.4672       | 26.60                    | 9.68                    | 36.28                    | 56.56         | -20.28       | QP       |         |
| 6   |     | 0.4672       | 15.94                    | 9.68                    | 25.62                    | 46.56         | -20.94       | AVG      |         |
| 7   |     | 3.4507       | 23.96                    | 9.77                    | 33.73                    | 56.00         | -22.27       | QP       |         |
| 8   |     | 3.4507       | 17.20                    | 9.77                    | 26.97                    | 46.00         | -19.03       | AVG      |         |
| 9   |     | 5.8267       | 23.90                    | 9.84                    | 33.74                    | 60.00         | -26.26       | QP       |         |
| 10  |     | 5.8267       | 18.60                    | 9.84                    | 28.44                    | 50.00         | -21.56       | AVG      |         |
| 11  |     | 11.6677      | 34.87                    | 9.93                    | 44.80                    | 60.00         | -15.20       | QP       |         |
| 12  | *   | 11.6677      | 27.46                    | 9.93                    | 37.39                    | 50.00         | -12.61       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |      |             |           |
|----------------|------|-------------|-----------|
| Test Mode      | Idle | Tested Date | 2021/3/31 |
| Test Frequency | -    | Phase       | Line      |

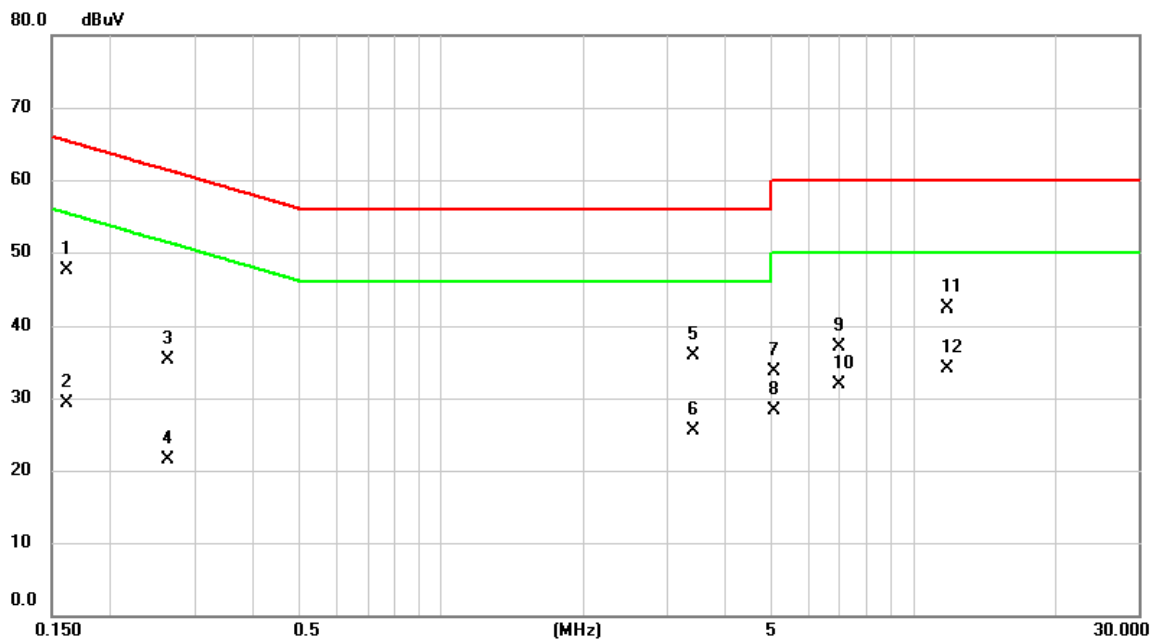


| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Margin |          |         |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector | Comment |
| 1   |     | 0.1613  | 37.84         | 9.68           | 47.52       | 65.40 | -17.88 | QP       |         |
| 2   |     | 0.1613  | 19.70         | 9.68           | 29.38       | 55.40 | -26.02 | AVG      |         |
| 3   |     | 0.2625  | 25.61         | 9.68           | 35.29       | 61.35 | -26.06 | QP       |         |
| 4   |     | 0.2625  | 11.90         | 9.68           | 21.58       | 51.35 | -29.77 | AVG      |         |
| 5   |     | 3.4148  | 26.09         | 9.77           | 35.86       | 56.00 | -20.14 | QP       |         |
| 6   |     | 3.4148  | 15.67         | 9.77           | 25.44       | 46.00 | -20.56 | AVG      |         |
| 7   |     | 5.0730  | 23.96         | 9.83           | 33.79       | 60.00 | -26.21 | QP       |         |
| 8   |     | 5.0730  | 18.47         | 9.83           | 28.30       | 50.00 | -21.70 | AVG      |         |
| 9   |     | 6.9923  | 27.20         | 9.87           | 37.07       | 60.00 | -22.93 | QP       |         |
| 10  |     | 6.9923  | 21.97         | 9.87           | 31.84       | 50.00 | -18.16 | AVG      |         |
| 11  |     | 11.7398 | 32.47         | 9.93           | 42.40       | 60.00 | -17.60 | QP       |         |
| 12  | *   | 11.7398 | 24.24         | 9.93           | 34.17       | 50.00 | -15.83 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |      |             |           |
|----------------|------|-------------|-----------|
| Test Mode      | Idle | Tested Date | 2021/3/31 |
| Test Frequency | -    | Phase       | Neutral   |

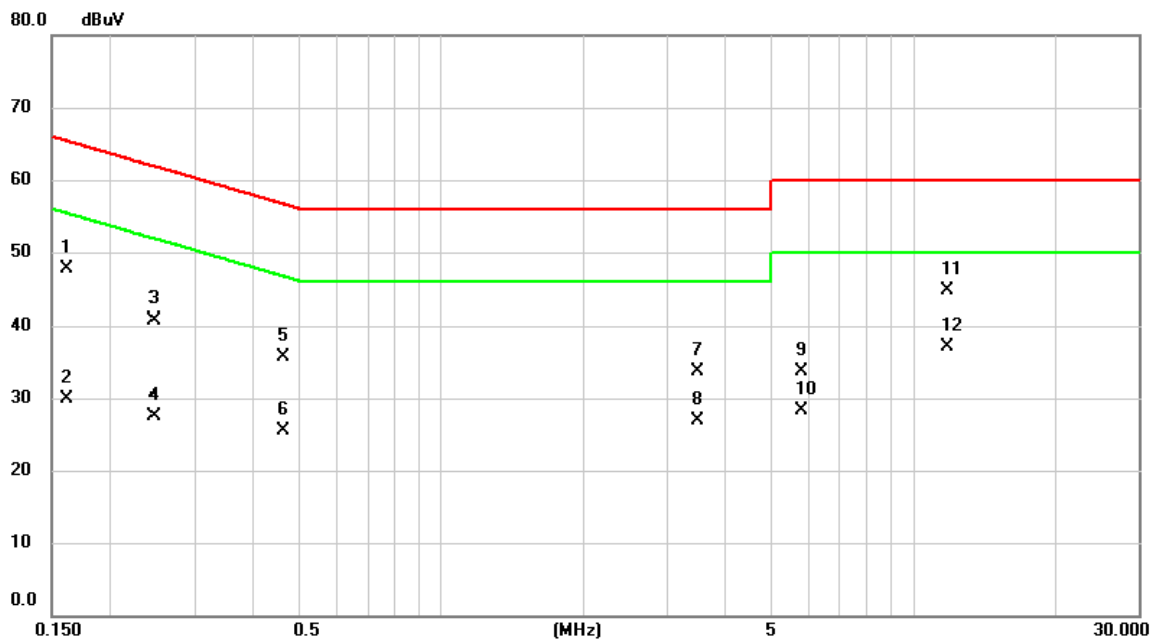


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1613       | 37.96                    | 9.68                    | 47.64                    | 65.40         | -17.76       | QP       |         |
| 2   |     | 0.1613       | 20.19                    | 9.68                    | 29.87                    | 55.40         | -25.53       | AVG      |         |
| 3   |     | 0.2468       | 31.09                    | 9.68                    | 40.77                    | 61.86         | -21.09       | QP       |         |
| 4   |     | 0.2468       | 17.92                    | 9.68                    | 27.60                    | 51.86         | -24.26       | AVG      |         |
| 5   |     | 0.4627       | 26.06                    | 9.68                    | 35.74                    | 56.64         | -20.90       | QP       |         |
| 6   |     | 0.4627       | 15.87                    | 9.68                    | 25.55                    | 46.64         | -21.09       | AVG      |         |
| 7   |     | 3.4958       | 24.02                    | 9.77                    | 33.79                    | 56.00         | -22.21       | QP       |         |
| 8   |     | 3.4958       | 17.05                    | 9.77                    | 26.82                    | 46.00         | -19.18       | AVG      |         |
| 9   |     | 5.7862       | 23.77                    | 9.84                    | 33.61                    | 60.00         | -26.39       | QP       |         |
| 10  |     | 5.7862       | 18.51                    | 9.84                    | 28.35                    | 50.00         | -21.65       | AVG      |         |
| 11  |     | 11.7533      | 34.73                    | 9.93                    | 44.66                    | 60.00         | -15.34       | QP       |         |
| 12  | *   | 11.7533      | 27.16                    | 9.93                    | 37.09                    | 50.00         | -12.91       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX B    RADIATED SPURIOUS EMISSIONS**

|              |              |              |          |
|--------------|--------------|--------------|----------|
| Test Mode    | WCDMA Band V | Test Date    | 2021/4/2 |
| Test Channel | CH4407       | Polarization | Vertical |
| Temp         | 22°C         | Hum.         | 67%      |

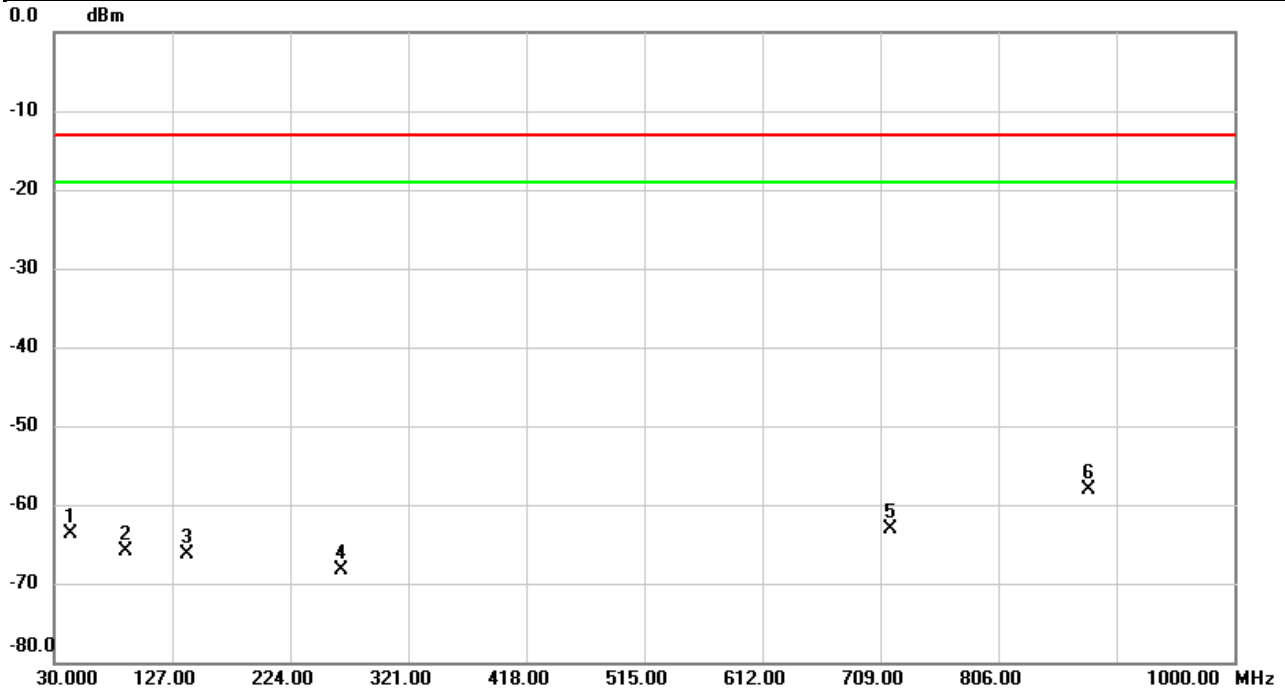


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |         |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm          | dBm    | dB     | Detector | Comment |
| 1   |     | 44.0650  | -62.37        | -1.30          | -63.67       | -13.00 | -50.67 | peak     |         |
| 2   |     | 88.9113  | -64.31        | -1.63          | -65.94       | -13.00 | -52.94 | peak     |         |
| 3   |     | 139.7715 | -69.02        | 2.71           | -66.31       | -13.00 | -53.31 | peak     |         |
| 4   |     | 265.5483 | -76.00        | 7.69           | -68.31       | -13.00 | -55.31 | peak     |         |
| 5   |     | 716.9863 | -75.34        | 12.29          | -63.05       | -13.00 | -50.05 | peak     |         |
| 6   | *   | 879.8493 | -68.50        | 10.40          | -58.10       | -13.00 | -45.10 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |              |              |            |
|--------------|--------------|--------------|------------|
| Test Mode    | WCDMA Band V | Test Date    | 2021/4/2   |
| Test Channel | CH4407       | Polarization | Horizontal |
| Temp         | 22°C         | Hum.         | 67%        |

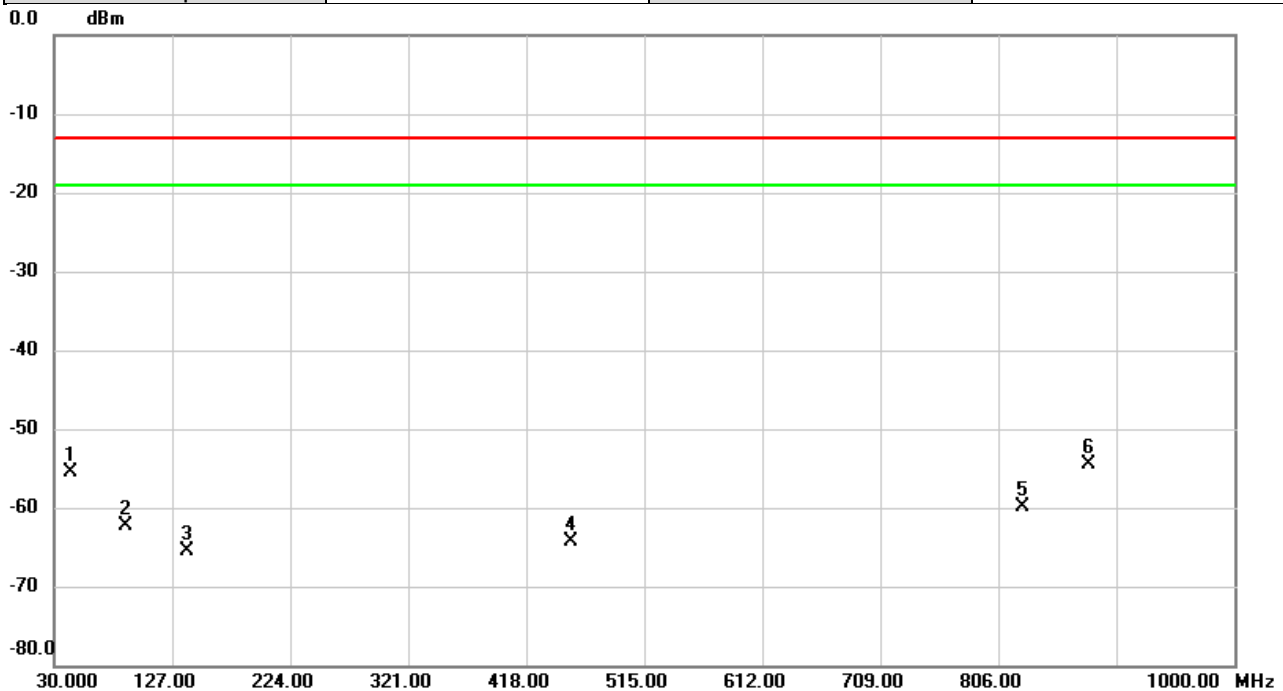


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm          | dBm    | dB     |          |         |
| 1   |     | 43.5476  | -71.67        | 16.17          | -55.50       | -13.00 | -42.50 | peak     |         |
| 2   |     | 89.2670  | -66.06        | 3.81           | -62.25       | -13.00 | -49.25 | peak     |         |
| 3   |     | 139.6423 | -68.27        | 2.70           | -65.57       | -13.00 | -52.57 | peak     |         |
| 4   |     | 455.1186 | -76.63        | 12.39          | -64.24       | -13.00 | -51.24 | peak     |         |
| 5   |     | 825.6263 | -75.77        | 15.82          | -59.95       | -13.00 | -46.95 | peak     |         |
| 6   | *   | 880.1726 | -70.55        | 16.00          | -54.55       | -13.00 | -41.55 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |              |              |          |
|--------------|--------------|--------------|----------|
| Test Mode    | WCDMA Band V | Test Date    | 2021/4/2 |
| Test Channel | CH4357       | Polarization | Vertical |
| Temp         | 22°C         | Hum.         | 67%      |

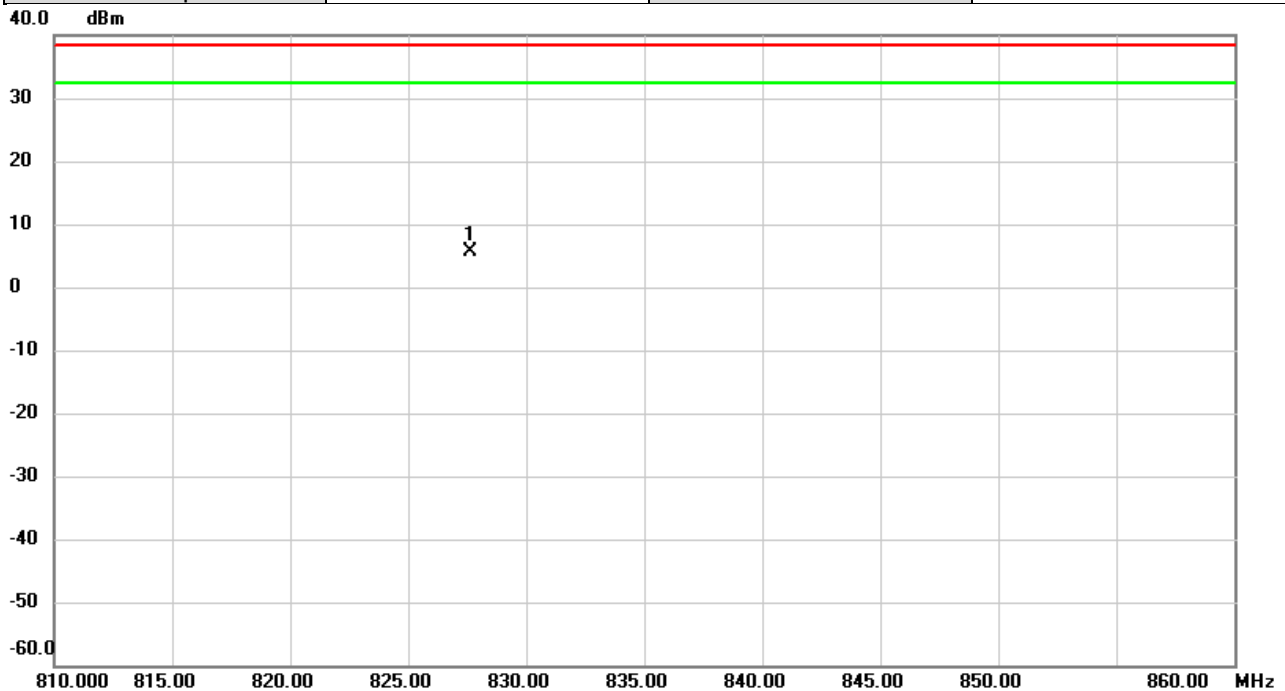


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit | Over   |          |         |
|-----|-----|----------|---------------|----------------|--------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm          | dBm   | dB     | Detector | Comment |
| 1   | *   | 827.6433 | -28.59        | 34.26          | 5.67         | 38.45 | -32.78 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |              |              |            |
|--------------|--------------|--------------|------------|
| Test Mode    | WCDMA Band V | Test Date    | 2021/4/2   |
| Test Channel | CH4357       | Polarization | Horizontal |
| Temp         | 22°C         | Hum.         | 67%        |

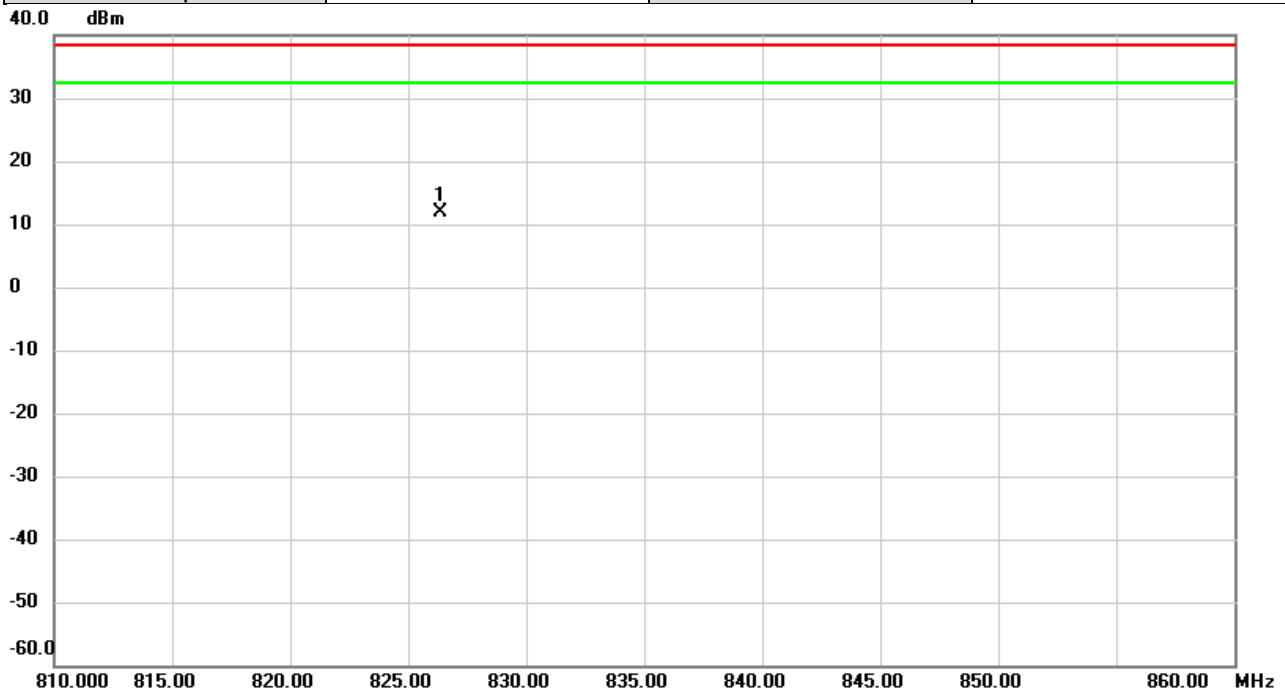


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     |          |         |
| 1   | *   | 826.3900 | -21.62        | 33.55          | 11.93       | 38.45 | -26.52 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |              |              |          |
|--------------|--------------|--------------|----------|
| Test Mode    | WCDMA Band V | Test Date    | 2021/4/2 |
| Test Channel | CH4407       | Polarization | Vertical |
| Temp         | 22°C         | Hum.         | 67%      |

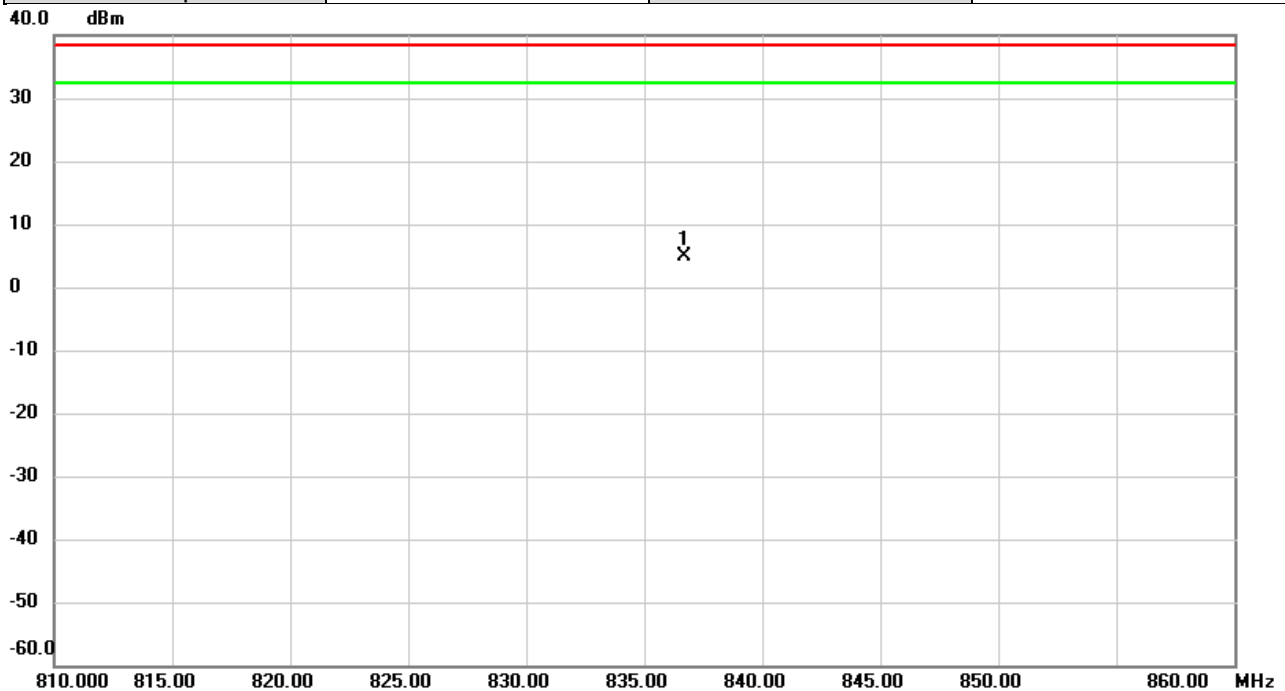


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   |          |         |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     | Detector | Comment |
| 1   | *   | 836.6933 | -29.41        | 34.23          | 4.82        | 38.45 | -33.63 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |              |              |            |
|--------------|--------------|--------------|------------|
| Test Mode    | WCDMA Band V | Test Date    | 2021/4/2   |
| Test Channel | CH4407       | Polarization | Horizontal |
| Temp         | 22°C         | Hum.         | 67%        |

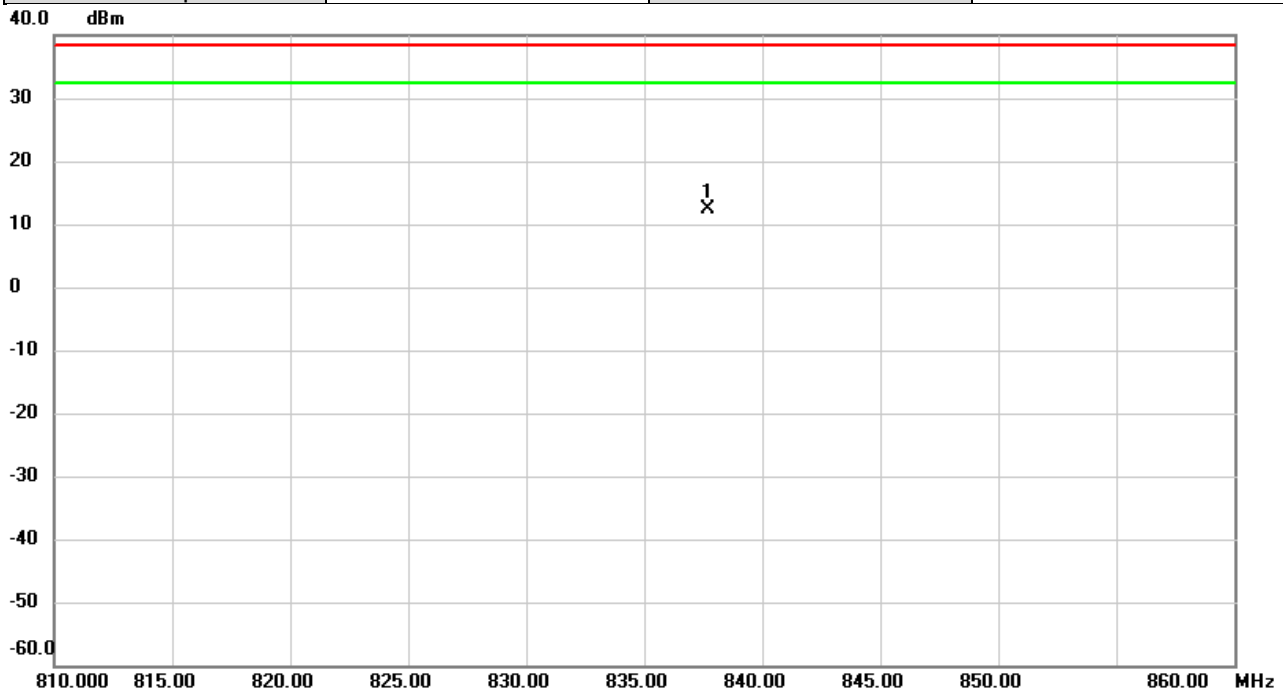


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   |          |         |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     | Detector | Comment |
| 1   | *   | 837.7050 | -21.11        | 33.52          | 12.41       | 38.45 | -26.04 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |              |              |          |
|--------------|--------------|--------------|----------|
| Test Mode    | WCDMA Band V | Test Date    | 2021/4/2 |
| Test Channel | CH4458       | Polarization | Vertical |
| Temp         | 22°C         | Hum.         | 67%      |

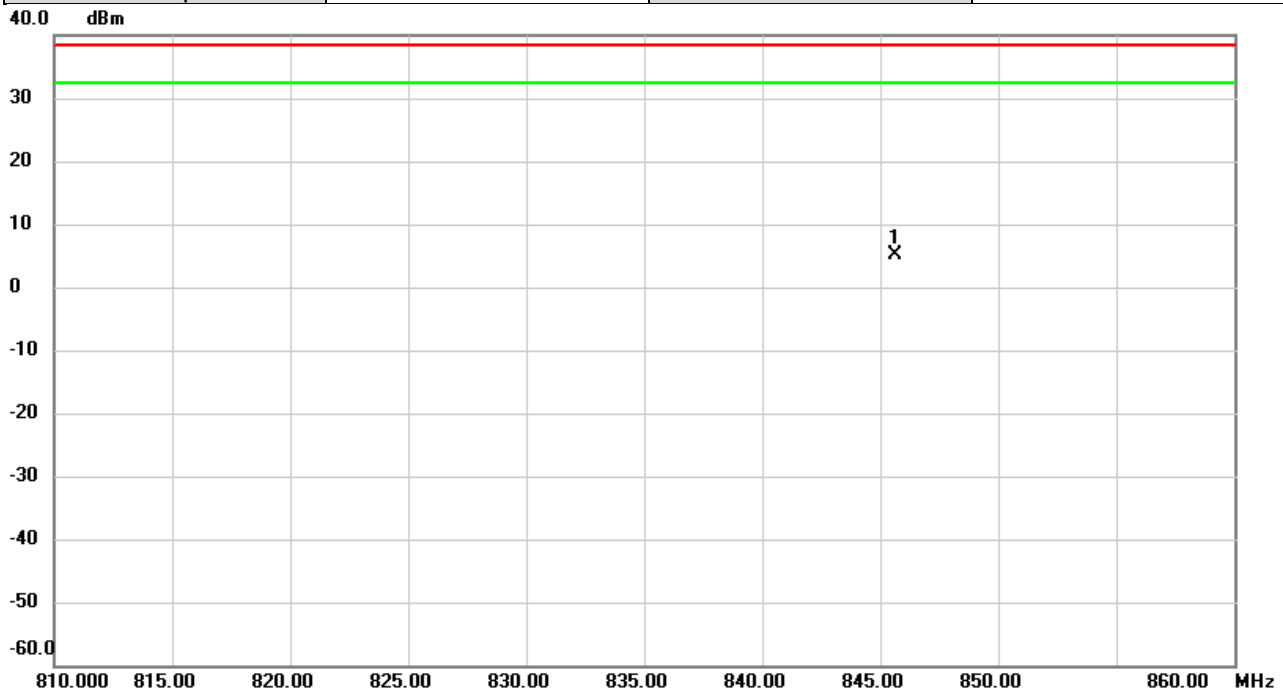


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit | Over   |          |         |
|-----|-----|----------|---------------|----------------|--------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm          | dBm   | dB     | Detector | Comment |
| 1   | *   | 845.6267 | -29.09        | 34.20          | 5.11         | 38.45 | -33.34 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |              |              |            |
|--------------|--------------|--------------|------------|
| Test Mode    | WCDMA Band V | Test Date    | 2021/4/2   |
| Test Channel | CH4458       | Polarization | Horizontal |
| Temp         | 22°C         | Hum.         | 67%        |

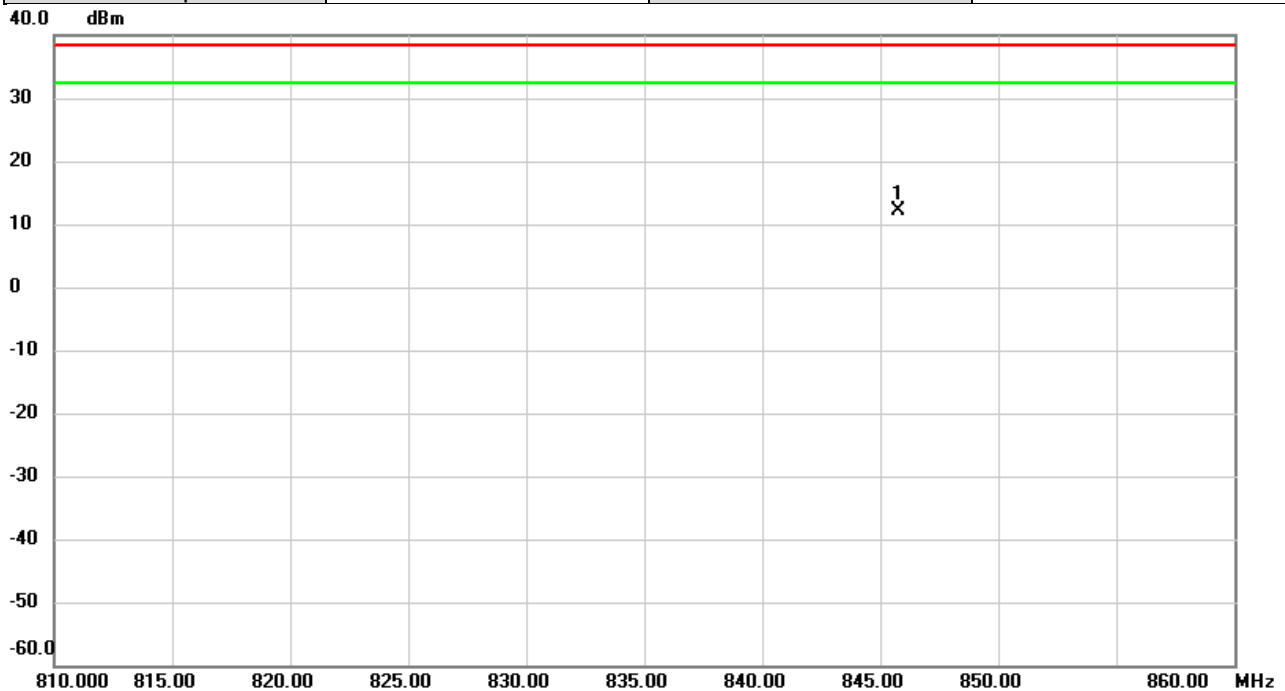


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     |          |         |
| 1   | *   | 845.7450 | -21.31        | 33.50          | 12.19       | 38.45 | -26.26 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |              |              |          |
|--------------|--------------|--------------|----------|
| Test Mode    | WCDMA Band V | Test Date    | 2021/4/2 |
| Test Channel | CH4407       | Polarization | Vertical |
| Temp         | 22°C         | Hum.         | 67%      |

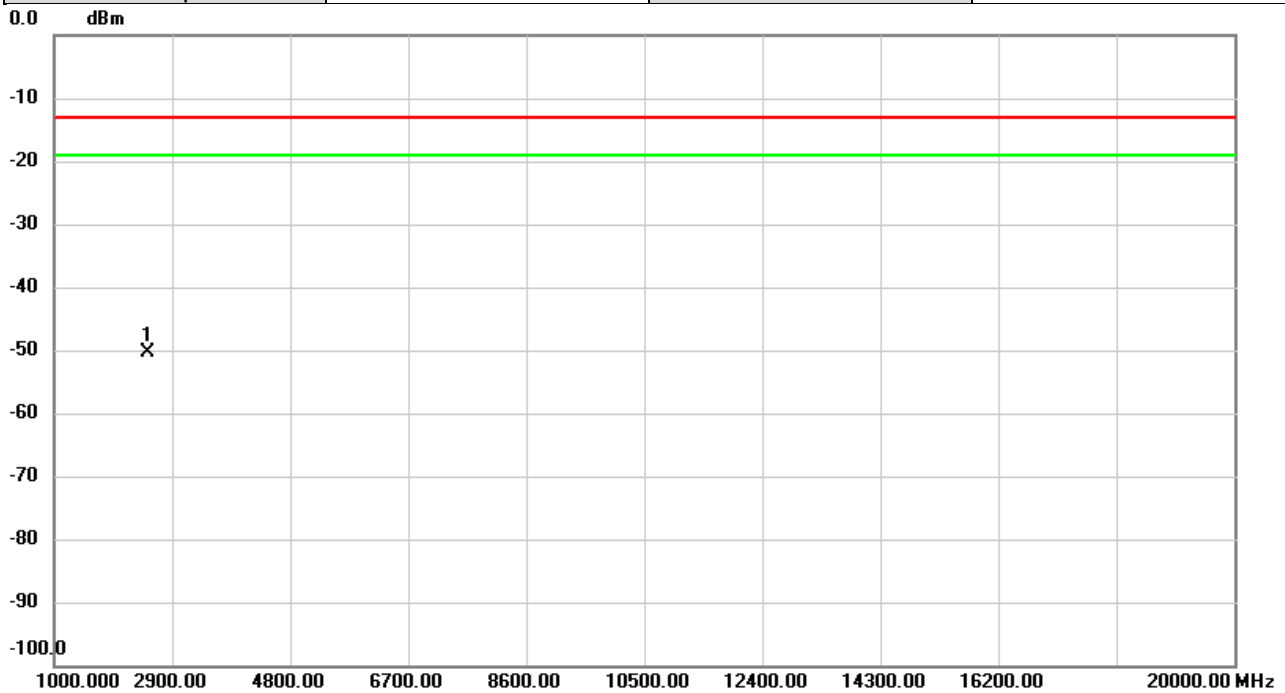


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm    | dB     | Detector | Comment |
| 1   | *   | 2512.400 | -46.05        | -4.22          | -50.27      | -13.00 | -37.27 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |              |              |            |
|--------------|--------------|--------------|------------|
| Test Mode    | WCDMA Band V | Test Date    | 2021/4/2   |
| Test Channel | CH4407       | Polarization | Horizontal |
| Temp         | 22°C         | Hum.         | 67%        |

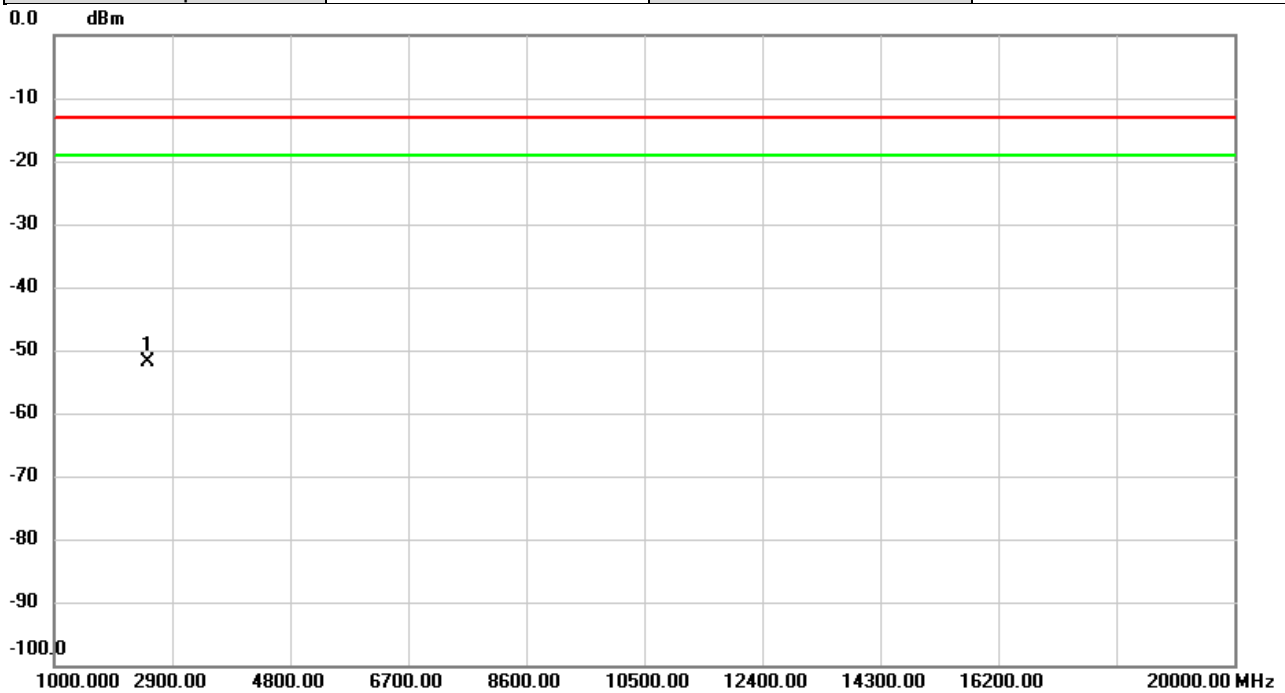


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm    | dB     |          |         |
| 1   | *   | 2513.033 | -47.47        | -4.45          | -51.92      | -13.00 | -38.92 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |            |              |          |
|--------------|------------|--------------|----------|
| Test Mode    | LTE Band 5 | Test Date    | 2021/4/2 |
| Test Channel | CH20525    | Polarization | Vertical |
| Temp         | 22°C       | Hum.         | 67%      |

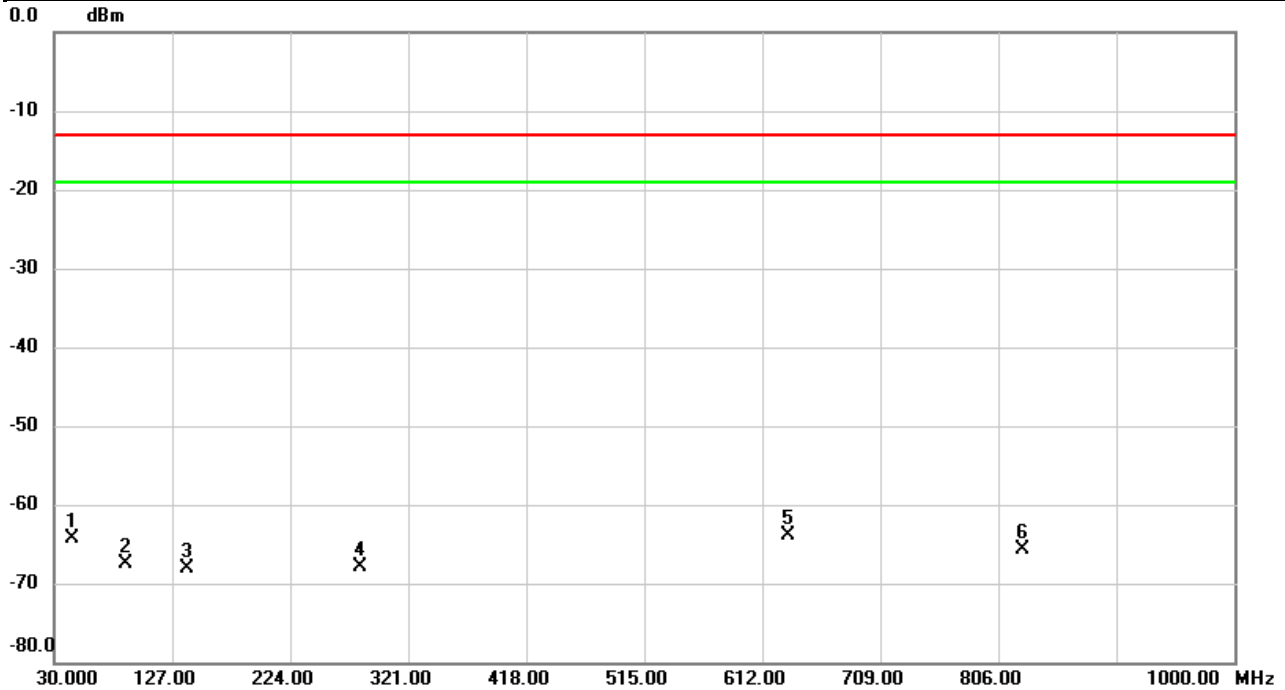


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |         |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm          | dBm    | dB     | Detector | Comment |
| 1   |     | 44.2913  | -62.96        | -1.30          | -64.26       | -13.00 | -51.26 | peak     |         |
| 2   |     | 88.9113  | -65.78        | -1.63          | -67.41       | -13.00 | -54.41 | peak     |         |
| 3   |     | 139.6423 | -70.80        | 2.68           | -68.12       | -13.00 | -55.12 | peak     |         |
| 4   |     | 282.1030 | -75.62        | 7.65           | -67.97       | -13.00 | -54.97 | peak     |         |
| 5   | *   | 632.7903 | -76.40        | 12.51          | -63.89       | -13.00 | -50.89 | peak     |         |
| 6   |     | 826.1760 | -75.22        | 9.49           | -65.73       | -13.00 | -52.73 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |            |              |            |
|--------------|------------|--------------|------------|
| Test Mode    | LTE Band 5 | Test Date    | 2021/4/2   |
| Test Channel | CH20525    | Polarization | Horizontal |
| Temp         | 22°C       | Hum.         | 67%        |

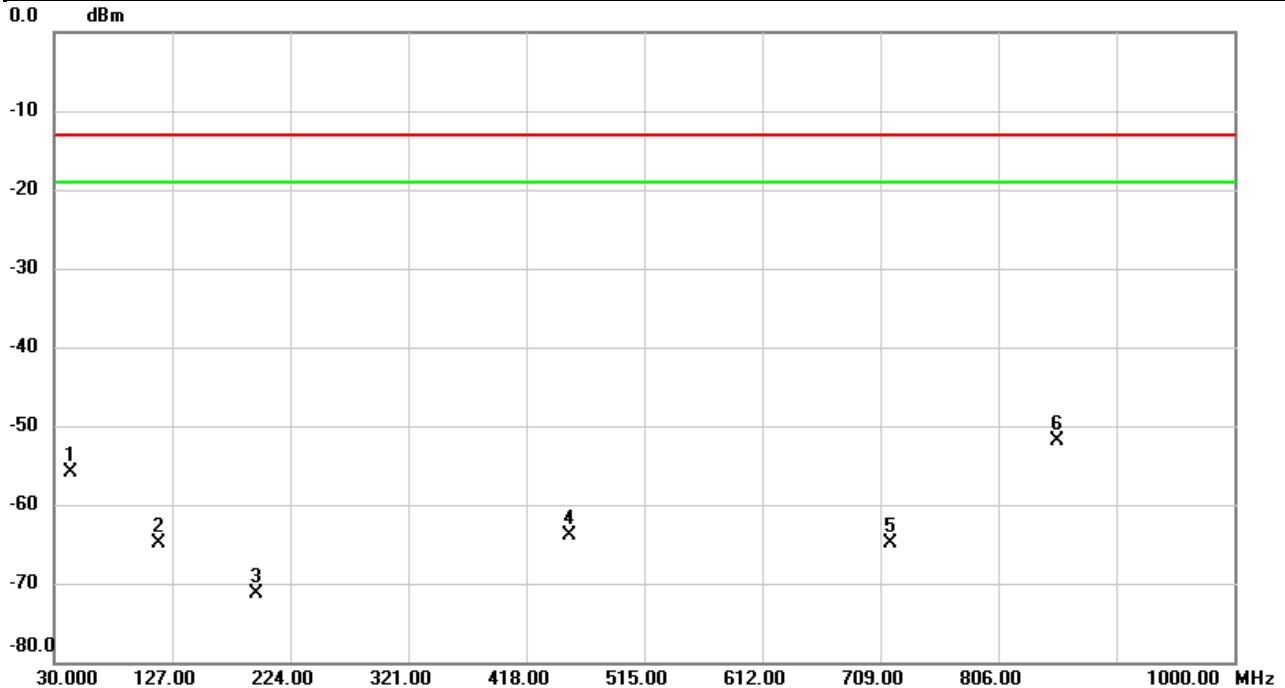


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm    | dB     |          |         |
| 1   |     | 43.8386  | -72.03        | 16.09          | -55.94      | -13.00 | -42.94 | peak     |         |
| 2   |     | 115.3923 | -67.84        | 2.90           | -64.94      | -13.00 | -51.94 | peak     |         |
| 3   |     | 196.2903 | -69.49        | -1.76          | -71.25      | -13.00 | -58.25 | peak     |         |
| 4   |     | 453.3403 | -76.35        | 12.38          | -63.97      | -13.00 | -50.97 | peak     |         |
| 5   |     | 716.7923 | -75.51        | 10.52          | -64.99      | -13.00 | -51.99 | peak     |         |
| 6   | *   | 854.5323 | -68.26        | 16.36          | -51.90      | -13.00 | -38.90 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |            |              |          |
|--------------|------------|--------------|----------|
| Test Mode    | LTE Band 5 | Test Date    | 2021/4/2 |
| Test Channel | CH20450    | Polarization | Vertical |
| Temp         | 22°C       | Hum.         | 67%      |

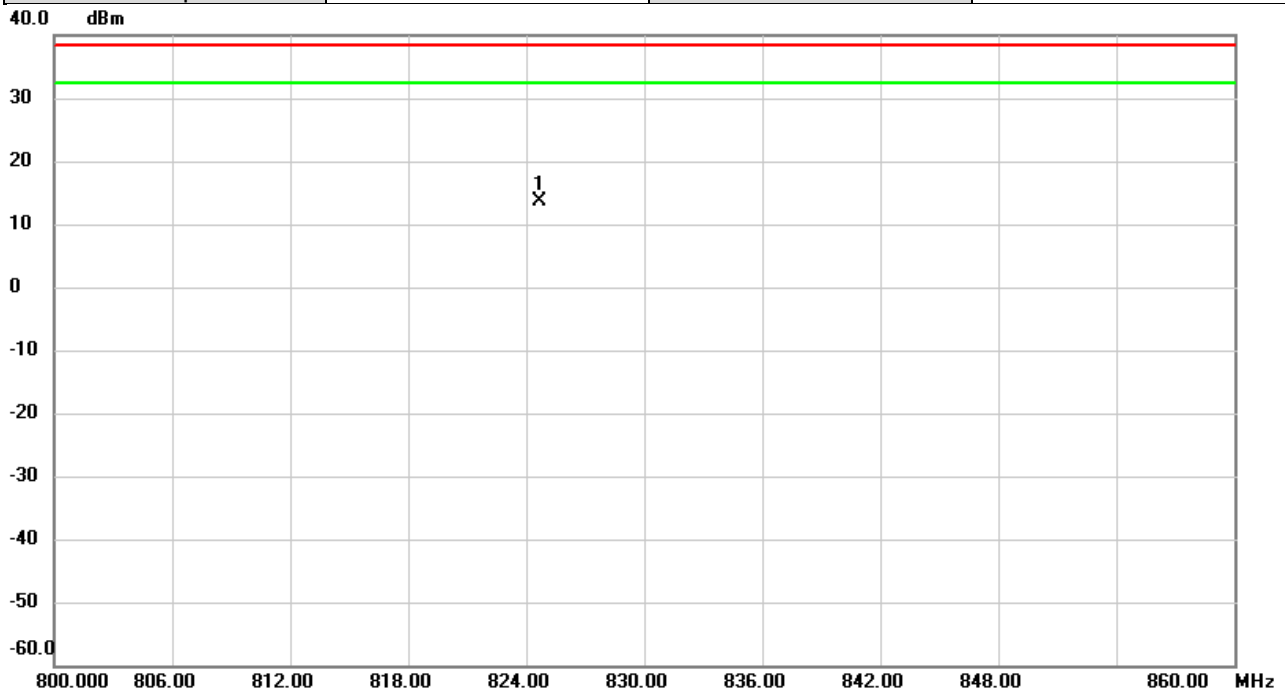


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     |          |         |
| 1   | *   | 824.6640 | -20.72        | 34.27          | 13.55       | 38.45 | -24.90 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |            |              |            |
|--------------|------------|--------------|------------|
| Test Mode    | LTE Band 5 | Test Date    | 2021/4/2   |
| Test Channel | CH20450    | Polarization | Horizontal |
| Temp         | 22°C       | Hum.         | 67%        |

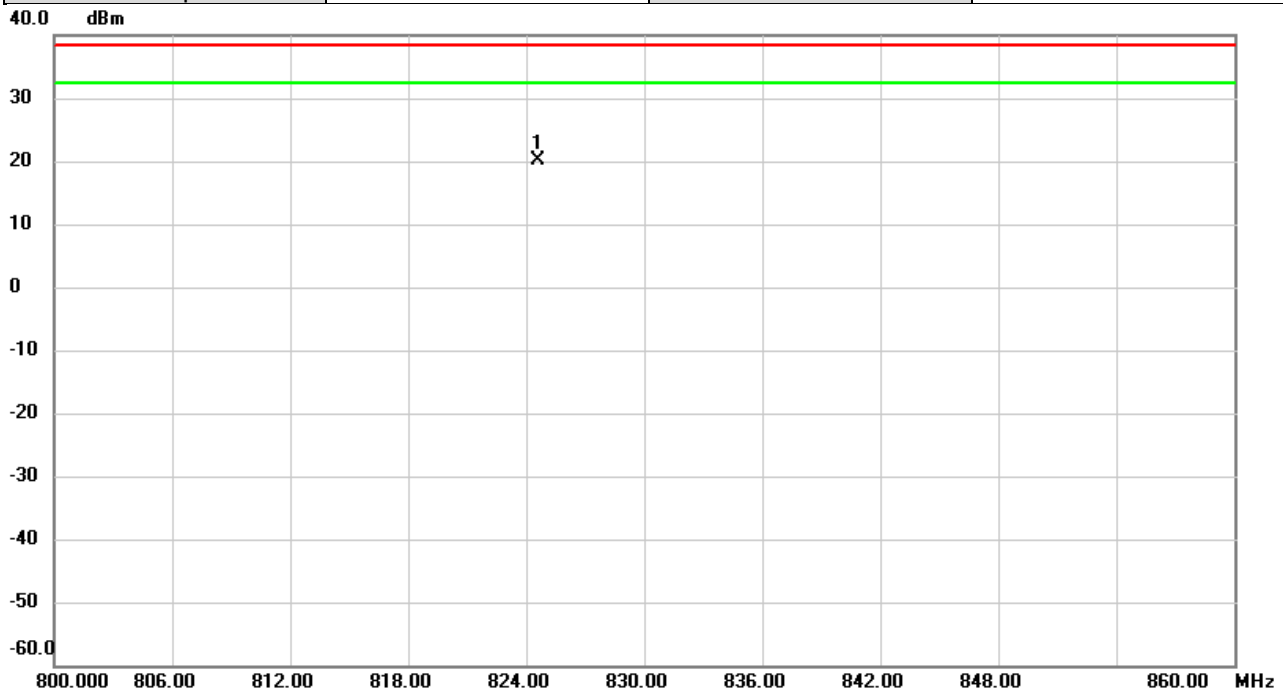


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   |          |         |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     | Detector | Comment |
| 1   | *   | 824.6220 | -13.49        | 33.55          | 20.06       | 38.45 | -18.39 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |            |              |          |
|--------------|------------|--------------|----------|
| Test Mode    | LTE Band 5 | Test Date    | 2021/4/2 |
| Test Channel | CH20525    | Polarization | Vertical |
| Temp         | 22°C       | Hum.         | 67%      |

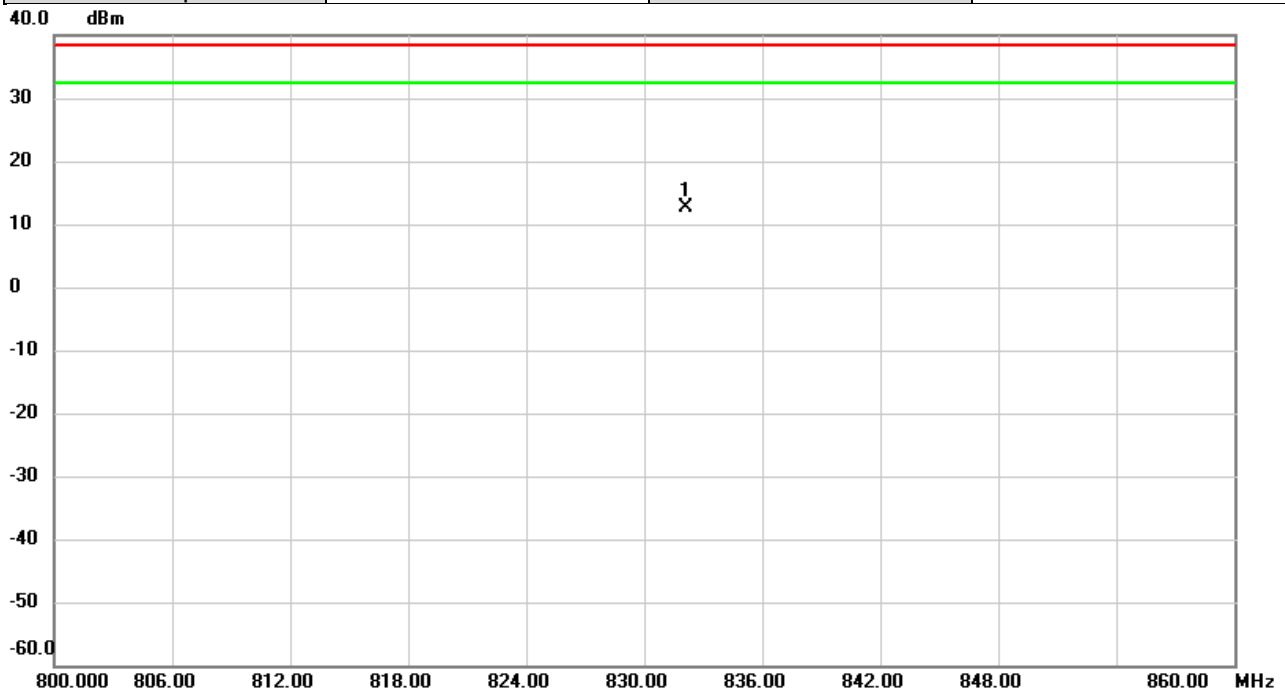


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   |          |         |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     | Detector | Comment |
| 1   | *   | 832.1220 | -21.53        | 34.24          | 12.71       | 38.45 | -25.74 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |            |              |            |
|--------------|------------|--------------|------------|
| Test Mode    | LTE Band 5 | Test Date    | 2021/4/2   |
| Test Channel | CH20525    | Polarization | Horizontal |
| Temp         | 22°C       | Hum.         | 67%        |

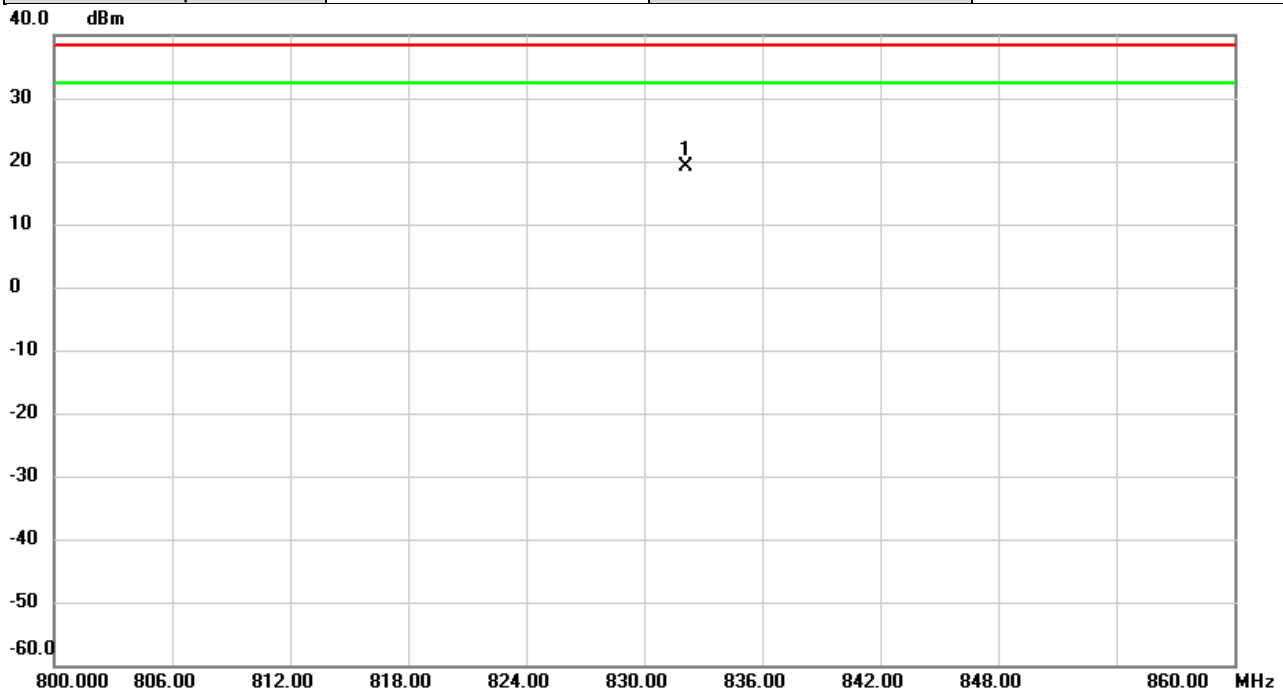


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     |          |         |
| 1   | *   | 832.0880 | -14.38        | 33.53          | 19.15       | 38.45 | -19.30 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |            |              |          |
|--------------|------------|--------------|----------|
| Test Mode    | LTE Band 5 | Test Date    | 2021/4/2 |
| Test Channel | CH20600    | Polarization | Vertical |
| Temp         | 22°C       | Hum.         | 67%      |

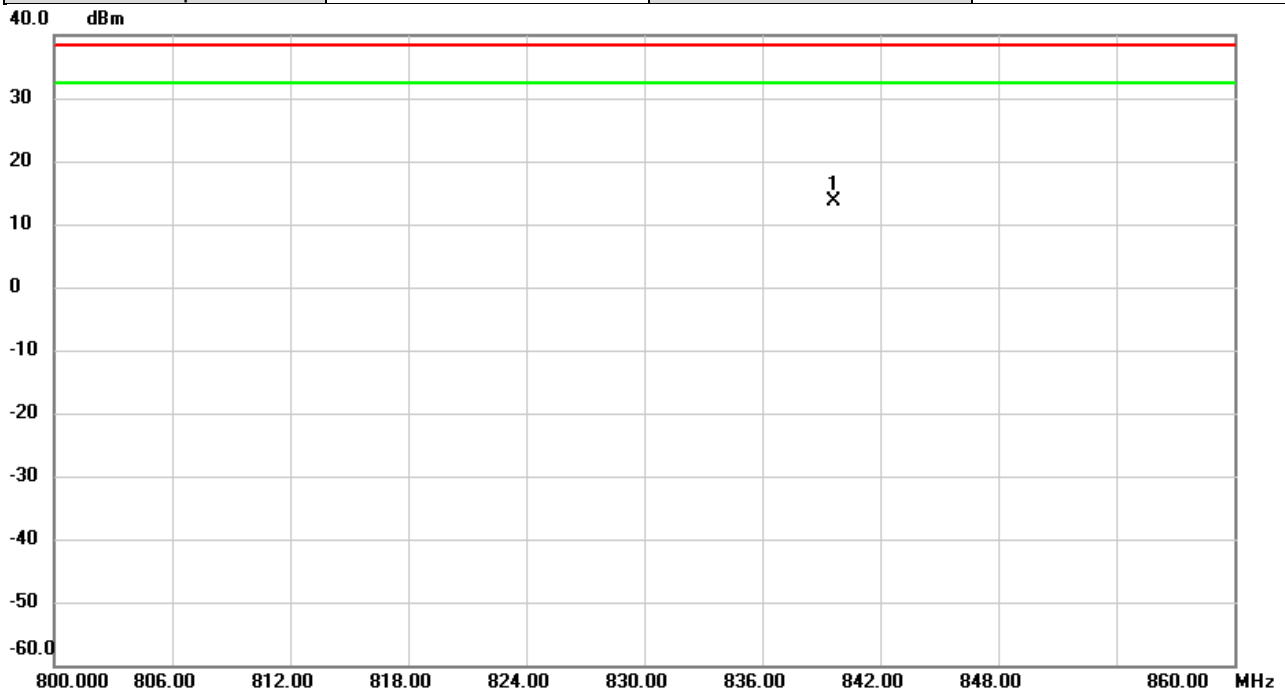


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     |          |         |
| 1   | *   | 839.6220 | -20.55        | 34.22          | 13.67       | 38.45 | -24.78 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |            |              |            |
|--------------|------------|--------------|------------|
| Test Mode    | LTE Band 5 | Test Date    | 2021/4/2   |
| Test Channel | CH20600    | Polarization | Horizontal |
| Temp         | 22°C       | Hum.         | 67%        |

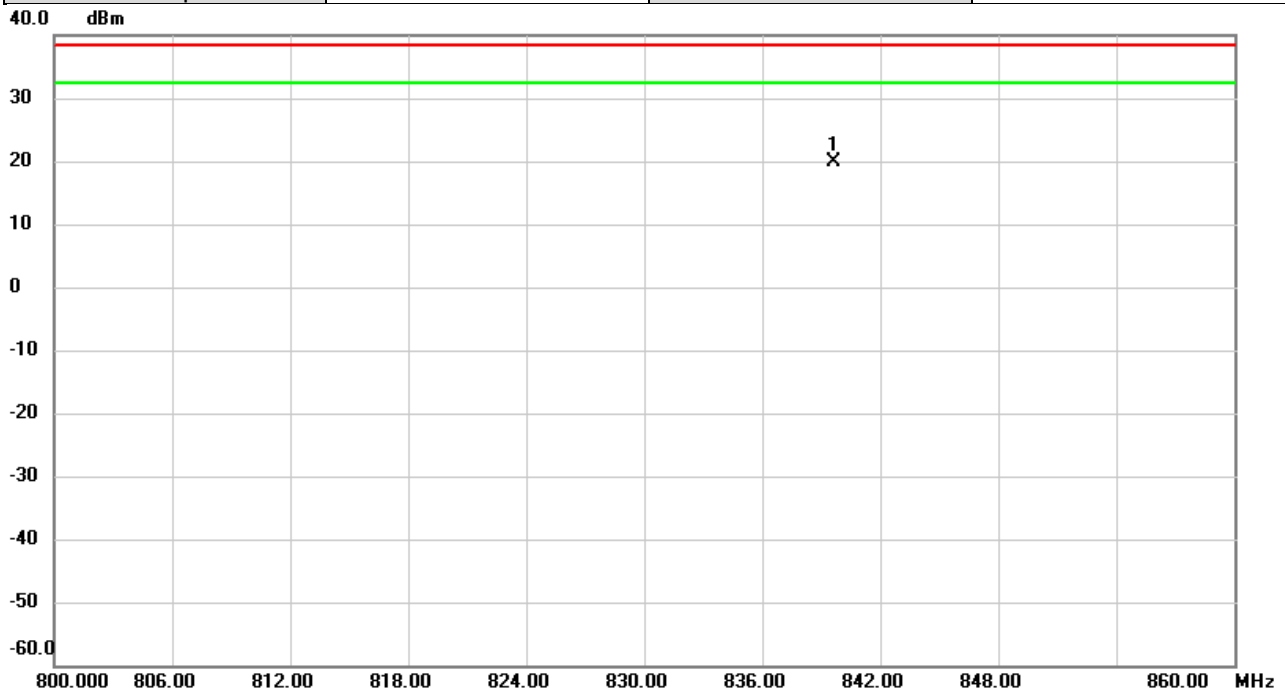


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     |          |         |
| 1   | *   | 839.6540 | -13.75        | 33.51          | 19.76       | 38.45 | -18.69 | peak     |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |            |              |          |
|--------------|------------|--------------|----------|
| Test Mode    | LTE Band 5 | Test Date    | 2021/4/2 |
| Test Channel | CH20525    | Polarization | Vertical |
| Temp         | 22°C       | Hum.         | 67%      |

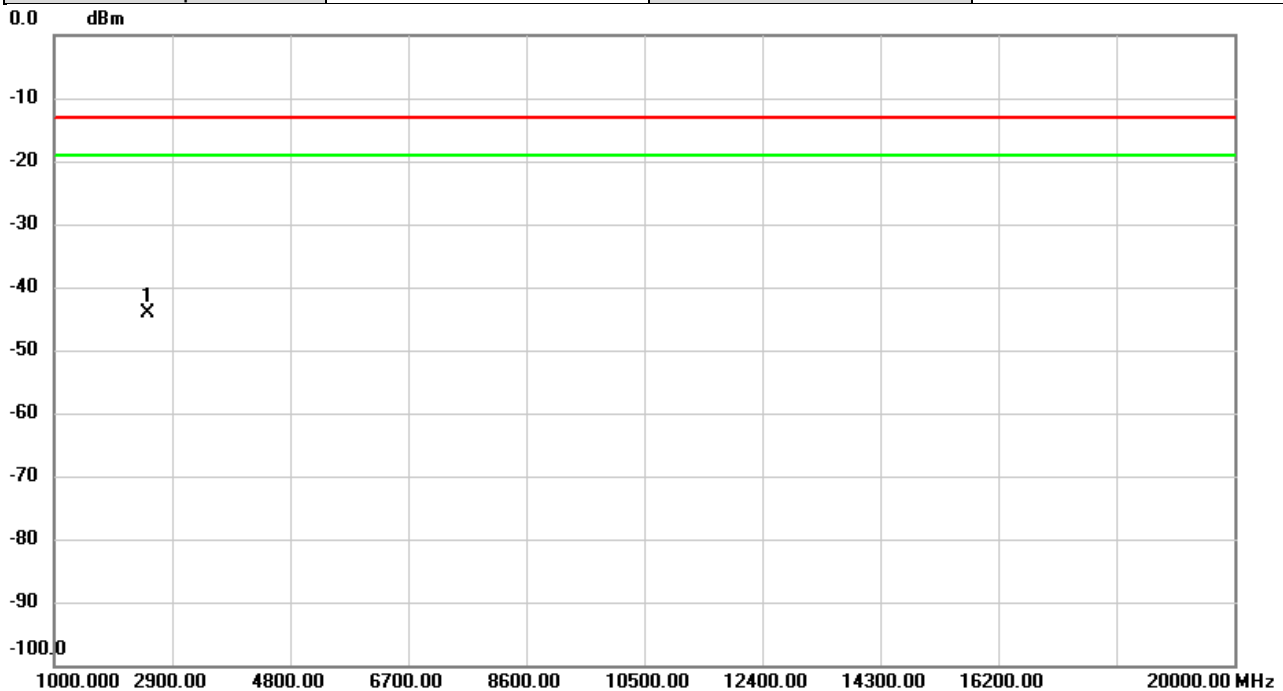


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm    | dB     |          |         |
| 1   | *   | 2496.567 | -39.65        | -4.35          | -44.00      | -13.00 | -31.00 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |            |              |            |
|--------------|------------|--------------|------------|
| Test Mode    | LTE Band 5 | Test Date    | 2021/4/2   |
| Test Channel | CH20525    | Polarization | Horizontal |
| Temp         | 22°C       | Hum.         | 67%        |

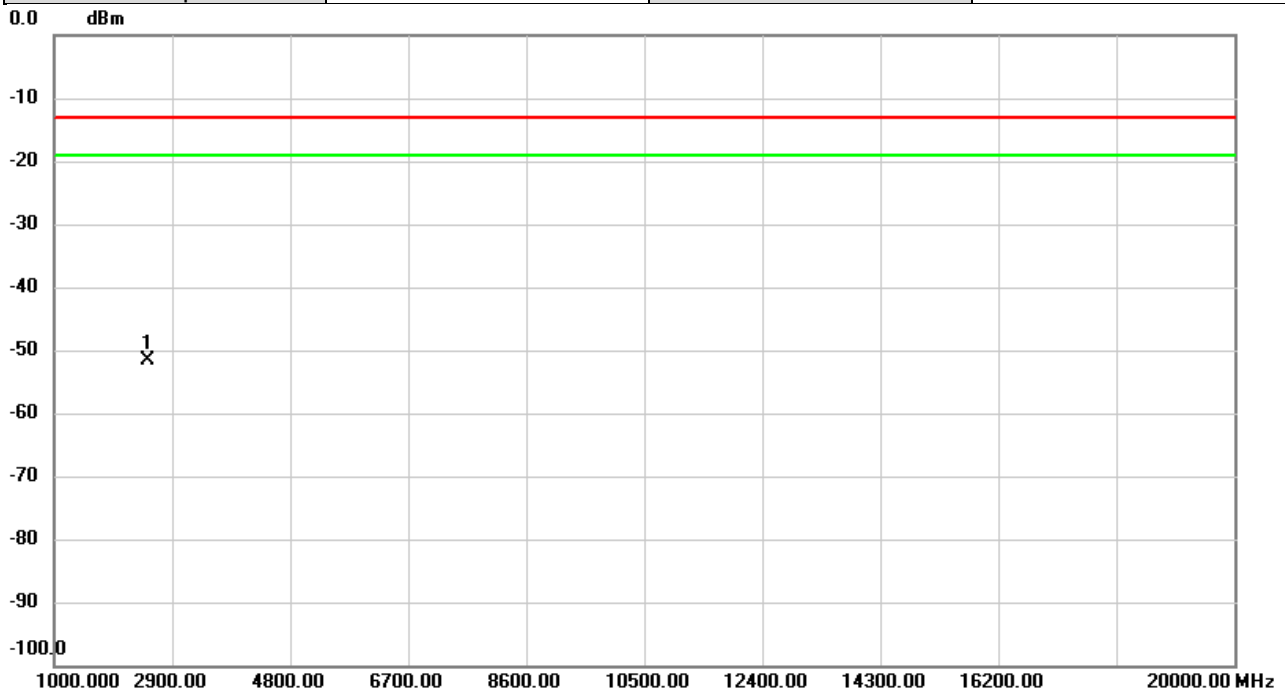


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm          | dBm    | dB     |          |         |
| 1   | *   | 2496.567 | -47.04        | -4.70          | -51.74       | -13.00 | -38.74 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |             |              |          |
|--------------|-------------|--------------|----------|
| Test Mode    | LTE Band 26 | Test Date    | 2021/4/2 |
| Test Channel | CH26915     | Polarization | Vertical |
| Temp         | 22°C        | Hum.         | 67%      |

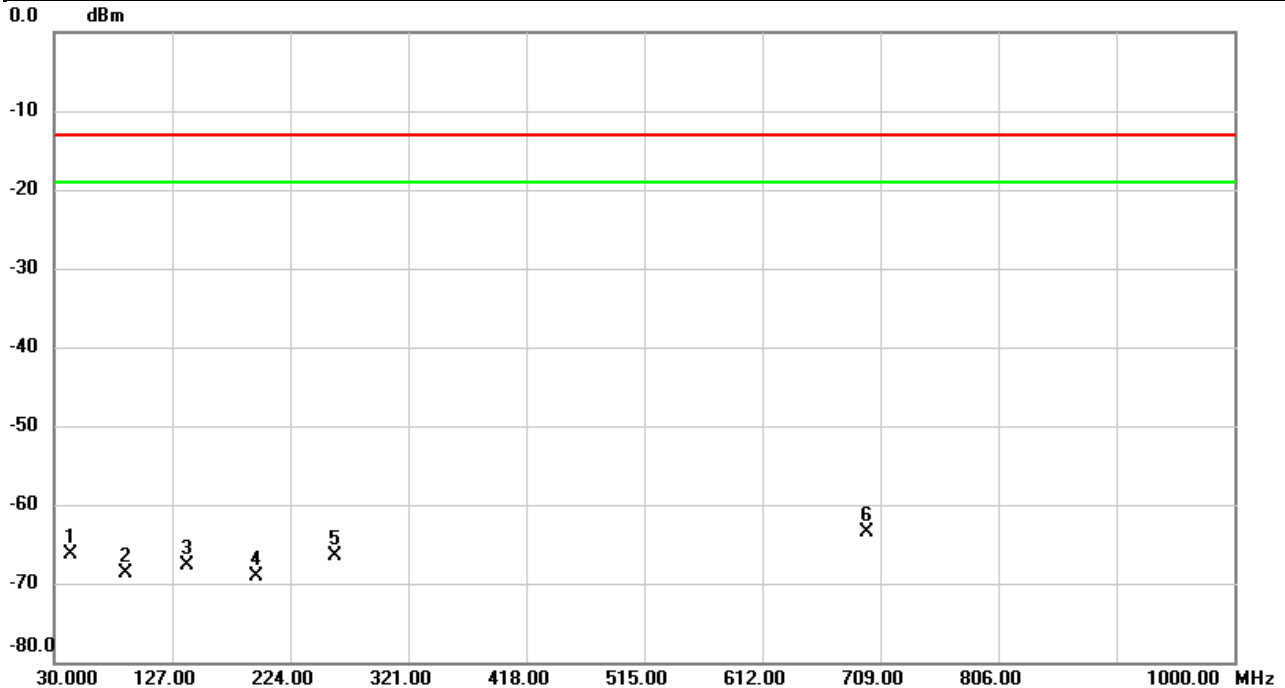


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm          | dBm    | dB     |          |         |
| 1   |     | 44.1296  | -65.09        | -1.30          | -66.39       | -13.00 | -53.39 | peak     |         |
| 2   |     | 88.9113  | -67.01        | -1.63          | -68.64       | -13.00 | -55.64 | peak     |         |
| 3   |     | 139.7393 | -70.34        | 2.70           | -67.64       | -13.00 | -54.64 | peak     |         |
| 4   |     | 195.5790 | -72.22        | 3.21           | -69.01       | -13.00 | -56.01 | peak     |         |
| 5   |     | 261.1186 | -74.27        | 7.70           | -66.57       | -13.00 | -53.57 | peak     |         |
| 6   | *   | 698.3623 | -76.12        | 12.66          | -63.46       | -13.00 | -50.46 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |             |              |            |
|--------------|-------------|--------------|------------|
| Test Mode    | LTE Band 26 | Test Date    | 2021/4/2   |
| Test Channel | CH26915     | Polarization | Horizontal |
| Temp         | 22°C        | Hum.         | 67%        |

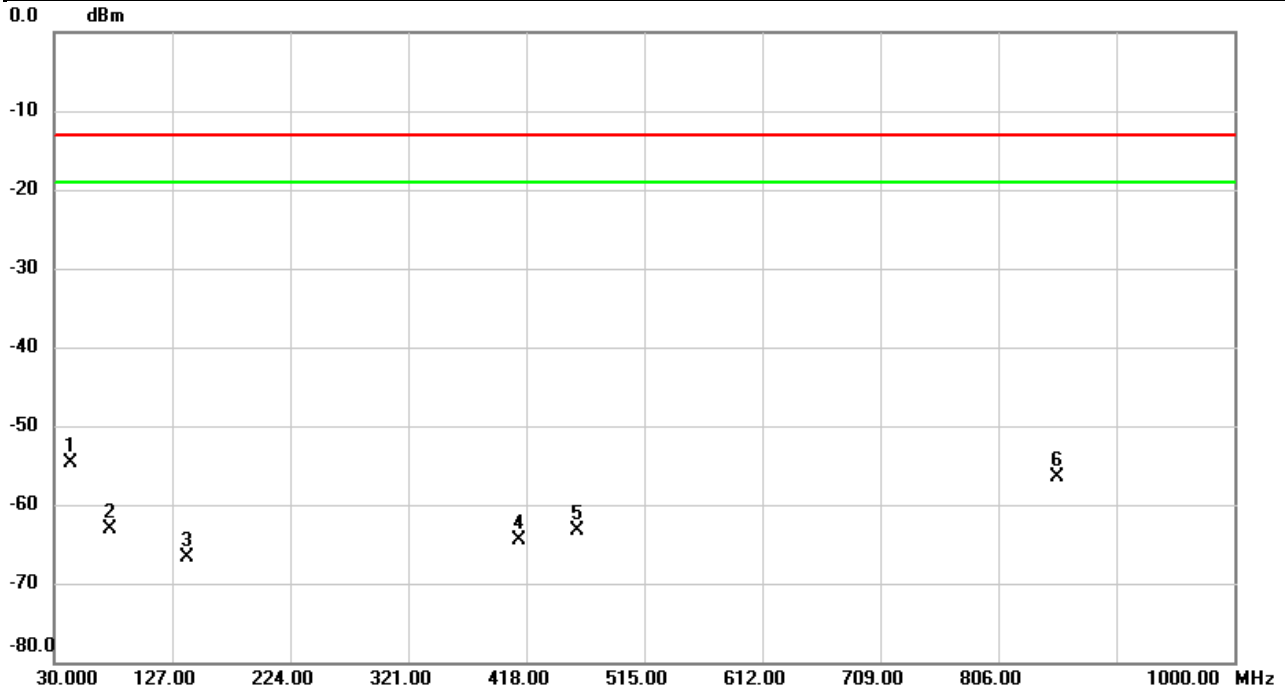


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBm | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBm | Limit<br>dBm | Over<br>dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|----------|---------|
| 1   | *   | 43.9680      | -70.70                  | 16.06                   | -54.64                  | -13.00       | -41.64     | peak     |         |
| 2   |     | 75.4930      | -68.25                  | 5.06                    | -63.19                  | -13.00       | -50.19     | peak     |         |
| 3   |     | 139.7070     | -69.41                  | 2.70                    | -66.71                  | -13.00       | -53.71     | peak     |         |
| 4   |     | 411.8890     | -72.15                  | 7.65                    | -64.50                  | -13.00       | -51.50     | peak     |         |
| 5   |     | 460.5830     | -75.63                  | 12.43                   | -63.20                  | -13.00       | -50.20     | peak     |         |
| 6   |     | 855.0173     | -72.88                  | 16.35                   | -56.53                  | -13.00       | -43.53     | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |             |              |          |
|--------------|-------------|--------------|----------|
| Test Mode    | LTE Band 26 | Test Date    | 2021/4/2 |
| Test Channel | CH26865     | Polarization | Vertical |
| Temp         | 22°C        | Hum.         | 67%      |

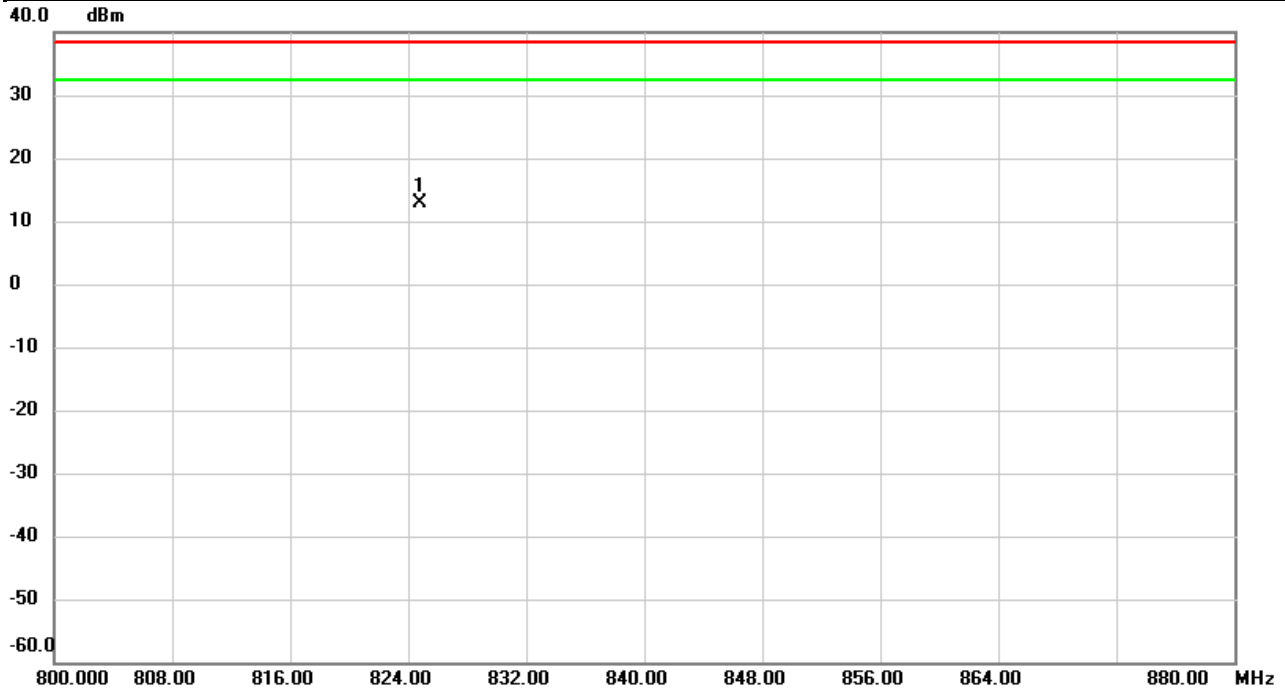


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   |          |         |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     | Detector | Comment |
| 1   | *   | 824.8027 | -21.50        | 34.27          | 12.77       | 38.45 | -25.68 | peak     |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |             |              |            |
|--------------|-------------|--------------|------------|
| Test Mode    | LTE Band 26 | Test Date    | 2021/4/2   |
| Test Channel | CH26865     | Polarization | Horizontal |
| Temp         | 22°C        | Hum.         | 67%        |

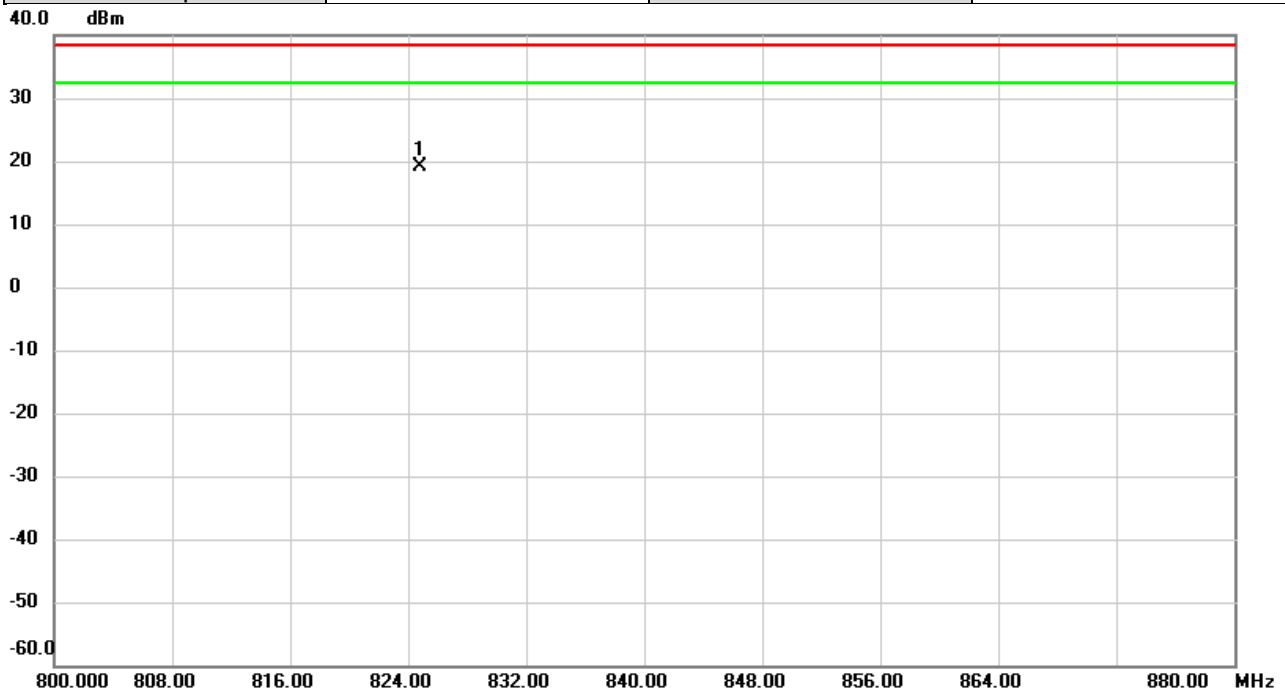


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     |          |         |
| 1   | *   | 824.8160 | -14.39        | 33.55          | 19.16       | 38.45 | -19.29 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |             |              |          |
|--------------|-------------|--------------|----------|
| Test Mode    | LTE Band 26 | Test Date    | 2021/4/2 |
| Test Channel | CH26915     | Polarization | Vertical |
| Temp         | 22°C        | Hum.         | 67%      |

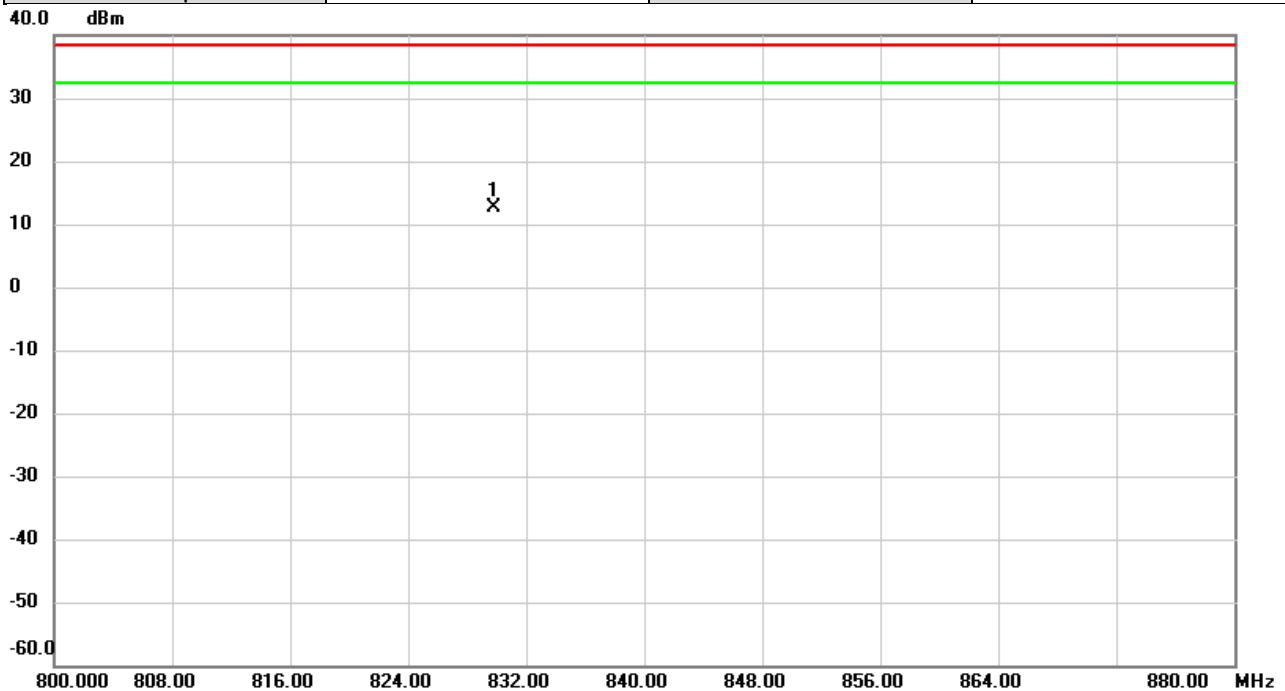


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   |          |         |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     | Detector | Comment |
| 1   | *   | 829.8427 | -21.73        | 34.25          | 12.52       | 38.45 | -25.93 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |             |              |            |
|--------------|-------------|--------------|------------|
| Test Mode    | LTE Band 26 | Test Date    | 2021/4/2   |
| Test Channel | CH26915     | Polarization | Horizontal |
| Temp         | 22°C        | Hum.         | 67%        |

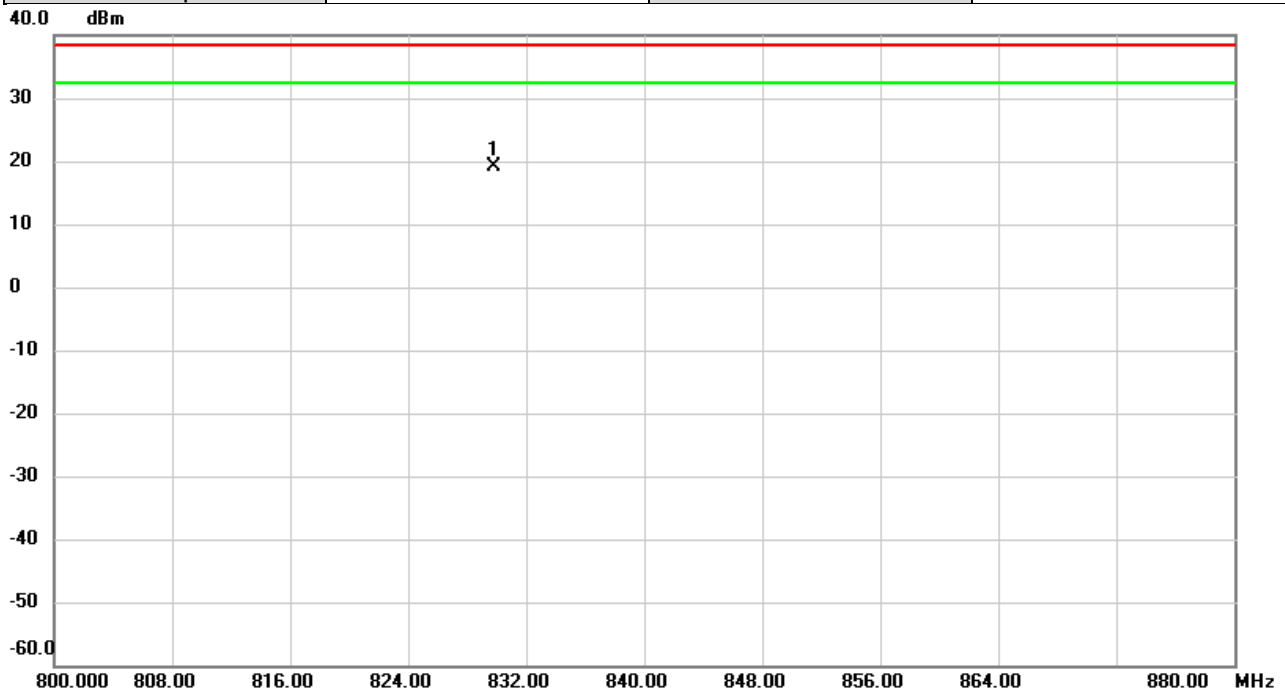


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit | Over   |          |         |
|-----|-----|----------|---------------|----------------|--------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm          | dBm   | dB     | Detector | Comment |
| 1   | *   | 829.8427 | -14.34        | 33.54          | 19.20        | 38.45 | -19.25 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |             |              |          |
|--------------|-------------|--------------|----------|
| Test Mode    | LTE Band 26 | Test Date    | 2021/4/2 |
| Test Channel | CH26965     | Polarization | Vertical |
| Temp         | 22°C        | Hum.         | 67%      |

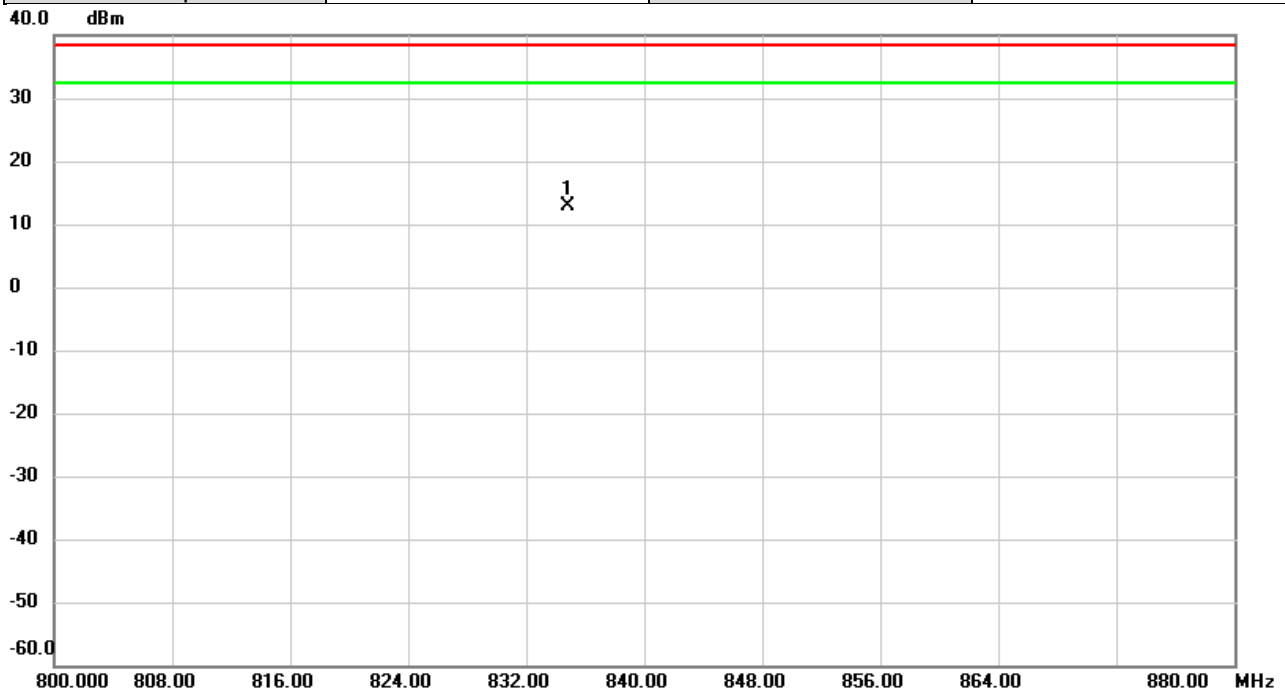


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     |          |         |
| 1   | *   | 834.8720 | -21.44        | 34.24          | 12.80       | 38.45 | -25.65 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |             |              |            |
|--------------|-------------|--------------|------------|
| Test Mode    | LTE Band 26 | Test Date    | 2021/4/2   |
| Test Channel | CH26965     | Polarization | Horizontal |
| Temp         | 22°C        | Hum.         | 67%        |

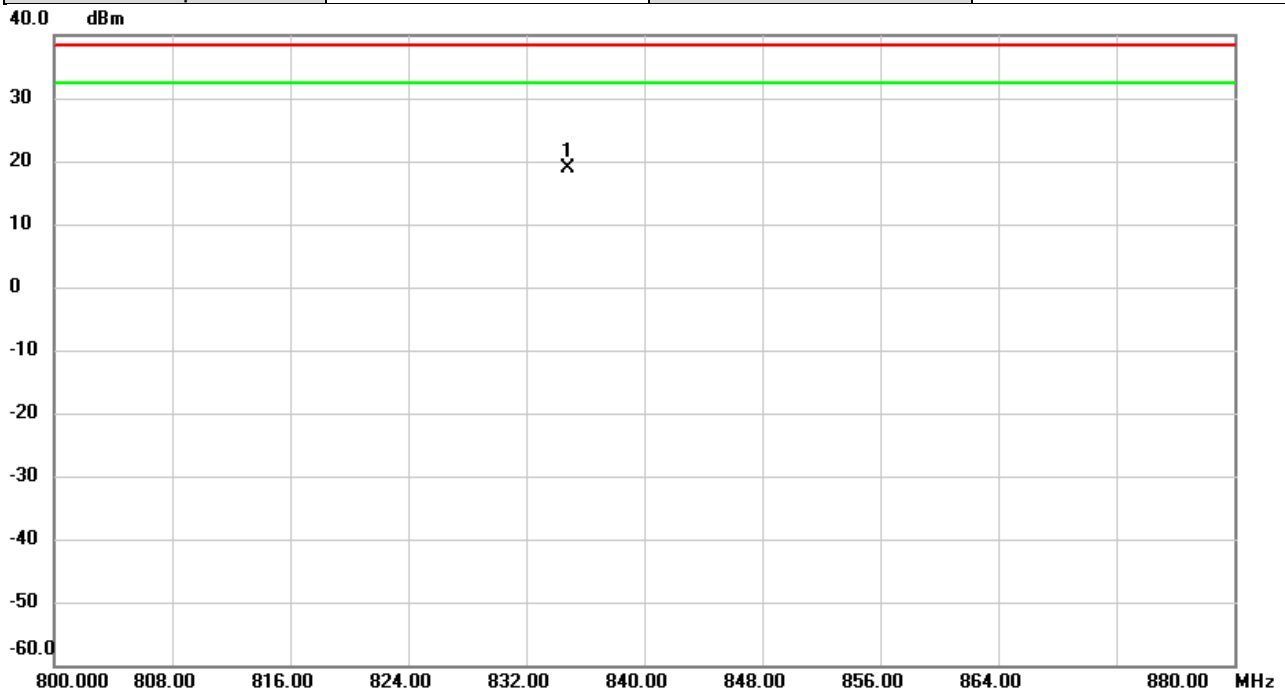


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm   | dB     |          |         |
| 1   | *   | 834.8667 | -14.57        | 33.53          | 18.96       | 38.45 | -19.49 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |             |              |          |
|--------------|-------------|--------------|----------|
| Test Mode    | LTE Band 26 | Test Date    | 2021/4/2 |
| Test Channel | CH26915     | Polarization | Vertical |
| Temp         | 22°C        | Hum.         | 67%      |

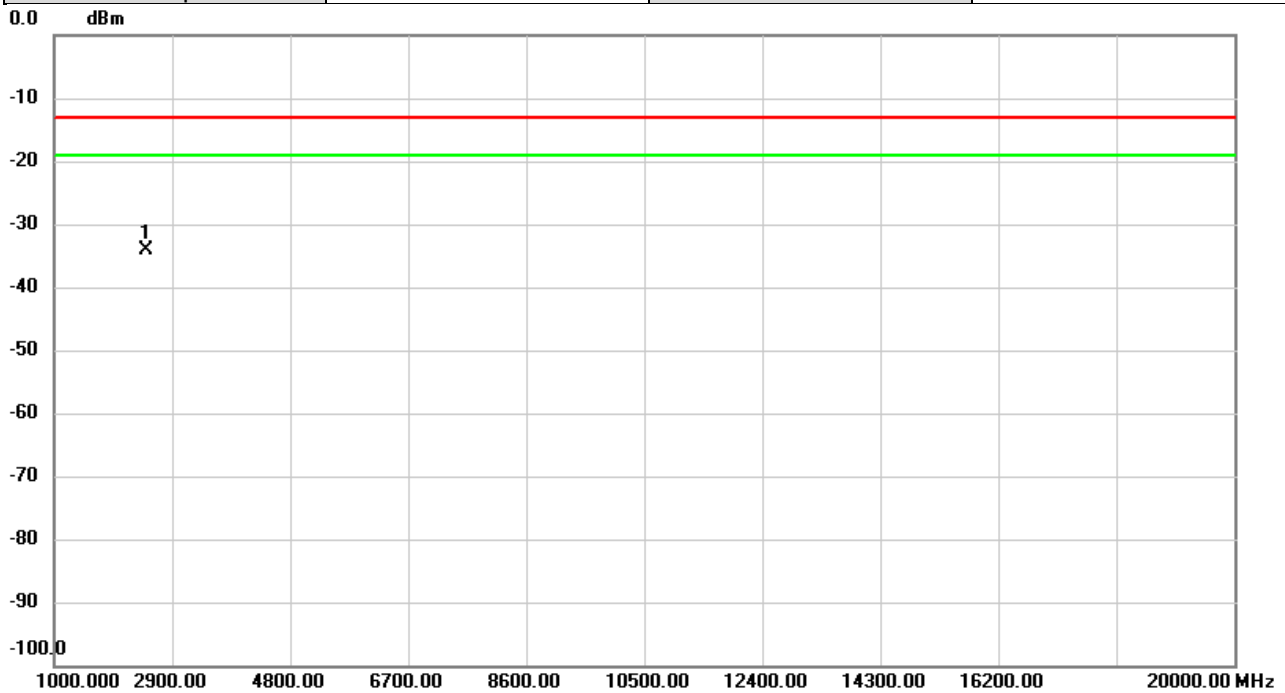


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm    | dB     | Detector | Comment |
| 1   | *   | 2489.600 | -29.66        | -4.36          | -34.02      | -13.00 | -21.02 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|              |             |              |            |
|--------------|-------------|--------------|------------|
| Test Mode    | LTE Band 26 | Test Date    | 2021/4/2   |
| Test Channel | CH26915     | Polarization | Horizontal |
| Temp         | 22°C        | Hum.         | 67%        |

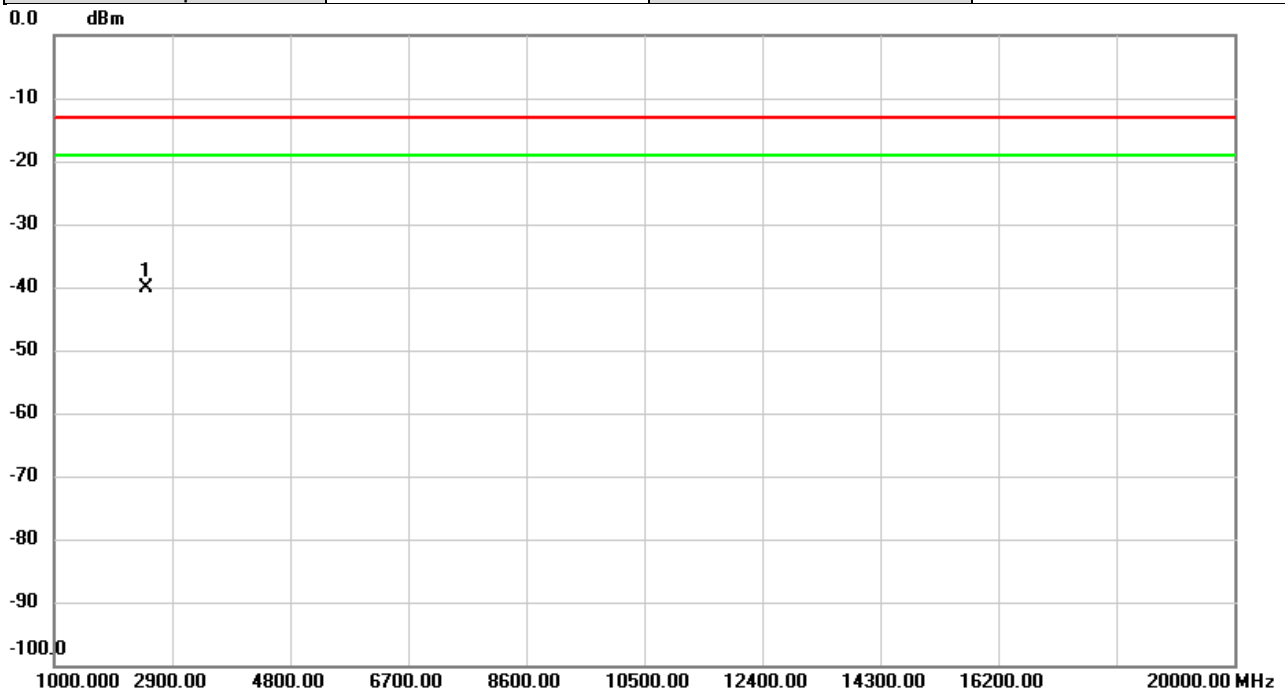

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBm           | dB             | dBm         | dBm    | dB     | Detector | Comment |
| 1   | *   | 2489.600 | -35.34        | -4.73          | -40.07      | -13.00 | -27.07 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**End of Test Report**