

FCC Test Report

Product Name	Intel® Dual Band Wireless-AC 8260
Model No.	8260NGW
FCC ID.	PD98260NG, PD98260NGU

*FCC ID: PD98260NG (for OEM factory install)

*FCC ID: PD98260NGU (for User Installation w/bios lock feature.)

Applicant	Intel Mobile Communications France SAS
Address	Le Navigator B 505 route des Lucioles CS 70293 06905 Sophia Antipolis cedex

Date of Receipt	Mar. 30, 2015
Issued Date	May 13, 2015
Report No.	1540055R-RFUSP01V00-A
Report Version	V0.1-Draft



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report


Issued Date: May 13, 2015

Report No.: 1540055R-RFUSP01V00-A




Product Name	Intel® Dual Band Wireless-AC 8260
Applicant	Intel Mobile Communications France SAS
Address	Le Navigator B 505 route des Lucioles CS 70293 06905 Sophia Antipolis cedex
Manufacturer	Intel Mobile Communications France SAS
Model No.	8260NGW
FCC ID.	PD98260NG, PD98260NGU
EUT Rated Voltage	DC 3.3V (via Mini-PCI Express slot)
EUT Test Voltage	AC 120V/ 60Hz
Trade Name	Intel
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2013 ANSI C63.4: 2014, ANSI C63.10: 2009
Test Result	Complied

Documented By



(Senior Adm. Specialist / Jinn Chen)

Tested By



(Engineer / Alan Chen)

Approved By



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description.....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
2. CONDUCTED EMISSION	10
2.1. Test Equipment.....	10
2.2. Test Setup	10
2.3. Limits.....	11
2.4. Test Procedure	11
2.5. Uncertainty	11
2.6. Test Result of Conducted Emission.....	12
3. PEAK POWER OUTPUT	14
3.1. Test Equipment.....	14
3.2. Test Setup	14
3.3. Limit	14
3.4. Test Procedure	14
3.5. Uncertainty	14
3.6. Test Result of Peak Power Output.....	15
4. RADIATED EMISSION	18
4.1. Test Equipment.....	18
4.2. Test Setup	18
4.3. Limits.....	19
4.4. Test Procedure	20
4.5. Uncertainty	20
4.6. Test Result of Radiated Emission.....	21
5. RF ANTENNA CONDUCTED TEST	33
5.1. Test Equipment.....	33
5.2. Test Setup	33
5.3. Limits.....	33
5.4. Test Procedure	33
5.5. Uncertainty	33
5.6. Test Result of RF Antenna Conducted Test.....	34
6. BAND EDGE	37
6.1. Test Equipment.....	37
6.2. Test Setup	37
6.3. Limit	38
6.4. Test Procedure	38
6.5. Uncertainty	38
6.6. Test Result of Band Edge	39
7. CHANNEL NUMBER.....	51
7.1. Test Equipment.....	51
7.2. Test Setup	51
7.3. Limit	51
7.4. Test Procedure	51
7.5. Uncertainty	51
7.6. Test Result of Channel Number.....	52
8. CHANNEL SEPARATION.....	55
8.1. Test Equipment.....	55
8.2. Test Setup	55
8.3. Limit	55
8.4. Test Procedure	55
8.5. Uncertainty	55
8.6. Test Result of Channel Separation.....	56
9. DWELL TIME.....	62
9.1. Test Equipment.....	62

9.2.	Test Setup	62
9.3.	Limit	62
9.4.	Test Procedure	62
9.5.	Uncertainty	62
9.6.	Test Result of Dwell Time	63
10.	OCCUPIED BANDWIDTH	69
10.1.	Test Equipment	69
10.2.	Test Setup	69
10.3.	Limits	69
10.4.	Test Procedure	69
10.5.	Uncertainty	69
10.6.	Test Result of Occupied Bandwidth	70
11.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	79

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Intel® Dual Band Wireless-AC 8260
Trade Name	Intel
Model No.	8260NGW
FCC ID.	PD98260NG, PD98260NGU
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	PIFA Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	SkyCross	N/A (Main) N/A (Aux)	PIFA	3.24 dBi for 2.4GHz

Note: 1. The antenna of EUT is conform to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is an Intel® Dual Band Wireless-AC 8260 with a built-in WLAN and Bluetooth transceiver, this report for Bluetooth.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.

Test Mode	Mode 1: Transmit - 1Mbps (GFSK) Mode 2: Transmit - 2Mbps (4DQPSK) Mode 3: Transmit - 3Mbps (8DPSK)
-----------	--

1.2. Operational Description

The EUT is an Intel® Dual Band Wireless-AC 8260 with built-in 2.4GHz Bluetooth V2.1+EDR transceiver. The number of the channels is 79 in 2402-2480MHz. This device provides three kinds of transmitting speed and modulation, respectively GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps). The antenna is PIFA antenna and provides diversity function to improve the receiving function.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. The transmitter is presented with a continuous data stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its 79 channels and over the minimum number of hopping channels (75 channels).

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted.

The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	N/A	N/A	Non-Shielded, 1.8m
2 Test Fixture	Intel	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A Test Fixture Cable	Non-Shielded, 1.0m

1.4. Configuration of Tested System

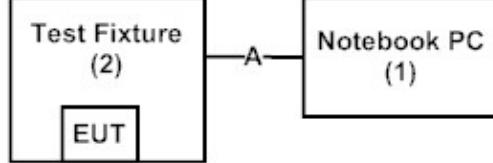

1.5. EUT Exercise Software

- (1) Setup the EUT and Peripherals as shown on 1.4
- (2) Execute software “DRTU (Ver 1.8.1-01253)” on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site: <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>
The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site: <http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng,
Linkou Dist. New Taipei City 24451,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2014	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2015	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2015	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2015	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2015	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

2.2. Test Setup

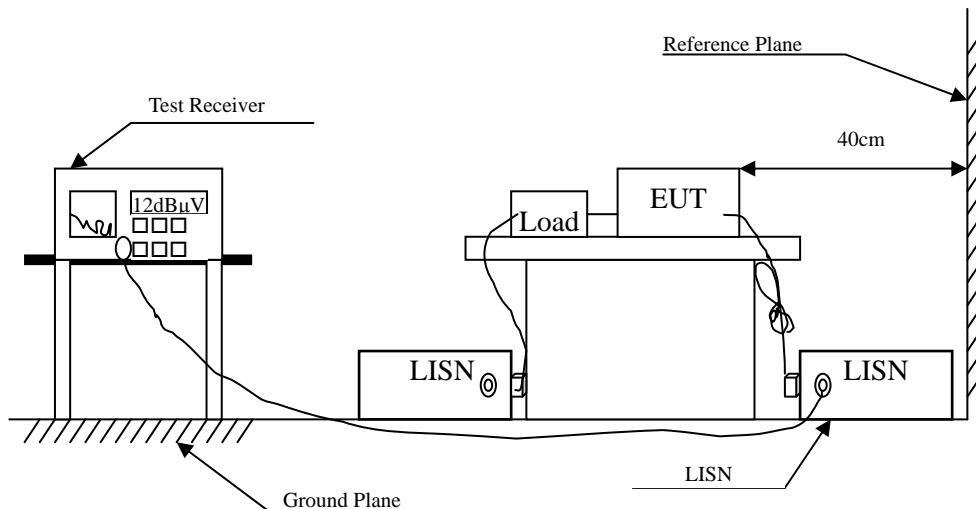

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V	Margin dB	Limit dB μ V
LINE 1					
Quasi-Peak					
0.158	9.668	30.270	39.938	-25.833	65.771
0.209	9.661	27.480	37.141	-27.173	64.314
0.548	9.679	32.270	41.949	-14.051	56.000
2.330	9.783	21.970	31.753	-24.247	56.000
4.638	9.853	13.630	23.483	-32.517	56.000
17.853	10.042	11.580	21.622	-38.378	60.000
Average					
0.158	9.668	17.830	27.498	-28.273	55.771
0.209	9.661	17.760	27.421	-26.893	54.314
0.548	9.679	30.200	39.879	-6.121	46.000
2.330	9.783	13.880	23.663	-22.337	46.000
4.638	9.853	4.990	14.843	-31.157	46.000
17.853	10.042	3.120	13.162	-36.838	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "  " means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V	dB	dB μ V
LINE 2					
Quasi-Peak					
0.150	9.671	36.210	45.881	-20.119	66.000
0.240	9.663	23.380	33.043	-30.386	63.429
0.548	9.679	31.360	41.039	-14.961	56.000
2.396	9.784	21.760	31.544	-24.456	56.000
4.650	9.853	13.450	23.303	-32.697	56.000
18.728	10.172	13.110	23.282	-36.718	60.000
Average					
0.150	9.671	22.250	31.921	-24.079	56.000
0.240	9.663	12.460	22.123	-31.306	53.429
0.548	9.679	29.200	38.879	-7.121	46.000
2.396	9.784	13.890	23.674	-22.326	46.000
4.650	9.853	4.080	13.933	-32.067	46.000
18.728	10.172	3.570	13.742	-36.258	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "  " means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor


3. Peak Power Output

3.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Power Meter	Anritsu	ML2495A/6K00003357	May, 2015
X Power Sensor	Anritsu	MA2411B/0738448	Jun, 2014

Note: 1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

3.2. Test Setup

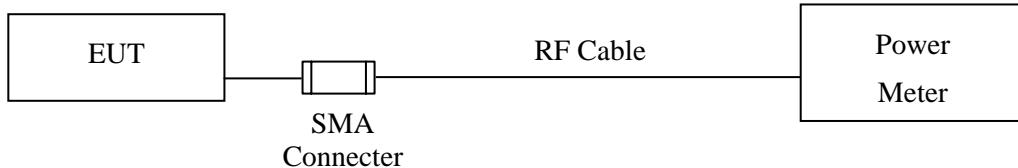

3.3. Limit

The maximum peak power shall be less 1Watt.

3.4. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Peak Power Output

Product : Intel® Dual Band Wireless-AC 8260
Test Item : Peak Power Output
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	11.47	1 Watt= 30 dBm	Pass
Channel 39	2441.00	11.45	1 Watt= 30 dBm	Pass
Channel 78	2480.00	11.24	1 Watt= 30 dBm	Pass

Product : Intel® Dual Band Wireless-AC 8260
Test Item : Peak Power Output
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	9.43	1 Watt= 30 dBm	Pass
Channel 39	2441.00	9.45	1 Watt= 30 dBm	Pass
Channel 78	2480.00	9.40	1 Watt= 30 dBm	Pass

Product : Intel® Dual Band Wireless-AC 8260
Test Item : Peak Power Output
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	9.34	1 Watt= 30 dBm	Pass
Channel 39	2441.00	9.38	1 Watt= 30 dBm	Pass
Channel 78	2480.00	9.27	1 Watt= 30 dBm	Pass

4. Radiated Emission

4.1. Test Equipment

The following test equipments are used during the radiated emission test:


Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Magnetic Loop Antenna	Teseq	HLA6121/ 37133	Sep, 2014
	X	Bilog Antenna	Schaffner Chase	CBL6112B/ 2707	Jun, 2014
	X	EMI Test Receiver	R&S	ESCS 30/838251/ 001	Jun, 2014
	X	Coaxial Cable	QTK(Arnist)	RG 214/ LC003-RG	Jun, 2014
	X	Coaxial signal switch	Arnist	MP59B/ 6200798682	Jun, 2014

Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug, 2014
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2014
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2014


Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

4.2. Test Setup

Below 1GHz

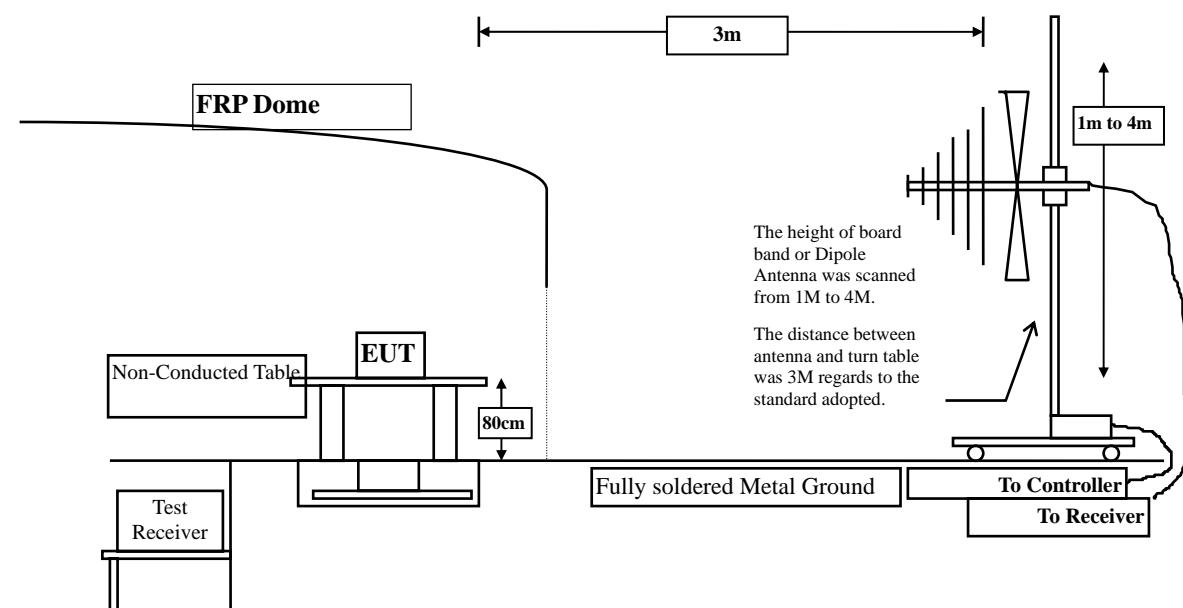

Above 1GHz

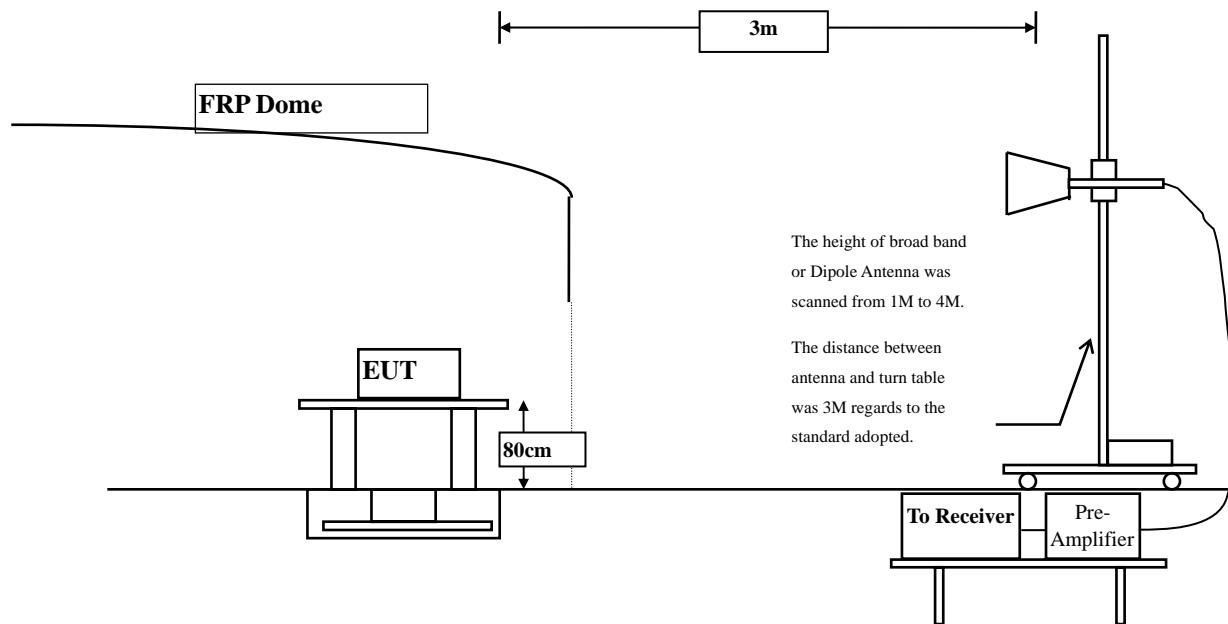

4.3. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dB μ V/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks:

1. RF Voltage (dB μ V) = $20 \log \text{RF Voltage (uV)}$
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested compliance to FCC 47CFR 15.249 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and

30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4804.000	3.327	39.420	42.747	-31.253	74.000
7206.000	10.136	41.050	51.186	-22.814	74.000
9608.000	13.706	37.190	50.896	-23.104	74.000

Average

Detector:

--

Vertical

Peak Detector:

4804.000	6.638	42.970	49.607	-24.393	74.000
7206.000	11.005	40.630	51.635	-22.365	74.000
9608.000	14.103	37.530	51.633	-22.367	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4882.000	3.001	39.350	42.351	-31.649	74.000
7323.000	11.846	40.590	52.437	-21.563	74.000
9764.000	12.563	37.590	50.153	-23.847	74.000

Average

Detector:

--

Vertical

Peak Detector:

4882.000	5.713	41.260	46.974	-27.026	74.000
7323.000	12.727	40.290	53.018	-20.982	74.000
9764.000	13.028	37.150	50.178	-23.822	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4960.000	2.760	39.260	42.020	-31.980	74.000
7440.000	12.567	41.260	53.826	-20.174	74.000
9920.000	13.456	37.160	50.616	-23.384	74.000

Average

Detector:

--

Vertical

Peak Detector:

4960.000	5.557	42.230	47.787	-26.213	74.000
7440.000	13.426	40.330	53.755	-20.245	74.000
9920.000	13.958	37.630	51.588	-22.412	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)(2402MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4804.000	3.327	39.260	42.587	-31.413	74.000
7206.000	10.136	41.260	51.396	-22.604	74.000
9608.000	13.706	37.260	50.966	-23.034	74.000

Average

Detector:

--

Vertical

Peak Detector:

4804.000	6.638	42.300	48.937	-25.063	74.000
7206.000	11.005	41.260	52.265	-21.735	74.000
9608.000	14.103	37.150	51.253	-22.747	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4882.000	3.001	39.150	42.151	-31.849	74.000
7323.000	11.846	41.260	53.107	-20.893	74.000
9746.000	12.563	37.150	49.713	-24.287	74.000

Average

Detector:

--

Vertical

Peak Detector:

4882.000	5.713	41.630	47.344	-26.656	74.000
7323.000	12.727	40.360	53.088	-20.912	74.000
9746.000	13.138	37.550	50.688	-23.312	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2480MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4960.000	2.760	39.560	42.320	-31.680	74.000
7440.000	12.567	41.020	53.586	-20.414	74.000
9920.000	13.456	37.850	51.306	-22.694	74.000

Average

Detector:

--

Vertical

Peak Detector:

4960.000	5.557	42.110	47.667	-26.333	74.000
7440.000	13.426	40.030	53.455	-20.545	74.000
9920.000	13.958	37.150	51.108	-22.892	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)(2402MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4804.000	3.327	39.230	42.557	-31.443	74.000
7206.000	10.136	41.290	51.426	-22.574	74.000
9608.000	13.706	37.150	50.856	-23.144	74.000

Average

Detector:

--

Vertical

Peak Detector:

4804.000	6.638	42.010	48.647	-25.353	74.000
7206.000	11.005	41.120	52.125	-21.875	74.000
9608.000	14.103	37.260	51.363	-22.637	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4882.000	3.001	39.110	42.111	-31.889	74.000
7323.000	11.846	41.260	53.107	-20.893	74.000
9746.000	12.645	37.590	50.234	-23.766	74.000

Average

Detector:

--

Vertical

Peak Detector:

4882.000	5.713	41.850	47.564	-26.436	74.000
7323.000	12.727	41.020	53.748	-20.252	74.000
9764.000	13.028	37.150	50.178	-23.822	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2480MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal

Peak Detector:

4960.000	2.760	39.690	42.450	-31.550	74.000
7440.000	12.567	41.010	53.576	-20.424	74.000
9920.000	13.456	37.560	51.016	-22.984	74.000

Average

Detector:

--

Vertical

Peak Detector:

4960.000	2.760	41.590	44.350	-29.650	74.000
7440.000	13.426	40.130	53.555	-20.445	74.000
9920.000	13.958	37.590	51.548	-22.452	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
196.840	-10.490	41.831	31.341	-12.159	43.500
369.500	0.680	34.376	35.056	-10.944	46.000
495.600	1.288	34.003	35.291	-10.709	46.000
619.760	1.866	31.991	33.857	-12.143	46.000
792.420	6.157	26.165	32.322	-13.678	46.000
920.460	6.542	27.899	34.441	-11.559	46.000
Vertical					
121.180	-3.650	33.869	30.219	-13.281	43.500
278.320	-6.250	39.375	33.125	-12.875	46.000
460.680	-2.080	32.926	30.846	-15.154	46.000
563.500	-2.668	37.820	35.153	-10.847	46.000
741.980	-0.560	35.072	34.512	-11.488	46.000
943.740	3.170	28.523	31.693	-14.307	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit		
					dB	dB μ V/m	
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m		
Horizontal							
156.100	-8.635	40.368	31.733	-11.767	43.500		
307.420	-4.332	36.624	32.292	-13.708	46.000		
466.500	3.000	33.224	36.224	-9.776	46.000		
621.700	1.612	26.997	28.609	-17.391	46.000		
773.020	4.922	30.988	35.910	-10.090	46.000		
889.420	6.370	30.323	36.693	-9.307	46.000		
Vertical							
128.940	-3.837	36.298	32.461	-11.039	43.500		
266.680	-5.736	40.230	34.494	-11.506	46.000		
410.240	-4.580	38.356	33.776	-12.224	46.000		
569.320	-2.610	39.309	36.699	-9.301	46.000		
724.520	-0.960	34.766	33.806	-12.194	46.000		
881.660	1.090	37.166	38.256	-7.744	46.000		

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
214.300	-10.488	40.658	30.169	-13.331	43.500
379.200	1.206	32.848	34.054	-11.946	46.000
518.880	3.010	26.871	29.881	-16.119	46.000
668.260	1.700	25.296	26.996	-19.004	46.000
807.940	5.979	25.908	31.887	-14.113	46.000
920.460	6.542	29.718	36.260	-9.740	46.000
Vertical					
154.160	-5.414	37.980	32.566	-10.934	43.500
313.240	-4.286	40.257	35.971	-10.029	46.000
487.840	-2.466	38.713	36.246	-9.754	46.000
660.500	-1.267	34.050	32.783	-13.217	46.000
815.700	2.665	33.448	36.113	-9.887	46.000
955.380	2.750	32.446	35.196	-10.804	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.


5. RF Antenna Conducted Test

5.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note: 1. All equipments are calibrated every one year.
2. The test instruments Marked "X" are used to measure the final test results.

5.2. Test Setup

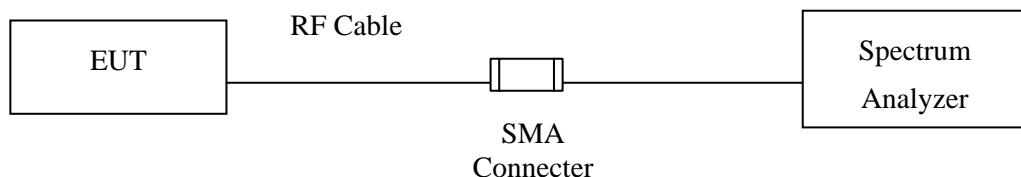

5.3. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.4. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

5.5. Uncertainty

± 150Hz

5.6. Test Result of RF Antenna Conducted Test

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Figure Channel 00:

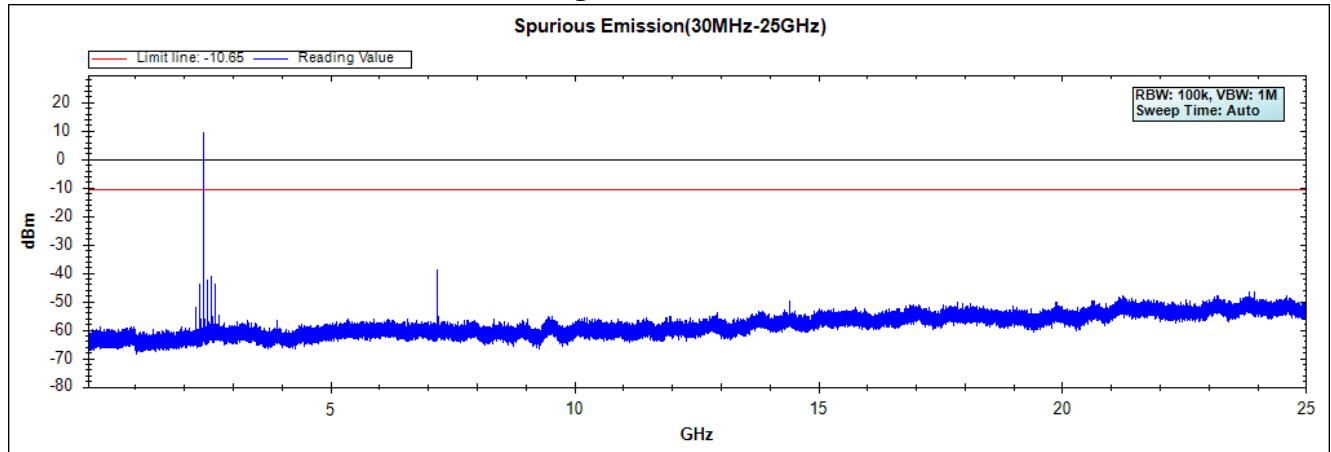


Figure Channel 39:


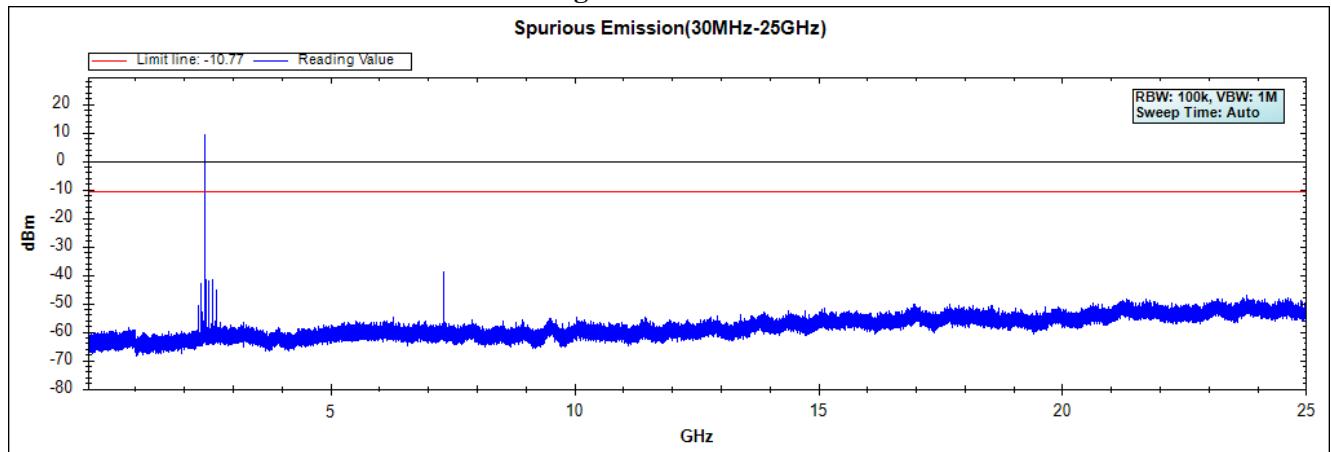


Figure Channel 78:

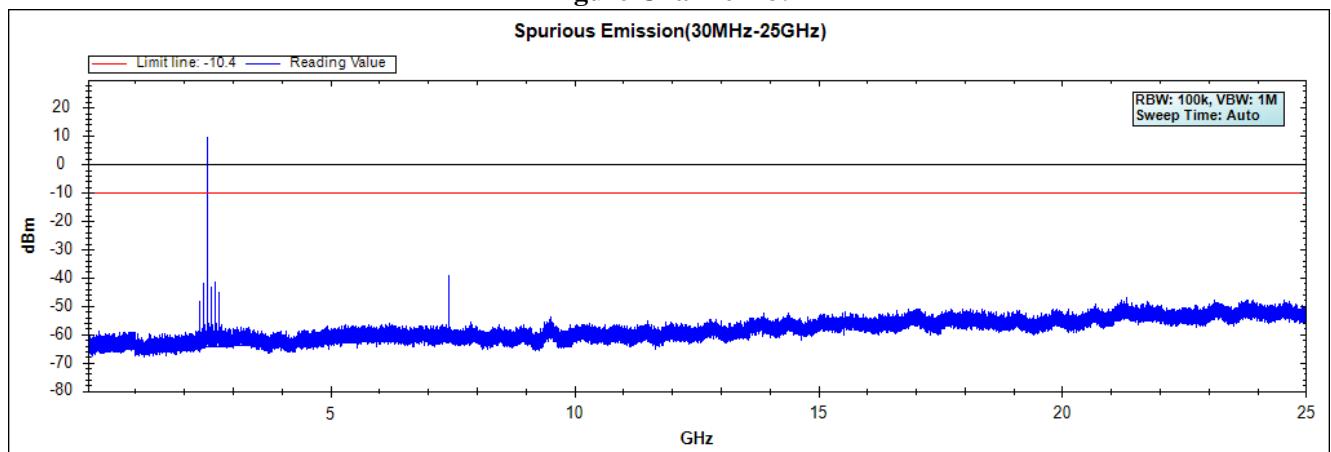

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)

Figure Channel 00:

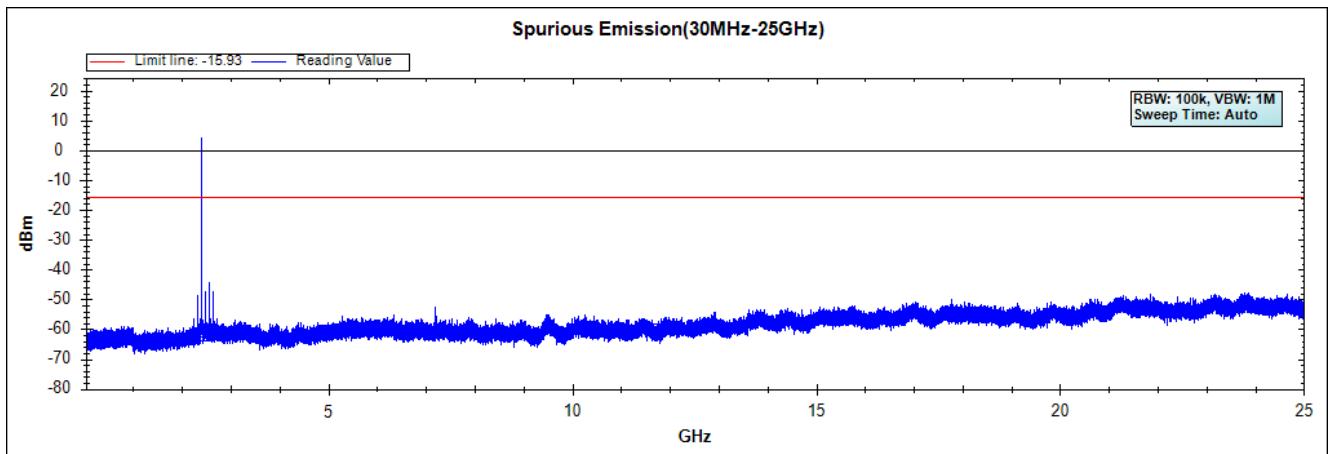


Figure Channel 39:


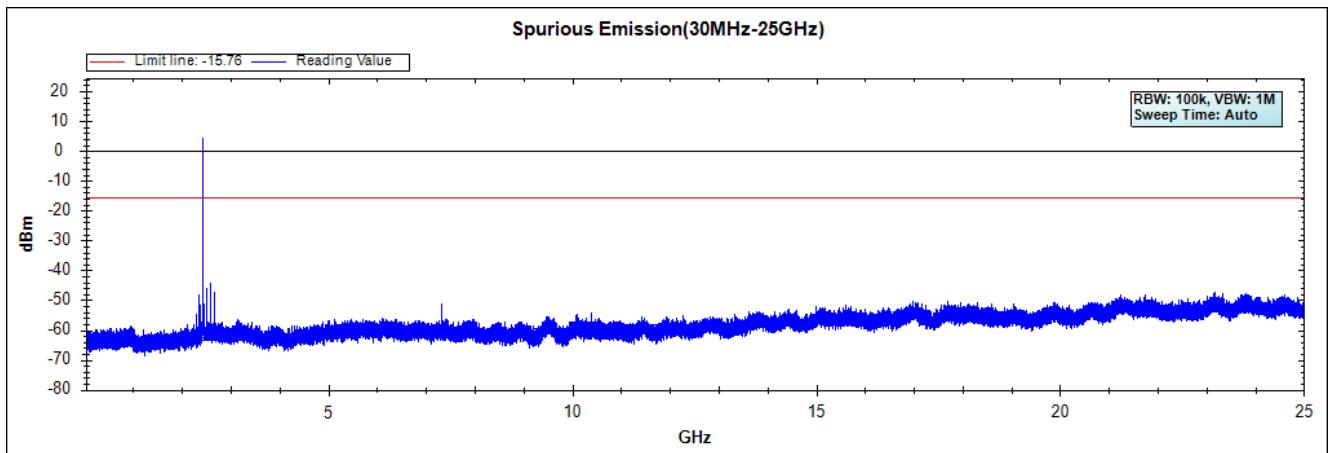


Figure Channel 78:

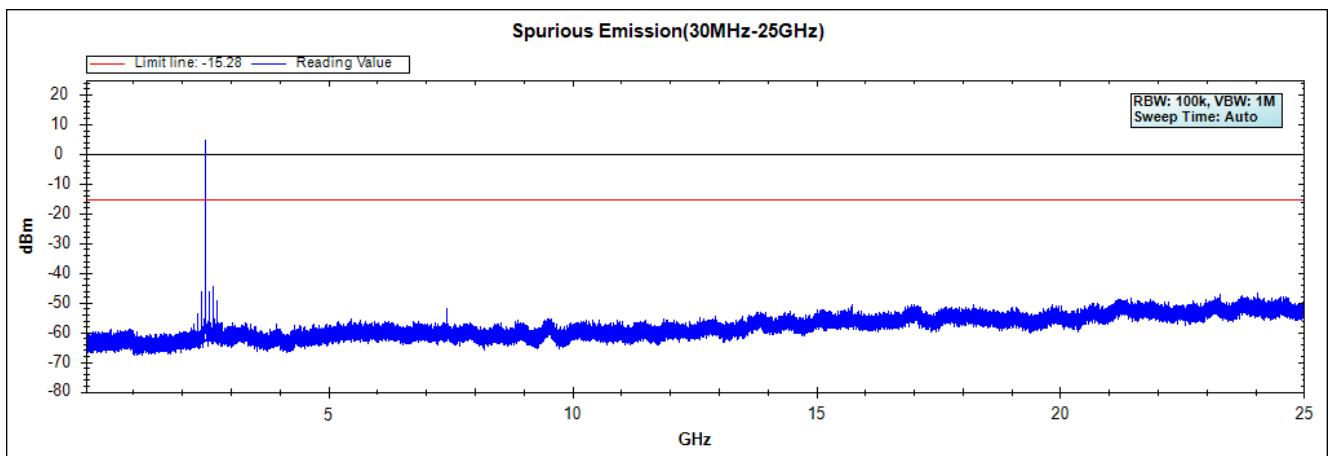

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)

Figure Channel 00:

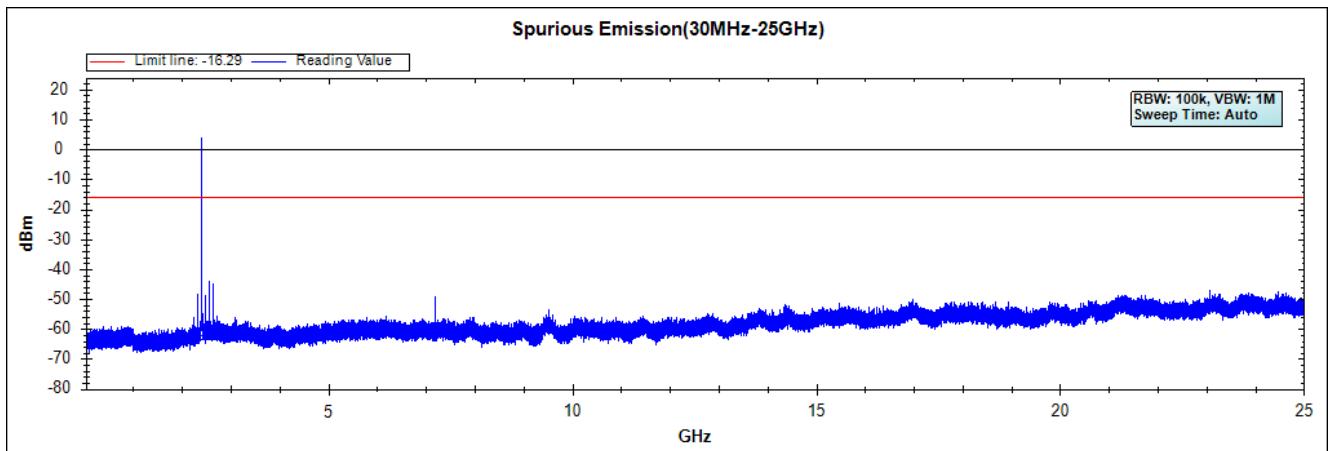


Figure Channel 39:


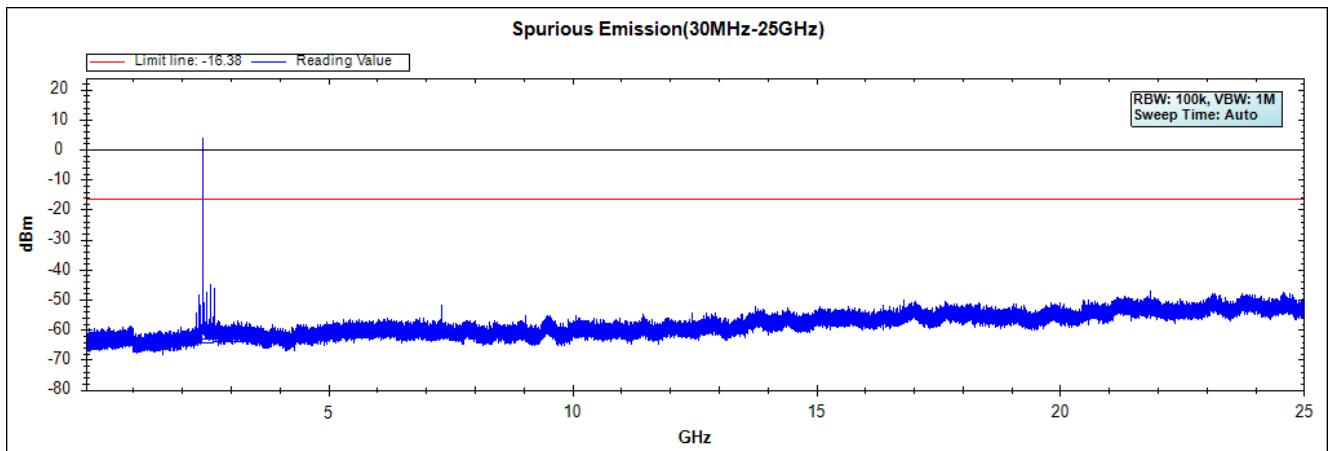


Figure Channel 78:

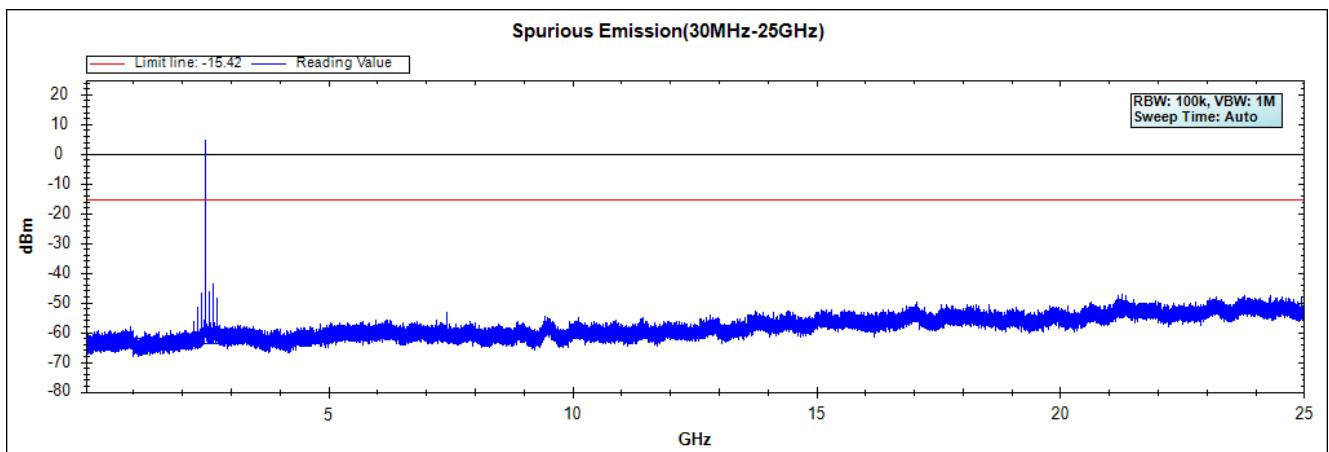

6. Band Edge

6.1. Test Equipment

RF Radiated Measurement:

The following test equipments are used during the band edge tests:


Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug, 2014
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2014
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2014

Note: 1. All equipments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.

6.2. Test Setup

RF Radiated Measurement:

Above 1GHz

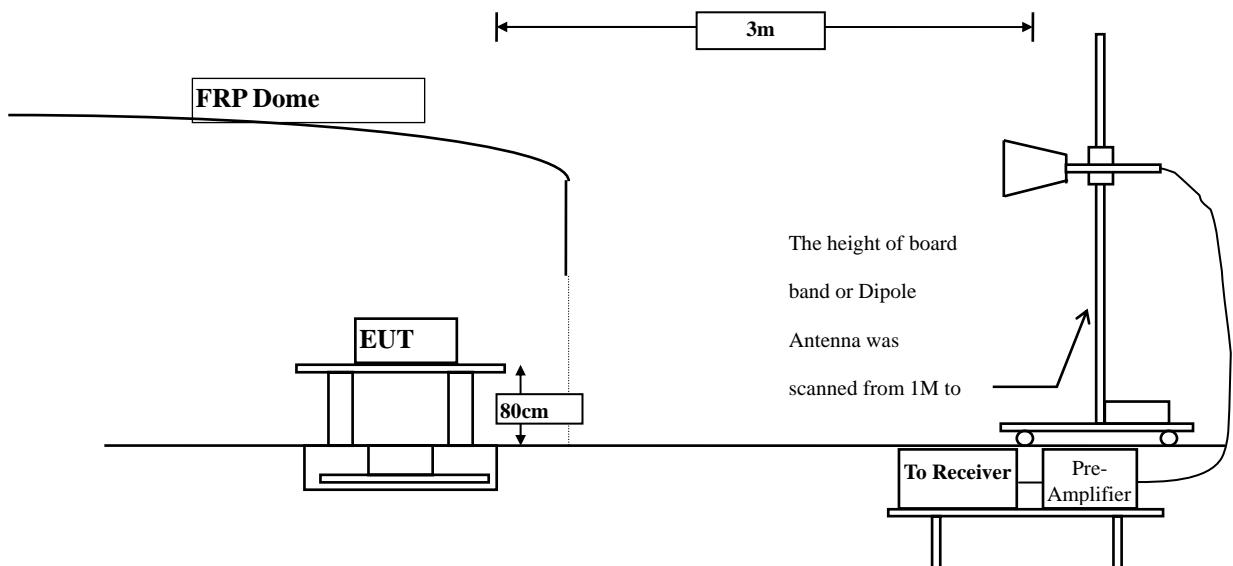

6.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.4. Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2009 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

6.6. Test Result of Band Edge

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2390.000	-1.131	53.203	52.072	74.00	54.00	Pass
00 (Peak)	2400.000	-1.084	72.049	70.966	74.00	54.00	Pass
00 (Peak)	2401.900	-1.073	109.369	108.296	--	--	--
00 (Average)	2363.400	-1.235	38.728	37.492	74.00	54.00	Pass
00 (Average)	2390.000	-1.131	36.447	35.316	74.00	54.00	Pass
00 (Average)	2400.000	-1.084	54.973	53.890	74.00	54.00	Pass
00 (Average)	2402.100	-1.072	94.268	93.196	--	--	--

Figure Channel 00:

Horizontal (Peak)


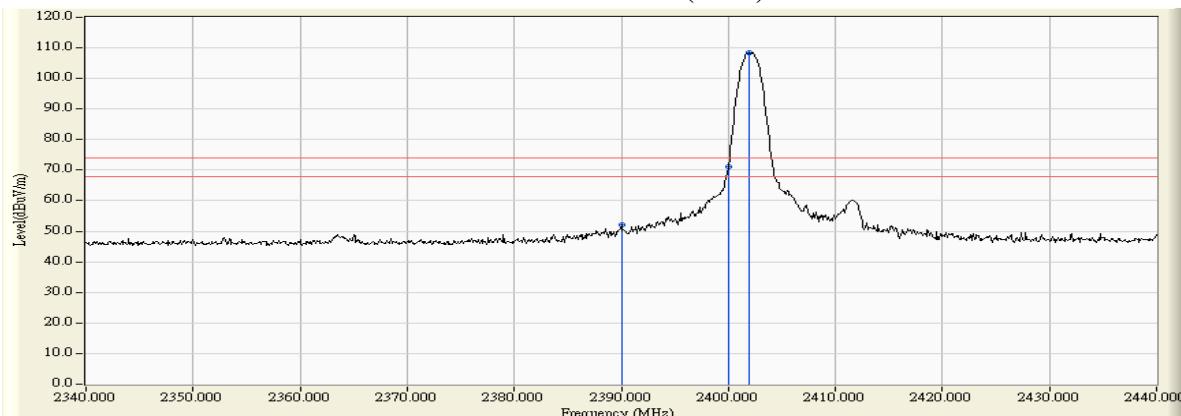


Figure Channel 00:

Horizontal (Average)

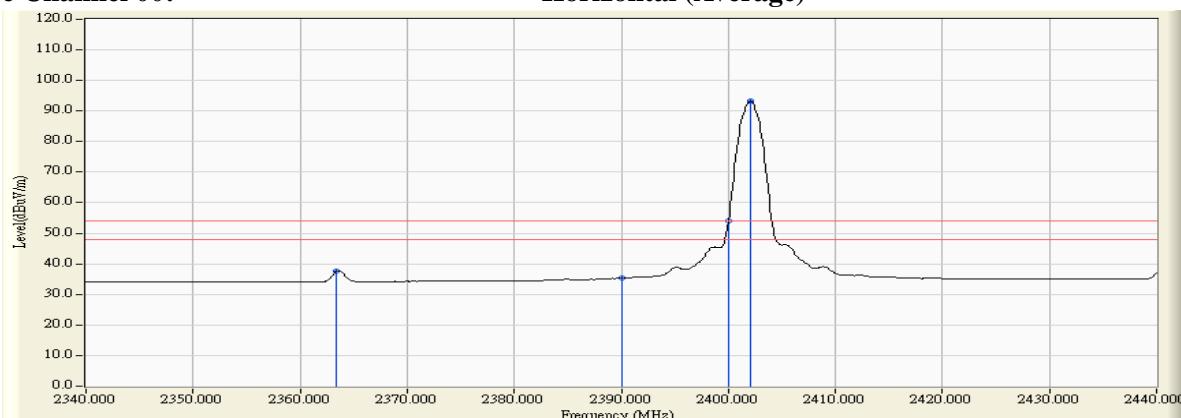

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2387.500	-1.713	50.073	48.360	74.00	54.00	Pass
00 (Peak)	2390.000	-1.725	47.959	46.234	74.00	54.00	Pass
00 (Peak)	2400.000	-1.733	71.016	69.284	74.00	54.00	Pass
00 (Peak)	2401.900	-1.729	106.778	105.049	--	--	--
00 (Average)	2363.700	-1.604	37.428	35.825	74.00	54.00	Pass
00 (Average)	2390.000	-1.725	35.967	34.242	74.00	54.00	Pass
00 (Average)	2400.000	-1.733	53.785	52.053	74.00	54.00	Pass
00 (Average)	2402.100	-1.729	92.044	90.315	--	--	--

Figure Channel 00:

Vertical (Peak)


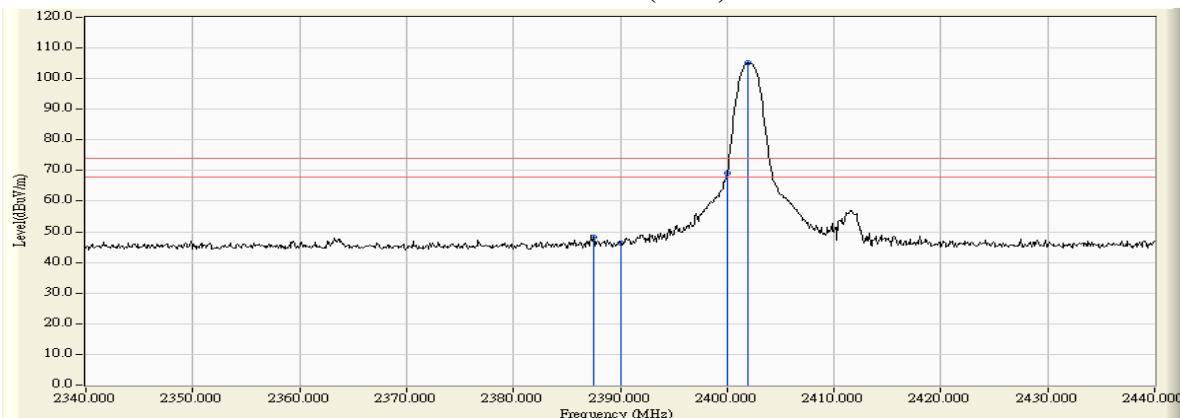


Figure Channel 00:

Vertical (Average)

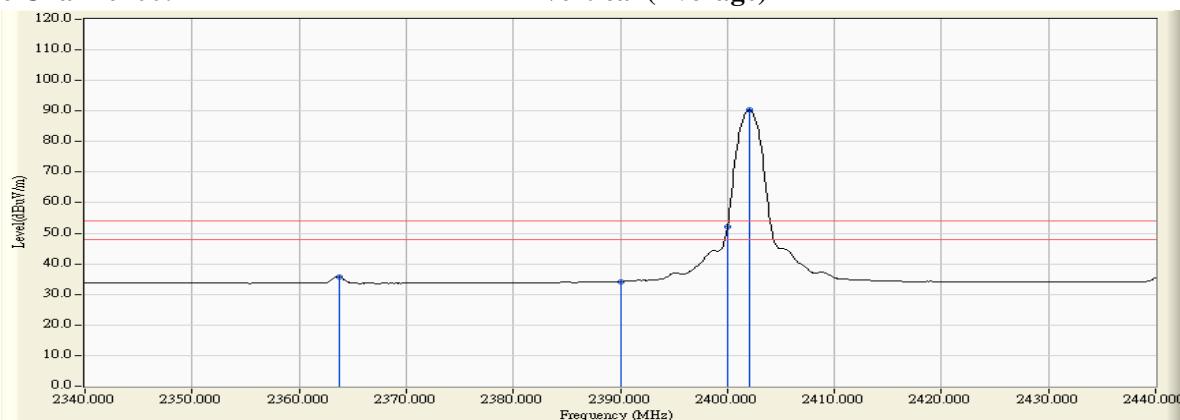

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2480.200	-0.579	109.360	108.781	--	--	--
78 (Peak)	2483.500	-0.558	63.253	62.695	74.00	54.00	Pass
78 (Average)	2480.000	-0.581	93.811	93.230	--	--	--
78 (Average)	2483.500	-0.558	46.971	46.413	74.00	54.00	Pass

Figure Channel 78:

Horizontal (Peak)


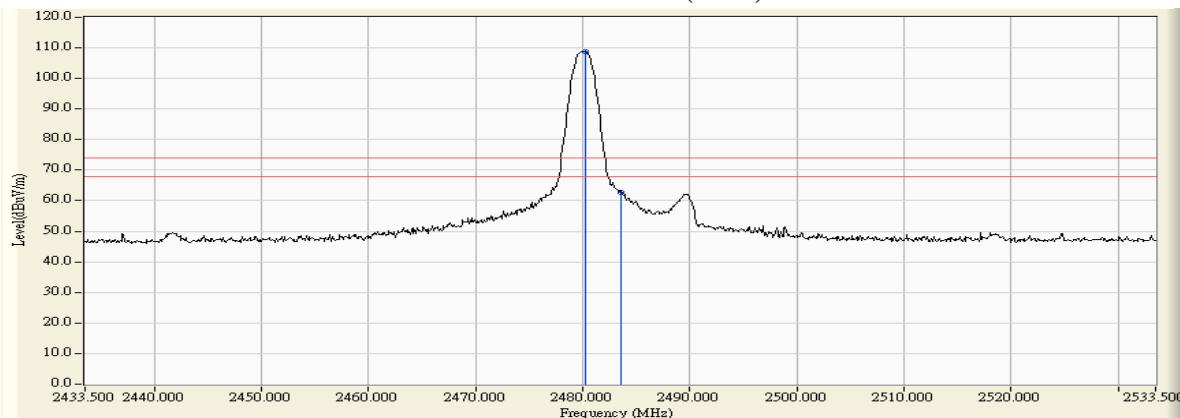


Figure Channel 78:

Horizontal (Average)

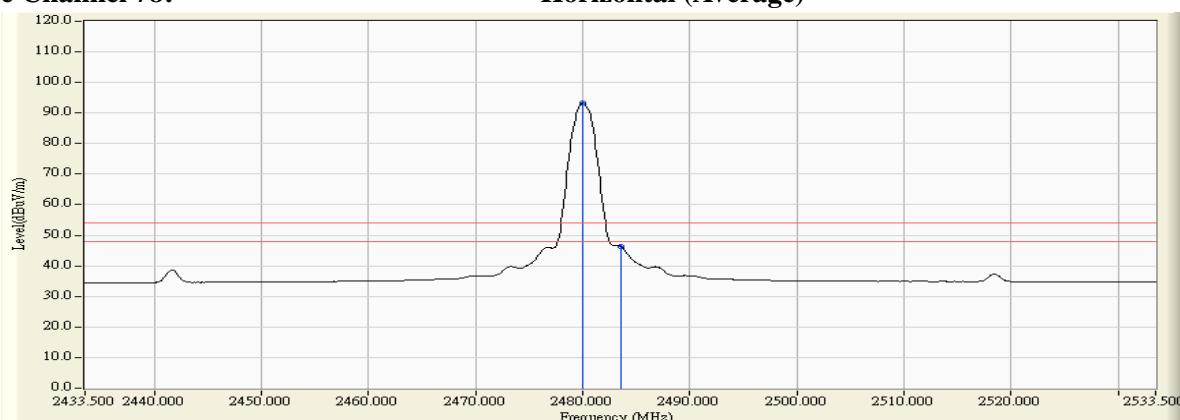

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2480.200	-1.323	106.345	105.022	--	--	--
78 (Peak)	2483.500	-1.305	62.507	61.202	74.00	54.00	Pass
78 (Average)	2480.000	-1.324	92.152	90.828	--	--	--
78 (Average)	2483.500	-1.305	46.555	45.250	74.00	54.00	Pass

Figure Channel 78:

Vertical (Peak)


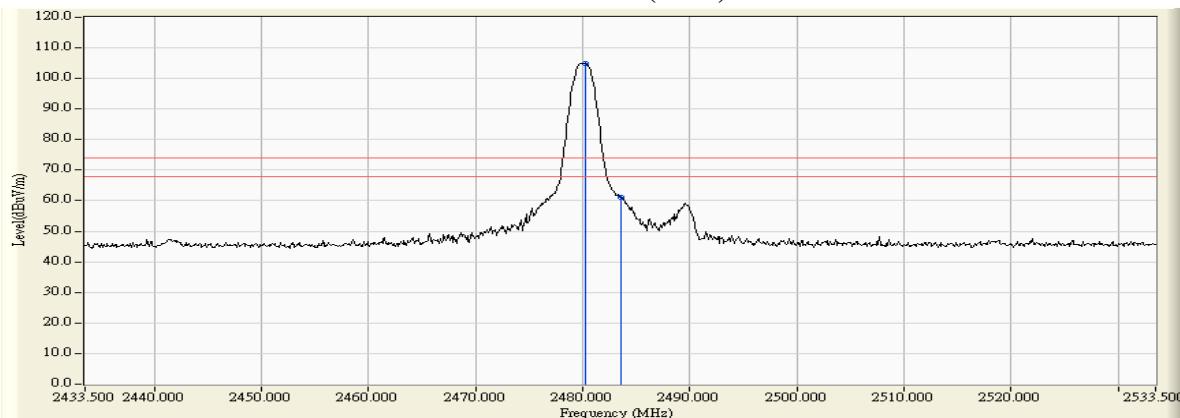


Figure Channel 78:

Vertical (Average)

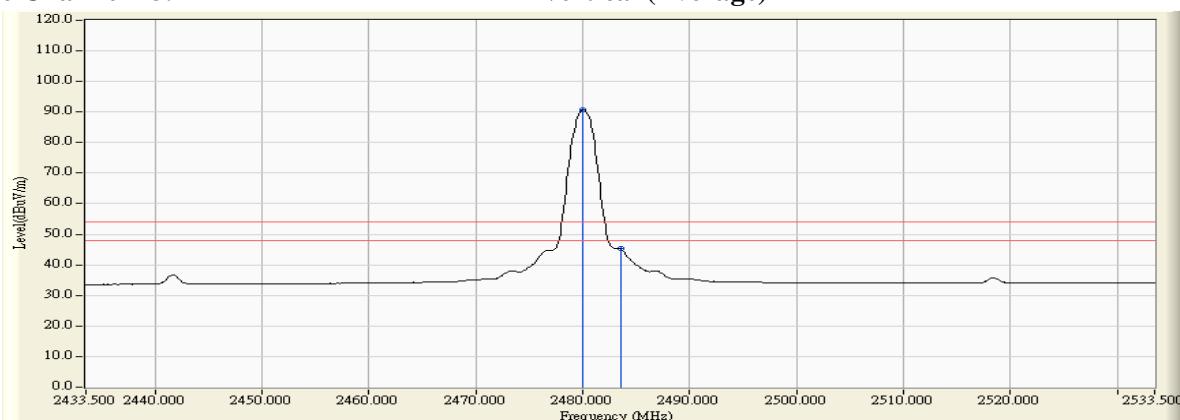

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2370.600	-1.206	52.066	50.859	74.00	54.00	Pass
00 (Peak)	2390.000	-1.131	51.890	50.759	74.00	54.00	Pass
00 (Peak)	2400.000	-1.084	80.839	79.756	74.00	54.00	Pass
00 (Peak)	2401.900	-1.073	107.589	106.516	--	--	--
00 (Average)	2390.000	-1.131	40.339	39.208	74.00	54.00	Pass
00 (Average)	2400.000	-1.084	62.812	61.729	74.00	54.00	Pass
00 (Average)	2402.000	-1.073	91.814	90.742	--	--	--

Figure Channel 00:

Horizontal (Peak)


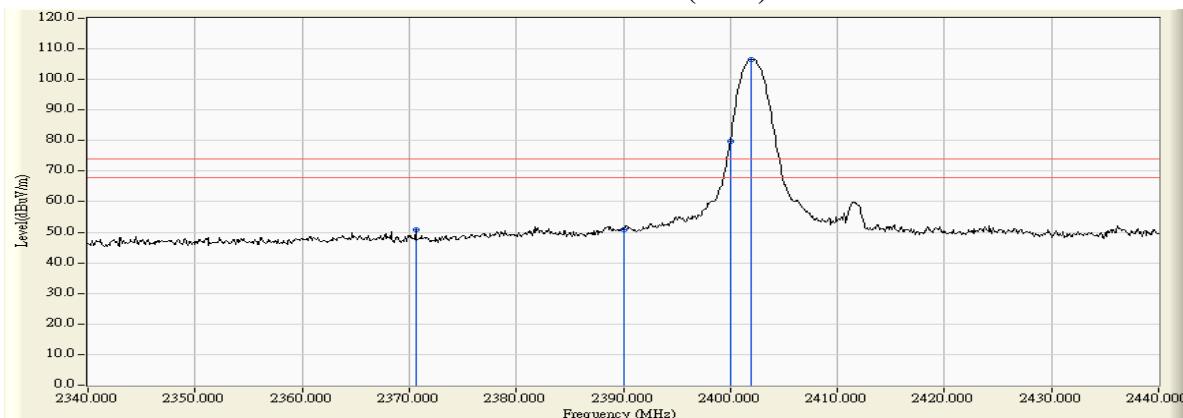


Figure Channel 00:

Horizontal (Average)

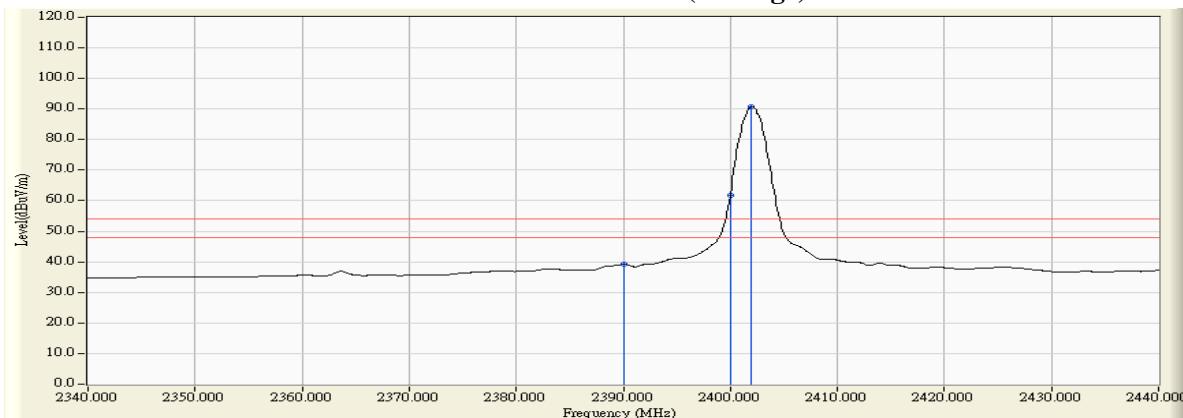

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2388.200	-1.716	51.033	49.317	74.00	54.00	Pass
00 (Peak)	2390.000	-1.725	49.351	47.626	74.00	54.00	Pass
00 (Peak)	2400.000	-1.733	78.051	76.319	74.00	54.00	Pass
00 (Peak)	2401.900	-1.729	104.330	102.601	--	--	--
00 (Average)	2390.000	-1.725	39.132	37.407	74.00	54.00	Pass
00 (Average)	2400.000	-1.733	61.412	59.680	74.00	54.00	Pass
00 (Average)	2402.000	-1.729	89.329	87.600	--	--	--

Figure Channel 00:

Vertical (Peak)


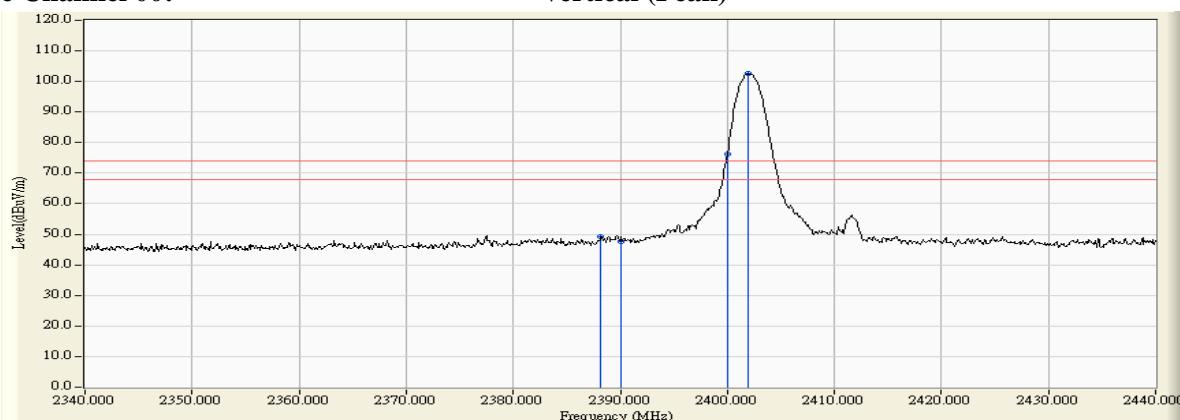


Figure Channel 00:

Vertical (Average)

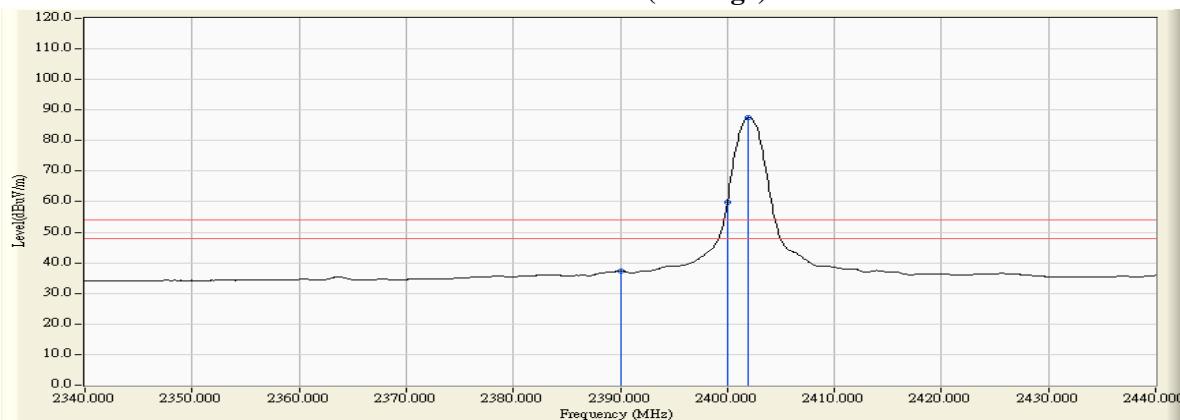

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2479.900	-0.581	107.640	107.059	--	--	--
78 (Peak)	2483.500	-0.558	63.255	62.697	74.00	54.00	Pass
78 (Average)	2480.000	-0.581	91.183	90.602	--	--	--
78 (Average)	2483.500	-0.558	48.784	48.226	74.00	54.00	Pass

Figure Channel 78:

Horizontal (Peak)


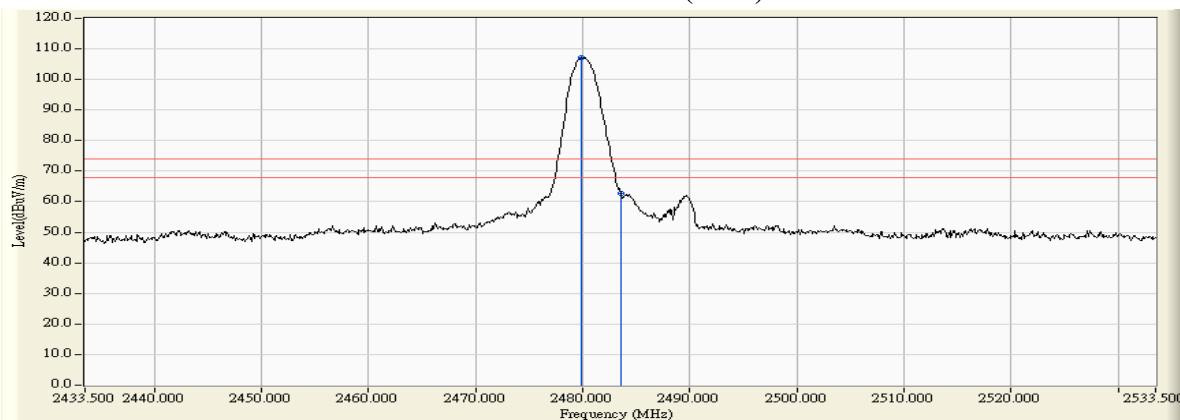


Figure Channel 78:

Horizontal (Average)

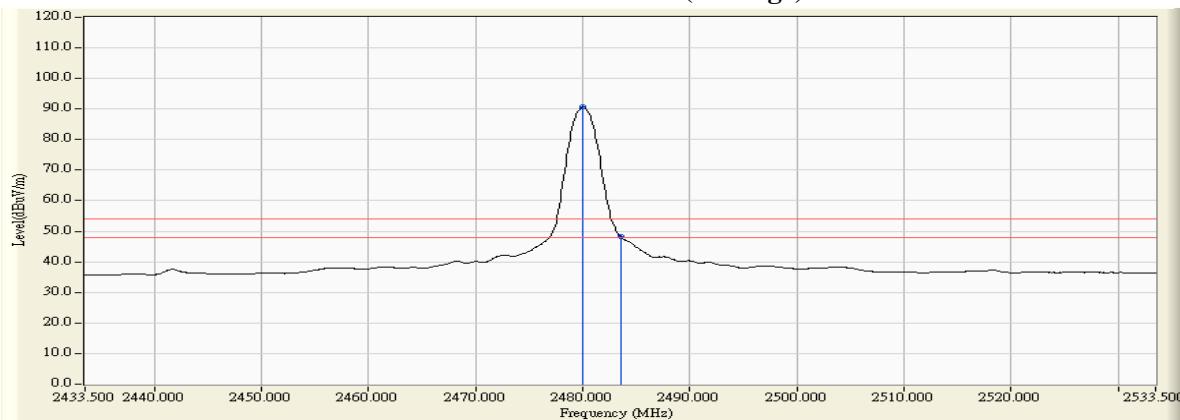

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2479.900	-1.325	105.321	103.996	--	--	--
78 (Peak)	2483.500	-1.305	62.830	61.525	74.00	54.00	Pass
78 (Average)	2480.000	-1.324	89.552	88.228	--	--	--
78 (Average)	2483.500	-1.305	47.955	46.650	74.00	54.00	Pass

Figure Channel 78:

Vertical (Peak)


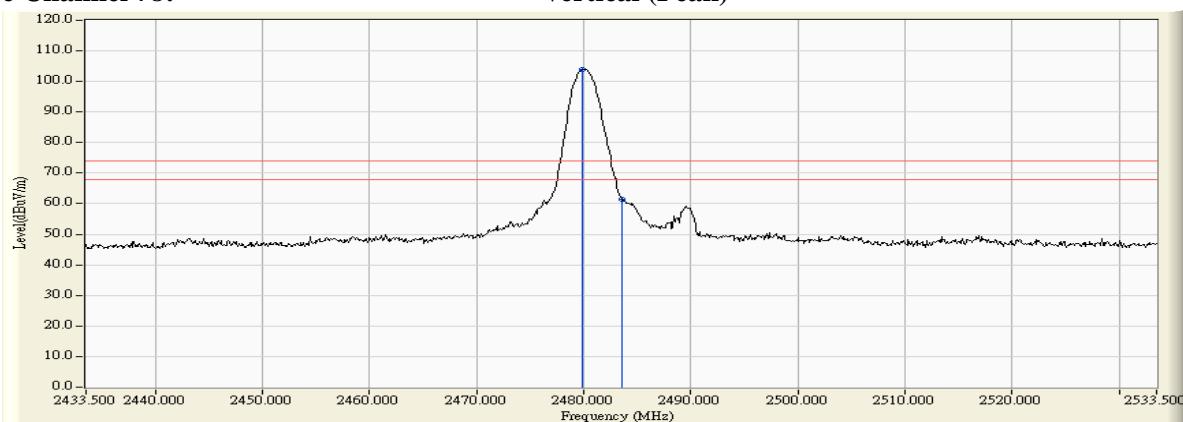


Figure Channel 78:

Vertical (Average)

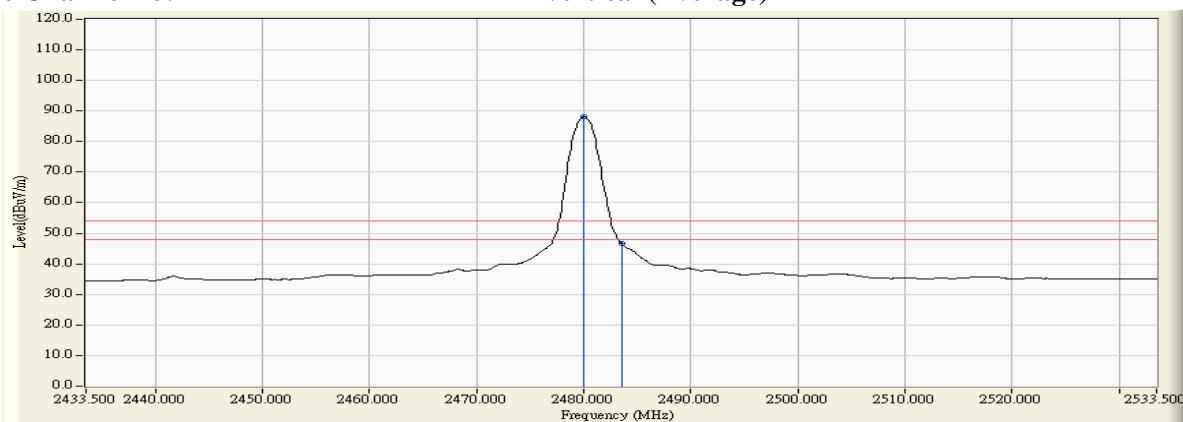

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2388.100	-1.138	57.391	56.253	74.00	54.00	Pass
00 (Peak)	2390.000	-1.131	54.741	53.610	74.00	54.00	Pass
00 (Peak)	2400.000	-1.084	81.308	80.225	74.00	54.00	Pass
00 (Peak)	2402.000	-1.073	107.826	106.754	--	--	--
00 (Average)	2390.000	-1.131	40.298	39.167	74.00	54.00	Pass
00 (Average)	2400.000	-1.084	62.723	61.640	74.00	54.00	Pass
00 (Average)	2402.000	-1.073	91.171	90.099	--	--	--

Figure Channel 00:

Horizontal (Peak)


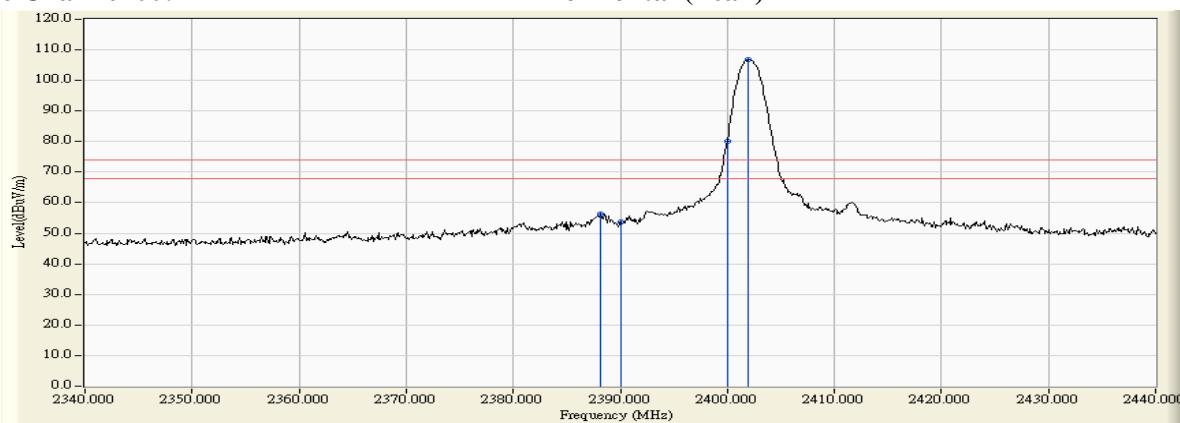


Figure Channel 00:

Horizontal (Average)

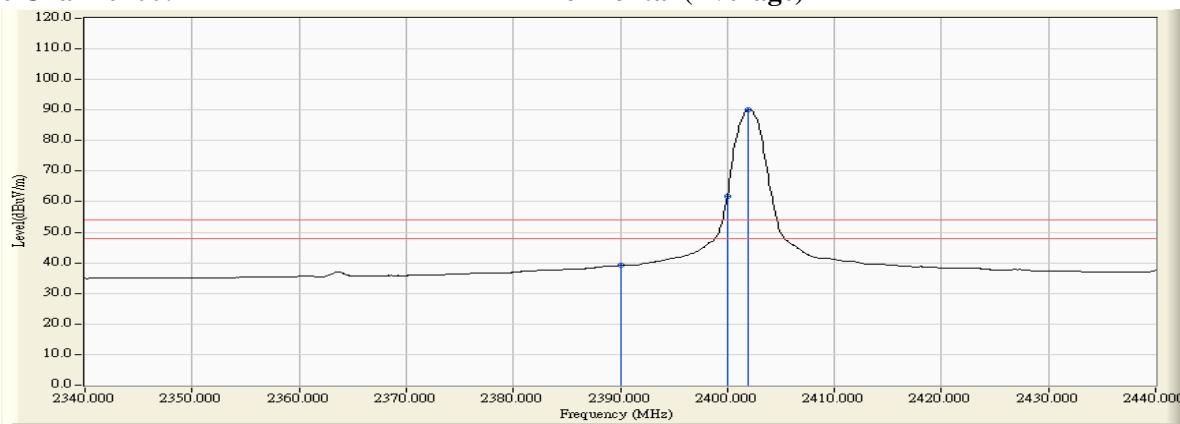

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2388.500	-1.718	54.331	52.613	74.00	54.00	Pass
00 (Peak)	2390.000	-1.725	53.396	51.671	74.00	54.00	Pass
00 (Peak)	2400.000	-1.733	78.883	77.151	74.00	54.00	Pass
00 (Peak)	2402.000	-1.729	104.870	103.141	--	--	--
00 (Average)	2390.000	-1.725	39.043	37.318	74.00	54.00	Pass
00 (Average)	2400.000	-1.733	61.371	59.639	--	--	--
00 (Average)	2402.000	-1.729	89.307	87.578	--	--	--

Figure Channel 00:

Vertical (Peak)


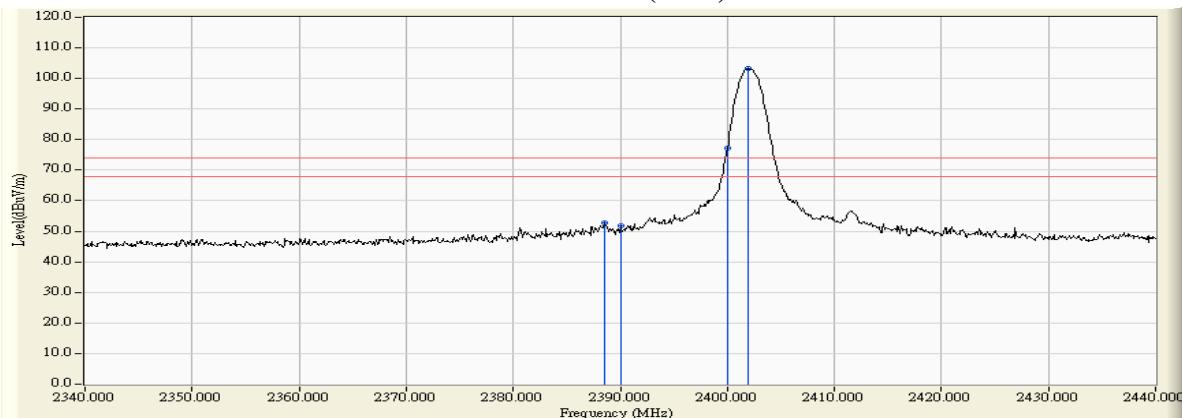


Figure Channel 00:

Vertical (Average)

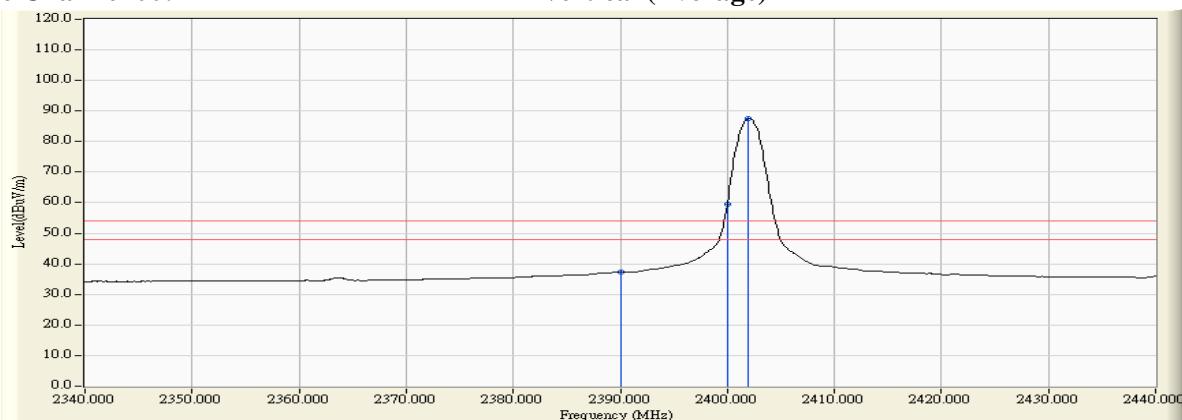

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2480.000	-0.581	107.579	106.998	--	--	--
78 (Peak)	2483.500	-0.558	65.809	65.251	74.00	54.00	Pass
78 (Average)	2480.000	-0.581	90.991	90.410	--	--	--
78 (Average)	2483.500	-0.558	49.010	48.452	74.00	54.00	Pass

Figure Channel 78:

Horizontal (Peak)


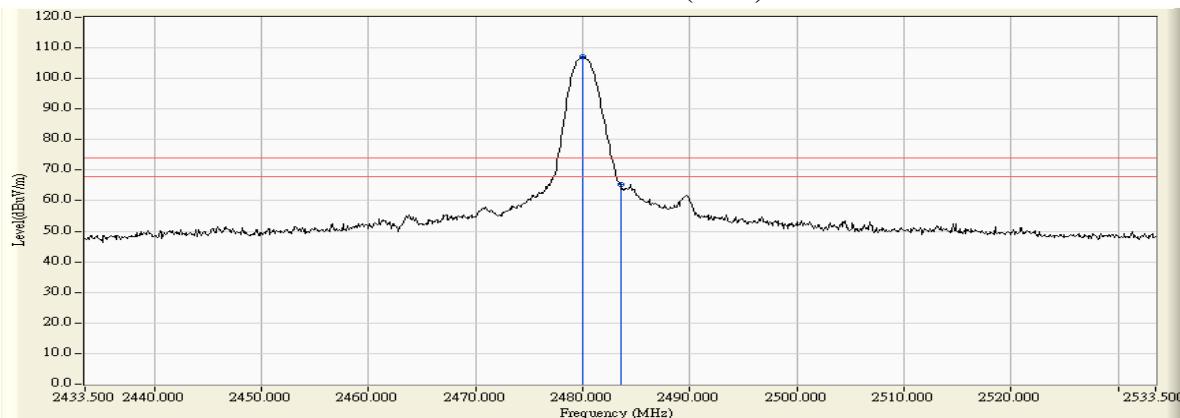


Figure Channel 78:

Horizontal (Average)

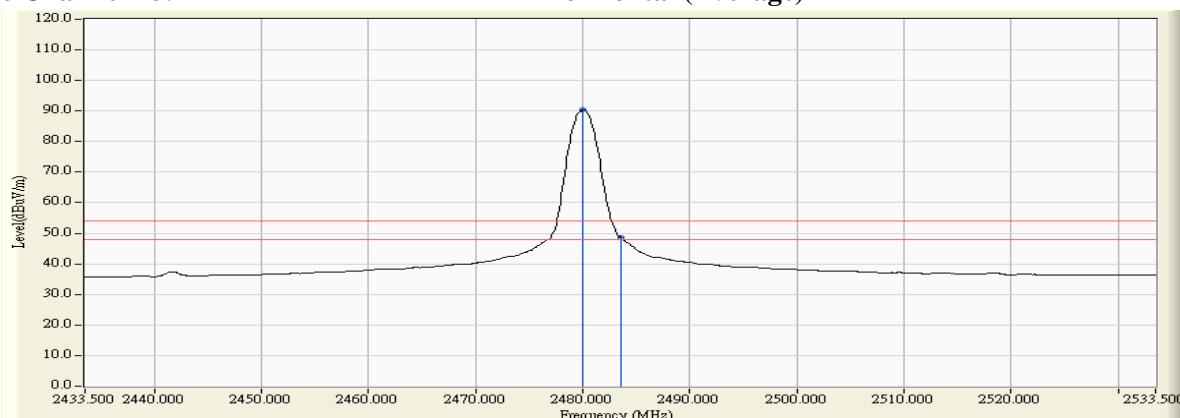

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2480.000	-1.324	105.377	104.053	--	--	--
78 (Peak)	2483.500	-1.305	63.239	61.934	74.00	54.00	Pass
78 (Average)	2480.000	-1.324	89.513	88.189	--	--	--
78 (Average)	2483.500	-1.305	47.766	46.461	74.00	54.00	Pass

Figure Channel 78:

Vertical (Peak)


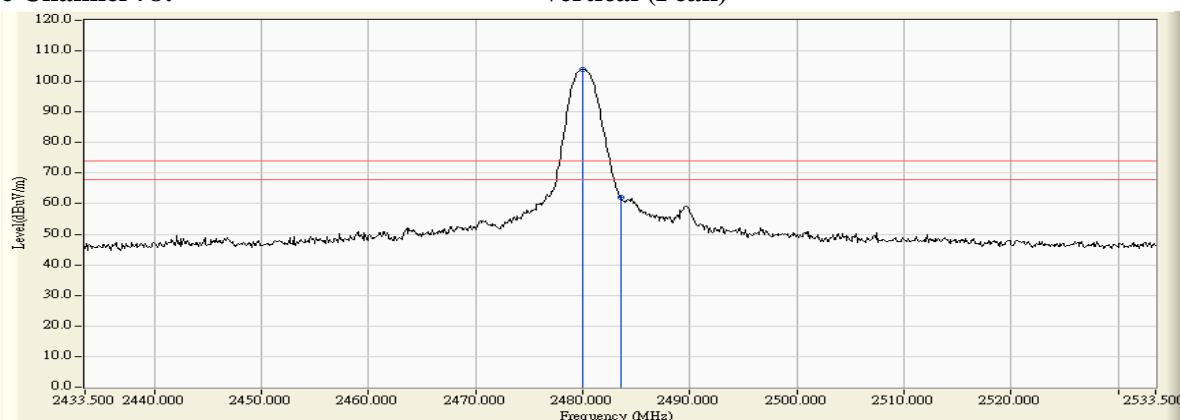


Figure Channel 78:

Vertical (Average)

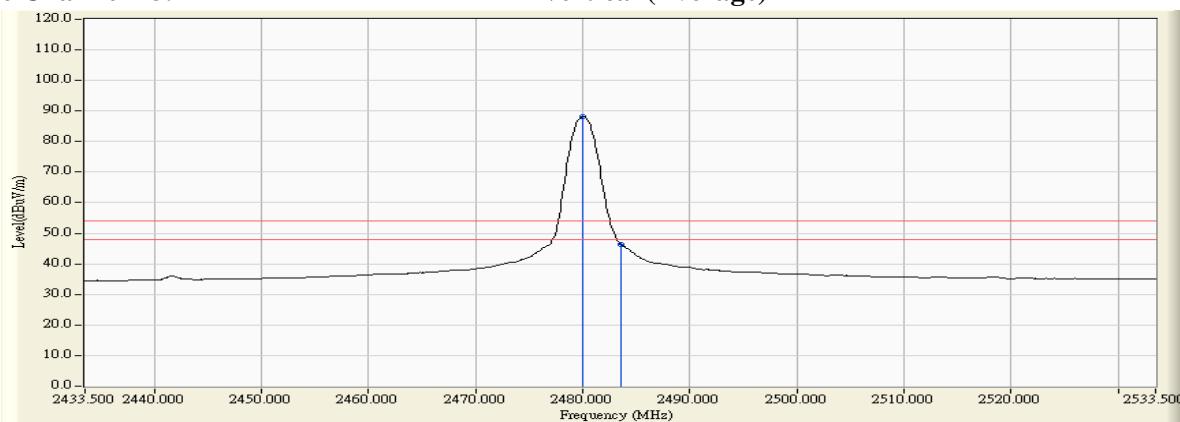

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


7. Channel Number

7.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note: 1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

7.2. Test Setup

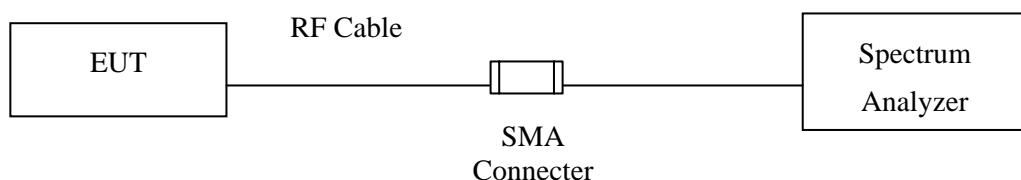

7.3. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

7.5. Uncertainty


N/A

7.6. Test Result of Channel Number


Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Channel Number
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

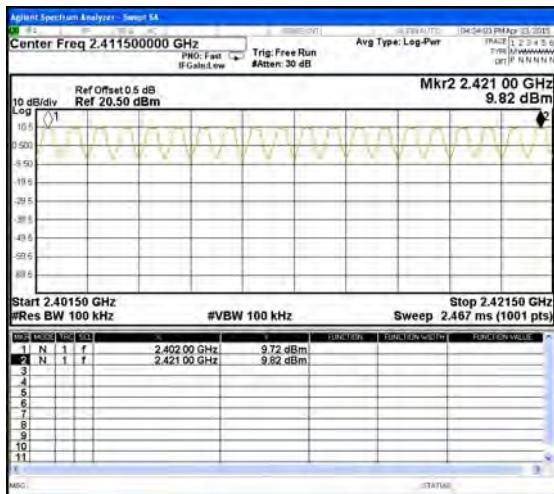


2422-2441MHz

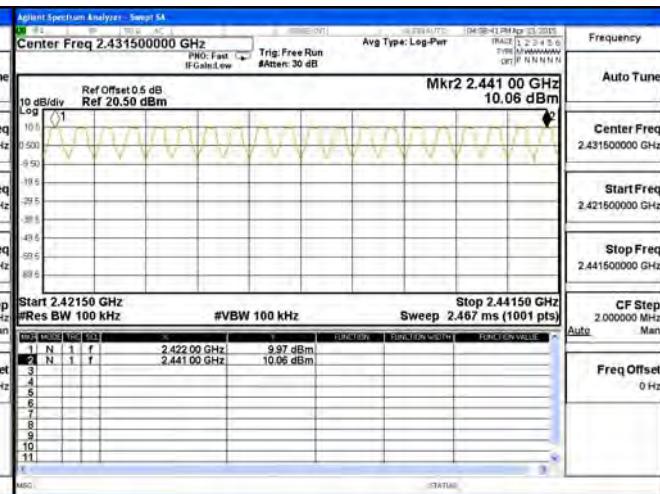

2442-2461MHz

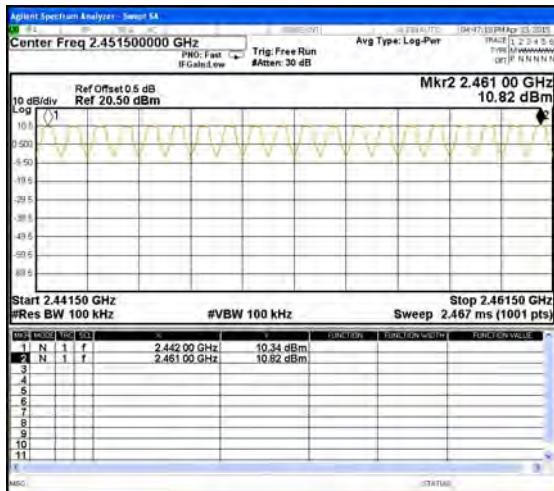


2462-2480MHz

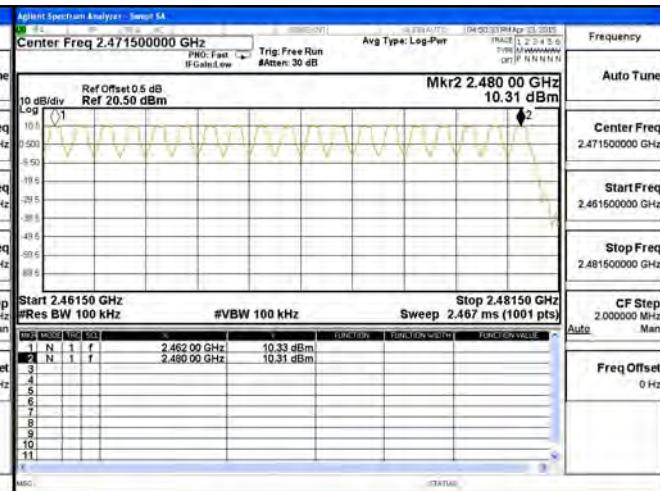


Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Channel Number
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

2402-2421MHz


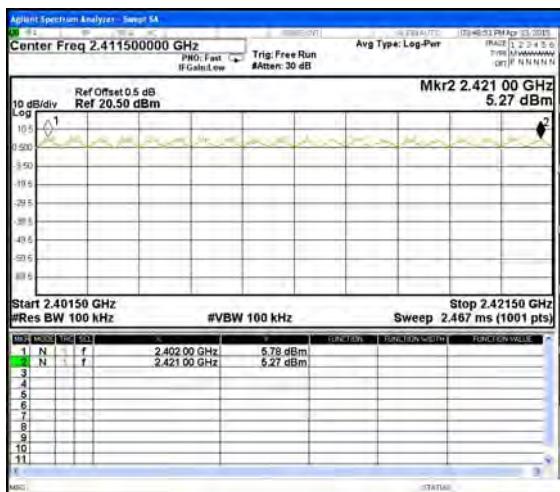


2422-2441MHz

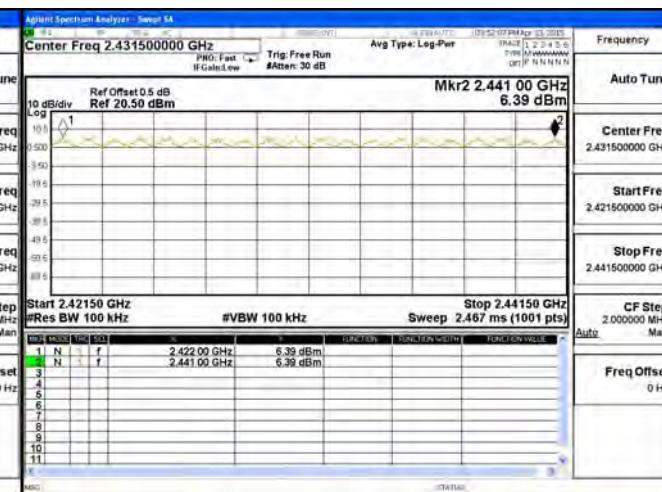

2442-2461MHz


2462-2480MHz

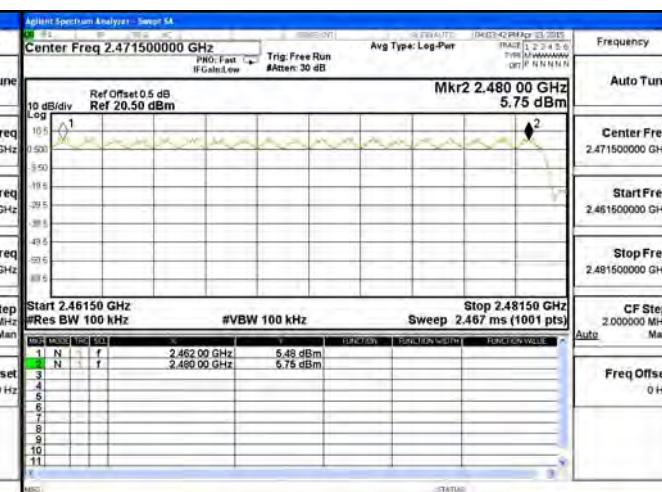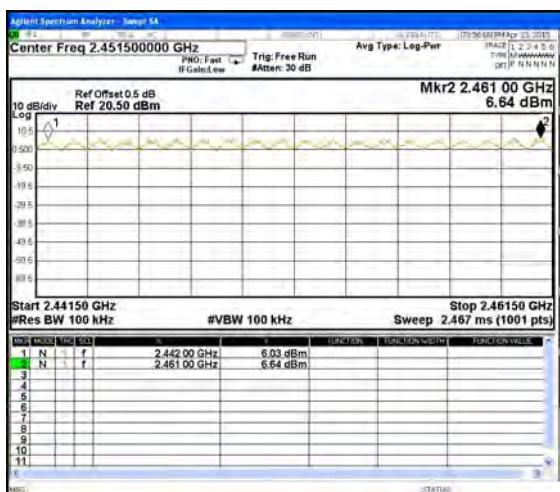


Product : Intel® Dual Band Wireless-AC 8260
Test Item : Channel Number
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

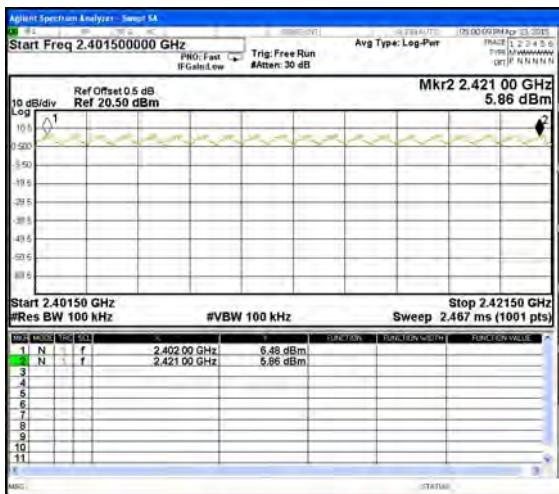


2422-2441MHz

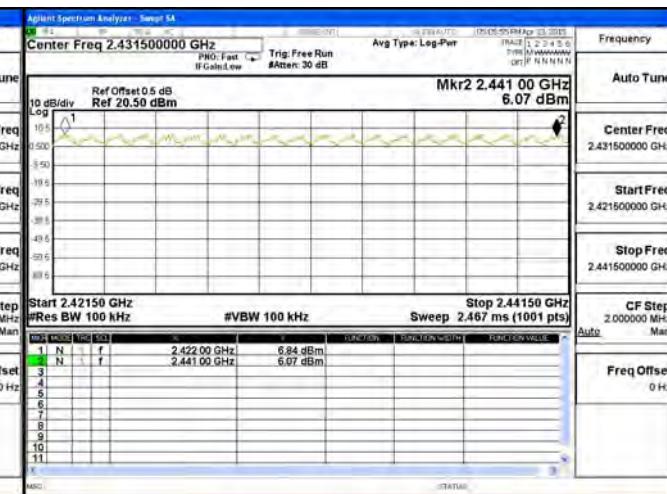

2442-2461MHz

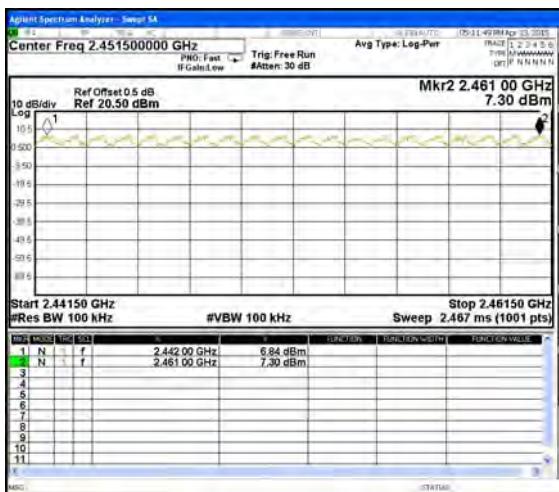

2462-2480MHz

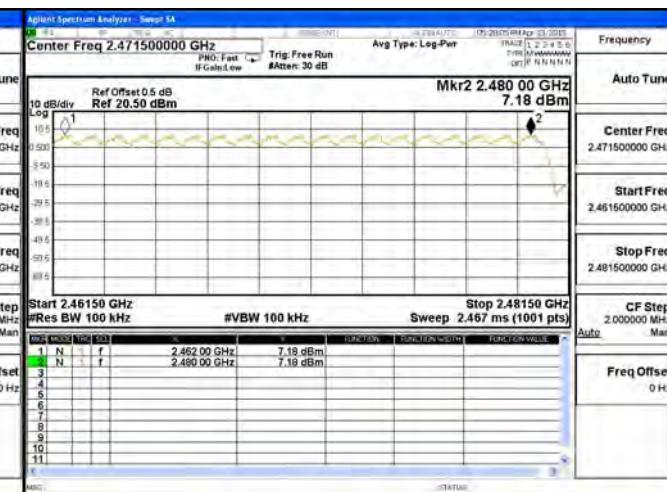


8. Channel Separation

8.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note: 1. All equipments are calibrated every one year.
2. The test instruments mark by “X” are used to measure the final test results.

8.2. Test Setup

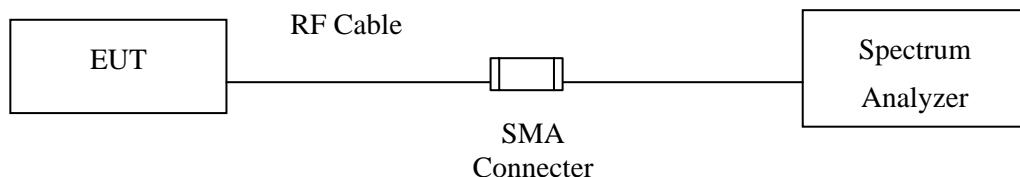

8.3. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

8.5. Uncertainty


± 150Hz

8.6. Test Result of Channel Separation


Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Channel Separation
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	753.3	Pass
39	2441	1000	>25 kHz	753.3	Pass
78	2480	1000	>25 kHz	753.3	Pass


NOTE: The 20dB Bandwidth is refer to section 10.

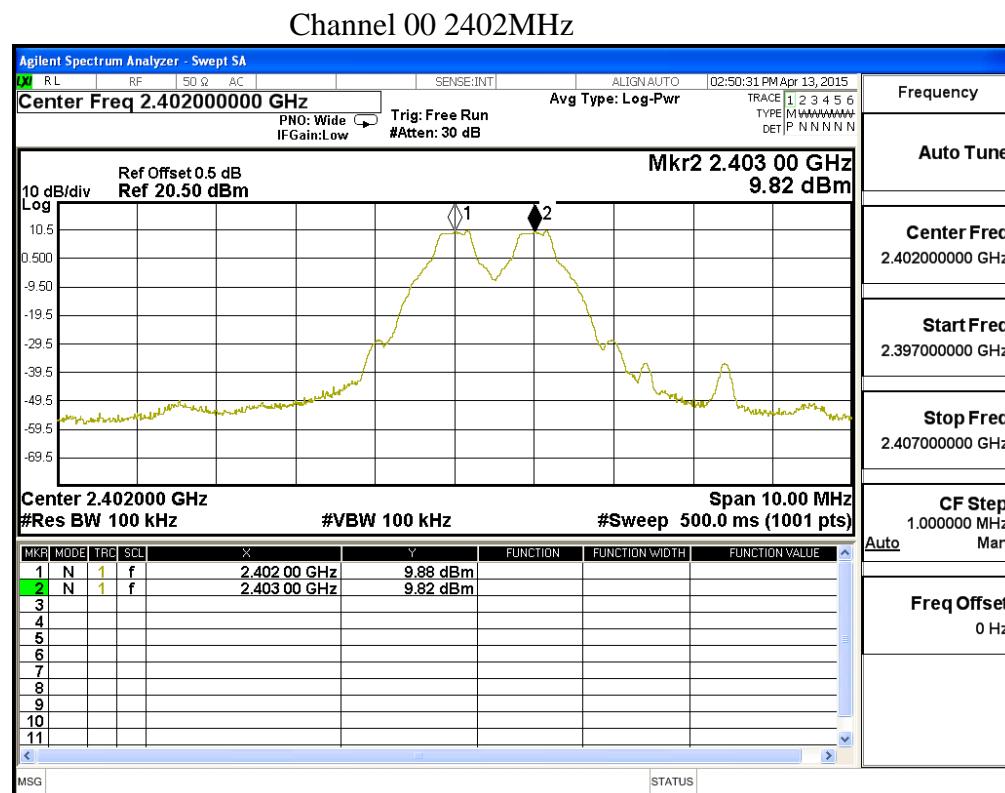

Channel 39 2441MHz

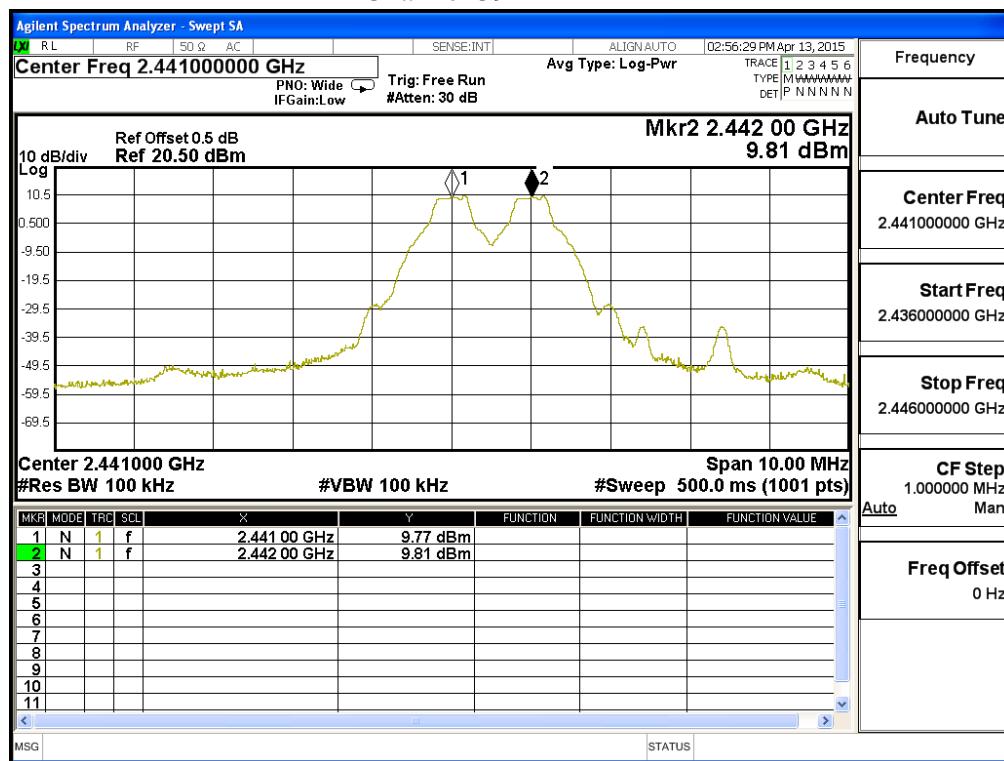

Channel 78 2480 MHz

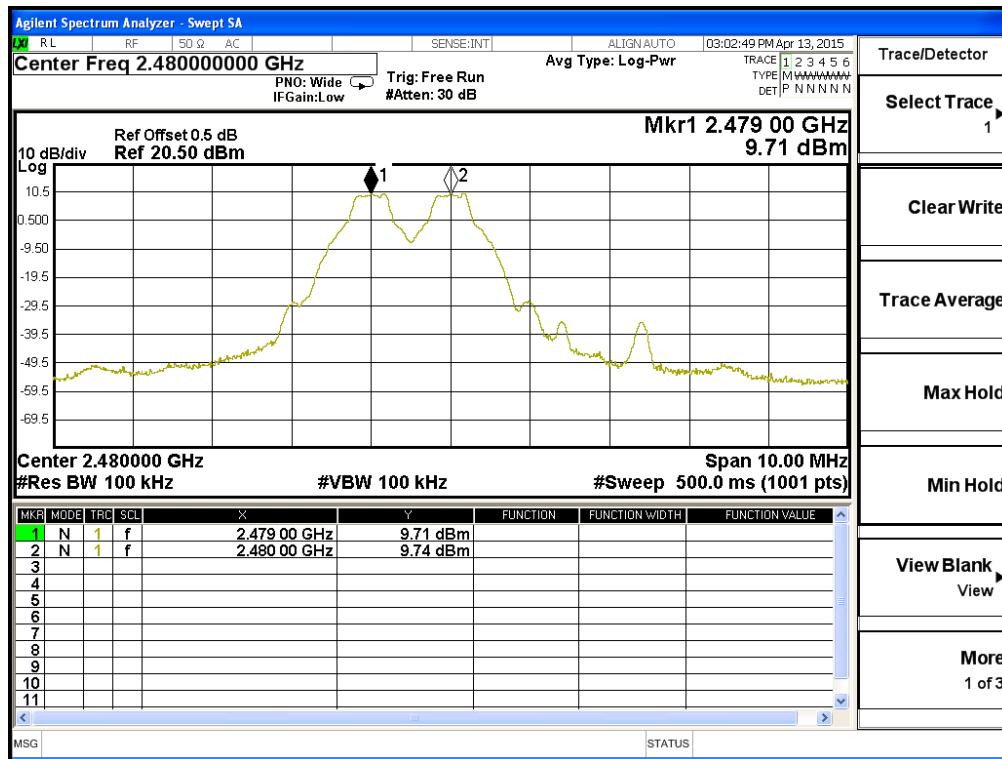


Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Channel Separation
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	980.7	Pass
39	2441	1000	>25 kHz	972.7	Pass
78	2480	1000	>25 kHz	974.7	Pass

NOTE: The 20dB Bandwidth is refer to section 10.


Channel 00 2402MHz

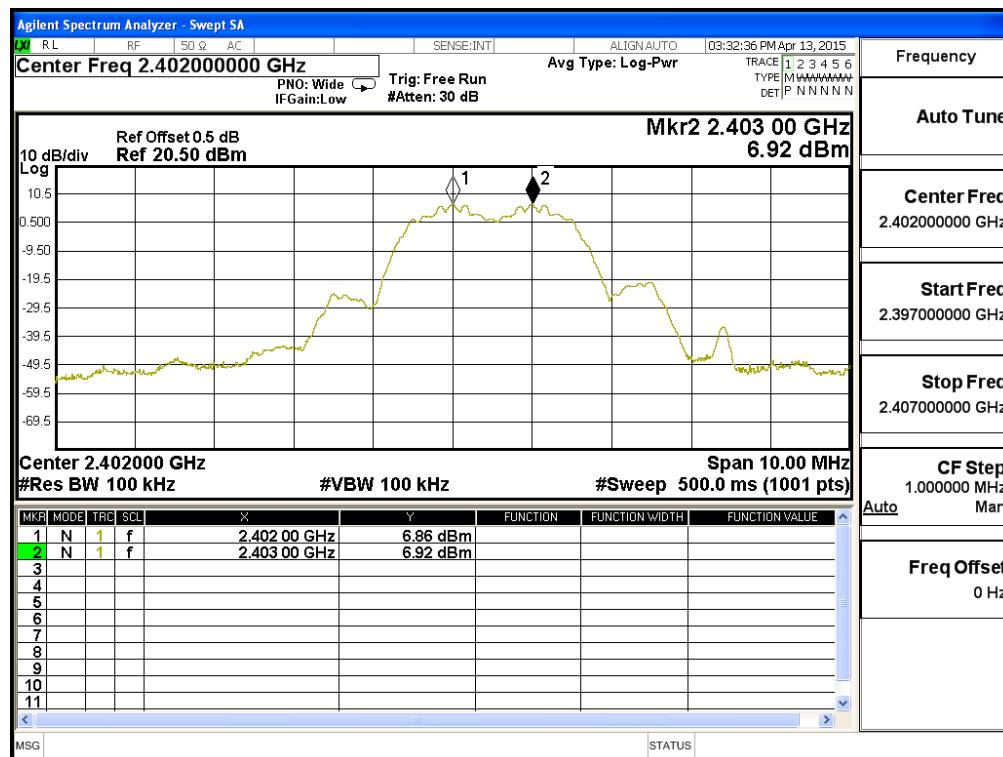

Channel 39 2441MHz

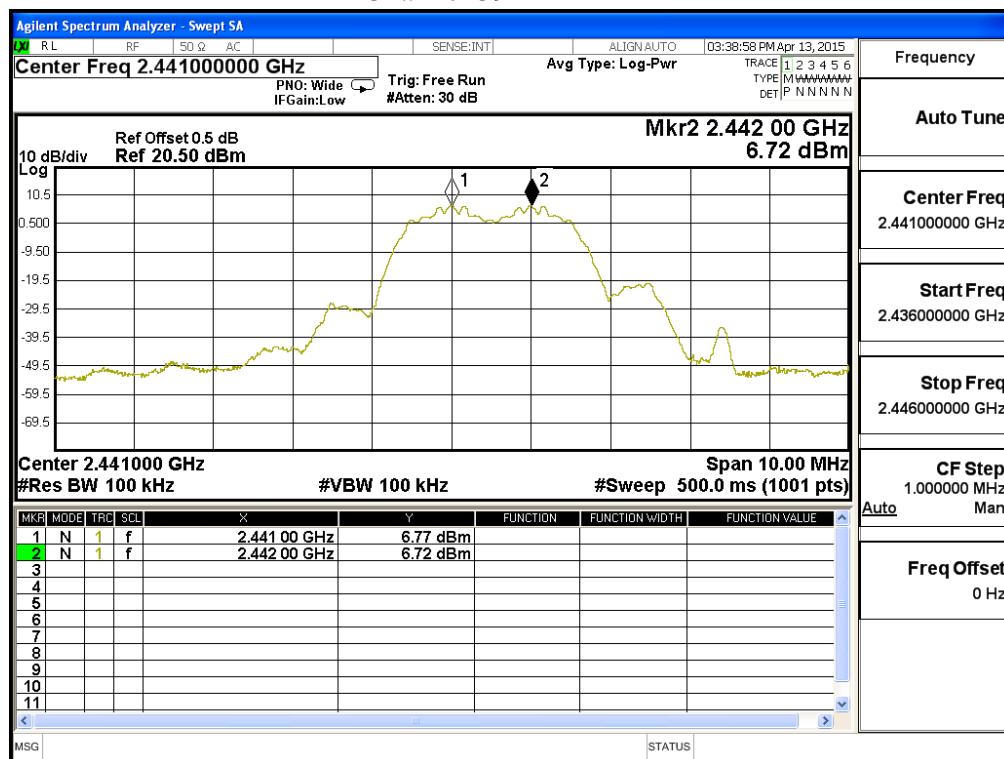

Channel 78 2480 MHz

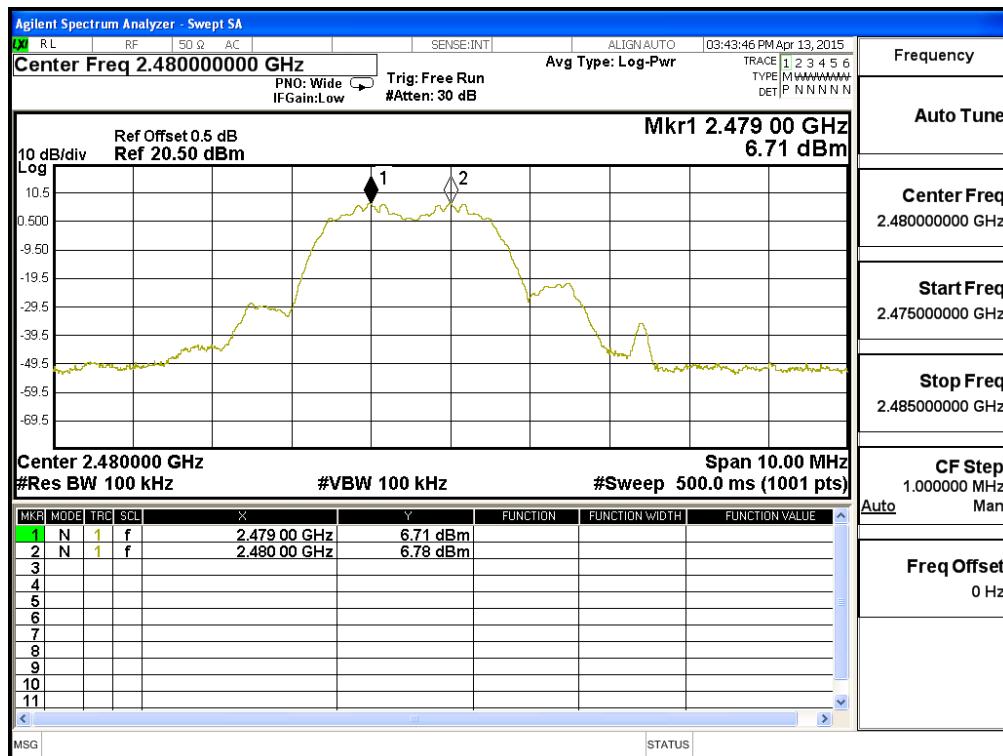


Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Channel Separation
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	960.0	Pass
39	2441	1000	>25 kHz	960.7	Pass
78	2480	1000	>25 kHz	962.7	Pass

NOTE: The 20dB Bandwidth is refer to section 10.


Channel 00 2402MHz

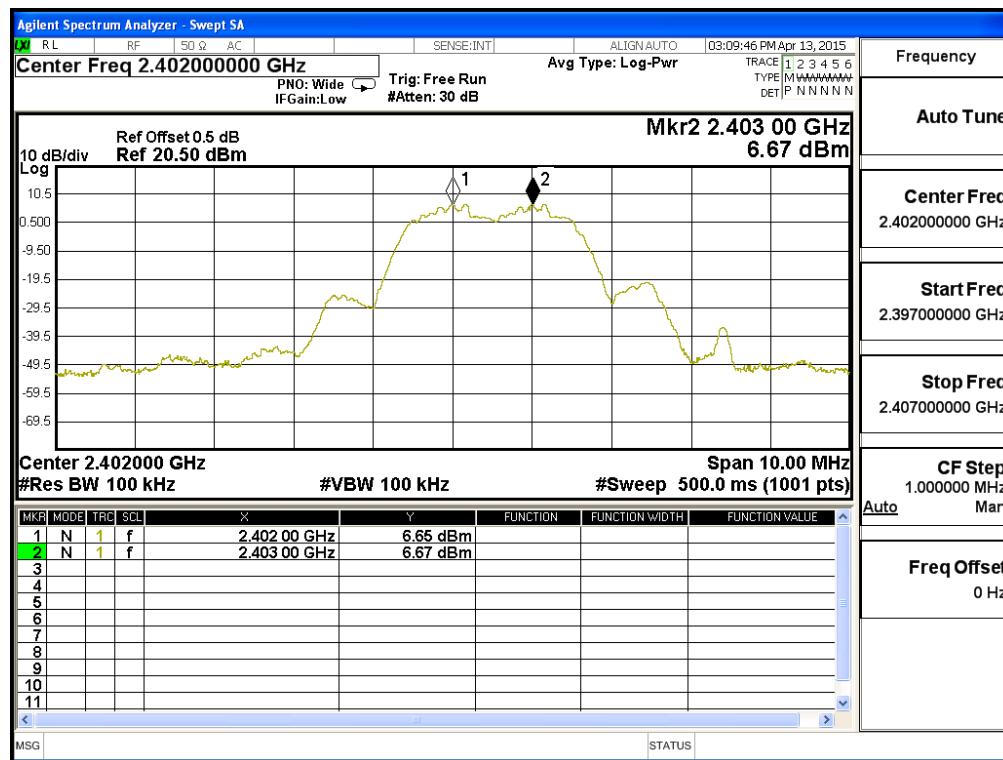

Channel 39 2441MHz

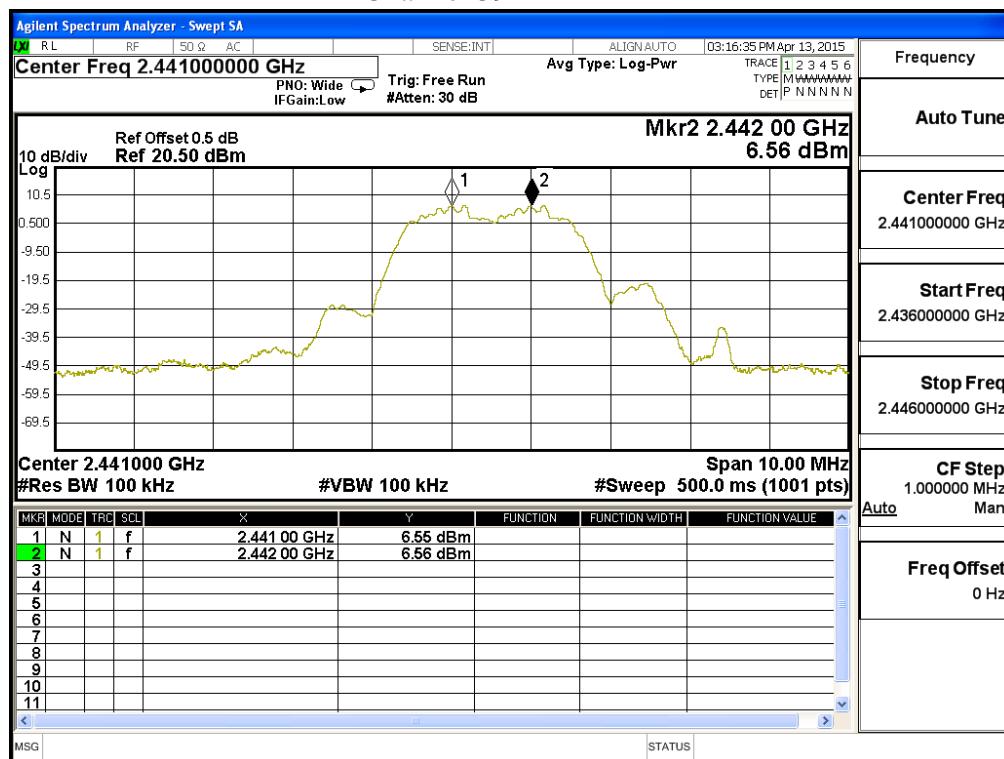

Channel 78 2480 MHz

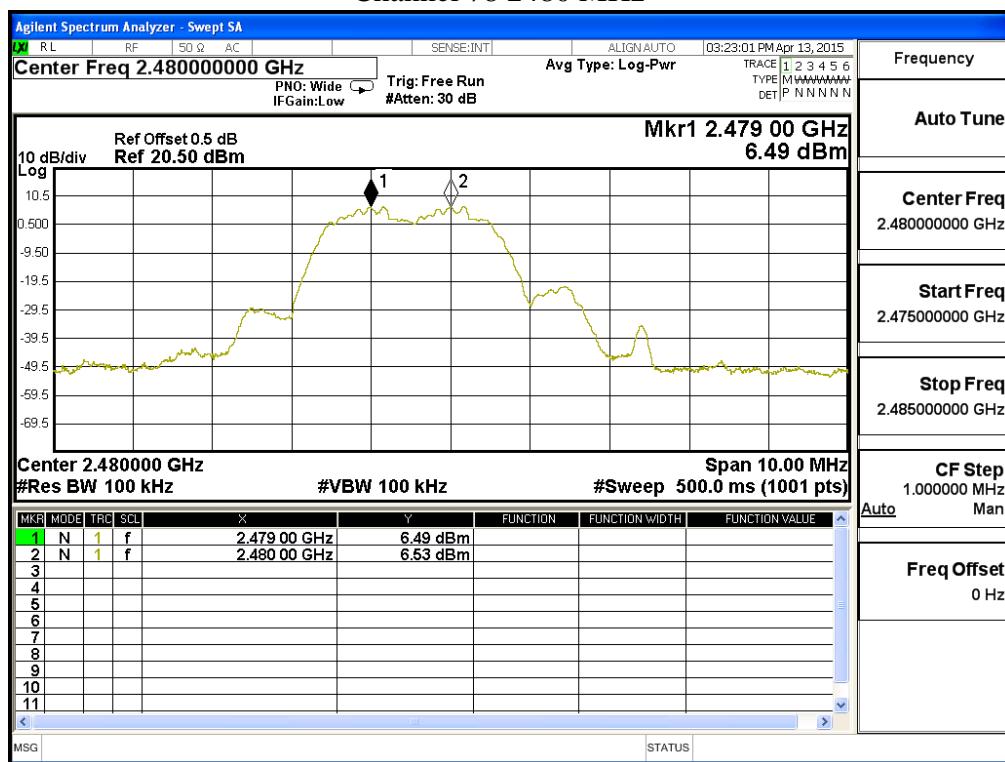


9. Dwell Time

9.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note: 1. All equipments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.

9.2. Test Setup

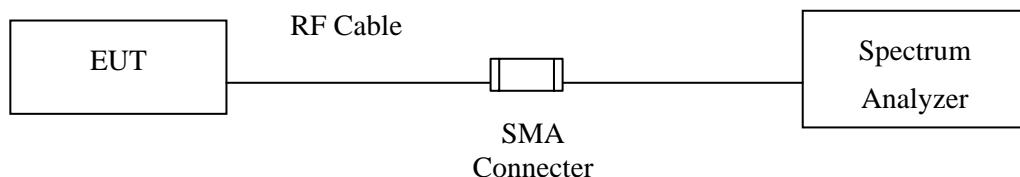

9.3. Limit

The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

9.4. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

9.5. Uncertainty

± 25msec

9.6. Test Result of Dwell Time


Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Dwell Time
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (Channel 00,39,78 -DH5)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.880	13	50	0.75	0.300	0.4	Pass
2441	2.890	13	50	0.75	0.301	0.4	Pass
2480	2.880	13	50	0.75	0.300	0.4	Pass


Duty cycle =((Time slot length(ms)*Hopping of Number) / Sweep time (ms)

Dwell time = (Duty cycle /79) * (79*0.4)


CH 00 Time Interval between hops

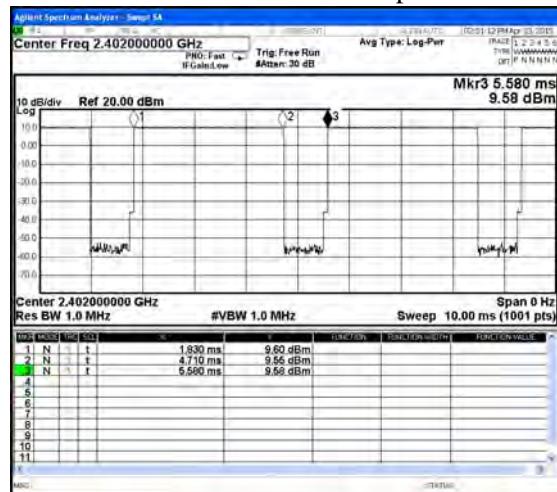


CH 00 Transmission Time

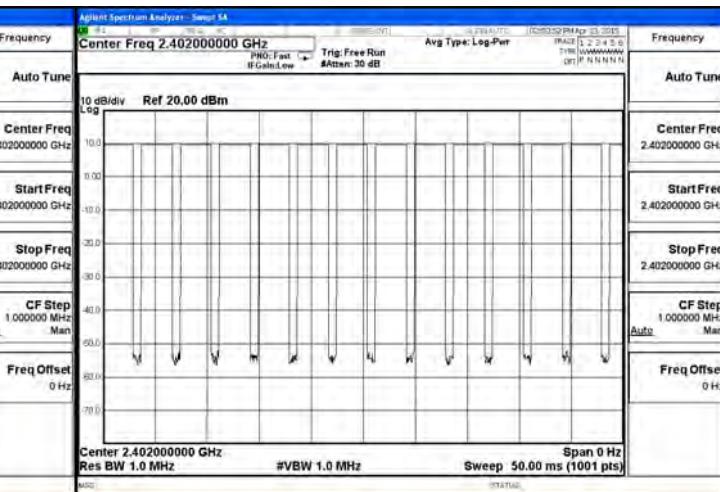


CH39 Time Interval between hops

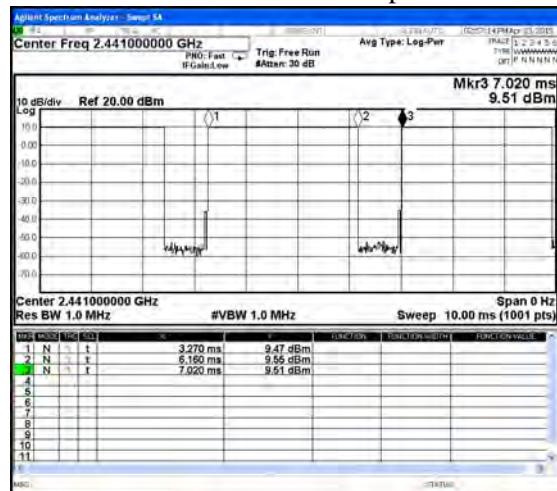


CH 39 Transmission Time

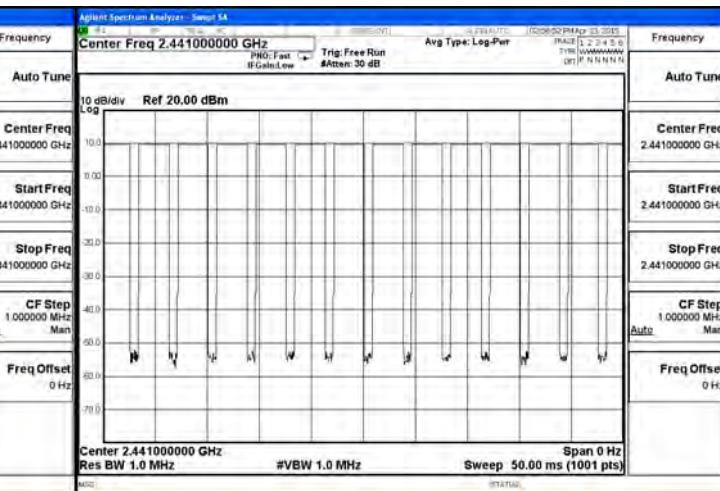

CH 78 Time Interval between hops

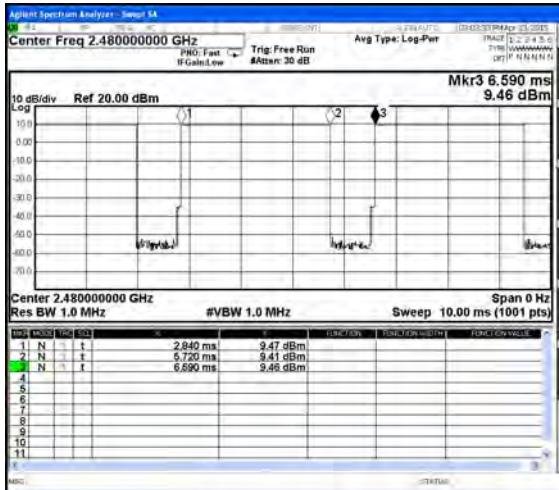

CH 78 Transmission Time

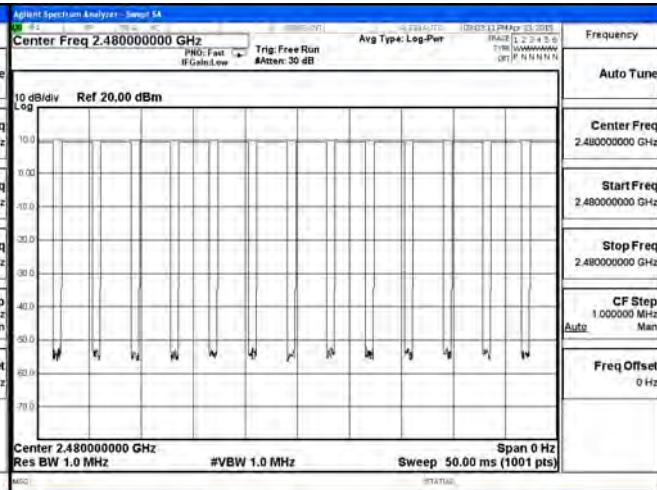

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Dwell Time
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (Channel 00,39,78 –DH5)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.890	13	50	0.75	0.301	0.4	Pass
2441	2.890	14	50	0.81	0.324	0.4	Pass
2480	2.880	13	50	0.75	0.300	0.4	Pass


Duty cycle =((Time slot length(ms)*Hopping of Number) / Sweep time (ms)

Dwell time = (Duty cycle /79) * (79*0.4)


CH 00 Time Interval between hops

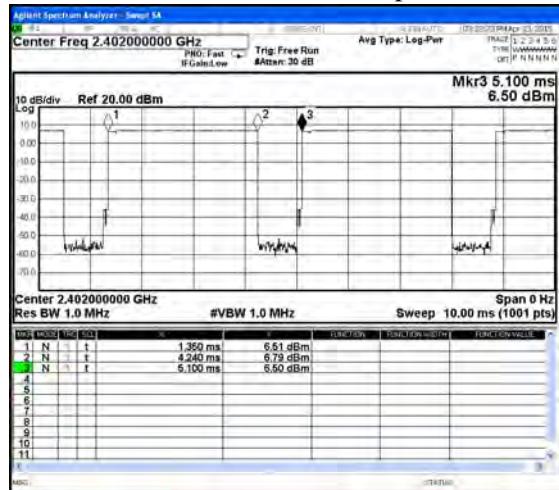


CH 00 Transmission Time

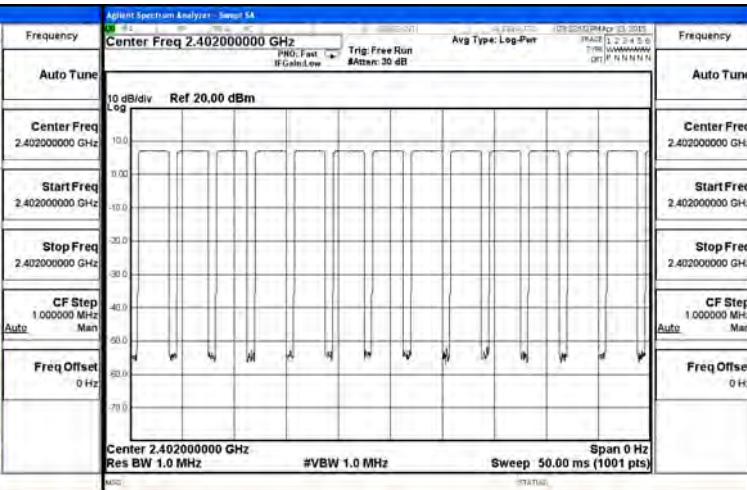


CH39 Time Interval between hops

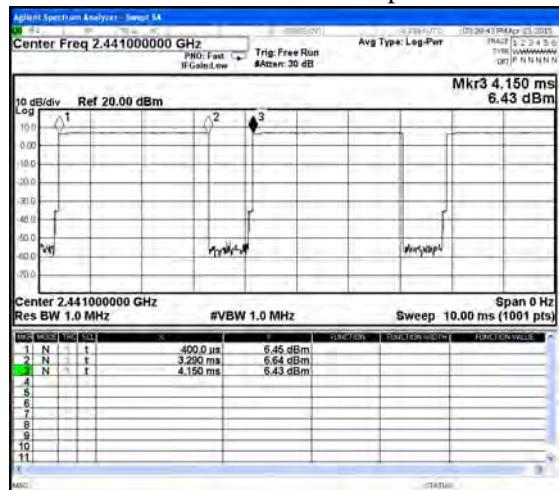


CH 39 Transmission Time

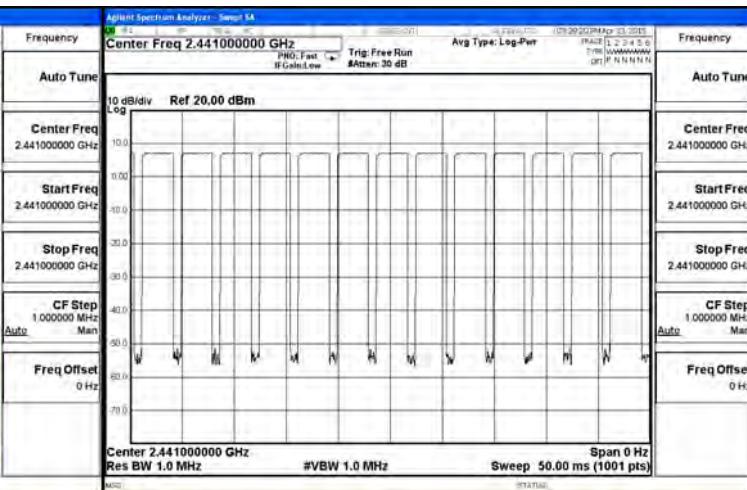

CH 78 Time Interval between hops

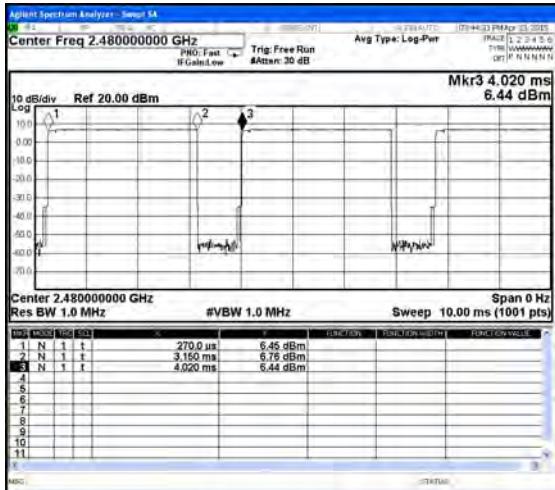

CH 78 Transmission Time

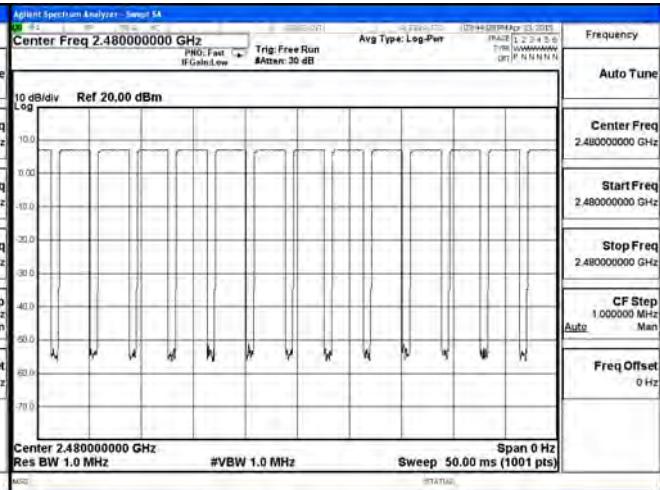

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Dwell Time
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (Channel 00,39,78 -DH5)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.890	13	50	0.75	0.301	0.4	Pass
2441	2.890	13	50	0.75	0.301	0.4	Pass
2480	2.890	14	50	0.81	0.324	0.4	Pass


Duty cycle =((Time slot length(ms)*Hopping of Number) / Sweep time (ms)

Dwell time = (Duty cycle /79) * (79*0.4)


CH 00 Time Interval between hops

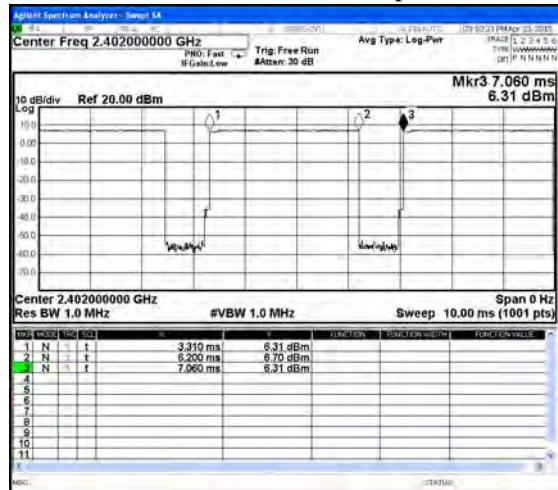


CH 00 Transmission Time

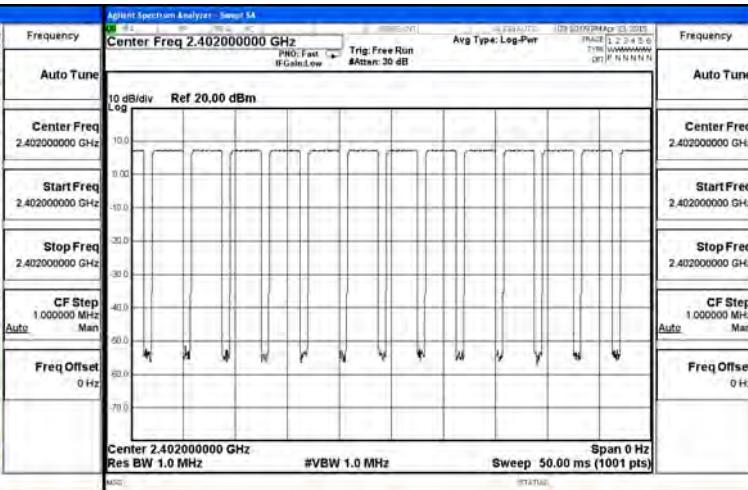


CH39 Time Interval between hops

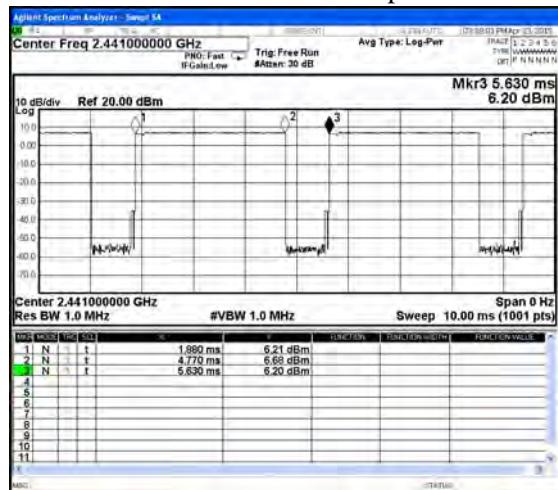


CH 39 Transmission Time

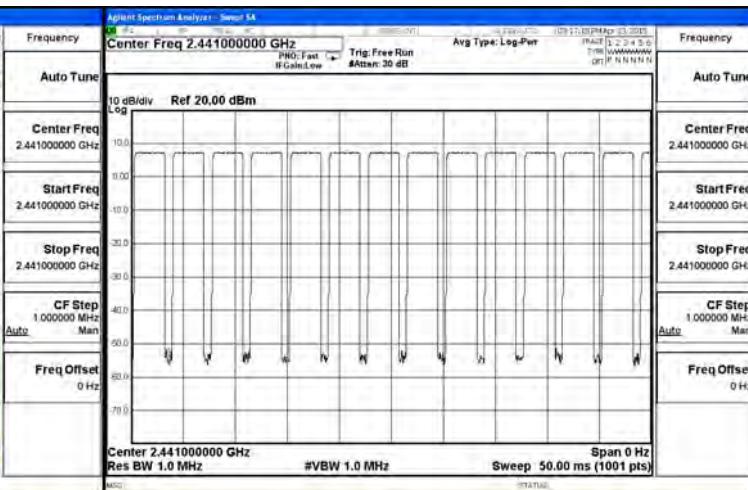

CH 78 Time Interval between hops

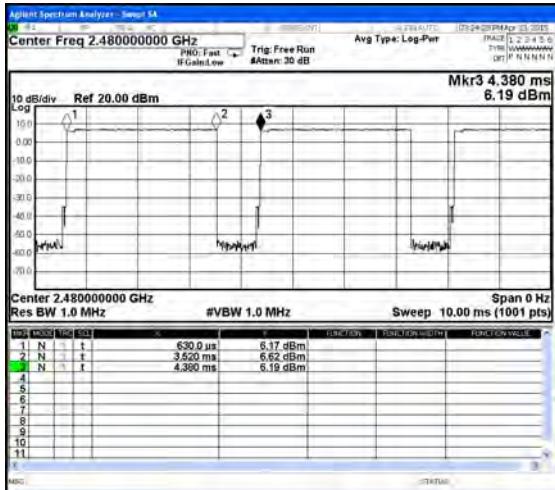

CH 78 Transmission Time

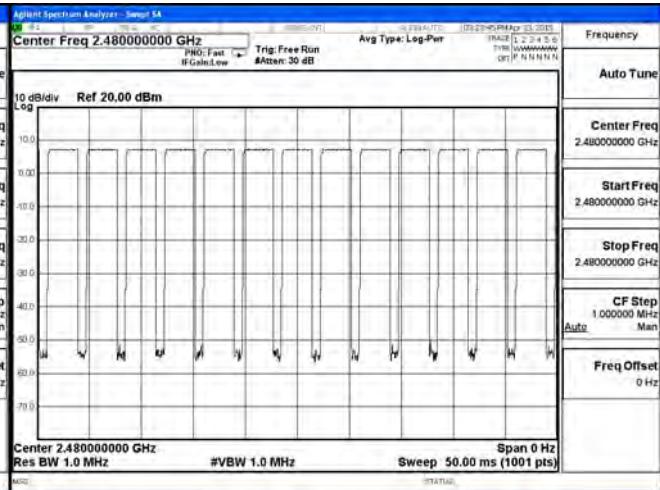

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


10. Occupied Bandwidth

10.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note: 1. All equipments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.

10.2. Test Setup

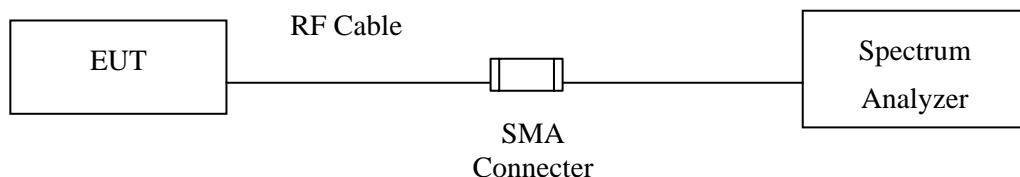

10.3. Limits

N/A

10.4. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

10.5. Uncertainty


± 150Hz

10.6. Test Result of Occupied Bandwidth

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1130	--	NA


Figure Channel 00:

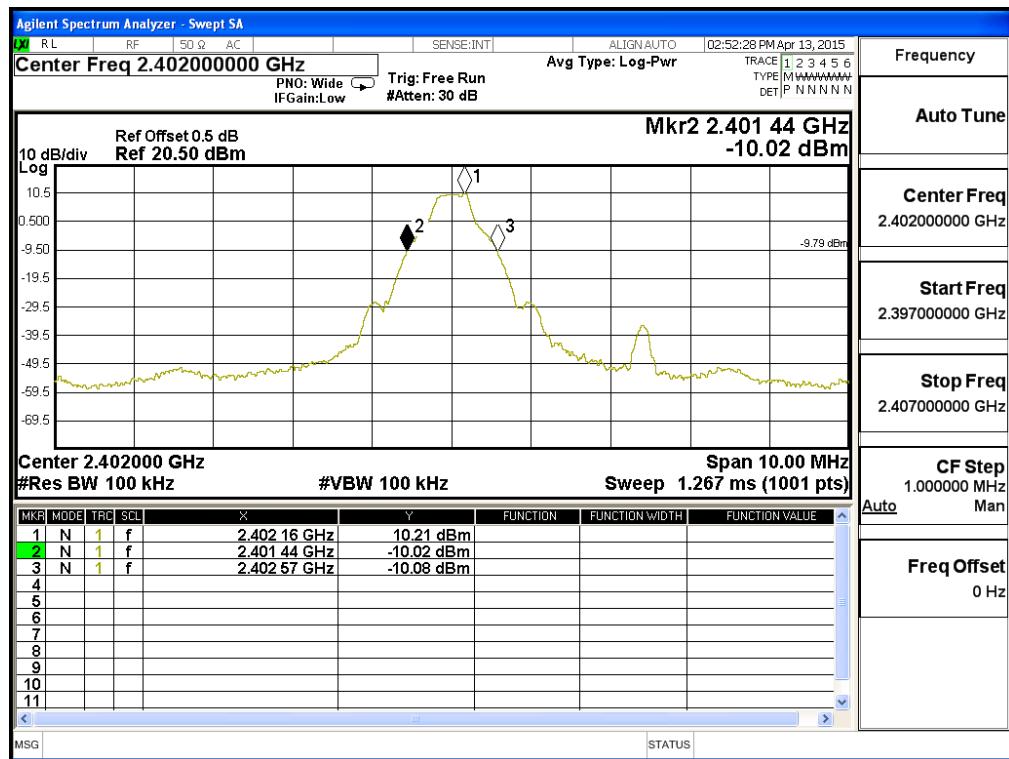

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1130	--	NA


Figure Channel 39:

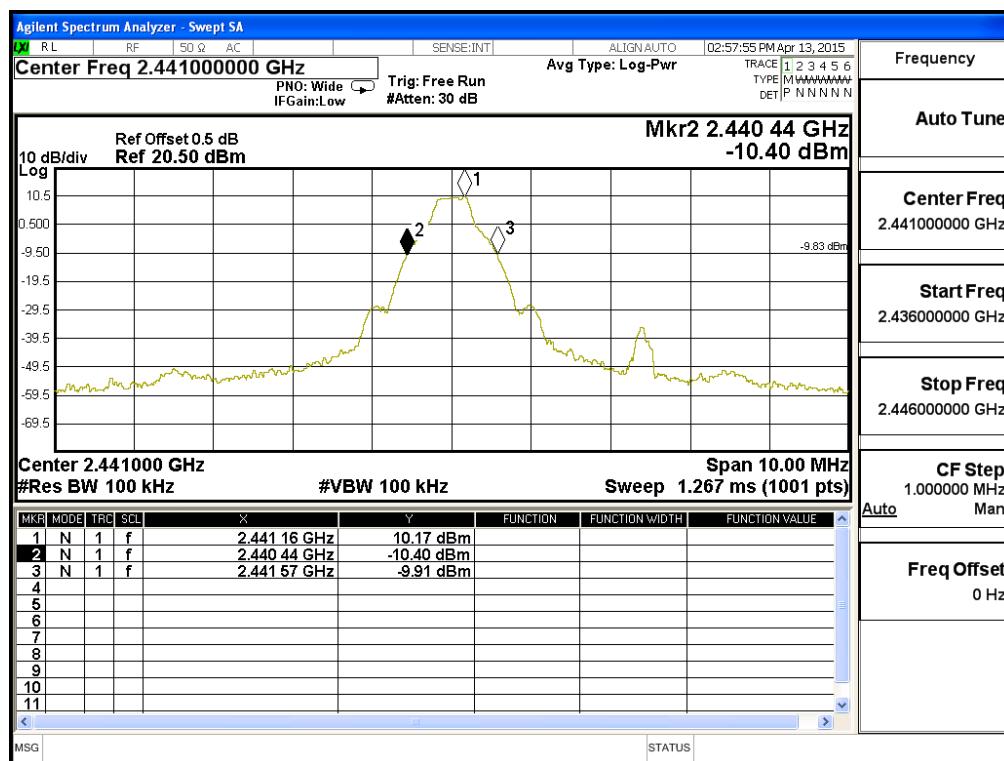

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1130	--	NA


Figure Channel 78:

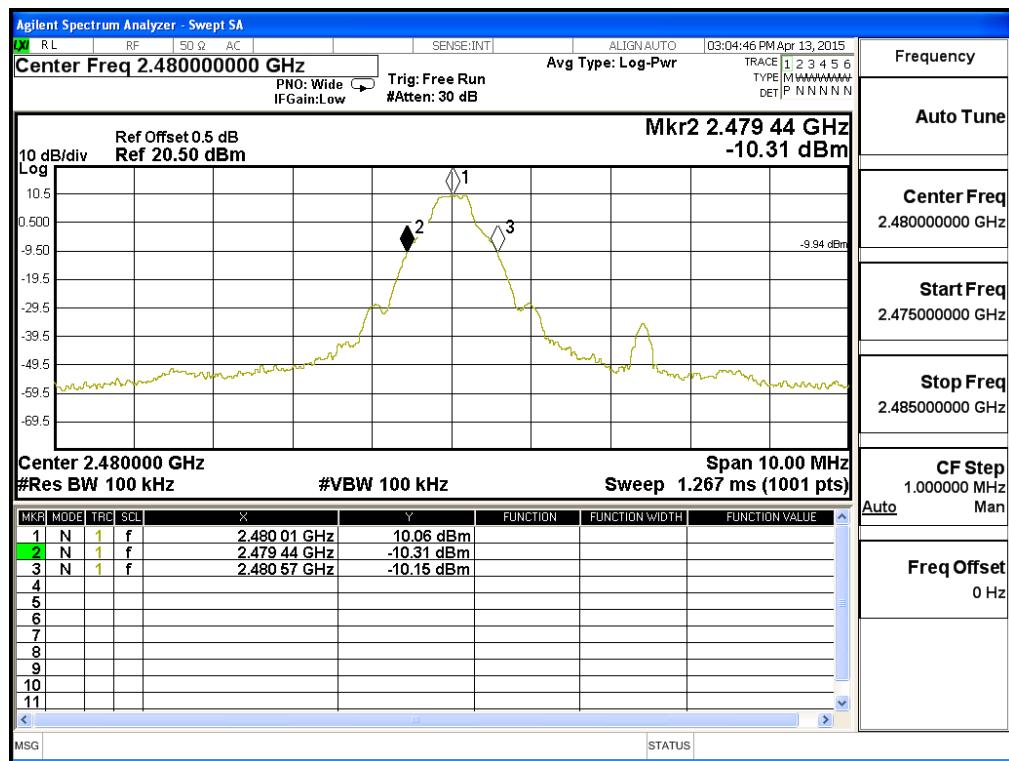

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1471	--	NA


Figure Channel 00:

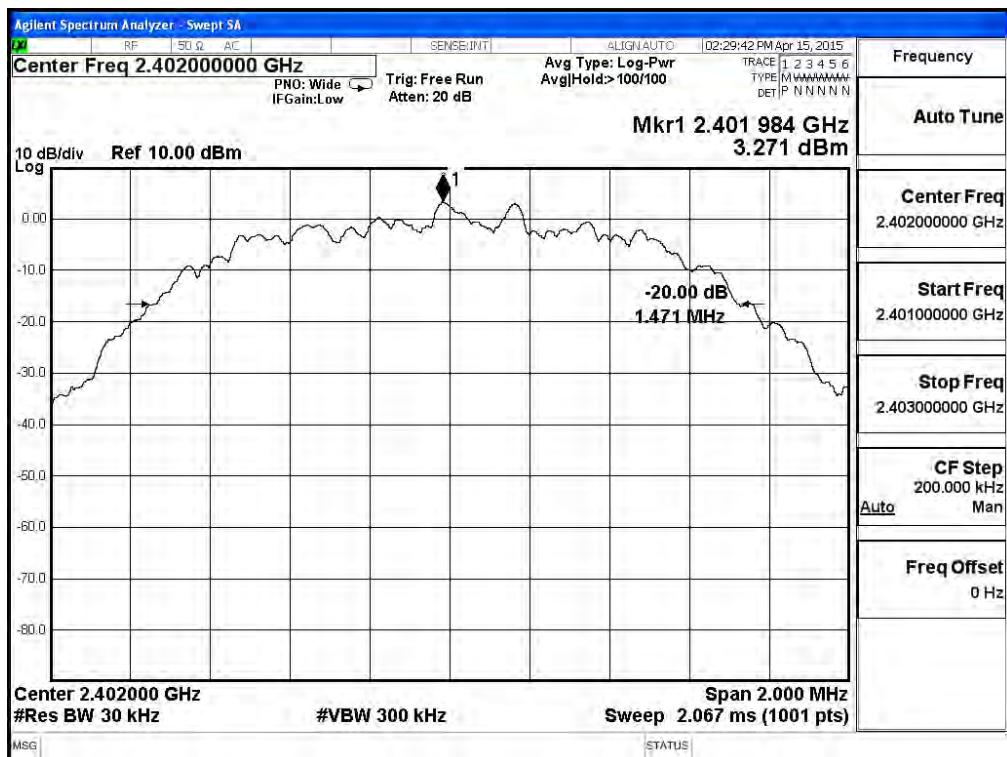

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1459	--	NA


Figure Channel 39:

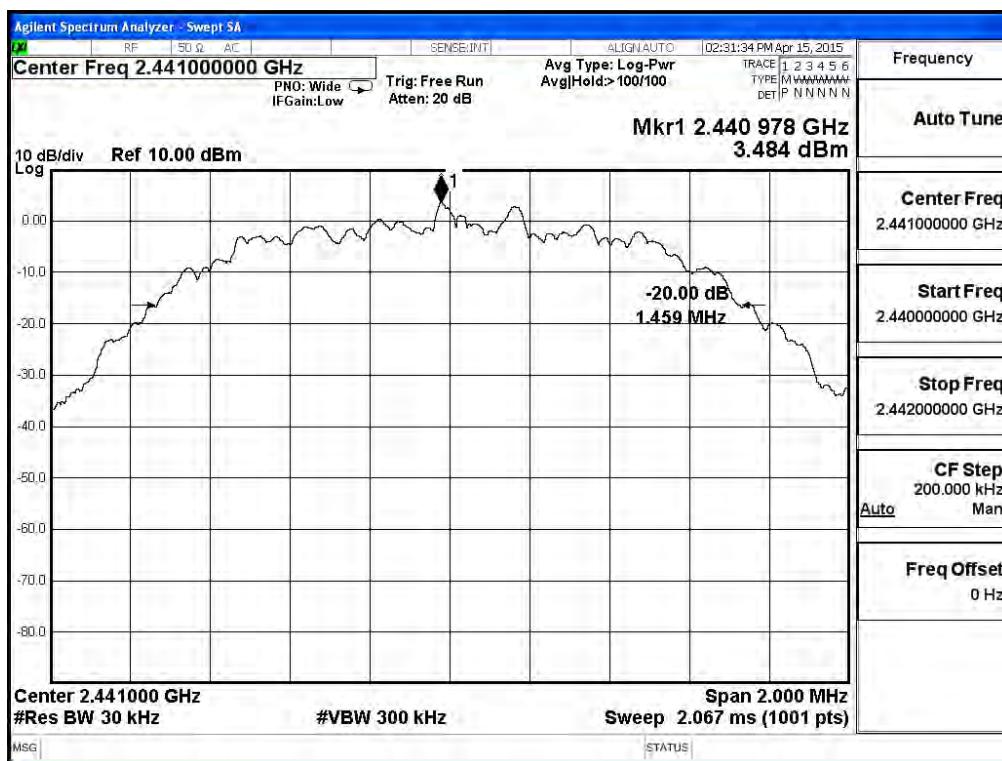

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)(2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1462	--	NA


Figure Channel 78:

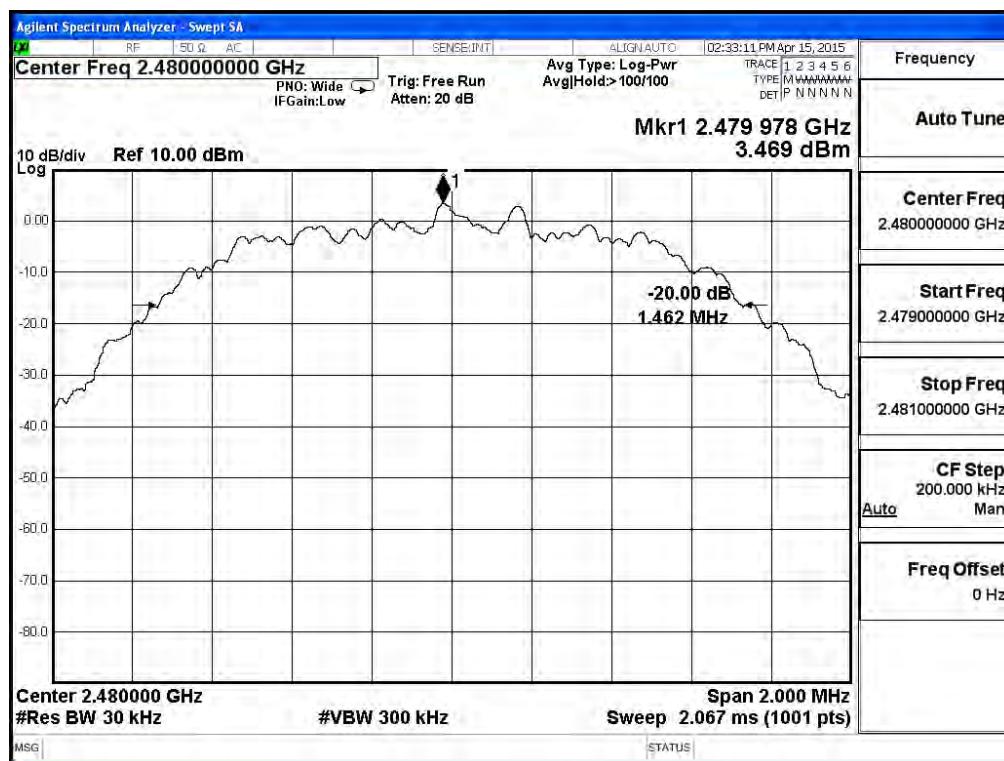

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1440	--	NA


Figure Channel 00:

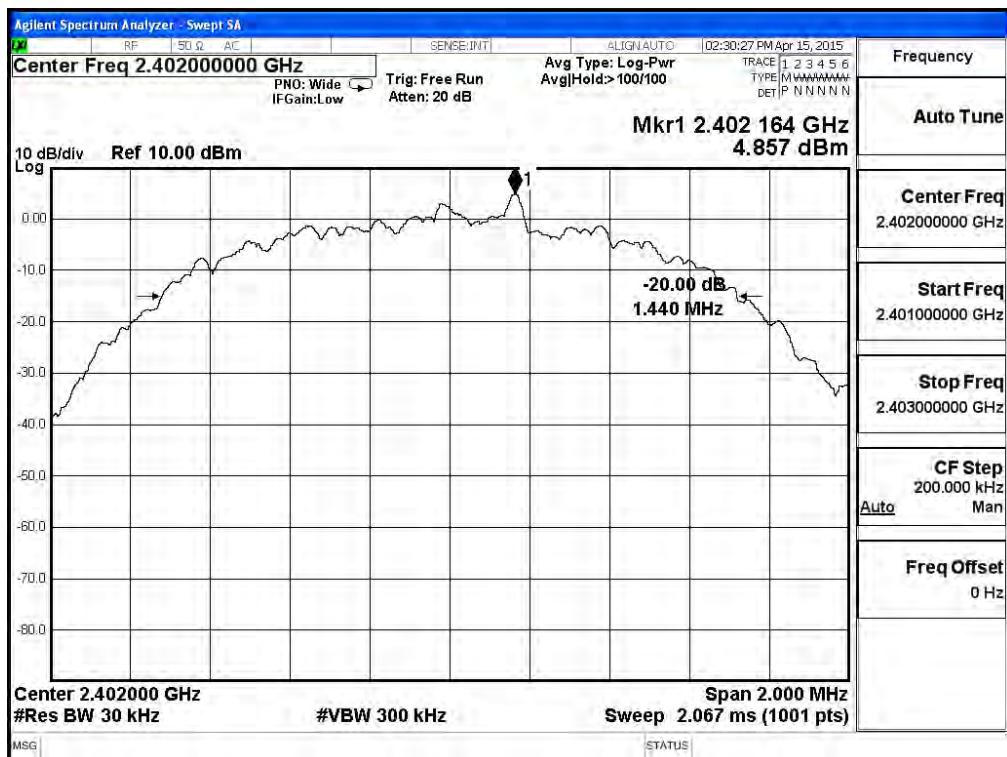

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1441	--	NA


Figure Channel 39:

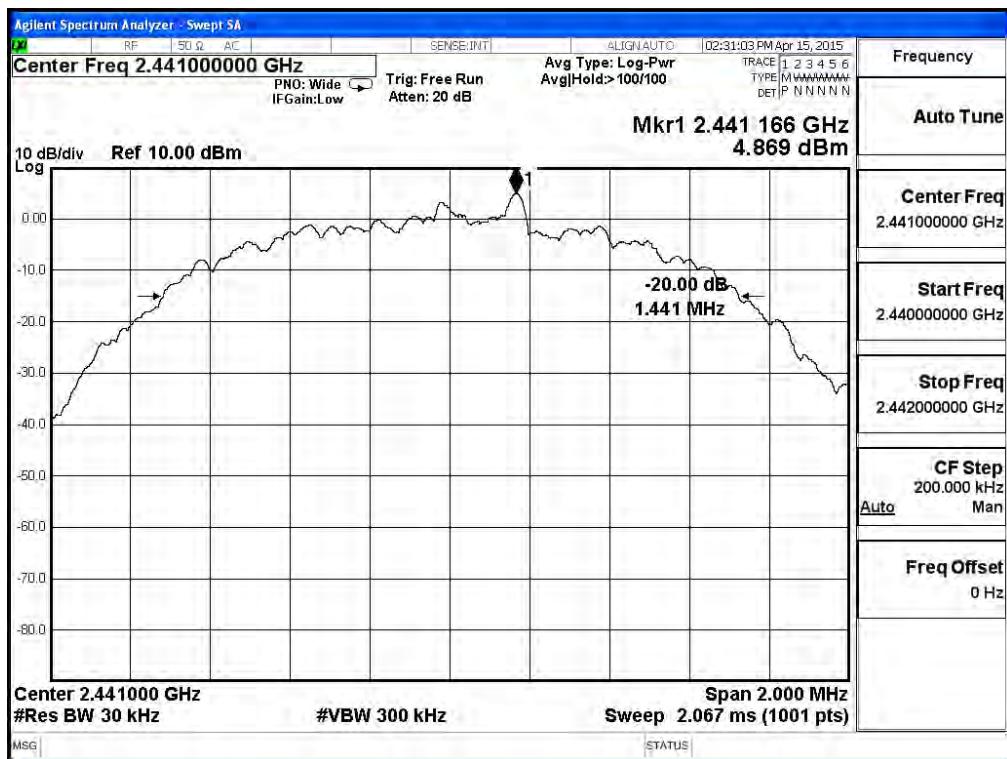

Product : Intel® Dual Band Wireless-AC 8260
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1444	--	NA

Figure Channel 78:

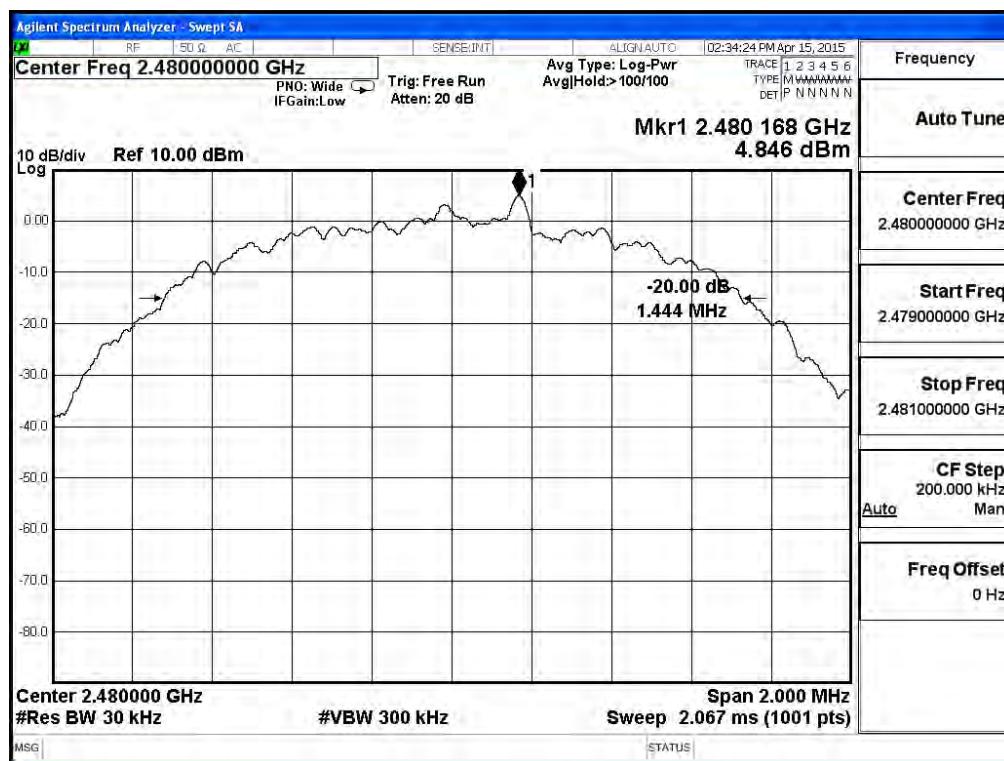

11. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs