

TEST REPORT

Reference No..... : WTX22X04074568W003
FCC ID : 2AJO5SD100
Applicant : Speedata Group LTD
Address : Office 01-3 08, Block D, 8 / F, Building 1-4, Yard A, 18 Zhongguancun South
Street, Haidian District, Beijing
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Industrial tablet
Model No..... : SD100
Standards : FCC Part 15.407
Date of Receipt sample : 2022-04-19
Date of Test..... : 2022-04-19 to 2022-07-08
Date of Issue : 2022-07-08
Test Report Form No. : WTX_Part 15_407W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Jason Su

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	6
1.5 EUT OPERATING DURING TEST	7
1.6 TEST FACILITY	7
1.7 EUT SETUP AND TEST MODE	8
1.8 MEASUREMENT UNCERTAINTY	9
1.9 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	12
3. ANTENNA REQUIREMENT	13
3.1 STANDARD APPLICABLE	13
3.2 EVALUATION INFORMATION	13
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	14
4.1 STANDARD APPLICABLE	14
4.2 SUMMARY OF TEST RESULTS	14
5. POWER SPECTRAL DENSITY	15
5.1 STANDARD APPLICABLE	15
5.2 TEST PROCEDURE	15
5.3 SUMMARY OF TEST RESULTS/PLOTS	16
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	17
6.1 STANDARD APPLICABLE	17
6.2 TEST PROCEDURE	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	19
7. MAXIMUM CONDUCTED OUTPUT POWER	20
7.1 STANDARD APPLICABLE	20
7.2 TEST PROCEDURE	20
7.3 SUMMARY OF TEST RESULTS/PLOTS	21
8. RADIATED SPURIOUS EMISSIONS	22
8.1 STANDARD APPLICABLE	22
8.2 TEST PROCEDURE	22
8.3 TEST RECEIVER SETUP	24
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	24
8.5 SUMMARY OF TEST RESULTS/PLOTS	24
9. FREQUENCY STABILITY	70
9.1 STANDARD APPLICABLE	70
9.2 TEST PROCEDURE	70
9.3 SUMMARY OF TEST RESULTS/PLOTS	70
10. CONDUCTED EMISSIONS	71
10.1 TEST PROCEDURE	71
10.2 BASIC TEST SETUP BLOCK DIAGRAM	71
10.3 TEST RECEIVER SETUP	71
10.4 SUMMARY OF TEST RESULTS/PLOTS	71
APPENDIX SUMMARY	74
APPENDIX A	75
APPENDIX B	89
APPENDIX C	115
APPENDIX D	129

APPENDIX PHOTOGRAPHS.....131

Report version

Version No.	Date of issue	Description
Rev.00	2022-07-08	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Industrial tablet
Trade Name:	
Model No.:	SD100
Adding Model(s):	SD100MD, SD100T, SD100TMD, SD100Q, BT100, SC100, ST100, ST100T, SC100T, TT100, TN100, SA100, FG100, PG100, SD100RT, T100, FG40, FG50, FG60, SC40, FG80
Rated Voltage:	DC3.8V
Battery Capacity:	/
Power Adapter:	HYX024-U012125XYE INPUT:AC100-240V 50/60Hz 0.5A Output:DC5/7/9V 1.67A
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model SD100, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40
Frequency Range:	5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
RF Output Power:	15.16dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	2.5dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter “3646631+=” into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	18	18	18	18	18	18	18	18	18	18	18	18	18
802.11n-HT20 MCS0	17	17	17	17	17	17	17	17	17	17	17	17	17
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	16	16	16	16	16	16	16	16	16	16	16		

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz,5270MHz,5310MHz,5510MHz,5590MHz,5670MHz,5755MHz,5795MHz
Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.13	Shielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Earphone cable	1.0	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi310-14ISK	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24

SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
☐ Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If

measurements are performed using a reduced resolution bandwidth ($< 1\text{MHz}$, or $< 500\text{kHz}$) and integrated over 1MHz , or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz , add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1MHz , add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $\text{RBW}=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.

- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 * \text{RBW}$
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

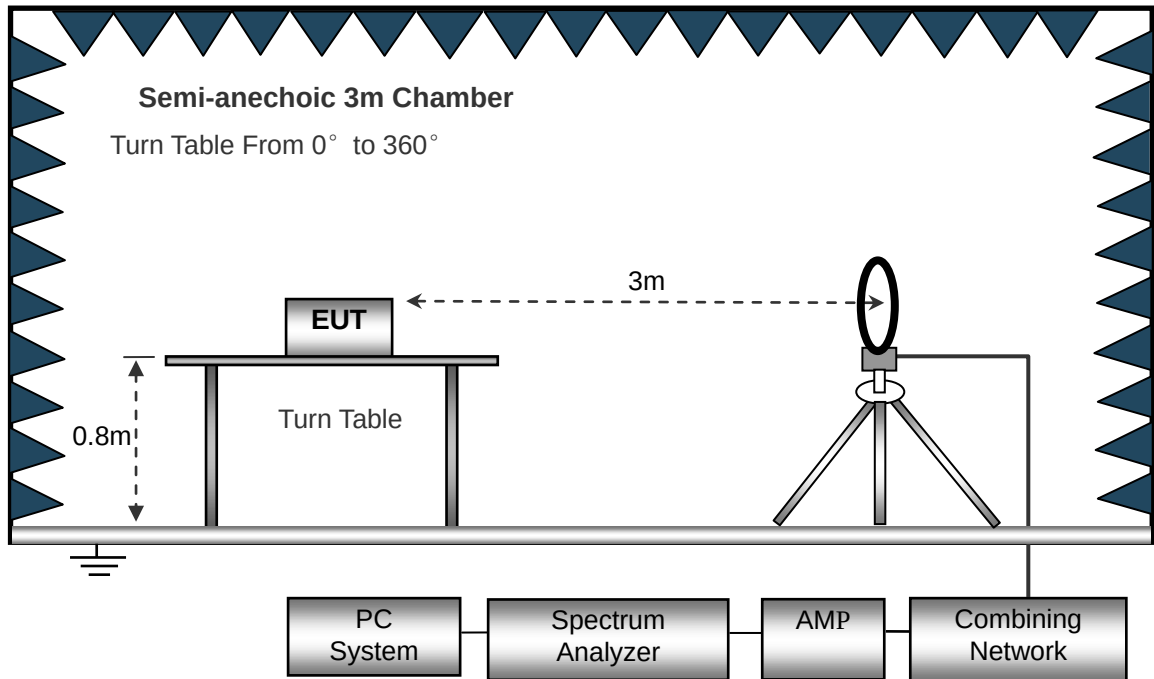
8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.



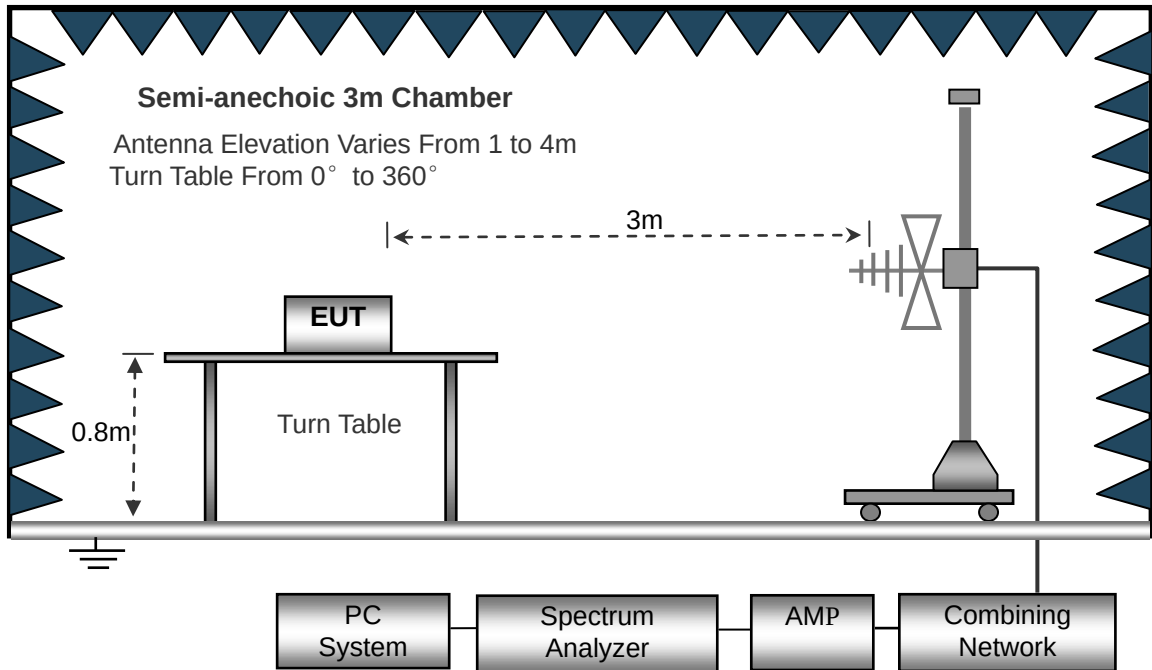The test setup for emission measurement from 30MHz to 1GHz.



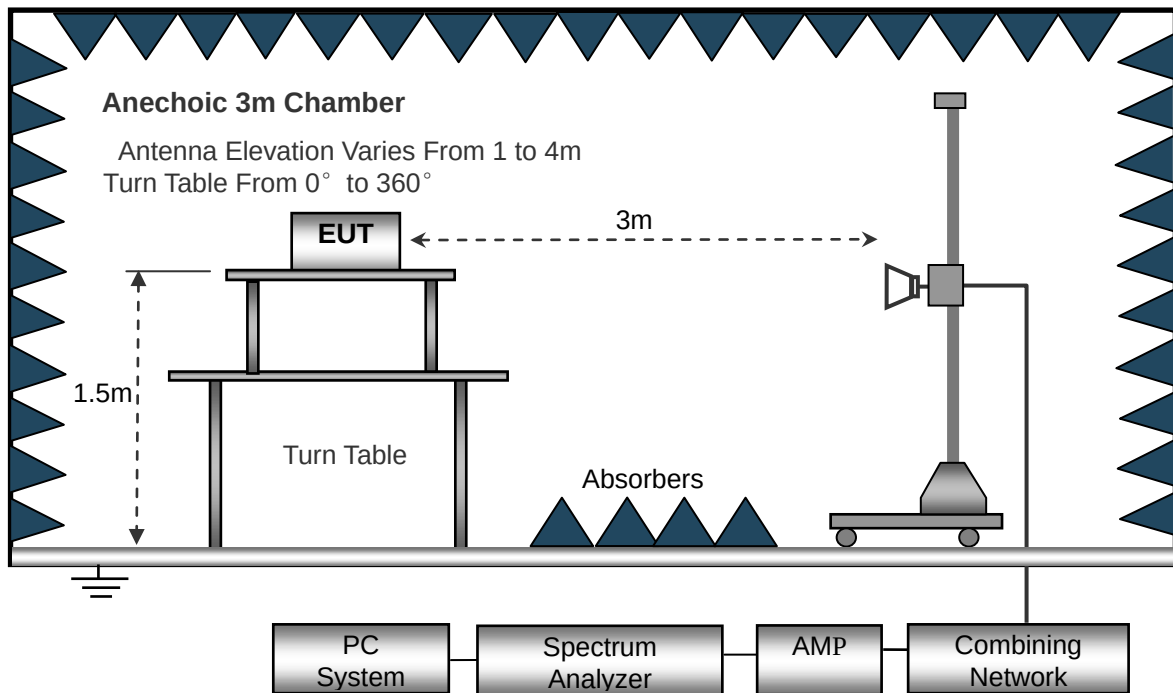The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emission From 30MHz to 1GHz
- 5150-5250MHz

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal

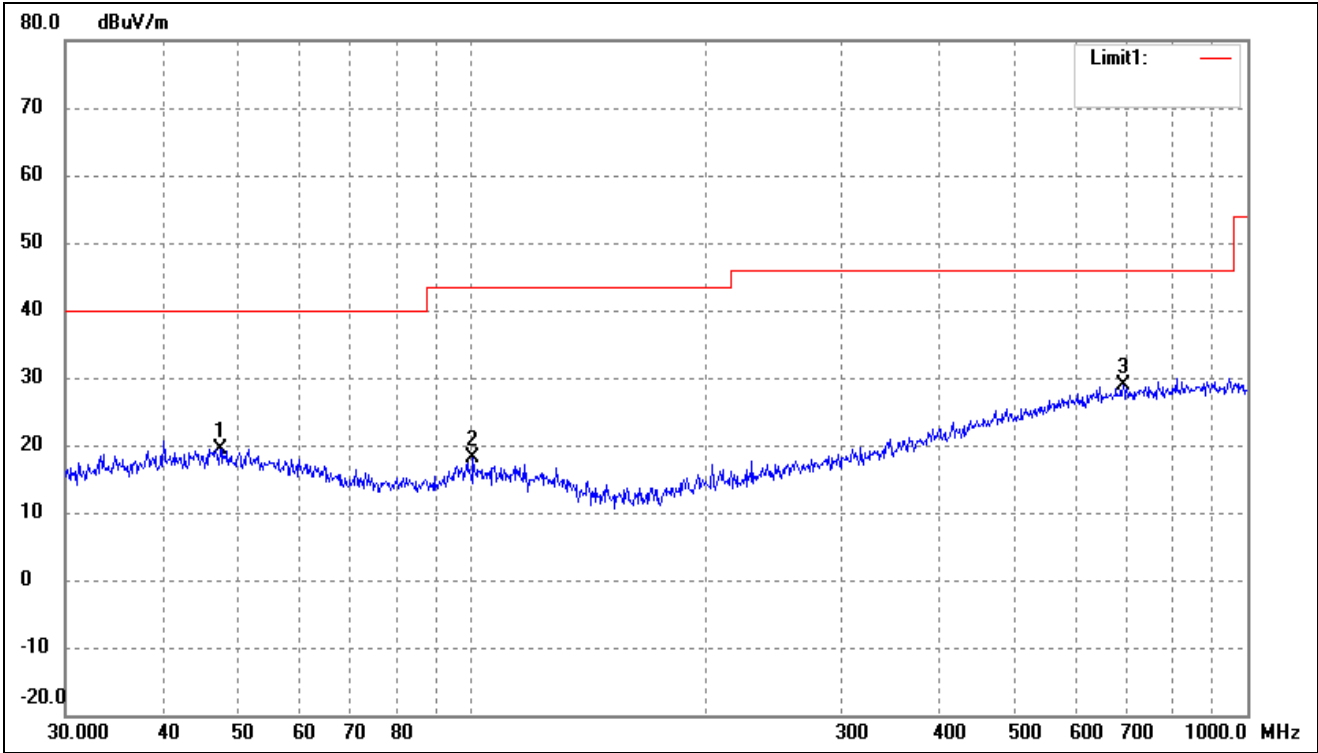


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	47.4918	26.43	-6.97	19.46	40.00	-20.54	-	-	peak
2	100.5806	26.98	-8.73	18.25	43.50	-25.25	-	-	peak
3	691.9867	27.57	1.34	28.91	46.00	-17.09	-	-	peak

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical

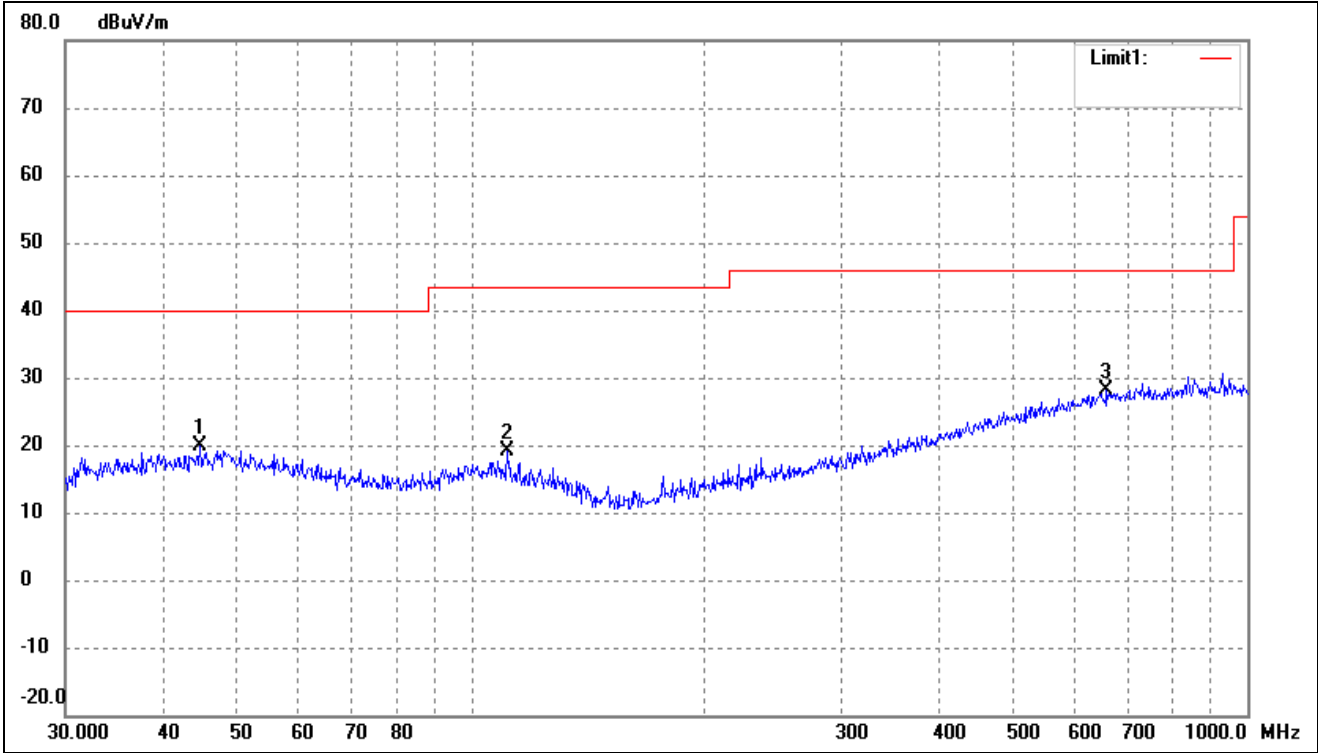


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.7434	26.81	-6.98	19.83	40.00	-20.17	-	-	peak
2	111.3468	28.06	-8.97	19.09	43.50	-24.41	-	-	peak
3	658.8362	27.18	1.01	28.19	46.00	-17.81	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

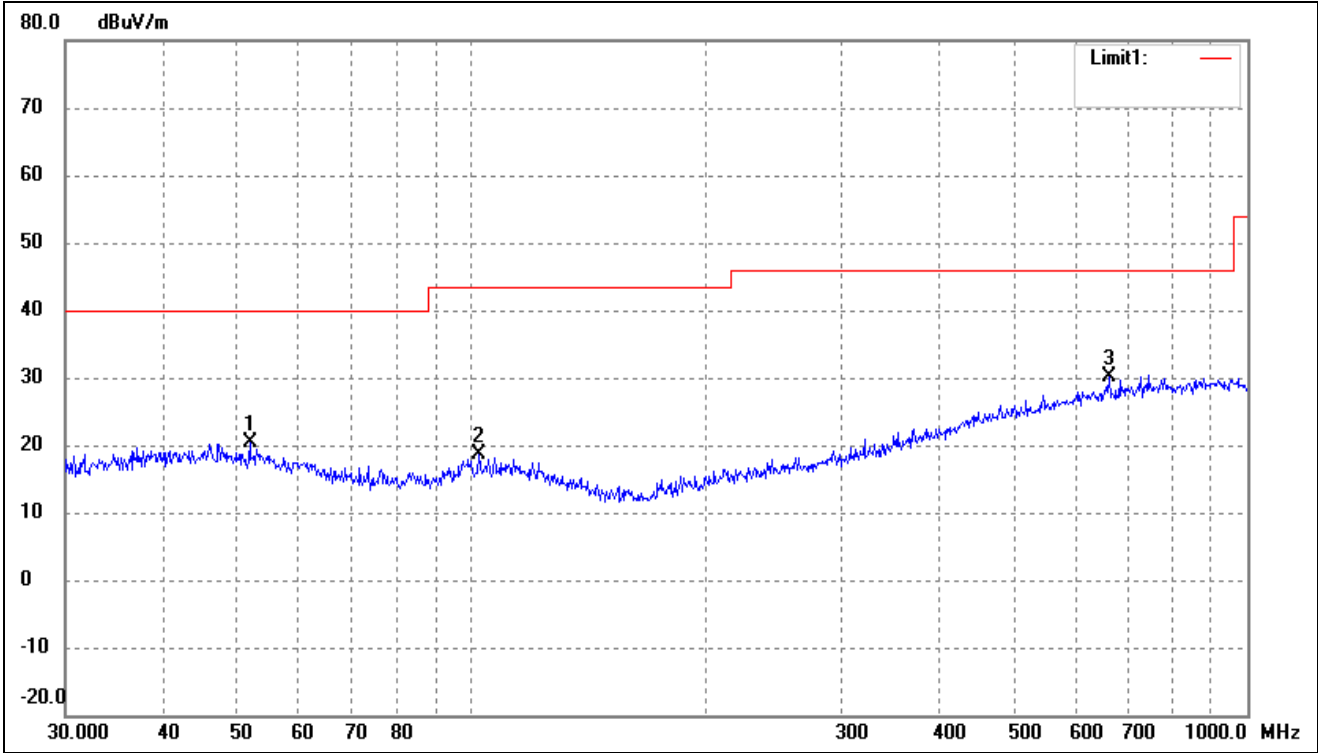


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.8430	27.56	-7.23	20.33	40.00	-19.67	-	-	peak
2	102.3597	27.31	-8.77	18.54	43.50	-24.96	-	-	peak
3	663.4729	29.00	1.06	30.06	46.00	-15.94	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

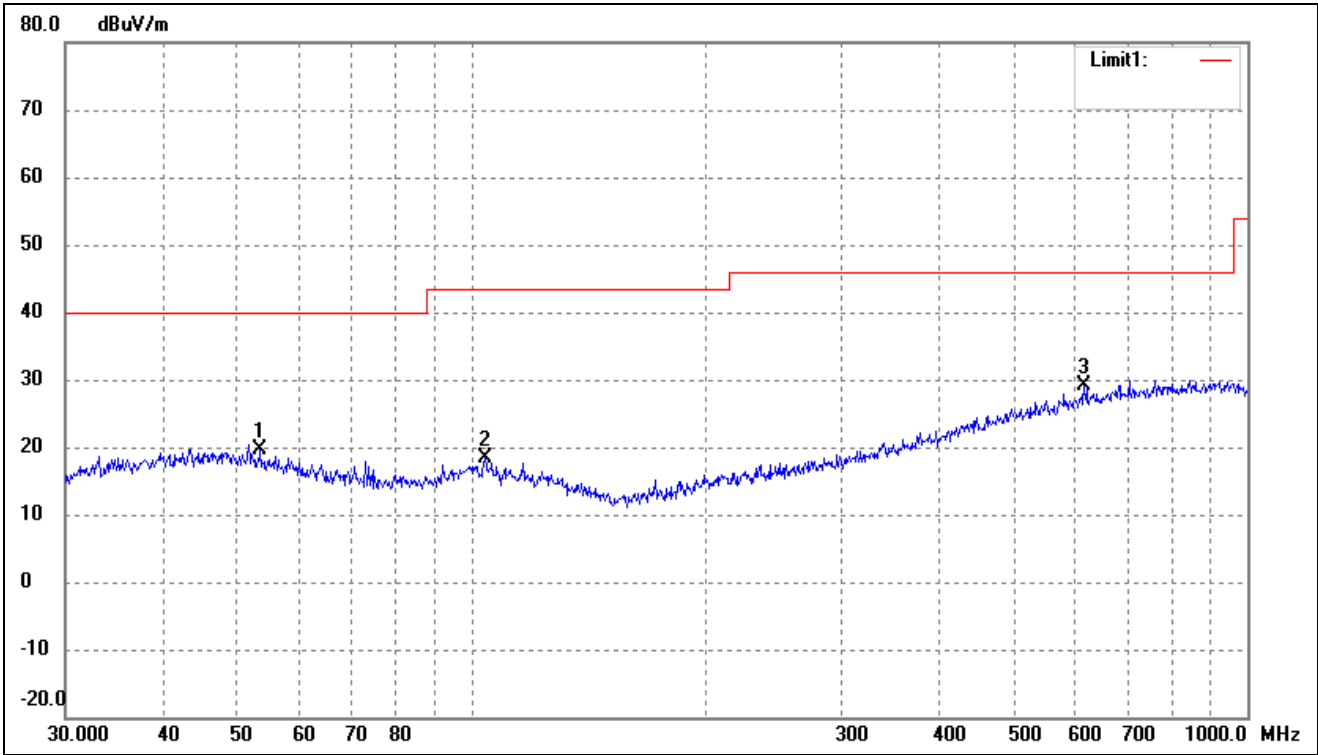


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.5052	27.09	-7.47	19.62	40.00	-20.38	-	-	peak
2	104.1701	27.05	-8.78	18.27	43.50	-25.23	-	-	peak
3	616.3718	28.52	0.55	29.07	46.00	-16.93	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

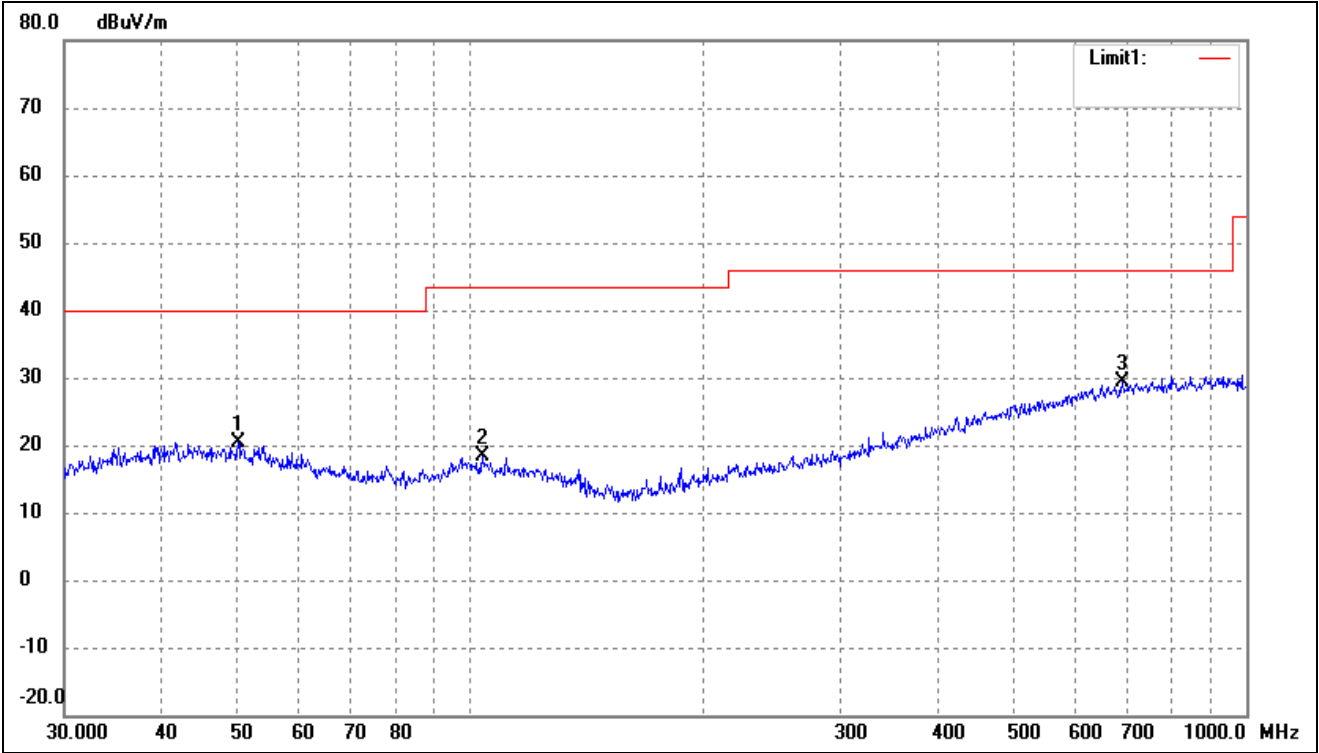

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.2325	27.38	-6.99	20.39	40.00	-19.61	-	-	peak
2	103.8055	27.22	-8.79	18.43	43.50	-25.07	-	-	peak
3	691.9867	28.00	1.34	29.34	46.00	-16.66	-	-	peak


802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

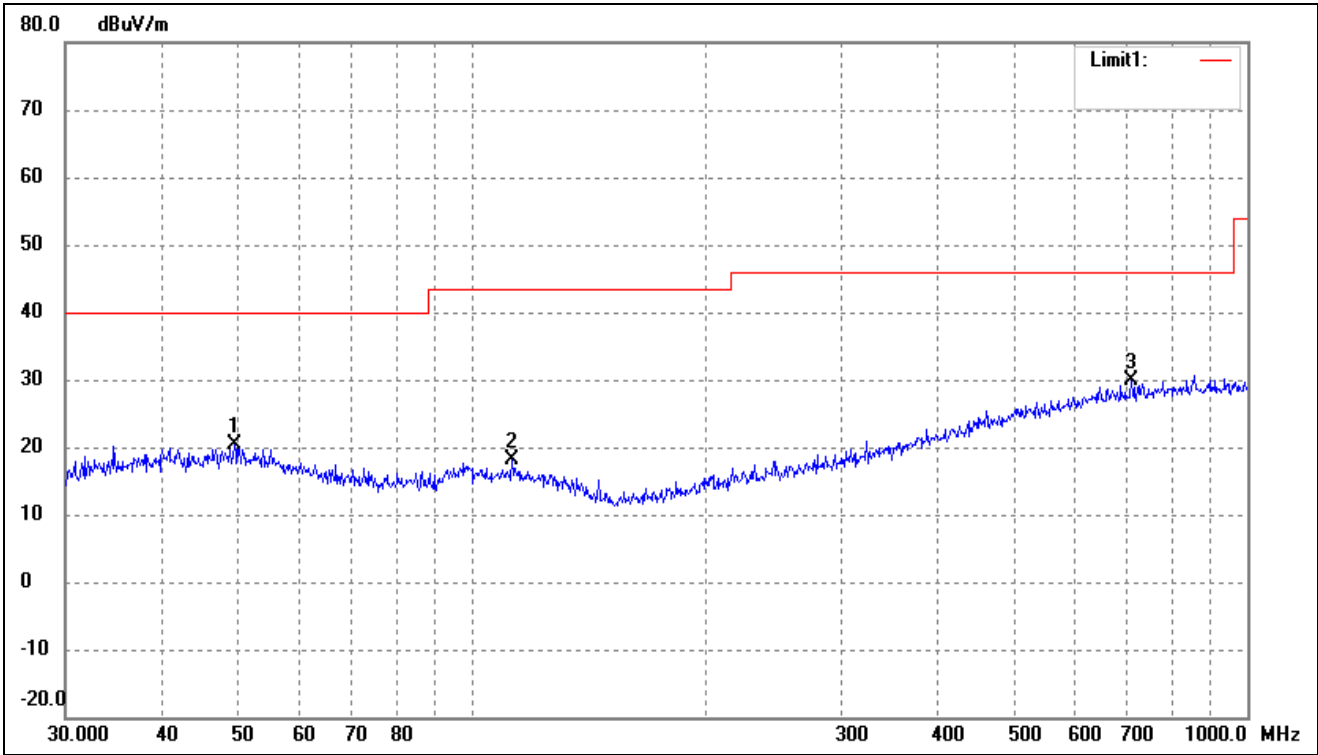

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.5328	27.39	-6.97	20.42	40.00	-19.58	-	-	peak
2	112.9196	27.24	-9.07	18.17	43.50	-25.33	-	-	peak
3	709.1823	28.44	1.48	29.92	46.00	-16.08	-	-	peak


➤ 5250-5350MHz

802.11a			
Test Channel	5260MHz(worst case)	Polarity:	Horizontal

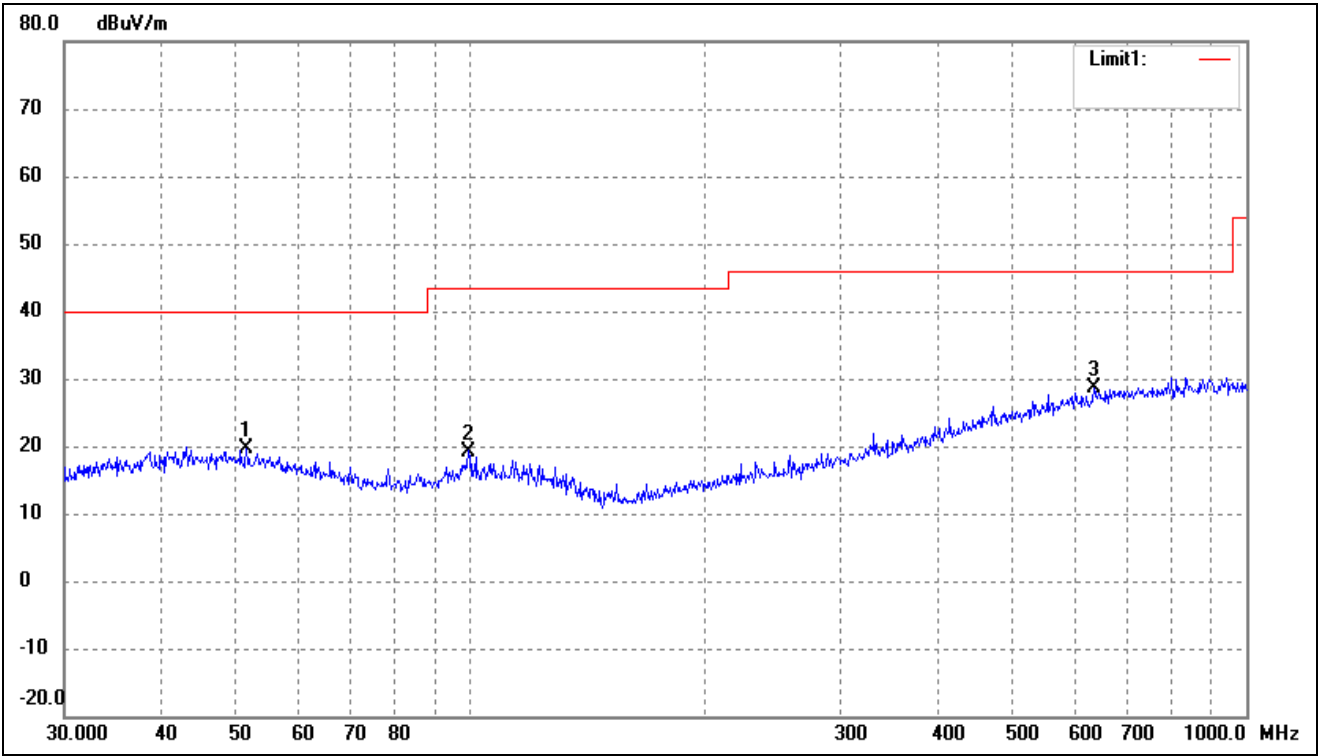


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.4807	26.85	-7.19	19.66	40.00	-20.34	-	-	peak
2	99.5281	28.06	-8.81	19.25	43.50	-24.25	-	-	peak
3	636.1340	27.95	0.77	28.72	46.00	-17.28	-	-	peak

802.11a			
Test Channel	5260MHz(worst case)	Polarity:	Vertical

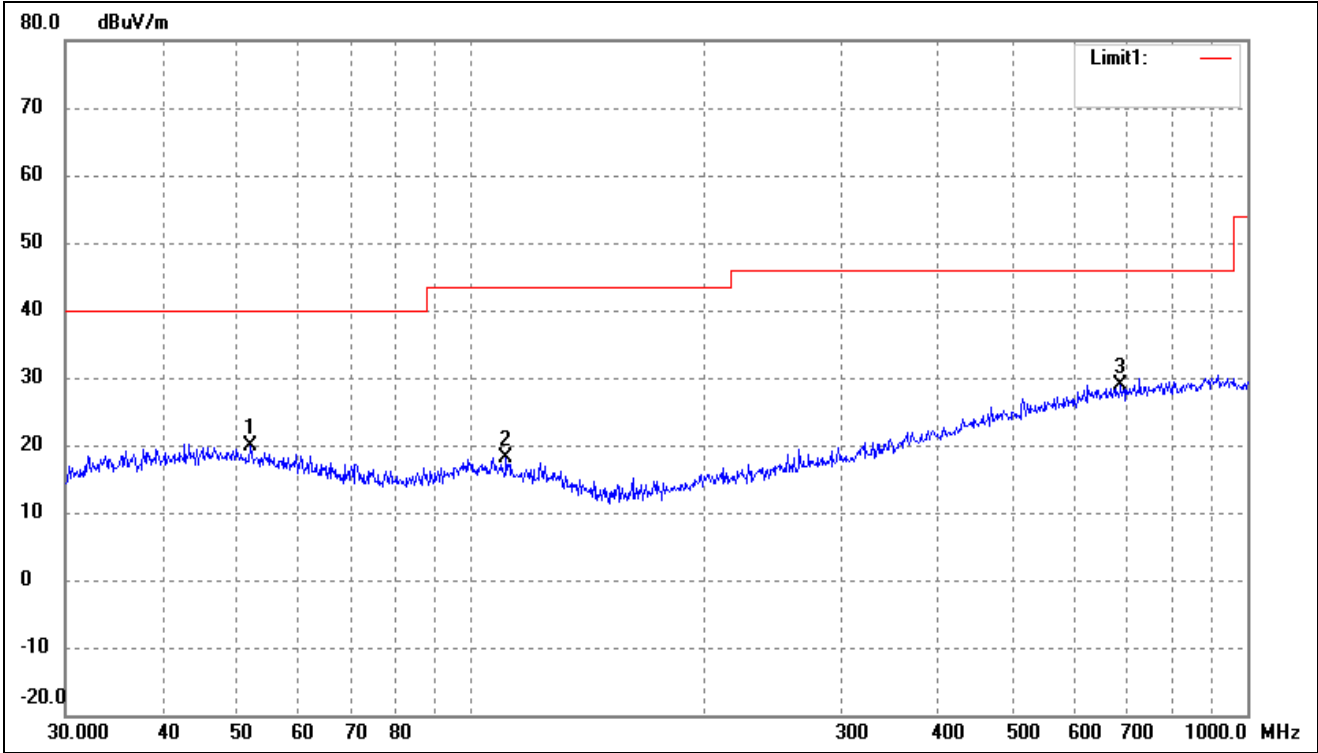


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.0251	27.02	-7.25	19.77	40.00	-20.23	-	-	peak
2	110.9571	27.14	-8.94	18.20	43.50	-25.30	-	-	peak
3	687.1507	27.67	1.30	28.97	46.00	-17.03	-	-	peak

802.11n-HT20			
Test Channel	5260MHz(worst case)	Polarity:	Horizontal

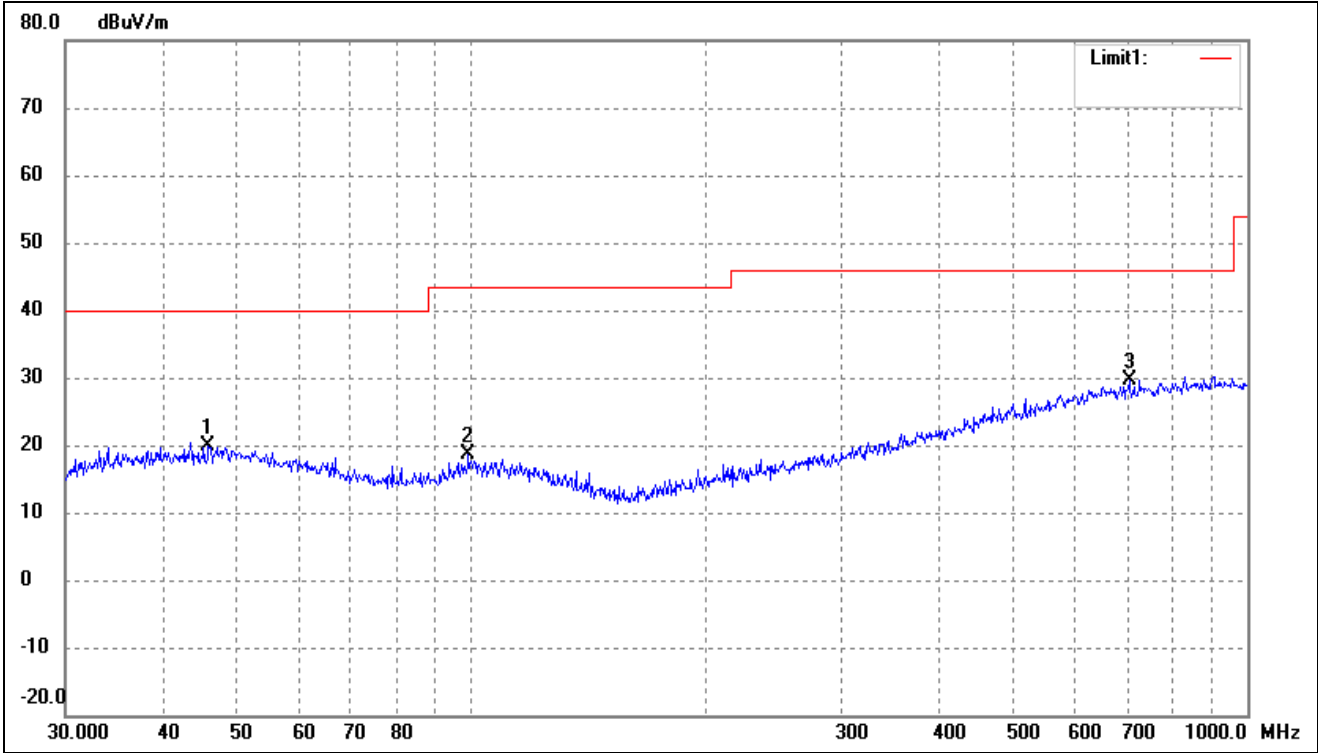


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.8553	26.94	-6.98	19.96	40.00	-20.04	-	-	peak
2	99.1797	27.47	-8.88	18.59	43.50	-24.91	-	-	peak
3	704.2261	28.08	1.46	29.54	46.00	-16.46	-	-	peak

802.11n-HT20			
Test Channel	5260MHz(worst case)	Polarity:	Vertical

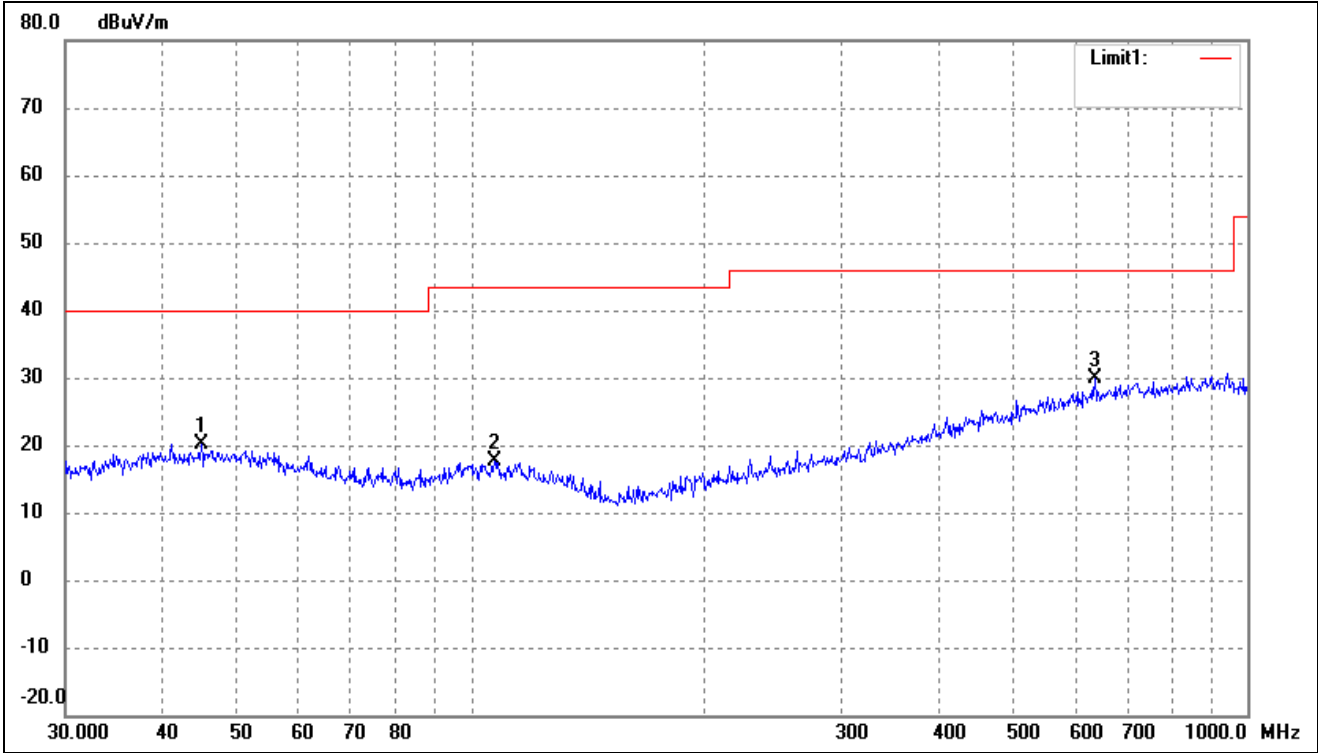


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.9006	27.18	-6.98	20.20	40.00	-19.80	-	-	peak
2	107.1337	26.48	-8.83	17.65	43.50	-25.85	-	-	peak
3	636.1340	29.12	0.77	29.89	46.00	-16.11	-	-	peak

802.11n-HT40			
Test Channel	5270MHz(worst case)	Polarity:	Horizontal

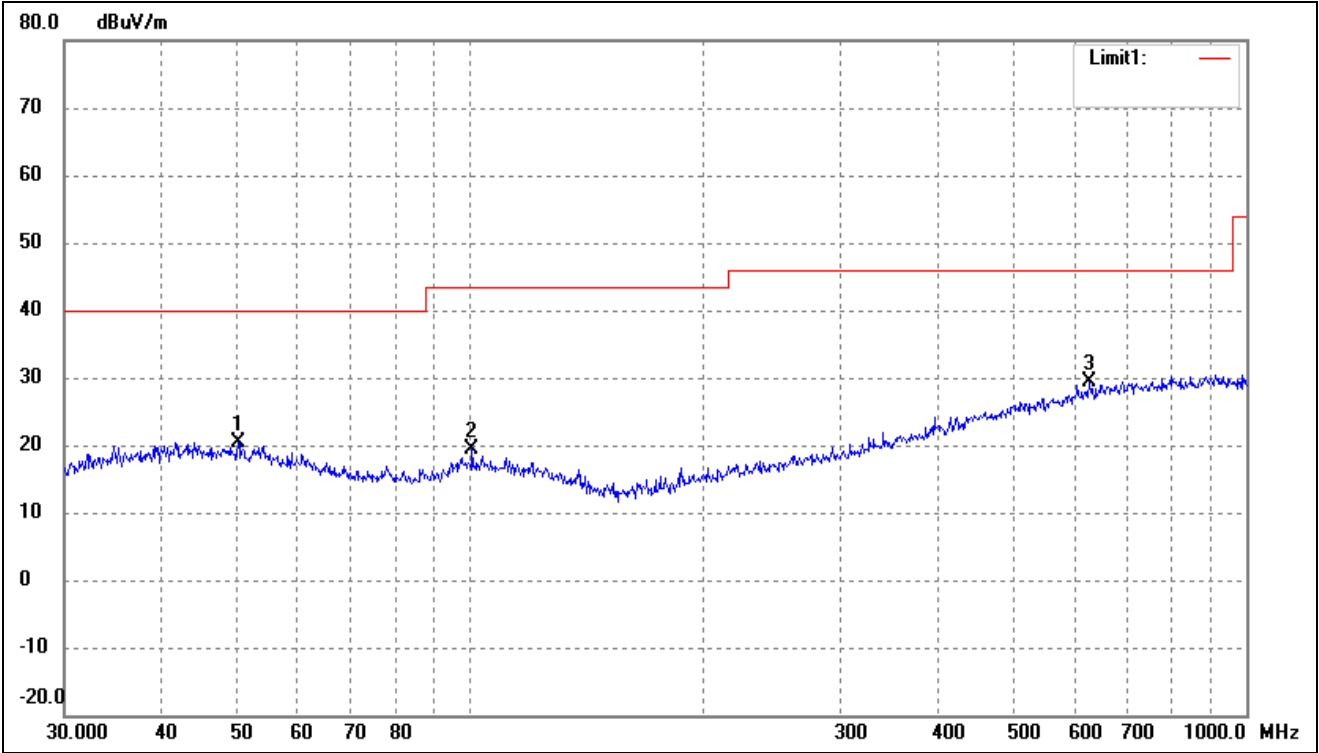

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.2325	27.38	-6.99	20.39	40.00	-19.61	-	-	peak
2	100.5806	28.23	-8.73	19.50	43.50	-24.00	-	-	peak
3	627.2738	28.63	0.67	29.30	46.00	-16.70	-	-	peak


802.11n-HT40			
Test Channel	5270MHz(worst case)	Polarity:	Vertical

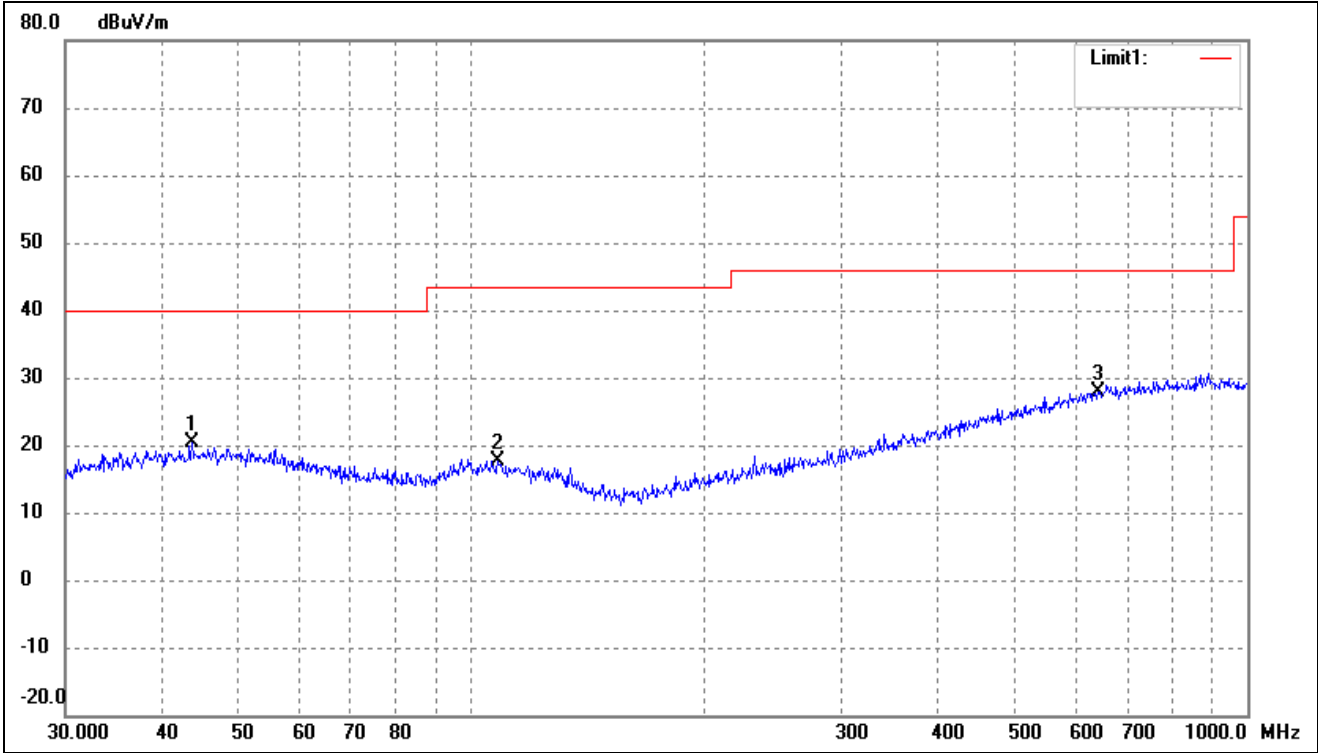

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.6585	27.39	-6.99	20.40	40.00	-19.60	-	-	peak
2	108.2667	26.54	-8.85	17.69	43.50	-25.81	-	-	peak
3	642.8613	27.12	0.84	27.96	46.00	-18.04	-	-	peak


➤ 5470-5725MHz

802.11a			
Test Channel	5500MHz(worst case)	Polarity:	Horizontal

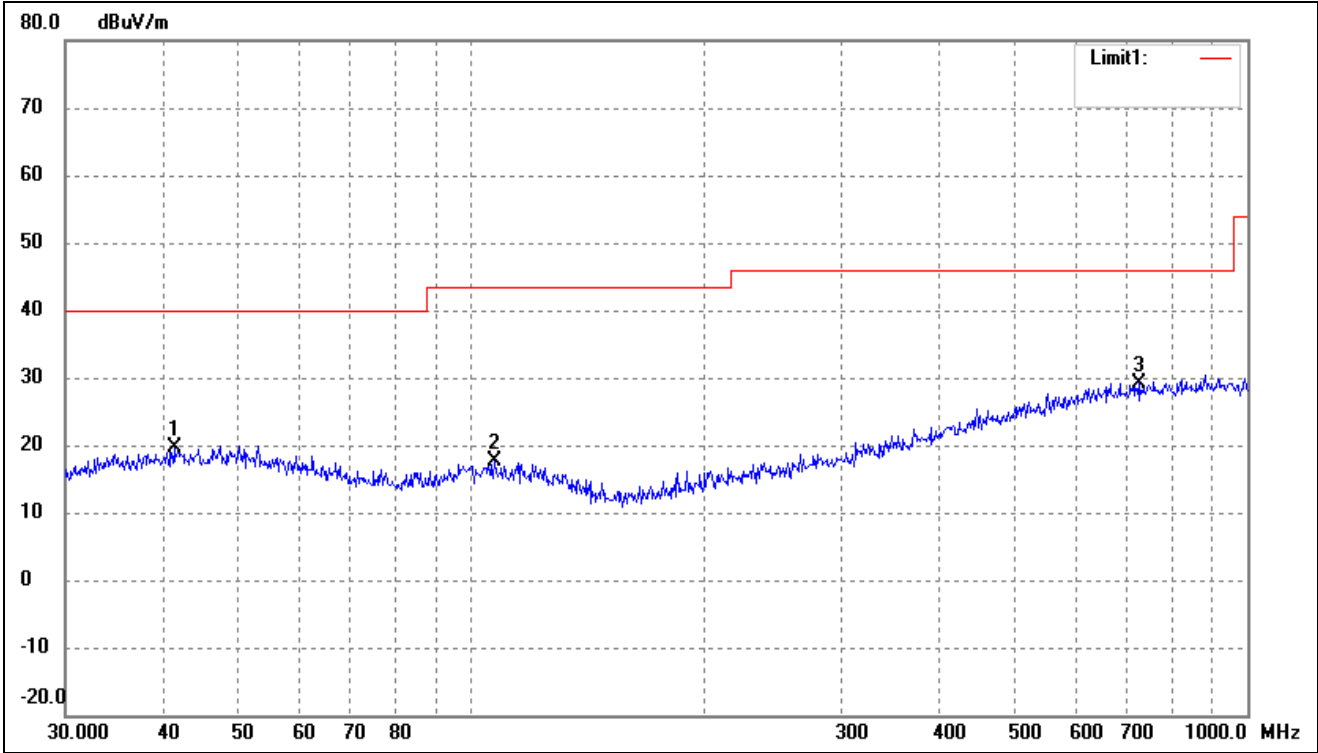


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.4215	26.62	-6.99	19.63	40.00	-20.37	-	-	peak
2	107.1337	26.35	-8.83	17.52	43.50	-25.98	-	-	peak
3	724.2611	27.66	1.59	29.25	46.00	-16.75	-	-	peak

802.11a			
Test Channel	5500MHz(worst case)	Polarity:	Vertical

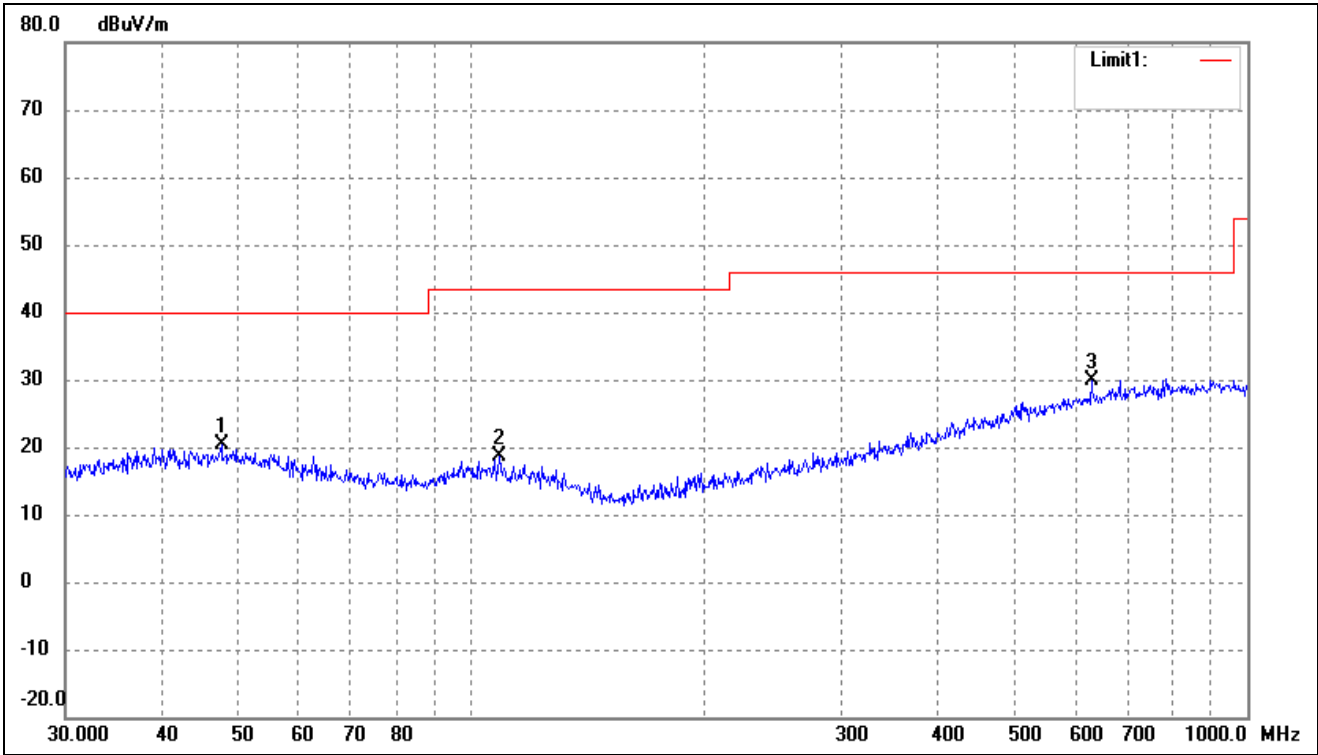


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	47.6586	27.42	-6.97	20.45	40.00	-19.55	-	-	peak
2	108.6470	27.45	-8.84	18.61	43.50	-24.89	-	-	peak
3	629.4772	29.21	0.69	29.90	46.00	-16.10	-	-	peak

802.11n-HT20			
Test Channel	5500MHz(worst case)	Polarity:	Horizontal

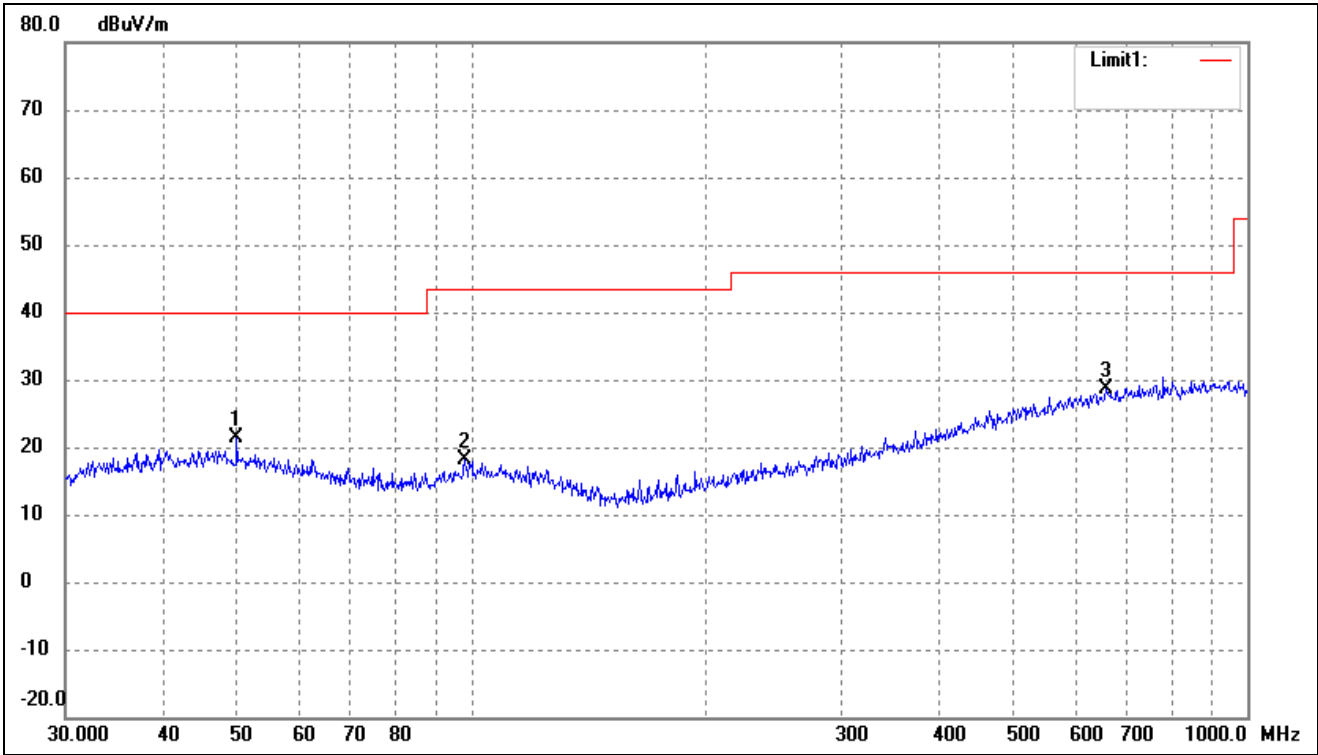


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.8814	28.38	-6.96	21.42	40.00	-18.58	-	-	peak
2	98.1419	27.08	-9.07	18.01	43.50	-25.49	-	-	peak
3	656.5300	27.75	0.98	28.73	46.00	-17.27	-	-	peak

802.11n-HT20			
Test Channel	5500MHz(worst case)	Polarity:	Vertical

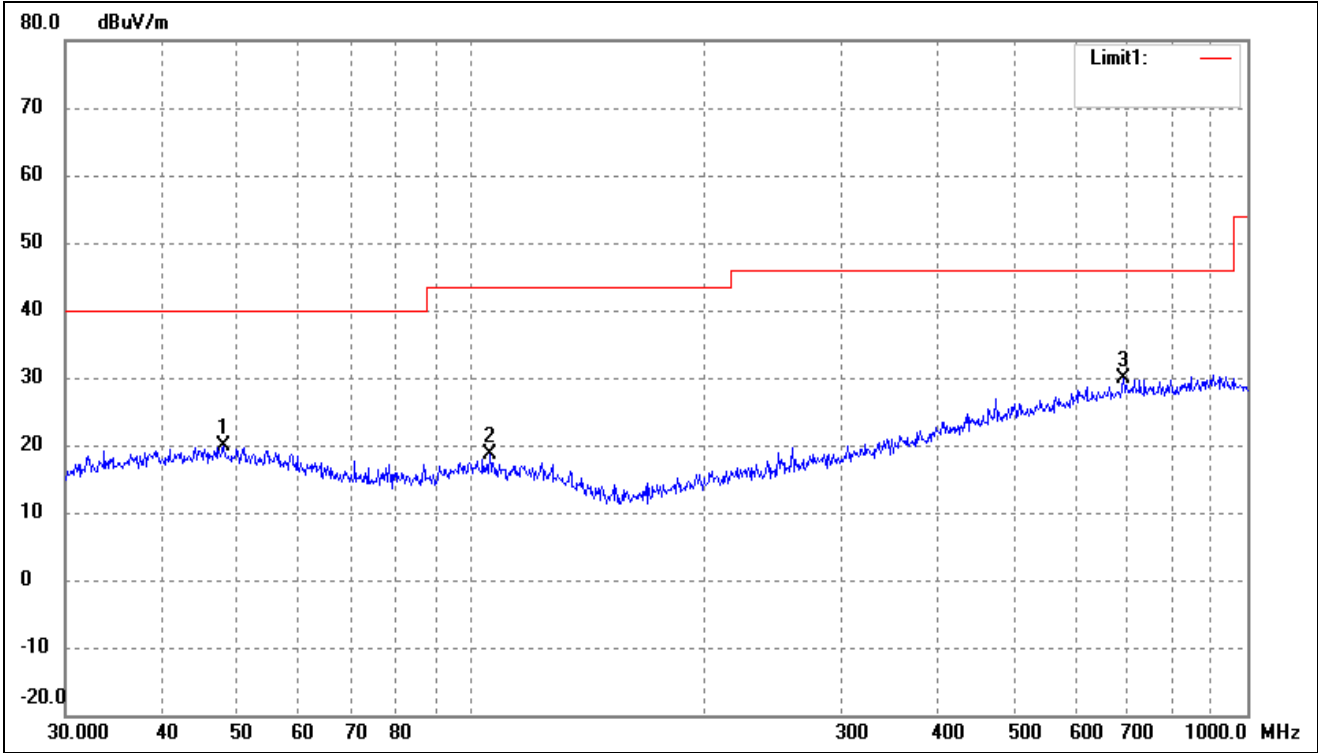


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	47.9940	26.93	-6.97	19.96	40.00	-20.04	-	-	peak
2	105.6415	27.37	-8.80	18.57	43.50	-24.93	-	-	peak
3	691.9867	28.54	1.34	29.88	46.00	-16.12	-	-	peak

802.11n-HT40			
Test Channel	5510MHz(worst case)	Polarity:	Horizontal

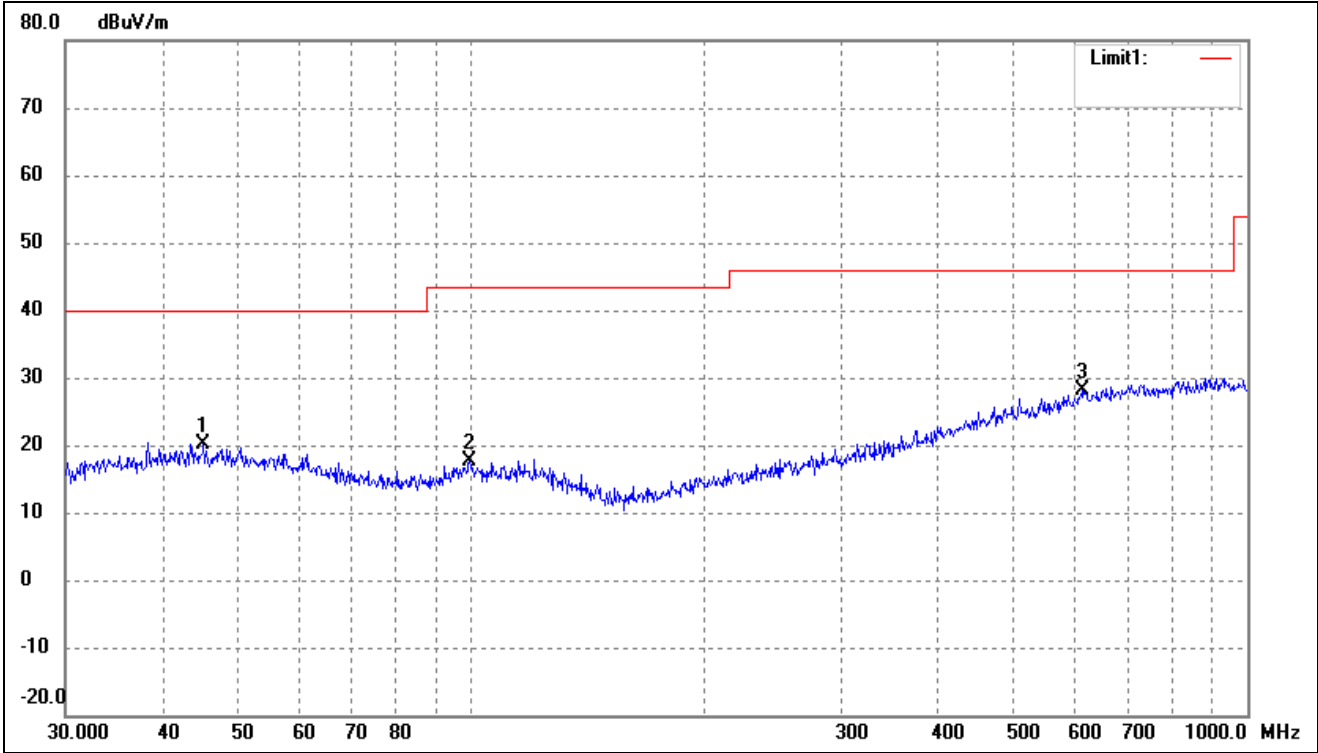

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.2166	27.00	-6.99	20.01	40.00	-19.99	-	-	peak
2	99.5281	26.49	-8.81	17.68	43.50	-25.82	-	-	peak
3	612.0642	27.59	0.50	28.09	46.00	-17.91	-	-	peak


802.11n-HT40			
Test Channel	5510MHz(worst case)	Polarity:	Vertical

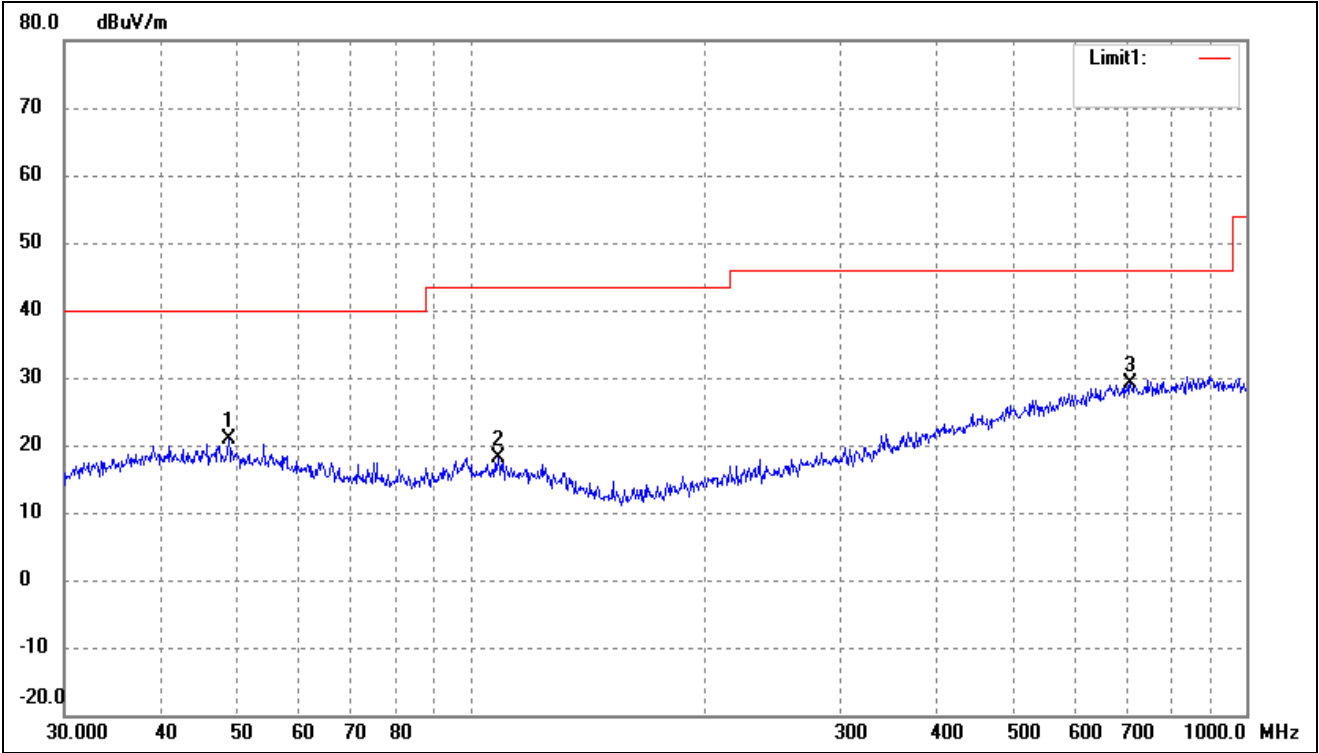

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.8429	27.92	-6.97	20.95	40.00	-19.05	-	-	peak
2	108.6470	27.00	-8.84	18.16	43.50	-25.34	-	-	peak
3	709.1823	27.68	1.48	29.16	46.00	-16.84	-	-	peak


➤ 5725-5850MHz

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

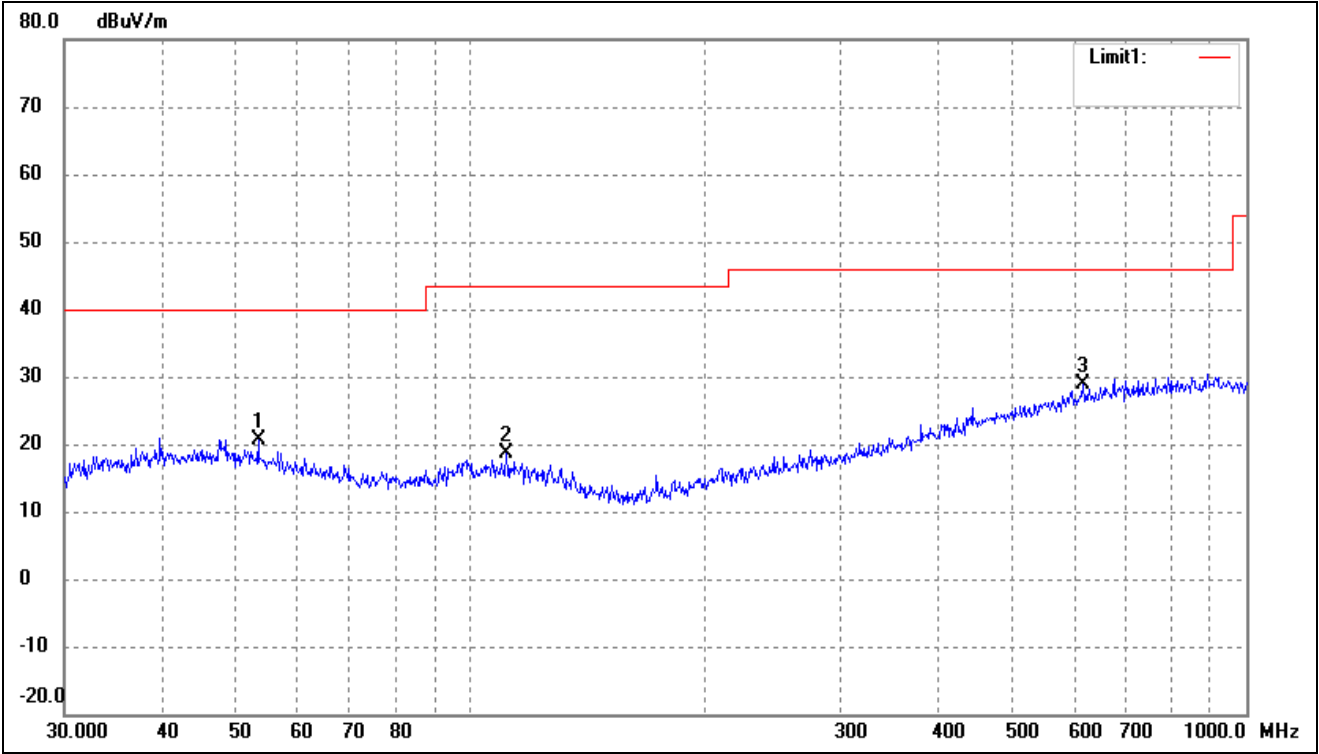


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.3179	28.09	-7.45	20.64	40.00	-19.36	-	-	peak
2	111.3468	27.71	-8.97	18.74	43.50	-24.76	-	-	peak
3	616.3718	28.21	0.55	28.76	46.00	-17.24	-	-	peak

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

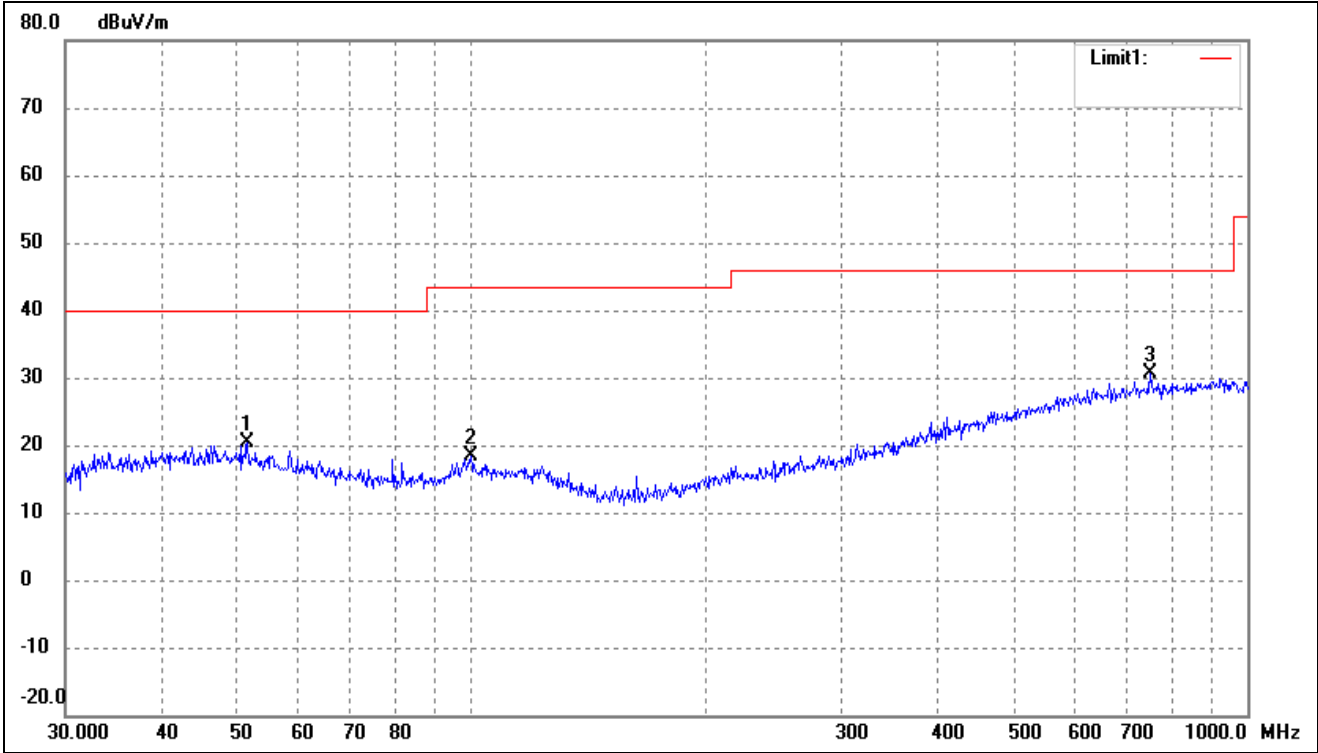


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.4807	27.65	-7.19	20.46	40.00	-19.54	-	-	peak
2	99.8777	27.15	-8.75	18.40	43.50	-25.10	-	-	peak
3	750.1083	28.81	1.76	30.57	46.00	-15.43	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

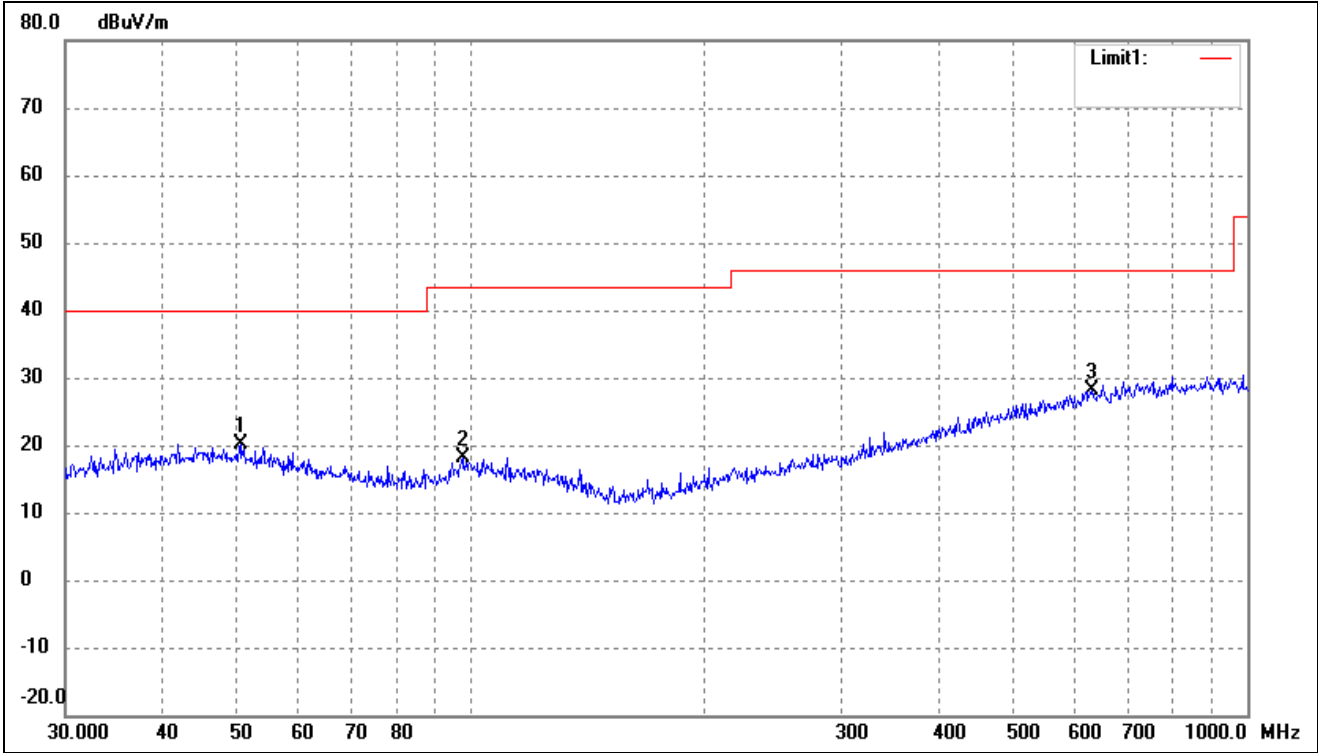


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.4089	27.09	-7.02	20.07	40.00	-19.93	-	-	peak
2	97.4560	27.28	-9.20	18.08	43.50	-25.42	-	-	peak
3	631.6884	27.41	0.72	28.13	46.00	-17.87	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

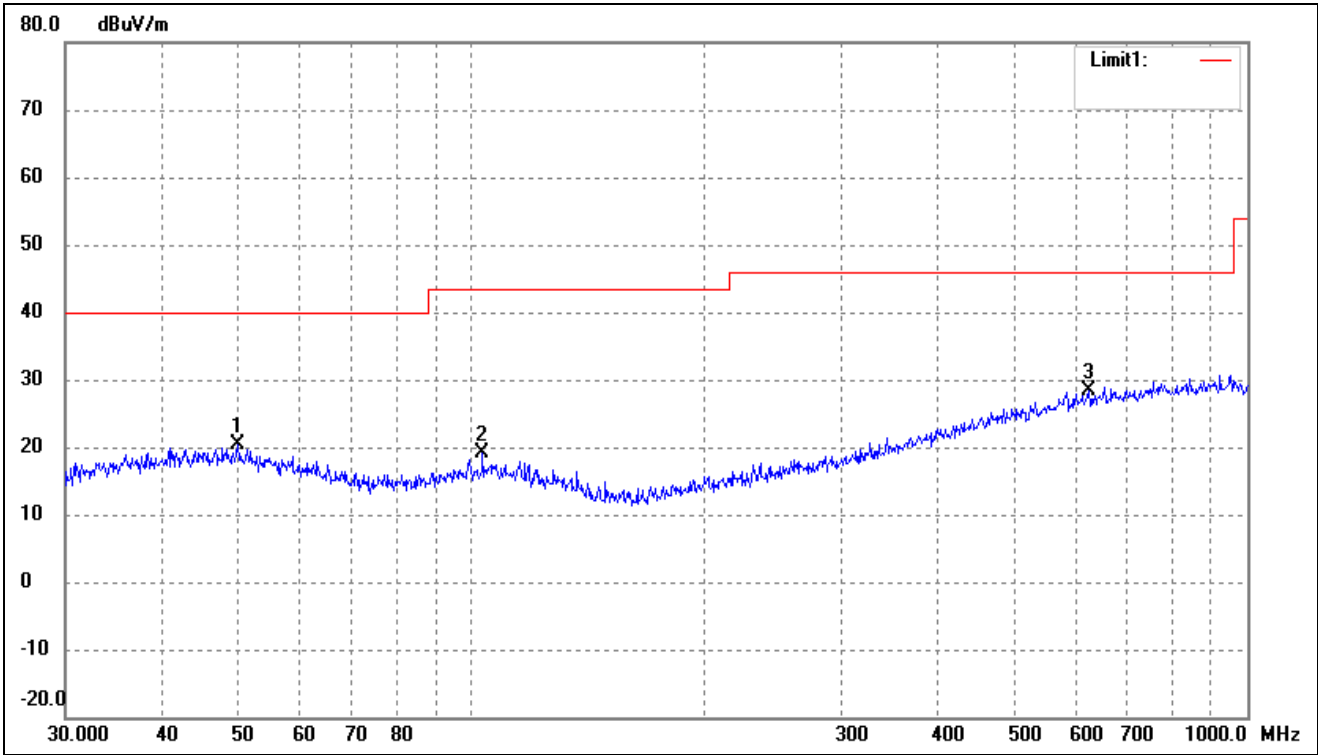


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.0566	27.46	-6.97	20.49	40.00	-19.51	-	-	peak
2	103.4421	27.90	-8.78	19.12	43.50	-24.38	-	-	peak
3	625.0780	27.61	0.65	28.26	46.00	-17.74	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

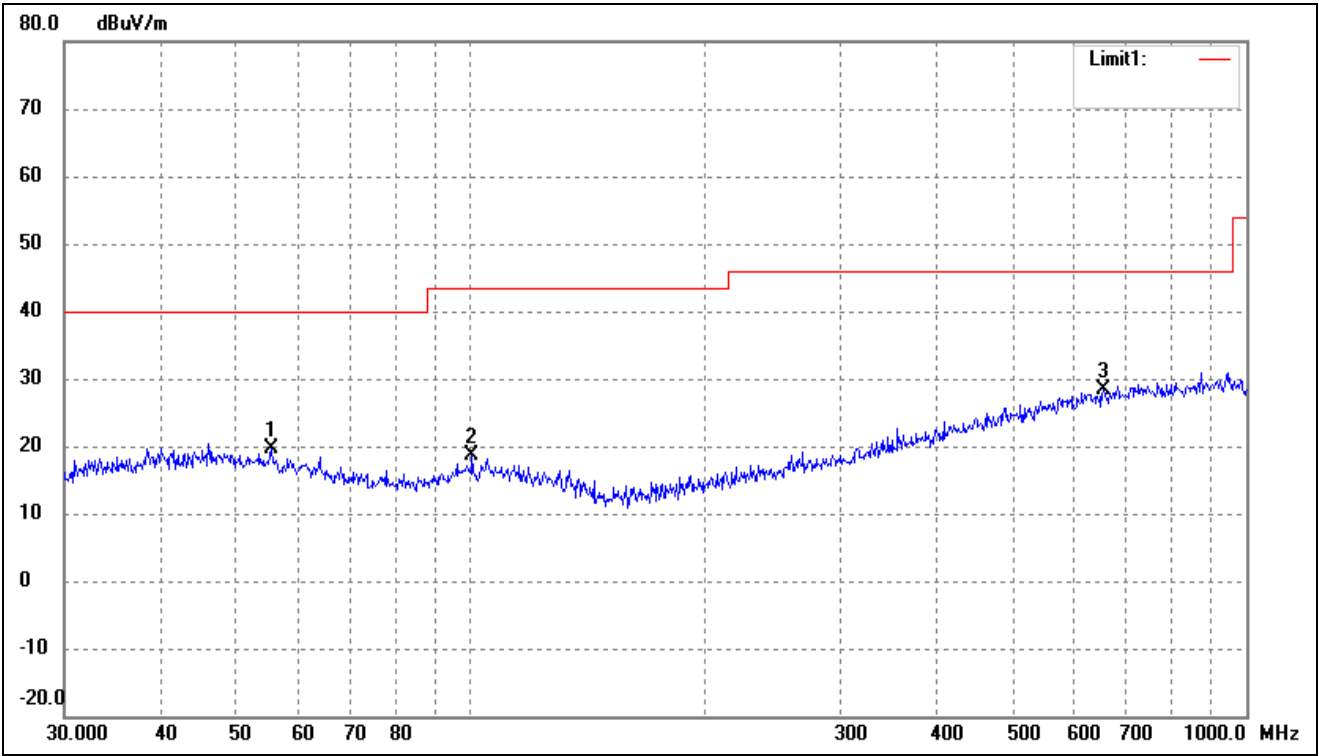

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	55.4147	27.40	-7.75	19.65	40.00	-20.35	-	-	peak
2	100.5806	27.32	-8.73	18.59	43.50	-24.91	-	-	peak
3	654.2318	27.51	0.96	28.47	46.00	-17.53	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

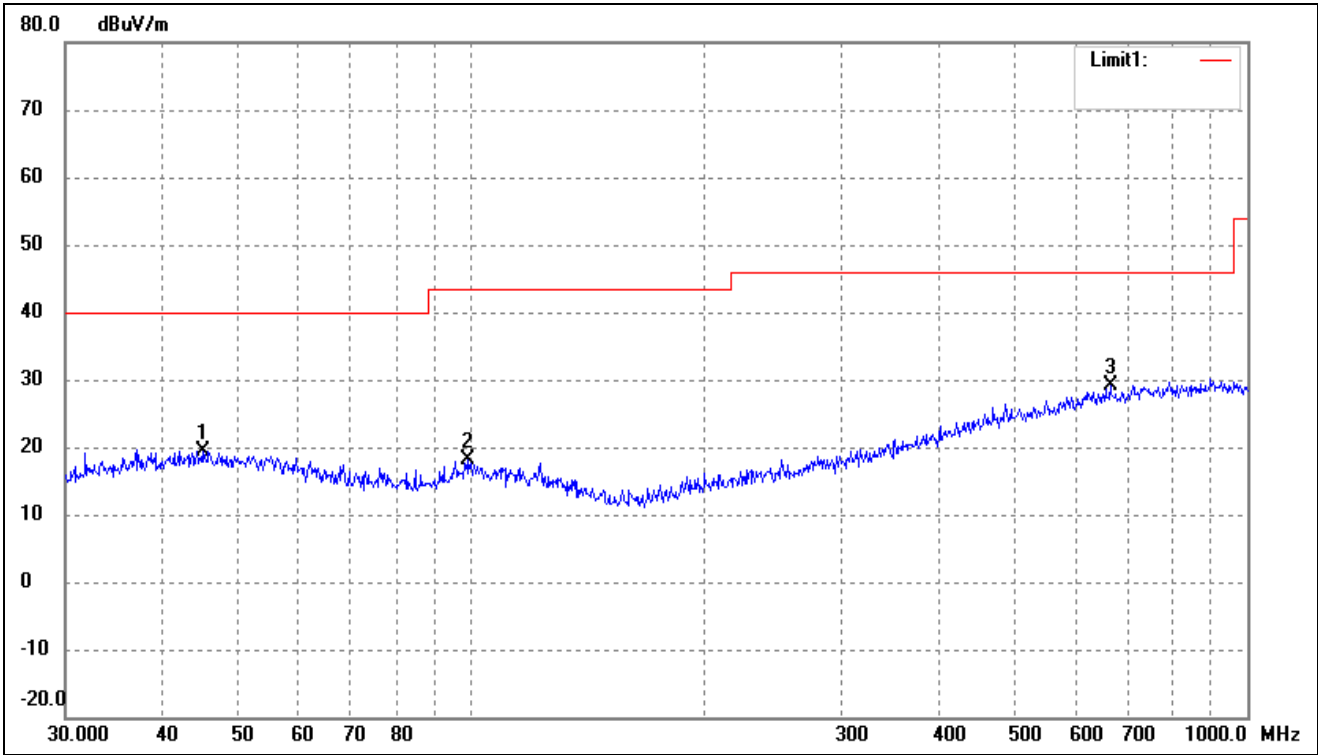


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.0583	26.45	-6.98	19.47	40.00	-20.53	-	-	peak
2	98.8326	27.13	-8.94	18.19	43.50	-25.31	-	-	peak
3	665.8035	28.07	1.08	29.15	46.00	-16.85	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

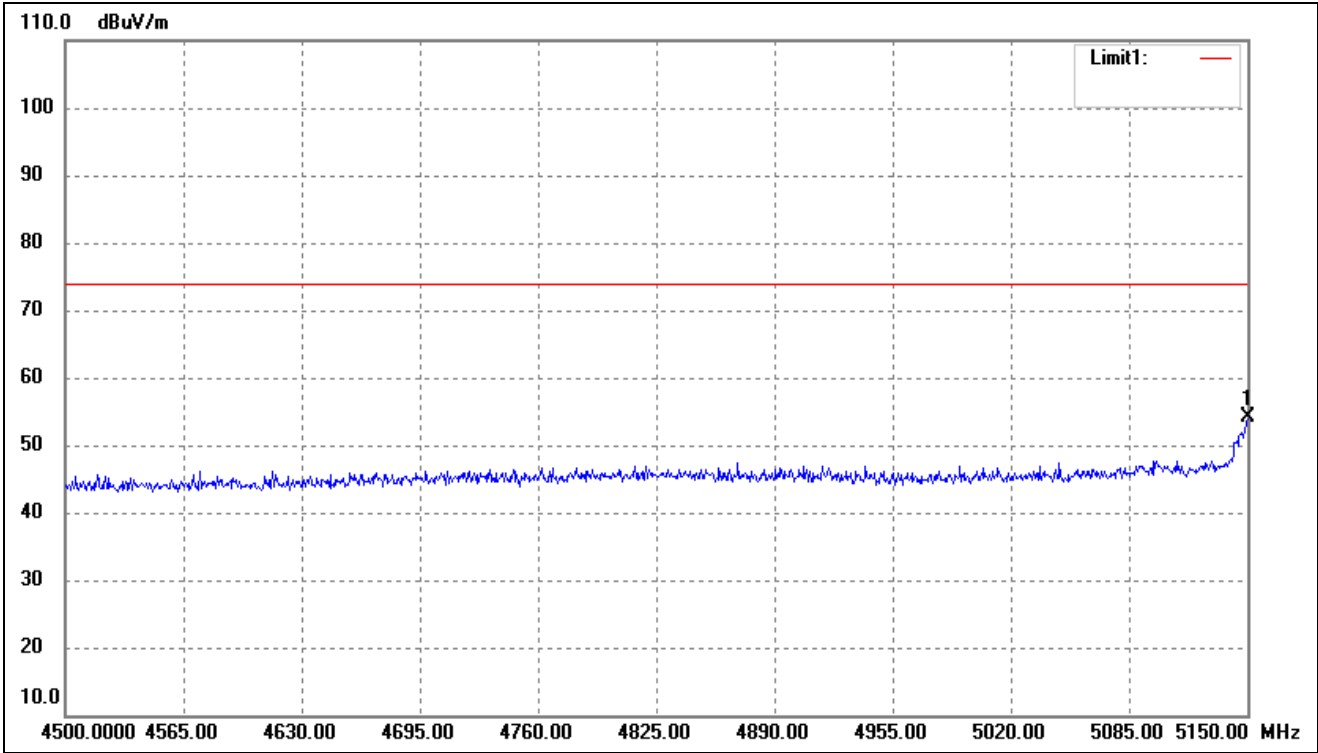


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5150.000	59.45	-5.33	54.12	74.00	-19.88	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

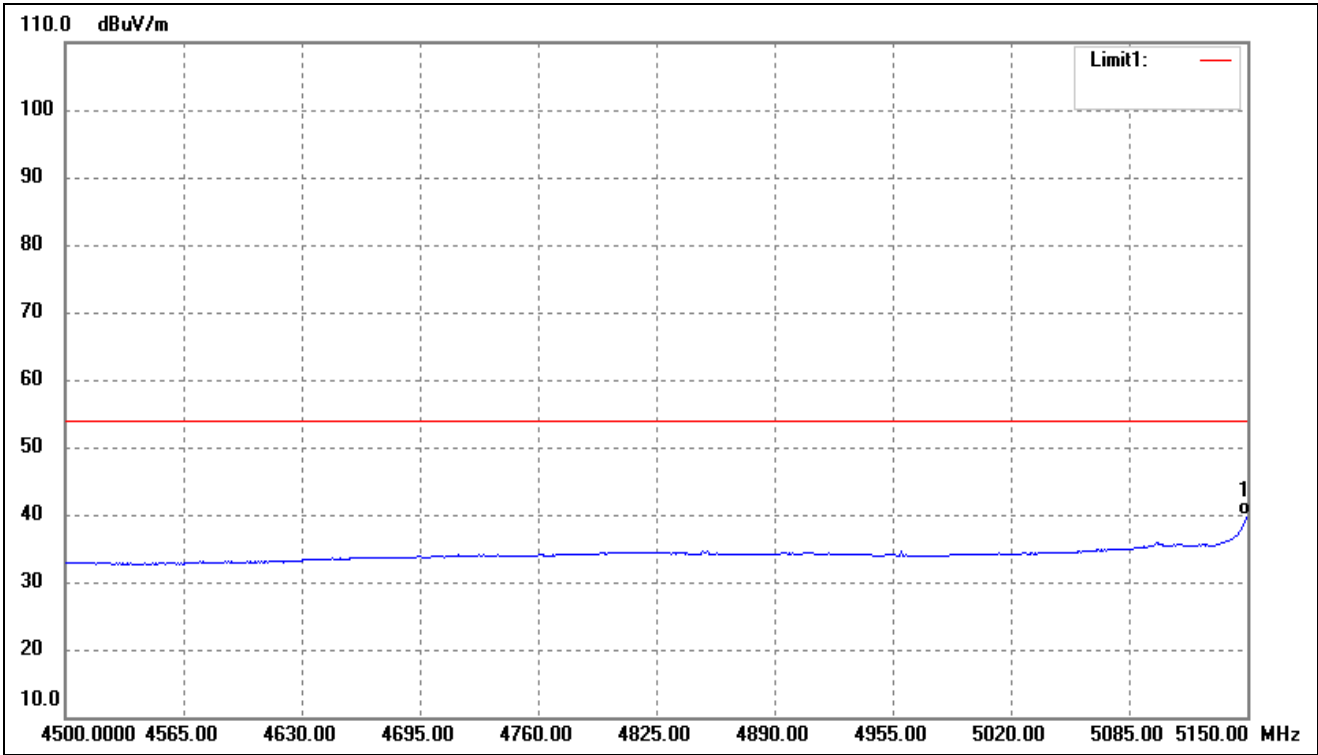


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	45.09	-5.33	39.76	54.00	-14.24	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

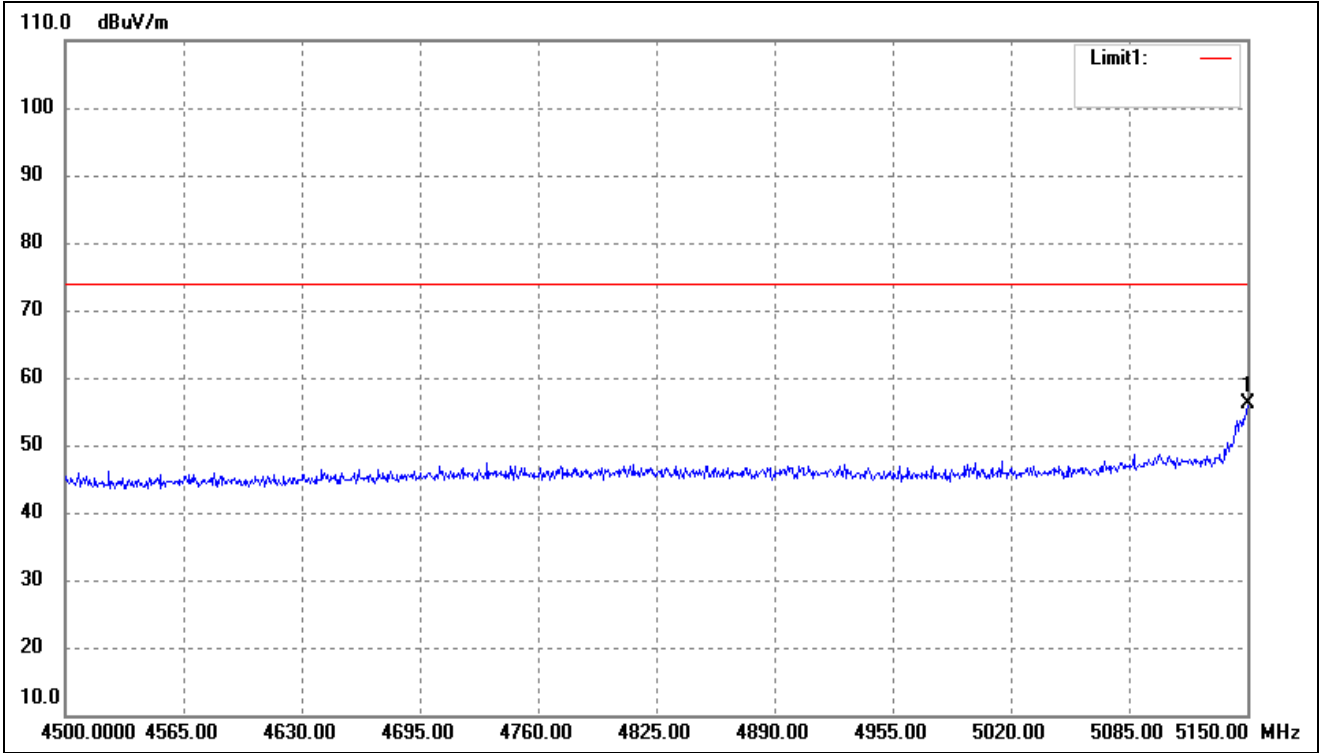


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	61.45	-5.33	56.12	74.00	-17.88	-	-	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

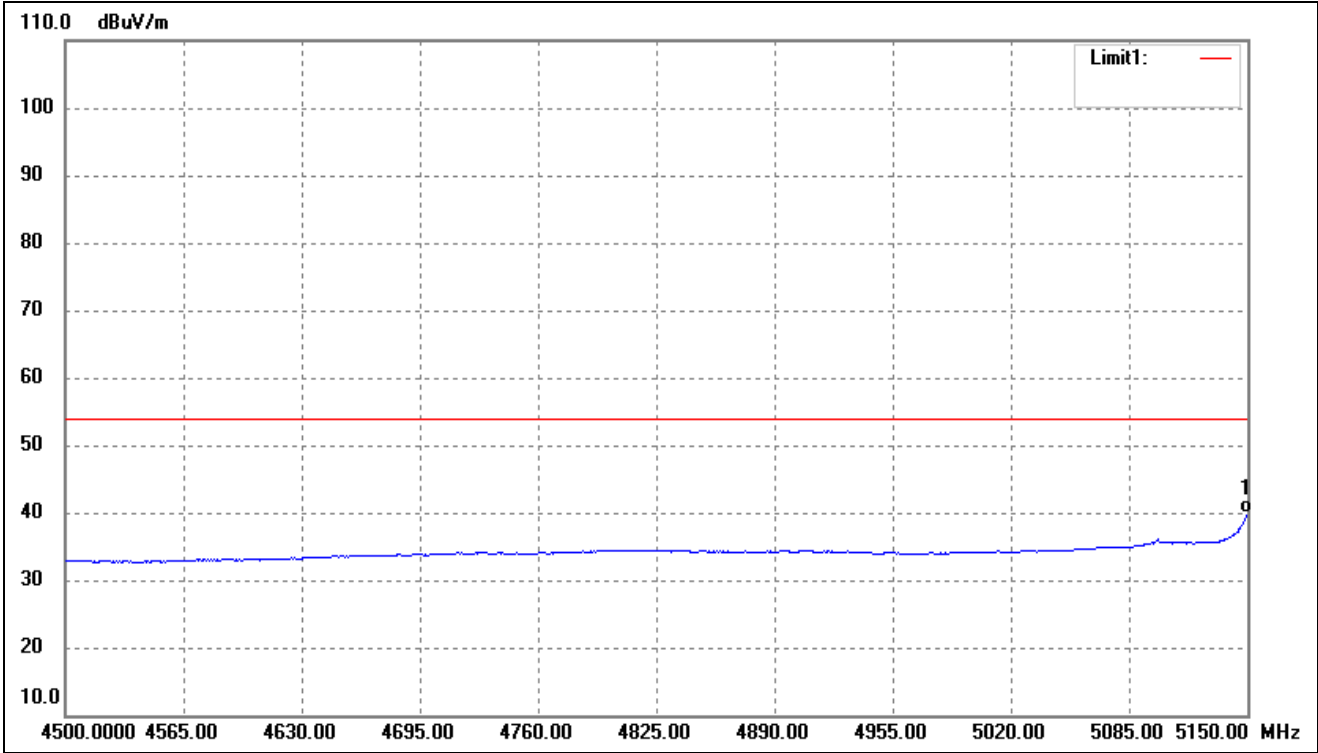


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5150.000	45.30	-5.33	39.97	54.00	-14.03	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

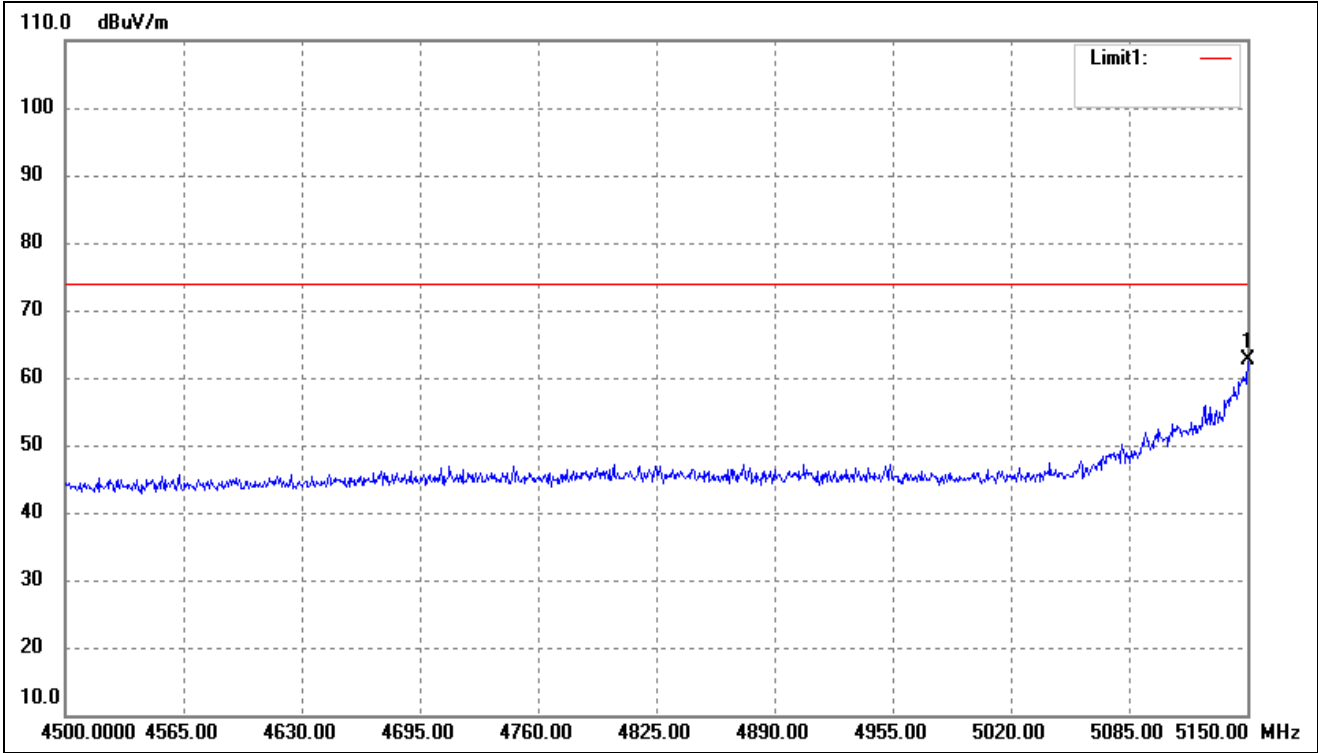


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	67.85	-5.33	62.52	74.00	-11.48	-	-	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

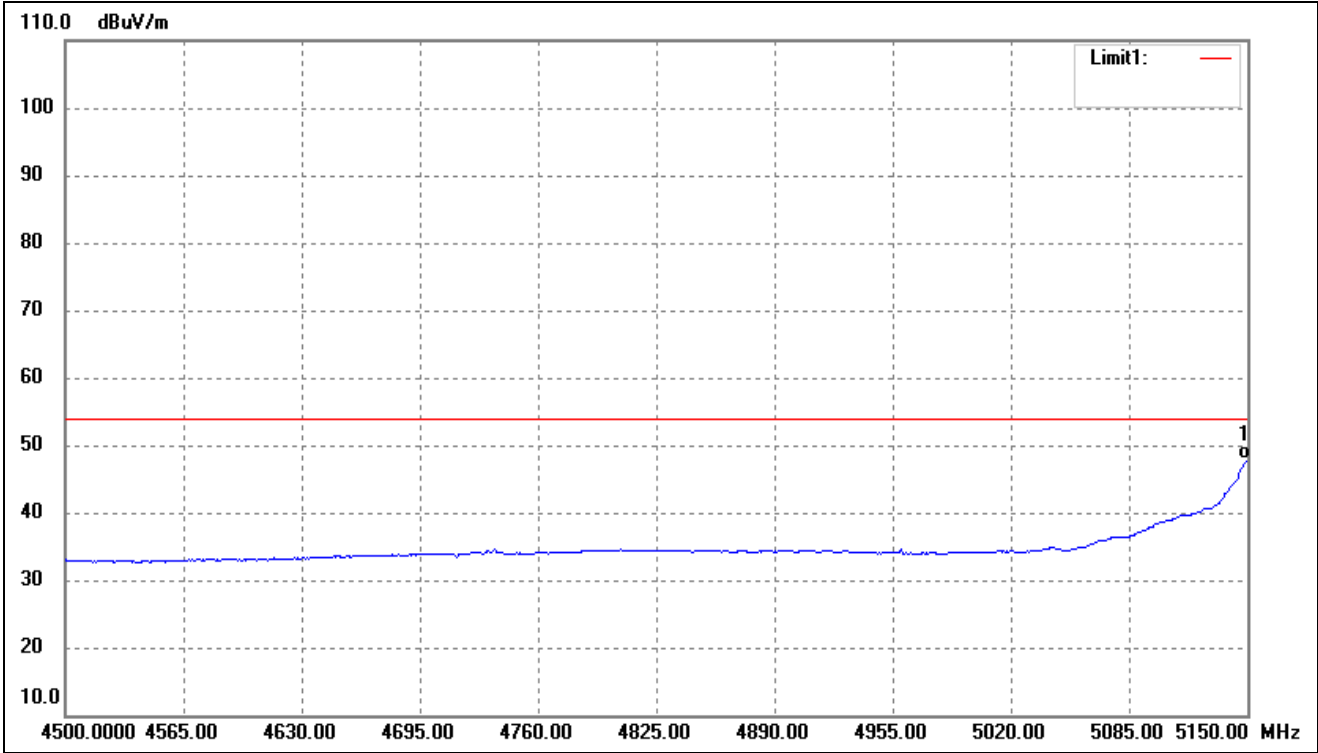


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	53.29	-5.33	47.96	54.00	-6.04	-	-	AVG

802.11a- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

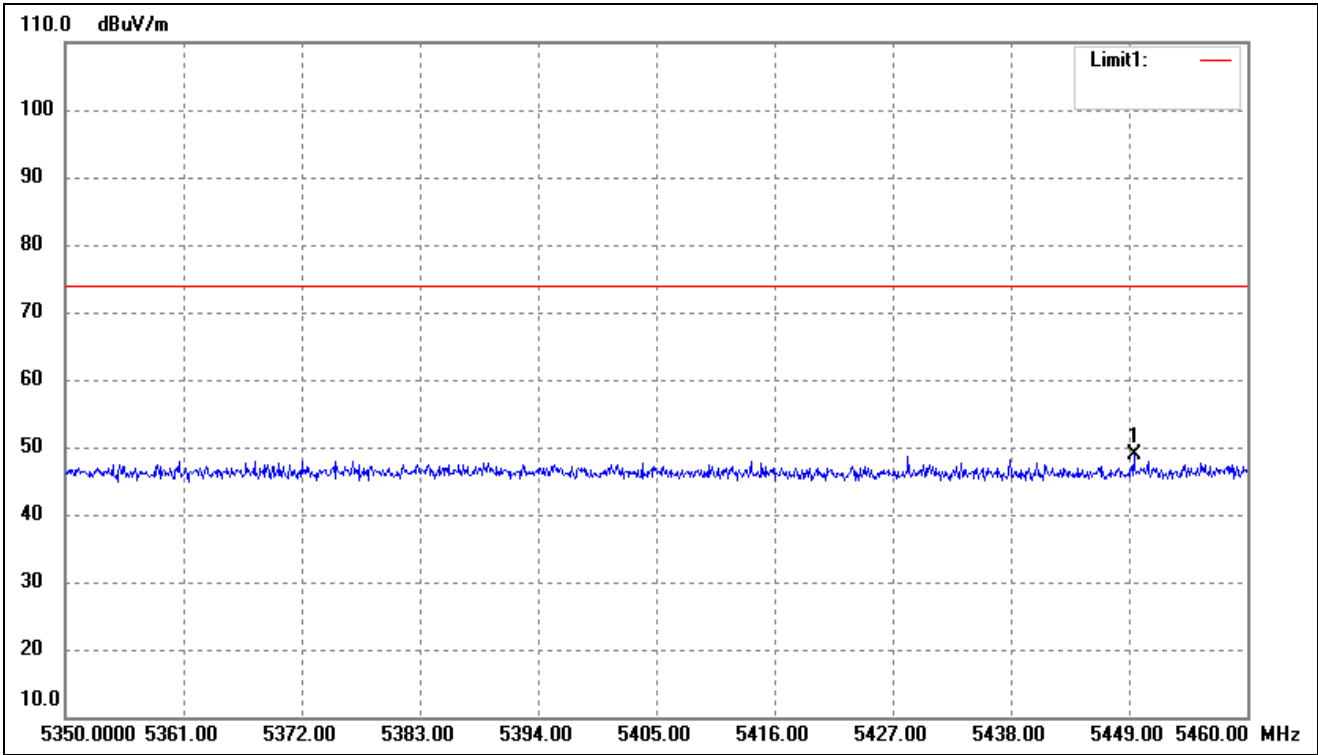


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5449.440	53.59	-4.78	48.81	74.00	-25.19	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

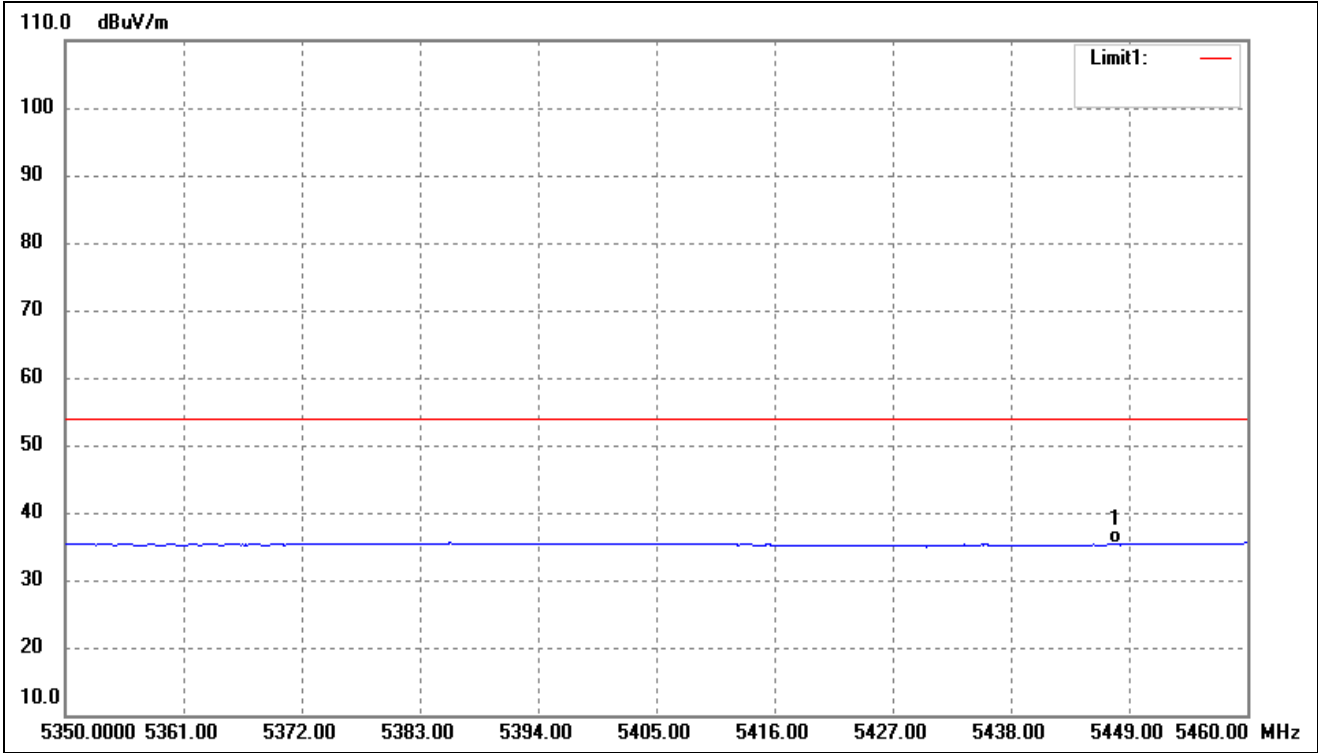


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5447.790	40.10	-4.78	35.32	54.00	-18.68	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

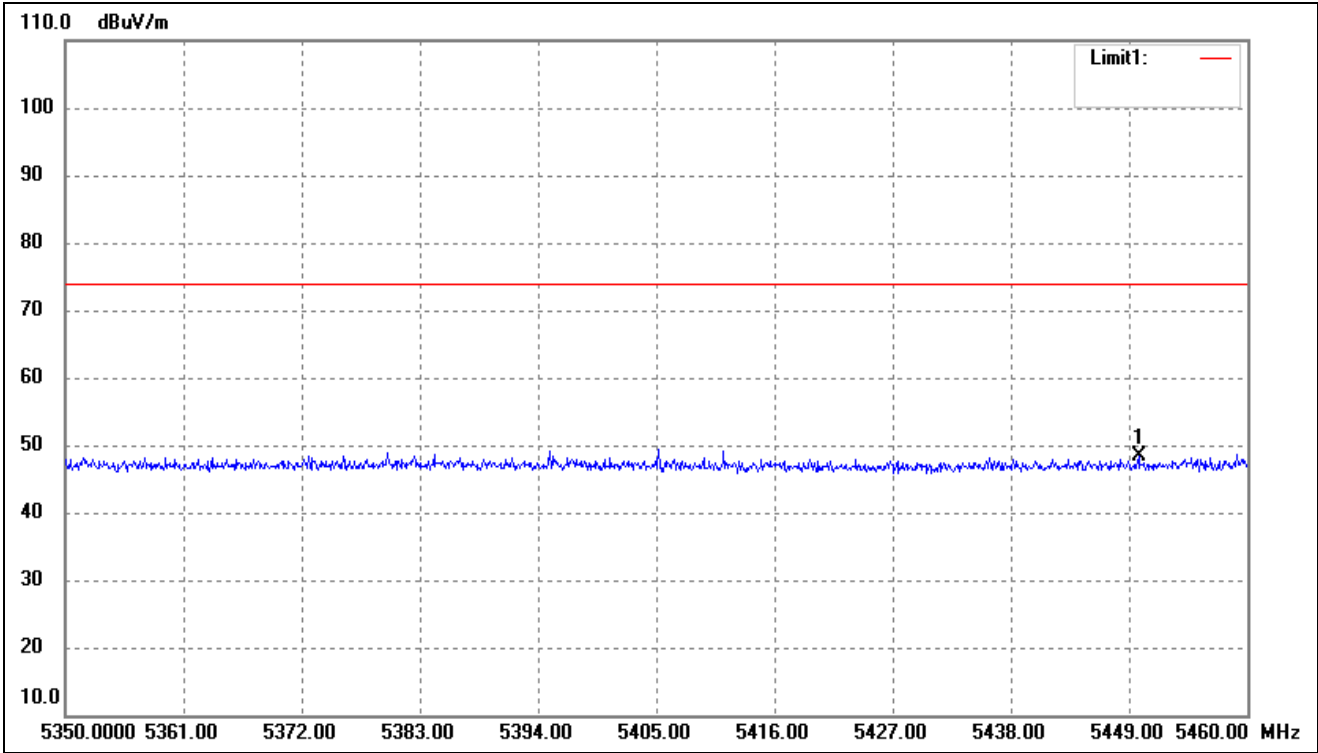


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5449.880	53.12	-4.78	48.34	74.00	-25.66	-	-	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

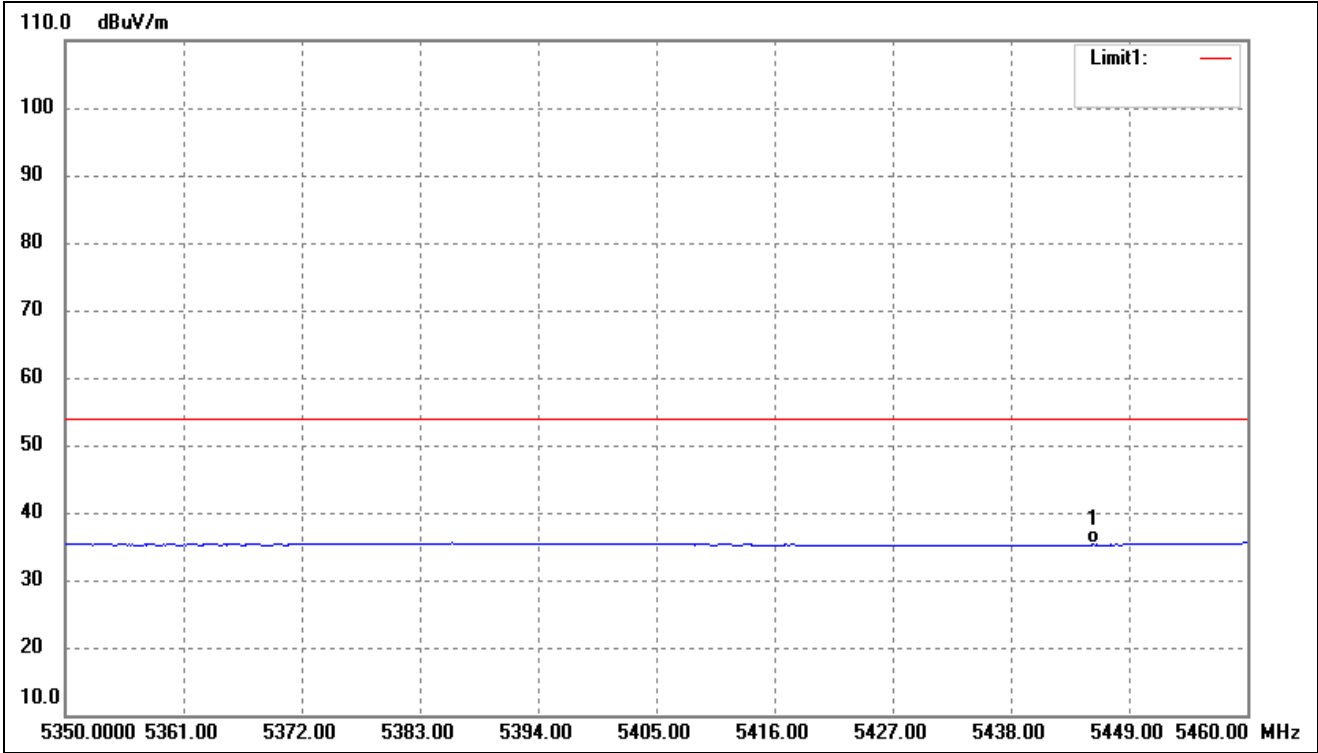


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5445.700	40.05	-4.79	35.26	54.00	-18.74	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

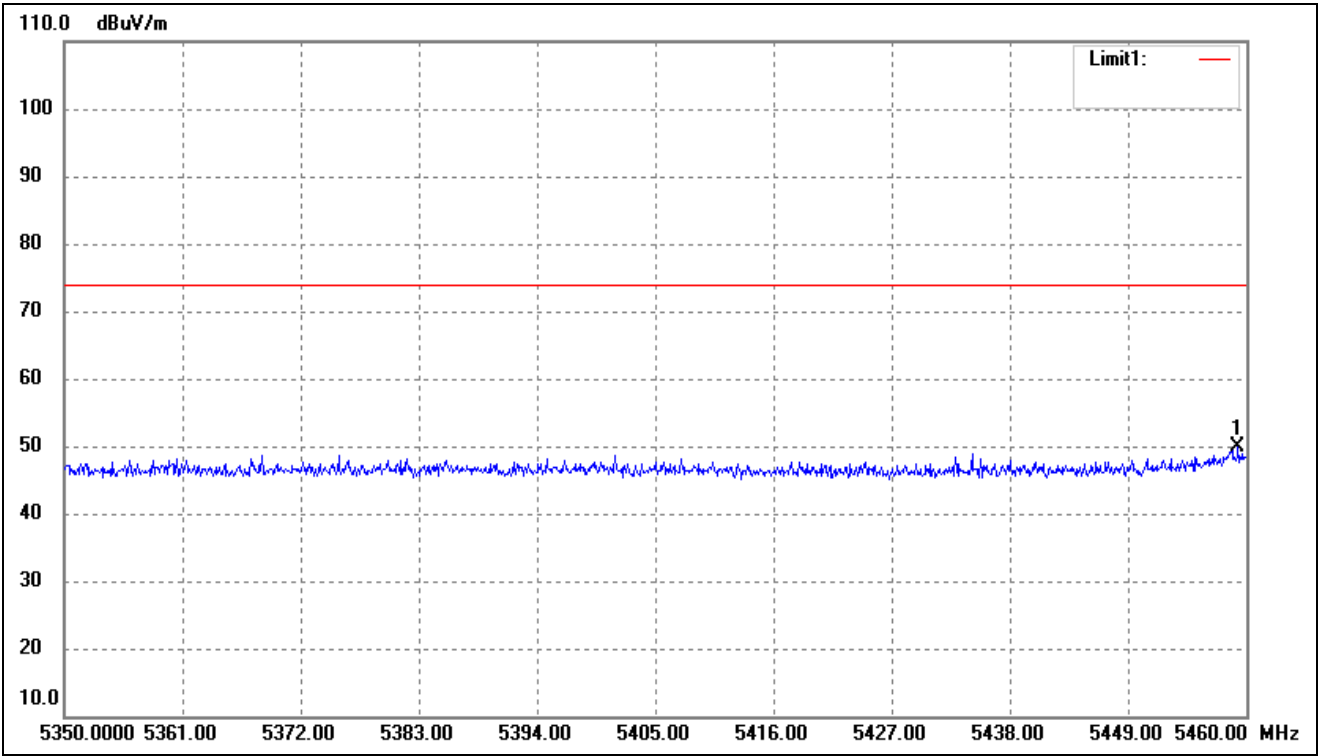

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5459.230	54.67	-4.77	49.90	74.00	-24.10	-	-	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

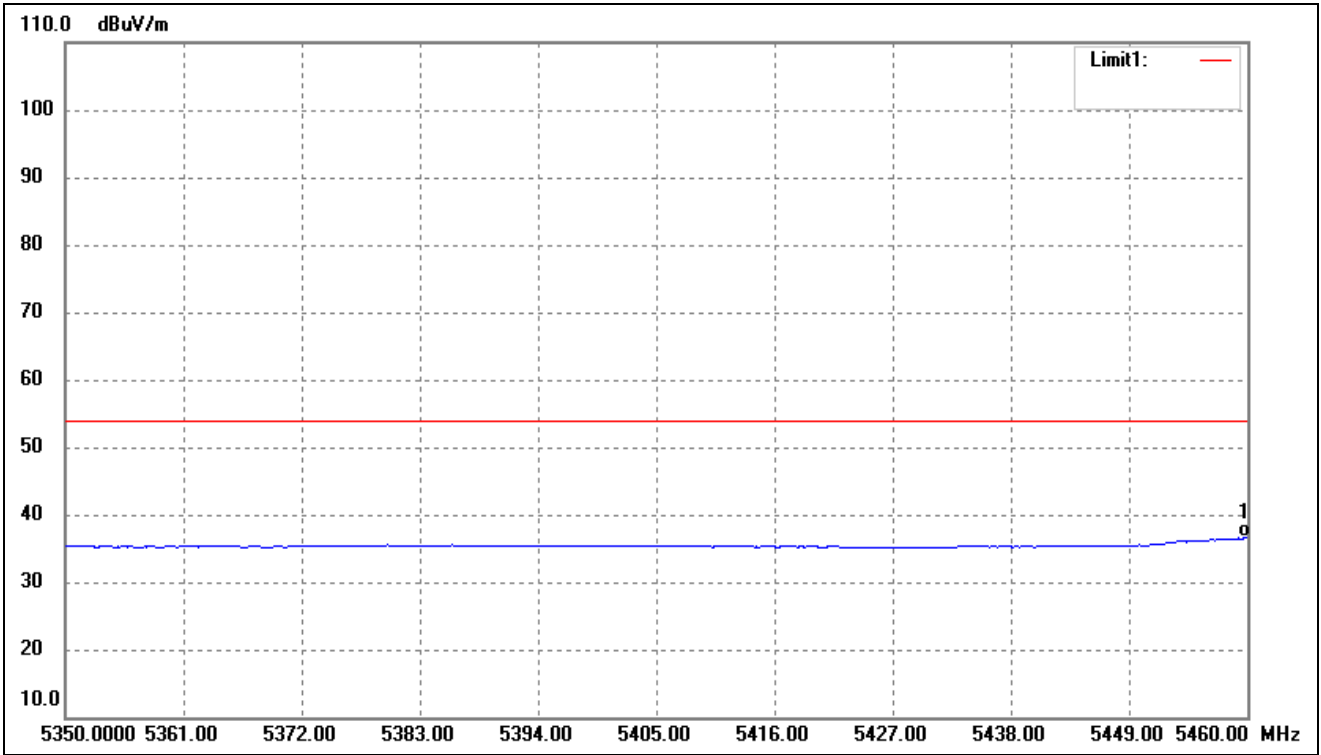

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5460.000	41.30	-4.77	36.53	54.00	-17.47	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: ‘-’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	54.01	7.11	61.12	74	-12.88	H	PK
15540	39.98	7.11	47.09	54	-6.91	H	AV
10360	54.83	7.11	61.94	74	-12.06	V	PK
15540	37.42	7.11	44.53	54	-9.47	V	AV
Middle Channel (5200MHz)							
10400	53.28	7.22	60.50	74	-13.50	H	PK
15600	37.17	7.22	44.39	54	-9.61	H	AV
10400	54.92	7.22	62.14	74	-11.86	V	PK
15600	38.93	7.22	46.15	54	-7.85	V	AV
High Channel (5240MHz)							
10480	56.17	7.69	63.86	74	-10.14	H	PK
15720	38.85	7.69	46.54	54	-7.46	H	AV
10480	54.44	7.69	62.13	74	-11.87	V	PK
15720	39.99	7.69	47.68	54	-6.32	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	55.30	7.96	63.26	74	-10.74	H	PK
15780	38.31	7.96	46.27	54	-7.73	H	AV
10520	54.18	7.96	62.14	74	-11.86	V	PK
15780	39.68	7.96	47.64	54	-6.36	V	AV
Middle Channel (5280MHz)							
10560	55.87	8.02	63.89	74	-10.11	H	PK
15840	37.28	8.02	45.30	54	-8.70	H	AV
10560	52.81	8.02	60.83	74	-13.17	V	PK
15840	38.64	8.02	46.66	54	-7.34	V	AV
High Channel (5320MHz)							
10640	53.06	8.35	61.41	74	-12.59	H	PK
15960	37.86	8.35	46.21	54	-7.79	H	AV
10640	54.54	8.35	62.89	74	-11.11	V	PK
15960	39.51	8.35	47.86	54	-6.14	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	54.32	8.82	63.14	74	-10.86	H	PK
16500	40.17	8.82	48.99	54	-5.01	H	AV
11000	55.89	8.82	64.71	74	-9.29	V	PK
16500	37.04	8.82	45.86	54	-8.14	V	AV
Middle Channel (5600MHz)							
11200	53.19	8.92	62.11	74	-11.89	H	PK
16800	38.40	8.92	47.32	54	-6.68	H	AV
11200	52.69	8.92	61.61	74	-12.39	V	PK
16800	40.79	8.92	49.71	54	-4.29	V	AV
High Channel (5700MHz)							
11400	53.96	9.36	63.32	74	-10.68	H	PK
17100	38.81	9.36	48.17	54	-5.83	H	AV
11400	55.24	9.36	64.60	74	-9.40	V	PK
17100	37.92	9.36	47.28	54	-6.72	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	53.00	9.45	62.45	74	-11.55	H	PK
17235	37.94	9.45	47.39	54	-6.61	H	AV
11490	53.17	9.45	62.62	74	-11.38	V	PK
17235	39.79	9.45	49.24	54	-4.76	V	AV
Middle Channel (5785MHz)							
11570	56.33	9.62	65.95	74	-8.05	H	PK
17355	38.59	9.62	48.21	54	-5.79	H	AV
11570	52.89	9.62	62.51	74	-11.49	V	PK
17355	37.53	9.62	47.15	54	-6.85	V	AV
High Channel (5825MHz)							
11650	53.14	9.84	62.98	74	-11.02	H	PK
17475	37.59	9.84	47.43	54	-6.57	H	AV
11650	52.70	9.84	62.54	74	-11.46	V	PK
17475	37.02	9.84	46.86	54	-7.14	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.41	-27
Highest	Above 5350	-41.02	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.25	-27
Highest	Above 5350	-37.14	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-36.58	-27
Highest	Above 5725	-39.41	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-42.25	-27
	5715 to 5725	-29.47	-17
Highest	5850 to 5860	-27.12	-17
	Above 5860	-40.05	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	55.19	7.11	62.30	74	-11.70	H	PK
10360	39.28	7.11	46.39	54	-7.61	H	AV
10360	55.05	7.11	62.16	74	-11.84	V	PK
10360	39.36	7.11	46.47	54	-7.53	V	AV
Middle Channel (5200MHz)							
10400	52.71	7.22	59.93	74	-14.07	H	PK
10400	39.76	7.22	46.98	54	-7.02	H	AV
10400	54.88	7.22	62.10	74	-11.90	V	PK
10400	37.45	7.22	44.67	54	-9.33	V	AV
High Channel (5240MHz)							
10480	54.50	7.69	62.19	74	-11.81	H	PK
10480	38.22	7.69	45.91	54	-8.09	H	AV
10480	55.94	7.69	63.63	74	-10.37	V	PK
10480	39.59	7.69	47.28	54	-6.72	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	53.49	7.96	61.45	74	-12.55	H	PK
10520	37.99	7.96	45.95	54	-8.05	H	AV
10520	53.86	7.96	61.82	74	-12.18	V	PK
10520	39.27	7.96	47.23	54	-6.77	V	AV
Middle Channel (5280MHz)							
10560	53.60	8.02	61.62	74	-12.38	H	PK
10560	38.81	8.02	46.83	54	-7.17	H	AV
10560	52.74	8.02	60.76	74	-13.24	V	PK
10560	40.50	8.02	48.52	54	-5.48	V	AV
High Channel (5320MHz)							
10640	52.91	8.35	61.26	74	-12.74	H	PK
10640	38.98	8.35	47.33	54	-6.67	H	AV
10640	52.23	8.35	60.58	74	-13.42	V	PK
10640	37.60	8.35	45.95	54	-8.05	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	54.29	8.82	63.11	74	-10.89	H	PK
11000	37.23	8.82	46.05	54	-7.95	H	AV
11000	54.07	8.82	62.89	74	-11.11	V	PK
11000	40.94	8.82	49.76	54	-4.24	V	AV
Middle Channel (5600MHz)							
11200	54.96	8.92	63.88	74	-10.12	H	PK
11200	39.55	8.92	48.47	54	-5.53	H	AV
11200	54.75	8.92	63.67	74	-10.33	V	PK
11200	40.12	8.92	49.04	54	-4.96	V	AV
High Channel (5700MHz)							
11400	54.49	9.84	64.33	74	-9.67	H	PK
11400	40.29	9.84	50.13	54	-3.87	H	AV
11400	54.36	9.84	64.20	74	-9.80	V	PK
11400	39.74	9.84	49.58	54	-4.42	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	52.69	9.45	62.14	74	-11.86	H	PK
11490	40.00	9.45	49.45	54	-4.55	H	AV
11490	52.81	9.45	62.26	74	-11.74	V	PK
11490	37.81	9.45	47.26	54	-6.74	V	AV
Middle Channel (5785MHz)							
11570	55.68	9.62	65.30	74	-8.70	H	PK
11570	40.13	9.62	49.75	54	-4.25	H	AV
11570	52.78	9.62	62.40	74	-11.60	V	PK
11570	37.89	9.62	47.51	54	-6.49	V	AV
High Channel (5825MHz)							
11650	53.00	9.84	62.84	74	-11.16	H	PK
11650	39.48	9.84	49.32	54	-4.68	H	AV
11650	53.47	9.84	63.31	74	-10.69	V	PK
11650	36.72	9.84	46.56	54	-7.44	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.12	-27
Highest	Above 5350	-41.08	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-42.02	-27
Highest	Above 5350	-39.41	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-41.05	-27
Highest	Above 5725	-34.12	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-36.25	-27
	5715 to 5725	-39.41	-17
Highest	5850 to 5860	-34.12	-17
	Above 5860	-41.08	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	55.34	7.89	63.23	74	-10.77	H	PK
10380	40.76	7.89	48.65	54	-5.35	H	AV
10380	55.78	7.89	63.67	74	-10.33	V	PK
10380	39.28	7.89	47.17	54	-6.83	V	AV
High Channel (5230MHz)							
10460	52.67	7.97	60.64	74	-13.36	H	PK
10460	37.55	7.97	45.52	54	-8.48	H	AV
10460	52.91	7.97	60.88	74	-13.12	V	PK
10460	38.27	7.97	46.24	54	-7.76	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5270MHz)							
10540	54.38	8.16	62.54	74	-11.46	H	PK
10540	40.11	8.16	48.27	54	-5.73	H	AV
10540	54.81	8.16	62.97	74	-11.03	V	PK
10540	40.02	8.16	48.18	54	-5.82	V	AV
High Channel (5310MHz)							
10620	53.10	8.57	61.67	74	-12.33	H	PK
10620	37.04	8.57	45.61	54	-8.39	H	AV
10620	54.06	8.57	62.63	74	-11.37	V	PK
10620	39.49	8.57	48.06	54	-5.94	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5510MHz)							
11020	52.89	9.16	62.05	74	-11.95	H	PK
11020	37.83	9.16	46.99	54	-7.01	H	AV
11020	52.46	9.16	61.62	74	-12.38	V	PK
11020	40.26	9.16	49.42	54	-4.58	V	AV
Middle Channel (5590MHz)							
11180	55.88	9.08	64.96	74	-9.04	H	PK
11180	40.67	9.08	49.75	54	-4.25	H	AV
11180	55.83	9.08	64.91	74	-9.09	V	PK
11180	38.26	9.08	47.34	54	-6.66	V	AV
High Channel (5670MHz)							
11340	54.17	9.43	63.60	74	-10.40	H	PK
11340	38.51	9.43	47.94	54	-6.06	H	AV
11340	52.31	9.43	61.74	74	-12.26	V	PK
11340	39.21	9.43	48.64	54	-5.36	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	55.16	9.45	64.61	74	-9.39	H	PK
11510	37.15	9.45	46.60	54	-7.40	H	AV
11510	55.77	9.45	65.22	74	-8.78	V	PK
11510	39.71	9.45	49.16	54	-4.84	V	AV
High Channel (5795MHz)							
11590	54.93	9.27	64.20	74	-9.80	H	PK
11590	36.59	9.27	45.86	54	-8.14	H	AV
11590	53.57	9.27	62.84	74	-11.16	V	PK
11590	37.26	9.27	46.53	54	-7.47	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.02	-27
Highest	Above 5350	-39.42	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-41.02	-27
Highest	Above 5350	-39.21	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-40.17	-27
Highest	Above 5725	-37.42	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-36.32	-27
	5715 to 5725	-31.28	-17
Highest	5850 to 5860	-30.54	-17
	Above 5860	-34.12	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to 40GHz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

10. Conducted Emissions

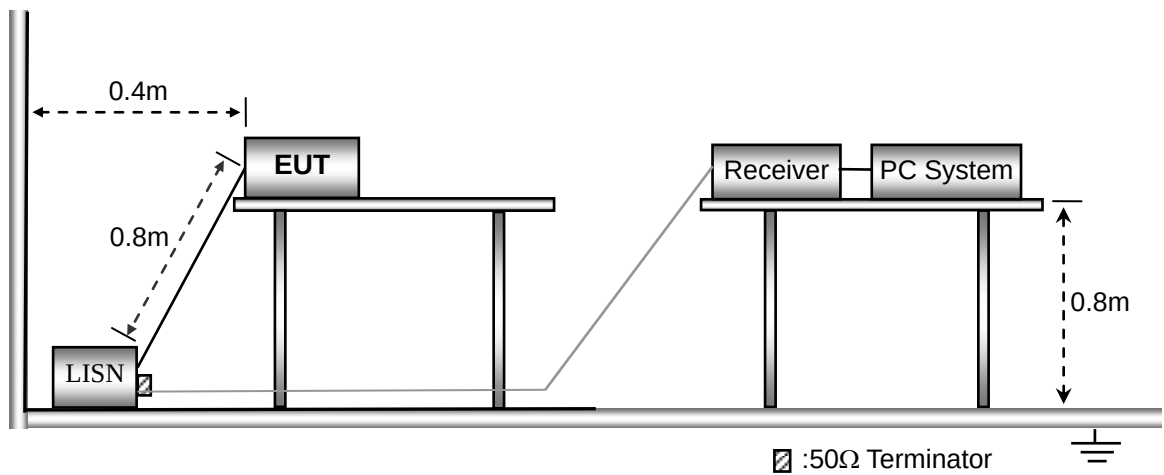
10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram




10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

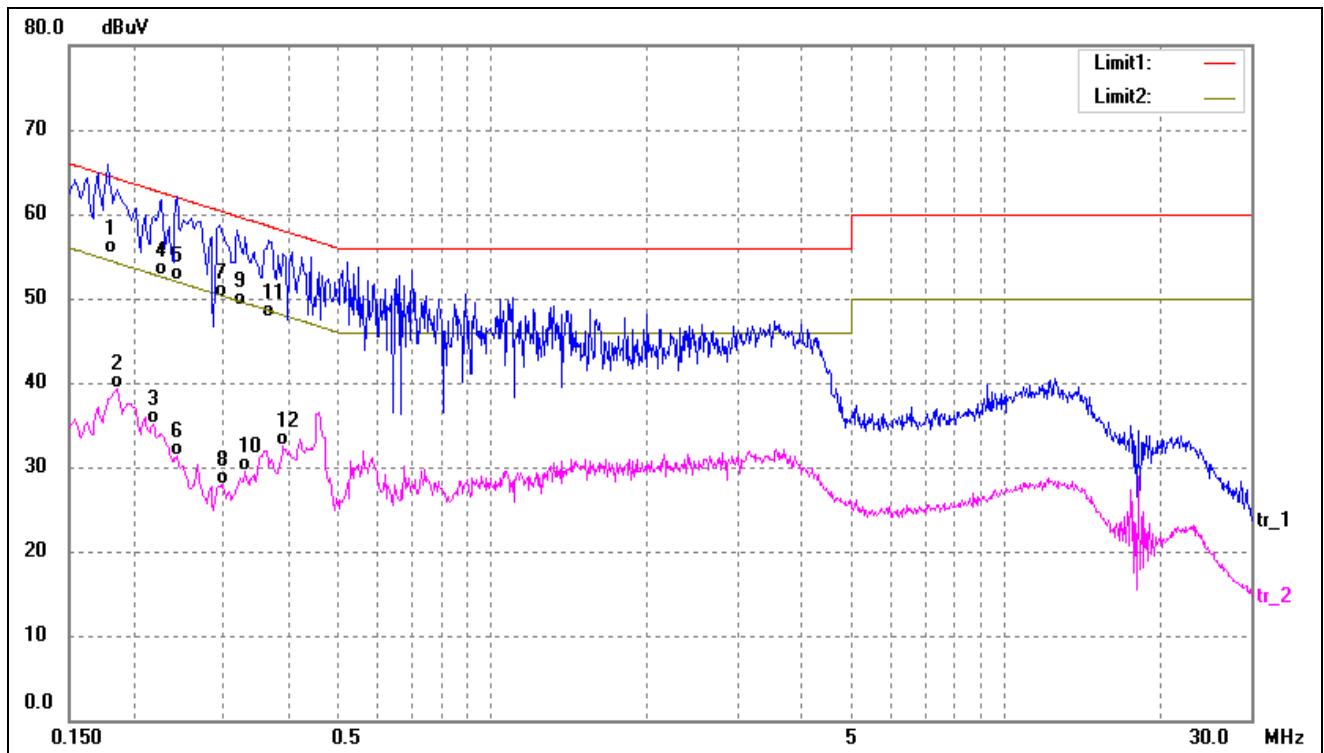

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1780	45.11	10.13	55.24	64.58	-9.34	QP
2	0.1860	29.27	10.10	39.37	54.21	-14.84	AVG
3	0.2180	25.04	10.05	35.09	52.89	-17.80	AVG
4	0.2260	42.70	10.05	52.75	62.60	-9.85	QP
5	0.2420	42.08	10.04	52.12	62.03	-9.91	QP
6	0.2420	21.21	10.04	31.25	52.03	-20.78	AVG
7	0.2940	40.03	10.01	50.04	60.41	-10.37	QP
8	0.2980	17.83	10.01	27.84	50.30	-22.46	AVG
9	0.3180	39.01	10.01	49.02	59.76	-10.74	QP
10	0.3300	19.40	10.01	29.41	49.45	-20.04	AVG
11	0.3660	37.61	10.01	47.62	58.59	-10.97	QP
12	0.3900	22.51	10.01	32.52	48.06	-15.54	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

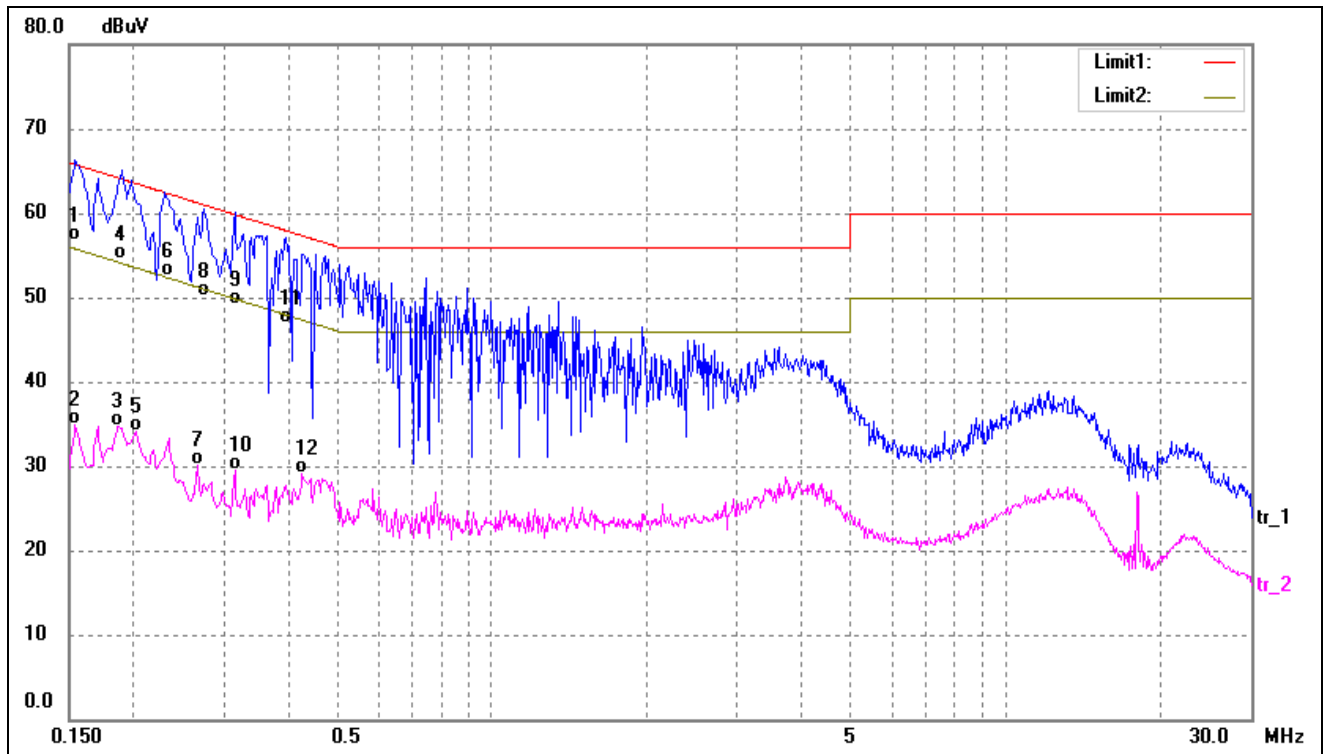

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1540	46.55	10.21	56.76	65.78	-9.02	QP
2	0.1540	24.76	10.21	34.97	55.78	-20.81	AVG
3	0.1860	24.63	10.10	34.73	54.21	-19.48	AVG
4	0.1900	44.48	10.09	54.57	64.04	-9.47	QP
5	0.2020	24.13	10.06	34.19	53.53	-19.34	AVG
6	0.2300	42.41	10.04	52.45	62.45	-10.00	QP
7	0.2660	20.01	10.03	30.04	51.24	-21.20	AVG
8	0.2740	40.14	10.02	50.16	61.00	-10.84	QP
9	0.3140	39.09	10.01	49.10	59.86	-10.76	QP
10	0.3140	19.50	10.01	29.51	49.86	-20.35	AVG
11	0.3940	36.97	10.01	46.98	57.98	-11.00	QP
12	0.4260	19.10	10.00	29.10	47.33	-18.23	AVG

APPENDIX SUMMARY

Project No.	WTX22X04074568W	Test Engineer	BAIdi
Start date	2022/5/19	Finish date	2022/7/1
Temperature	23.7℃	Humidity	58%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A




Power Spectral Density			
U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	3.80	11
	5200	3.64	11
	5240	3.95	11
802.11n-HT20	5180	3.65	11
	5200	4.13	11
	5240	3.91	11
802.11n-HT40	5190	-0.55	11
	5230	-0.65	11

U-NII-2A: 5250-5350MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5260	2.87	11
	5280	3.13	11
	5320	3.37	11
802.11n-HT20	5260	1.78	11
	5280	1.82	11
	5320	2.15	11
802.11n-HT40	5270	-2.73	11
	5310	-0.22	11



U-NII-2C: 5470-5725MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5500	3.42	11
	5580	1.46	11
	5700	0.71	11
802.11n-HT20	5500	2.13	11
	5600	1.17	11
	5700	-0.03	11
802.11n-HT40	5510	-1.44	11
	5550	-2.05	11
	5670	-2.70	11

U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	-2.60	2.22	0.38	30
	5785	-0.84	2.22	1.38	30
	5825	0.12	2.22	2.34	30
802.11n-HT20	5745	-3.68	2.22	-1.46	30
	5785	-2.47	2.22	-0.27	30
	5825	-1.78	2.22	0.44	30
802.11n HT40	5755	-7.32	2.22	-5.10	30
	5795	-5.78	2.22	-3.56	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

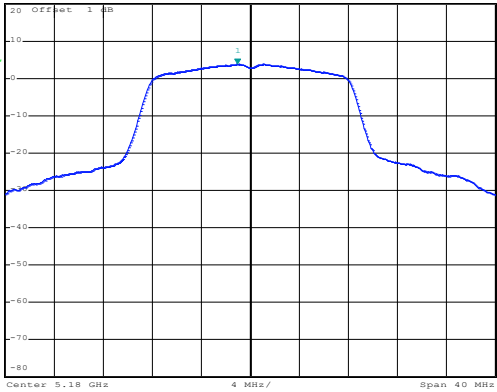
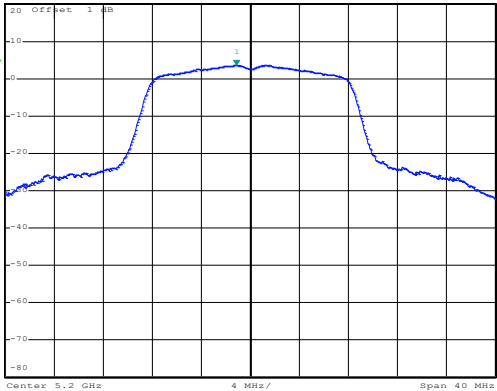
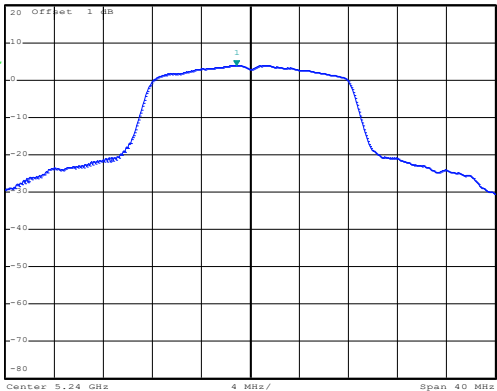
5150-5250MHz




802.11a-Low	 Date: 19.MAY.2022 10:37:12
802.11a-Middle	 Date: 19.MAY.2022 10:37:56
802.11a-High	 Date: 19.MAY.2022 10:38:37



802.11n-HT20-Low	Date: 19.MAY.2022 10:41:27
802.11n-HT20-Middle	Date: 19.MAY.2022 10:42:14
802.11n-HT20-High	Date: 19.MAY.2022 10:43:02

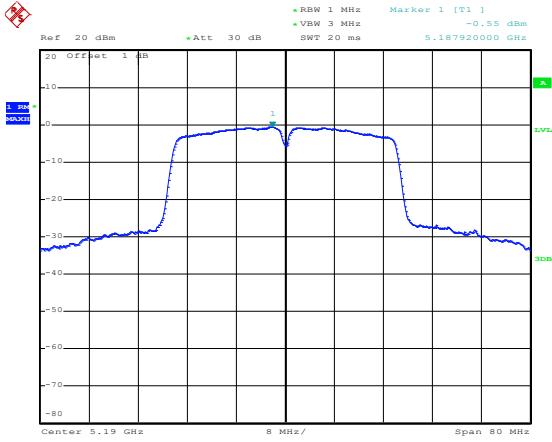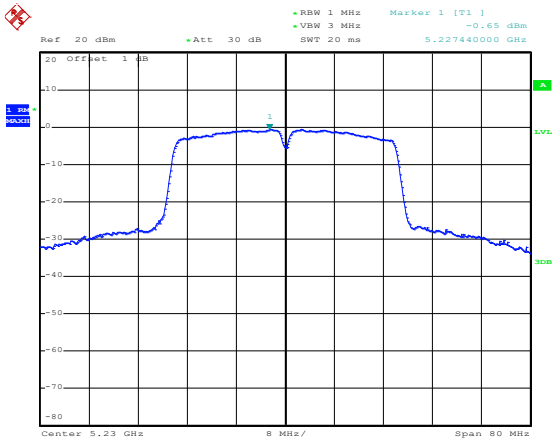802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -0.55 dBm VBW 3 MHz SWT 20 ms 5.187920000 GHz 20 Offset 1 dB Center 5.19 GHz 8 MHz/ Span 80 MHz Date: 19.MAY.2022 10:43:40
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] -0.65 dBm VBW 3 MHz SWT 20 ms 5.227440000 GHz 20 Offset 1 dB Center 5.23 GHz 8 MHz/ Span 80 MHz Date: 19.MAY.2022 10:46:16

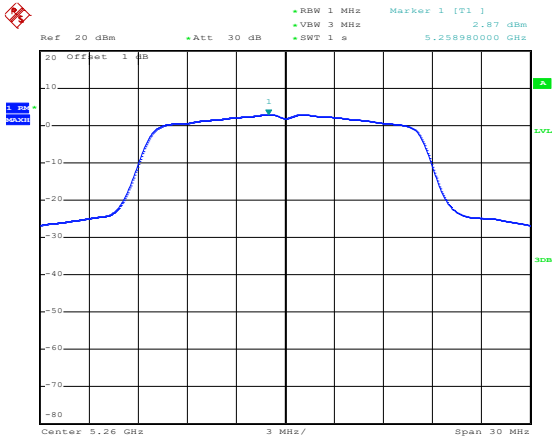
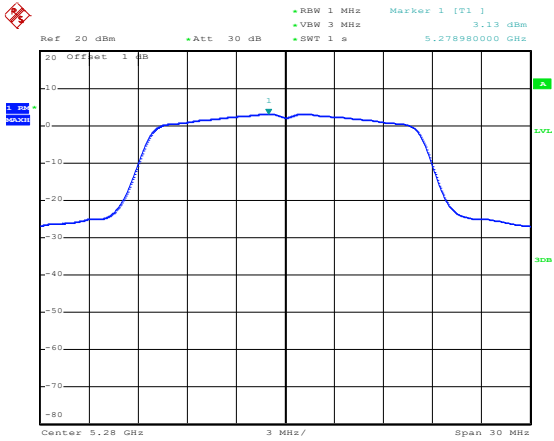
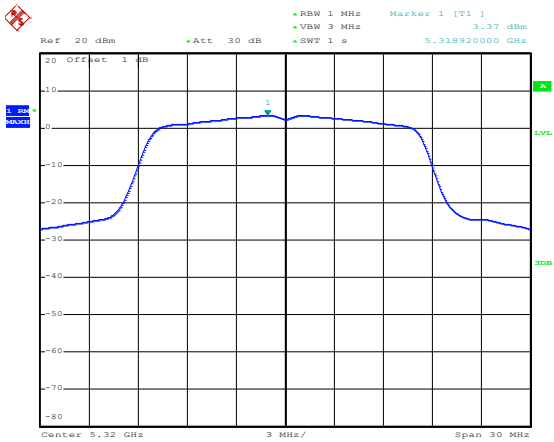
5250-5350MHz




802.11a-Low	 Date: 19.MAY.2022 12:48:04
802.11a-Middle	 Date: 19.MAY.2022 12:48:29
802.11a-High	 Date: 19.MAY.2022 12:48:45

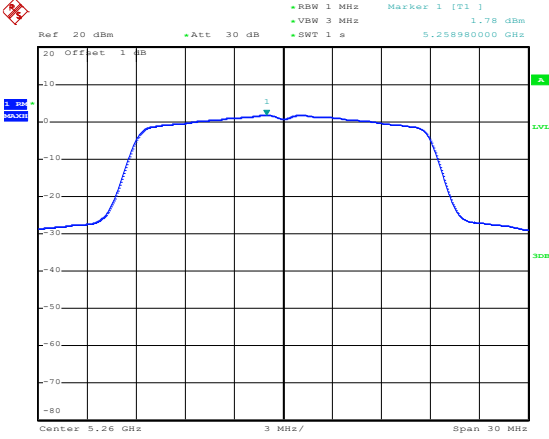
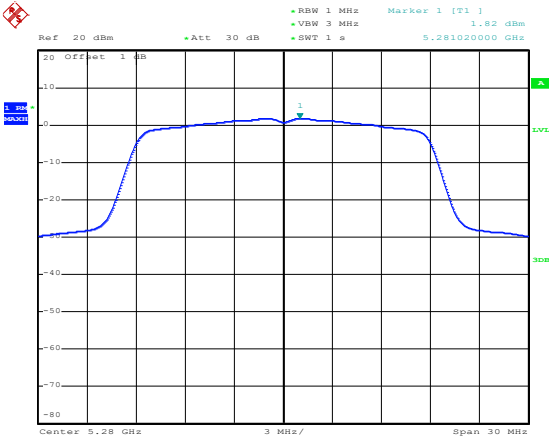
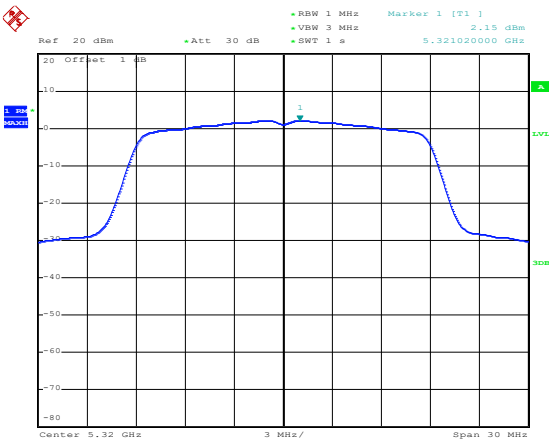
802.11n-HT20-Low	 Date: 19.MAY.2022 12:44:38
802.11n-HT20-Middle	 Date: 19.MAY.2022 12:45:04
802.11n-HT20-High	 Date: 19.MAY.2022 12:45:33

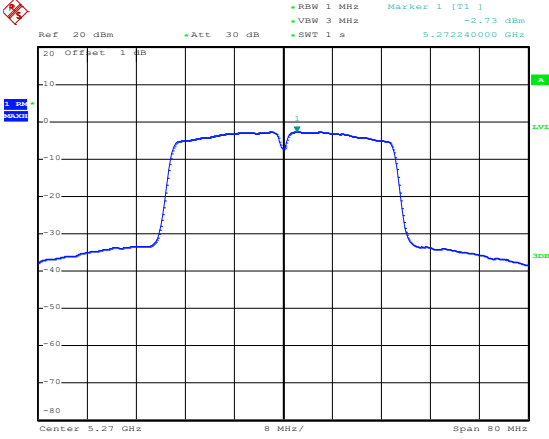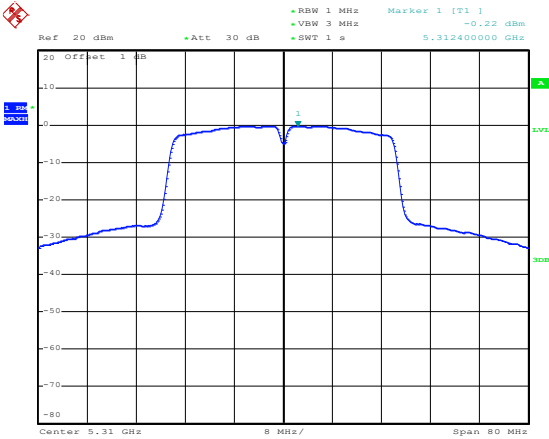802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB +RBW 1 MHz Marker 1 [T1] -2.73 dBm +VBW 3 MHz +SWT 1 s 5.272240000 GHz Center 5.27 GHz 8 MHz/ Span 80 MHz Date: 19.MAY.2022 12:46:31
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB +RBW 1 MHz Marker 1 [T1] -0.22 dBm +VBW 3 MHz +SWT 1 s 5.312400000 GHz Center 5.31 GHz 8 MHz/ Span 80 MHz Date: 19.MAY.2022 12:47:20

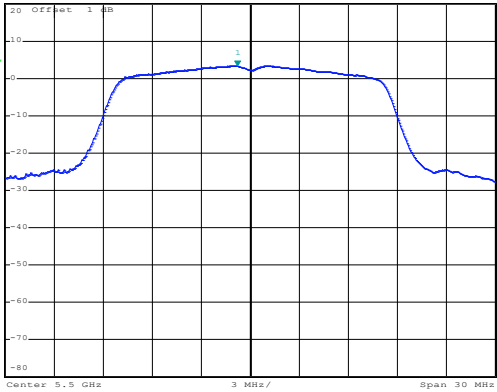
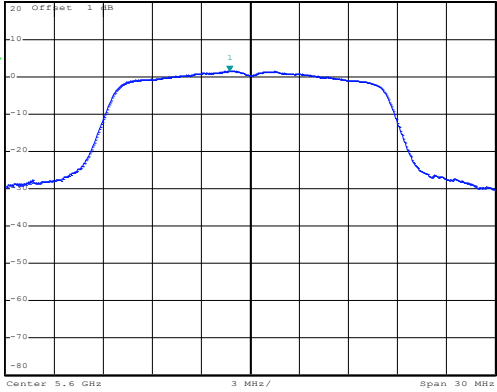
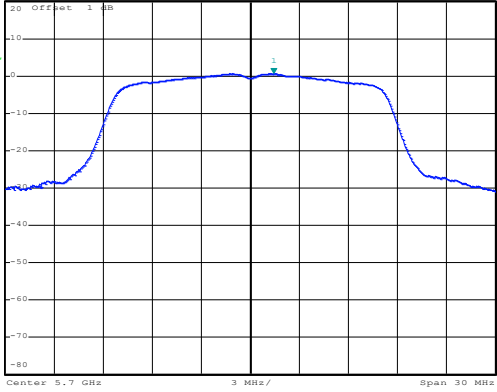
5470-5725MHz




802.11a-Low	 Date: 19.MAY.2022 15:38:12
802.11a-Middle	 Date: 19.MAY.2022 15:38:58
802.11a-High	 Date: 19.MAY.2022 15:39:25

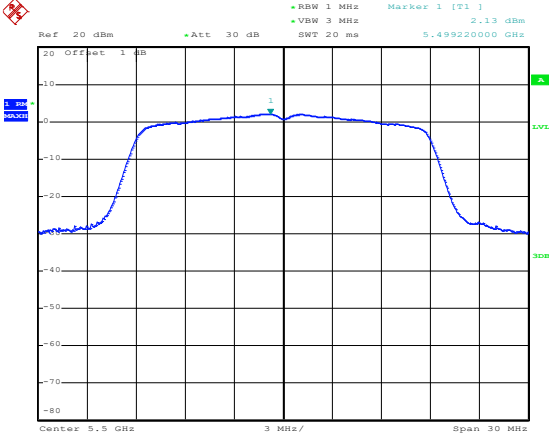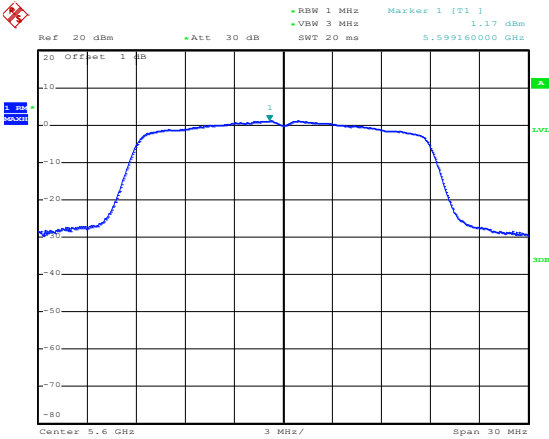
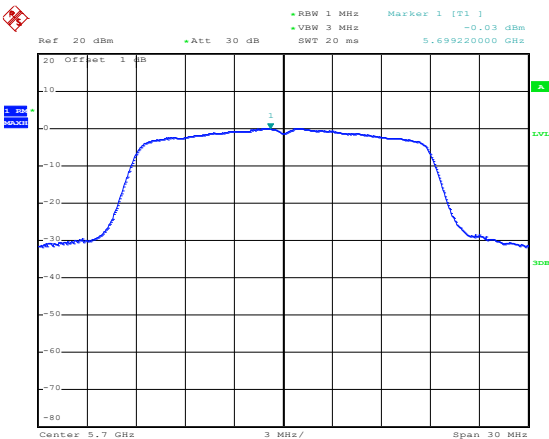
802.11n-HT20-Low	 Date: 19.MAY.2022 15:44:45
802.11n-HT20-Middle	 Date: 19.MAY.2022 15:42:45
802.11n-HT20-High	 Date: 19.MAY.2022 15:43:18

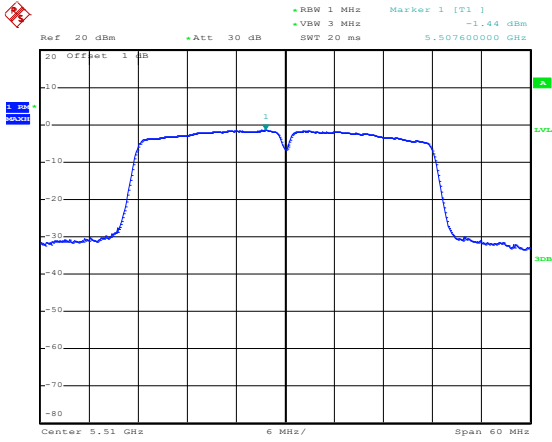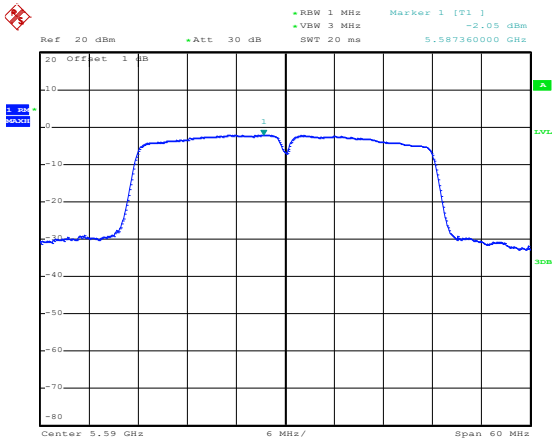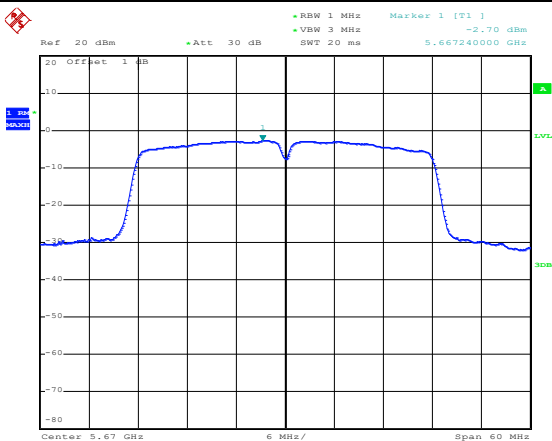802.11n-HT40-Low	 Date: 19.MAY.2022 15:45:17
802.11n-HT40- Middle	 Date: 19.MAY.2022 15:45:34
802.11n-HT40-High	 Date: 19.MAY.2022 15:47:33

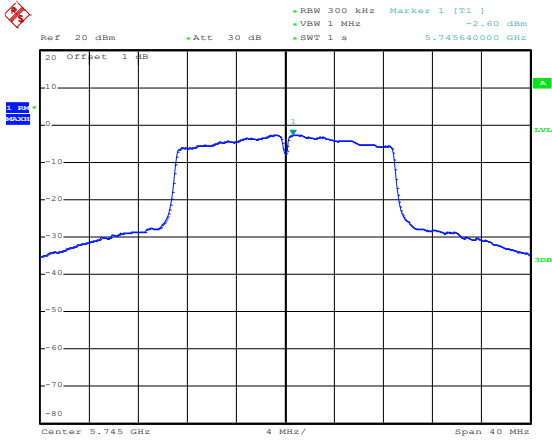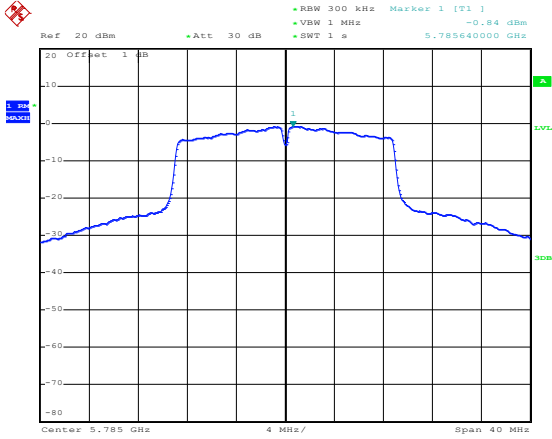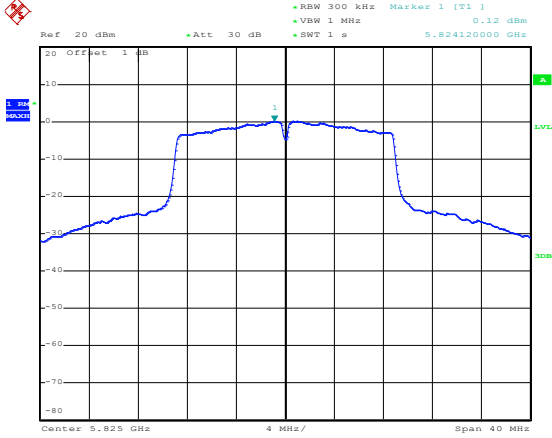5725-5850MHz

802.11a-Low	 Date: 19.MAY.2022 11:29:39
802.11a-Middle	 Date: 19.MAY.2022 11:30:05
802.11a-High	 Date: 19.MAY.2022 11:31:07

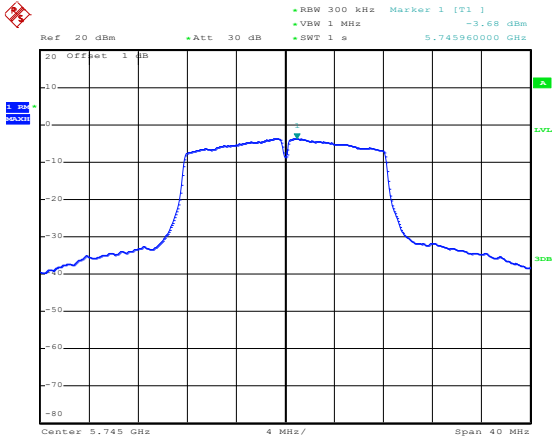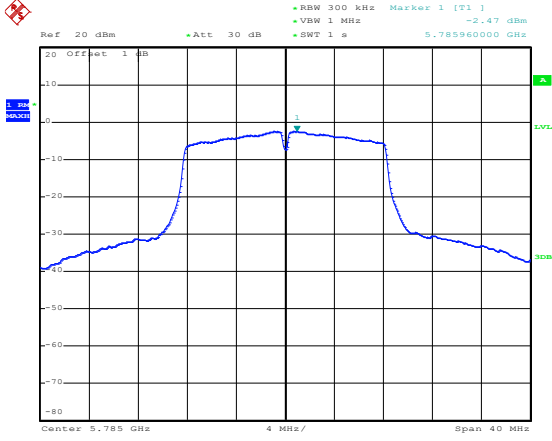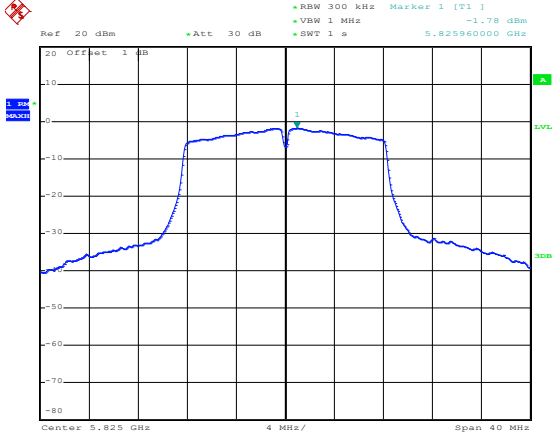802.11n-HT20-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 1 s, Marker 1 [T1]: -3.68 dBm, 5.745960000 GHz Center: 5.745 GHz, 4 MHz/, Span: 40 MHz Date: 19.MAY.2022 11:33:12
802.11n-HT20-Middle	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 1 s, Marker 1 [T1]: -2.47 dBm, 5.785960000 GHz Center: 5.785 GHz, 4 MHz/, Span: 40 MHz Date: 19.MAY.2022 11:33:32
802.11n-HT20-High	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 1 s, Marker 1 [T1]: -1.78 dBm, 5.825960000 GHz Center: 5.825 GHz, 4 MHz/, Span: 40 MHz Date: 19.MAY.2022 11:33:51

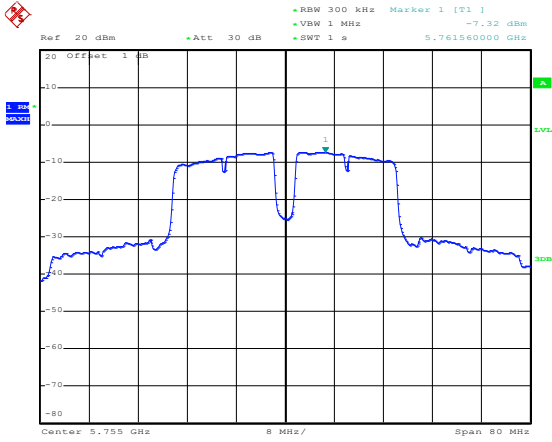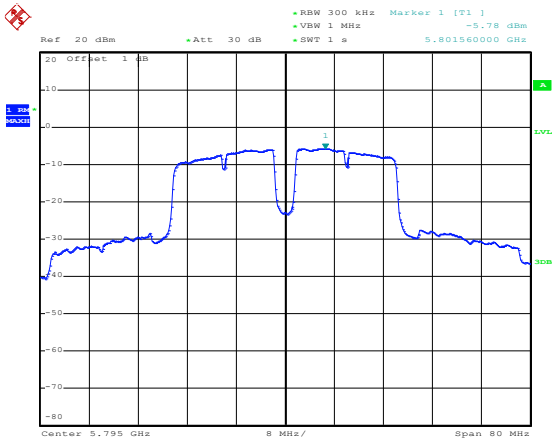802.11n-HT40-Low	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] -7.32 dBm •VBW 1 MHz •SWT 1 s 5.761560000 GHz 20 Offset 1 dB Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 19.MAY.2022 11:34:32
802.11n-HT40-High	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] -5.78 dBm •VBW 1 MHz •SWT 1 s 5.801560000 GHz 20 Offset 1 dB Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 19.MAY.2022 11:34:50

APPENDIX B

Emission Bandwidth and Occupied Bandwidth




U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	24.32	18.08	Pass
	5200	22.72	18.00	Pass
	5240	28.88	17.52	Pass
802.11n-HT20	5180	22.72	17.60	Pass
	5200	23.60	18.16	Pass
	5240	24.16	18.08	Pass
802.11n-HT40	5190	40.48	36.32	Pass
	5230	40.00	36.32	Pass




U-NII-2A: 5250-5350MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5260	20.88	17.84	Pass
	5280	20.04	17.84	Pass
	5320	21.00	17.84	Pass
802.11n-HT20	5260	20.40	17.36	Pass
	5280	20.16	17.36	Pass
	5320	20.16	17.36	Pass
802.11n-HT40	5270	41.76	36.80	Pass
	5310	41.76	37.60	Pass



U-NII-2C: 5470-5725MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5500	19.92	16.98	Pass
	5600	20.28	16.98	Pass
	5700	20.16	17.16	Pass
802.11n-HT20	5500	20.52	17.76	Pass
	5600	20.28	17.76	Pass
	5700	20.52	17.82	Pass
802.11n-HT40	5510	41.76	36.48	Pass
	5550	41.28	36.48	Pass
	5670	41.52	36.60	Pass

U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.48	20.48	≥500
	5785	16.48	19.68	≥500
	5825	16.48	18.00	≥500
802.11n-HT20	5745	17.52	18.08	≥500
	5785	17.76	18.08	≥500
	5825	17.76	17.84	≥500
802.11n-HT40	5755	36.32	36.96	≥500
	5795	36.32	37.12	≥500

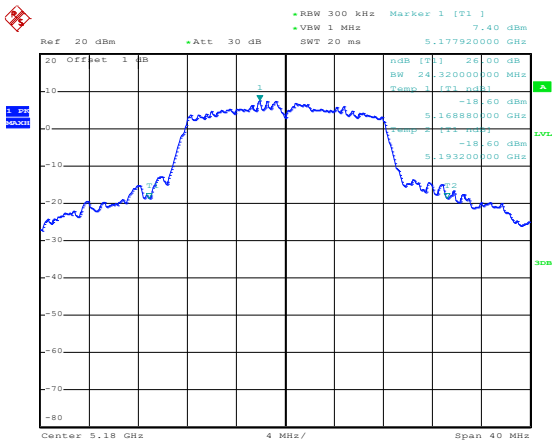
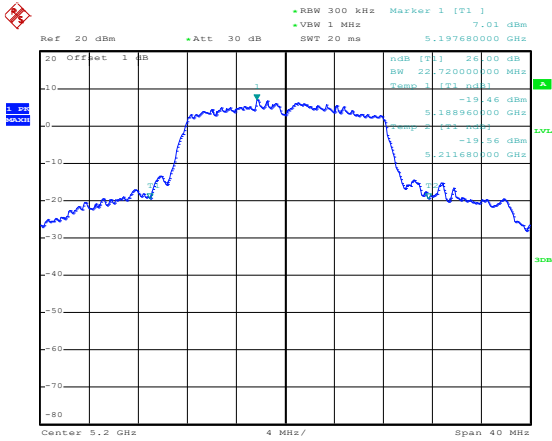
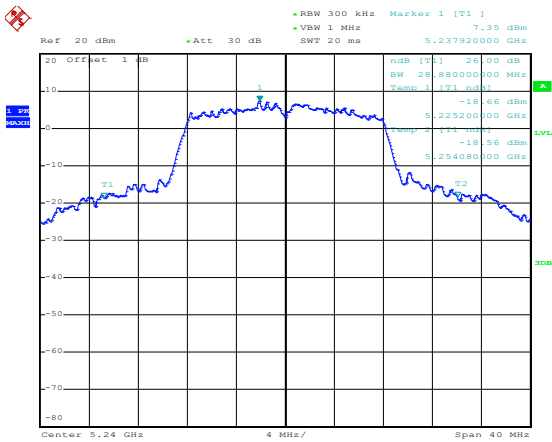
5150-5250MHz
26dB Bandwidth




802.11a-Low	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 7.40 dBm •VBW 1 MHz SWT 20 ms 5.177920000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 24.320000000 MHz Temp 1 [T1] n dB -18.60 dBm 5.168880000 GHz -18.60 dBm 5.193200000 GHz Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 10:57:16
802.11a-Middle	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 7.01 dBm •VBW 1 MHz SWT 20 ms 5.197680000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 22.720000000 MHz Temp 1 [T1] n dB -19.46 dBm 5.188960000 GHz -19.56 dBm 5.211680000 GHz Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 11:01:04
802.11a-High	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 7.35 dBm •VBW 1 MHz SWT 20 ms 5.237920000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 28.880000000 MHz Temp 1 [T1] n dB -18.56 dBm 5.225200000 GHz -18.56 dBm 5.254080000 GHz Center 5.24 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 11:02:25

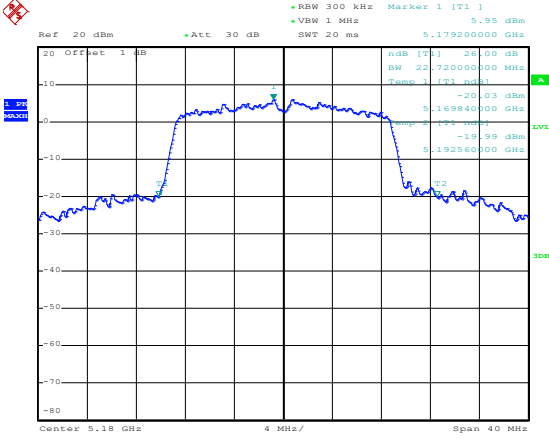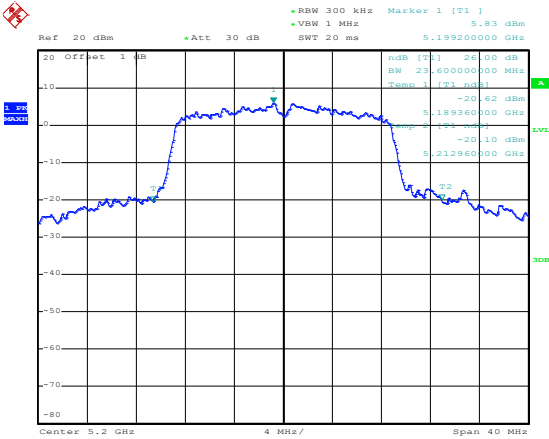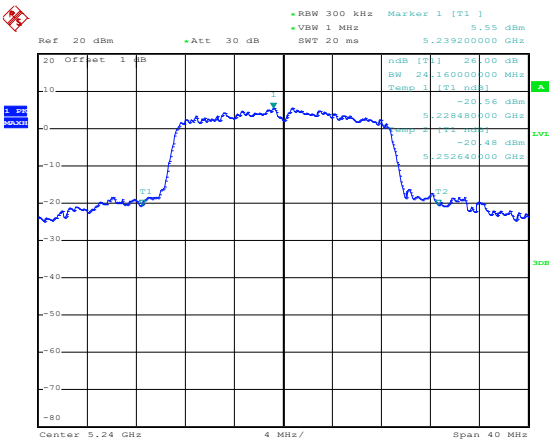802.11n-HT20-Low	 Date: 19.MAY.2022 11:04:07
802.11n-HT20-Middle	 Date: 19.MAY.2022 11:04:33
802.11n-HT20-High	 Date: 19.MAY.2022 11:04:56

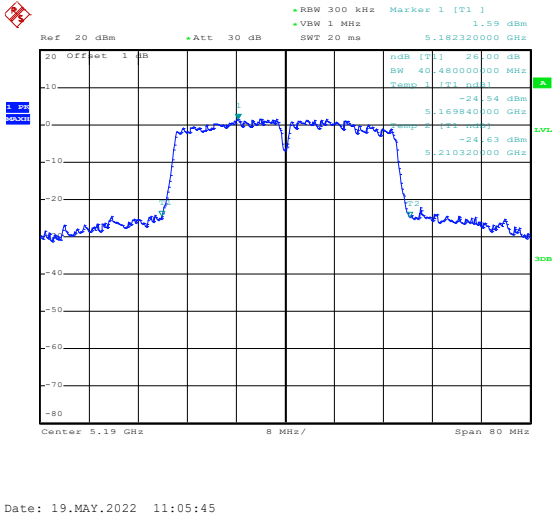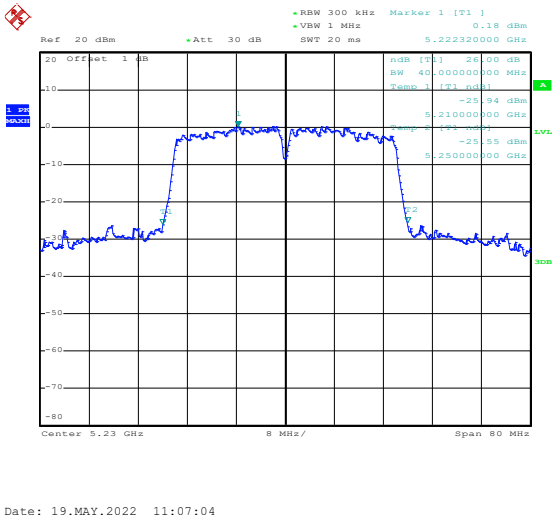
802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 1.59 dBm VSW 1 MHz SWT 20 ms 5.182320000 GHz 20 Offset 1 dB dBm [T1] 24.00 dB BW 40.00000000 MHz Temp 1 [T1] dBm -24.54 dBm 5.169840000 GHz -24.63 dBm 5.210320000 GHz Center 5.19 GHz 8 MHz/ Span 80 MHz Date: 19.MAY.2022 11:05:45
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 0.18 dBm VSW 1 MHz SWT 20 ms 5.222320000 GHz 20 Offset 1 dB dBm [T1] 24.00 dB BW 40.00000000 MHz Temp 1 [T1] dBm -25.94 dBm 5.210000000 GHz -25.95 dBm 5.250000000 GHz Center 5.23 GHz 8 MHz/ Span 80 MHz Date: 19.MAY.2022 11:07:04

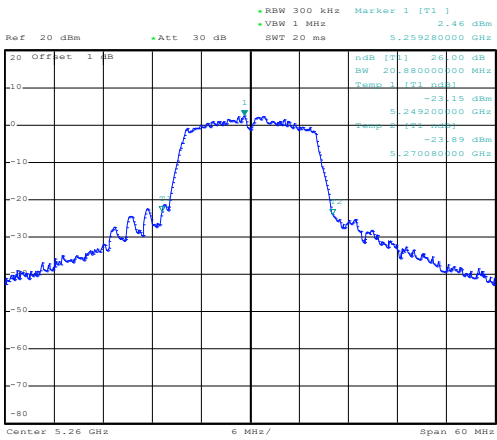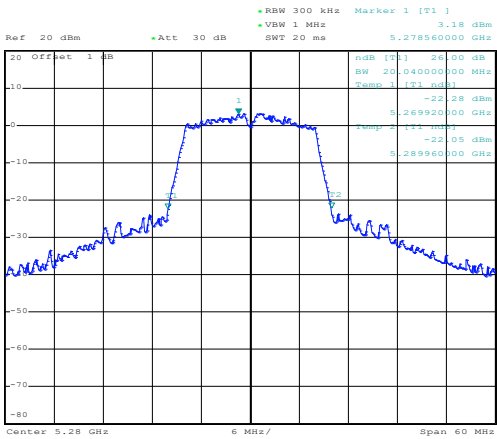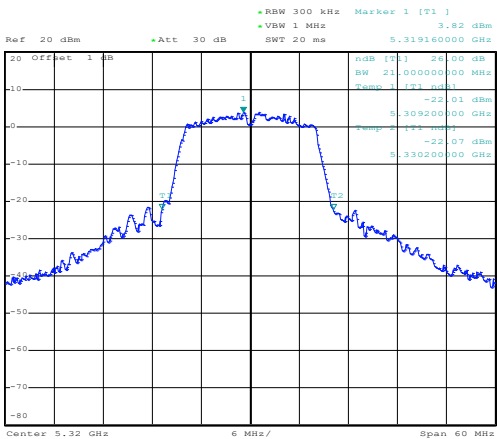5250-5350MHz
26dB Bandwidth


802.11a-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 2.46 dBm VBW 1 MHz SWT 20 ms 5.25928000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 20.00000000 MHz Temp 1 [T1] n dB -23.15 dBm 5.249200000 GHz -23.89 dBm 5.270080000 GHz Center 5.26 GHz 6 MHz/ Span 60 MHz Date: 19.MAY.2022 14:59:45
802.11a-Middle	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 3.18 dBm VBW 1 MHz SWT 20 ms 5.27856000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 20.04000000 MHz Temp 1 [T1] n dB -22.28 dBm 5.269920000 GHz -22.05 dBm 5.289960000 GHz Center 5.28 GHz 6 MHz/ Span 60 MHz Date: 19.MAY.2022 15:00:05
802.11a-High	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 3.82 dBm VBW 1 MHz SWT 20 ms 5.31916000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 21.00000000 MHz Temp 1 [T1] n dB -22.01 dBm 5.309200000 GHz -22.07 dBm 5.330200000 GHz Center 5.32 GHz 6 MHz/ Span 60 MHz Date: 19.MAY.2022 15:00:28

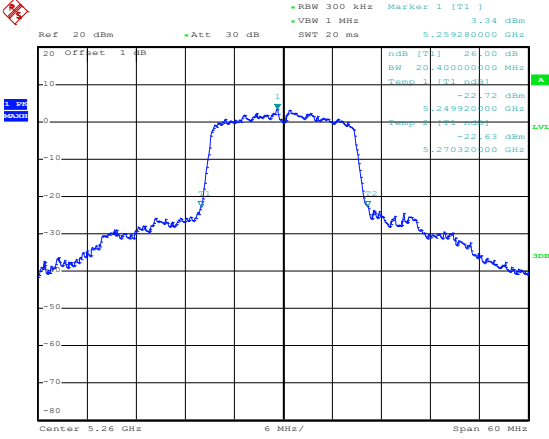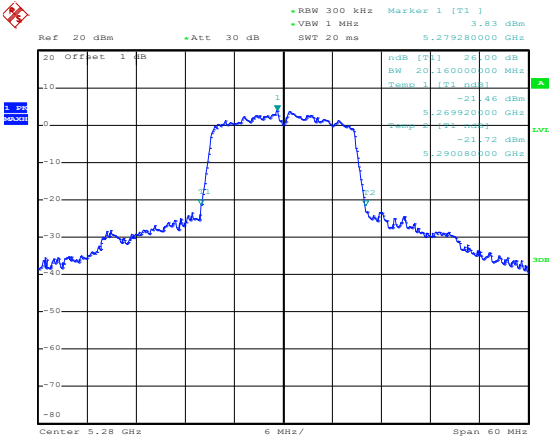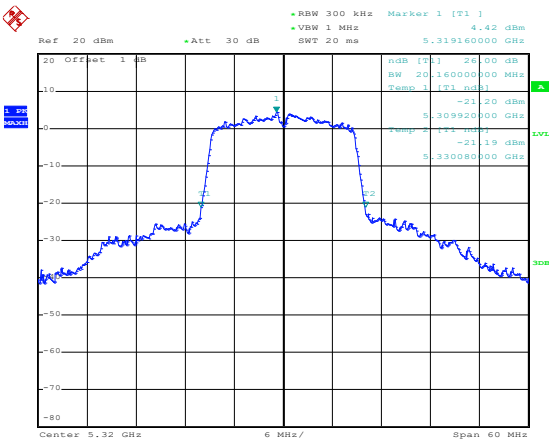802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 3.34 dBm VBW 1 MHz SWT 20 ms 5.259280000 GHz Center 5.26 GHz 6 MHz/ Span 60 MHz Date: 19.MAY.2022 15:01:17
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 3.83 dBm VBW 1 MHz SWT 20 ms 5.279280000 GHz Center 5.28 GHz 6 MHz/ Span 60 MHz Date: 19.MAY.2022 15:01:36
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 4.42 dBm VBW 1 MHz SWT 20 ms 5.319160000 GHz Center 5.32 GHz 6 MHz/ Span 60 MHz Date: 19.MAY.2022 15:03:51



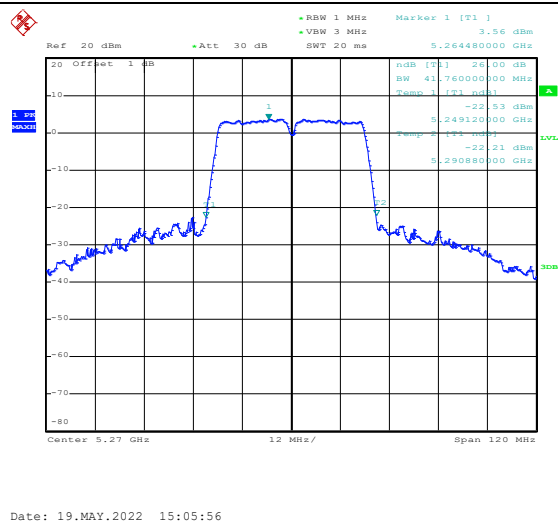
802.11n-HT40-Low








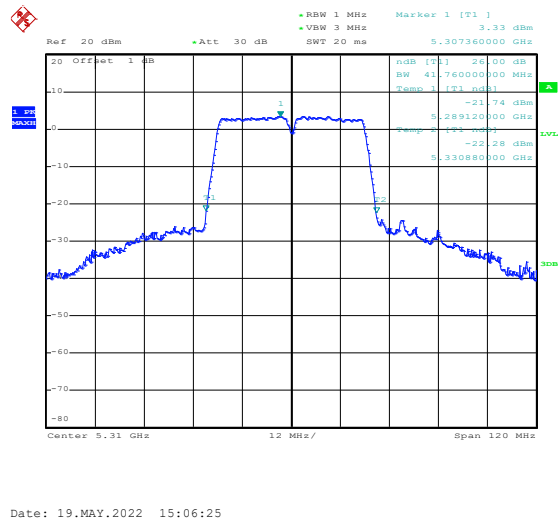
802.11n-HT40-High






5470-5725MHz
26dB Bandwidth

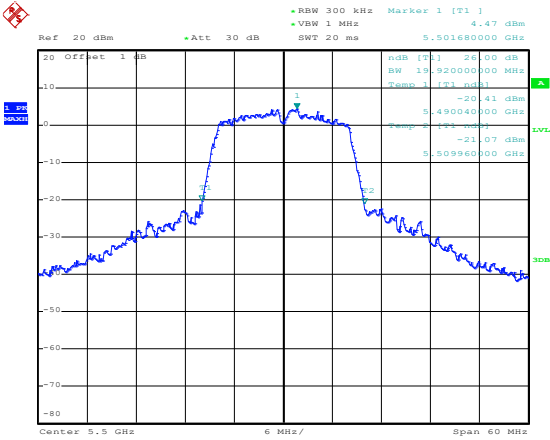
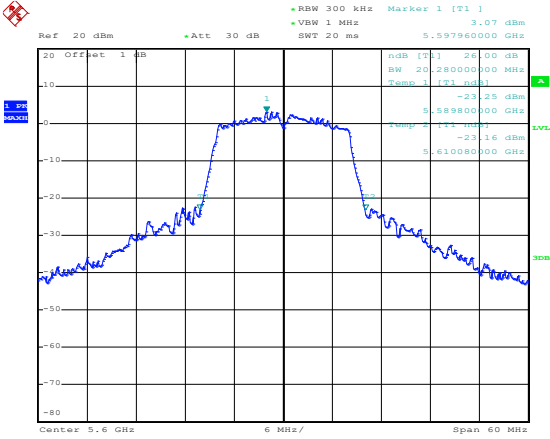
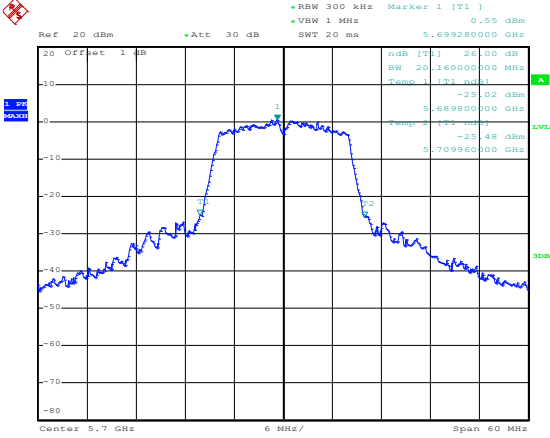
802.11a-Low	 Date: 19.MAY.2022 15:56:18
802.11a-Middle	 Date: 19.MAY.2022 15:56:46
802.11a-High	 Date: 19.MAY.2022 15:57:33

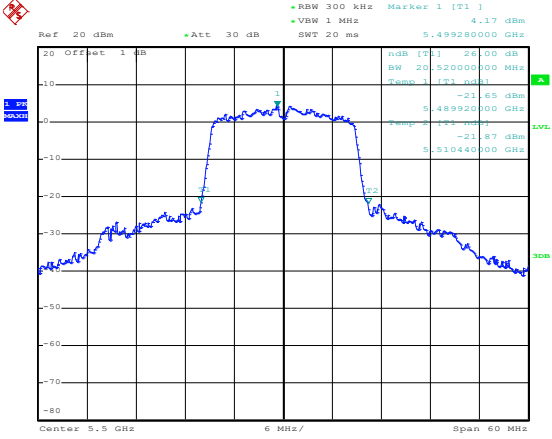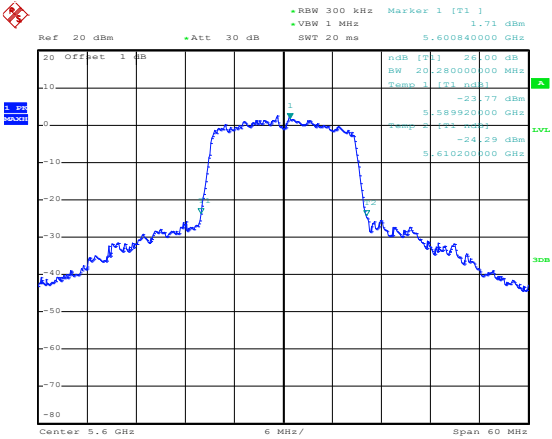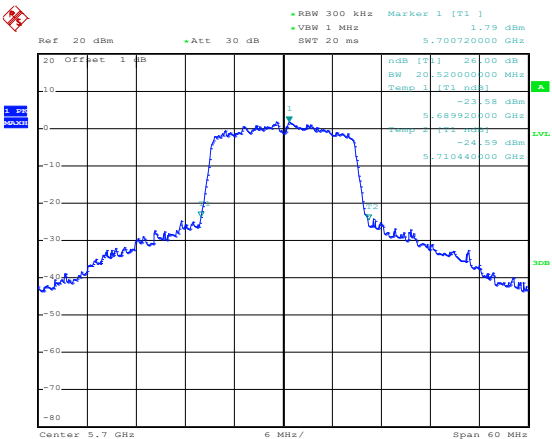802.11n-HT20-Low	 Ref: 20 dBm •Att: 30 dB •RBW 300 kHz Marker 1 [T1] 4.17 dBm •VBW 1 MHz •SWT 20 ms 5.499280000 GHz 20 Offset 1 dB nBW [T1] -21.65 dBm BW 20.520000000 MHz Temp 1 [T1] nBW 5.489920000 GHz -21.87 dBm 5.510440000 GHz Center 5.5 GHz 6 MHz/ Span 60 MHz Date: 19.MAY.2022 15:58:34
802.11n-HT20-Middle	 Ref: 20 dBm •Att: 30 dB •RBW 300 kHz Marker 1 [T1] 1.71 dBm •VBW 1 MHz •SWT 20 ms 5.600840000 GHz 20 Offset 1 dB nBW [T1] -23.77 dBm BW 20.520000000 MHz Temp 1 [T1] nBW 5.589920000 GHz -24.29 dBm 5.610200000 GHz Center 5.6 GHz 6 MHz/ Span 60 MHz Date: 19.MAY.2022 15:59:12
802.11n-HT20-High	 Ref: 20 dBm •Att: 30 dB •RBW 300 kHz Marker 1 [T1] 1.79 dBm •VBW 1 MHz •SWT 20 ms 5.700720000 GHz 20 Offset 1 dB nBW [T1] -23.58 dBm BW 20.520000000 MHz Temp 1 [T1] nBW 5.689920000 GHz -24.59 dBm 5.710440000 GHz Center 5.7 GHz 6 MHz/ Span 60 MHz Date: 19.MAY.2022 15:59:35

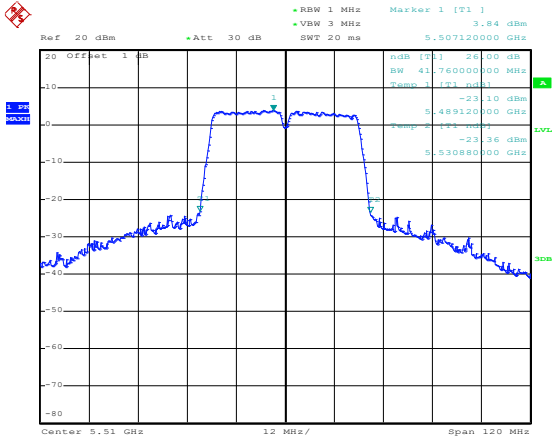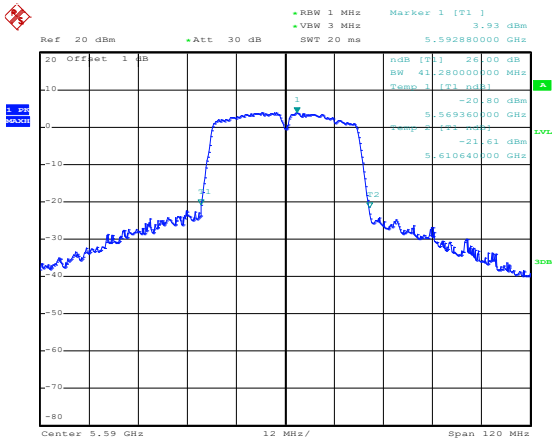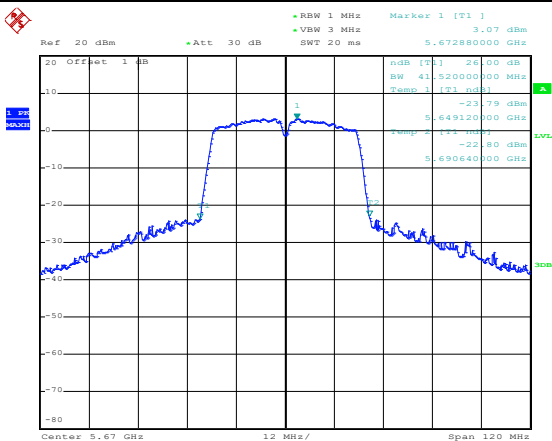
802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 3.84 dBm VBW 3 MHz BW 41.76000000 MHz SWT 20 ms 5.507120000 GHz 1 -23.10 dBm 5.489120000 GHz -23.36 dBm 5.508800000 GHz Center 5.51 GHz 12 MHz/ Span 120 MHz Date: 19.MAY.2022 16:01:42
802.11n-HT40- Middle	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 3.93 dBm VBW 3 MHz BW 41.28000000 MHz SWT 20 ms 5.592880000 GHz 1 -20.80 dBm 5.569360000 GHz -21.61 dBm 5.610640000 GHz Center 5.59 GHz 12 MHz/ Span 120 MHz Date: 19.MAY.2022 16:02:01
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 3.07 dBm VBW 3 MHz BW 41.52000000 MHz SWT 20 ms 5.672880000 GHz 1 -23.79 dBm 5.649120000 GHz -23.80 dBm 5.690640000 GHz Center 5.67 GHz 12 MHz/ Span 120 MHz Date: 19.MAY.2022 16:02:21

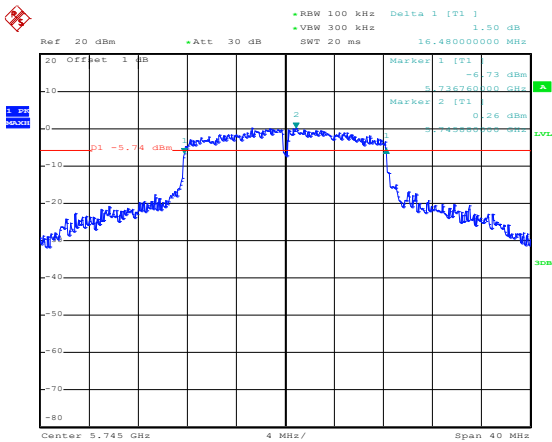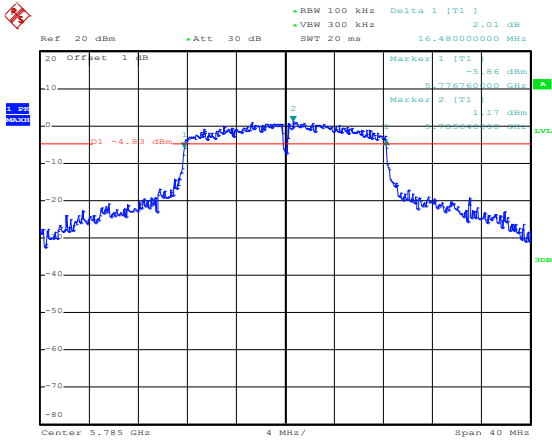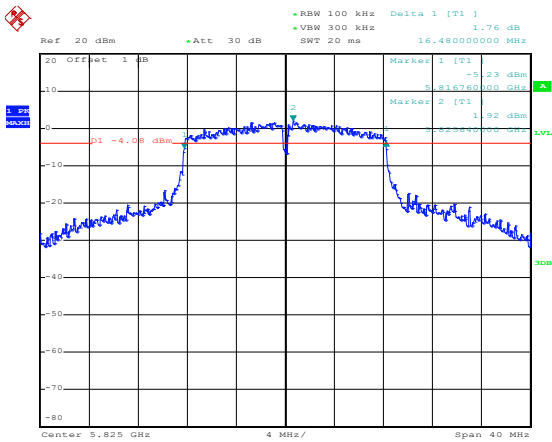5725-5850MHz
6dB Bandwidth


802.11a-Low	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 1.50 dB •VBW 300 kHz SWT 20 ms 16.48000000 MHz Marker 1 [T1] -5.73 dBm Marker 2 [T1] 0.26 dBm D1 -5.74 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 11:46:11
802.11a-Middle	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 2.01 dB •VBW 300 kHz SWT 20 ms 16.48000000 MHz Marker 1 [T1] -5.86 dBm Marker 2 [T1] 1.17 dBm D1 -4.83 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 11:47:02
802.11a-High	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 1.76 dB •VBW 300 kHz SWT 20 ms 16.48000000 MHz Marker 1 [T1] -5.23 dBm Marker 2 [T1] 1.92 dBm D1 -4.08 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 11:48:01

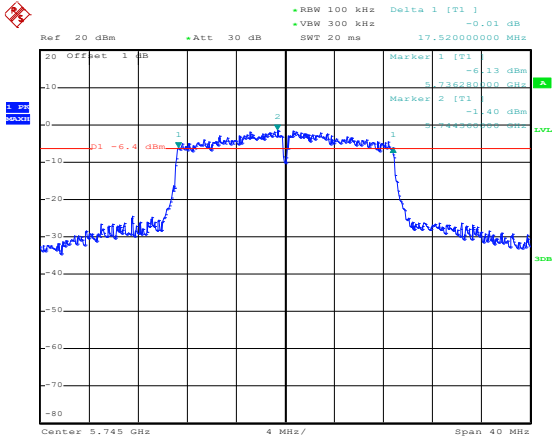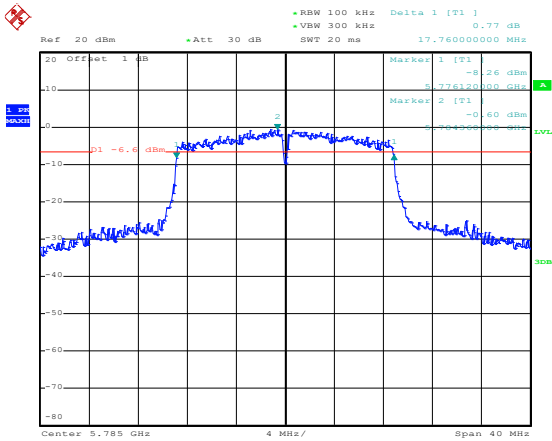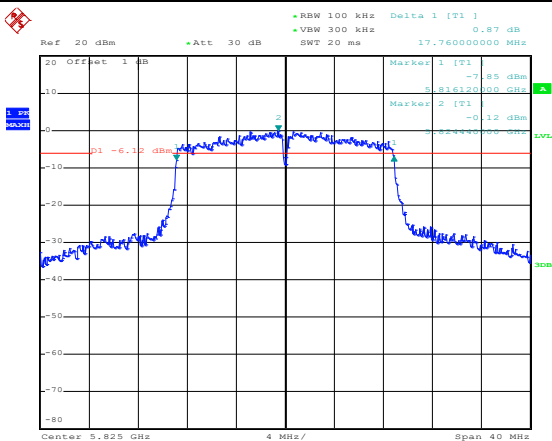802.11n-HT20-Low	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] -0.01 dB VSW 300 kHz SWT 20 ms 17.520000000 MHz Marker 1 [T1] -6.13 dBm 5.736250000 GHz Marker 2 [T1] -1.40 dBm 5.743750000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 11:48:53
802.11n-HT20-Middle	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 0.77 dB VSW 300 kHz SWT 20 ms 17.760000000 MHz Marker 1 [T1] -8.26 dBm 5.776120000 GHz Marker 2 [T1] -0.60 dBm 5.783880000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 11:49:35
802.11n-HT20-High	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 0.87 dB VSW 300 kHz SWT 20 ms 17.840000000 MHz Marker 1 [T1] -7.85 dBm 5.816120000 GHz Marker 2 [T1] -0.12 dBm 5.823880000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 11:50:10



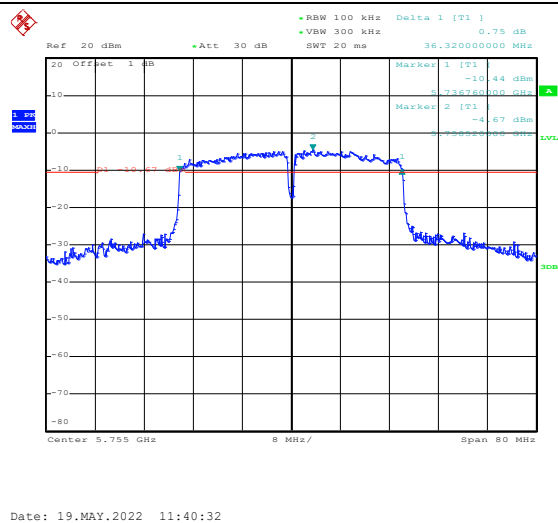
802.11n-HT40-Low




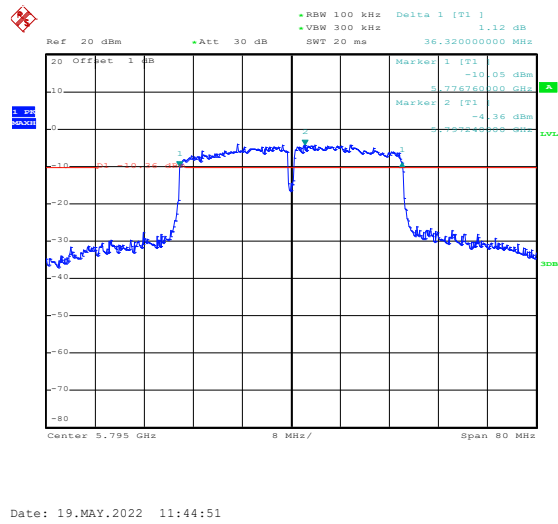
802.11n-HT40-High




5150-5250MHz
99% Bandwidth

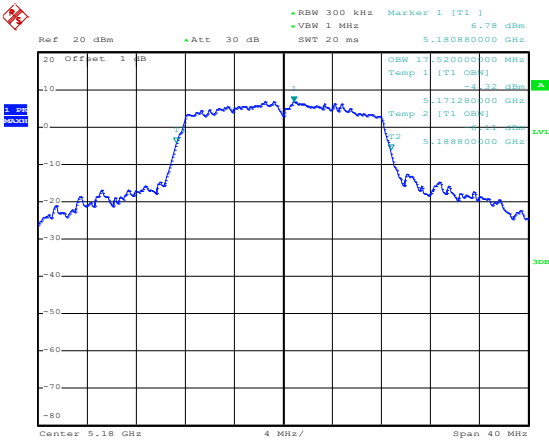
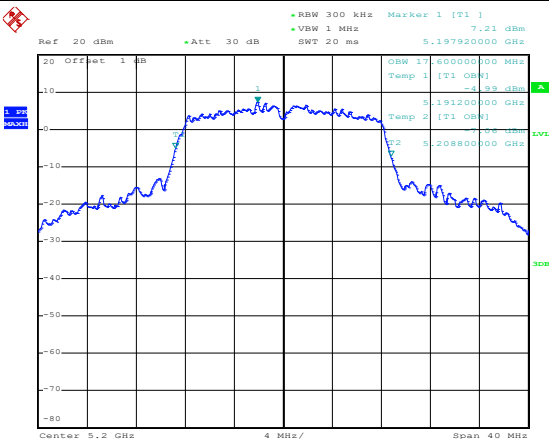
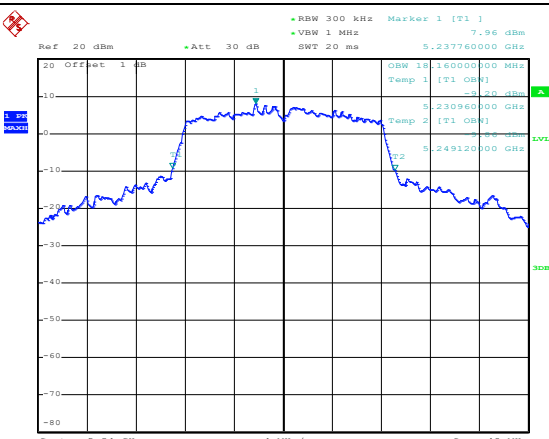
802.11a-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 5.178 dBm, 5.180880000 GHz, OSW: 17.520000000 MHz, Temp 1 [T1 OSW]: -34.32 dBm, 5.171280000 GHz, Temp 2 [T1 OSW]: -36.41 dBm, 5.188800000 GHz, LVL, 30dB Center: 5.18 GHz, 4 MHz/, Span: 40 MHz Date: 19.MAY.2022 11:09:48
802.11a-Middle	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 7.21 dBm, 5.197920000 GHz, OSW: 17.600000000 MHz, Temp 1 [T1 OSW]: -34.88 dBm, 5.191200000 GHz, Temp 2 [T1 OSW]: -37.08 dBm, 5.208800000 GHz, LVL, 30dB Center: 5.2 GHz, 4 MHz/, Span: 40 MHz Date: 19.MAY.2022 11:10:29
802.11a-High	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 7.96 dBm, 5.237760000 GHz, OSW: 18.160000000 MHz, Temp 1 [T1 OSW]: -34.20 dBm, 5.230960000 GHz, Temp 2 [T1 OSW]: -36.60 dBm, 5.249120000 GHz, LVL, 30dB Center: 5.24 GHz, 4 MHz/, Span: 40 MHz Date: 19.MAY.2022 11:10:51




802.11n-HT20-Low	Date: 19.MAY.2022 11:12:52
802.11n-HT20-Middle	Date: 19.MAY.2022 11:13:11
802.11n-HT20-High	Date: 19.MAY.2022 11:13:31

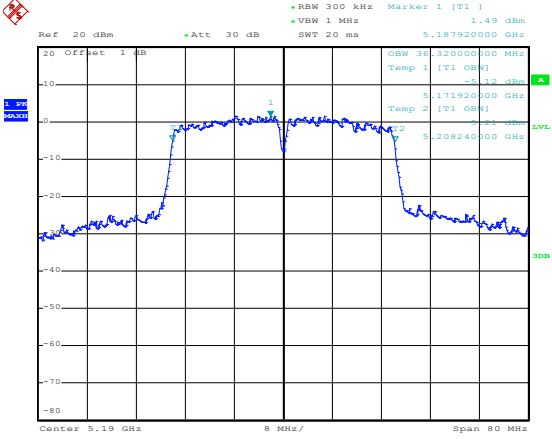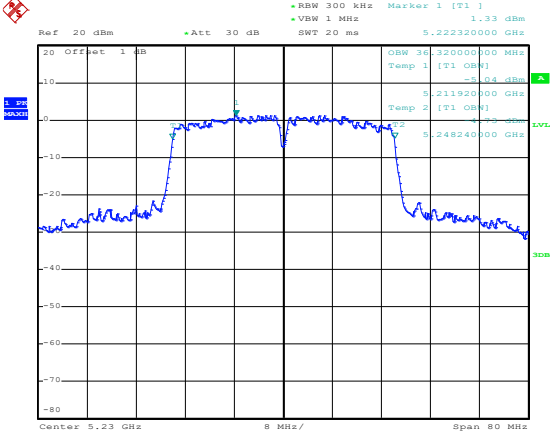802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 1.49 dBm VBW 1 MHz SWT 20 ms 5.187920000 GHz OSW 30.320000000 MHz Temp 1 [T1] 0dB -5.12 dBm 5.171920000 GHz Temp 2 [T1] 0dB -5.12 dBm 5.208240000 GHz Center 5.19 GHz 8 MHz/ Span 80 MHz Date: 19.MAY.2022 11:14:04
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 1.33 dBm VBW 1 MHz SWT 20 ms 5.222320000 GHz OSW 30.320000000 MHz Temp 1 [T1] 0dB -5.04 dBm 5.211920000 GHz Temp 2 [T1] 0dB -5.04 dBm 5.248240000 GHz Center 5.23 GHz 8 MHz/ Span 80 MHz Date: 19.MAY.2022 11:14:33

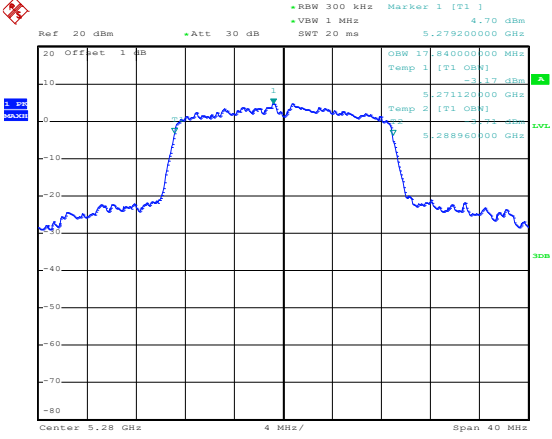5250-5350MHz
99% Bandwidth



802.11a-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 4.70 dBm VBW 1 MHz SWT 20 ms 5.279200000 GHz OSW 17.840000000 MHz Temp 1 [T1] 0dB -3.17 dBm 5.271120000 GHz Temp 2 [T1] 0dB -3.17 dBm 5.288960000 GHz Center 5.28 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 13:07:38
--------------------	--

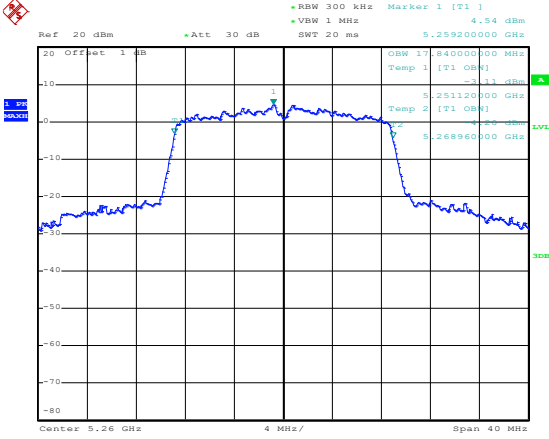
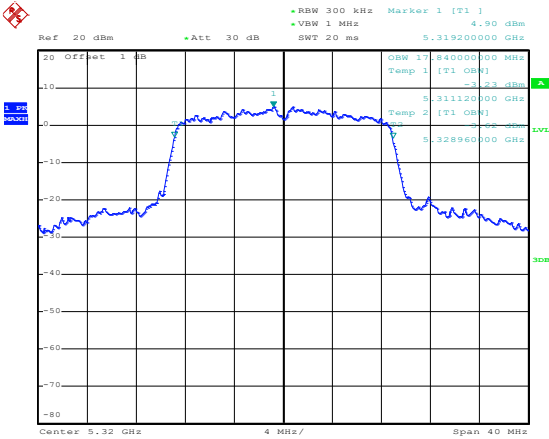
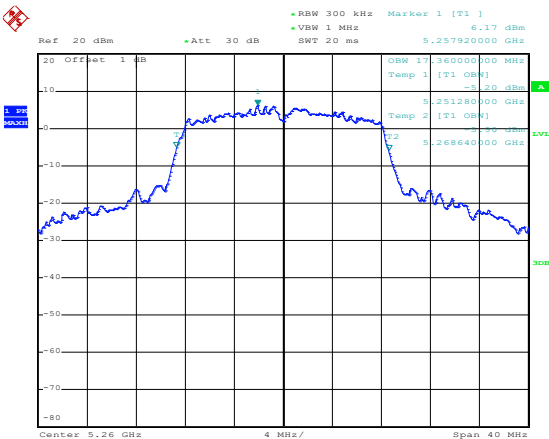
802.11a-Middle	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 4.54 dBm •VSW 1 MHz SWT 20 ms 5.259200000 GHz OSW 17.840000000 MHz Temp 1 [T1 OSW] -3.11 dBm 5.251120000 GHz Temp 2 [T1 OSW] -3.28 dBm 5.268960000 GHz Center 5.26 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 13:08:01
802.11a-High	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 4.90 dBm •VSW 1 MHz SWT 20 ms 5.319200000 GHz OSW 17.840000000 MHz Temp 1 [T1 OSW] -3.23 dBm 5.311120000 GHz Temp 2 [T1 OSW] -3.28 dBm 5.328960000 GHz Center 5.32 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 13:09:00
802.11n-HT20-Low	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 6.17 dBm •VSW 1 MHz SWT 20 ms 5.257920000 GHz OSW 17.360000000 MHz Temp 1 [T1 OSW] -3.20 dBm 5.251280000 GHz Temp 2 [T1 OSW] -3.28 dBm 5.268640000 GHz Center 5.26 GHz 4 MHz/ Span 40 MHz Date: 19.MAY.2022 13:09:32

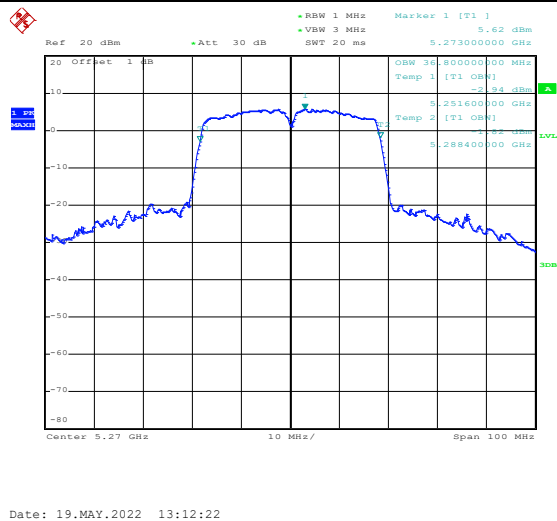
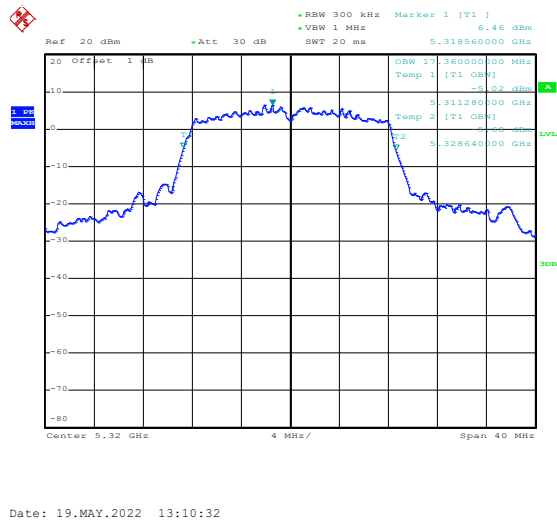
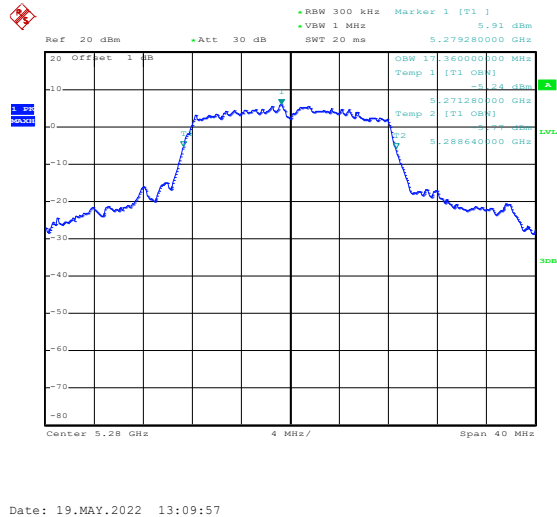





5470-5725MHz
99% Bandwidth

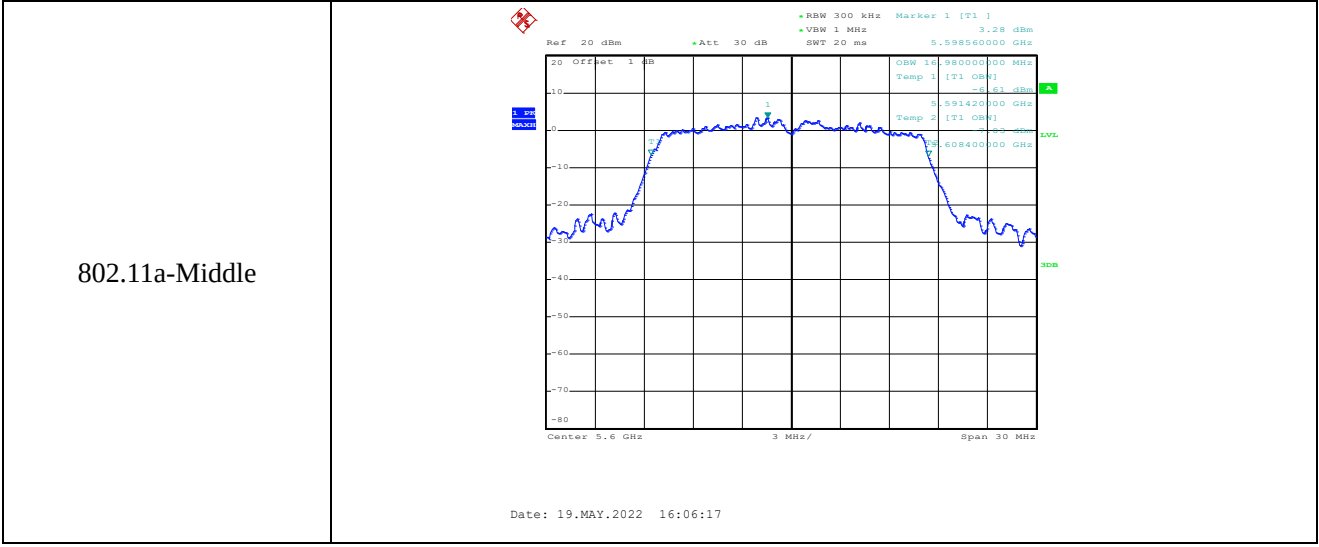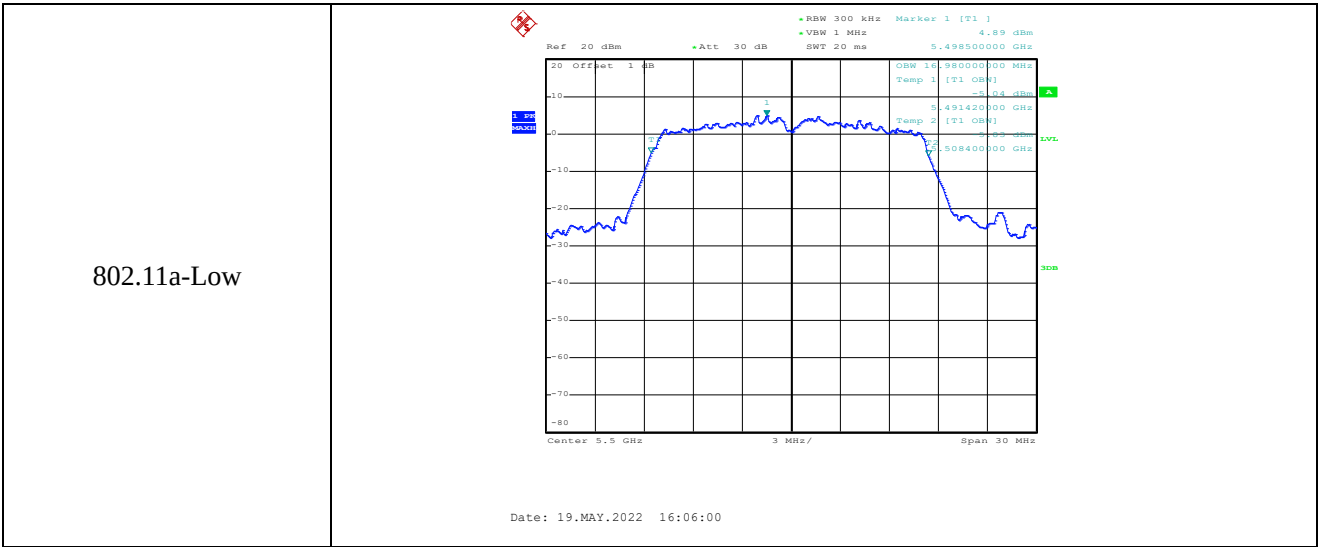

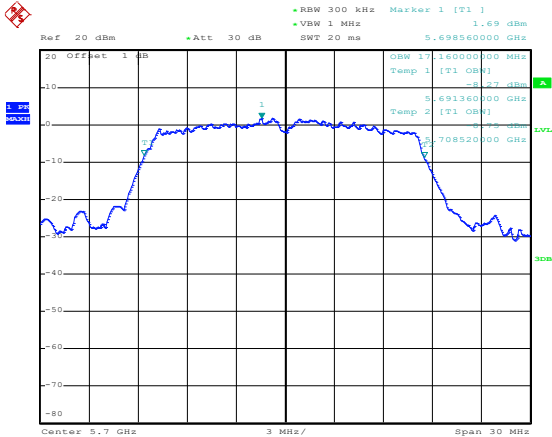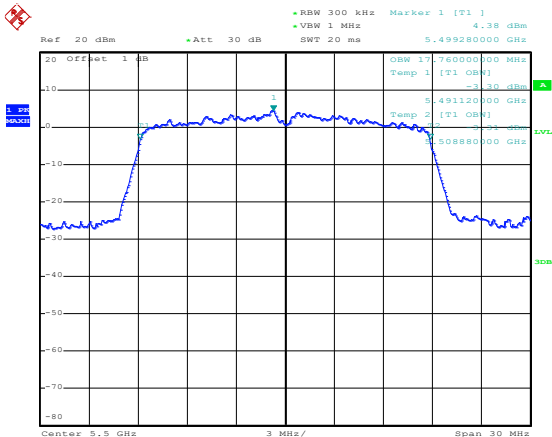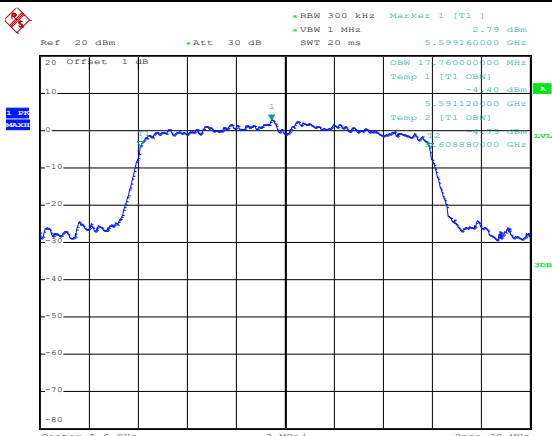802.11a-High	 Date: 19.MAY.2022 16:06:43
802.11n-HT20-Low	 Date: 19.MAY.2022 16:07:49
802.11n-HT20-Middle	 Date: 19.MAY.2022 16:08:10

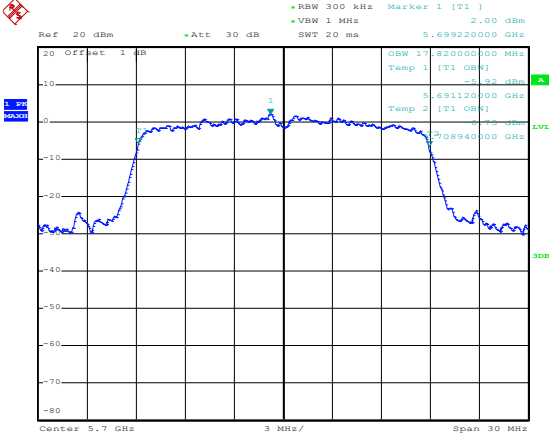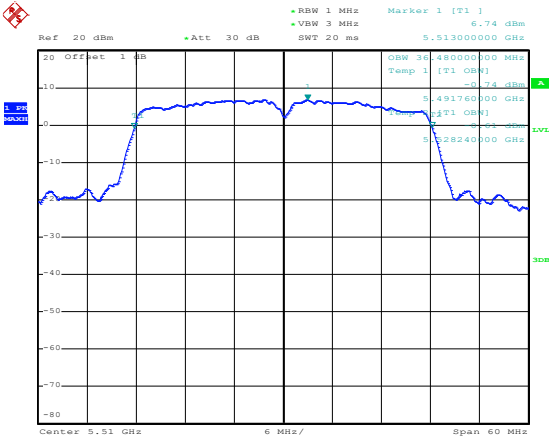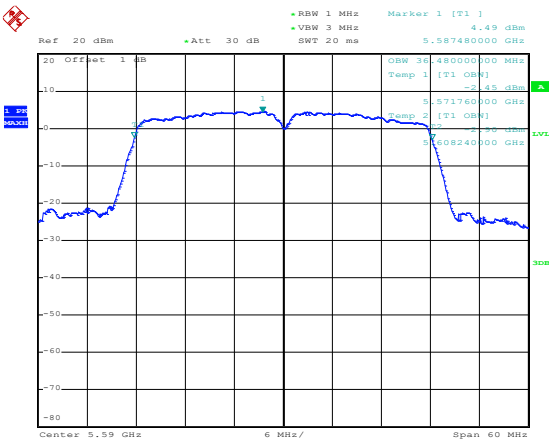
802.11n-HT20-High	 Date: 19.MAY.2022 16:08:38
802.11n-HT40-Low	 Date: 19.MAY.2022 16:10:36
802.11n-HT40- Middle	 Date: 19.MAY.2022 16:11:00



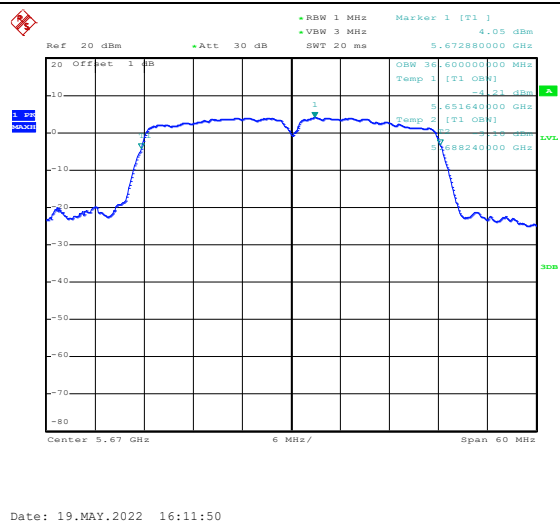
802.11n-HT40-High






5725-5850MHz

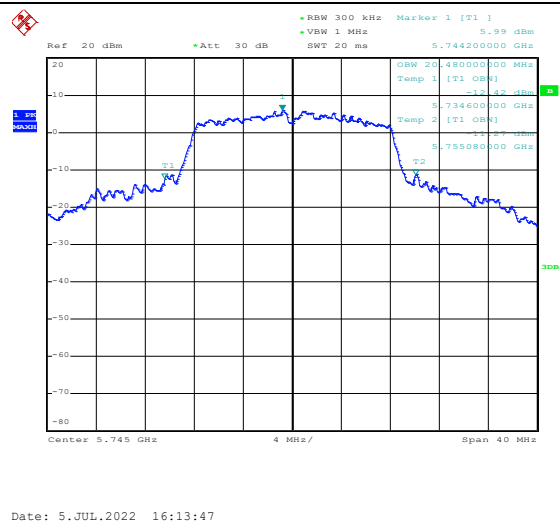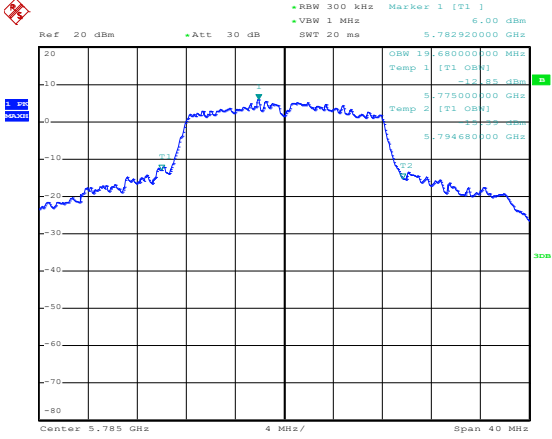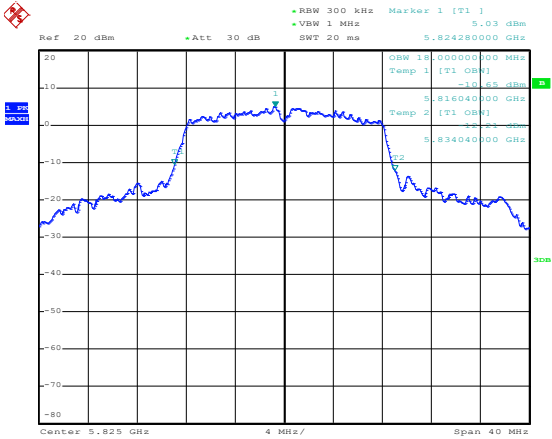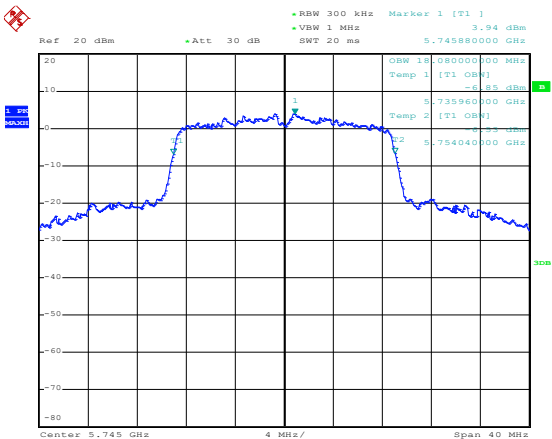
802.11a-Low



802.11a-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz SWT 20 ms Marker 1 [T1] 6.00 dBm 5.782920000 GHz OSW 12.68000000 MHz Temp 1 [T1] 0.00 dBm -12.85 dBm 5.775000000 GHz Temp 2 [T1] 0.00 dBm -12.85 dBm 5.794680000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 5.JUL.2022 16:14:05
802.11a-High	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz SWT 20 ms Marker 1 [T1] 5.03 dBm 5.824280000 GHz OSW 12.68000000 MHz Temp 1 [T1] 0.00 dBm -12.65 dBm 5.816040000 GHz Temp 2 [T1] 0.00 dBm -12.65 dBm 5.834040000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 5.JUL.2022 16:14:34
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz SWT 20 ms Marker 1 [T1] 3.94 dBm 5.745880000 GHz OSW 18.08000000 MHz Temp 1 [T1] 0.00 dBm -6.88 dBm 5.735960000 GHz Temp 2 [T1] 0.00 dBm -6.88 dBm 5.754040000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 5.JUL.2022 16:14:54

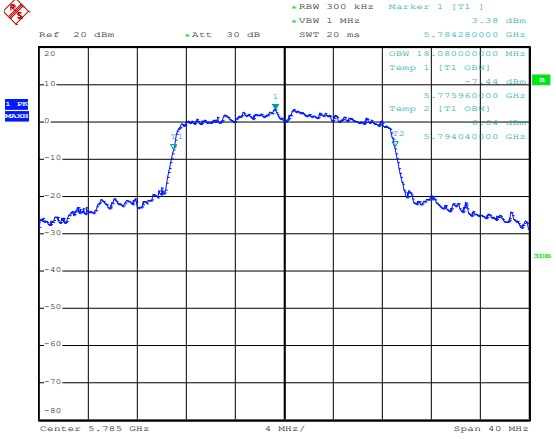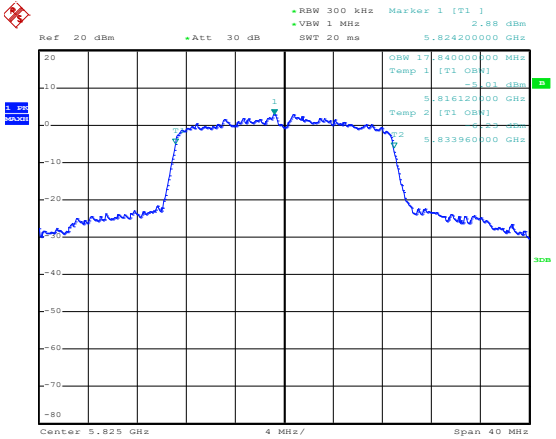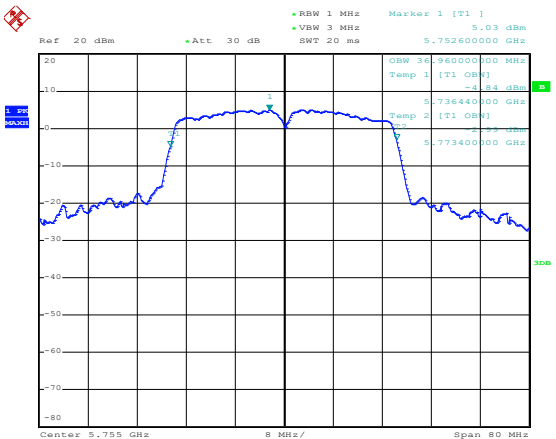802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz VBW 1 MHz SWT 20 ms Marker 1 [T1] 3.38 dBm 5.784280000 GHz OSW 10.0000000 MHz Temp 1 [T1] 0.00 dBm 5.775960000 GHz Temp 2 [T1] 0.00 dBm 5.794040000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 5.JUL.2022 16:15:08
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz VBW 1 MHz SWT 20 ms Marker 1 [T1] 2.88 dBm 5.824200000 GHz OSW 10.0000000 MHz Temp 1 [T1] 0.00 dBm 5.816120000 GHz Temp 2 [T1] 0.00 dBm 5.833960000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 5.JUL.2022 16:15:26
802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 5.03 dBm 5.752600000 GHz OSW 30.0000000 MHz Temp 1 [T1] 0.00 dBm 5.736440000 GHz Temp 2 [T1] 0.00 dBm 5.773400000 GHz Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 5.JUL.2022 16:12:16

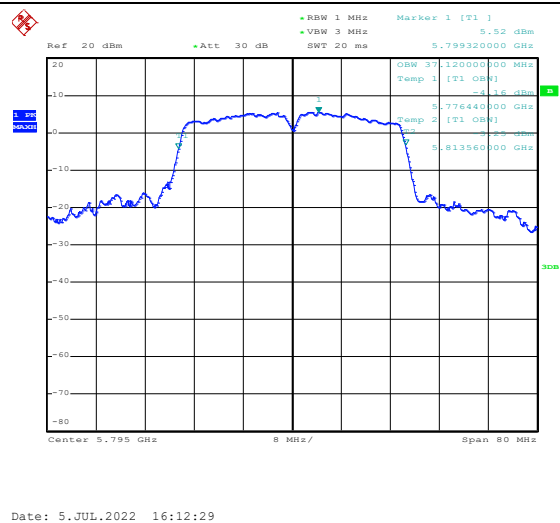802.11n-HT40-High



APPENDIX C

Maximum Conducted Output Power




U-NII-1:5150-5250MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5180	15.10	23.98
	5200	14.98	23.98
	5240	15.16	23.98
802.11n-HT20	5180	14.05	23.98
	5200	13.95	23.98
	5240	14.18	23.98
802.11n-HT40	5190	13.23	23.98
	5230	13.20	23.98




U-NII-2A: 5250-5350MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5260	14.09	23.98
	5280	13.64	23.98
	5320	13.97	23.98
802.11n-HT20	5260	12.58	23.98
	5280	12.55	23.98
	5320	12.76	23.98
802.11n-HT40	5270	12.42	23.98
	5310	11.90	23.98



U-NII-2C: 5470-5725MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5500	11.89	23.98
	5600	10.96	23.98
	5700	11.86	23.98
802.11n-HT20	5500	11.52	23.98
	5600	10.74	23.98
	5700	11.84	23.98
802.11n-HT40	5510	11.46	23.98
	5550	11.07	23.98
	5670	11.04	23.98

U-NII-3: 5725-5850MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5745	13.14	30.00
	5785	13.94	30.00
	5825	13.54	30.00
802.11n-HT20	5745	12.09	30.00
	5785	12.90	30.00
	5825	12.69	30.00
802.11n-HT40	5755	11.25	30.00
	5795	11.52	30.00

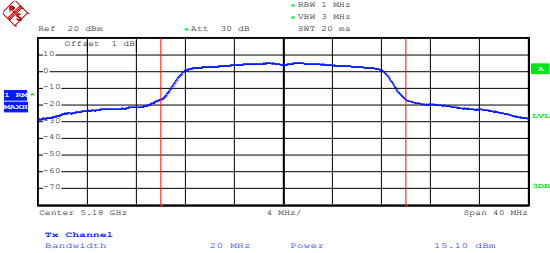
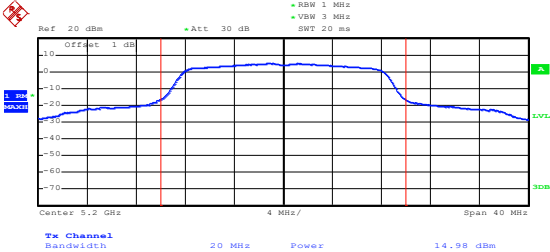
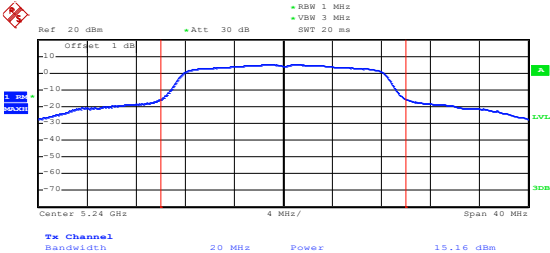
5150-5250MHz




802.11a-Low	 Date: 19.MAY.2022 10:06:17
802.11a-Middle	 Date: 19.MAY.2022 10:06:52
802.11a-High	 Date: 19.MAY.2022 10:07:13

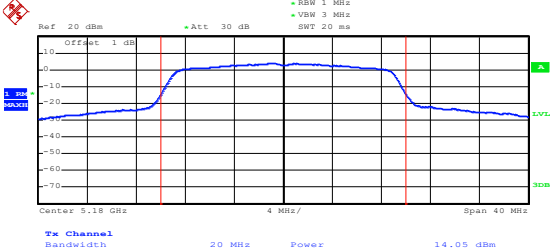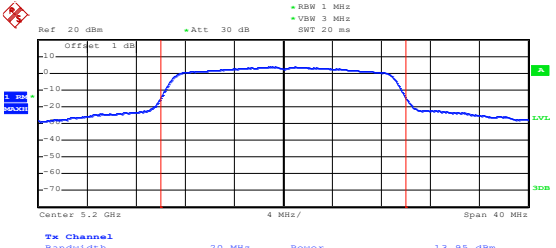
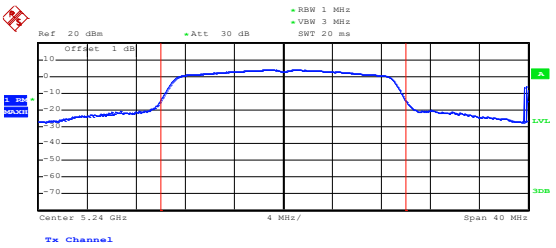
802.11n-HT20-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SMT: 20 ms Center: 5.18 GHz Span: 40 MHz Bandwidth: 20 MHz Power: 14.05 dBm Date: 19.MAY.2022 10:08:13
802.11n-HT20-Middle	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SMT: 20 ms Center: 5.2 GHz Span: 40 MHz Bandwidth: 20 MHz Power: 13.95 dBm Date: 19.MAY.2022 10:08:48
802.11n-HT20-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SMT: 20 ms Center: 5.24 GHz Span: 40 MHz Bandwidth: 20 MHz Power: 14.18 dBm Date: 19.MAY.2022 10:09:07

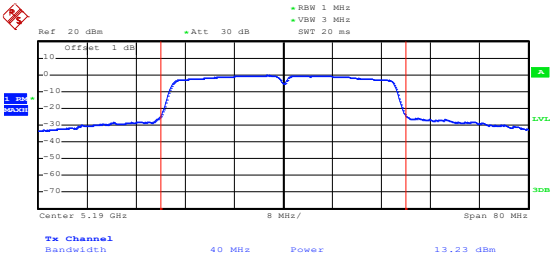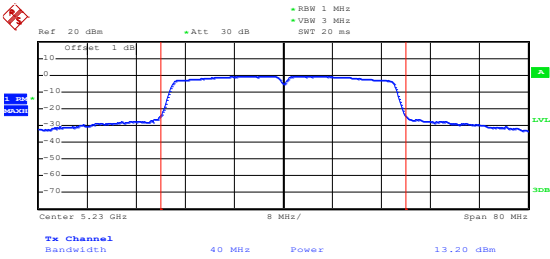802.11n-HT40-Low	 Date: 19.MAY.2022 10:10:52
802.11n-HT40-High	 Date: 19.MAY.2022 10:11:20

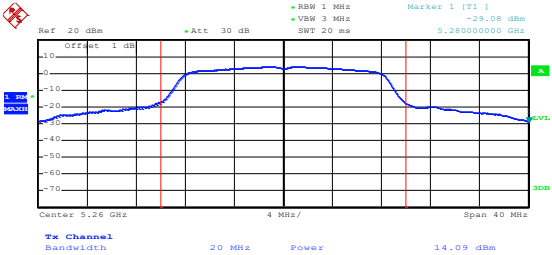
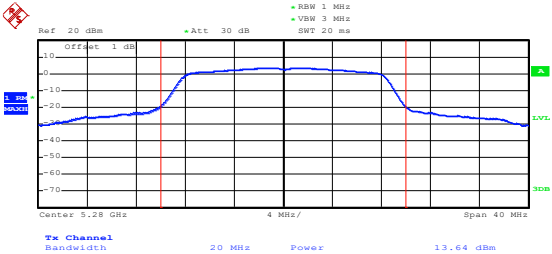
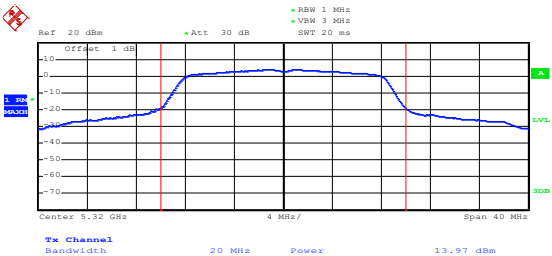
5250-5350MHz




802.11a-Low	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Marker 1 [T1] -29.08 dBm 5.26000000 GHz Offset: 1 dB Center: 5.26 GHz 4 MHz/ Span: 40 MHz Ta Channel Bandwidth: 20 MHz Power: 14.09 dBm Date: 19.MAY.2022 12:30:08
802.11a-Middle	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Marker 1 [T1] -29.08 dBm 5.28000000 GHz Offset: 1 dB Center: 5.28 GHz 4 MHz/ Span: 40 MHz Ta Channel Bandwidth: 20 MHz Power: 13.64 dBm Date: 19.MAY.2022 12:30:51
802.11a-High	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Marker 1 [T1] -29.08 dBm 5.32000000 GHz Offset: 1 dB Center: 5.32 GHz 4 MHz/ Span: 40 MHz Ta Channel Bandwidth: 20 MHz Power: 13.97 dBm Date: 19.MAY.2022 12:32:19

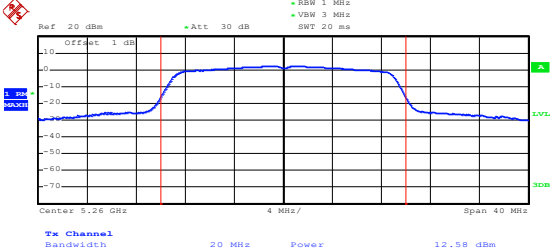
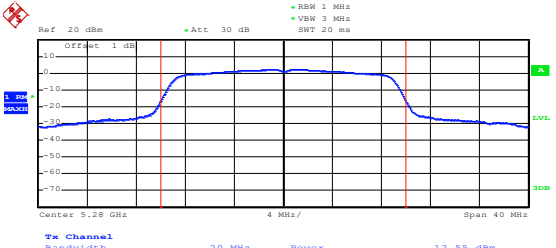
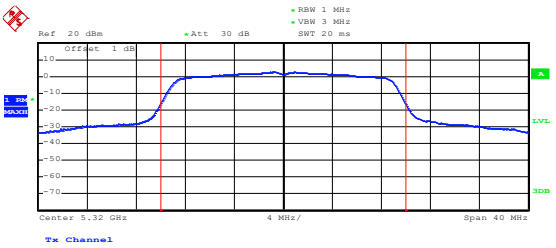
802.11n-HT20-Low	 Date: 19.MAY.2022 12:32:56
802.11n-HT20-Middle	 Date: 19.MAY.2022 12:33:25
802.11n-HT20-High	 Date: 19.MAY.2022 12:34:16

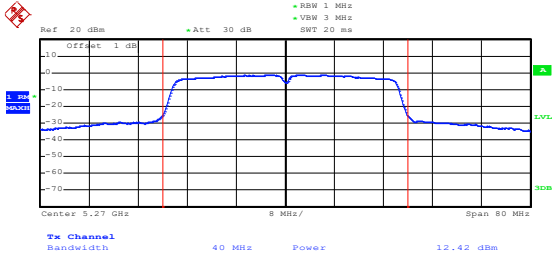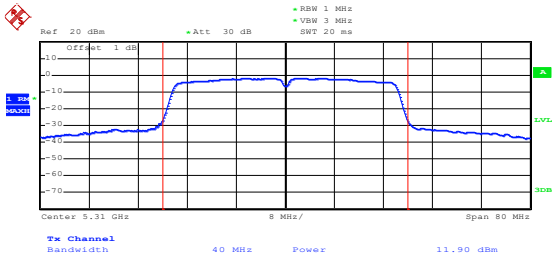802.11n-HT40-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.27 GHz Span: 80 MHz 8 MHz/ Tx Channel Bandwidth: 40 MHz Power: 12.42 dBm Date: 19.MAY.2022 12:35:02
802.11n-HT40-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.31 GHz Span: 80 MHz 8 MHz/ Tx Channel Bandwidth: 40 MHz Power: 11.90 dBm Date: 19.MAY.2022 12:36:07

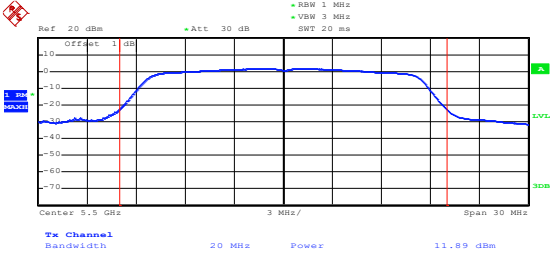
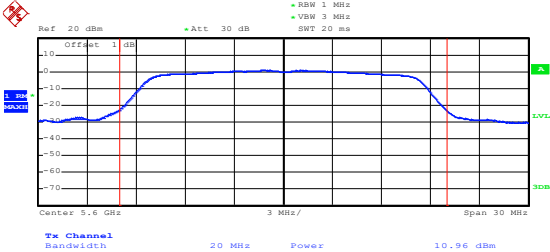
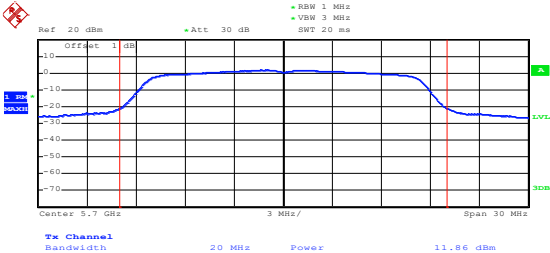
5470-5725MHz




802.11a-Low	 Date: 19.MAY.2022 15:14:02
802.11a-Middle	 Date: 19.MAY.2022 15:15:08
802.11a-High	 Date: 19.MAY.2022 15:16:25

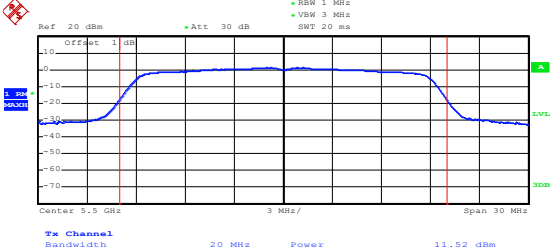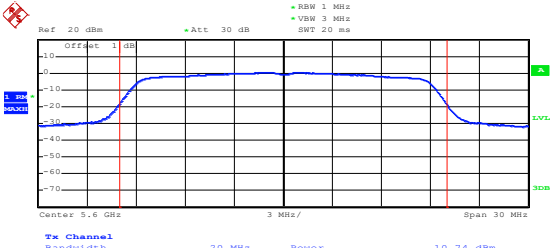
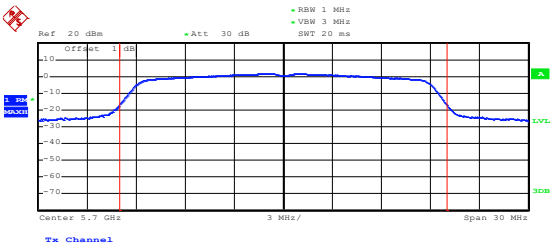
802.11n-HT20-Low	 Date: 19.MAY.2022 15:19:40
802.11n-HT20-Middle	 Date: 19.MAY.2022 15:20:09
802.11n-HT20-High	 Date: 19.MAY.2022 15:21:08

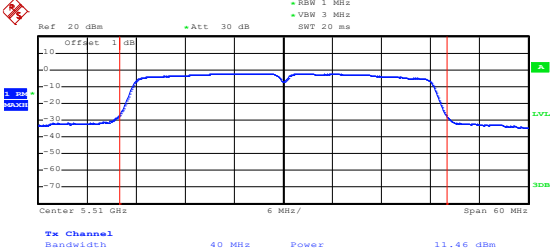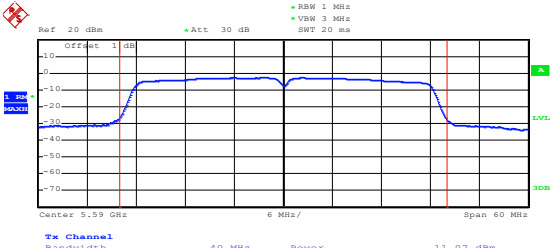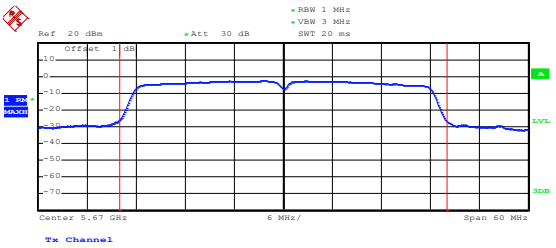802.11n-HT40-Low	 Date: 19.MAY.2022 15:25:19
802.11n-HT40- Middle	 Date: 19.MAY.2022 15:32:55
802.11n-HT40-High	 Date: 19.MAY.2022 15:33:27

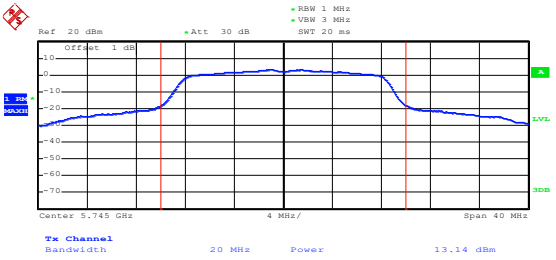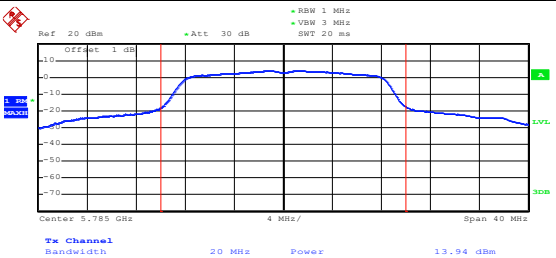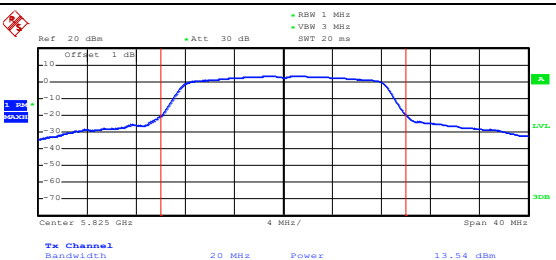5725-5850MHz

802.11a-Low	 Date: 19.MAY.2022 11:20:03
802.11a-Middle	 Date: 19.MAY.2022 11:20:25
802.11a-High	 Date: 19.MAY.2022 11:20:40

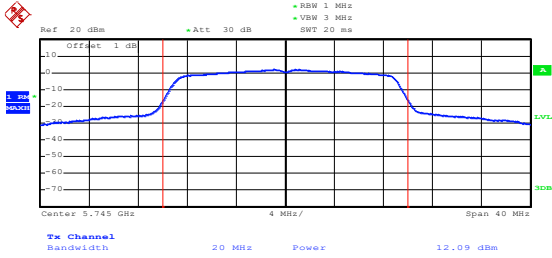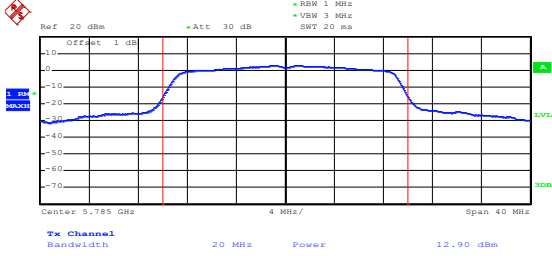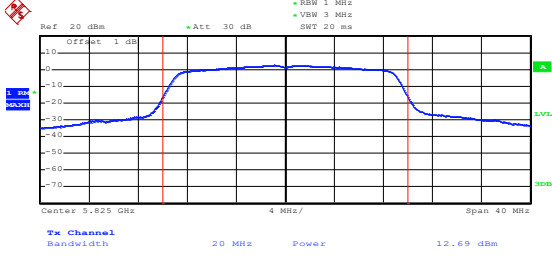802.11n-HT20-Low	 Date: 19.MAY.2022 11:21:32
802.11n-HT20-Middle	 Date: 19.MAY.2022 11:22:03
802.11n-HT20-High	 Date: 19.MAY.2022 11:22:42

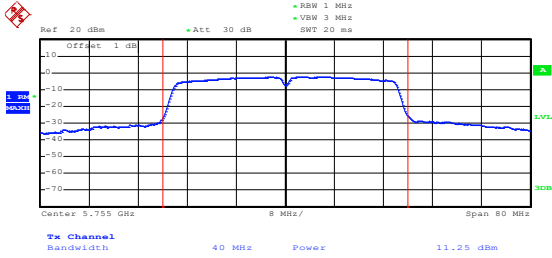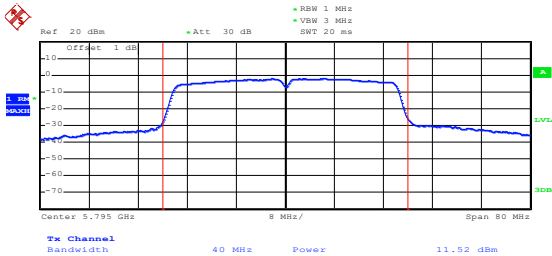802.11n-HT40-Low	 Date: 19.MAY.2022 11:23:32
802.11n-HT40-High	 Date: 19.MAY.2022 11:24:11

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	104	0.0200
100%		-20	177	0.0340
100%		-10	174	0.0335
100%		0	132	0.0254
100%		+10	137	0.0263
100%		+20	169	0.0325
100%		+30	114	0.0219
100%		+40	162	0.0312
100%		+50	169	0.0325
Low Battery power	3.5	+20	108	0.0208
High Battery power	4.35	+20	113	0.0217

U-NII-2A: 5250-5350MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	140	0.0265
100%		-20	145	0.0275
100%		-10	110	0.0208
100%		0	103	0.0195
100%		+10	131	0.0248
100%		+20	161	0.0305
100%		+30	173	0.0328
100%		+40	147	0.0278
100%		+50	117	0.0222
Low Battery power	3.5	+20	175	0.0331
High Battery power	4.35	+20	149	0.0282

U-NII-2C: 5470-5725MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	162	0.0289
100%		-20	135	0.0241
100%		-10	166	0.0296
100%		0	119	0.0213
100%		+10	151	0.0270
100%		+20	160	0.0286
100%		+30	134	0.0239
100%		+40	170	0.0304
100%		+50	148	0.0264
Low Battery power	3.5	+20	159	0.0284
High Battery power	4.35	+20	102	0.0182

U-NII-3:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	138	0.0239
100%		-20	148	0.0256
100%		-10	142	0.0245
100%		0	104	0.0180
100%		+10	117	0.0202
100%		+20	125	0.0216
100%		+30	100	0.0173
100%		+40	161	0.0278
100%		+50	180	0.0311
Low Battery power	3.5	+20	149	0.0258
High Battery power	4.35	+20	127	0.0220

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******