

01_WLAN2.4GHz_802.11b 1Mbps_Right Cheek_0mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2412.000 MHz

Medium: HSL Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: SAM-HeadStand V10.0; Serial: 1031
- Measurement Software: cDASY6 V6.6.0.13926

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.480 W/kg; SAR (10g) = 0.230 W/kg

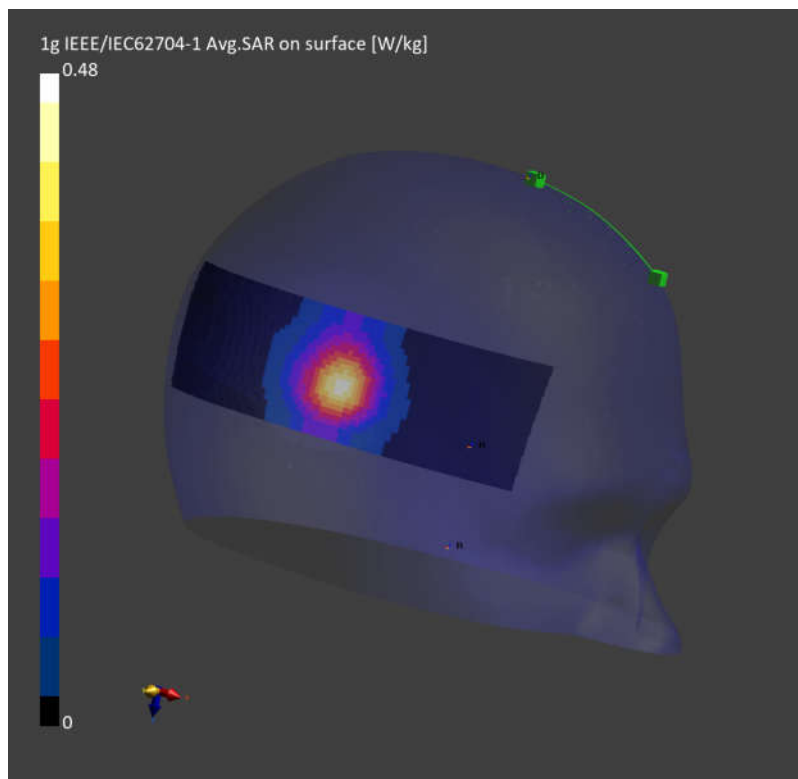

02_Bluetooth_1Mbps_Right Cheek_0mm_Ch0

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2402.000 MHz

Medium: HSL Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: SAM-HeadStand V10.0; Serial: 1031
- Measurement Software: cDASY6 V6.6.0.13926

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.040 W/kg; SAR (10g) = 0.020 W/kg

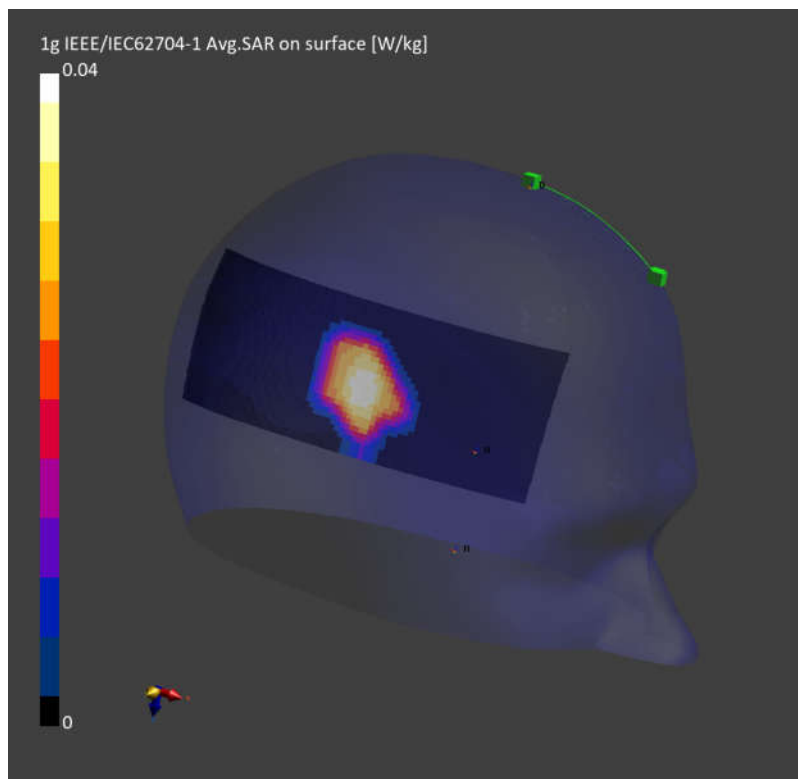

03_WLAN5GHz_802.11a 6Mbps_Right Cheek_0mm_Ch64

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5320.000 MHz

Medium: HSL Medium parameters used: $f = 5320.000$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 36.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.18, 6.18, 6.18); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: SAM-HeadStand V10.0; Serial: 1031
- Measurement Software: cDASY6 V6.6.0.13926

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.195 W/kg; SAR (10g) = 0.059 W/kg

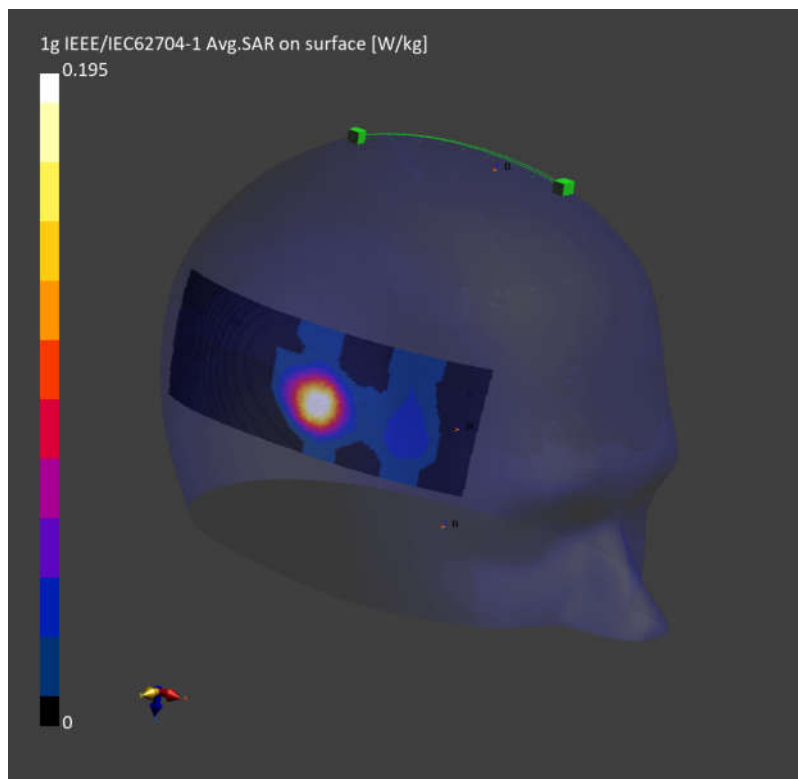

04_WLAN5GHz_802.11a 6Mbps_Left Cheek_0mm_Ch140

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5700.000 MHz

Medium: HSL Medium parameters used: $f = 5700.000$ MHz; $\sigma = 5.20$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: SAM-HeadStand V10.0; Serial: 1031
- Measurement Software: cDASY6 V6.6.0.13926

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.048 W/kg; SAR (10g) = 0.010 W/kg

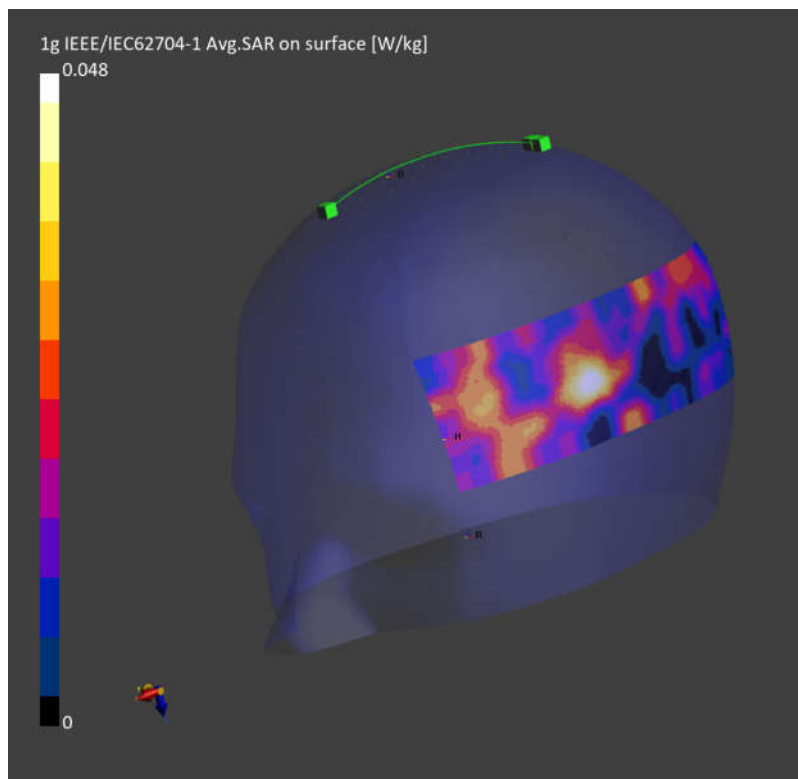

05_WLAN5GHz_802.11a 6Mbps_Right Cheek_0mm_Ch149

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5745.000 MHz

Medium: HSL Medium parameters used: $f = 5745.000$ MHz; $\sigma = 5.24$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: SAM-HeadStand V10.0; Serial: 1031
- Measurement Software: cDASY6 V6.6.0.13926

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.049 W/kg; SAR (10g) = 0.013 W/kg

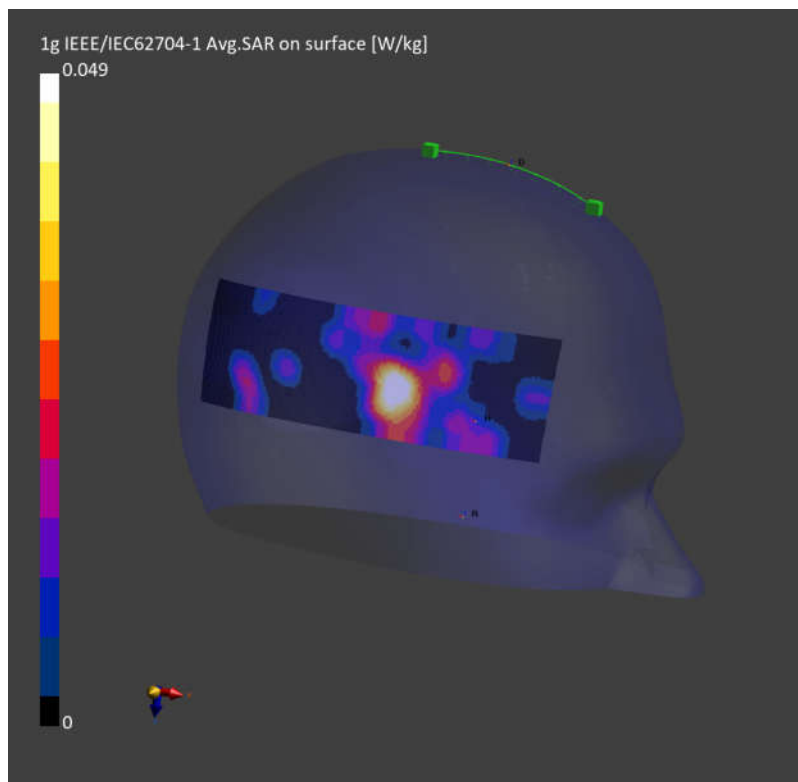

06_WLAN2.4GHz_802.11b 1Mbps_Edge2b_0mm_Ch1

Communication System: WLAN 2.4GHz; Frequency: 2412.000

Medium: HSL. Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.836 W/kg; SAR (10g) = 0.408 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.15 dB

SAR (1g) = 0.832 W/kg; SAR (10g) = 0.403 W/kg;

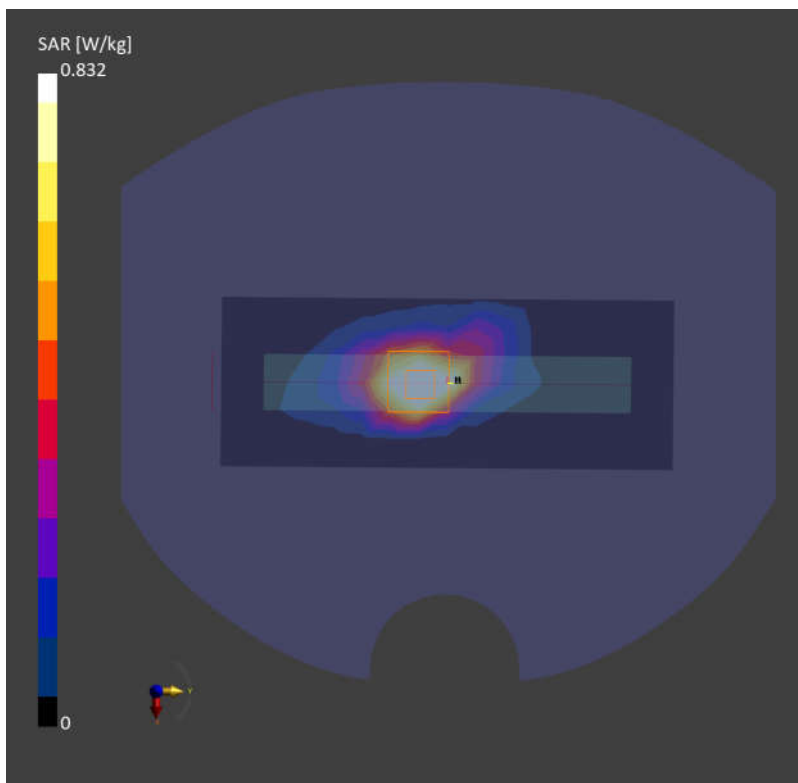

07_Bluetooth_1Mbps_Edge1_0mm_Ch0

Communication System: ISM 2.4 GHz Band; Frequency: 2402.000

Medium: HSL. Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.262 W/kg; SAR (10g) = 0.114 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.293 W/kg; SAR (10g) = 0.113 W/kg;

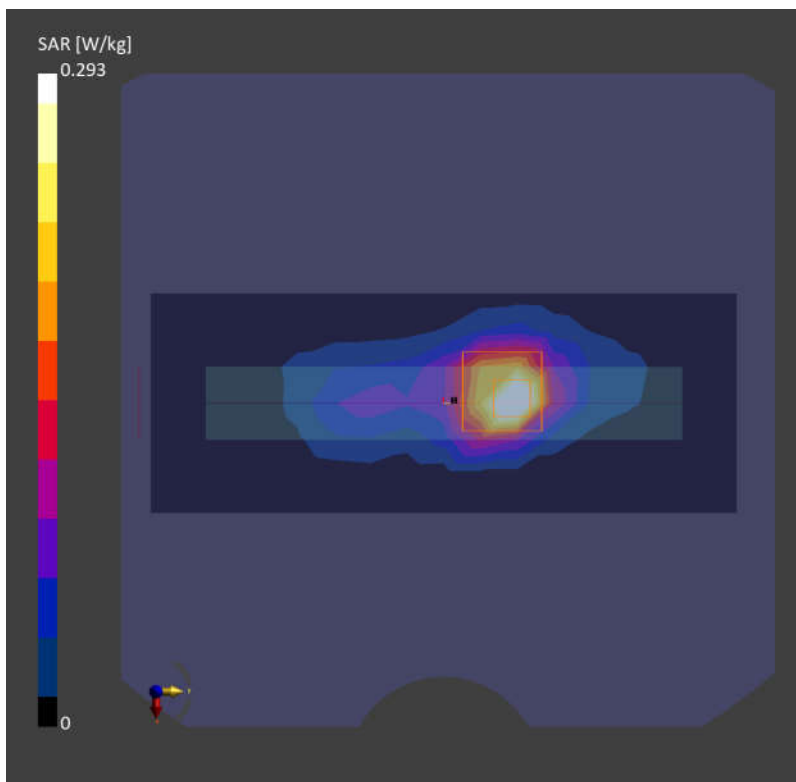

08_WLAN5GHz_802.11a 6Mbps_Edge2b_0mm_Ch64

Communication System: WLAN 5GHz; Frequency: 5320.000

Medium: HSL. Medium parameters used: $f = 5320.000$ MHz; $\sigma = 4.64$ S/m; $\epsilon_r = 34.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.18, 6.18, 6.18); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.88 W/kg; SAR (10g) = 0.471 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 1.85 W/kg; SAR (10g) = 0.327 W/kg;

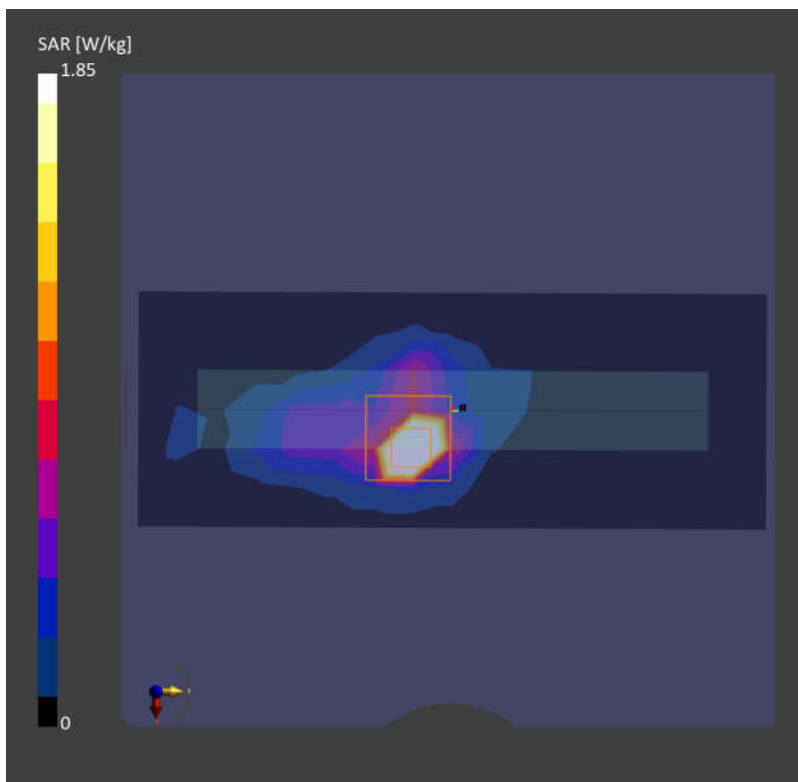

09_WLAN5GHz_802.11a 6Mbps_Edge2b_0mm_Ch140

Communication System: WLAN 5GHz; Frequency: 5700.000

Medium: HSL. Medium parameters used: $f = 5700.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 34.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.13 W/kg; SAR (10g) = 0.290 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 1.20 W/kg; SAR (10g) = 0.267 W/kg;

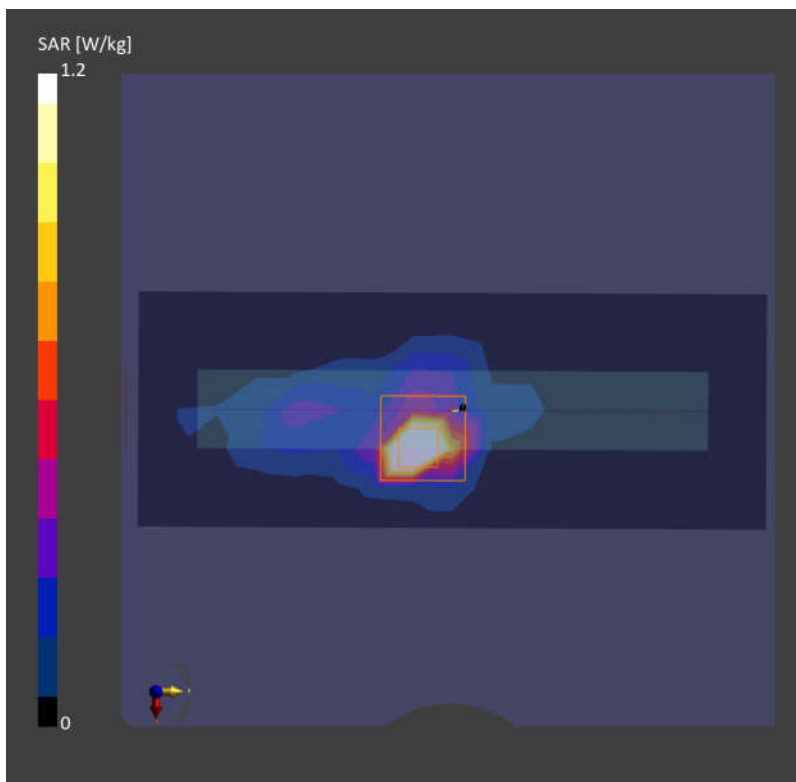

10_WLAN5GHz_802.11a 6Mbps_Edge1_0mm_Ch149

Communication System: WLAN 5GHz; Frequency: 5745.000

Medium: HSL. Medium parameters used: $f = 5745.000$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 34.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2022-11-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.292 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.260 W/kg;

