RF TEST REPORT



Report No.: 18070418-FCC-R Supersede Report No.: N/A

Applicant	FIH International Co., Ltd.			
Product Name	GSM/WCDMA/LTE Mobile Phone			
Model No.	TA-1057			
Serial No.	N/A			
Test Standard	FCC Part 15.407: 2017, ANSI C63.10: 2013			
Test Date	April 01 to April 16, 2018			
Issue Date	April 17, 2018			
Test Result	Pass Fail			
Equipment compl	ed with the specification			
Equipment did no	Equipment did not comply with the specification			
Jaron Li	David Huang			
Araon Lia Test Engir				

This test report may be reproduced in full only

Test result presented in this test report is applicable to the tested sample only

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report No.	18070418-FCC-R
Page	2 of 26

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety



Test Report No.	18070418-FCC-R
Page	3 of 26

This page has been left blank intentionally.



Test Report No.	18070418-FCC-R
Page	4 of 26

CONTENTS

1.	REPORT REVISION HISTORY	5
	CUSTOMER INFORMATION	
3.	TEST SITE INFORMATION	6
4.	EQUIPMENT UNDER TEST (EUT) INFORMATION	7
5.	TEST SUMMARY	9
6.	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	11
6.1]	DYNAMIC FREQUENCY SELECTION (DFS)	11
INA	NEX A. TEST INSTRUMENT	20
INA	NEX B. TEST SETUP AND SUPPORTING EQUIPMENT	21
INA	NEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	24
ANI	NEX E. DECLARATION OF SIMILARITY	25



Test Report No.	18070418-FCC-R
Page	5 of 26

1. Report Revision History

Report No.	Report Version	Description	Issue Date
18070327-FCC-R	NONE	Original	April 17, 2018
		This is the amended report	
		application 18070418-FCC-R	
		(FCC ID: 2AJOTTA-1057) of the	
		device, the original submission	
		18070327-FCC-R (2AJOTTA-	
		1049) was granted on April 17,	
		2018.	
		The difference between the	
		original device and the current	
		one was as following the detail	
18070418-FCC-R	V1	information: TA-1057 and TA-	April 17, 2018
		1049 are different in supporting	
		bands. TA-1049 supported	
		bands are cover TA-1057	
		supported bands. All the others	
		are the same.	
		And based on the letter the	
		difference between them will not	
		affect any test items, so in this	
		report we didn't revise any test	
		data.	



Test Report No.	18070418-FCC-R
Page	6 of 26

2. Customer information

Applicant Name	FIH International Co., Ltd.
Applicant Add	No.18, Tongji zhonglu, Beijing Economic&Technological Development Area
Manufacturer	HMD Global Oy
Manufacturer Add	Karaportti 2 02610 Espoo FINLAND

3. Test site information

Test Lab:

TOST Lab.		
Lab performing tests	ming tests SIEMIC (Shenzhen-China) LABORATORIES	
	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park	
Lab Address	South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China	
	518108	
FCC Test Site No.	535293	
IC Test Site No.	4842E-1	
Test Software	Radiated Emission Program-To Shenzhen v2.0	



Test Report No.	18070418-FCC-R
Page	7 of 26

4. Equipment under Test (EUT) Information

Description of EUT: GSM/WCDMA/LTE Mobile Phone

Main Model: TA-1057

Serial Model: N/A

Date EUT received: March 30, 2018

Test Date(s): April 01 to April 16, 2018

Equipment Category: NII

5150 ~ 5250MHz: Aux antenna with -1.98dBi gain

5250 ~ 5350MHz: Aux antenna with -1.98dBi gain

Antenna Gain: 5470 ~ 5725MHz: Aux antenna with -1.98dBi gain

5725 ~ 5850MHz: Aux antenna with -1.98dBi gain

Antenna Type: Aux Antenna

Modulation Technology: OFDM

Modulation Type: 64QAM, 16QAM, QPSK, BPSK

5150 ~ 5250MHz: 4 for 802.11a, 802.11n (20MHz)

2 for 802.11n (40MHz),

5250 ~ 5350MHz: 4 for 802.11a, 802.11n (20MHz)

2 for 802.11n (40MHz),

Number of Channels: 5470 ~ 5725MHz: 8 for 802.11a, 802.11n (20MHz)

3 for 802.11n (40MHz),

5725 ~ 5850MHz: 3 for 802.11a, 802.11n (20MHz)

2 for 802.11n (40MHz),

RF Operating Frequency (ies): 5150 ~ 5250MHz, 5250 ~ 5350MHz

5470 ~ 5725MHz, 5725 ~ 5850MHz



Test Report No.	18070418-FCC-R
Page	8 of 26

Power supply:	DC 3.9V from Battery or DC 5V from USB Host Unit

Port: USB Port

Trade Name : Nokia

FCC ID: 2AJOTTA-1057



Test Report No.	18070418-FCC-R
Page	9 of 26

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

Test Item	Test standard Test Method/Procedure		Result	
UNII Detection Bandwidth	47CFR15.407 (h)	905462 D02 UNII DFS Compliance	N/A	
ONIT Detection Bandwidth	47011(13.407 (11)	Procedures New Rules v02	IN/A	
Initial Channel Availability	47CFR15.407 (h)	905462 D02 UNII DFS Compliance	N/A	
Check Time	47CFK15.407 (II)	Procedures New Rules v02	IN/A	
Radar Burst at the Beginning		905462 D02 UNII DFS Compliance		
of the Channel Availability	47CFR15.407 (h)	Procedures New Rules v02	N/A	
Check Time		Procedures New Rules VO2		
Radar Burst at the End of the		905462 D02 UNII DFS Compliance		
Channel Availability Check	47CFR15.407 (h)	Procedures New Rules v02	N/A	
Time		Procedures New Rules VU2		
In-Service Monitoring -	47CFR15.407 (h)	905462 D02 UNII DFS Compliance	Pass	
Channel Move Time	47CFK15.407 (II)	Procedures New Rules v02	Fd55	
In-Service Monitoring -		905462 D02 UNII DFS Compliance		
Channel Closing Transmission	47CFR15.407 (h)	•	Pass	
Time	Procedures New Rules v02			
In-Service Monitoring -	47CFR15.407 (h)	905462 D02 UNII DFS Compliance	N/A	
Non-Occupancy Period	470FK13.407 (II)	Procedures New Rules v02	IN/A	
Statistical Performance Check	47CFR15.407 (h)	905462 D02 UNII DFS Compliance	N/A	
Statistical Performance Check	470FK13.407 (II)	Procedures New Rules v02	IN/A	

Measurement Uncertainty

Emissions			
Test Item	Uncertainty		
Dynamic frequency	Confidence level of approximately 95% (in the case		
selection (DFS) Conducted	where distributions are normal), with a coverage	±1.5dB	
Measurement	factor of 2		



Test Report No.	18070418-FCC-R
Page	10 of 26

Note1:

Operating frequency bands and mode of EUT

Operational Made	Operating Frequency Range		
Operational Mode	5250~5350MHz	5470~5725MHz	
Client without radar detection and ad	V	V	
hoc function	V	V	

Note: The EUT has disabled the 5600-5650MHz band



Test Report No.	18070418-FCC-R
Page	11 of 26

6. Measurements, Examination And Derived Results

6.1 Dynamic Frequency Selection (DFS)

6.1.1General introduction

Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power Value (see note)			
Maximum Transmit Fower	value (see note)		
≥ 200 milliwatt	-64 dBm		
EIRP < 200 milliwatt and	-62 dBm		
power spectral density < 10 dBm/MHz			
EIRP < 200 milliwatt that do not meet the power	-64 dBm		
spectra density requirement			

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

DFS Response requirement values

215 Itab value I taliant I taliant			
Parameter	Value		
Non-occupancy period	Minimum 30 minutes		
Channel Availability Check Time	60 seconds		
Channel Move Time	10 seconds See Note 1.		
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over		
_	remaining 10 second period. See Notes 1 and 2.		
U-NII Detection Bandwidth	Minimum 100% of the UNII 99% transmission power bandwidth		
	See Note 3.		

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.



Test Report No.	18070418-FCC-R
Page	12 of 26

Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms

1. Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a 60% 30 Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A	Roundup { (1/360) * (19 106/PRIusec	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)			80%	120	

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

2. Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

1) The transmission period for the Long Pulse Radar test signal is 12 seconds.





Test Report No.	18070418-FCC-R
Page	13 of 26

- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length (12,000,000 / Burst_Count) microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and [(12,000,000 / Burst_Count) (Total Burst Length) + (One Random PRI Interval)] microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The s9tart time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 Bursts are randomly generated for the Burst Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3-5.
- 7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 3,000,000 microsecond range)





3. Frequency Hopping Radar Type

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30



Test Report No.	18070418-FCC-R
Page	14 of 26

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected 1 from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

6.1.2 Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz.

For a detection threshold level of -62dBm and the Master antenna gain is -0.98 dBi for the band 5250-5350MHz, and -0.26 dBi for the band 5470-5725MHz., required detection threshold is -62.98dBi for the band 5250-5350MHz, and -62.26 dBi for the band 5470-5725MHz.


Note: Maximum Transmit Power is less than 200 milliwatt in this report, so detection threshld level is -62dBm




Test Report No.	18070418-FCC-R
Page	15 of 26

The device transmits one type of radar as specified in the DFS Order.

The Required detection threshold is -61.30dBm = -62 + 0.7dBi. The conducted radar burst level is set to -61.30dBm.

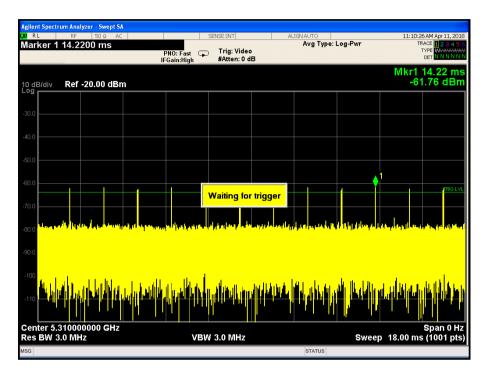

5310-Radar signal

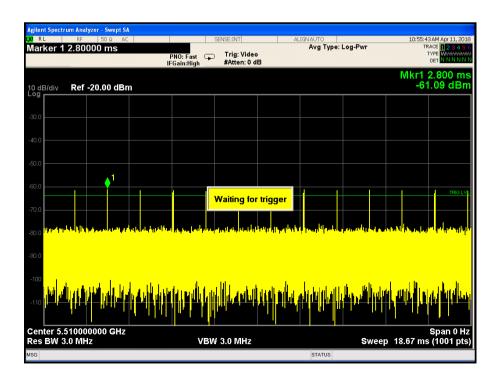



Test Report No.	18070418-FCC-R
Page	16 of 26

6.1 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

These tests define how the following DFS parameters are verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time, and Non-Occupancy Period.

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device.

the UUT (Client) operating as a Client Device will associate with master at Mid Channel. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test. At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at -62dBm. Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time results to the limits defined in the DFS Response requirement values table.

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds
	See Note 1.
Channel Closing Transmission Time	200 milliseconds + an
	aggregate of 60
	milliseconds over
	remaining 10 second
	period.
	See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-
	NII 99% transmission
	power bandwidth. See
	Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Channel Closing Transmission Time- Measurement

A type 1 waveform was introduced to the EUT and the Spectrum Analyzer sweep time was set to 1s for monitoring and capturing the plot. A LabView program was created to collect trace data and capturing the plot. The program will calculate the channel closing time base on the spectrum analyzer result. The result will be calculated based on FCC procedure.

C= N*Dwell



Test Report No.	18070418-FCC-R
Page	17 of 26


C is the closing time, N is the number of spectrum analyzer sampling bins showing a U-NII transmission and dwell is the dwell time per bin.

Dwell= S/B

Where Dwell is the dwell time per spectrum analyzer sampling bin, S is the sweep time and B is the number 0f spectrum analyzer sampling bins.

10.1.4 DFS Test Setup

Test Setup Block Diagram

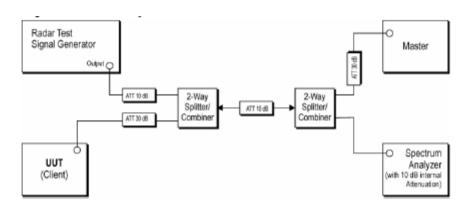

The radio was set at the center channel frequency of tested Channel. A FCC approved mater device – (FCC ID: Q87-WBV-AP230) AP was used to link with the UUT (Client) device.


For the frequency bands 5250MHz to 5725MHz the master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.




Test Report No.	18070418-FCC-R
Page	18 of 26

Channel Move Time Test Result

N40 - 5310MHz

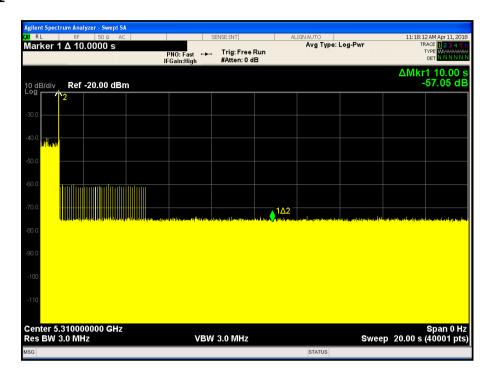

N40 - 5510MHz

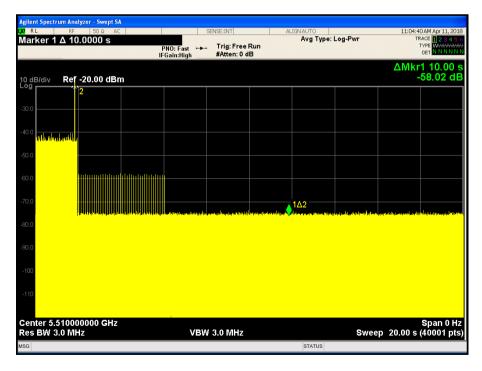





Test Report No.	18070418-FCC-R
Page	19 of 26

Channel Closing Transmission Test Result

N40 - 5310MHz

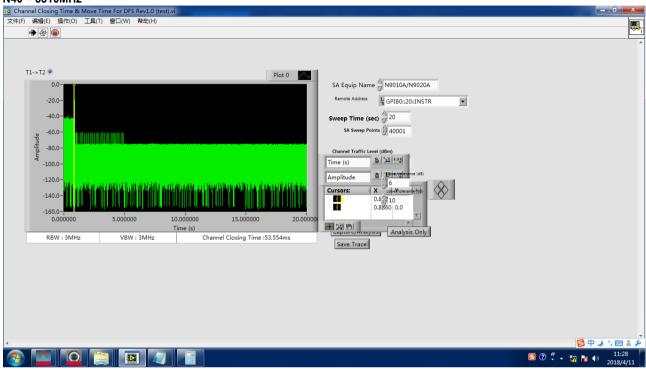

N40 - 5510MHz

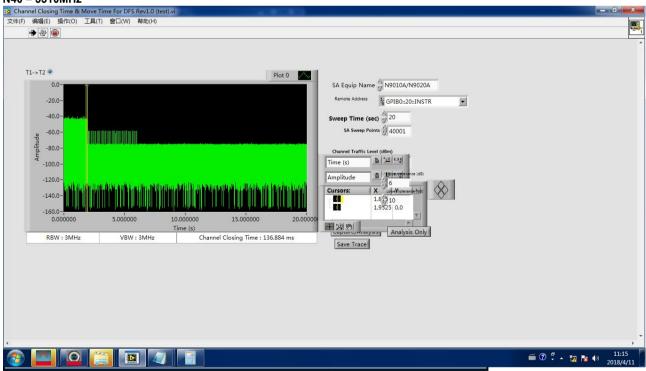



Test Report No.	18070418-FCC-R
Page	20 of 26

Annex A. TEST INSTRUMENT

Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Instrument	Model	Serial #	Cal Date	Cal Due	In use
Radiated DFS Measurement					
Keysight Signal Analyzer	N9020A	MY49100060	11/14/2017	11/13/2018	<u><</u>
Splitter/Combiner (Mini-Circuit)	PD-2/8-2S	XA022154	11/14/2017	11/13/2018	~
Splitter/Combiner (Mini-Circuit)	PD-2/8-2S	XA022155	11/14/2017	11/13/2018	>
Splitter/Combiner (Mini-Circuit)	PD-2/8-2S	XA022159	11/14/2017	11/13/2018	<
Agilent Signal Generator	MXG N5182A	MY50140530	11/16/2017	11/15/2018	<



Test Report No.	18070418-FCC-R
Page	21 of 26

Annex B. TEST SETUP AND SUPPORTING EQUIPMENT

Test Setup Photo





Test Report No.	18070418-FCC-R
Page	22 of 26

Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Aerohive	Access point	AP230	N/A



Test Report No.	18070418-FCC-R
Page	23 of 26

Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
Emissions Testing	The EUT was continuously transmitting to stimulate the worst
	case.



Test Report No.	18070418-FCC-R
Page	24 of 26

Annex D. User Manual / Block Diagram / Schematics / Partlist

See attachment



Test Report No.	18070418-FCC-R
Page	25 of 26

Annex E. DECLARATION OF SIMILARITY



HI-ID Global Oy Karaportti 2 02630 Espoo, Finland

Tell +358 5% 421349 Ear +358 45 213375

HMD Global Oy Karaportti 2 02610 Espoo, FINLAND

Date: May 11, 2018

Product Equality Declaration

We, HMD Global Oy, declare on our sole responsibility for the product of TA-1063, TA-1057 (model name) as below:

The Hardware difference between TA-1063 and TA-1057:

- TA-1057 is single SIM product; TA-1063 is dual sim product. All the others HW/SW are the same are the same.
- Both TA-1063 HW 0301 and TA-1057 HW 0341 are same.
- Both TA-1063 and TA-1057 flashed SW version 000C 0 34A function are same.

Except Listings above, the others are the same as previous version.

Should you have any questions or comments regarding this matter, please have my best attention.

Sincerely yours,

Contact Person: Won Chul Chang

Applicant: HMD Global Oy

E-Mail: won.chang@hmdglobal.com

HMD Global Oy is the exclusive licensee of the Nokia brand for phones & tablets. Nokia is a registered trademark of the Nokia Corporation.



Test Report No.	18070418-FCC-R
Page	26 of 26



HMD Global O Karaportti 2 0.7610 Espoo, Finland

Tel +358 86 4213499 Fax +358 45 2133756

HMD Global Oy

Karaportti 2 02610 Espoo, FINLAND

Date: May 11, 2018

Product Equality Declaration

We, HMD Global Oy, declare on our sole responsibility for the product of TA-1049,TA-1074;TA-1063, TA-1057 (model name) as below:

SKU1 include: TA-1063; TA-1057 SKU2 include: TA-1049; TA-1074

SKU1 and SKU2 are different in supporting bands. SKU2 supported bands are cover SKU1 supported

bands.

The software difference between SKU2 and SKU1:

- Disable not support bands on SKU1 from SKU2. SKU1 disable LTE bands 2,4,12,17,28, WCDMA bands 2,4,
- Disable not support bands on SKU2 from SKU1, SKU2 disable LTE band 20.
- Others bands are same as SKU2. All the others software functions are the same.

The Hardware difference between SKU2 and SKU1:

Remove all of components which to be related not support bands on SKU1 and SKU2.
 All the others HW components are the same.

Except Listings above, the others are the same as previous version.

Should you have any questions or comments regarding this matter, please have my best attention.

Sincerely yours,

Contact Person: Won Chul Chang

Applicant: HMD Global Oy

E-Mail: won.chang@hmdglobal.com

HMD Global Oy is the exclusive licensee of the Nokia brand for phones & tablets. Nokia is a registered trademark of the Nokia Corporation.