



# FCC EMI TEST REPORT

**FCC ID** : 2AJOTTA-1108  
**Equipment** : Smart Phone  
**Brand Name** : NOKIA  
**Model Name** : TA-1108  
**Applicant** : HMD Global Oy  
Bertel Jungin aukio 9, 02600 Espoo, Finland  
**Manufacturer** : HMD Global Oy  
Bertel Jungin aukio 9, 02600 Espoo, Finland  
**Standard** : FCC 47 CFR FCC Part 15 Subpart B

The product was received on Apr. 30, 2018 and testing was started from Oct. 31, 2018 and completed on Nov. 03, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1. General Description .....</b>	<b>5</b>
1.1. Product Feature of Equipment Under Test .....	5
1.2. Modification of EUT .....	5
1.3. Test Location.....	5
1.4. Applicable Standards .....	5
<b>2. Test Configuration of Equipment Under Test .....</b>	<b>6</b>
2.1. Test Mode .....	6
2.2. Connection Diagram of Test System .....	7
2.3. Support Unit used in test configuration and system.....	7
2.4. EUT Operation Test Setup .....	8
<b>3. Test Result .....</b>	<b>9</b>
3.1. Test of AC Conducted Emission Measurement .....	9
3.2. Test of Radiated Emission Measurement .....	11
<b>4. List of Measuring Equipment.....</b>	<b>13</b>
<b>5. Uncertainty of Evaluation.....</b>	<b>14</b>

**Appendix A. AC Conducted Emission Test Result****Appendix B. Radiated Emission Test Result****Appendix C. Setup Photographs**



## History of this test report



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.107	AC Conducted Emission	Pass	Under limit 11.46 dB at 3.377 MHz
3.2	15.109	Radiated Emission	Pass	Under limit 2.82 dB at 98.040 MHz

**Declaration of Conformity:**

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

**Comments and Explanations:**

None

Reviewed by: Louis Wu

Report Producer: Nancy Yang



## 1. General Description

### 1.1. Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, FM Receiver, and GNSS.

Product Specification subjective to this standard	
Antenna Type	WWAN: Monopole Antenna WLAN: Monopole Antenna Bluetooth: Monopole Antenna GPS/Glonass/Galileo/BDS: PIFA Antenna FM: using earphone as antenna

### 1.2. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.3. Test Location

Sportun Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1093 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	<b>Sportun Site No.</b>	
	CO05-HY	03CH06-HY

### 1.4. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM850 Idle + WLAN (2.4GHz) Link + Bluetooth Link + GPS Rx + Earphone + USB Type C Cable (Charging form Adapter 1) Mode 2: GSM1900 Idle + WLAN (5GHz) Link + Bluetooth Link + Camera (Front) + Earphone + USB Type C Cable (Charging form Adapter 2) Mode 3: WCDMA Band II Idle + WLAN (2.4GHz) Link + Bluetooth Link + Camera (Rear) + Earphone + USB Type C Cable (Charging form Adapter 1) Mode 4: WCDMA Band V Idle + WLAN (5GHz) Link + Bluetooth Link + MPEG4 + Earphone + USB Type C Cable (Charging form Adapter 2) Mode 5: LTE Band 4 Idle + WLAN (2.4GHz) Link + Bluetooth Idle + FM Rx + Earphone + USB Type C Cable (Data Link with Notebook)
Radiated Emissions	Mode 1: GSM850 Idle + WLAN (2.4GHz) Idle + Bluetooth Idle + GPS Rx + Earphone + USB Type C Cable (Charging form Adapter 1) Mode 2: GSM1900 Idle + WLAN (5GHz) Idle + Bluetooth Idle + Camera (Front) + Earphone + USB Type C Cable (Charging form Adapter 2) Mode 3: WCDMA Band II Idle + WLAN (2.4GHz) Idle + Bluetooth Idle + Camera (Rear) + Earphone + USB Type C Cable (Charging form Adapter 1) Mode 4: WCDMA Band V Idle + WLAN (5GHz) Idle + Bluetooth Idle + MPEG4 + Earphone + USB Type C Cable (Charging form Adapter 2) Mode 5: LTE Band 4 Idle + WLAN (2.4GHz) Idle + Bluetooth Idle + FM Rx + Earphone + USB Type C Cable (Data Link with Notebook)

**Remark:**

1. The worst case of AC is mode 1; only the test data of this mode was reported.
2. The worst case of RE is mode 5; only the test data of this mode was reported.
3. Data Linking with Notebook means data application transferred mode between EUT and Notebook.

## 2.2. Connection Diagram of Test System

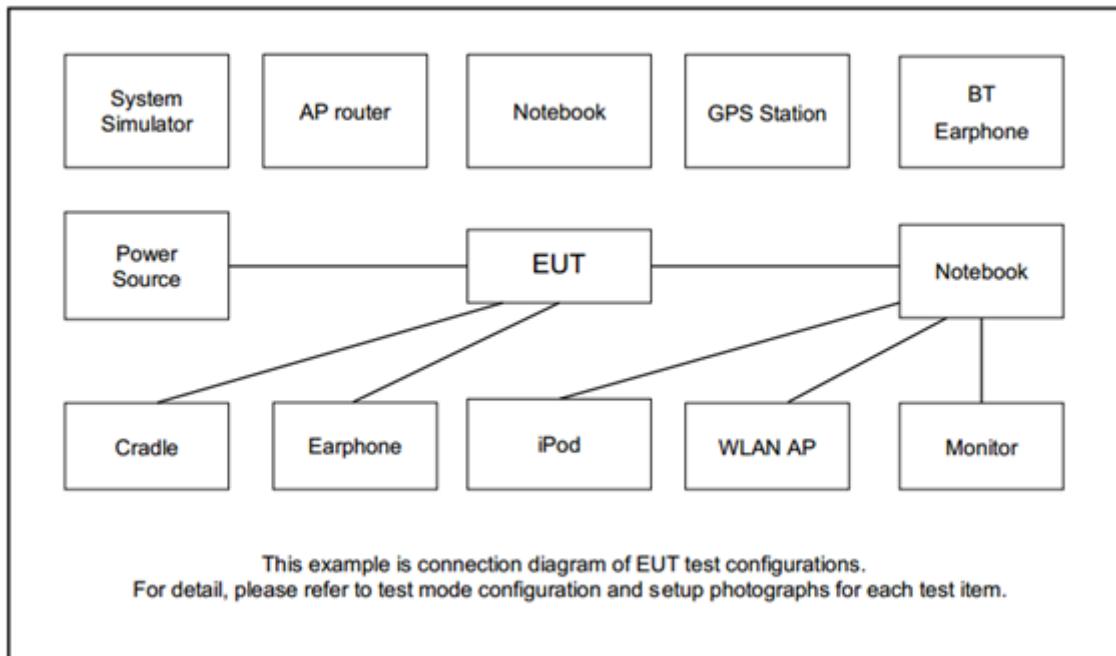

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
3.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded, 1.8 m
4.	Bluetooth Earphone	SonyEricsson	MW600	PY700A2029	N/A	N/A
5.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
6.	iPod	Apple	A1285	DoC	Shielded, 1.0m	N/A
7.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
8.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A



## 2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized with the BCCH, and had been continuous receiving mode by setting paging reorganization of the system simulator.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test:

1. Data application is transferred between Laptop and EUT via USB cable.
2. Execute "GPS Test" to make the EUT receive continuous signals from GPS station.
3. Execute "Video Player" to play MPEG4 files.
4. Turn on camera to capture images.
5. Turn on FM Rx function.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test Setup

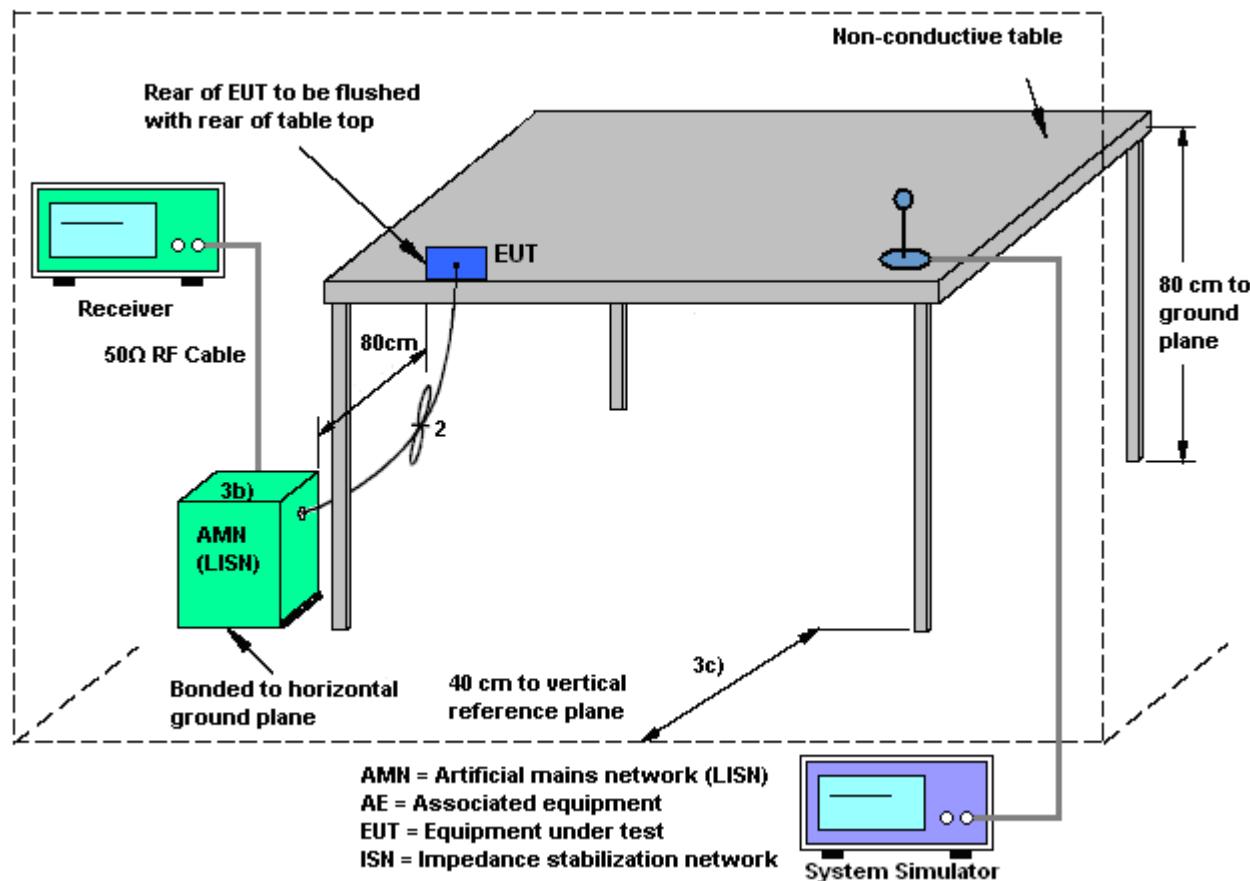

### 3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.2.2. Measuring Instruments


Refer a test equipment and calibration data table in this test report.

### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

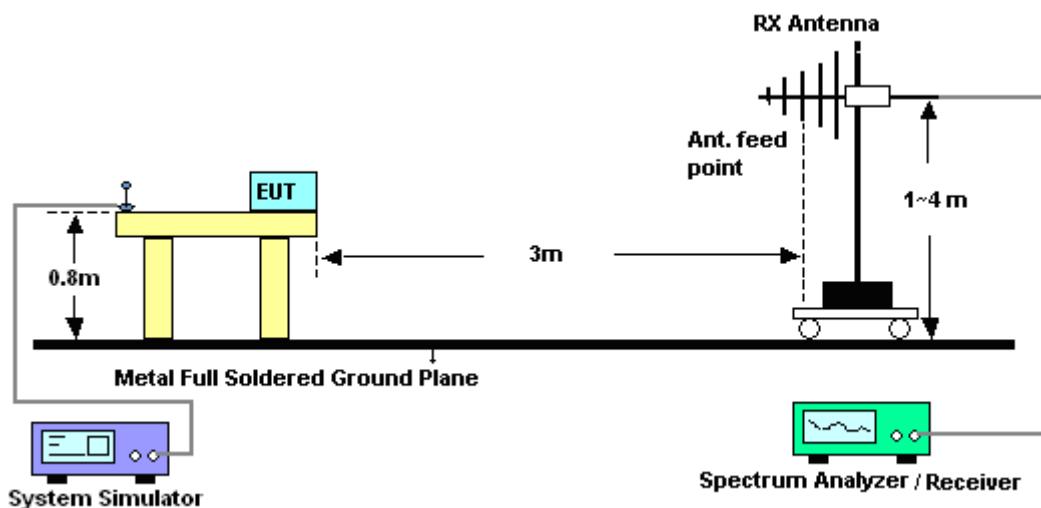

For radiated emissions above 1GHz

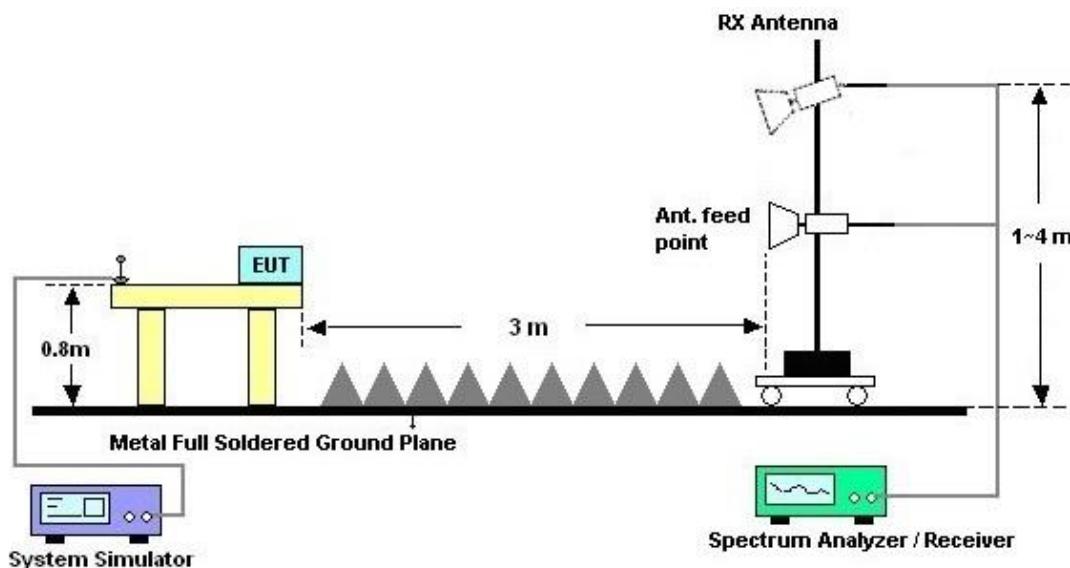

### 3.2.5. Test Result of Radiated Emission

Please refer to Appendix B.



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Oct. 31, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9KHz~3.6GHz	Dec. 08, 2017	Oct. 31, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Oct. 31, 2018	Nov. 29, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 08, 2017	Oct. 31, 2018	Dec. 07, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Oct. 31, 2018	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Oct. 31, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Oct. 31, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Bilog Antenna	Schaffner	CBL6111C&N -6-06	2725&AT-N0601	30MHz~1GHz	Oct. 13, 2018	Nov.03, 2018	Oct. 12, 2019	Radiation (03CH06-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Jan. 04, 2018	Nov.03, 2018	Jan. 03, 2019	Radiation (03CH06-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1156	1GHz~18GHz	Aug. 24, 2018	Nov.03, 2018	Aug. 23, 2019	Radiation (03CH06-HY)
Preamplifier	SONOMA	310N	186713	9kHz~1GHz	May 02, 2018	Nov.03, 2018	May 01, 2019	Radiation (03CH06-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1850117	1GHz ~ 18GHz	May 24, 2018	Nov.03, 2018	May 23, 2019	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF780208 212	1m~4m	N/A	Nov.03, 2018	N/A	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0-360 degree	N/A	Nov.03, 2018	N/A	Radiation (03CH06-HY)
Test Software	AUDIX	e3	6.2009-8-2 4(k5)	N/A	N/A	Nov.03, 2018	N/A	Radiation (03CH06-HY)
RF Cable	HUBER+SUHNER/UTIFLEX	SUCOFLEX 104 / UFA210A	MY24966/4 / LF-01	30MHz-1GHz	Nov. 24, 2017	Nov.03, 2018	Nov. 23, 2018	Radiation (03CH06-HY)
RF Cable	Infineet/Sunhner	LL142/SF104	CA3601-3 601-HLL	1GHz-26GHz	Nov. 24, 2017	Nov.03, 2018	Nov. 23, 2018	Radiation (03CH06-HY)
Filter	Microwave	H1G013G1	SN477215	1.0G High Pass	Dec. 07, 2017	Nov.03, 2018	Dec. 06, 2018	Radiation (03CH06-HY)
Filter	Wainwright	WLKS1200-8 SS	SN3	1.2G Low Pass	Nov. 21, 2017	Nov.03, 2018	Nov. 20, 2018	Radiation (03CH06-HY)



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

<b>Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))</b>	<b>2.2</b>
--	------------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

<b>Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))</b>	<b>3.9</b>
--	------------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

<b>Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))</b>	<b>4.7</b>
--	------------




## Appendix A. AC Conducted Emission Test Results

<b>Test Engineer :</b>	Rick Lin	<b>Temperature :</b>	23~24°C
		<b>Relative Humidity :</b>	55~57%

## EUT Information

Report NO : 843024-03  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

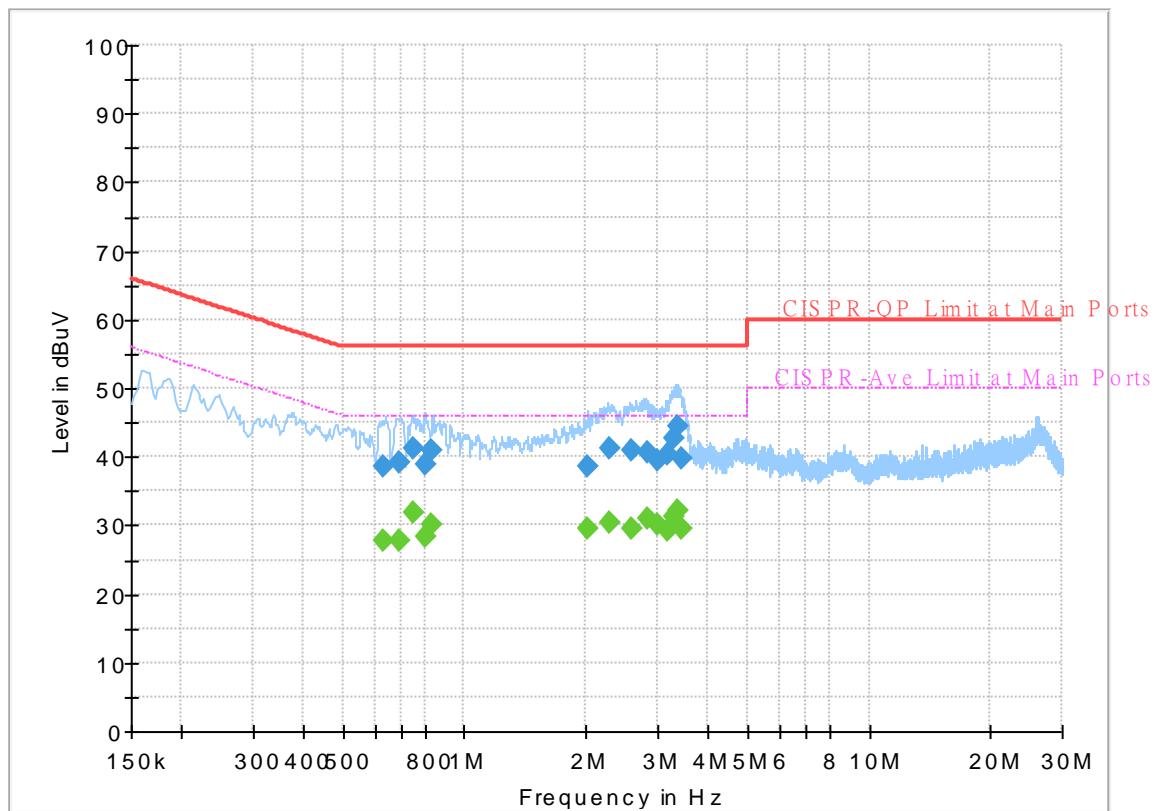

## Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.631500	---	27.72	46.00	18.28	L1	OFF	19.6
0.631500	38.71	---	56.00	17.29	L1	OFF	19.6
0.692250	---	27.75	46.00	18.25	L1	OFF	19.6
0.692250	39.04	---	56.00	16.96	L1	OFF	19.6
0.744000	---	31.81	46.00	14.19	L1	OFF	19.6
0.744000	41.16	---	56.00	14.84	L1	OFF	19.6
0.798000	---	28.38	46.00	17.62	L1	OFF	19.6
0.798000	39.01	---	56.00	16.99	L1	OFF	19.6
0.831750	---	30.01	46.00	15.99	L1	OFF	19.6
0.831750	40.86	---	56.00	15.14	L1	OFF	19.6
2.024250	---	29.42	46.00	16.58	L1	OFF	19.6
2.024250	38.54	---	56.00	17.46	L1	OFF	19.6
2.289750	---	30.31	46.00	15.69	L1	OFF	19.5
2.289750	41.23	---	56.00	14.77	L1	OFF	19.5
2.582250	---	29.63	46.00	16.37	L1	OFF	19.6
2.582250	40.82	---	56.00	15.18	L1	OFF	19.6
2.834250	---	31.12	46.00	14.88	L1	OFF	19.6
2.834250	40.78	---	56.00	15.22	L1	OFF	19.6
3.018750	---	30.08	46.00	15.92	L1	OFF	19.6
3.018750	39.49	---	56.00	16.51	L1	OFF	19.6
3.187500	---	29.28	46.00	16.72	L1	OFF	19.6

<b>3.187500</b>	<b>40.34</b>	---	<b>56.00</b>	<b>15.66</b>	<b>L1</b>	<b>OFF</b>	<b>19.6</b>
<b>3.275250</b>	---	<b>31.41</b>	<b>46.00</b>	<b>14.59</b>	<b>L1</b>	<b>OFF</b>	<b>19.7</b>
<b>3.275250</b>	<b>42.82</b>	---	<b>56.00</b>	<b>13.18</b>	<b>L1</b>	<b>OFF</b>	<b>19.7</b>
<b>3.376500</b>	---	<b>32.31</b>	<b>46.00</b>	<b>13.69</b>	<b>L1</b>	<b>OFF</b>	<b>19.7</b>
<b>3.376500</b>	<b>44.54</b>	---	<b>56.00</b>	<b>11.46</b>	<b>L1</b>	<b>OFF</b>	<b>19.7</b>
<b>3.462000</b>	---	<b>29.40</b>	<b>46.00</b>	<b>16.60</b>	<b>L1</b>	<b>OFF</b>	<b>19.7</b>
<b>3.462000</b>	<b>39.85</b>	---	<b>56.00</b>	<b>16.15</b>	<b>L1</b>	<b>OFF</b>	<b>19.7</b>

## EUT Information

Report NO : 843024-03  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

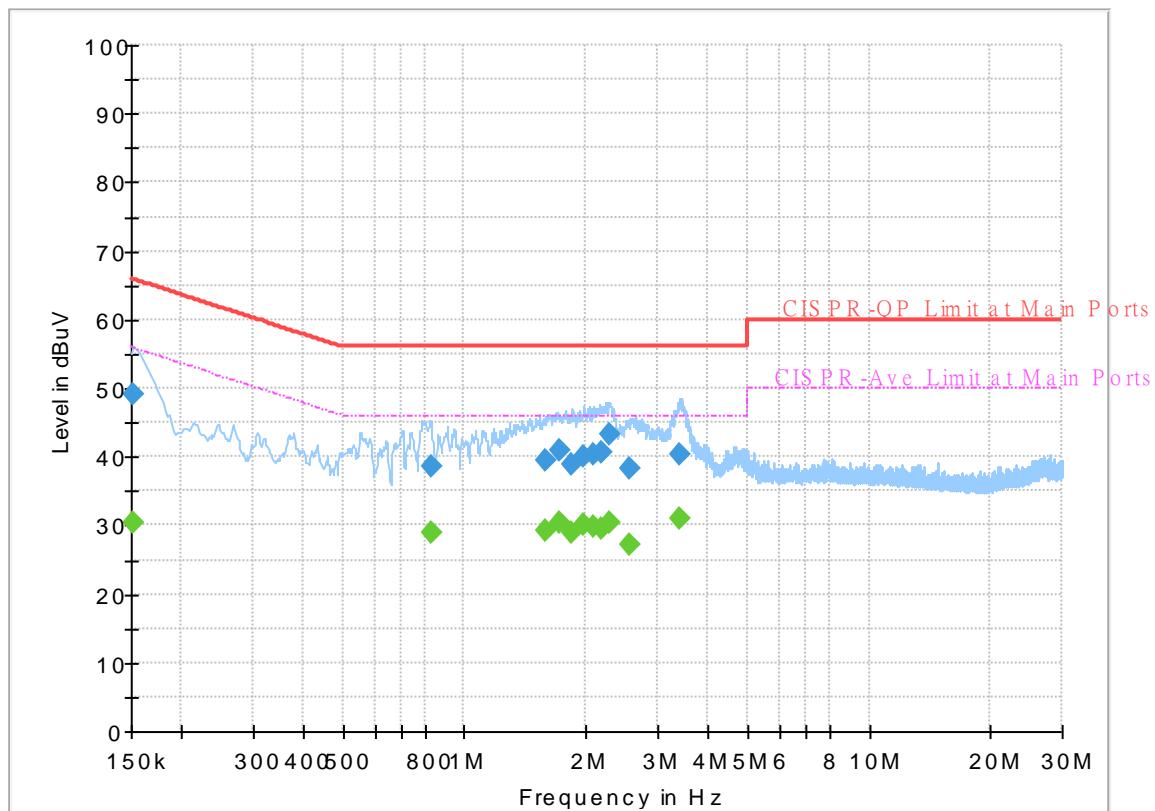


## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	30.54	55.88	25.34	N	OFF	19.5
0.152250	49.13	---	65.88	16.75	N	OFF	19.5
0.827250	---	28.98	46.00	17.02	N	OFF	19.6
0.827250	38.64	---	56.00	17.36	N	OFF	19.6
1.583250	---	29.19	46.00	16.81	N	OFF	19.6
1.583250	39.50	---	56.00	16.50	N	OFF	19.6
1.709250	---	30.34	46.00	15.66	N	OFF	19.6
1.709250	40.87	---	56.00	15.13	N	OFF	19.6
1.848750	---	28.92	46.00	17.08	N	OFF	19.6
1.848750	38.75	---	56.00	17.25	N	OFF	19.6
1.965750	---	29.99	46.00	16.01	N	OFF	19.6
1.965750	40.05	---	56.00	15.95	N	OFF	19.6
2.087250	---	29.89	46.00	16.11	N	OFF	19.4
2.087250	40.27	---	56.00	15.73	N	OFF	19.4
2.181750	---	29.60	46.00	16.40	N	OFF	19.5
2.181750	40.78	---	56.00	15.22	N	OFF	19.5
2.292000	---	30.50	46.00	15.50	N	OFF	19.5
2.292000	43.27	---	56.00	12.73	N	OFF	19.5
2.568750	---	27.27	46.00	18.73	N	OFF	19.6
2.568750	38.29	---	56.00	17.71	N	OFF	19.6
3.401250	---	30.93	46.00	15.07	N	OFF	19.7

3.401250	40.24	---	56.00	15.76	N	OFF	19.7
----------	-------	-----	-------	-------	---	-----	------



## Appendix B. Radiated Emission Test Result
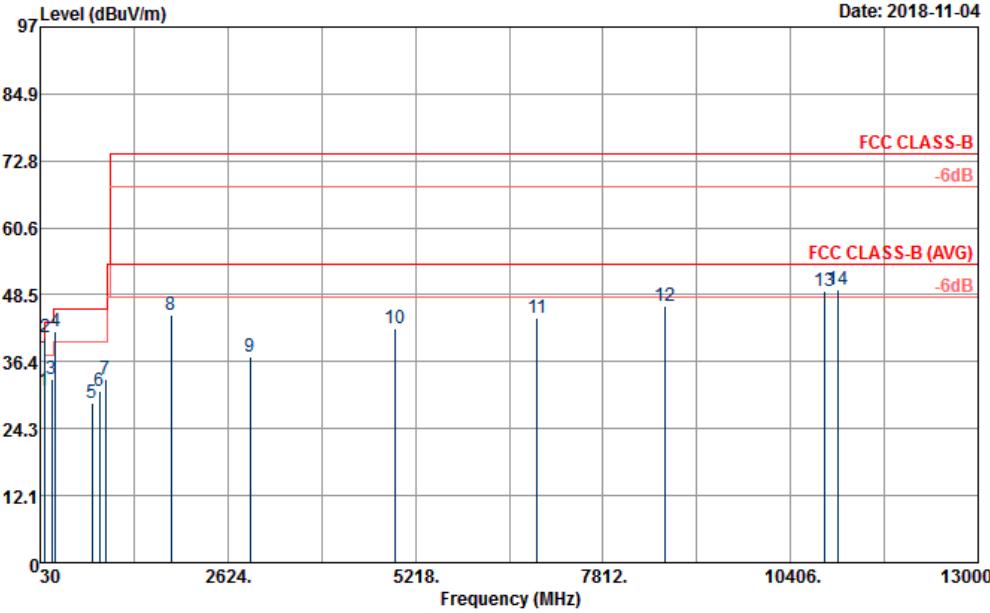
<b>Test Engineer :</b>	Donny Tang	<b>Temperature :</b>	24~26°C							
		<b>Relative Humidity :</b>	50~52%							
<b>Test Distance :</b>	3m	<b>Polarization :</b>	Horizontal							
 Date: 2018-11-04										
Site	: 03CH06-HY									
Condition	: FCC CLASS-B 3m 9120D_1156_180824 HORIZONTAL									
Project	: 843024-03									
Power	: From System									
Memo	: Mode 5									
<b>Freq</b> <b>Level</b> <b>Over Limit</b> <b>Limit</b> <b>ReadAntenna</b> <b>Cable</b> <b>Preamp</b> <b>A/Pos</b> <b>T/Pos</b> <b>Remark</b>										
<b>MHz</b> <b>dBuV/m</b> <b>dB</b> <b>dBuV/m</b> <b>dBuV</b> <b>dB/m</b> <b>dB</b> <b>dB</b> <b>cm</b> <b>deg</b>										
1	86.70	31.11	-8.89	40.00	47.75	13.86	1.24	31.74	---	--- Peak
2	98.04	40.68	-2.82	43.50	55.67	15.43	1.31	31.73	---	--- Peak
3	188.76	33.27	-10.23	43.50	48.60	14.55	1.83	31.71	---	--- Peak
4	240.06	41.78	-4.22	46.00	54.25	17.11	2.12	31.70	100	162 Peak
5	745.20	28.91	-17.09	46.00	29.38	27.80	3.68	31.95	---	--- Peak
6	853.00	31.09	-14.91	46.00	29.46	29.27	4.01	31.65	---	--- Peak
7	936.30	33.25	-12.75	46.00	30.03	30.20	4.14	31.12	---	--- Peak
8	1842.00	44.95	-29.05	74.00	74.43	25.50	6.12	61.10	---	--- Peak
9	2936.00	37.17	-36.83	74.00	62.14	28.43	7.96	61.36	---	--- Peak
10	4934.00	42.48	-31.52	74.00	59.12	31.27	10.70	58.61	---	--- Peak
11	6900.00	44.37	-29.63	74.00	55.10	35.00	12.89	58.62	---	--- Peak
12	8662.00	46.56	-27.44	74.00	51.79	37.47	14.79	57.49	---	--- Peak
13	10882.00	49.18	-24.82	74.00	48.91	40.38	16.64	56.75	---	--- Peak
14	11054.00	49.41	-24.59	74.00	48.66	40.30	16.91	56.46	100	159 Peak



<b>Test Engineer :</b>	Donny Tang	<b>Temperature :</b>	24~26°C																																																																																																																																																																													
		<b>Relative Humidity :</b>	50~52%																																																																																																																																																																													
<b>Test Distance :</b>	3m	<b>Polarization :</b>	Vertical																																																																																																																																																																													
Date: 2018-11-04																																																																																																																																																																																
<p>Site : 03CH06-HY      Condition : FCC CLASS-B 3m 9120D_1156_180824 VERTICAL      Project : 843024-03      Power : From System      Memo : Mode 5</p>																																																																																																																																																																																
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Freq</th> <th style="text-align: center;">Over Level</th> <th style="text-align: center;">Limit Line</th> <th style="text-align: center;">ReadAntenna Level</th> <th style="text-align: center;">Cable Factor</th> <th style="text-align: center;">Preamp Factor</th> <th style="text-align: center;">A/Pos</th> <th style="text-align: center;">T/Pos</th> <th style="text-align: center;">Remark</th> </tr> <tr> <th style="text-align: center;">MHz</th> <th style="text-align: center;">dBuV/m</th> <th style="text-align: center;">dB</th> <th style="text-align: center;">dBuV/m</th> <th style="text-align: center;">dBuV</th> <th style="text-align: center;">dB/m</th> <th style="text-align: center;">dB</th> <th style="text-align: center;">dB</th> <th style="text-align: center;">cm</th> <th style="text-align: center;">deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.00</td> <td>22.75</td> <td>-17.25</td> <td>40.00</td> <td>29.62</td> <td>24.19</td> <td>0.71</td> <td>31.77</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>98.04</td> <td>37.14</td> <td>-6.36</td> <td>43.50</td> <td>52.13</td> <td>15.43</td> <td>1.31</td> <td>31.73</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>3</td> <td>192.27</td> <td>33.87</td> <td>-9.63</td> <td>43.50</td> <td>49.14</td> <td>14.59</td> <td>1.85</td> <td>31.71</td> <td>100</td> <td>163 Peak</td> </tr> <tr> <td>4</td> <td>243.03</td> <td>35.64</td> <td>-10.36</td> <td>46.00</td> <td>47.77</td> <td>17.44</td> <td>2.13</td> <td>31.70</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>5</td> <td>812.40</td> <td>30.02</td> <td>-15.98</td> <td>46.00</td> <td>29.60</td> <td>28.32</td> <td>3.93</td> <td>31.83</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>6</td> <td>862.10</td> <td>30.80</td> <td>-15.20</td> <td>46.00</td> <td>29.16</td> <td>29.20</td> <td>4.05</td> <td>31.61</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>7</td> <td>937.70</td> <td>32.92</td> <td>-13.08</td> <td>46.00</td> <td>29.63</td> <td>30.26</td> <td>4.14</td> <td>31.11</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>8</td> <td>1842.00</td> <td>47.54</td> <td>-26.46</td> <td>74.00</td> <td>77.02</td> <td>25.50</td> <td>6.12</td> <td>61.10</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>9</td> <td>2134.00</td> <td>43.59</td> <td>-30.41</td> <td>74.00</td> <td>70.43</td> <td>27.60</td> <td>6.66</td> <td>61.10</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>10</td> <td>4962.00</td> <td>45.14</td> <td>-28.86</td> <td>74.00</td> <td>61.58</td> <td>31.33</td> <td>10.71</td> <td>58.48</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>11</td> <td>6928.00</td> <td>43.85</td> <td>-30.15</td> <td>74.00</td> <td>54.51</td> <td>35.07</td> <td>12.89</td> <td>58.62</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>12</td> <td>8950.00</td> <td>46.42</td> <td>-27.58</td> <td>74.00</td> <td>51.88</td> <td>37.50</td> <td>14.89</td> <td>57.85</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>13</td> <td>11045.00</td> <td>49.41</td> <td>-24.59</td> <td>74.00</td> <td>48.66</td> <td>40.30</td> <td>16.91</td> <td>56.46</td> <td>100</td> <td>159 Peak</td> </tr> <tr> <td>14</td> <td>12662.00</td> <td>49.30</td> <td>-24.70</td> <td>74.00</td> <td>50.36</td> <td>38.67</td> <td>18.84</td> <td>58.57</td> <td>---</td> <td>--- Peak</td> </tr> </tbody> </table>			Freq	Over Level	Limit Line	ReadAntenna Level	Cable Factor	Preamp Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	30.00	22.75	-17.25	40.00	29.62	24.19	0.71	31.77	---	--- Peak	2	98.04	37.14	-6.36	43.50	52.13	15.43	1.31	31.73	---	--- Peak	3	192.27	33.87	-9.63	43.50	49.14	14.59	1.85	31.71	100	163 Peak	4	243.03	35.64	-10.36	46.00	47.77	17.44	2.13	31.70	---	--- Peak	5	812.40	30.02	-15.98	46.00	29.60	28.32	3.93	31.83	---	--- Peak	6	862.10	30.80	-15.20	46.00	29.16	29.20	4.05	31.61	---	--- Peak	7	937.70	32.92	-13.08	46.00	29.63	30.26	4.14	31.11	---	--- Peak	8	1842.00	47.54	-26.46	74.00	77.02	25.50	6.12	61.10	---	--- Peak	9	2134.00	43.59	-30.41	74.00	70.43	27.60	6.66	61.10	---	--- Peak	10	4962.00	45.14	-28.86	74.00	61.58	31.33	10.71	58.48	---	--- Peak	11	6928.00	43.85	-30.15	74.00	54.51	35.07	12.89	58.62	---	--- Peak	12	8950.00	46.42	-27.58	74.00	51.88	37.50	14.89	57.85	---	--- Peak	13	11045.00	49.41	-24.59	74.00	48.66	40.30	16.91	56.46	100	159 Peak	14	12662.00	49.30	-24.70	74.00	50.36	38.67	18.84	58.57	---	--- Peak	
Freq	Over Level	Limit Line	ReadAntenna Level	Cable Factor	Preamp Factor	A/Pos	T/Pos	Remark																																																																																																																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																							
1	30.00	22.75	-17.25	40.00	29.62	24.19	0.71	31.77	---	--- Peak																																																																																																																																																																						
2	98.04	37.14	-6.36	43.50	52.13	15.43	1.31	31.73	---	--- Peak																																																																																																																																																																						
3	192.27	33.87	-9.63	43.50	49.14	14.59	1.85	31.71	100	163 Peak																																																																																																																																																																						
4	243.03	35.64	-10.36	46.00	47.77	17.44	2.13	31.70	---	--- Peak																																																																																																																																																																						
5	812.40	30.02	-15.98	46.00	29.60	28.32	3.93	31.83	---	--- Peak																																																																																																																																																																						
6	862.10	30.80	-15.20	46.00	29.16	29.20	4.05	31.61	---	--- Peak																																																																																																																																																																						
7	937.70	32.92	-13.08	46.00	29.63	30.26	4.14	31.11	---	--- Peak																																																																																																																																																																						
8	1842.00	47.54	-26.46	74.00	77.02	25.50	6.12	61.10	---	--- Peak																																																																																																																																																																						
9	2134.00	43.59	-30.41	74.00	70.43	27.60	6.66	61.10	---	--- Peak																																																																																																																																																																						
10	4962.00	45.14	-28.86	74.00	61.58	31.33	10.71	58.48	---	--- Peak																																																																																																																																																																						
11	6928.00	43.85	-30.15	74.00	54.51	35.07	12.89	58.62	---	--- Peak																																																																																																																																																																						
12	8950.00	46.42	-27.58	74.00	51.88	37.50	14.89	57.85	---	--- Peak																																																																																																																																																																						
13	11045.00	49.41	-24.59	74.00	48.66	40.30	16.91	56.46	100	159 Peak																																																																																																																																																																						
14	12662.00	49.30	-24.70	74.00	50.36	38.67	18.84	58.57	---	--- Peak																																																																																																																																																																						