



No. 24T04Z101768-001

For

HMD Global Oy

GSM/WCDMA/LTE phone

Model Name: TA-1420

with

Hardware Version: 1.0

Software Version: 00.2131.11.01

FCC ID: 2AJOTTA-1420

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample




Picture 2: Left Head Touch Cheek Position



Picture 3: Left Head Tilt 15° Position

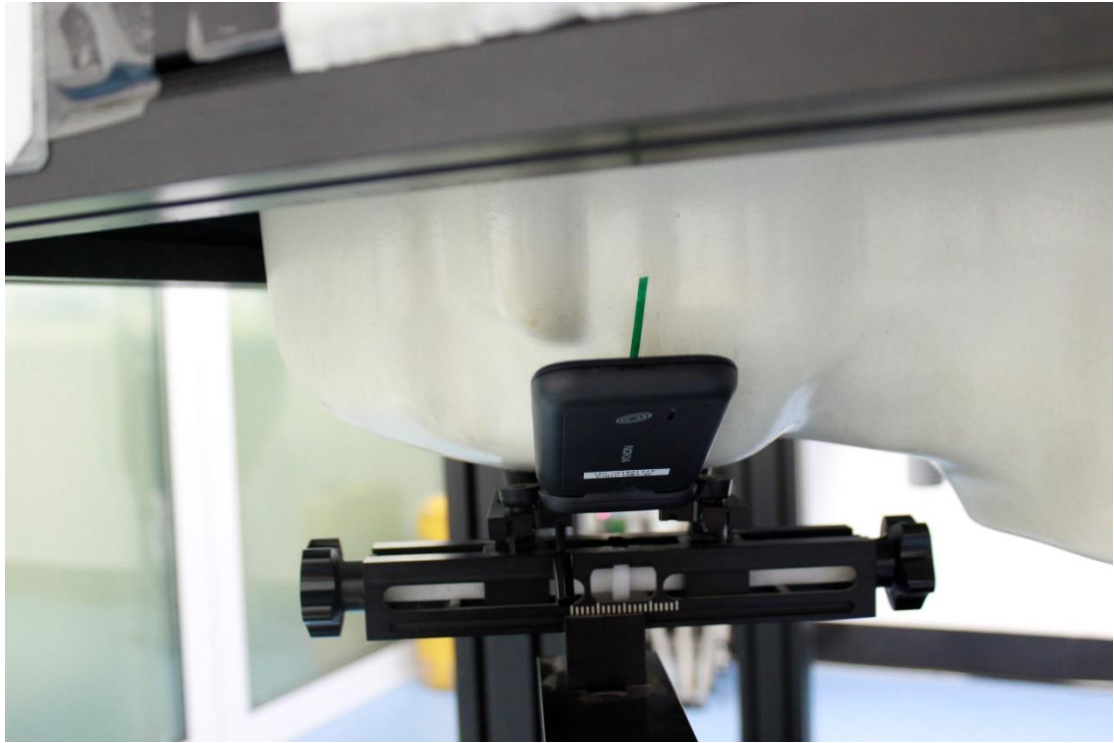


Picture 4: Right Head Touch Cheek Position

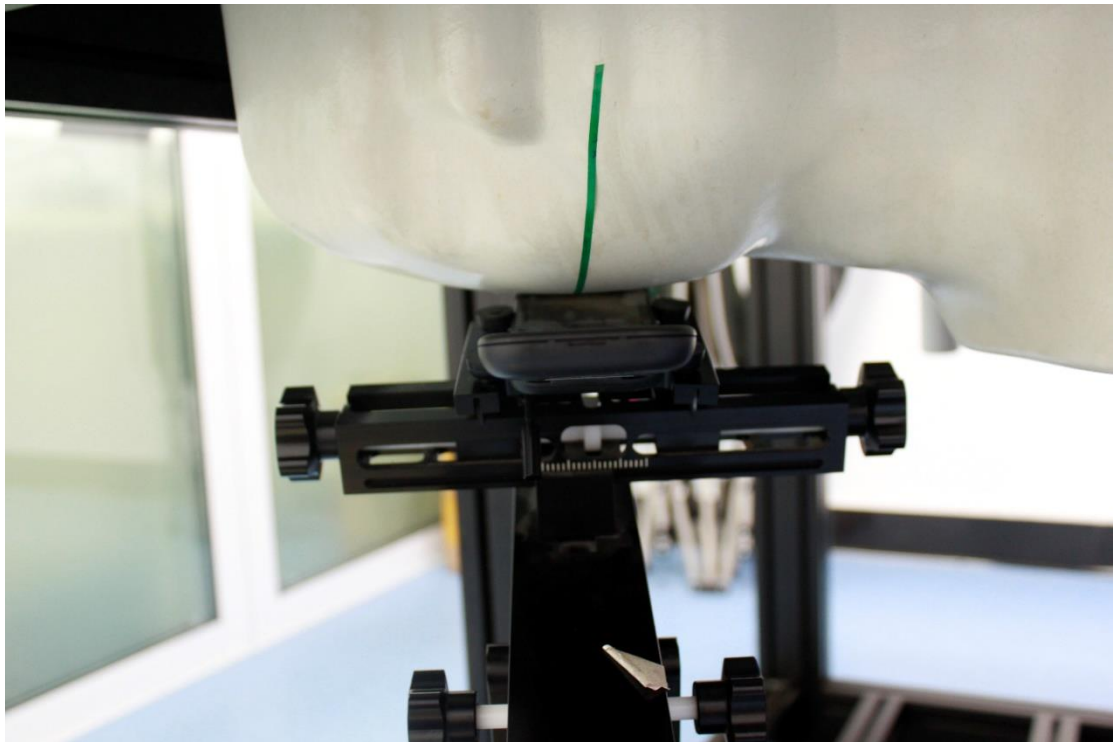


Picture 5: Right Head Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 9 test positions all with the distance =10/15mm between the EUT and the phantom bottom:

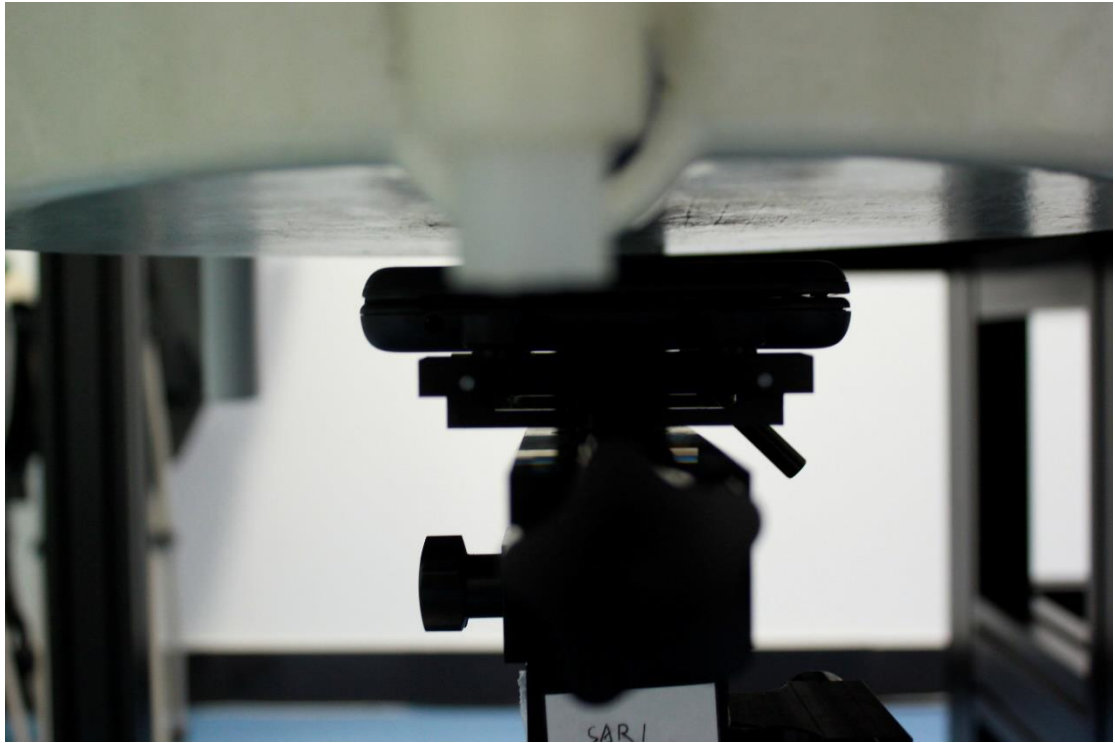


Picture 6: Front 10mm

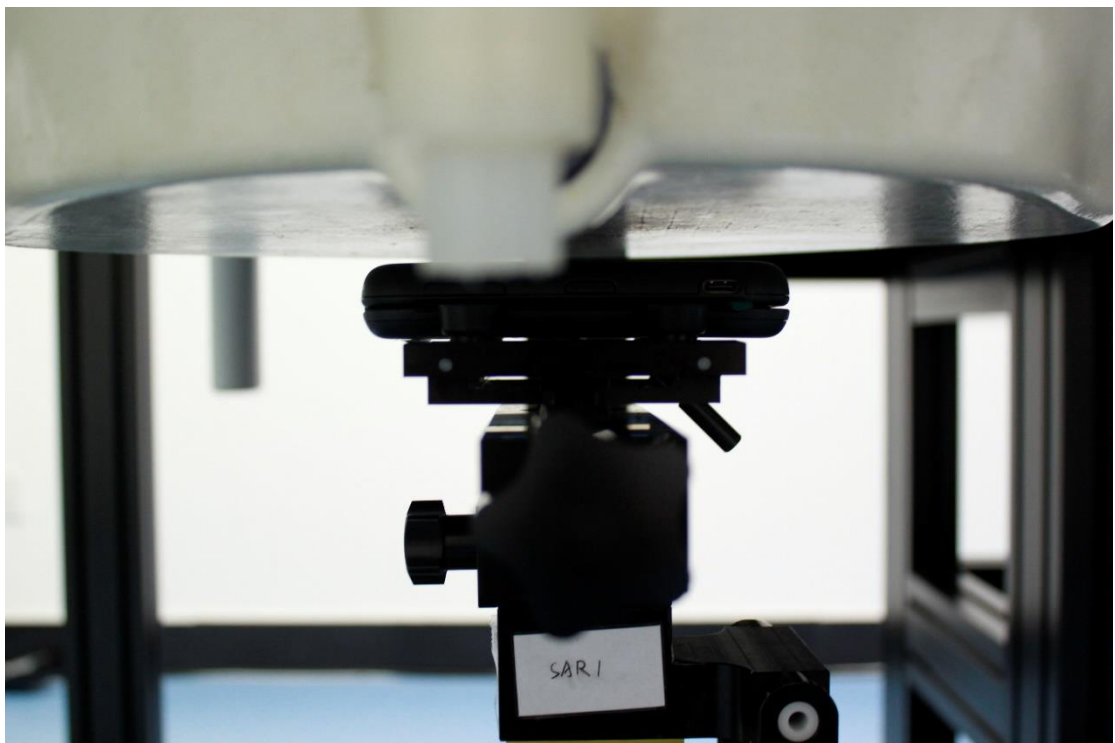


Picture 7: Rear 10mm

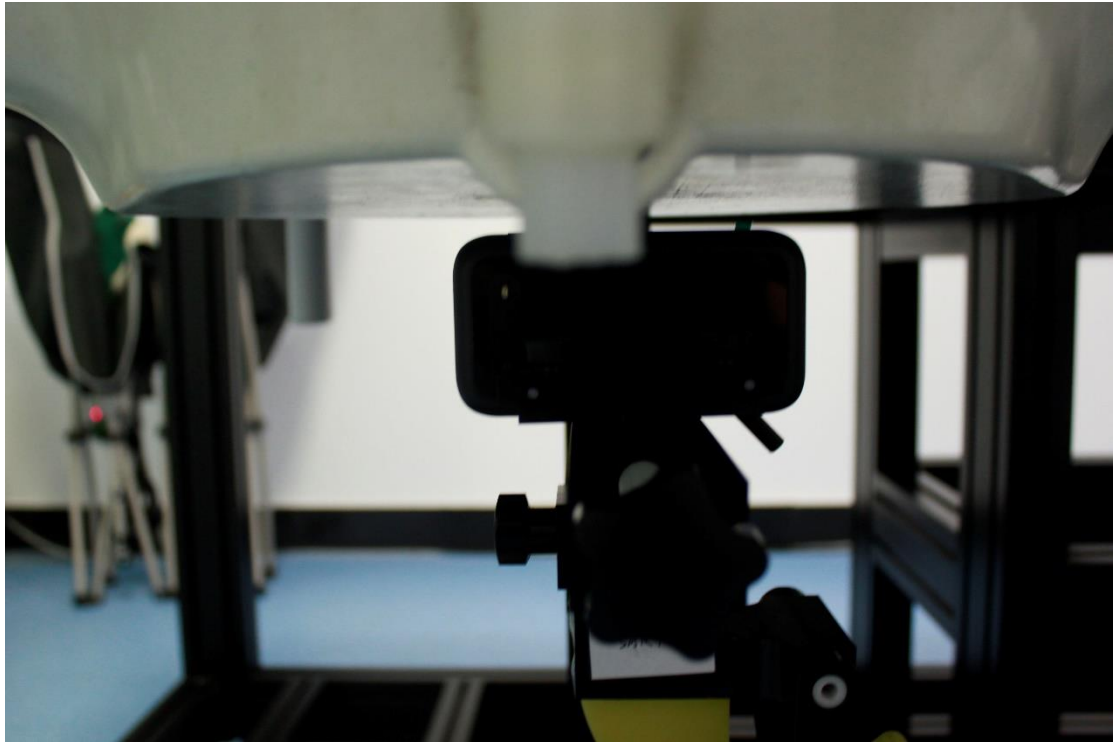


Picture 8: Left 10mm

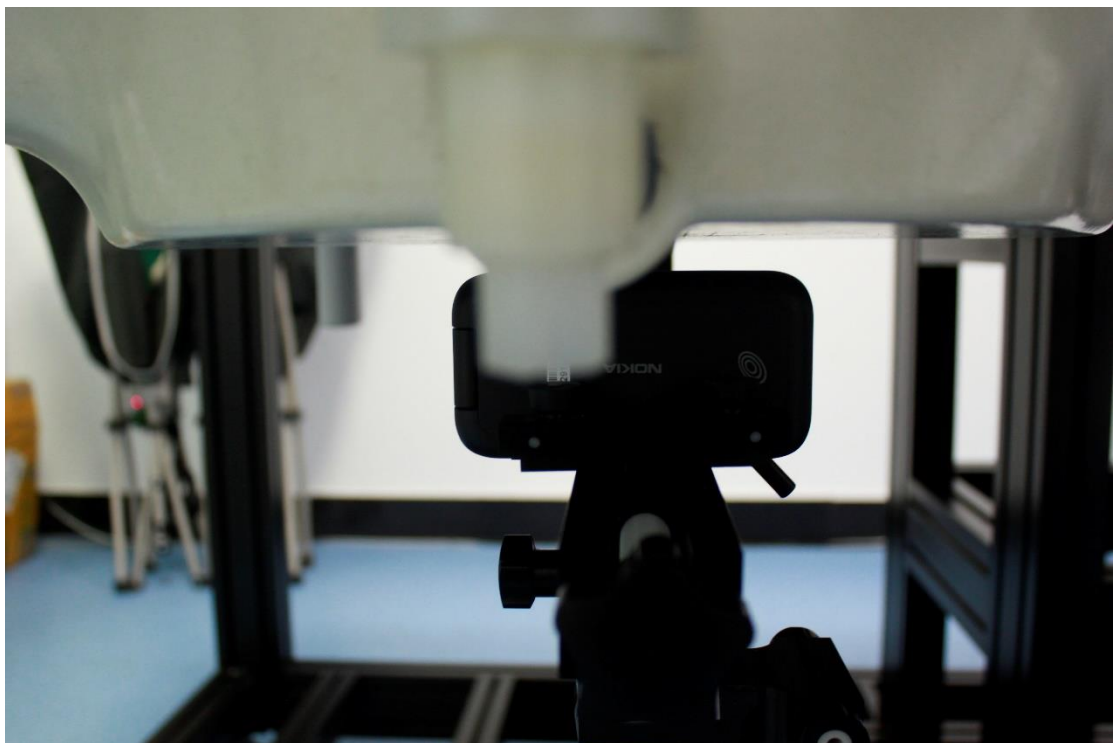


Picture 9: Right 10mm

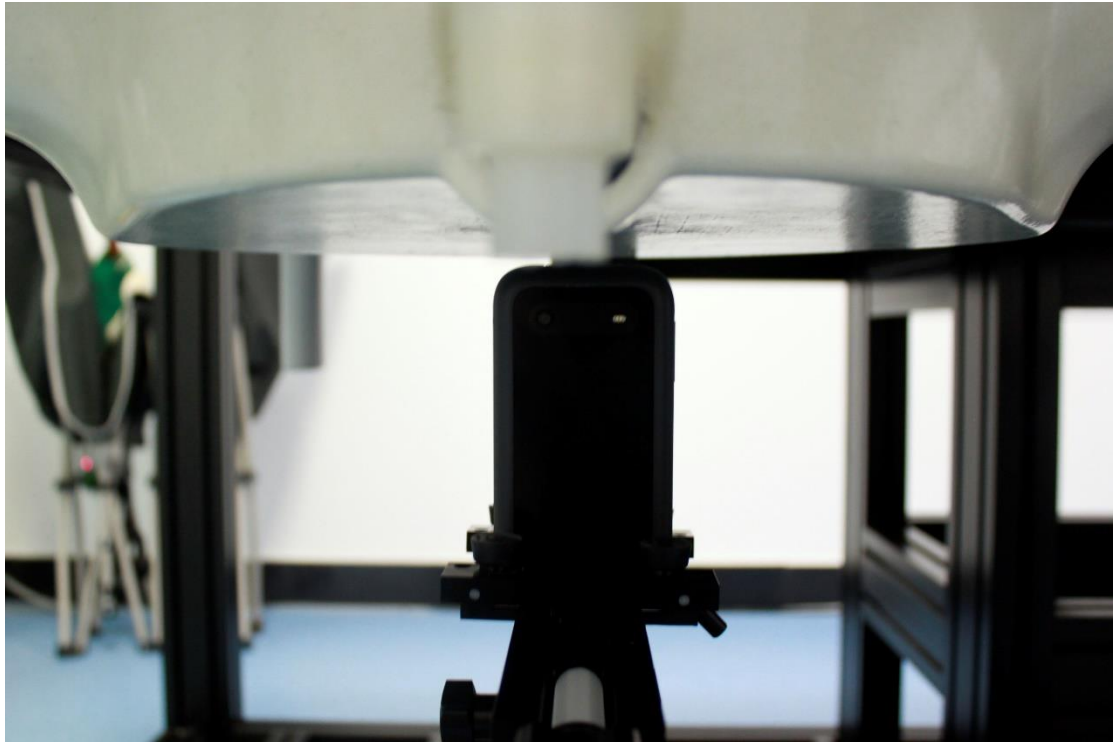

Picture 10: Top 10mm

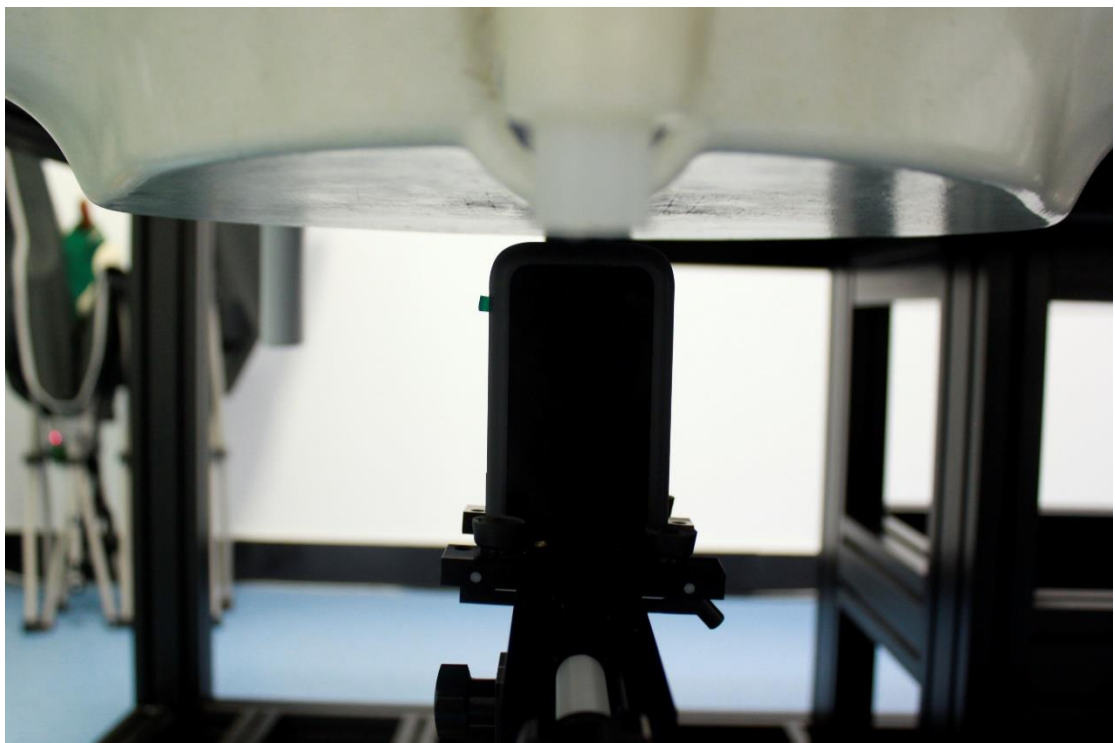


Picture 11: Bottom 10mm

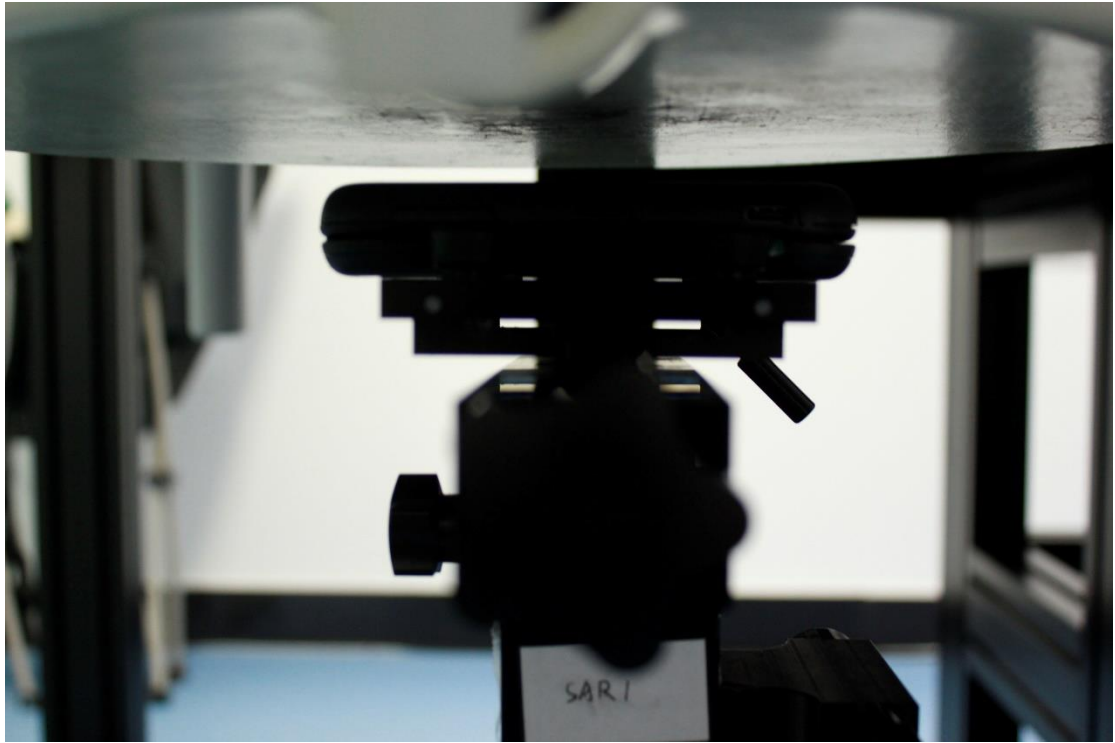


Picture 12: Rear 15mm




Picture 13: Front 15mm

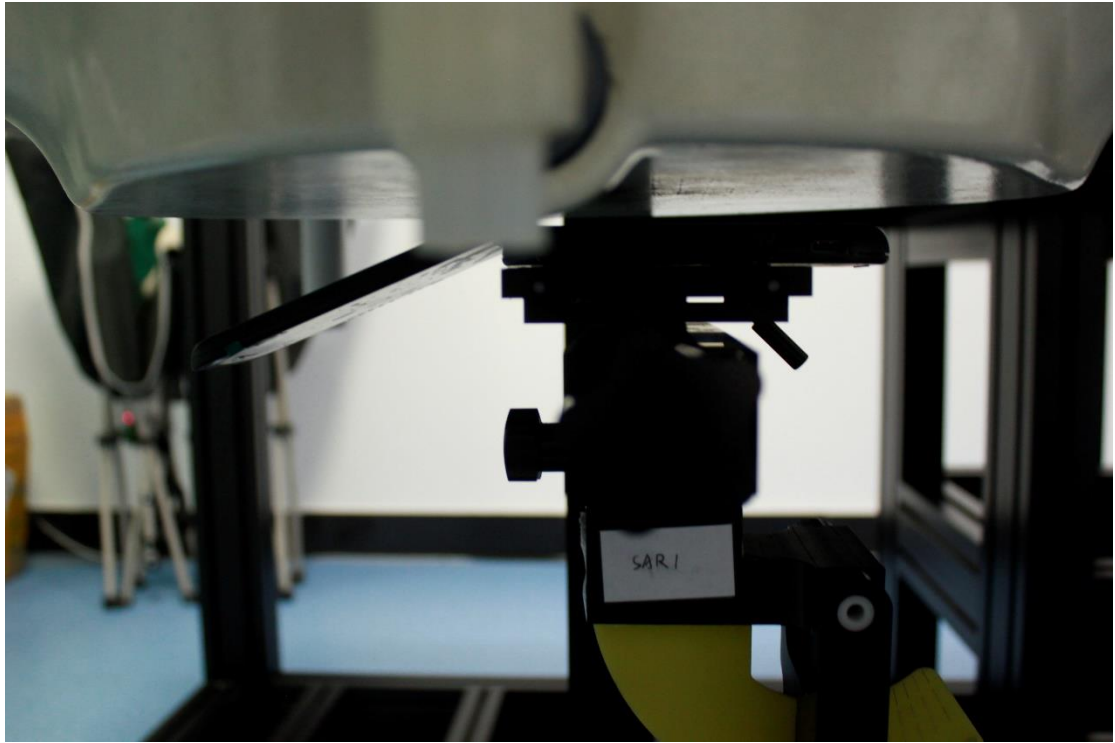


Picture 14: Rear 10mm unfold

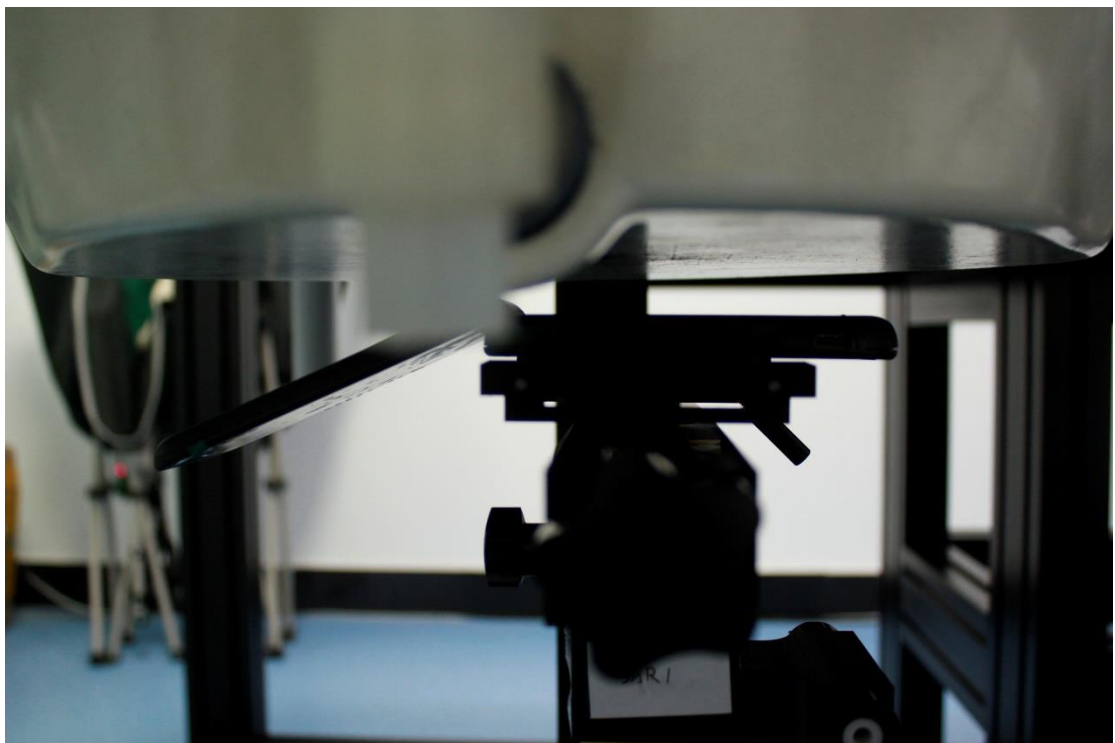


Picture 15: Rear 15mm unfold

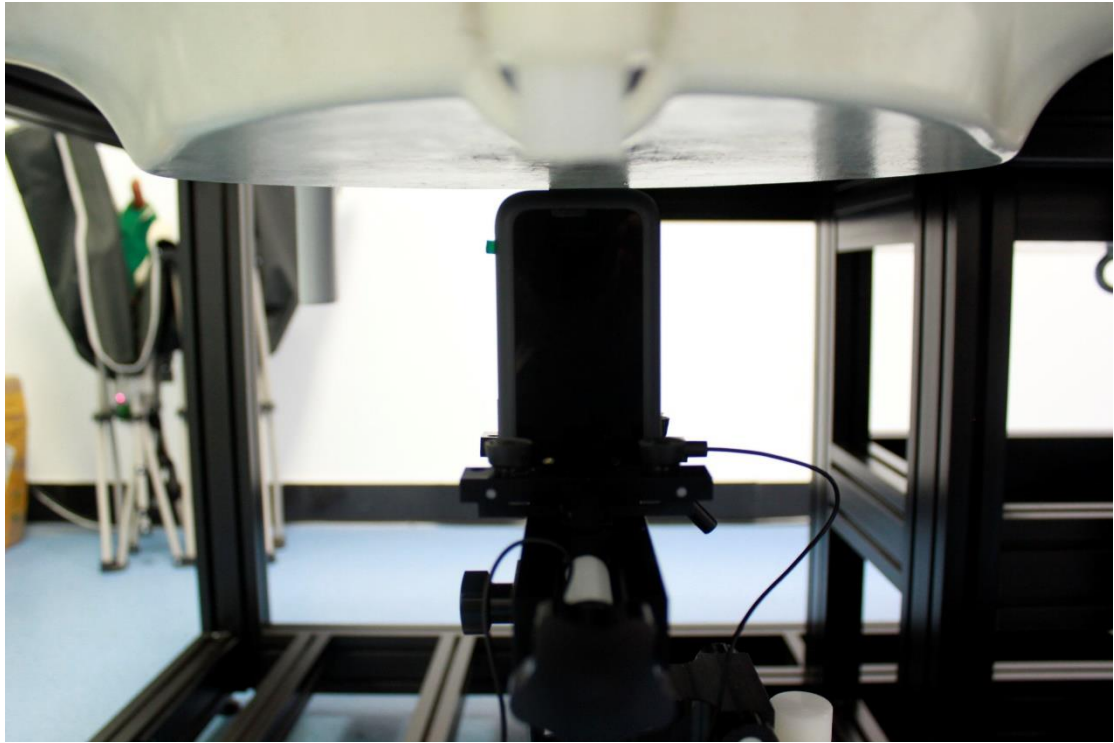


Picture 16: Bottom 10mm with headset

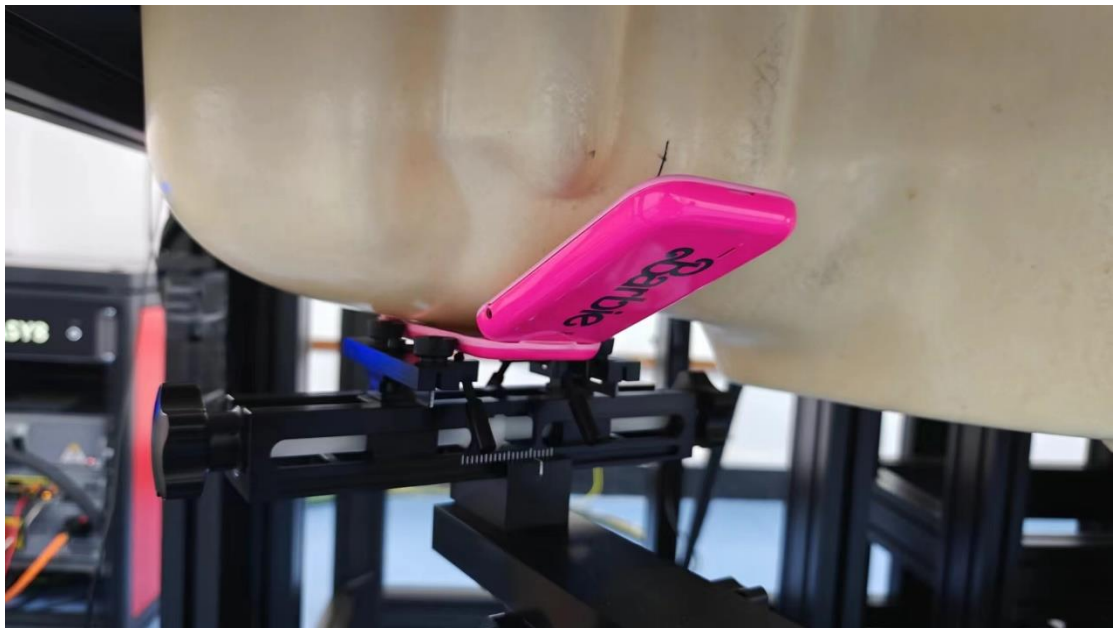

Picture 17: Sopt Check Right Head Touch Cheek Position

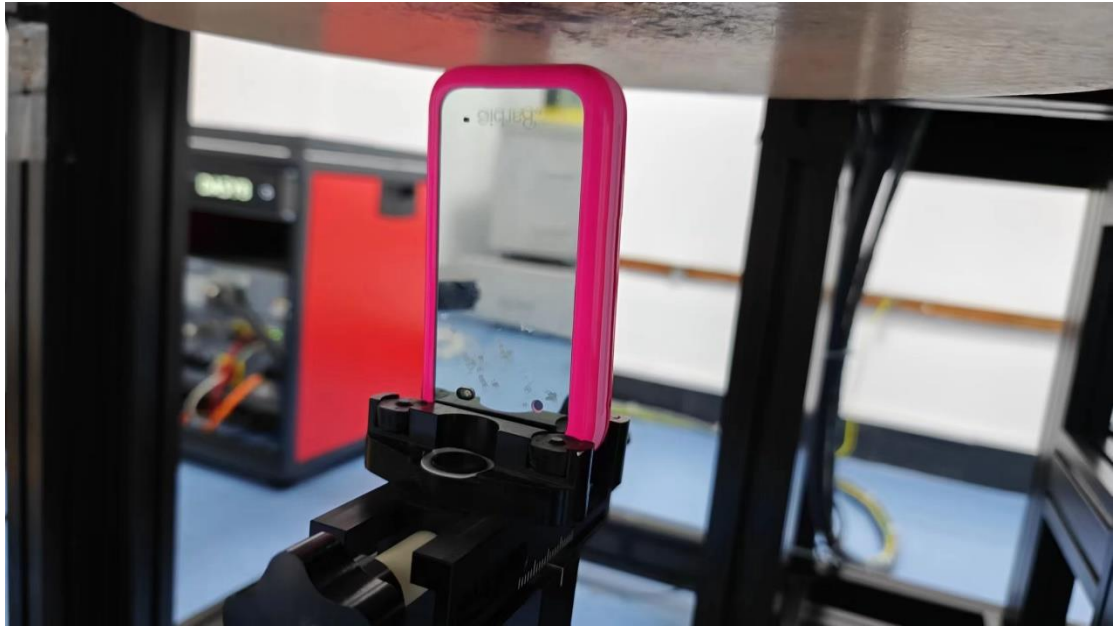

Picture 18: Sopt Check Bottom 10mm

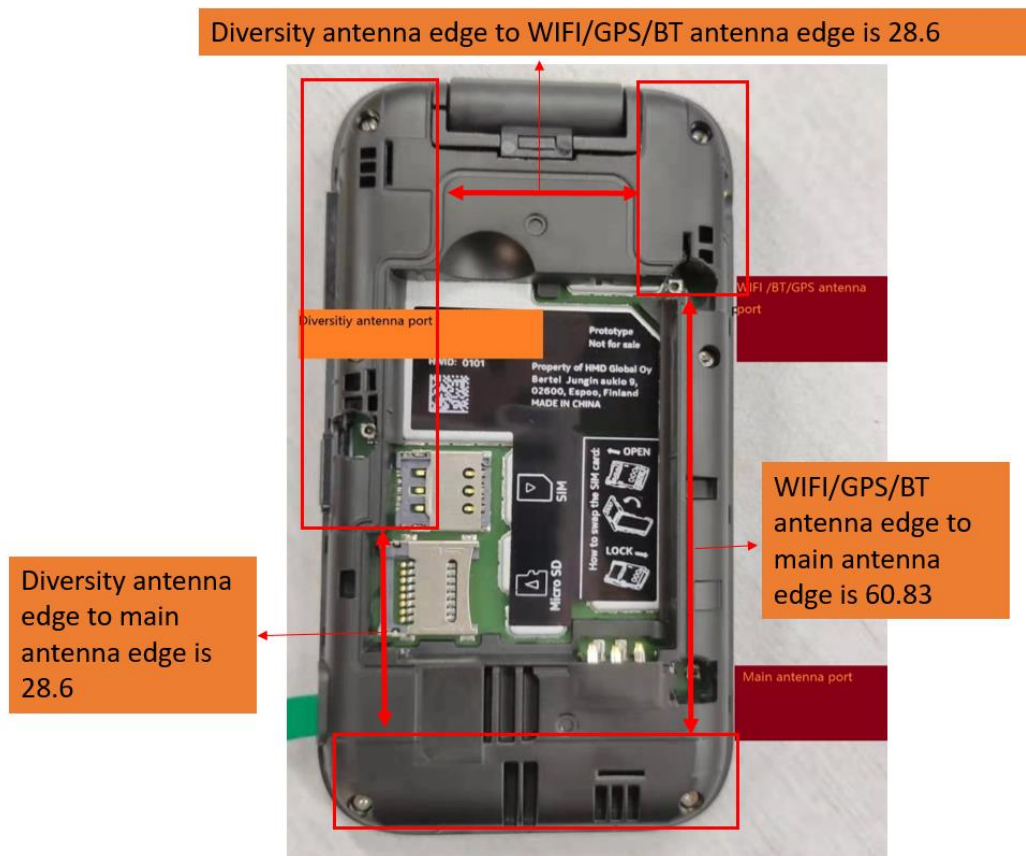

Picture 19: Antenna location