



TEST REPORT

No. I22Z60412-EMC01

for

HMD Global Oy

Smart Phone

Model Name: TA-1448

FCC ID: 2AJOTTA-1448

with

Hardware Version: v1.0

Software Version: 04US_1_150

Issued Date: 2022-05-31

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I22Z60412-EMC01	Rev.0	1 st edition	2022-05-23
I22Z60412-EMC01	Rev.1	Modified the "dB 礦"	2022-05-31

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATA	4
1.5. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	6
3.4. EUT SET-UPS	7
4. REFERENCE DOCUMENTS	8
4.1. REFERENCE DOCUMENTS FOR TESTING	8
5. LABORATORY ENVIRONMENT	9
6. SUMMARY OF TEST RESULTS	10
7. TEST EQUIPMENTS UTILIZED	11
ANNEX A: MEASUREMENT RESULTS	12
ANNEX B: PERSONS INVOLVED IN THIS TESTING	34

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

1.3. Testing Environment

Normal Temperature: 15-35° C

Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2022-05-09

Testing End Date: 2022-05-14

1.5. Signature




Zhang Ying

(Prepared this test report)



An Hui

(Reviewed this test report)



Zhang Xia

**Deputy Director of the laboratory
(Approved this test report)**

2. Client Information

2.1. Applicant Information

Company Name: HMD Global Oy
Address: Bertel Jungin aukio 9 02600 Espoo Finland
Contact: /
Telephone: /
Email: /

2.2. Manufacturer Information

Company Name: HMD Global Oy
Address: Bertel Jungin aukio 9 02600 Espoo Finland
Contact: /
Telephone: /
Email: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart Phone
Model Name	TA-1448
FCC ID	2AJOTTA-1448
Extreme vol. Limits	3.5VDC to 4.45VDC (nominal: 3.80VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Note
UT102a	357713910033742	v1.0	04US_1_150	First source
UT140a	357713910053294	v1.0	04US_1_150	Second source

*EUT ID: is used to identify the test sample in the lab internally.

Note:

Difference descripton:

	First source	Second source	Note
LCD	LCE	TXD	Same spec
Camera	Front camra 16M: Holitech Main camera 48M: TXD Ultrawide camera 5M: KingCome Depth camera 2M: C&T	Front camra 16M: DDHL Main camera 48M: HongShi Ultrawide camera 5M: LCE Depth camera 2M: NewSeasons	Same spec
Charger Circuit	SGM	southchip	Same spec
Memory	Longsys	Samsung	Same spec
MIC	AAC	Gettop	Same spec

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Battery	/	/
AE3	Charger	/	/
AE4	USB Cable	/	/
AE5	Headset	/	/

AE1

Model	HQ610
Manufacturer	Ningde Amperex Technology Limited
Capacity	4900mAh
Voltage	3.87V

AE2

Model	HQ610
-------	-------

Manufacturer	GUANGDONG FENGHUA NEW ENERGY CO., LTD
Capacity	4900mAh
Voltage	3.87V
AE3	
Model	Charger-AD-020US
Manufacturer	Aohai
AE4	
Model	USB-SHQ-A119A
Manufacturer	Saibao(Jiangxi)communication Industrial Co.,Ltd
AE5	
Model	JWEP239-H17H
Manufacturer	JUWEI ELECTRONICS CO.,LTD

*AE ID: is used to identify the test sample in the lab internally.

Note: The USB cables are shielded.

3.4. EUT set-ups

	EUT set-up No.	Combination of EUT and AE	Remarks
Set.11	UT102a + AE1 + AE3 + AE4		Charger
Set.12	UT102a + AE1 + AE4 + AE5		USB + FM
Set.11-2	UT140a + AE1 + AE3 + AE4		Charger
Set.12-2	UT140a + AE1 + AE4 + AE5		USB + FM

3.5. Test summary

EUT set-up No.	Test mode	Test result	
		Radiated Emission	Conducted Emission
Set.11	GSM850 idle	Pass	Pass
Set.11	WCDMA 850 idle	Pass	/
Set.11	LTE band 5 idle	Pass	/
Set.11	LTE band 12 idle	Pass	/
Set.11	LTE band 13 idle	Pass	/
Set.11	LTE band 17 idle	Pass	/
Set.11	LTE band 26 idle	Pass	/
Set.11	LTE band 71 idle	Pass	/
Set.12	USB + FM	Pass	Pass
Set.11-2	GSM850 idle	Pass	Pass
Set.12-2	USB + FM	Pass	Pass

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2021
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters × 17meters × 10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 M
Ground system resistance	< 4
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 M
Ground system resistance	< 4

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL (huayuan North Road)
2	Conducted Emission	15.107(a)	B.2	P	CTTL (huayuan North Road)

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATI ON INTERVAL
1	LISN	ENV216	101200	R&S	2022-05-30	1 Year
2	Test Receiver	ESCI 3	100344	R&S	2023-03-21	1 year
3	Test Receiver	ESW44	103015	R&S	2023-03-08	1 year
4	EMI Antenna	VULB 9163	302	Schwarzbeck	2022-12-28	1 Year
5	EMI Antenna	3115	00167250	ETS-Lindgren	2022-07-01	1 year
6	Universal Radio Communication Tester	CMW500	116588	R&S	2022-12-20	1 Year
7	Signal Generator	SMBV100A	260613	R&S	2023-01-09	1 year
9	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
10	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
11	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A	N/A
12	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3/10 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode.

The EUT was tested while operating in licensed band Rx mode with FM/Camera/MP3. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

The model of the PC is M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V/m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty:

Frequency range	Measurement uncertainty
30MHz-1GHz	5.18dB, k=2
1GHz-18GHz	5.54dB, k=2

Measurement results for Set.11, LTE band 13 idle(worst case):
Charging Mode/QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
43.968000	9.06	29.54	20.48	175.0	H	135.0
61.719000	10.64	29.54	18.90	275.0	V	187.0
87.424000	10.84	29.54	18.70	175.0	V	251.0
124.769000	9.94	33.06	23.12	125.0	V	0.0
164.442000	18.55	33.06	14.51	125.0	V	135.0
362.807000	12.04	35.56	23.52	186.0	V	135.0

Measurement results for Set.11, LTE band 12 idle(worst case):
Charging Mode/Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17804.840	41.1	-29.6	46.0	24.8	54.0	12.9	V
17805.180	40.8	-29.6	46.0	24.5	54.0	13.2	V
17372.020	40.7	-30.0	43.4	27.3	54.0	13.3	H
17782.060	40.7	-29.9	46.0	24.6	54.0	13.3	H
17813.680	40.6	-29.6	46.0	24.3	54.0	13.4	V
17714.740	40.6	-29.7	45.2	25.1	54.0	13.4	H

Measurement results for Set.11, LTE band 17 idle(worst case):
Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17940.160	54.2	-28.9	46.7	36.5	74.0	19.8	H
17240.100	52.5	-30.0	43.4	39.2	74.0	21.5	H
17621.240	52.4	-29.4	45.2	36.6	74.0	21.6	V
17714.060	52.1	-29.7	45.2	36.6	74.0	21.9	V
17350.260	52.1	-30.0	43.4	38.7	74.0	21.9	H
17905.820	52.0	-29.3	46.0	35.4	74.0	22.0	V

Measurement results for Set.12, FM + USB,:
Charging Mode/QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
39.991000	20.10	29.54	9.44	225.0	V	71.0
151.056000	22.86	33.06	10.20	100.0	V	2.0
170.359000	21.09	33.06	11.97	125.0	V	2.0
196.355000	22.50	33.06	10.56	98.0	V	354.0
557.098000	27.11	35.56	8.45	275.0	V	2.0
590.757000	25.58	35.56	9.98	225.0	V	1.0

Charging Mode/Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17799.060	41.3	-29.9	46.0	25.2	54.0	12.7	H
17610.020	41.3	-29.5	45.2	25.6	54.0	12.7	V
17812.660	41.3	-29.6	46.0	25.0	54.0	12.7	H
17908.540	41.2	-29.3	46.0	24.6	54.0	12.8	H
17949.340	41.2	-28.9	46.7	23.5	54.0	12.8	V
17643.680	41.2	-29.6	45.2	25.6	54.0	12.8	H

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17837.140	53.4	-29.7	46.0	37.1	74.0	20.6	H
17322.040	53.2	-29.7	43.4	39.5	74.0	20.8	H
17480.480	53.0	-29.8	44.4	38.4	74.0	21.0	V
17700.460	52.8	-29.7	45.2	37.3	74.0	21.2	V
17817.760	52.7	-29.6	46.0	36.4	74.0	21.3	V
17259.140	52.7	-30.0	43.4	39.4	74.0	21.3	H

Sample:

17837.140MHz

Result(53.4 dBμV/m) = P_{Mea} (37.1 dBμV/m) + G_A (46.0 dB/m) + G_{PL} (-29.7dB)

Measurement results for Set.11-2, GSM850MHz idle:
Charging Mode/QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
57.160000	12.15	29.54	17.39	325.0	V	45.0
89.364000	16.14	33.06	16.92	109.0	V	277.0
101.392000	8.54	33.06	24.52	125.0	V	303.0
135.730000	13.44	33.06	19.62	186.0	V	104.0
143.587000	12.60	33.06	20.46	275.0	V	135.0
158.040000	21.45	33.06	11.61	100.0	V	1.0

Measurement results for Set.11-2, GSM850MHz idle:
Charging Mode/Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17962.600	39.7	-29.1	46.7	22.1	54.0	14.3	V
17946.620	39.6	-28.9	46.7	21.9	54.0	14.4	V
17942.880	39.6	-28.9	46.7	21.9	54.0	14.4	H
17953.080	39.5	-28.9	46.7	21.8	54.0	14.5	V
17961.920	39.4	-29.1	46.7	21.8	54.0	14.6	V
17964.640	39.4	-29.1	46.7	21.8	54.0	14.6	H

Measurement results for Set.11-2, GSM850MHz idle:
Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17964.300	52.0	-29.1	46.7	34.4	74.0	22.0	V
17943.220	51.8	-28.9	46.7	34.1	74.0	22.2	H
17784.440	51.3	-29.9	46.0	35.2	74.0	22.7	V
17964.980	50.9	-29.1	46.7	33.3	74.0	23.1	V
17976.200	50.8	-29.1	46.7	33.2	74.0	23.2	V
17446.480	50.7	-29.9	44.4	36.2	74.0	23.3	V

Measurement results for Set.12-2, FM + USB,:
Charging Mode/QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
36.693000	18.97	29.54	10.57	225.0	V	303.0
77.627000	16.49	29.54	13.05	175.0	V	124.0
114.972000	19.02	33.06	14.04	98.0	V	162.0
137.767000	21.38	33.06	11.68	125.0	V	161.0
264.061000	14.82	35.56	20.74	186.0	H	71.0
608.023000	25.61	35.56	9.95	225.0	V	0.0

Charging Mode/Average detector


Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17949.340	40.9	-28.9	46.7	23.2	54.0	13.1	H
17987.420	40.5	-29.1	46.7	22.9	54.0	13.5	H
17961.580	40.4	-29.1	46.7	22.8	54.0	13.6	V
17990.140	40.4	-29.1	46.7	22.8	54.0	13.6	V
17566.840	40.2	-29.8	45.2	24.7	54.0	13.8	H
17957.160	40.2	-28.9	46.7	22.5	54.0	13.8	V

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.180	52.3	-29.1	46.7	34.7	74.0	21.7	H
17827.620	51.9	-29.7	46.0	35.6	74.0	22.1	H
17522.980	51.7	-29.3	44.4	36.7	74.0	22.3	V
17677.340	51.6	-29.9	45.2	36.2	74.0	22.4	V
17952.400	51.5	-28.9	46.7	33.8	74.0	22.5	V
17546.440	51.5	-29.5	44.4	36.6	74.0	22.5	V

Measurement results for Set.11, GSM850 idle:


Full Spectrum

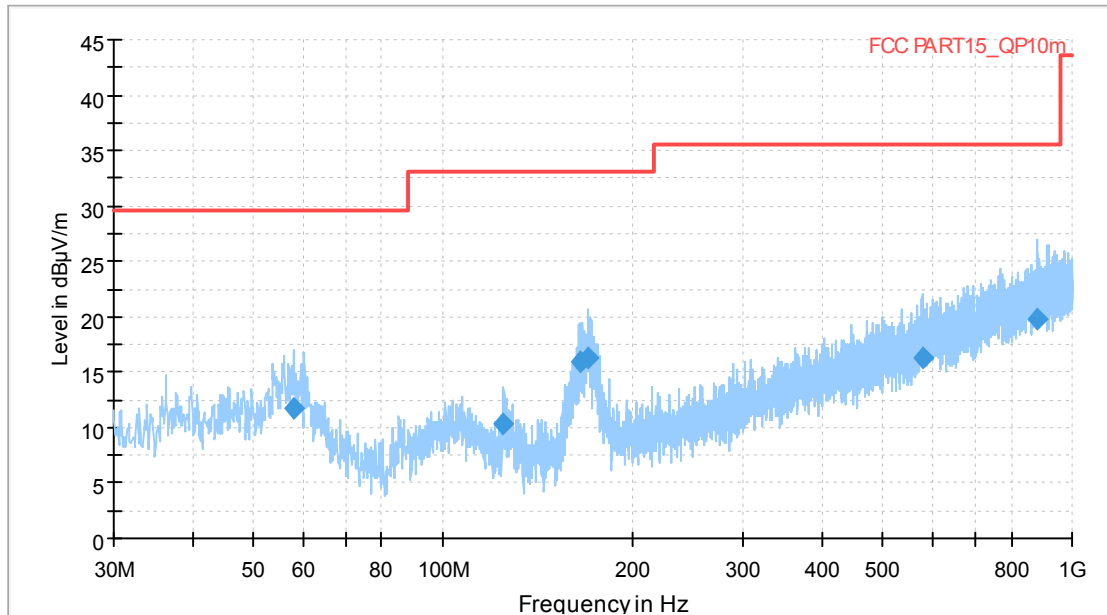

- Preview Result 1-PK+ [Preview Result 1.Result:1]
- * Critical_Freqs PK+ [Critical_Freqs.Result:4]
- FCC PART15_QP10m [..]
- ◆ Final_Result QPK [Final_Result.Result:4]

Fig A.1 Radiated Emission from 30MHz to 1GHz

Full Spectrum

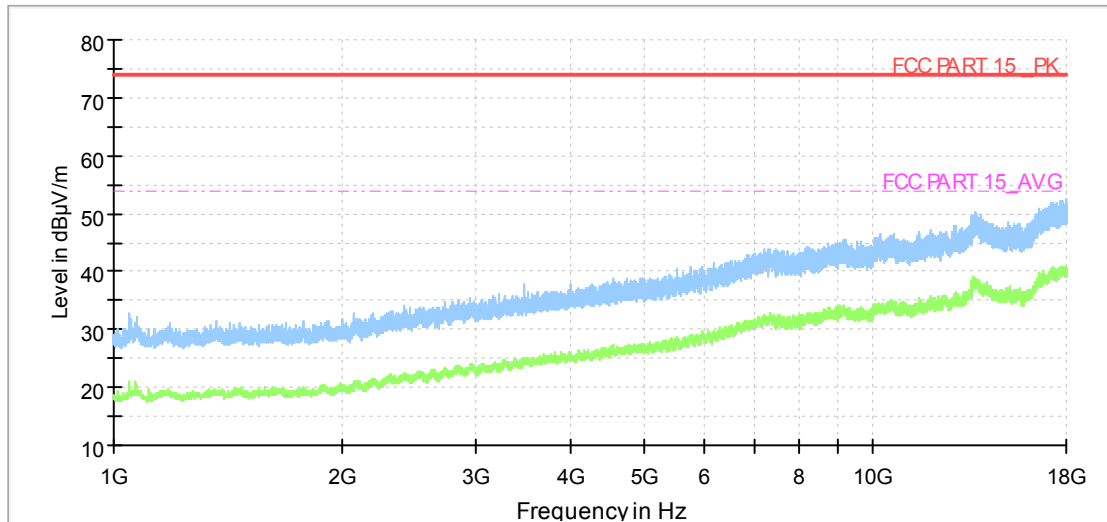

- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- * Critical_Freqs AVG [Critical_Freqs.Result:5]
- * Critical_Freqs PK+ [Critical_Freqs.Result:4]
- FCC PART 15_PK [..]
- FCC PART 15_AVG [..]
- ◆ Final_Result PK+ [Final_Result.Result:4]
- ◆ Final_Result AVG [Final_Result.Result:5]

Fig A.2 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.11, WCDMA 850 idle:

Full Spectrum

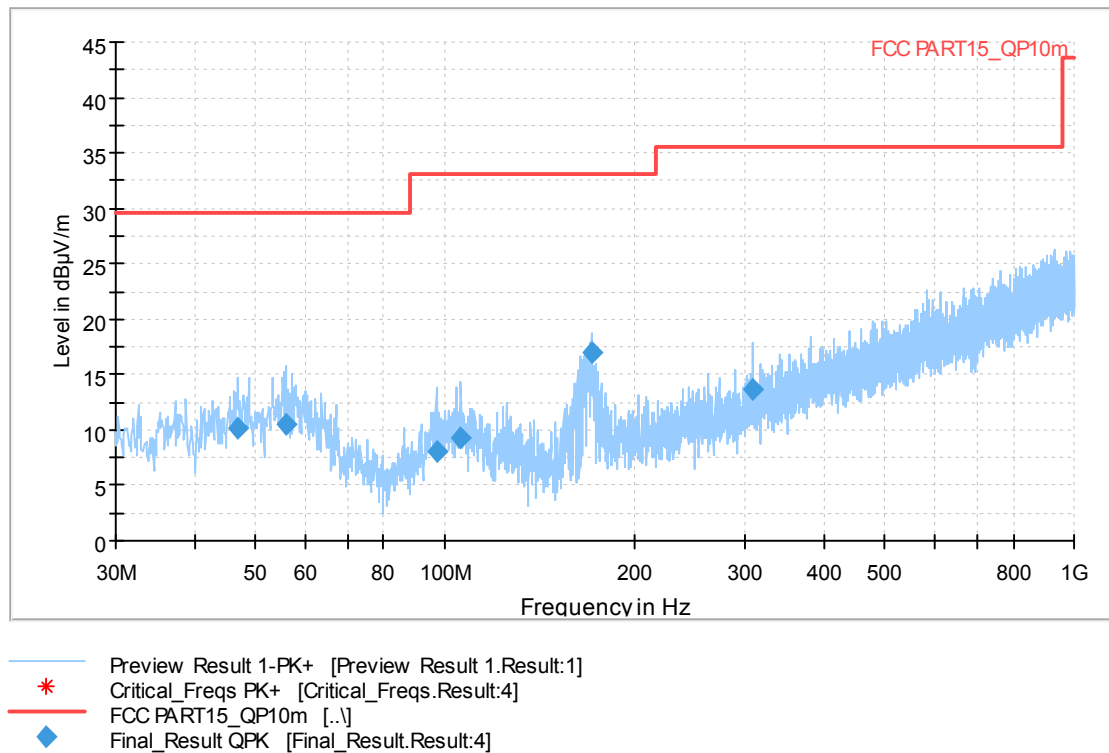


Fig A.3 Radiated Emission from 30MHz to 1GHz

Full Spectrum

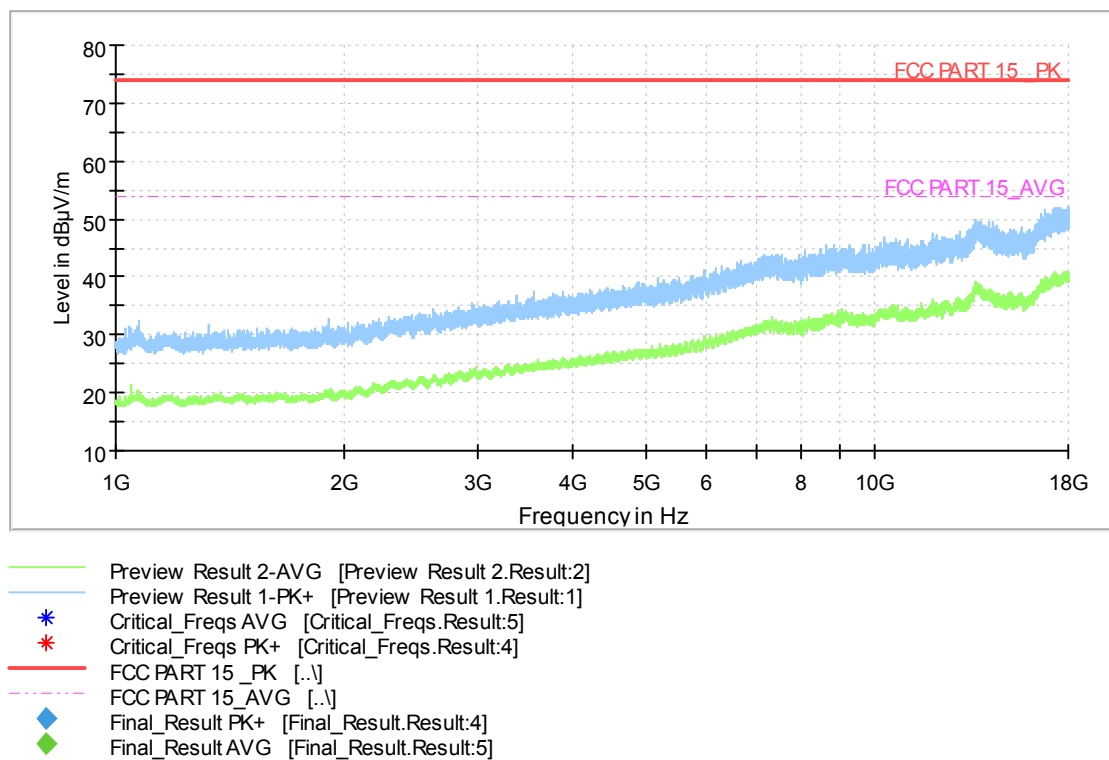


Fig A.4 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.11, LTE band 5 idle:

Full Spectrum

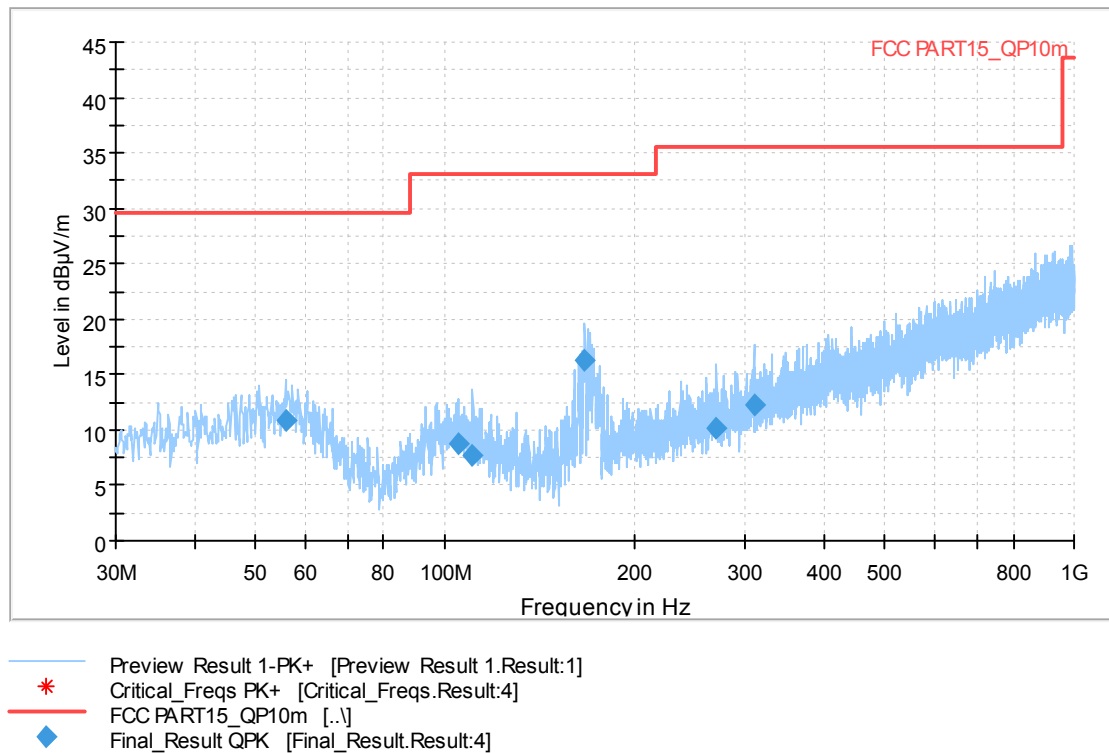


Fig A.5 Radiated Emission from 30MHz to 1GHz

Full Spectrum

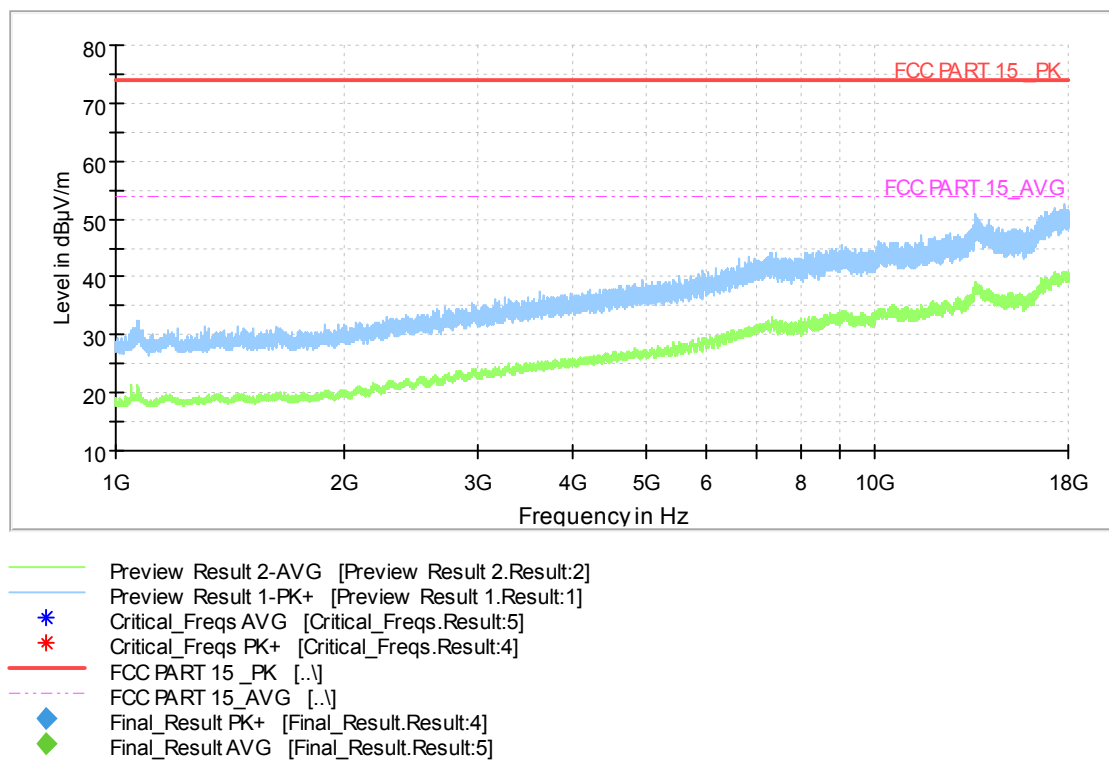


Fig A.6 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.11, LTE band 12 idle:

Full Spectrum

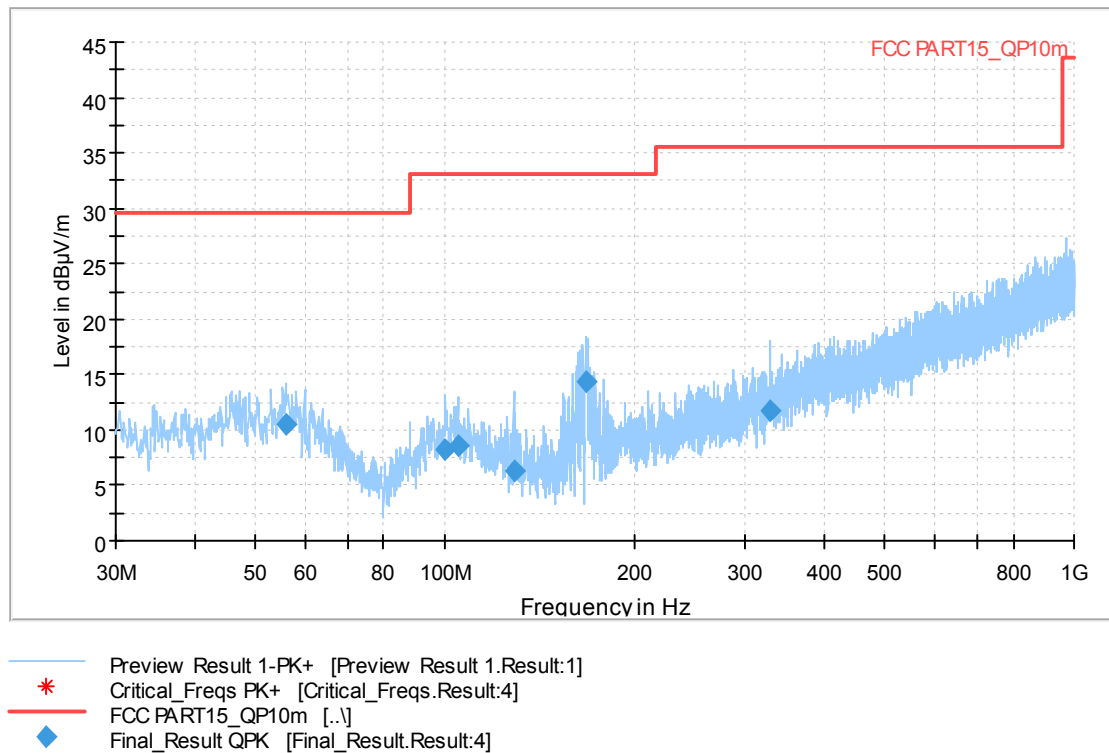


Fig A.7 Radiated Emission from 30MHz to 1GHz

Full Spectrum

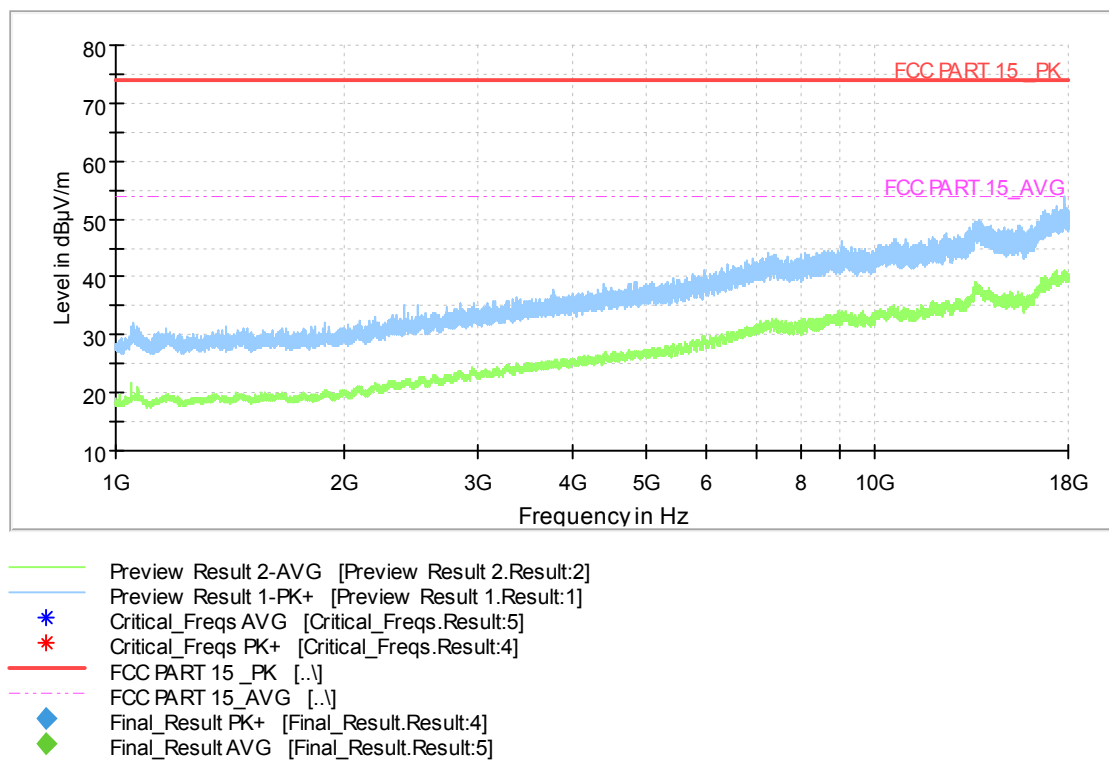


Fig A.8 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.11, LTE band 13 idle:

Full Spectrum

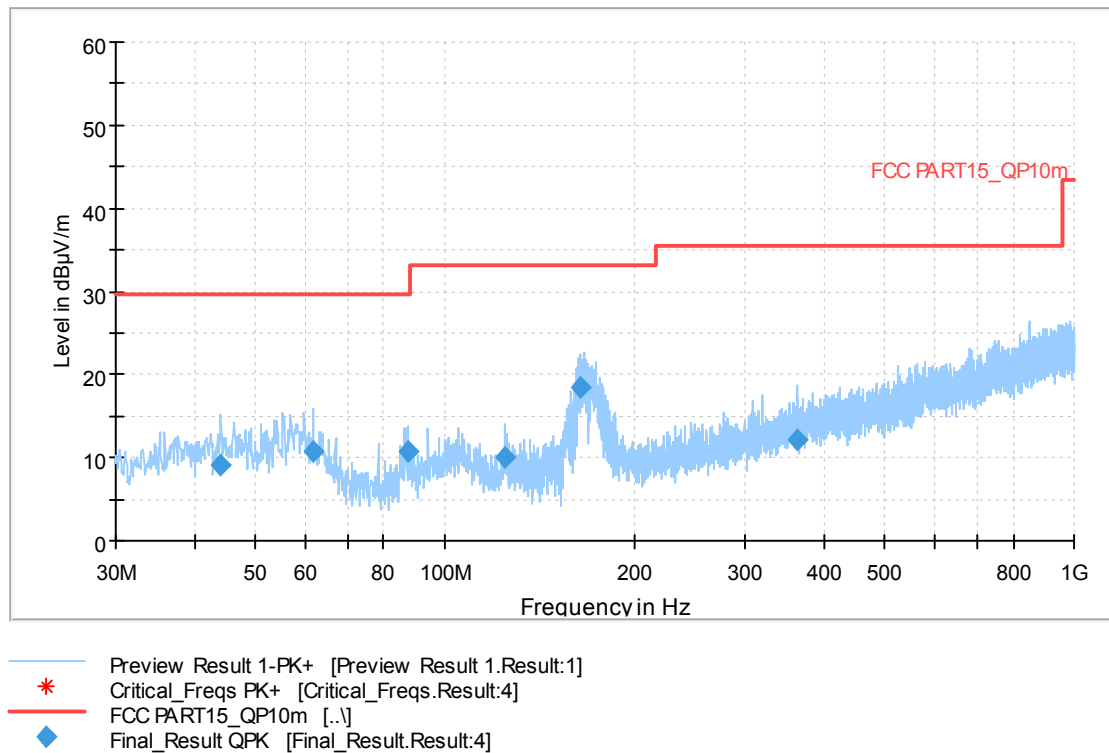


Fig A.9 Radiated Emission from 30MHz to 1GHz

Full Spectrum

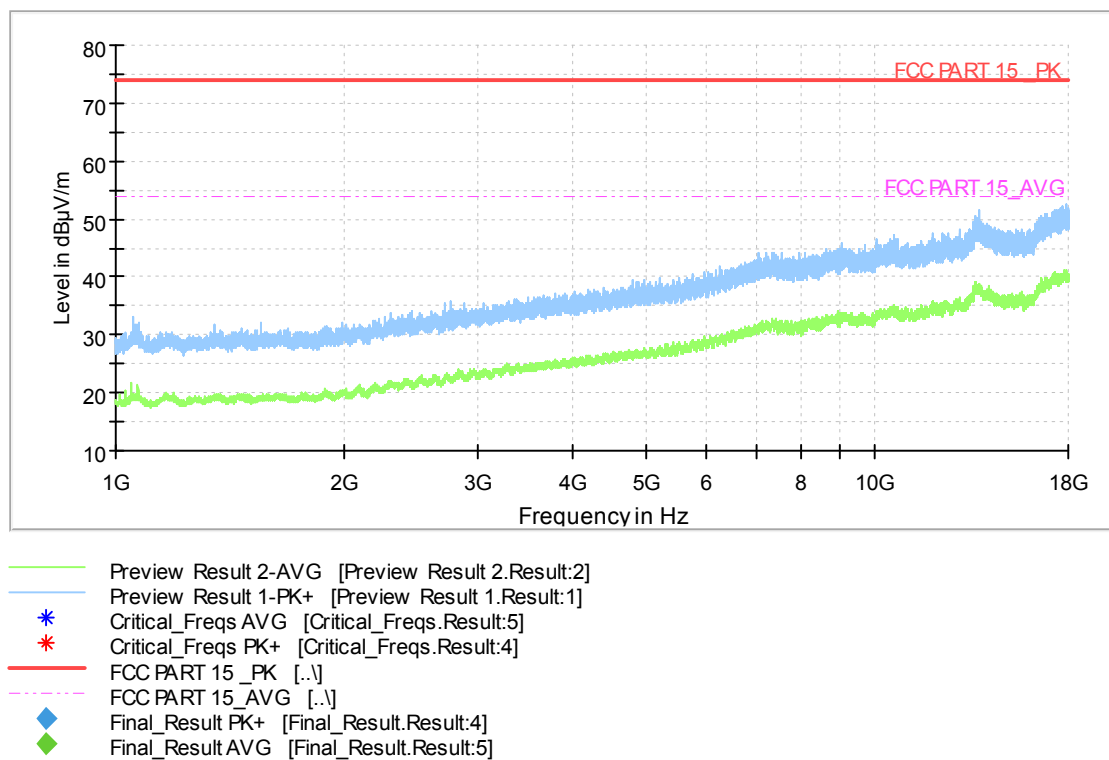


Fig A.10 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.11, LTE band 17 idle:

Full Spectrum

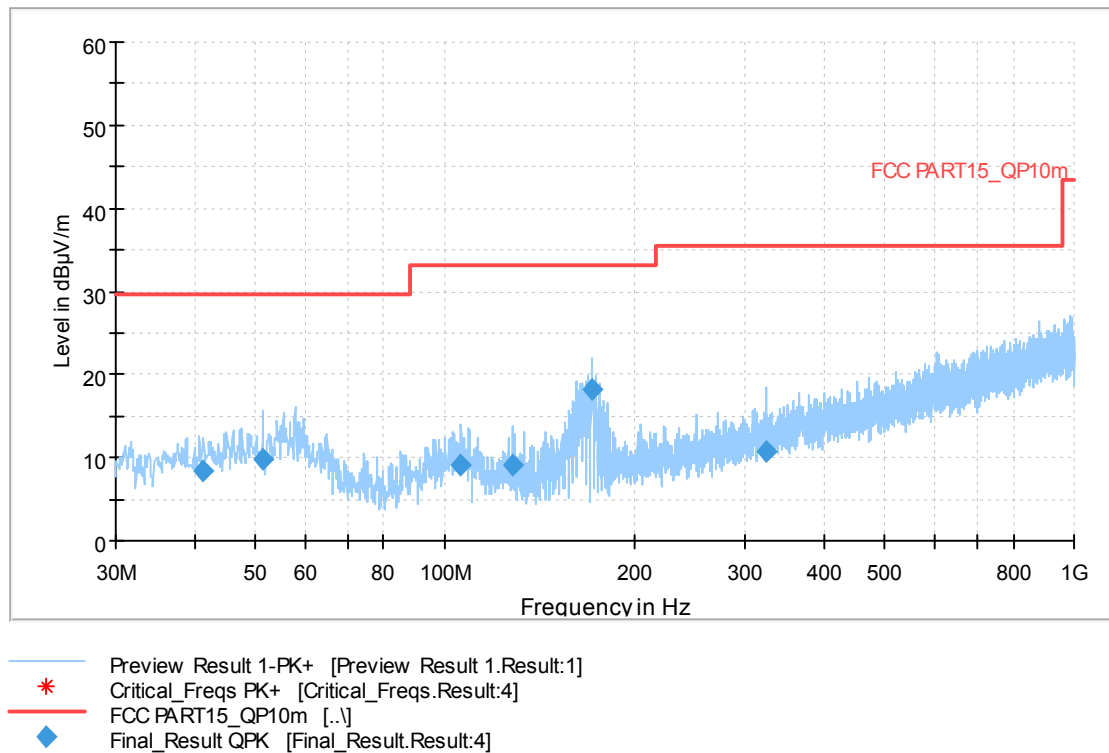


Fig A.11 Radiated Emission from 30MHz to 1GHz

Full Spectrum

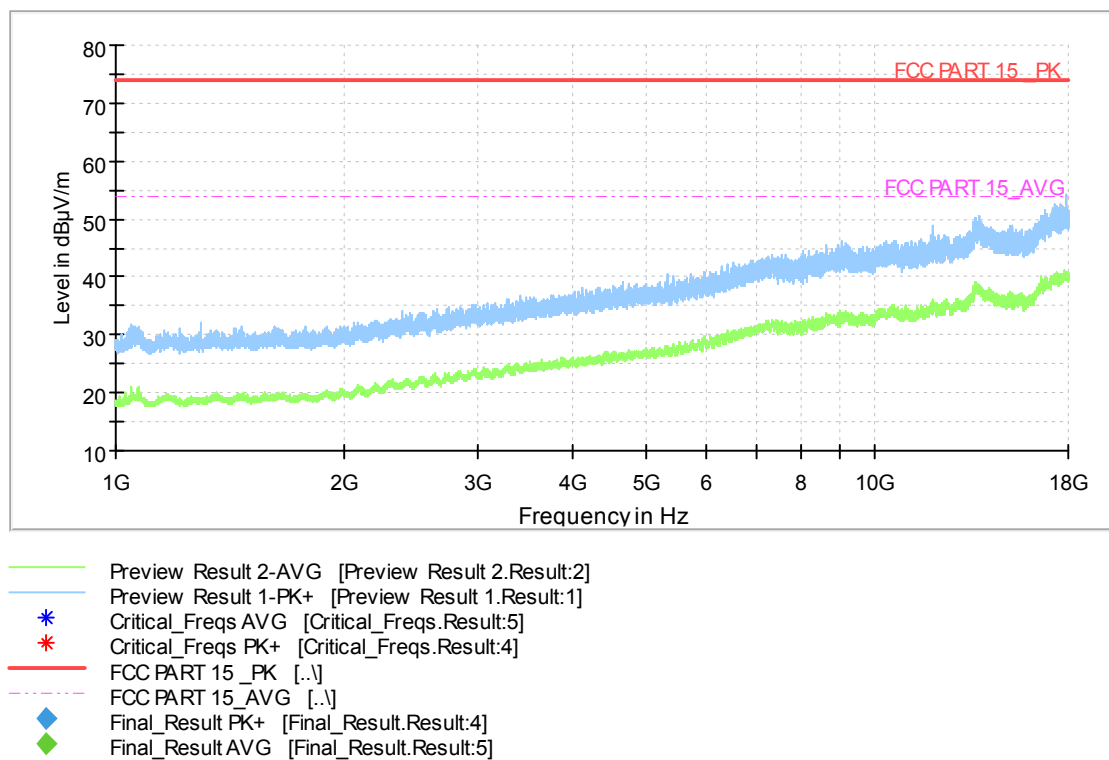


Fig A.12 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.11, LTE band 26 idle:

Full Spectrum

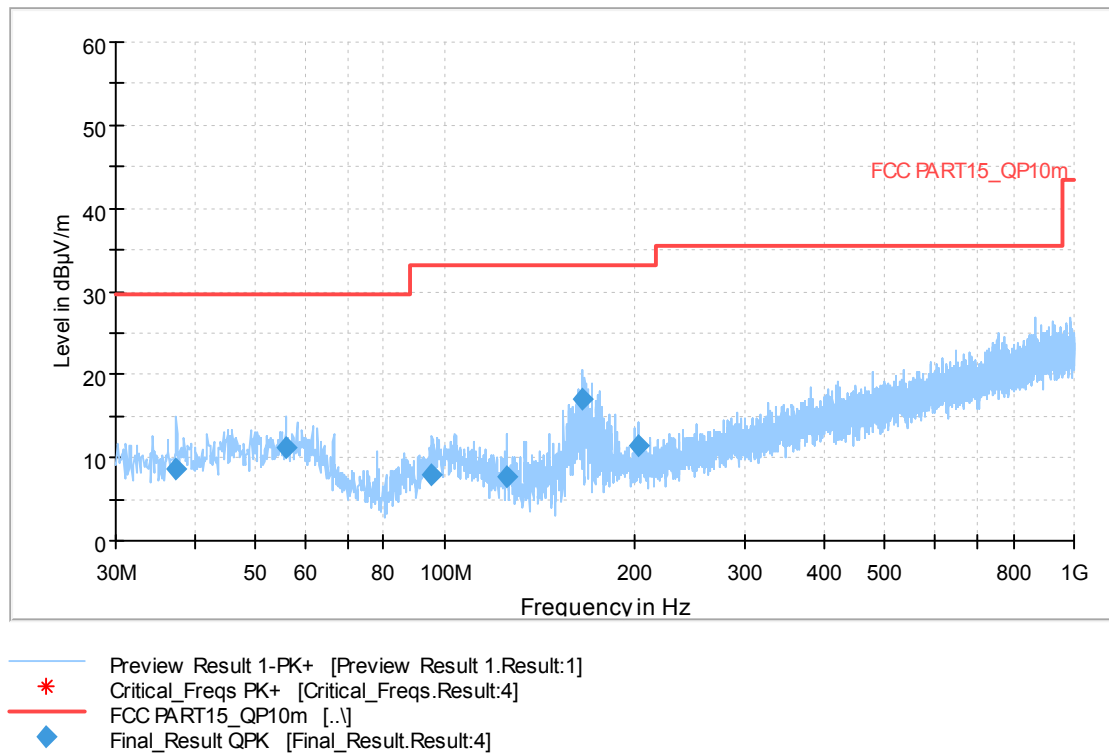


Fig A.13 Radiated Emission from 30MHz to 1GHz

Full Spectrum

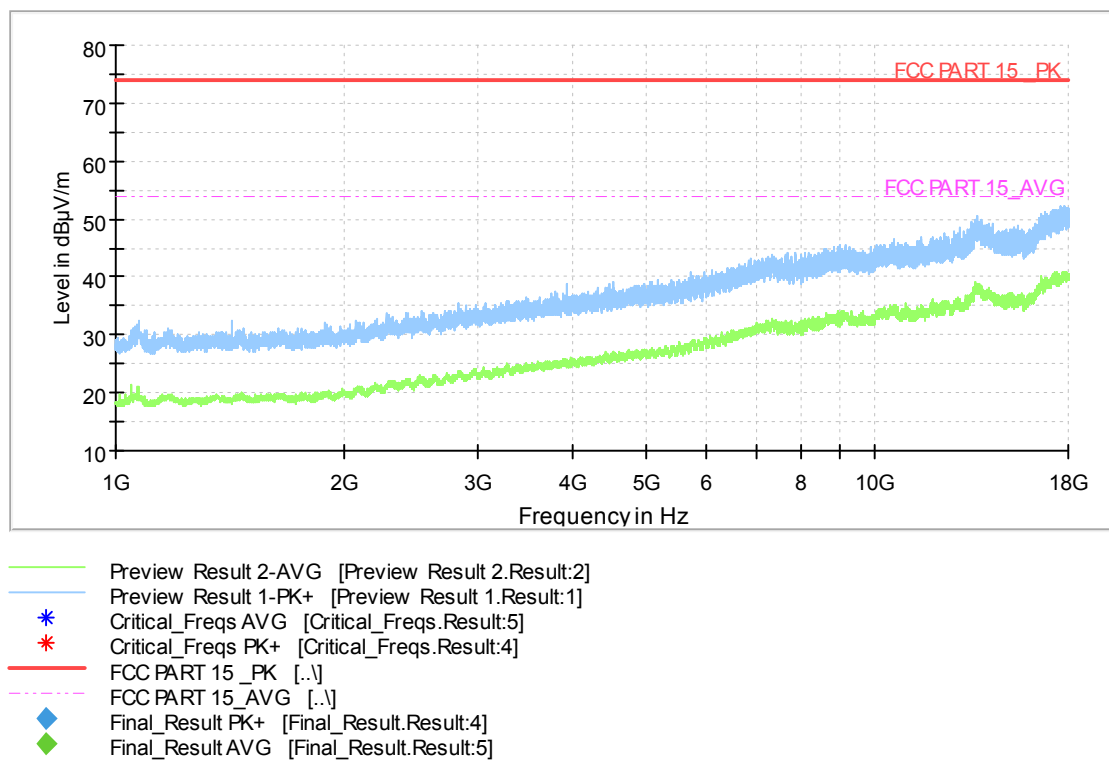


Fig A.14 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.11, LTE band 71 idle:

Full Spectrum

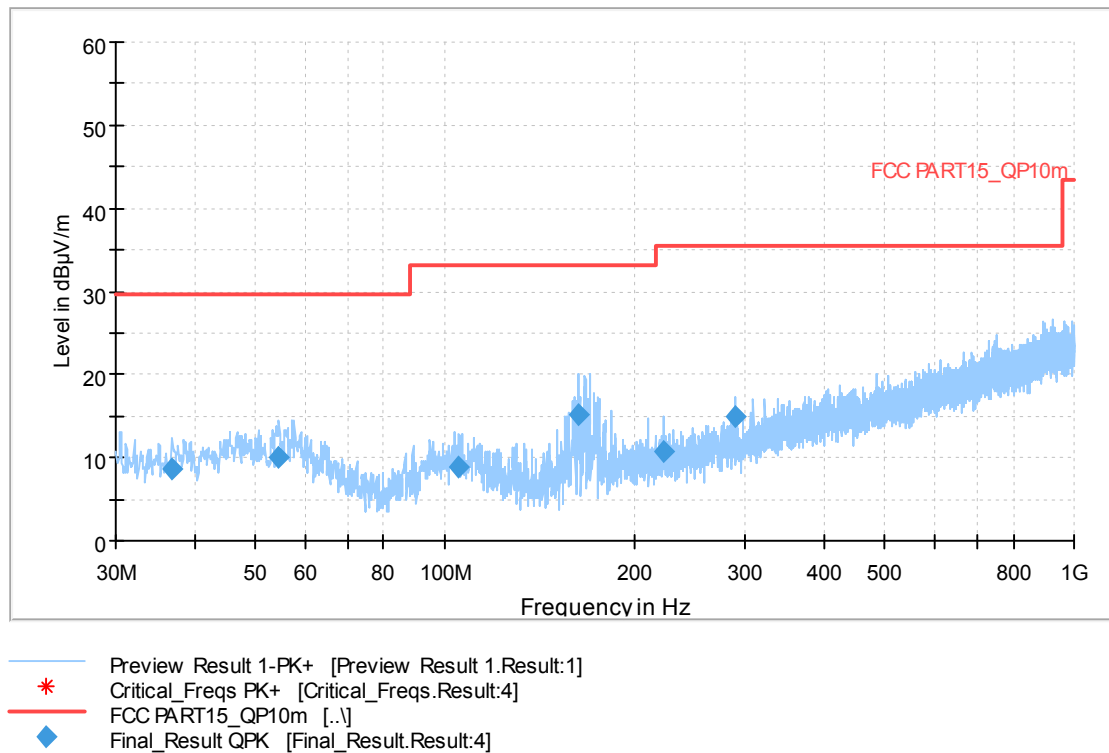


Fig A.15 Radiated Emission from 30MHz to 1GHz

Full Spectrum

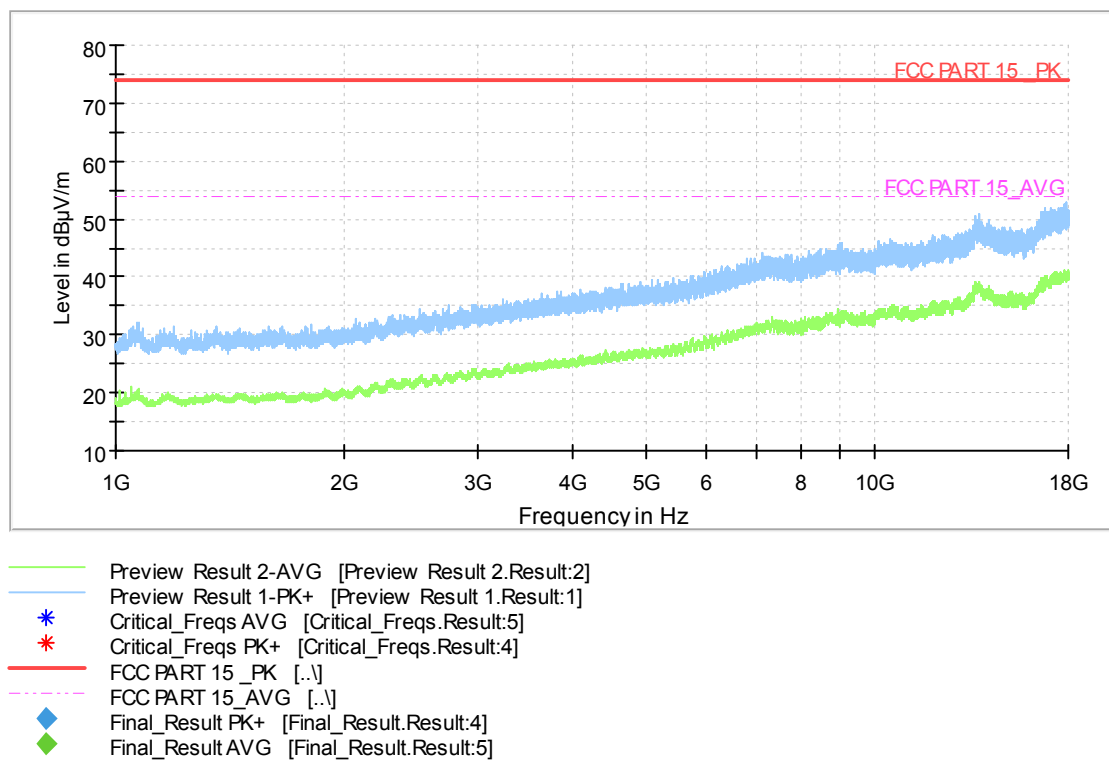


Fig A.16 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.12, USB transfer + FM:

Full Spectrum

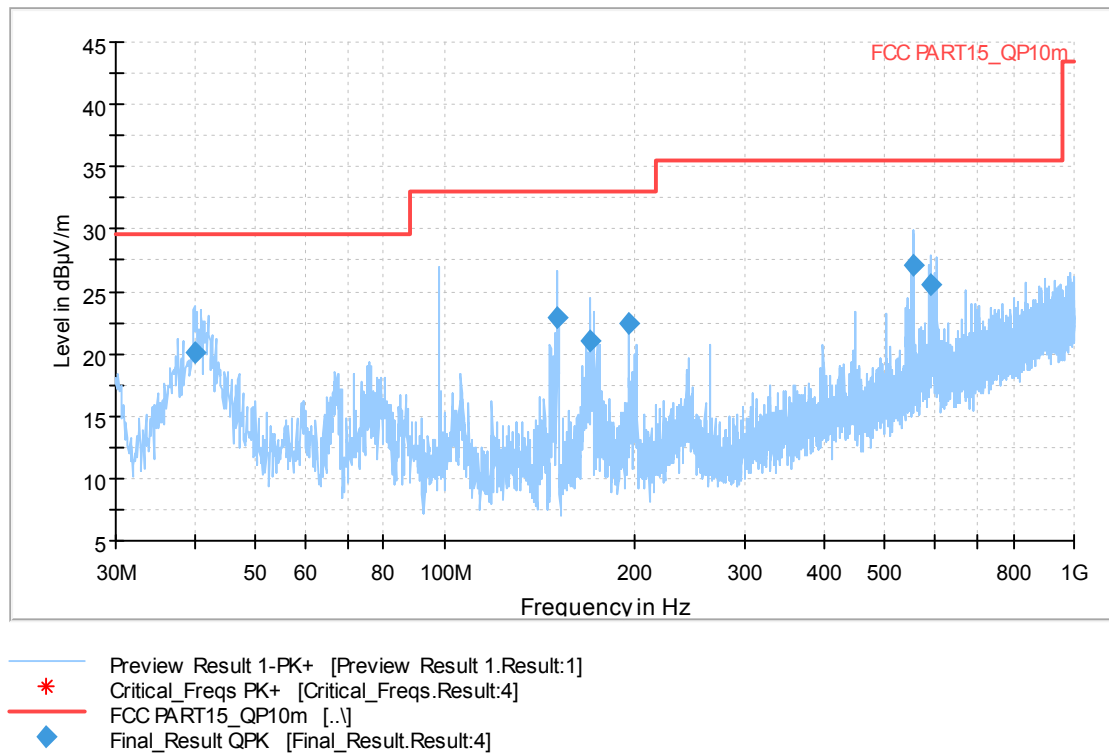


Fig A.17 Radiated Emission from 30MHz to 1GHz

Full Spectrum

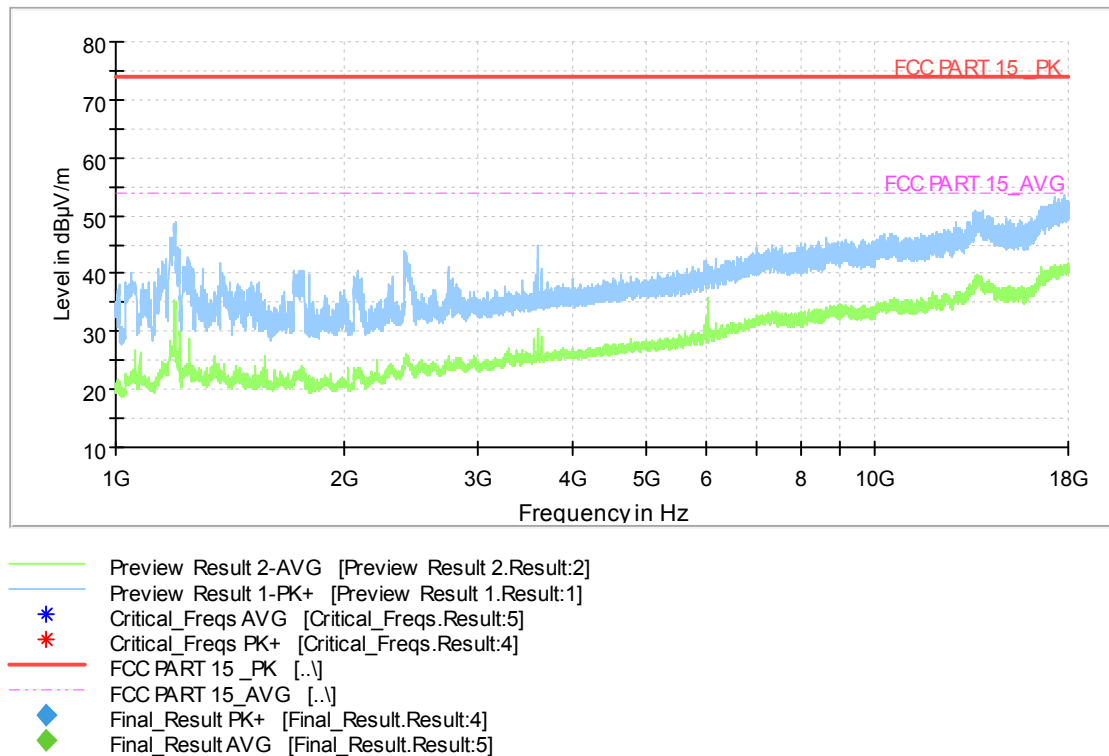


Fig A.18 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.11-2, GSM850 idle:

Full Spectrum

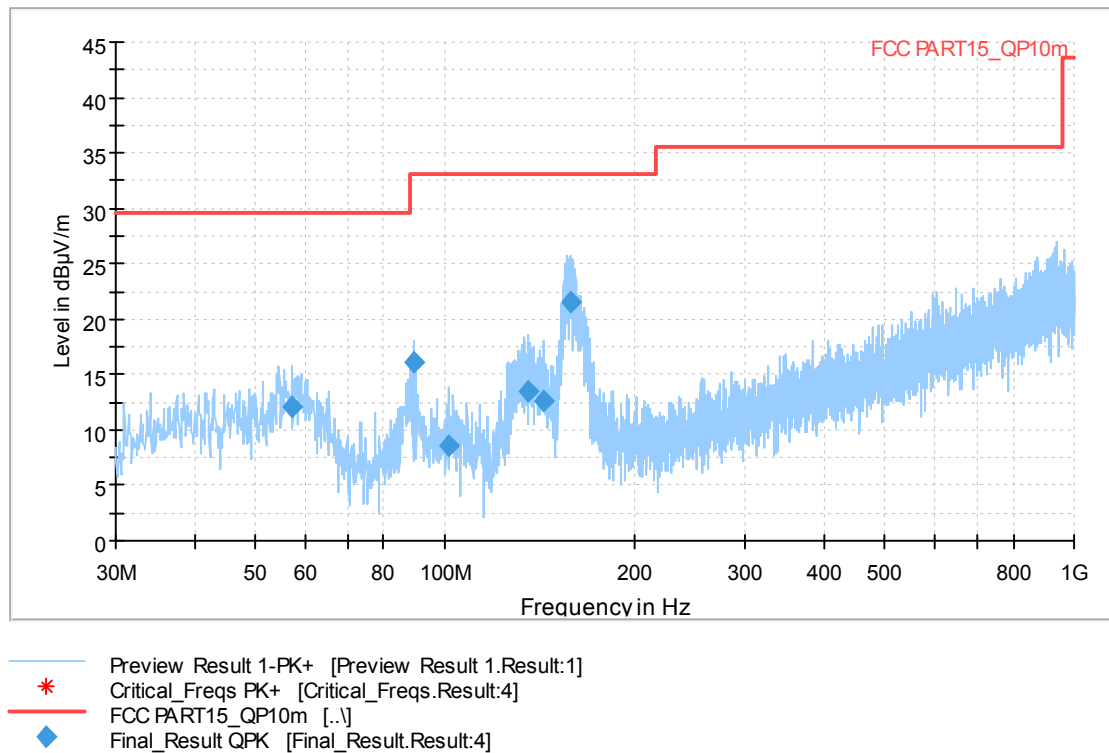


Fig A.19 Radiated Emission from 30MHz to 1GHz

Full Spectrum

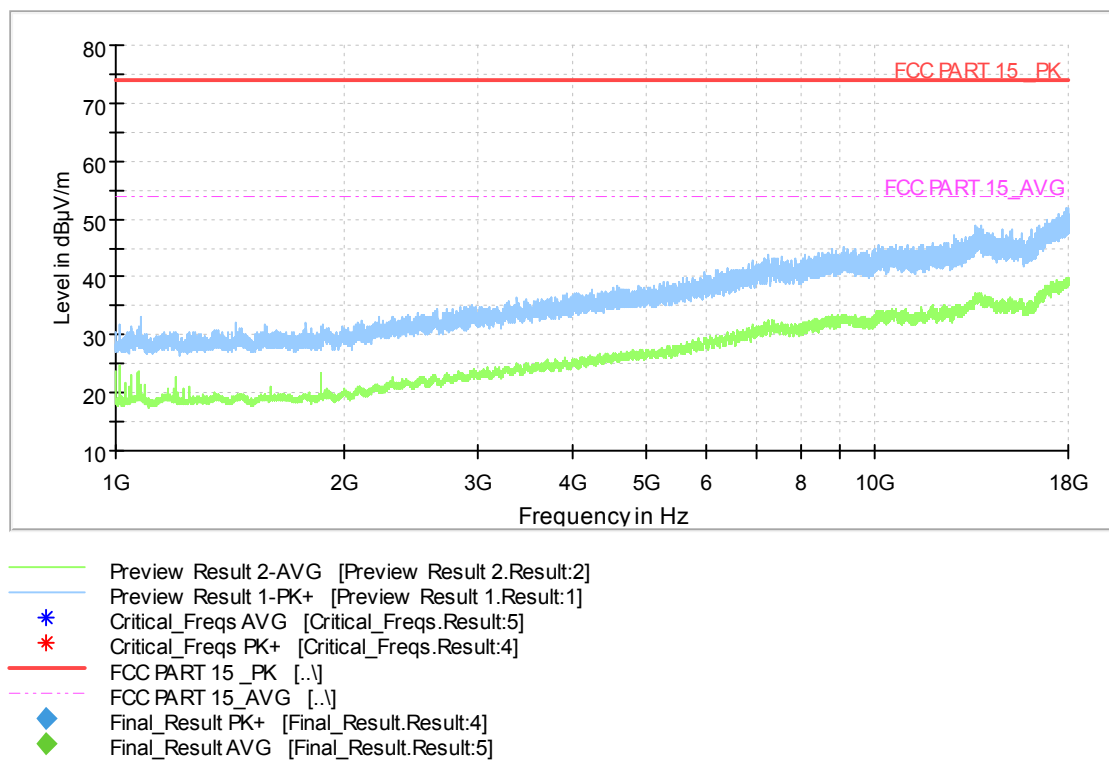


Fig A.20 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.12-2, USB transfer + FM:

Full Spectrum

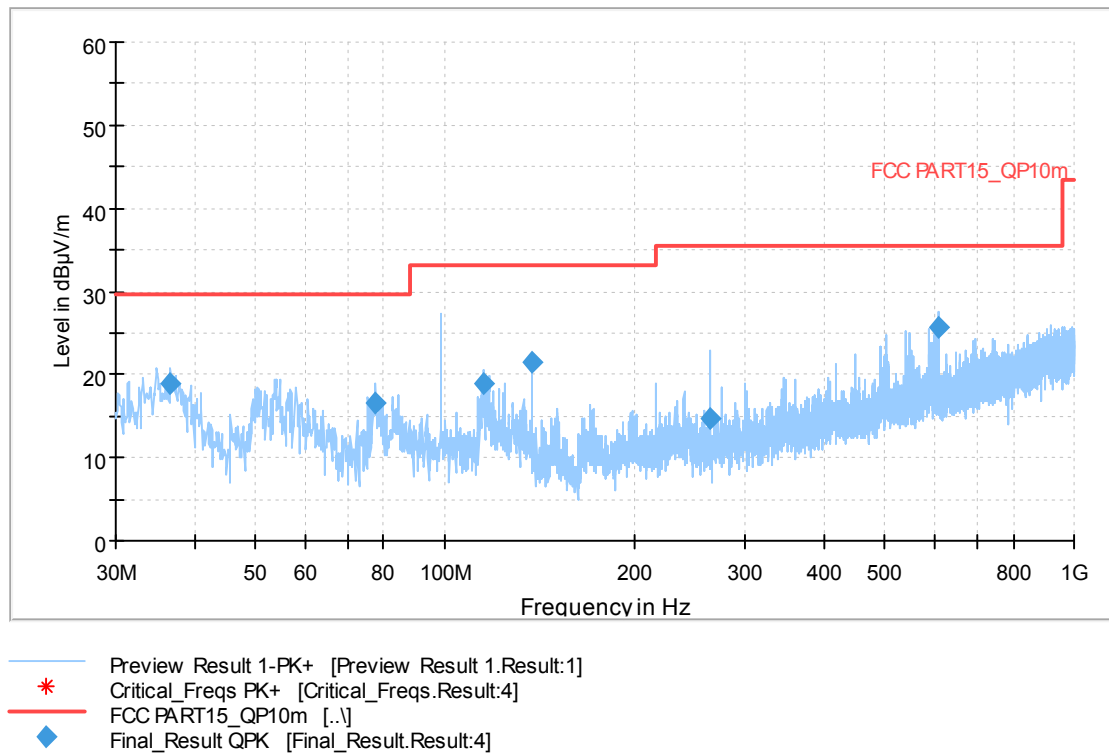


Fig A.21 Radiated Emission from 30MHz to 1GHz

Full Spectrum

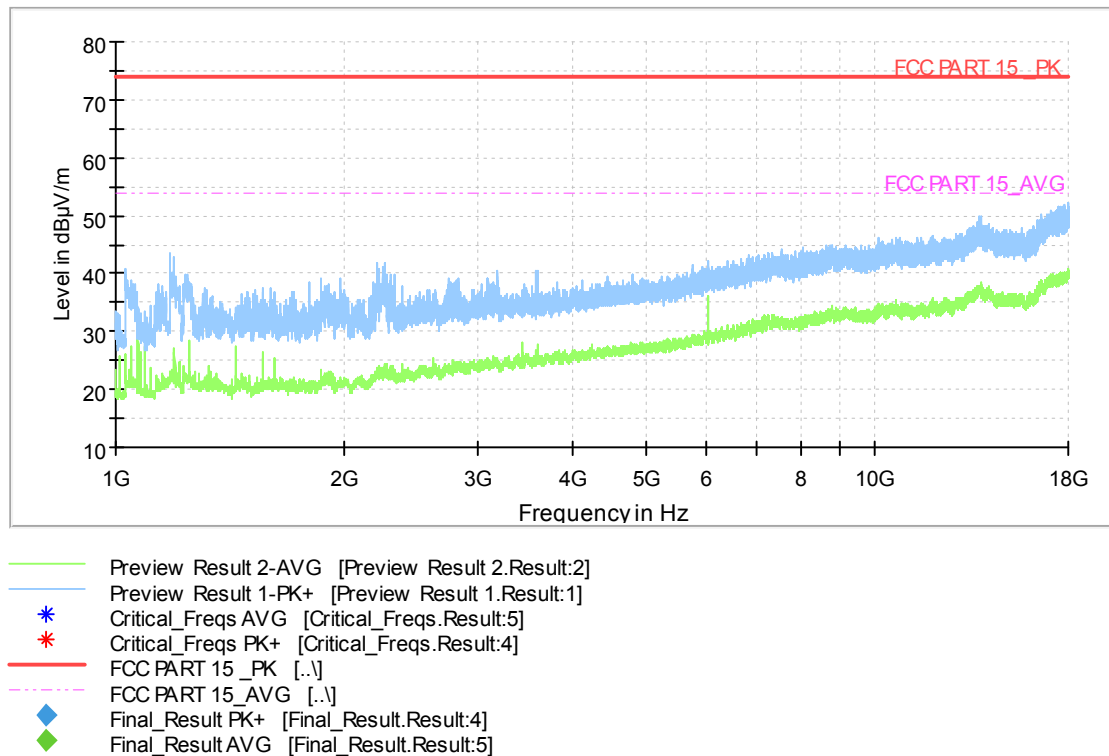


Fig A.22 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U = 3.08 \text{ dB}$, $k=2$.

Charging Mode, Set.11, GSM850 idle:

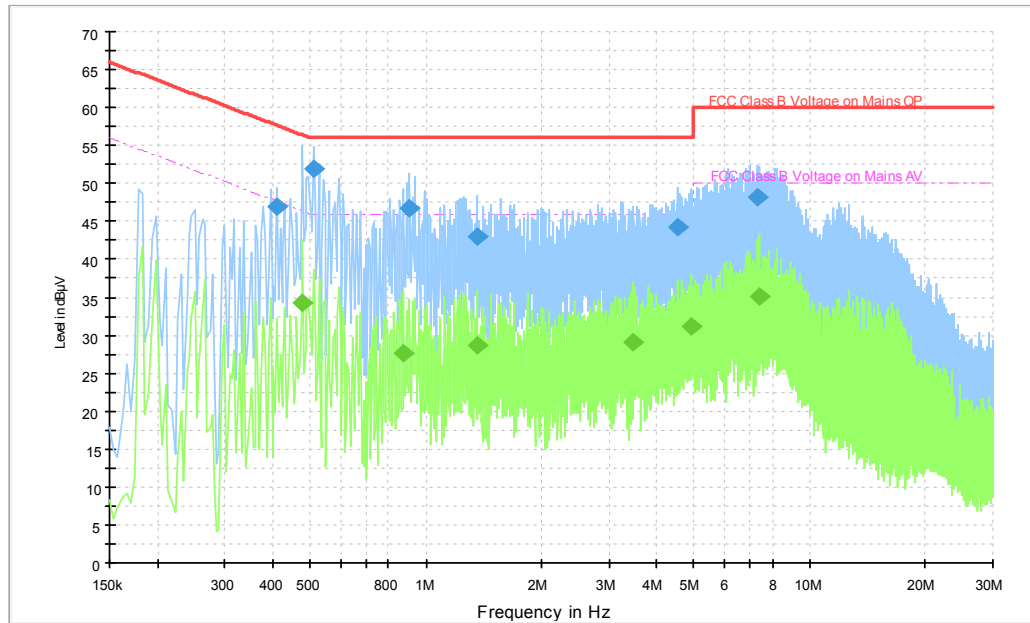


Fig A.23 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.410000	47.0	L1	19.7	10.6	57.6
0.510000	51.9	L1	19.7	4.1	56.0
0.906000	46.7	L1	19.7	9.3	56.0
1.354000	43.0	L1	19.7	13.0	56.0
4.542000	44.3	L1	19.5	11.7	56.0
7.310000	48.3	L1	19.8	11.7	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.478000	34.2	L1	19.8	12.1	46.4
0.874000	27.7	L1	19.7	18.3	46.0
1.354000	28.7	L1	19.7	17.3	46.0
3.454000	29.1	L1	19.6	16.9	46.0
4.922000	31.1	L1	19.6	14.9	46.0
7.426000	35.1	L1	19.7	14.9	50.0

Charging Mode, Set.12, FM + USB:

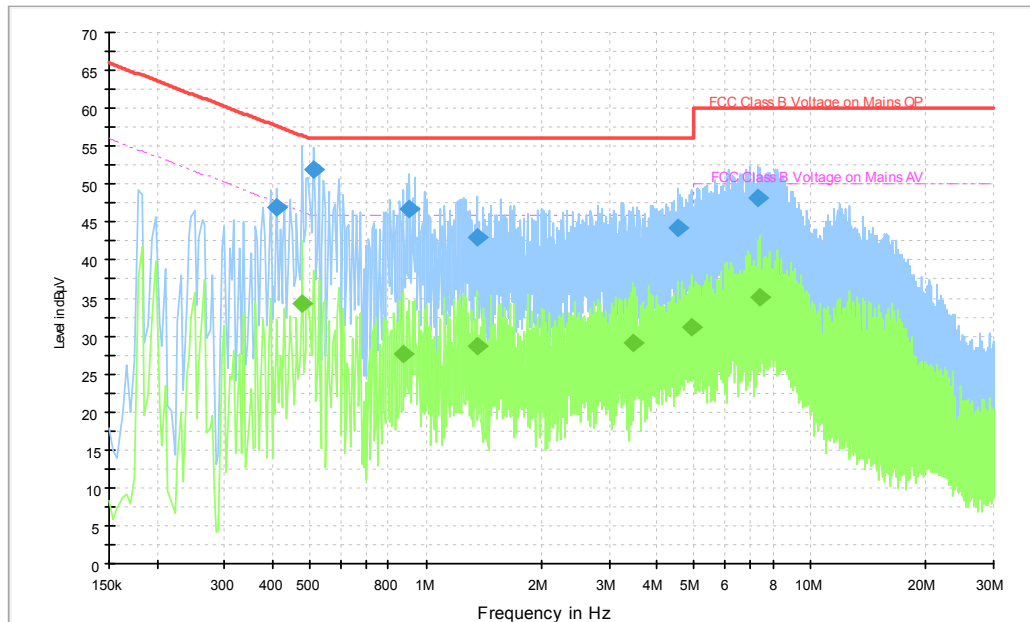


Fig A.24 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.474000	45.2	N	19.8	11.2	56.4
0.870000	39.5	N	19.6	16.5	56.0
1.362000	40.8	L1	19.7	15.2	56.0
2.138000	39.5	N	19.7	16.5	56.0
5.166000	36.5	N	19.6	23.5	60.0
7.494000	37.9	L1	19.7	22.1	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.390000	36.6	L1	19.8	11.4	48.1
0.470000	43.2	L1	19.8	3.3	46.5
0.854000	31.1	L1	19.7	14.9	46.0
1.386000	30.0	N	19.6	16.0	46.0
2.138000	29.0	N	19.7	17.0	46.0
7.822000	37.6	N	19.6	12.4	50.0

Charging Mode, Set.11-2, GSM850 idle:

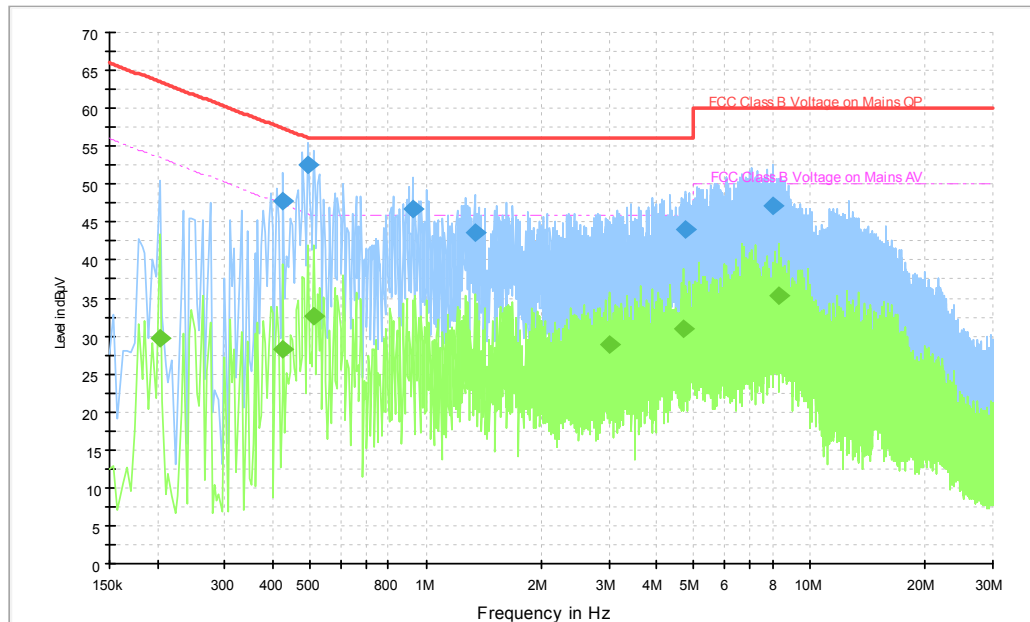


Fig A.25 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.426000	47.7	L1	19.7	9.6	57.3
0.494000	52.5	L1	19.8	3.6	56.1
0.922000	46.7	L1	19.7	9.3	56.0
1.338000	43.5	L1	19.7	12.5	56.0
4.754000	44.0	L1	19.6	12.0	56.0
8.066000	47.1	L1	19.7	12.9	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.202000	29.8	L1	19.8	23.8	53.5
0.426000	28.3	L1	19.7	19.1	47.3
0.510000	32.6	L1	19.7	13.4	46.0
2.998000	28.8	L1	19.6	17.2	46.0
4.698000	30.9	L1	19.6	15.1	46.0
8.310000	35.3	L1	19.7	14.7	50.0

Charging Mode, Set.12-2, FM + USB:

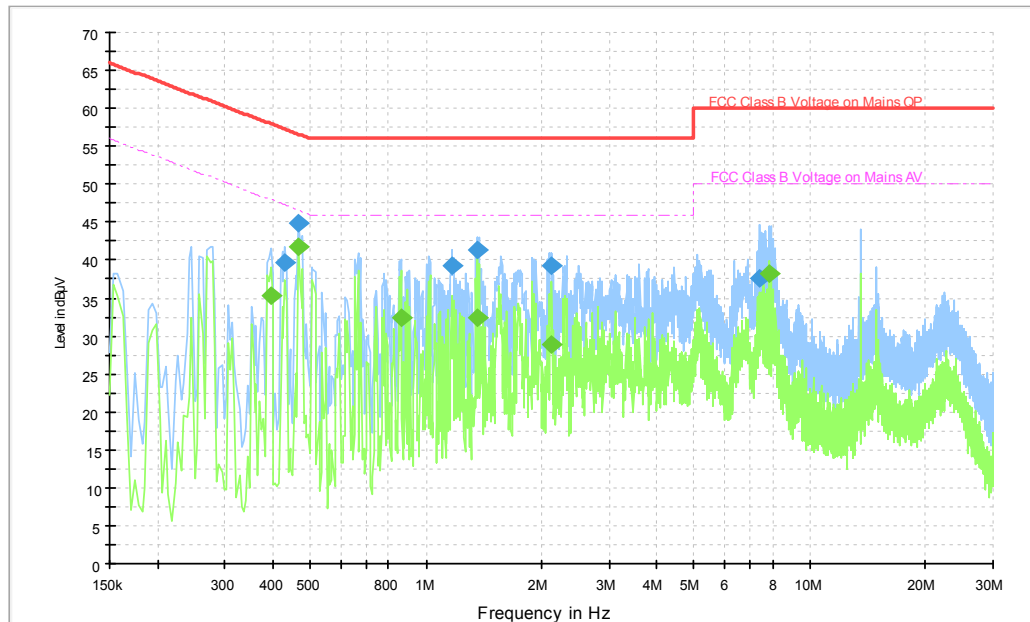


Fig A.26 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.430000	39.7	L1	19.8	17.6	57.3
0.466000	44.8	N	19.8	11.7	56.6
1.170000	39.2	L1	19.8	16.8	56.0
1.362000	41.3	L1	19.7	14.7	56.0
2.130000	39.2	L1	19.6	16.8	56.0
7.406000	37.6	N	19.6	22.4	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.394000	35.3	L1	19.7	12.7	48.0
0.466000	41.8	N	19.8	4.8	46.6
0.862000	32.4	N	19.6	13.6	46.0
1.362000	32.4	L1	19.7	13.6	46.0
2.130000	28.9	L1	19.6	17.1	46.0
7.822000	38.3	L1	19.8	11.7	50.0

ANNEX B: PERSONS INVOLVED IN THIS TESTING

Test Item	Test Software and Version	Software Vendor	Test operator
Conducted Emission	EMC32 V8.5.2	R&S	Zhang Tianli
Radiated Emission	EMC32 V9.01.00	R&S	Zhang Tianli

*****END OF REPORT*****