


## Impedance Measurement Plot

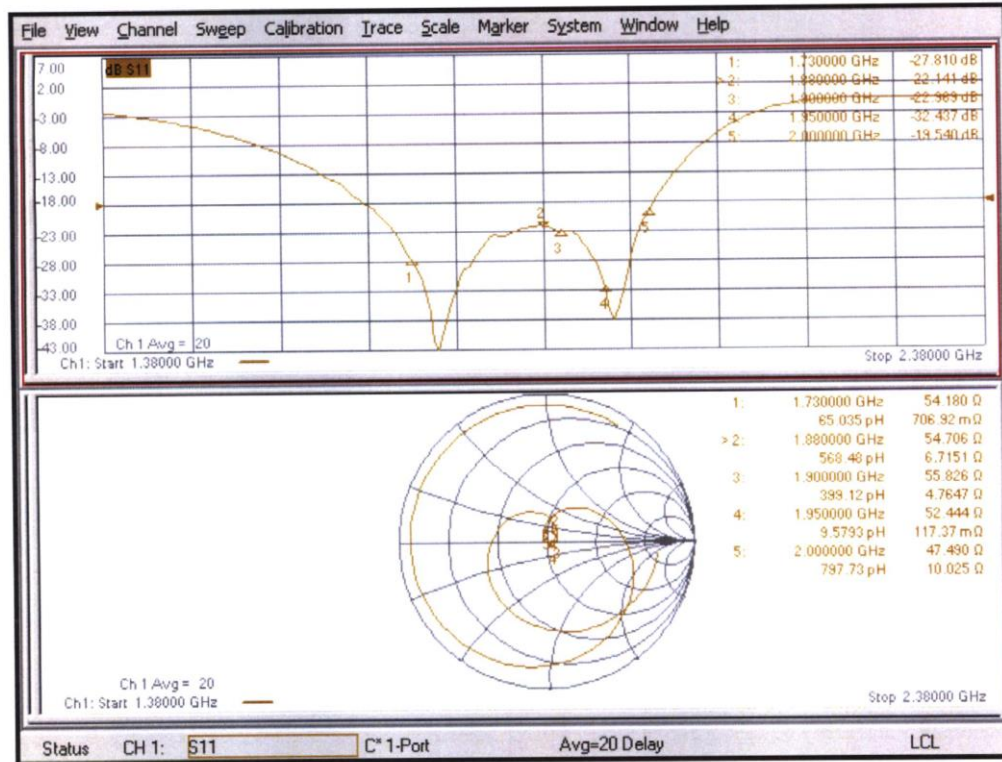

## DASY5 E-field Result

Date: 25.08.2022

Test Laboratory: SPEAG Lab2

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1018**

Communication System: UID 0 - CW ; Frequency: 1880 MHz

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 28.12.2021
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 22.12.2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 157.1 V/m; Power Drift = 0.01 dB



Applied MIF = 0.00 dB

RF audio interference level = 38.78 dBV/m

**Emission category: M2**

MIF scaled E-field

|             |             |             |
|-------------|-------------|-------------|
| Grid 1 M2   | Grid 2 M2   | Grid 3 M2   |
| 38.66 dBV/m | 38.74 dBV/m | 38.45 dBV/m |
| Grid 4 M2   | Grid 5 M2   | Grid 6 M2   |
| 36.05 dBV/m | 36.06 dBV/m | 35.87 dBV/m |
| Grid 7 M2   | Grid 8 M2   | Grid 9 M2   |
| 38.7 dBV/m  | 38.78 dBV/m | 38.49 dBV/m |

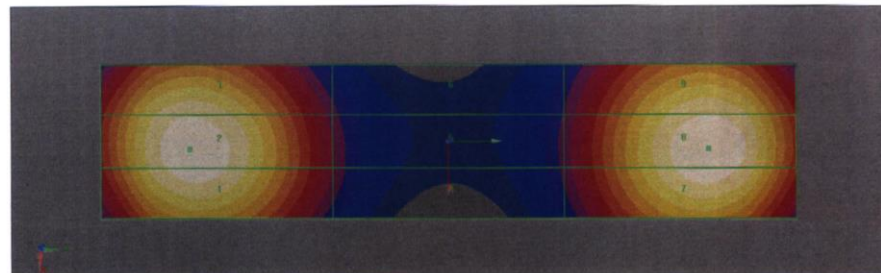

0 dB = 86.94 V/m = 38.78 dBV/m

## Dipole 2450 MHz

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **CTTL (Auden)**

Certificate No: **CD2450V3-1021\_Aug22**

### CALIBRATION CERTIFICATE

Object **CD2450V3 - SN: 1021**

Calibration procedure(s) **QA CAL-20.v7  
Calibration Procedure for Validation Sources in air**

Calibration date: **August 25, 2022**


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)      | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-22 (No. 217-03525/03524) | Apr-23                |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-22 (No. 217-03524)       | Apr-23                |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-22 (No. 217-03525)       | Apr-23                |
| Reference 20 dB Attenuator  | SN: BH9394 (20k)   | 04-Apr-22 (No. 217-03527)       | Apr-23                |
| Type-N mismatch combination | SN: 310982 / 06327 | 04-Apr-22 (No. 217-03528)       | Apr-23                |
| Probe EF3DV3                | SN: 4013           | 28-Dec-21 (No. EF3-4013_Dec21)  | Dec-22                |
| DAE4                        | SN: 781            | 22-Dec-21 (No. DAE4-781_Dec21)  | Dec-22                |

| Secondary Standards             | ID #           | Check Date (in house)             | Scheduled Check        |
|---------------------------------|----------------|-----------------------------------|------------------------|
| Power meter Agilent 4419B       | SN: GB42420191 | 09-Oct-09 (in house check Oct-20) | In house check: Oct-23 |
| Power sensor HP E4412A          | SN: US38485102 | 05-Jan-10 (in house check Oct-20) | In house check: Oct-23 |
| Power sensor HP B482A           | SN: US37295597 | 09-Oct-09 (in house check Oct-20) | In house check: Oct-23 |
| RF generator R&S SMT-06         | SN: 837633/005 | 10-Jan-19 (in house check Oct-20) | In house check: Oct-23 |
| Network Analyzer Agilent E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-20) | In house check: Oct-22 |

|                |              |                       |                                                                                       |
|----------------|--------------|-----------------------|---------------------------------------------------------------------------------------|
|                | Name         | Function              | Signature                                                                             |
| Calibrated by: | Leif Klysner | Laboratory Technician |  |
| Approved by:   | Sven Kühn    | Technical Manager     |  |

Issued: August 25, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

#### References

- [1] ANSI-C63.19-2019 (ANSI-C63.19-2011)  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications  
Devices and Hearing Aids.

#### Methods Applied and Interpretation of Parameters:

- Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss:** These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution:** E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                    |                      |          |
|------------------------------------|----------------------|----------|
| DASY Version                       | DASY5                | V52.10.4 |
| Phantom                            | HAC Test Arch        |          |
| Distance Dipole Top - Probe Center | 15 mm                |          |
| Scan resolution                    | dx, dy = 5 mm        |          |
| Frequency                          | 2450 MHz $\pm$ 1 MHz |          |
| Input power drift                  | < 0.05 dB            |          |

### Maximum Field values at 2450 MHz

| E-field 15 mm above dipole surface | condition          | Interpolated maximum        |
|------------------------------------|--------------------|-----------------------------|
| Maximum measured above high end    | 100 mW input power | 86.0 V/m = 38.69 dBV/m      |
| Maximum measured above low end     | 100 mW input power | 85.8 V/m = 38.67 dBV/m      |
| Averaged maximum above arm         | 100 mW input power | 85.9 V/m $\pm$ 12.8 % (k=2) |

### Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters

| Frequency | Return Loss | Impedance                      |
|-----------|-------------|--------------------------------|
| 2250 MHz  | 18.3 dB     | 63.2 $\Omega$ + 4.0 j $\Omega$ |
| 2350 MHz  | 30.3 dB     | 52.1 $\Omega$ - 2.3 j $\Omega$ |
| 2450 MHz  | 29.4 dB     | 53.1 $\Omega$ - 1.6 j $\Omega$ |
| 2550 MHz  | 33.5 dB     | 51.0 $\Omega$ - 1.9 j $\Omega$ |
| 2650 MHz  | 18.6 dB     | 60.7 $\Omega$ - 7.5 j $\Omega$ |

#### 3.2 Antenna Design and Handling


The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

## Impedance Measurement Plot

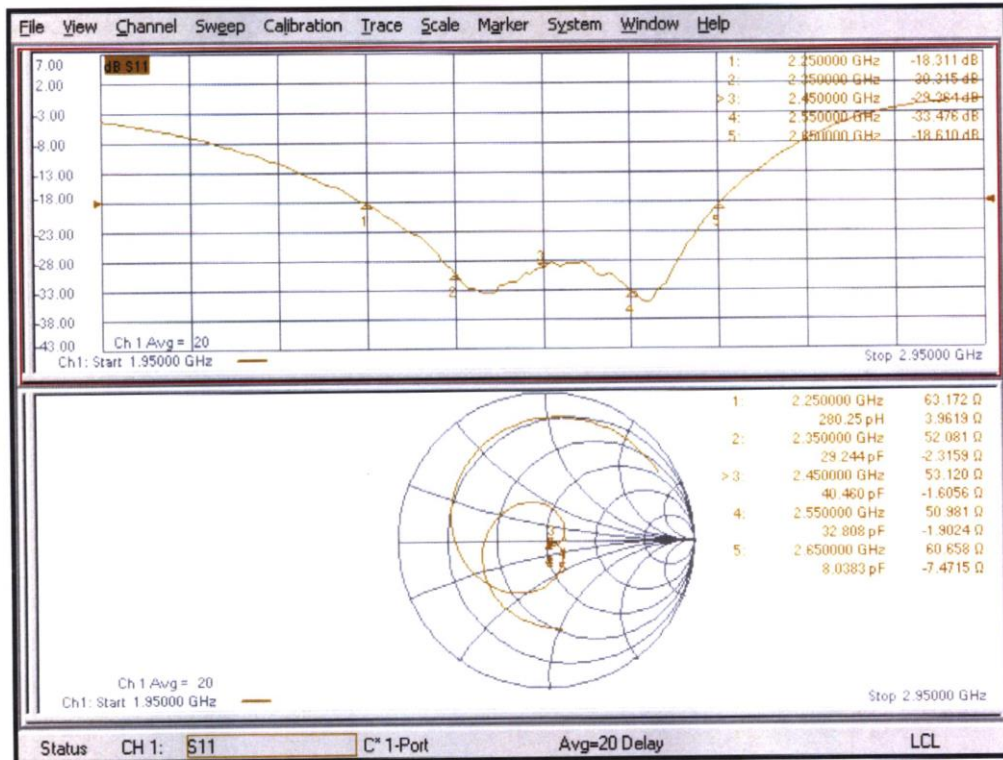

## DASY5 E-field Result

Date: 25.08.2022

Test Laboratory: SPEAG Lab2

**DUT: HAC Dipole 2450 MHz; Type: CD2450V3; Serial: CD2450V3 - SN: 1021**

Communication System: UID 0 - CW ; Frequency: 2450 MHz

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 28.12.2021
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 22.12.2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Dipole E-Field measurement @ 2450MHz/E-Scan - 2450MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 79.61 V/m; Power Drift = 0.02 dB



Applied MIF = 0.00 dB

RF audio interference level = 38.69 dBV/m

Emission category: M2

MIF scaled E-field

|             |             |             |
|-------------|-------------|-------------|
| Grid 1 M2   | Grid 2 M2   | Grid 3 M2   |
| 38.56 dBV/m | 38.67 dBV/m | 38.39 dBV/m |
| Grid 4 M2   | Grid 5 M2   | Grid 6 M2   |
| 37.7 dBV/m  | 37.72 dBV/m | 37.53 dBV/m |
| Grid 7 M2   | Grid 8 M2   | Grid 9 M2   |
| 38.58 dBV/m | 38.69 dBV/m | 38.45 dBV/m |

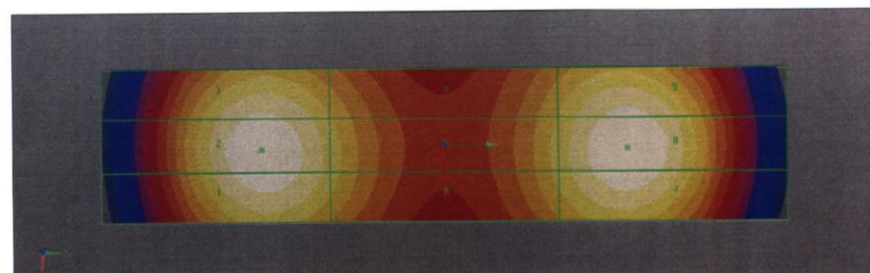

0 dB = 86.03 V/m = 38.69 dBV/m

## Dipole 2600 MHz

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **CTTL (Auden)**

Certificate No: **CD2600V3-1017\_Aug22**

## CALIBRATION CERTIFICATE

Object **CD2600V3 - SN: 1017**

Calibration procedure(s) **QA CAL-20.v7**  
**Calibration Procedure for Validation Sources in air**

Calibration date: **August 25, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards               | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|---------------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP                 | SN: 104778         | 04-Apr-22 (No. 217-03525/03524)   | Apr-23                 |
| Power sensor NRP-Z91            | SN: 103244         | 04-Apr-22 (No. 217-03524)         | Apr-23                 |
| Power sensor NRP-Z91            | SN: 103245         | 04-Apr-22 (No. 217-03525)         | Apr-23                 |
| Reference 20 dB Attenuator      | SN: BH9394 (20k)   | 04-Apr-22 (No. 217-03527)         | Apr-23                 |
| Type-N mismatch combination     | SN: 310982 / 06327 | 04-Apr-22 (No. 217-03528)         | Apr-23                 |
| Probe EF3DV3                    | SN: 4013           | 28-Dec-21 (No. EF3-4013_Dec21)    | Dec-22                 |
| DAE4                            | SN: 781            | 22-Dec-21 (No. DAE4-781_Dec21)    | Dec-22                 |
| Secondary Standards             | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter Agilent 4419B       | SN: GB42420191     | 09-Oct-09 (in house check Oct-20) | In house check: Oct-23 |
| Power sensor HP E4412A          | SN: US38485102     | 05-Jan-10 (in house check Oct-20) | In house check: Oct-23 |
| Power sensor HP 8482A           | SN: US37295597     | 09-Oct-09 (in house check Oct-20) | In house check: Oct-23 |
| RF generator R&S SMT-06         | SN: 837633/005     | 10-Jan-19 (in house check Oct-20) | In house check: Oct-23 |
| Network Analyzer Agilent E8358A | SN: US41080477     | 31-Mar-14 (in house check Oct-20) | In house check: Oct-22 |

|                | Name         | Function              | Signature                                                                             |
|----------------|--------------|-----------------------|---------------------------------------------------------------------------------------|
| Calibrated by: | Leif Klysner | Laboratory Technician |  |
| Approved by:   | Sven Kühn    | Technical Manager     |  |

Issued: August 25, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: CD2600V3-1017\_Aug22

Page 1 of 5

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: SCS 0108

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

## References

- [1] ANSI-C63.19-2019 (ANSI-C63.19-2011)  
 American National Standard, Methods of Measurement of Compatibility between Wireless Communications  
 Devices and Hearing Aids.

## Methods Applied and Interpretation of Parameters:

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                    |                      |          |
|------------------------------------|----------------------|----------|
| DASY Version                       | DASY5                | V52.10.4 |
| Phantom                            | HAC Test Arch        |          |
| Distance Dipole Top - Probe Center | 15 mm                |          |
| Scan resolution                    | dx, dy = 5 mm        |          |
| Frequency                          | 2600 MHz $\pm$ 1 MHz |          |
| Input power drift                  | < 0.05 dB            |          |

### Maximum Field values at 2600 MHz

| E-field 15 mm above dipole surface | condition          | Interpolated maximum                          |
|------------------------------------|--------------------|-----------------------------------------------|
| Maximum measured above high end    | 100 mW input power | 86.0 V/m = 38.69 dBV/m                        |
| Maximum measured above low end     | 100 mW input power | 85.7 V/m = 38.66 dBV/m                        |
| Averaged maximum above arm         | 100 mW input power | <b>85.9 V/m <math>\pm</math> 12.8 % (k=2)</b> |

### Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters

| Frequency | Return Loss | Impedance                       |
|-----------|-------------|---------------------------------|
| 2450 MHz  | 24.5 dB     | 44.6 $\Omega$ + 1.5 j $\Omega$  |
| 2550 MHz  | 21.6 dB     | 57.9 $\Omega$ + 4.4 j $\Omega$  |
| 2600 MHz  | 20.7 dB     | 59.4 $\Omega$ - 3.8 j $\Omega$  |
| 2650 MHz  | 19.4 dB     | 54.9 $\Omega$ - 10.2 j $\Omega$ |
| 2750 MHz  | 15.7 dB     | 41.4 $\Omega$ - 12.3 j $\Omega$ |

#### 3.2 Antenna Design and Handling


The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

# Impedance Measurement Plot

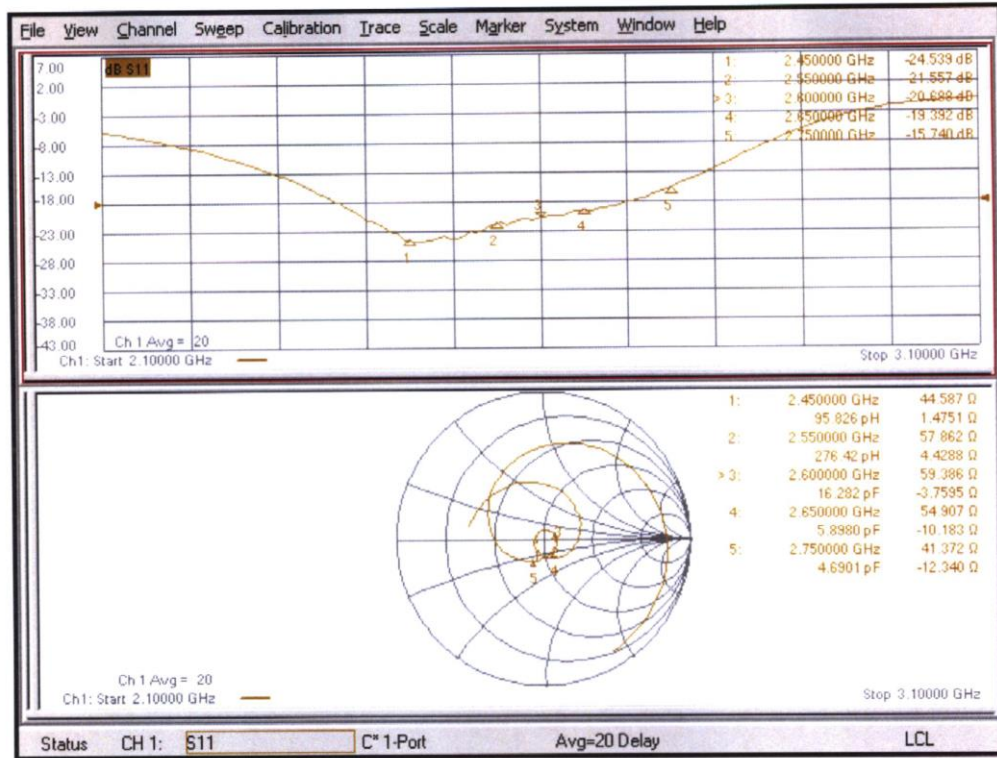

## DASY5 E-field Result

Date: 25.08.2022

Test Laboratory: SPEAG Lab2

**DUT: HAC Dipole 2600 MHz; Type: CD2600V3; Serial: CD2600V3 - SN: 1017**

Communication System: UID 0 - CW ; Frequency: 2600 MHz  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: RF Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1) @ 2600 MHz; Calibrated: 28.12.2021
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 22.12.2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Dipole E-Field measurement @ 2600MHz/E-Scan - 2600MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 69.34 V/m; Power Drift = -0.03 dB



Applied MIF = 0.00 dB

RF audio interference level = 38.69 dBV/m

Emission category: M2

MIF scaled E-field

|             |             |             |
|-------------|-------------|-------------|
| Grid 1 M2   | Grid 2 M2   | Grid 3 M2   |
| 38.49 dBV/m | 38.66 dBV/m | 38.46 dBV/m |
| Grid 4 M2   | Grid 5 M2   | Grid 6 M2   |
| 37.89 dBV/m | 37.97 dBV/m | 37.83 dBV/m |
| Grid 7 M2   | Grid 8 M2   | Grid 9 M2   |
| 38.62 dBV/m | 38.69 dBV/m | 38.42 dBV/m |

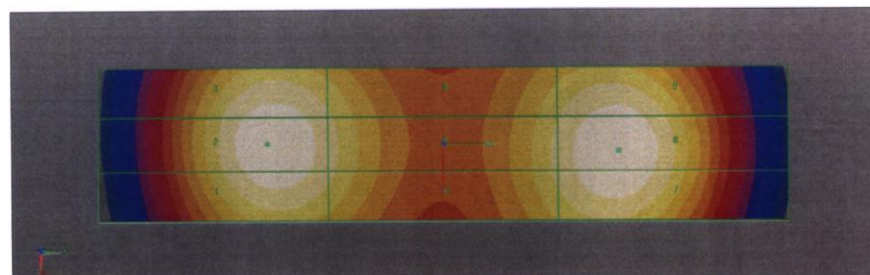

0 dB = 86.03 V/m = 38.69 dBV/m

## ANNEX F THE EVALUATION OF SPOTCHECK

### F.1 The results for spot check

| Frequency       |         | Measured Value(dBV/m) | Power Drift (dB) | Category         |
|-----------------|---------|-----------------------|------------------|------------------|
| MHz             | Channel |                       |                  |                  |
| GSM 850         |         |                       |                  |                  |
|                 | 251     | 37.86                 | 0.10             | M4 (see Fig B.1) |
| GSM 1900        |         |                       |                  |                  |
|                 | 41055   | 30.09                 | 0.03             | M3 (see Fig B.2) |
| LTE Band 41 PC2 |         |                       |                  |                  |
|                 | 251     | 17.71                 | -0.03            | M4 (see Fig B.3) |
| LTE Band 41 PC3 |         |                       |                  |                  |
|                 | 41055   | 16.78                 | -0.09            | M4 (see Fig B.4) |
| WIFI2.4G        |         |                       |                  |                  |
|                 | 41055   | 24.20                 | 0.02             | M4 (see Fig B.5) |

### F.2 Main test instruments

Table 1: List of Main Instruments

| No. | Name             | Type          | Serial Number | Calibration Date         | Valid Period |
|-----|------------------|---------------|---------------|--------------------------|--------------|
| 01  | Signal Generator | E4483C        | MY49071430    | January 13, 2022         | One Year     |
| 02  | Power meter      | NRP2          | 106276        | May 10, 2022             | One year     |
| 03  | Power sensor     | NRP6A         | 101369        |                          |              |
| 04  | Amplifier        | 60S1G4        | 0331848       | No Calibration Requested |              |
| 05  | E-Field Probe    | EF3DV3        | 4060          | May 13, 2022             | One year     |
| 06  | DAE              | SPEAG DAE4    | 1524          | October 17, 2022         | One year     |
| 07  | HAC Dipole       | CD835V3       | 1023          | August 25, 2022          | One year     |
| 08  | HAC Dipole       | CD1880V3      | 1018          | August 25, 2022          | One year     |
| 09  | HAC Dipole       | CD2450V3      | 1021          | August 25, 2022          | One year     |
| 10  | HAC Dipole       | CD2600V3      | 1017          | August 25, 2022          | One year     |
| 11  | BTS              | CMW500        | 166370        | June 28,2022             | One year     |
| 12  | AIA              | SE UMS 170 CB | 1029          | No Calibration Requested |              |

### F.3 Test plots of spot check

#### HAC RF E-Field GSM 850

Date/Time: 2022-11-21

Electronics: DAE4 Sn1524

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, 1GSM 850 (0) Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 – SN4060

E Scan – ER3DV6 – 2011: 15 mm from Probe Center to the Device

3/Hearing Aid Compatibility Test (101x101x1): Interpolated grid:

$dx = 0.5000$  mm,  $dy = 0.5000$  mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 61.54 V/m; Power Drift = 0.10 dB


Applied MIF = 3.50 dB

RF audio interference level = 37.86 dBV/m

Emission category: M4

MIF scaled E-field

|                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| Grid 1 M4<br>37.12 dBV/m | Grid 2 M4<br>37.25 dBV/m | Grid 3 M4<br>36.37 dBV/m |
| Grid 4 M4<br>37.58 dBV/m | Grid 5 M4<br>37.86 dBV/m | Grid 6 M4<br>37.07 dBV/m |
| Grid 7 M4<br>38.03 dBV/m | Grid 8 M4<br>38.16 dBV/m | Grid 9 M4<br>37.26 dBV/m |

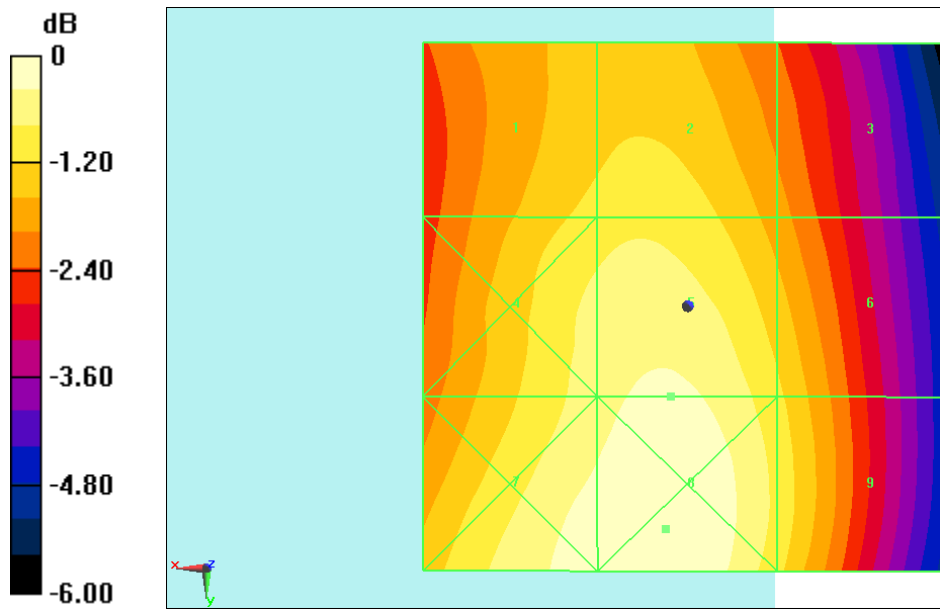

0 dB = 80.94 V/m = 38.16 dBV/m

**Fig B.1 HAC RF E-Field GSM 850**

## HAC RF E-Field GSM1900

Date/Time: 2022-11-21

Electronics: DAE4 Sn1524

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.30C Liquid Temperature: 22.50C

Communication System: UID 0, GSM1900 Frequency: 1850.2MHz Duty Cycle: 1:8.3

Probe: EF3DV3 – SN4060

E Scan – ER3DV6 – 2011: 15 mm from Probe Center to the Device 2 2 2

2/Hearing Aid Compatibility Test (101x101x1): Interpolated grid:

$dx=0.5000$  mm,  $dy=0.5000$  mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 23.74 V/m; Power Drift = 0.03 dB


Applied MIF = 3.37 dB

RF audio interference level = 30.09 dBV/m

Emission category: M3

MIF scaled E-field

|                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| Grid 1 M4<br>26.32 dBV/m | Grid 2 M4<br>28.27 dBV/m | Grid 3 M4<br>28.23 dBV/m |
| Grid 4 M4<br>28.67 dBV/m | Grid 5 M3<br>30.09 dBV/m | Grid 6 M4<br>29.75 dBV/m |
| Grid 7 M4<br>29.79 dBV/m | Grid 8 M3<br>30.58 dBV/m | Grid 9 M3<br>30.02 dBV/m |

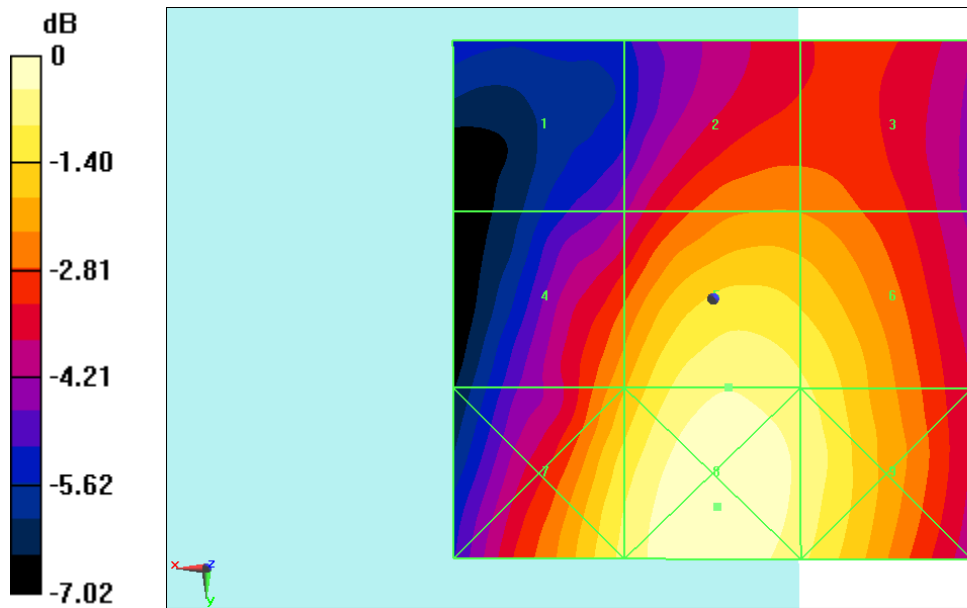

0 dB = 33.80 V/m = 30.58 dBV/m

**Fig B.2 HAC RF E-Field GSM1900**

## HAC RF E-Field LTEB41 PC2

Date/Time: 2022-11-21

Electronics: DAE4 Sn1524

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.30C Liquid Temperature: 22.50C

Communication System: UID 0, LTEB41 Frequency: 2506MHz Duty Cycle: 1:1.58

Probe: EF3DV3 – SN4060

E Scan – ER3DV6 – 2011: 15 mm from Probe Center to the Device 3 3

2/Hearing Aid Compatibility Test (101x101x1): Interpolated grid:

$dx=0.5000$  mm,  $dy=0.5000$  mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.37 V/m; Power Drift = -0.03dB


Applied MIF = -1.70 dB

RF audio interference level = 17.71 dBV/m

Emission category: M4

MIF scaled E-field

|                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| Grid 1 M4<br>18.08 dBV/m | Grid 2 M4<br>17.91 dBV/m | Grid 3 M4<br>17.52 dBV/m |
| Grid 4 M4<br>16.72 dBV/m | Grid 5 M4<br>17.71 dBV/m | Grid 6 M4<br>17.39 dBV/m |
| Grid 7 M4<br>17.17 dBV/m | Grid 8 M4<br>16.95 dBV/m | Grid 9 M4<br>16.59 dBV/m |

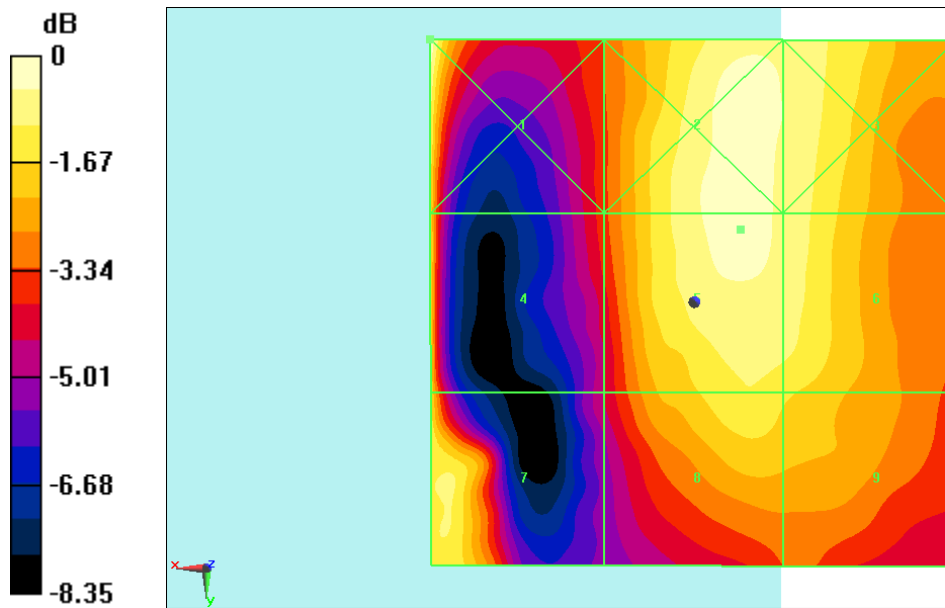

0 dB = 8.014 V/m = 18.08 dBV/m

**Fig B.3 HAC RF E-Field LTEB41 PC2**

## HAC RF E-Field LTEB41 PC3

Date/Time: 2022-11-21

Electronics: DAE4 Sn1524

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.30C Liquid Temperature: 22.50C

Communication System: UID 0, LTEB41 Frequency: 2506MHz Duty Cycle: 1:1.58

Probe: EF3DV3 – SN4060

E Scan – ER3DV6 – 2011: 15 mm from Probe Center to the Device 3 3

2/Hearing Aid Compatibility Test (101x101x1): Interpolated grid:

$dx=0.5000$  mm,  $dy=0.5000$  mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.20 V/m; Power Drift = -0.09dB


Applied MIF = -3.41 dB

RF audio interference level = 16.78 dBV/m

Emission category: M4

MIF scaled E-field

|                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| Grid 1 M4<br>16.81 dBV/m | Grid 2 M4<br>16.79 dBV/m | Grid 3 M4<br>16.51 dBV/m |
| Grid 4 M4<br>16.58 dBV/m | Grid 5 M4<br>16.78 dBV/m | Grid 6 M4<br>16.48 dBV/m |
| Grid 7 M4<br>16.56 dBV/m | Grid 8 M4<br>15.85 dBV/m | Grid 9 M4<br>15.67 dBV/m |

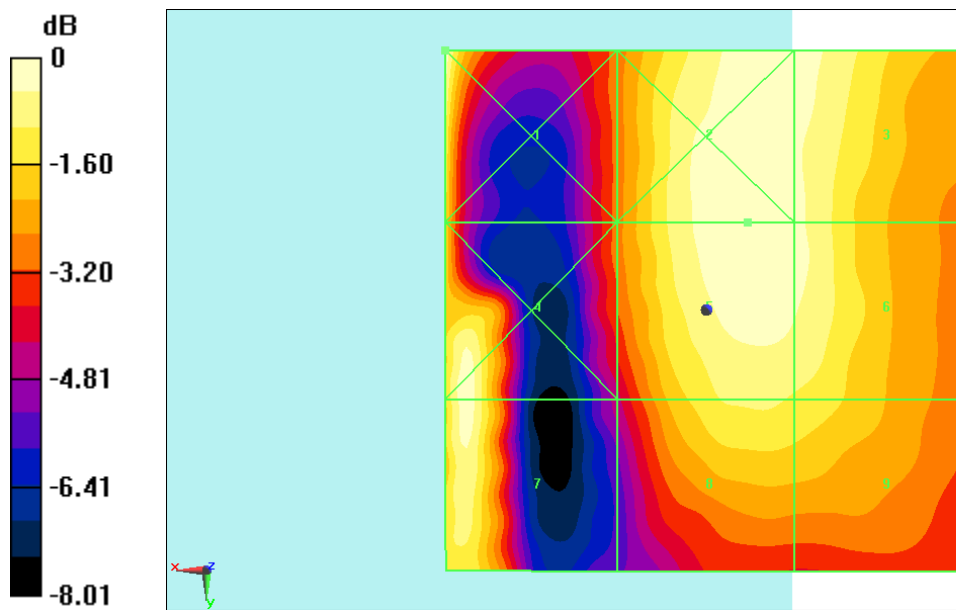

0 dB = 6.923 V/m = 16.81 dBV/m

**Fig B.4 HAC RF E-Field LTEB41 PC3**

**HAC RF E-Field WIFI2.4G**

Date/Time: 2022-11-21

Electronics: DAE4 Sn1524

Medium: Air

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.30C Liquid Temperature: 22.50C

Communication System: UID 0, WIFI2.4G Frequency: 2437MHz Duty Cycle: 1:1

Probe: EF3DV3 – SN4060

**E Scan – ER3DV6 – 2011: 15 mm from Probe Center to the Device/Hearing****Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm,

dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 42.94 V/m; Power Drift = 0.02 dB


Applied MIF = -7.68 dB

RF audio interference level = 24.20 dBV/m

**Emission category: M4**

MIF scaled E-field

|                                 |                                 |                                 |
|---------------------------------|---------------------------------|---------------------------------|
| Grid 1 <b>M4</b><br>19.83 dBV/m | Grid 2 <b>M4</b><br>21.03 dBV/m | Grid 3 <b>M4</b><br>20.92 dBV/m |
| Grid 4 <b>M4</b><br>22.75 dBV/m | Grid 5 <b>M4</b><br>24.2 dBV/m  | Grid 6 <b>M4</b><br>23.91 dBV/m |
| Grid 7 <b>M4</b><br>23.65 dBV/m | Grid 8 <b>M4</b><br>24.93 dBV/m | Grid 9 <b>M4</b><br>24.6 dBV/m  |

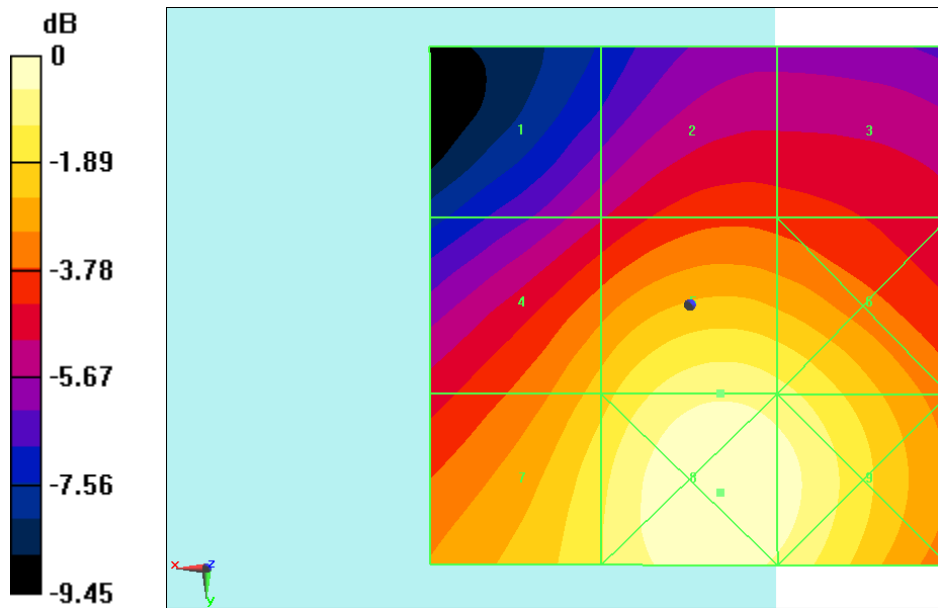

0 dB = 17.63 V/m = 24.93 dBV/m

**Fig B.5 HAC RF E-Field WIFI2.4G**



No.I22Z61830-SEM02

**The photos of HAC test are presented in the additional document:**

Appendix to test report No.I22Z61830-SEM02/03

The photos of HAC test