



BUREAU
VERITAS Test Report No.: W7L-P23010015RF06



Certificate #6613.01

FCC TEST REPORT

(Part 15, Subpart C)


Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9,02600 Espoo,Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9,02600 Espoo,Finland
Product:	Mobile phone
Brand Name:	NOKIA
Model Name:	TA-1558
FCC ID:	2AJOTTA-1558
Date of tests:	Feb. 02, 2023 ~ Mar. 02, 2023

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247**
- ANSI C63.10-2013**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Chao Wu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Mar. 02, 2023	 Date: Mar. 02, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1 SUMMARY OF TEST RESULTS	6
1.1 MEASUREMENT UNCERTAINTY	7
2 GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	12
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	13
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	13
2.3 DUTY CYCLE OF TEST SIGNAL	17
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	18
2.5 DESCRIPTION OF SUPPORT UNITS	18
3 TEST TYPES AND RESULTS	19
3.1 CONDUCTED EMISSION MEASUREMENT	19
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	19
3.1.2 TEST INSTRUMENTS	19
3.1.3 TEST PROCEDURES	20
3.1.4 DEVIATION FROM TEST STANDARD	20
3.1.5 TEST SETUP	21
3.1.6 EUT OPERATING CONDITIONS	21
3.1.7 TEST RESULTS	22
3.2 RADIATED EMISSION MEASUREMENT	24
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	24
3.2.2 TEST INSTRUMENTS	25
3.2.3 TEST PROCEDURES	25
3.2.4 DEVIATION FROM TEST STANDARD	26
3.2.5 TEST SETUP	27
3.2.6 EUT OPERATING CONDITIONS	28
3.2.7 TEST RESULTS	29
3.3 6 DB BANDWIDTH MEASUREMENT	73
3.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	73
3.3.2 TEST INSTRUMENTS	73
3.3.3 TEST PROCEDURE	74
3.3.4 DEVIATION FROM TEST STANDARD	75
3.3.5 TEST SETUP	75



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

3.3.6	EUT OPERATING CONDITIONS	75
3.3.7	TEST RESULTS	76
3.4	CONDUCTED OUTPUT POWER	77
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	77
3.4.2	TEST SETUP	77
3.4.3	TEST INSTRUMENTS	77
3.4.4	TEST PROCEDURES	77
3.4.5	DEVIATION FROM TEST STANDARD	77
3.4.6	EUT OPERATING CONDITIONS	77
3.4.7	TEST RESULTS	78
3.4.7.1	MAXIMUM PEAK OUTPUT POWER	78
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE)	79
3.5	POWER SPECTRAL DENSITY MEASUREMENT	80
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	80
3.5.2	TEST SETUP	80
3.5.3	TEST INSTRUMENTS	80
3.5.4	TEST PROCEDURE	80
3.5.5	DEVIATION FROM TEST STANDARD	80
3.5.6	EUT OPERATING CONDITION	80
3.5.7	TEST RESULTS	81
3.6	OUT OF BAND EMISSION MEASUREMENT	82
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	82
3.6.2	TEST SETUP	82
3.6.3	TEST INSTRUMENTS	82
3.6.4	TEST PROCEDURE	82
3.6.5	DEVIATION FROM TEST STANDARD	83
3.6.6	EUT OPERATING CONDITION	83
3.6.7	TEST RESULTS	83
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	84
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	85
6	APPENDIX 1 WLAN 2.4G	86
	DTS BANDWIDTH	86
	TEST RESULT	86
	TEST GRAPHS	87
	MAXIMUM CONDUCTED OUTPUT POWER	92
	TEST RESULT PEAK	92



TEST RESULT AVERAGE	92
MAXIMUM POWER SPECTRAL DENSITY	93
TEST RESULT	93
TEST GRAPHS	93
BAND EDGE MEASUREMENTS	98
TEST RESULT	98
TEST GRAPHS	99
CONDUCTED SPURIOUS EMISSION	102
TEST RESULT	102
TEST GRAPHS	103
DUTY CYCLE	112
TEST RESULT	112
TEST GRAPHS	113
7 APPENDIX 2 BLE	115
DTS BANDWIDTH	115
TEST RESULT	115
TEST GRAPHS	116
OCCUPIED CHANNEL BANDWIDTH	118
TEST RESULT	118
TEST GRAPHS	119
MAXIMUM CONDUCTED OUTPUT POWER	121
TEST RESULT PEAK	121
TEST RESULT AVERAGE	121
MAXIMUM POWER SPECTRAL DENSITY	122
TEST RESULT	122
TEST GRAPHS	123
BAND EDGE MEASUREMENTS	125
TEST RESULT	125
TEST GRAPHS	126
CONDUCTED SPURIOUS EMISSION	127
TEST RESULT	127
TEST GRAPHS	128
DUTY CYCLE	131
TEST RESULT	131
TEST GRAPHS	132



**BUREAU
VERITAS** Test Report No.: W7L-P23010015RF06

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P23010015RF06	Original release	Mar. 02, 2023



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	Test lab*
15.207	AC Power Conducted Emission	Compliance	A
15.205 15.209	Radiated Emissions	Compliance	A
15.247(d)	Out of band Emission Measurement	Compliance	A
15.247(a)(2)	6dB bandwidth	Compliance	A
15.247(b)	Conducted Output power	Compliance	A
15.247(e)	Power Spectral Density	Compliance	A
15.203	Antenna Requirement	Compliance	A

Note : 1.Except RSE · other data please refer to Appendix 1 (for WIFI-2.4G) and Appendix 2 (for BLE)

2. Only the worse data were report

***Test Lab Information Reference**

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Mobile phone
BRAND NAME	NOKIA
MODEL NAME	TA-1558
NOMINAL VOLTAGE	5.0Vdc(adapter) 3.85Vdc (Li-ion, battery)
MODULATION	DSSS, OFDM, GFSK
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n20: up to 72.2 Mbps BT_LE: 1 Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2402-2480MHz for BT-LE(GFSK)
MAX. OUTPUT POWER	WLAN: 302mW (Maximum) BT-LE: 1.016mW (Maximum)
ANTENNA TYPE	PIFA Antenna with 1.2dBi gain
HW VERSION	SPR_S63Q0
SW VERSION	00WW_0_122
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable1: non-shielded cable, with w/o ferrite core, 1 meter USB cable2: non-shielded cable, with w/o ferrite core, 1 meter USB cable3: non-shielded cable, with w/o ferrite core, 1 meter Earphone: non-shielded cable, with w/o ferrite core, 1.2 meter



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n (20MHz)	1TX /1RX
BT_LE(1MHz)	1TX /1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. The product of TA-1558(FCC ID: 2AJOTTA-1558), only the following manufacturer of key parts is different between the first and second supply, other parameters are the same. The details are as follows:

NO.	Change Description		specifications	first supplier	specifications	second supplier
1	PCBA	64GB EMMC	FEMDNN064G-A3A56 BWCTARV11X64G	Longsys	FEMDNN064G-A3A56 BWCTARV11X64G	Biwin
		128GB EMMC	FEMDNN128G-A3A56 BWCTAKJ21X128G	Longsys	FEMDNN128G-A3A56 BWCTAKJ21X128G	Biwin
		3GB LPDDR	FLXC4003G-50 BWMEXX32H2A-24Gb-X	Longsys	FLXC4003G-50 BWMEXX32H2A-24Gb-X	Biwin
		4GB LPDDR	FLXC2004G-30 BWMZCX32H2A-32Gb-X	Longsys	FLXC2004G-30 BWMZCX32H2A-32Gb-X	Biwin
		PCB	/	KINGSHINE	/	wuzhu
2	LCM	LCD	6.517 HKC, 360min,400typ, 2.5D	TCL	6.517 HKC, 360min,400typ, 2.5D	Lia
3	Front camera	Camera	8M FF COM	Lianhe	8M FF COM	Shijia
4	Macro CAM	Camera	2M FF	Shijia	2M FF	Lianhe
5	Acoustic	Speaker	1712 1W	Dong Sheng	1712 1W	Xin Rongda



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

		Vibrator	1027 FPC	Chao Yin	1027 FPC	Kai Long
		Receiver	0809	Dong Sheng	0809	Xin Rongda
		Glass rear cover	Glass, monochrome printing or film	Kaimao	Glass, monochrome printing or film	Longqin gxiangru i
		FPC	/	Lante	/	Kaihong xin
6	Battery		5000MAH	Gaoyuan	5000MAH	Fenghua
7	Data cable		2A typeC	Yuwei	2A typeC	Juwei



List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
LCD Panel 1	HKC	MianYang HKC Optoelectronics Technology Co., Ltd.	QM065HS03-1	6.517
LCD Panel 2	BOE	BOE	BV065WBQ-L1B	6.517
Battery 1	Nokia	Guangdong Fenghua New Energy Co.,Ltd.	WT510	Capacity : 3.85 Vdc, 4900mAh
Battery 2	Nokia	HUNAN GAOYUAN BATTERY Co., Ltd.	WT510	Capacity : 3.85 Vdc, 4900mAh
AC Adapter	Nokia	SHENZHEN BAIJUNDA ELECTRONICS.,LTD	AD-010U	I/P: 100-240Vac, 0.35A, O/P: 5.0Vdc, 2.0A
Earphone	Juwei Electronics Co., LTD	Juwei Electronics Co., LTD	JWEP1252-H21H	Signal Line, 1.2meter
USB Cable 1	Juwei Electronics Co., LTD	Juwei Electronics Co., LTD	JWUB1536-H21H	Signal Line, 1.0meter
USB Cable 2	Yu Wei	Dongguan Yuwei Electronic Technology Co., Ltd.	CH2212TC	Signal Line, 1.0meter
USB Cable 3	Sai bao	Saibao (Jiangxi) Industrial Co., Ltd	SHM1-A003A	Signal Line, 1.0meter



2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11n HT20	1 to 11	6	OFDM	MCS0
BT-LE	0 to 39	19	GFSK	1.0



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1

POWER LINE CONDUCTED EMISSION TEST

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11n HT20	1 to 11	6	OFDM	MCS0



**BUREAU
VERITAS**

Test Report No.: W7L-P23010015RF06

BANDEdge MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 5V By Adapter	Chao Wu
RE≥1G	23deg. C, 70%RH	DC 5V By Adapter	Chao Wu
PLC	25deg. C, 52%RH	DC 5V By Adapter	Chao Wu
APCM	25deg. C, 60%RH	DC 3.85V By Battery	Chao Wu



2.3 Duty Cycle of Test Signal

Please Refer to Appendix1/2 Of this test report.

WORST-CASE DATA:

Measured Duty Cycle		
Mode	Duty Cycle [%]	
	ANT0+1	
WIFI 2.4GHz	11B	99.45
	11G	96.8
	11N20	97.70
BT LE	BT4.0	86.97

Note:

Duty cycle of test signal is < 98%, duty factor shall be considered.



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2013

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	102749	Feb.25,22	Feb.24,24
ELEKTRA test software	Rohde&Schwarz	ELEKTRA	NA	N/A	N/A
LISN network	Rohde&Schwarz	ENV216	102640	Feb.17,22	Feb.16,24
CABLE	Rohde&Schwarz	W61.01	N/A	Oct.31,22	Apr.29,23
CABLE	Rohde&Schwarz	W601	N/A	Oct.31,22	Apr.29,23

NOTE:

1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 6 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRT/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

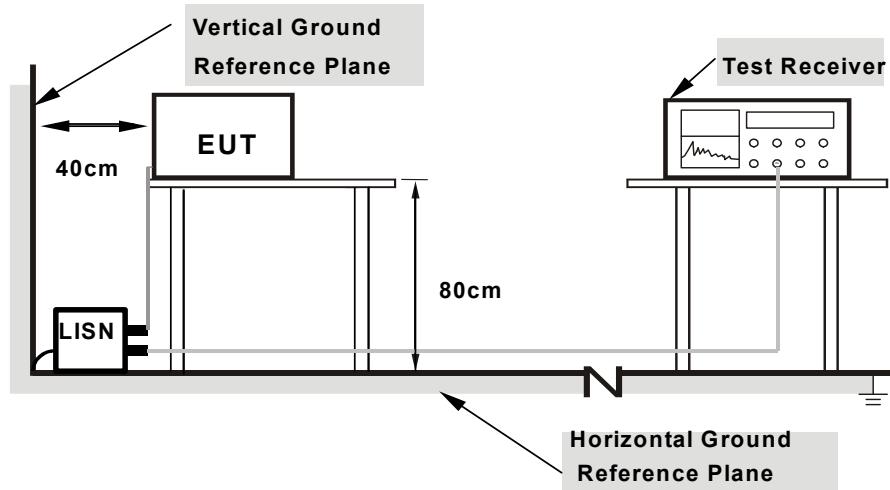

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

3.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25deg. C, 55%RH
Tested By	Chao Wu		

Rg	Frequency [MHz]	QPK Level [dB μ V]	QPK Limit [dB μ V]	QPK Margin [dB]	CAV Level [dB μ V]	CAV AVG Limit [dB μ V]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.159	38.51	65.52	27.01	20.86	55.52	34.66	10.38	L1	9.000
1	0.681	39.51	56.00	16.49	25.16	46.00	20.84	9.89	L1	9.000
1	1.397	20.77	56.00	35.23	9.62	46.00	36.38	9.69	L1	9.000
1	2.693	23.30	56.00	32.70	10.62	46.00	35.38	9.63	L1	9.000
1	4.871	26.50	56.00	29.50	14.05	46.00	31.95	9.61	L1	9.000
1	11.778	41.92	60.00	18.08	25.49	50.00	24.51	9.66	L1	9.000

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Limit value -Emission level
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

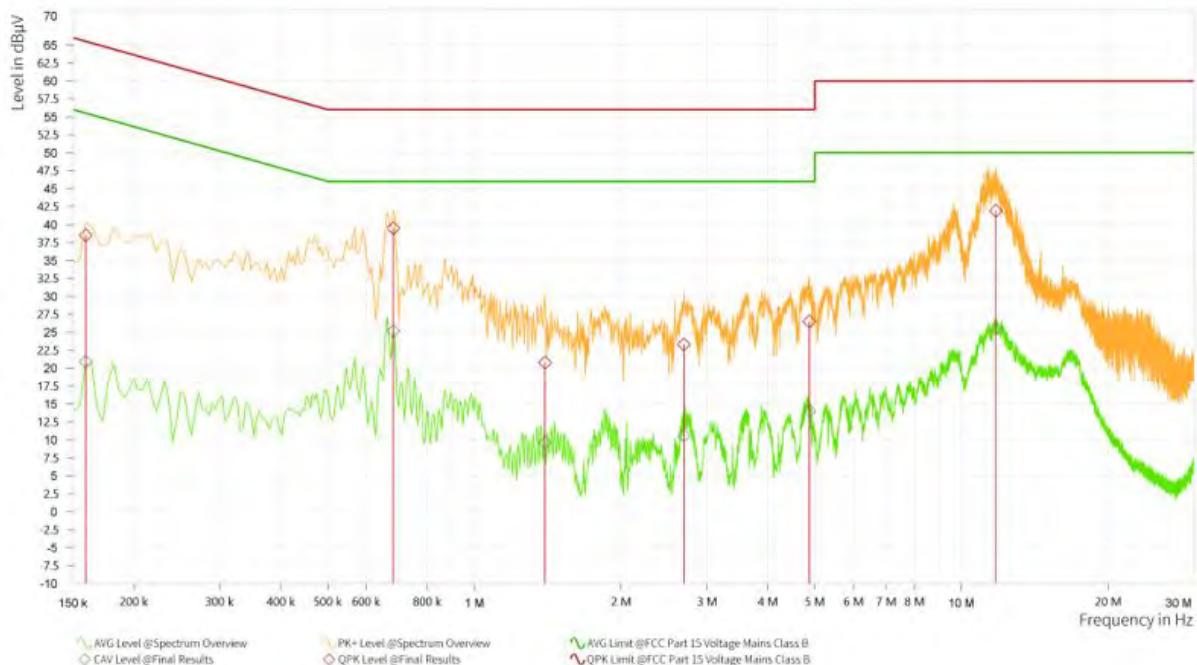

BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25deg. C, 55%RH
Tested By	Chao Wu		

Rg	Frequency [MHz]	QPK Level [dB μ V]	QPK Limit [dB μ V]	QPK Margin [dB]	CAV Level [dB μ V]	CAV AVG Limit [dB μ V]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.393	32.85	58.00	25.15	18.30	48.00	29.70	9.95	N	9.000
1	0.672	44.87	56.00	11.13	34.58	46.00	11.42	9.90	N	9.000
1	1.919	30.00	56.00	26.00	19.56	46.00	26.44	9.65	N	9.000
1	3.611	29.04	56.00	26.96	17.91	46.00	28.09	9.62	N	9.000
1	6.657	32.83	60.00	27.17	23.07	50.00	26.93	9.62	N	9.000
1	11.409	41.95	60.00	18.05	31.07	50.00	18.93	9.68	N	9.000

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Limit value - Emission level

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

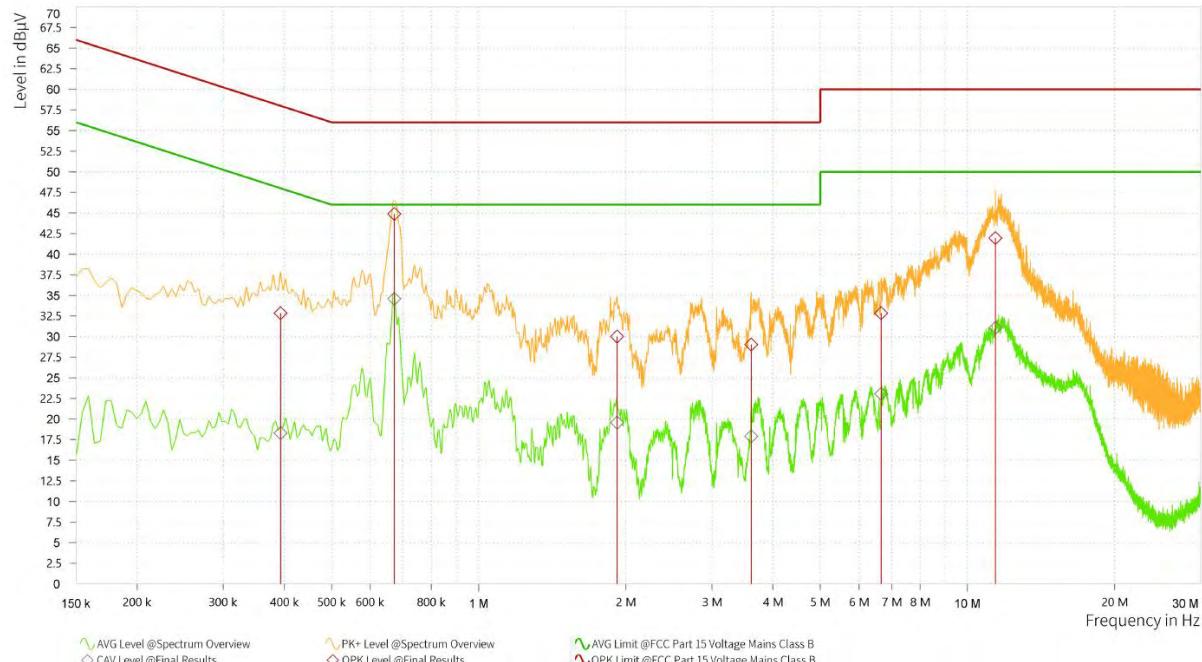



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-E MC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-E MC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Bilog Antenna	SCHWARZBEC K	VULB 9163	1264	Feb.28,22	Feb.27,24
Horn Antenna	ETS-LINDGRE N	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Stearite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna	Stearite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CA BLE)	R&S	HF290-NMNM-7 .00M	N/A	N/A	N/A
TMC-AMI18843A(CA BLE)	R&S	HF290-NMNM-4 .00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Oct.31,22	Apr.29,23
CABLE	R&S	W12.14	N/A	Oct.31,22	Apr.29,23

NOTE: 1. The calibration interval of the above test instruments is 6 months or 24 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRT/CHINA and NIM/CHINA.
2. The test was performed in 3m Chamber.
3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor (10 log(1/duty cycle)).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle ≥ 98%) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.2.4 DEVIATION FROM TEST STANDARD

No deviation




3.2.5 TEST SETUP

<Frequency Range 9KHz~30MHz >

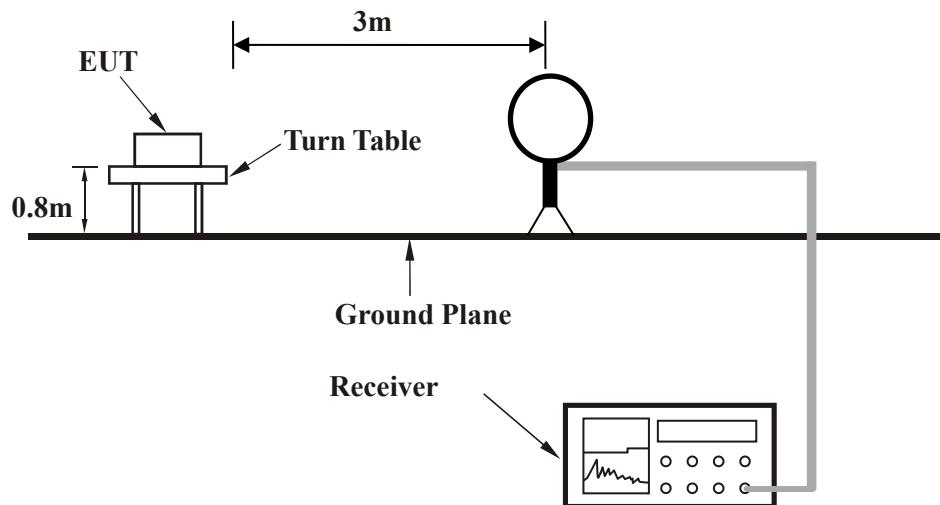


< Frequency Range 30MHz~1GHz >

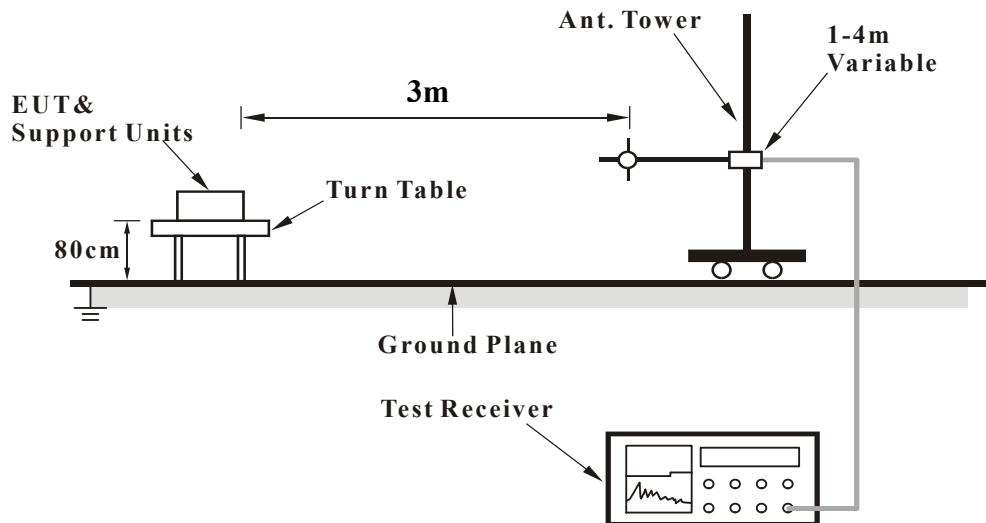



<Frequency Range above 1GHz>

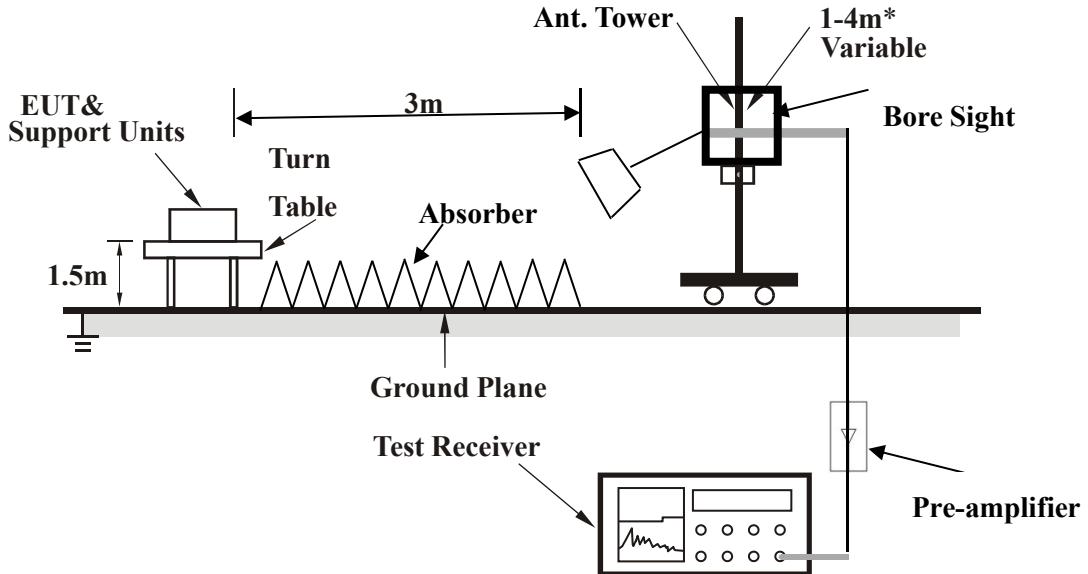

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

**BUREAU
VERITAS****Test Report No.: W7L-P23010015RF06**

3.2.7 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:

802.11n (20MHz)


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dB μ V/m]	QPK Limit [dB μ V/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	49.400	18.29	40.00	21.71	-17.66	H	160.2	2	120.000
1	99.307	12.73	43.50	30.77	-21.17	H	160.2	2	120.000
1	165.800	5.05	43.50	38.45	-25.73	H	355	2	120.000
1	251.063	4.21	46.00	41.79	-23.19	H	259.7	2	120.000
1	402.723	1.11	46.00	44.89	-19.86	H	355	2	120.000
1	695.954	5.30	46.00	40.70	-15.41	H	355	2	120.000

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.

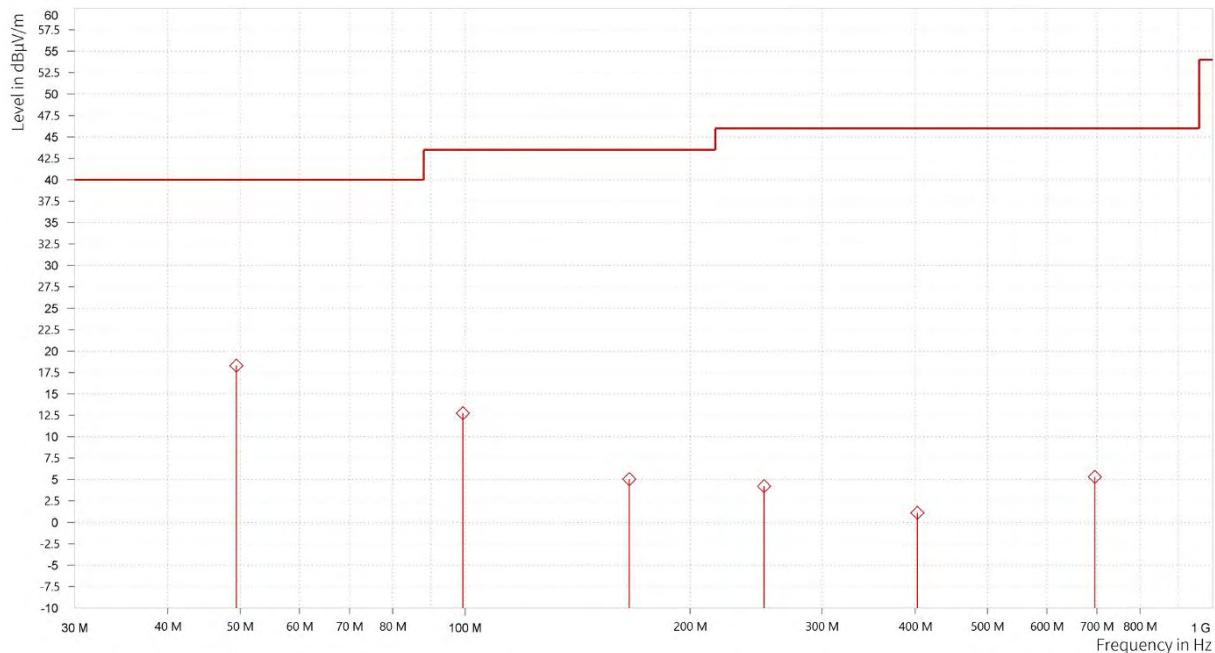

◇ QPK Level @Final Results | ▲ QPK Limit @FCC LimitRE


BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dB μ V/m]	QPK Limit [dB μ V/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	35.432	26.35	40.00	13.65	-20.00	V	5	1	120.000
1	53.183	5.70	40.00	34.30	-18.89	V	299.2	1	120.000
1	85.872	-0.24	40.00	40.24	-24.33	V	299.2	1	120.000
1	184.861	-3.94	43.50	47.44	-24.71	V	200.6	1	120.000
1	383.662	0.86	46.00	45.14	-20.24	V	5	1	120.000
1	695.566	5.52	46.00	40.48	-15.38	V	200.6	1	120.000

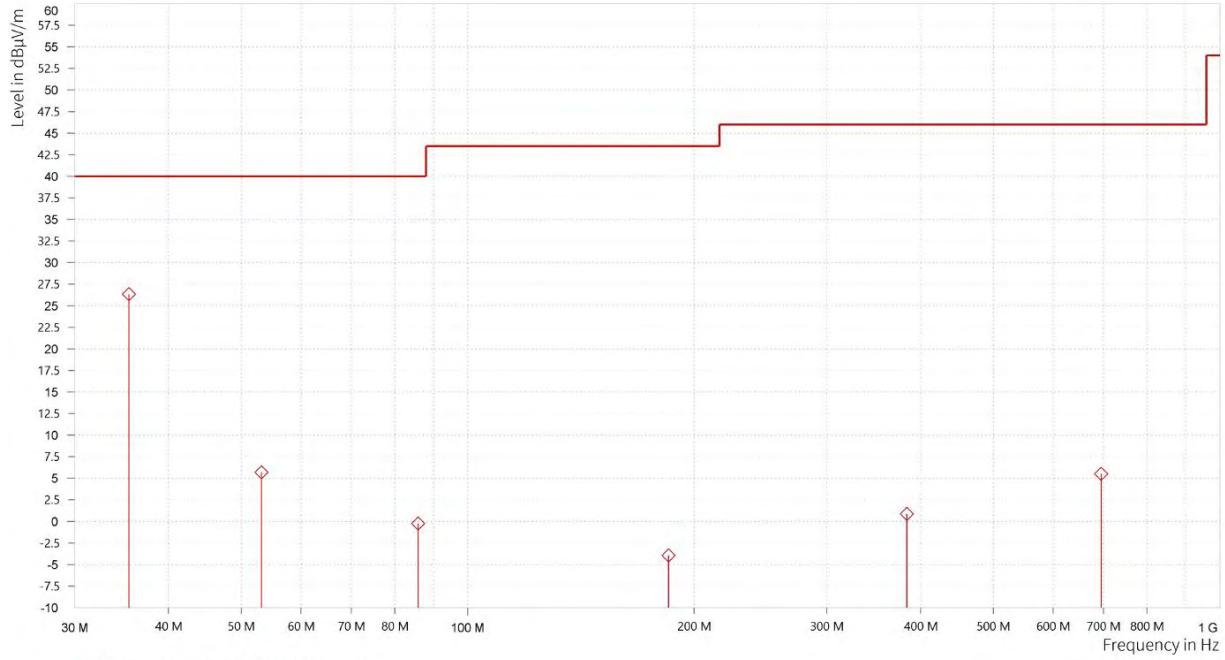**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.

**BUREAU
VERITAS****Test Report No.: W7L-P23010015RF06****ABOVE 1GHz WORST-CASE DATA:**

Note: 1. For radiated emissions testing · the full testing range of different modes have been scanned · only the worst case harmonic data is reported in the sheet.


2. All other emissions were greater than 20dB below the limit was not recorded

802.11b:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,386.500	35.54	54.00	18.46	9.81	H	232.4	2
1	2,390.000	34.28	54.00	19.72	9.84	H	232.4	2
1	2,413.000	98.04			9.87	H	232.4	2

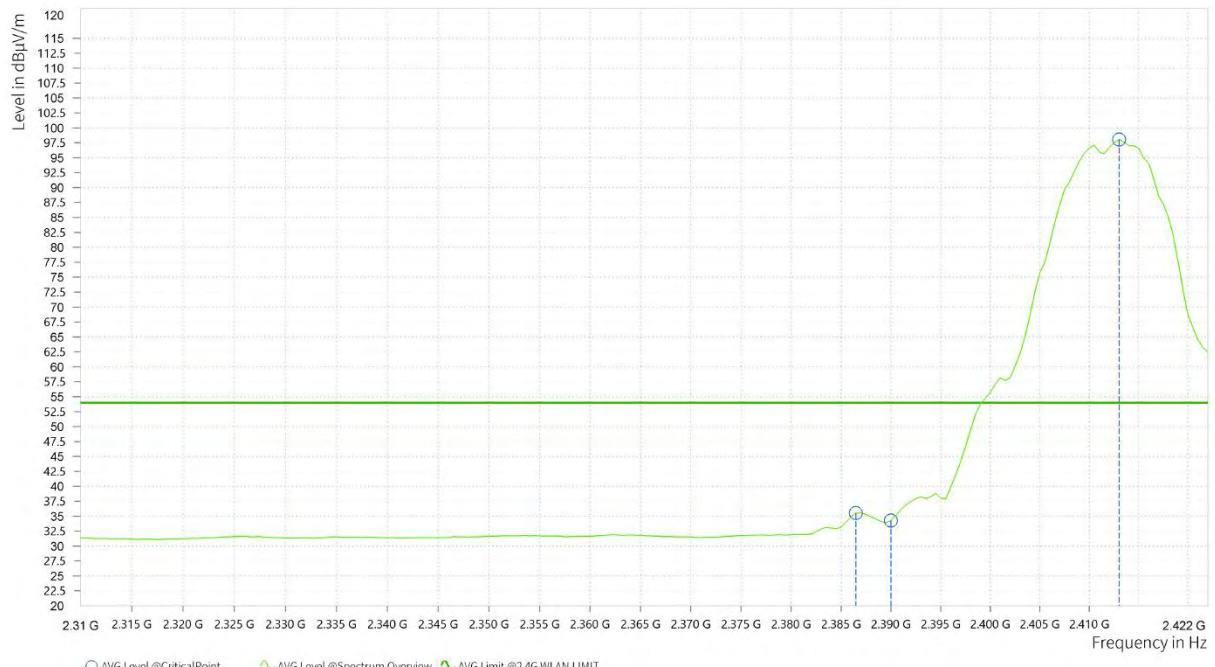



**BUREAU
VERITAS** Test Report No.: W7L-P23010015RF06

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,388.000	46.97	74.00	27.03	9.82	H	228.9	2
1	2,390.000	45.55	74.00	28.45	9.84	H	251.7	2
1	2,413.000	100.80			9.87	H	207.5	2

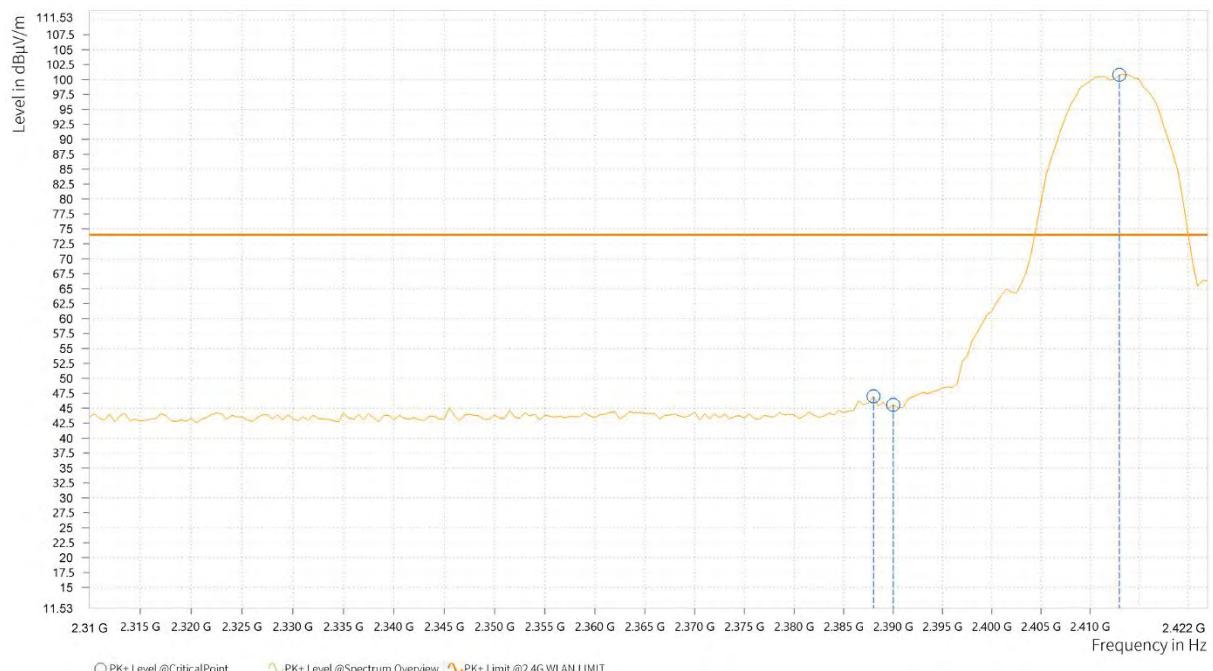



BUREAU
VERITAS Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,387.000	31.59	54.00	22.41	9.82	V	156.1	1
1	2,390.000	31.15	54.00	22.85	9.84	V	339.6	1
1	2,413.500	90.90			9.87	V	156.1	1






BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,378.500	43.18	74.00	30.82	9.75	V	22.2	1
1	2,390.000	42.18	74.00	31.82	9.84	V	258.8	2
1	2,414.000	94.06			9.87	V	153.7	1

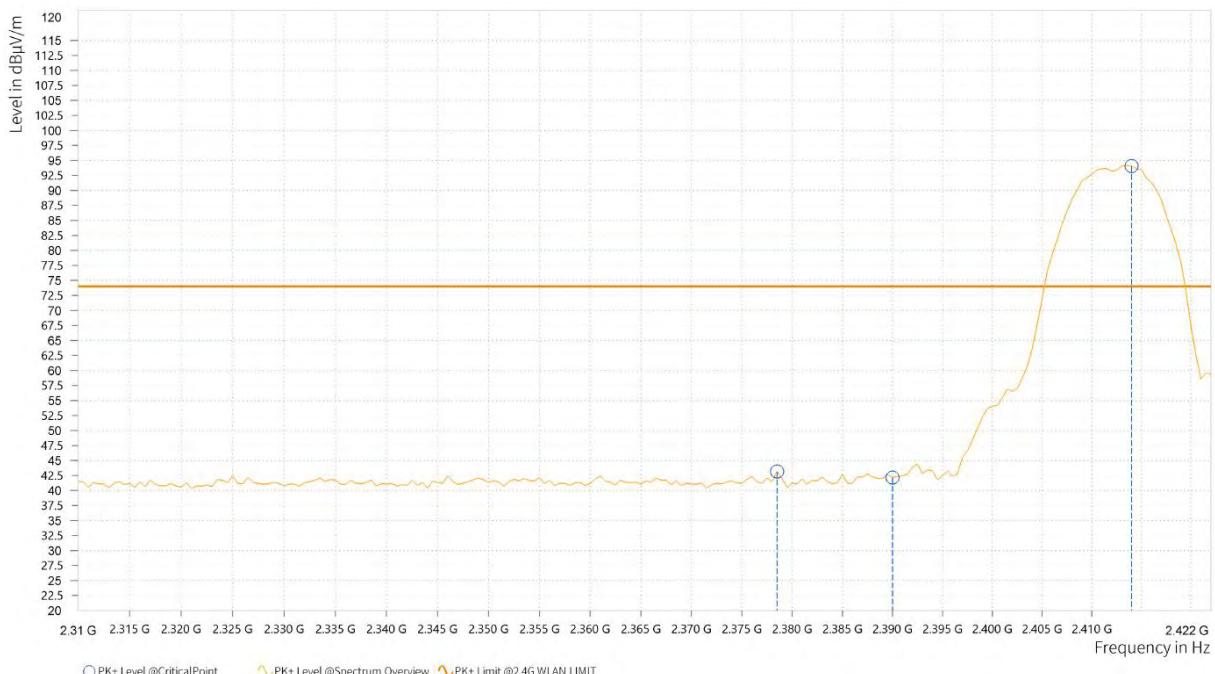

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level..
2. 2412MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,874.206	54.10	74.00	19.90	40.63	54.00	13.37	15.94	H	1	1
3	6,201.000	57.28	74.00	16.72	43.96	54.00	10.04	20.88	H	128.5	2

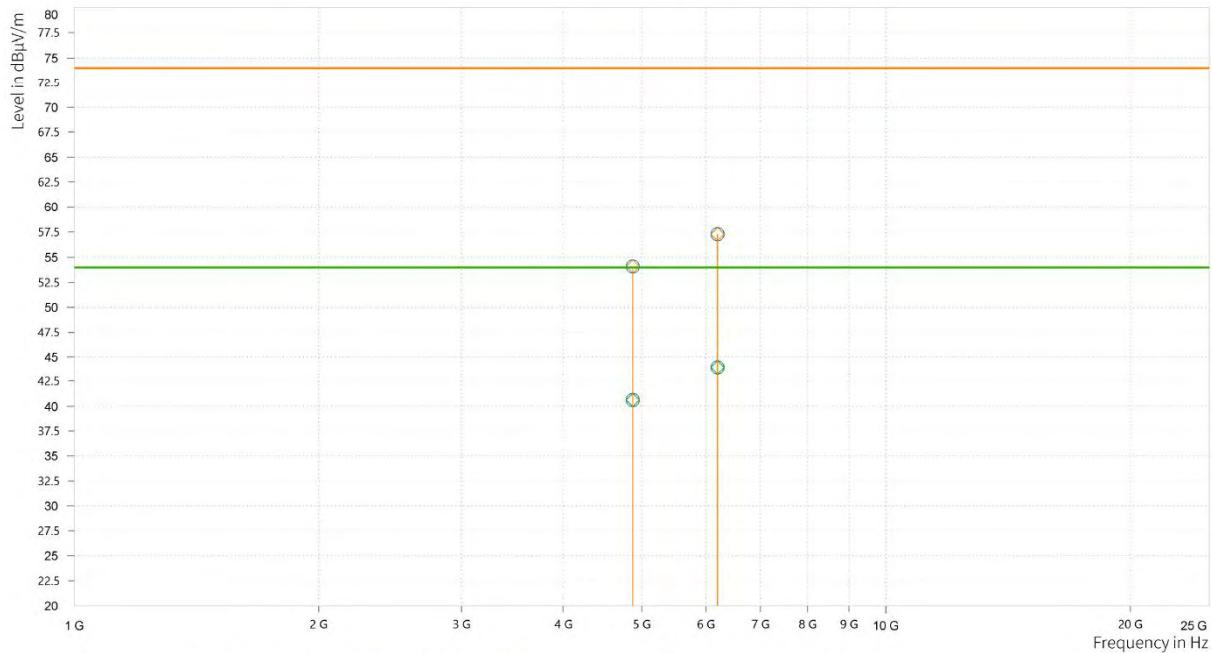


BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,874.206	52.71	74.00	21.29	40.62	54.00	13.38	15.94	V	1	2
3	6,288.353	57.84	74.00	16.16	44.08	54.00	9.92	21.07	V	229	1

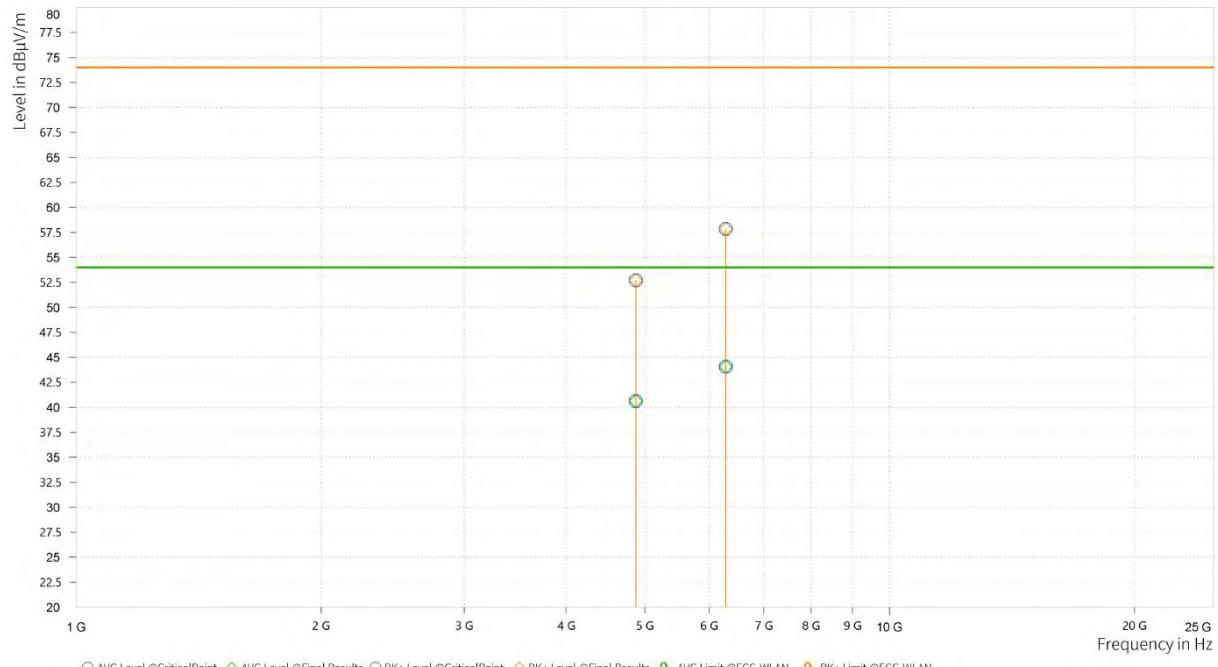**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 2437MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,464.000	95.55			9.96	H	232.4	2
1	2,483.500	34.18	54.00	19.82	9.88	H	232.4	2
1	2,486.000	34.02	54.00	19.98	9.87	H	232.4	2





Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,463.500	98.95			9.96	H	234.9	2
1	2,483.500	44.75	74.00	29.25	9.88	H	177.6	1
1	2,486.500	45.70	74.00	28.30	9.87	H	234.9	2

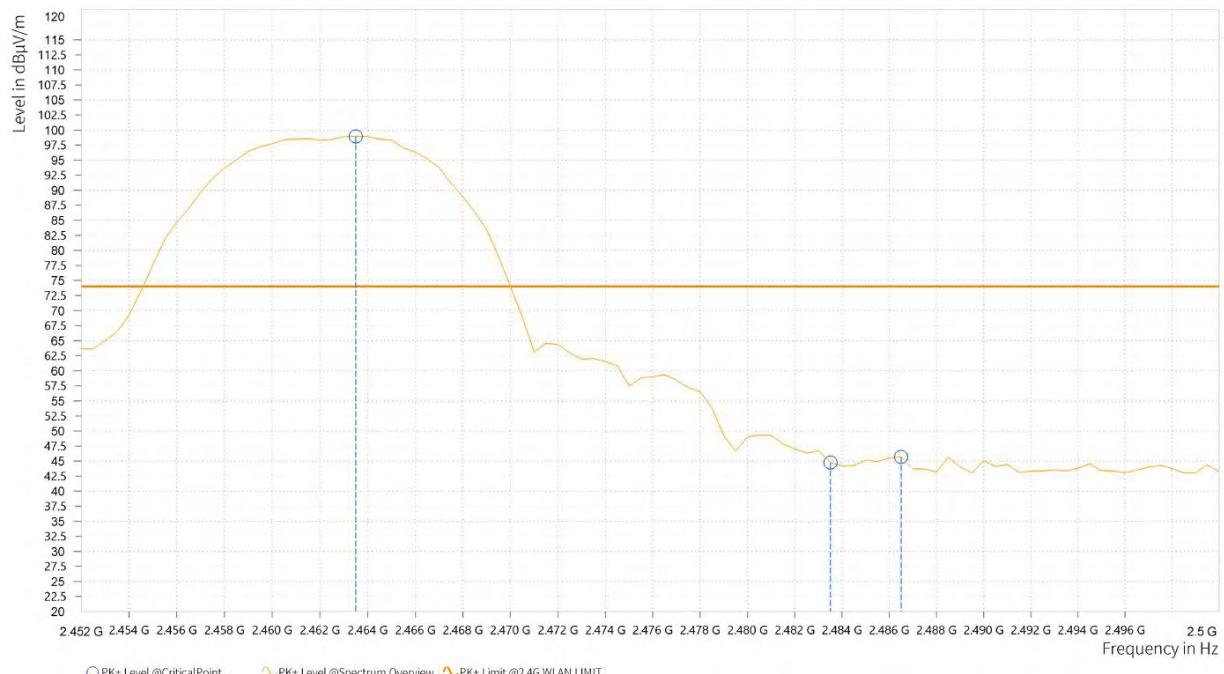



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,463.500	87.54			9.96	V	166.8	1
1	2,483.500	30.66	54.00	23.34	9.88	V	140.6	1
1	2,484.000	30.53	54.00	23.47	9.88	V	166.8	1



**BUREAU
VERITAS****Test Report No.: W7L-P23010015RF06**

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,463.000	92.70			9.96	V	132.2	1
1	2,483.500	42.22	74.00	31.78	9.88	V	86.7	1
1	2,485.500	42.48	74.00	31.52	9.87	V	224.2	1

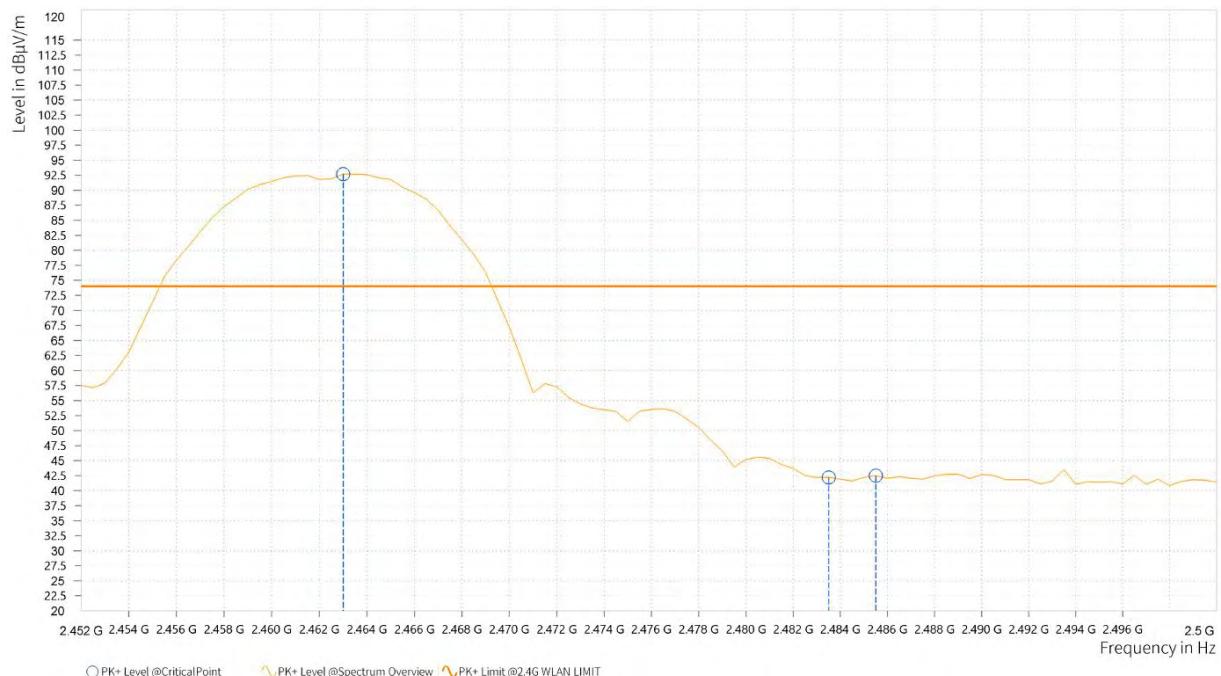

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 2462MHz: Fundamental frequency.




802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.000	40.36	54.00	13.64	9.83	H	192.1	1
1	2,390.000	42.01	54.00	11.99	9.84	H	232.5	2
1	2,417.500	92.21			9.88	H	232.5	2

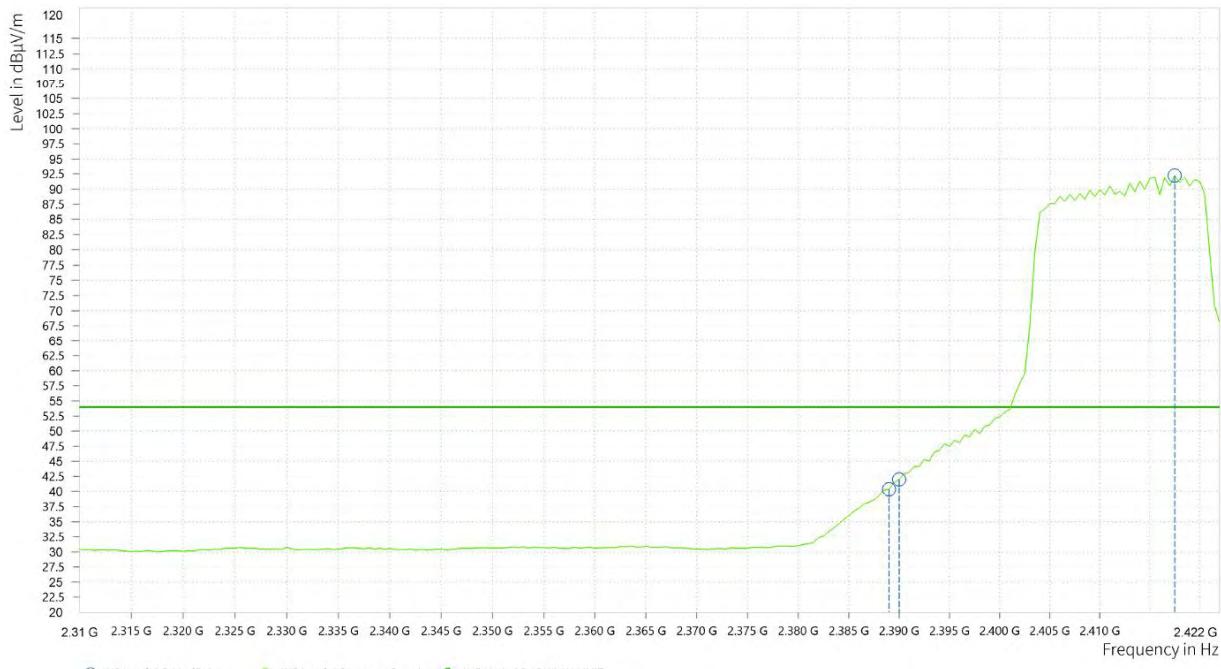



**BUREAU
VERITAS** Test Report No.: W7L-P23010015RF06

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,387.500	57.90	74.00	16.10	9.82	H	250.5	2
1	2,390.000	58.04	74.00	15.96	9.84	H	250.5	2
1	2,417.000	103.54			9.88	H	203.9	2






BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,388.000	34.23	54.00	19.77	9.82	V	189.6	1
1	2,390.000	35.49	54.00	18.51	9.84	V	189.6	1
1	2,417.500	83.54			9.88	V	151.3	1

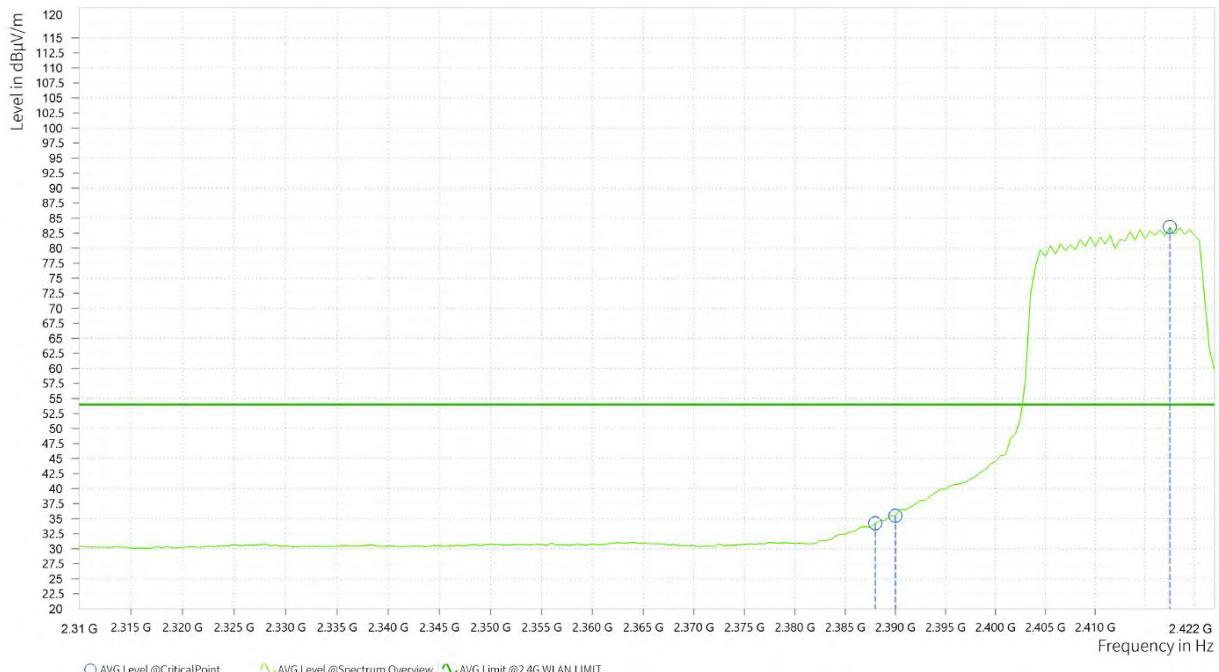




BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,388.000	52.52	74.00	21.48	9.82	V	146.6	1
1	2,390.000	49.78	74.00	24.22	9.84	V	110.7	1
1	2,418.000	95.92			9.88	V	146.6	1

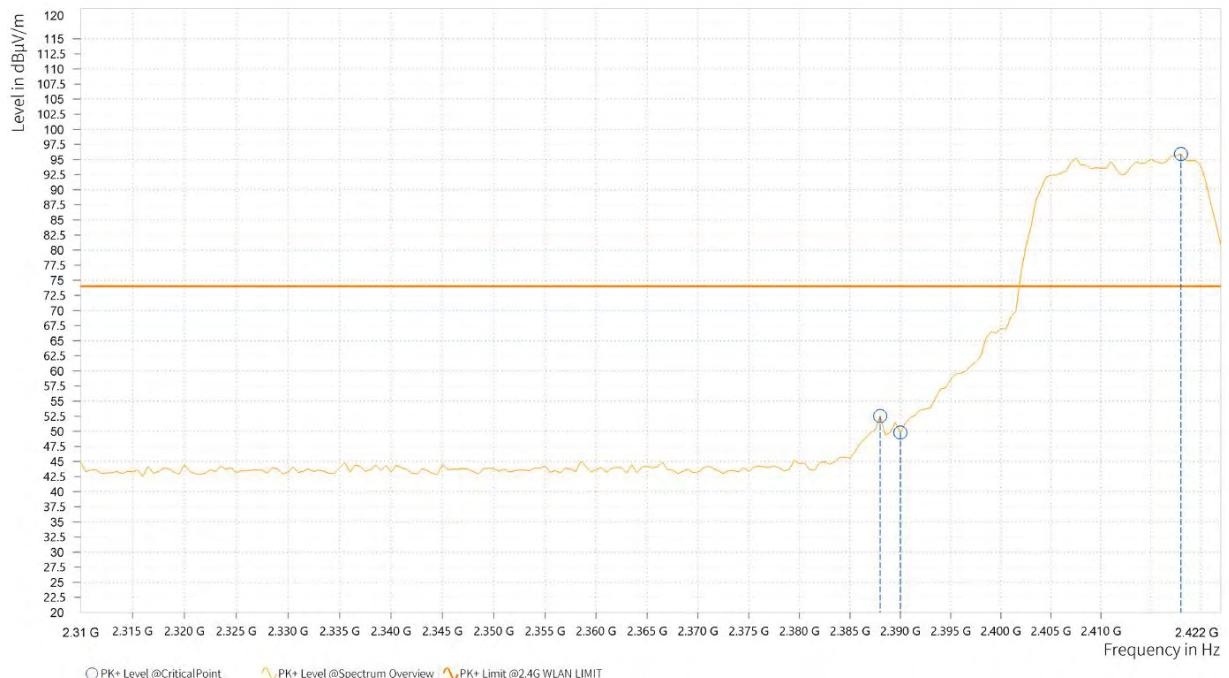

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 2412MHz: Fundamental frequency.




**BUREAU
VERITAS** Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,875.662	52.30	74.00	21.70	40.66	54.00	13.34	15.94	H	162.3	2
3	6,281.074	57.19	74.00	16.81	44.00	54.00	10.00	21.09	H	0.9	2

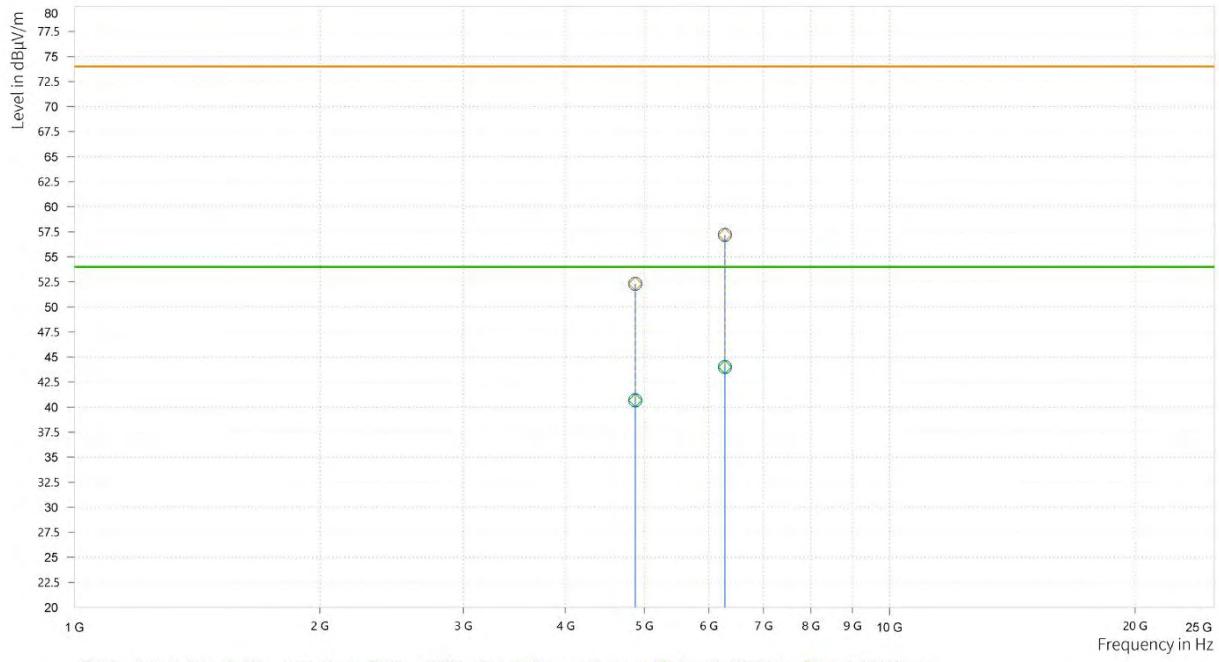


**BUREAU
VERITAS****Test Report No.: W7L-P23010015RF06**

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,874.206	52.06	74.00	21.94	40.42	54.00	13.58	15.94	V	359	2
3	6,287.382	56.59	74.00	17.41	43.92	54.00	10.08	21.07	V	359	2

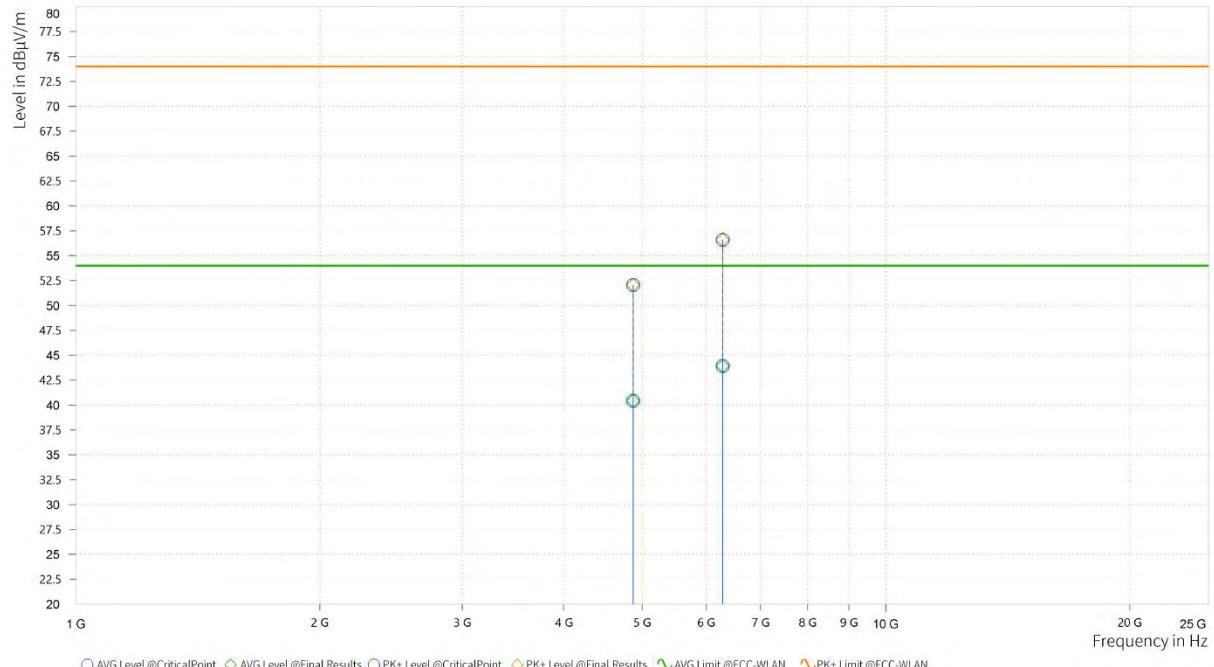**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,467.500	88.81			9.94	H	217	2
1	2,483.500	41.37	54.00	12.63	9.88	H	217	2
1	2,486.000	36.78	54.00	17.22	9.87	H	217	2






BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,467.000	99.75			9.95	H	171.6	1
1	2,483.500	64.93	74.00	9.07	9.88	H	242.2	1
1	2,484.500	60.65	74.00	13.35	9.88	H	171.6	1

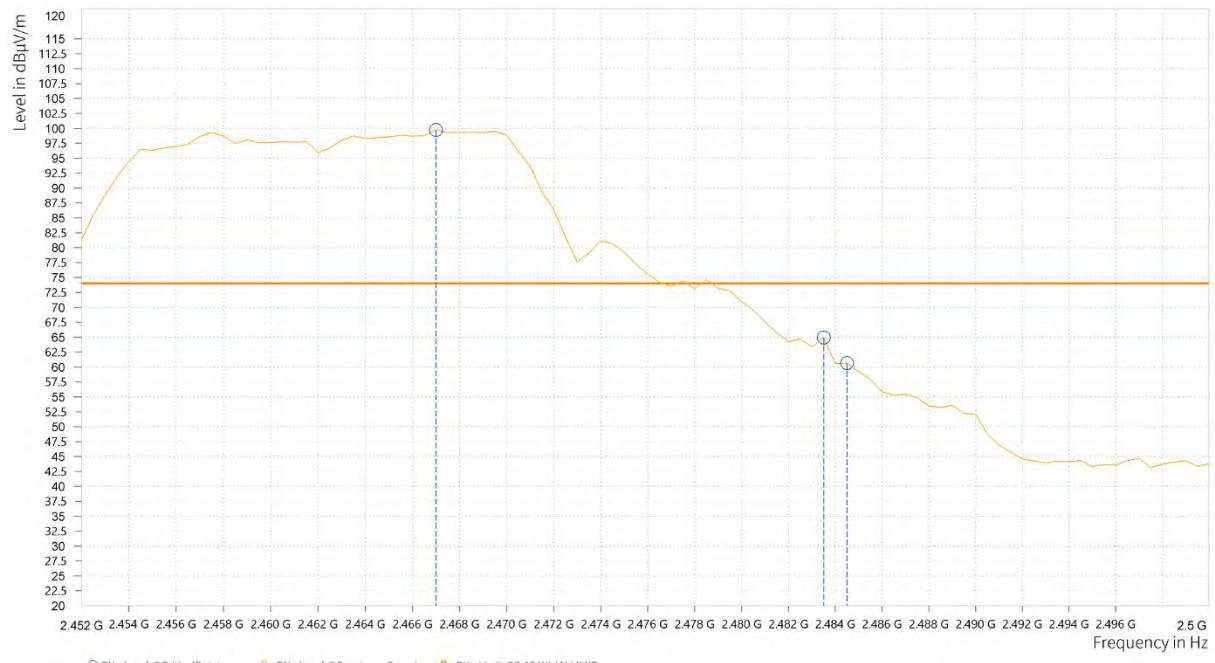



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,467.500	82.05			9.94	V	115.4	1
1	2,483.500	35.29	54.00	18.71	9.88	V	115.4	1
1	2,485.000	32.77	54.00	21.23	9.88	V	115.4	1



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,467.500	93.68			9.94	V	114.2	1
1	2,483.500	56.34	74.00	17.66	9.88	V	150.2	1
1	2,484.500	56.42	74.00	17.58	9.88	V	150.2	1

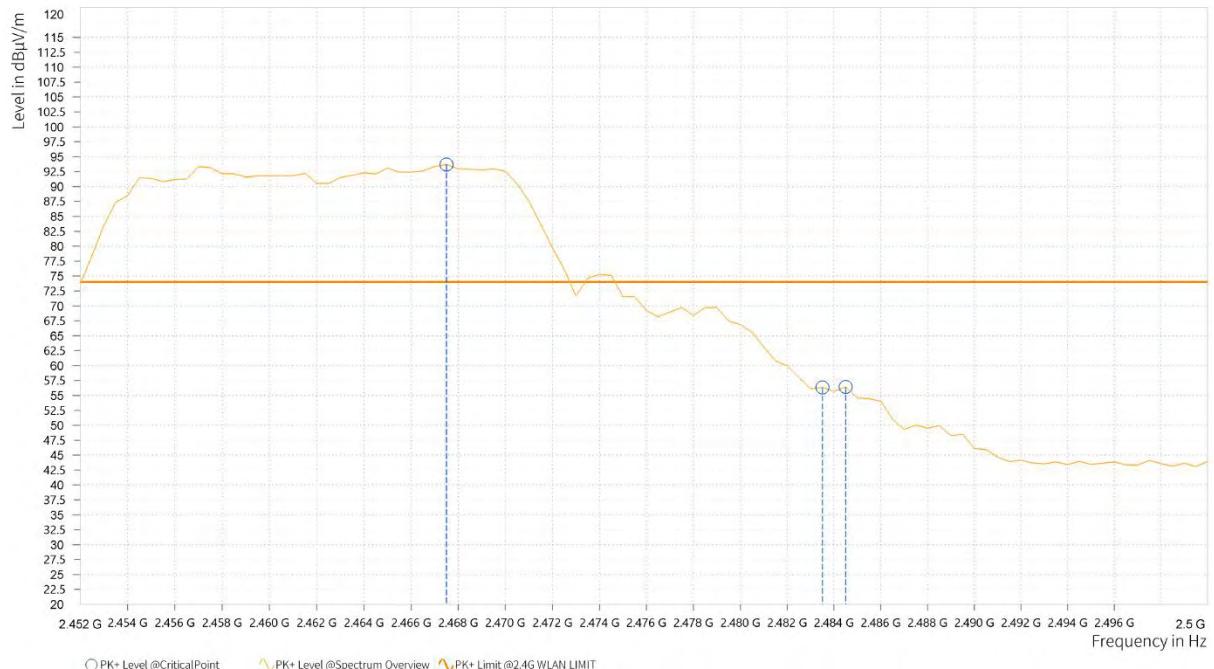

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 2462MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: W7L-P23010015RF06

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,388.500	43.54	54.00	10.46	9.83	H	219.4	2
1	2,390.000	44.98	54.00	9.02	9.84	H	219.4	2
1	2,419.000	92.59			9.88	H	219.4	2

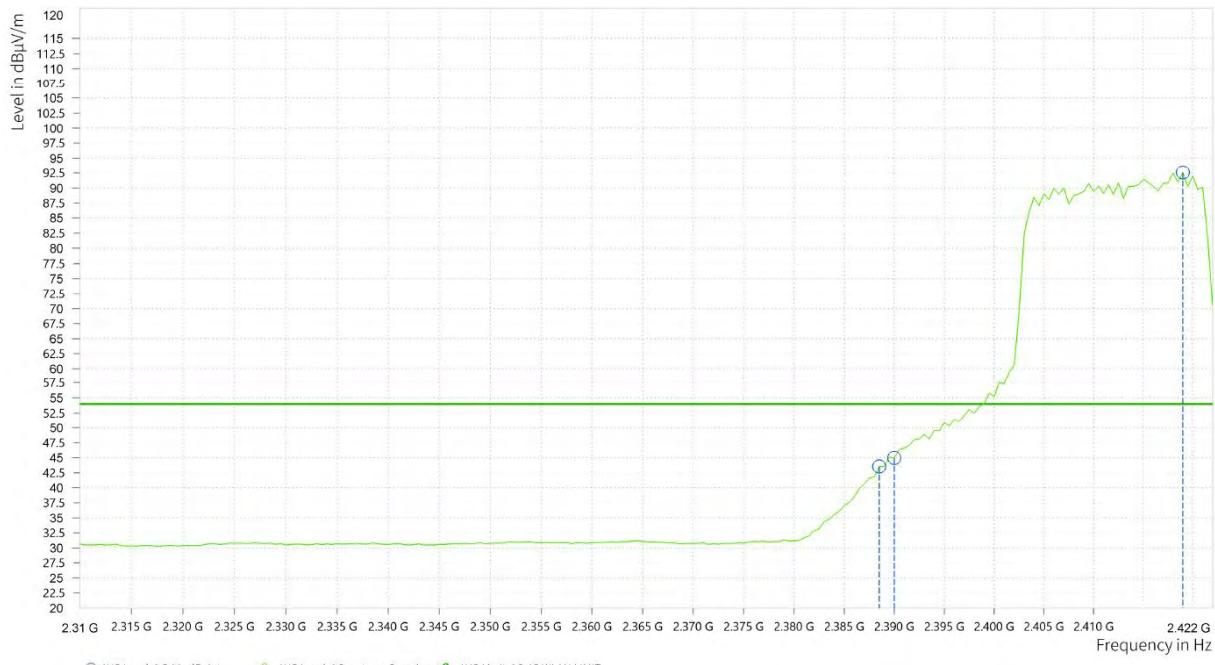



**BUREAU
VERITAS** Test Report No.: W7L-P23010015RF06

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,387.500	61.35	74.00	12.65	9.82	H	248.1	2
1	2,390.000	61.49	74.00	12.51	9.84	H	248.1	2
1	2,418.000	103.21			9.88	H	201.6	2

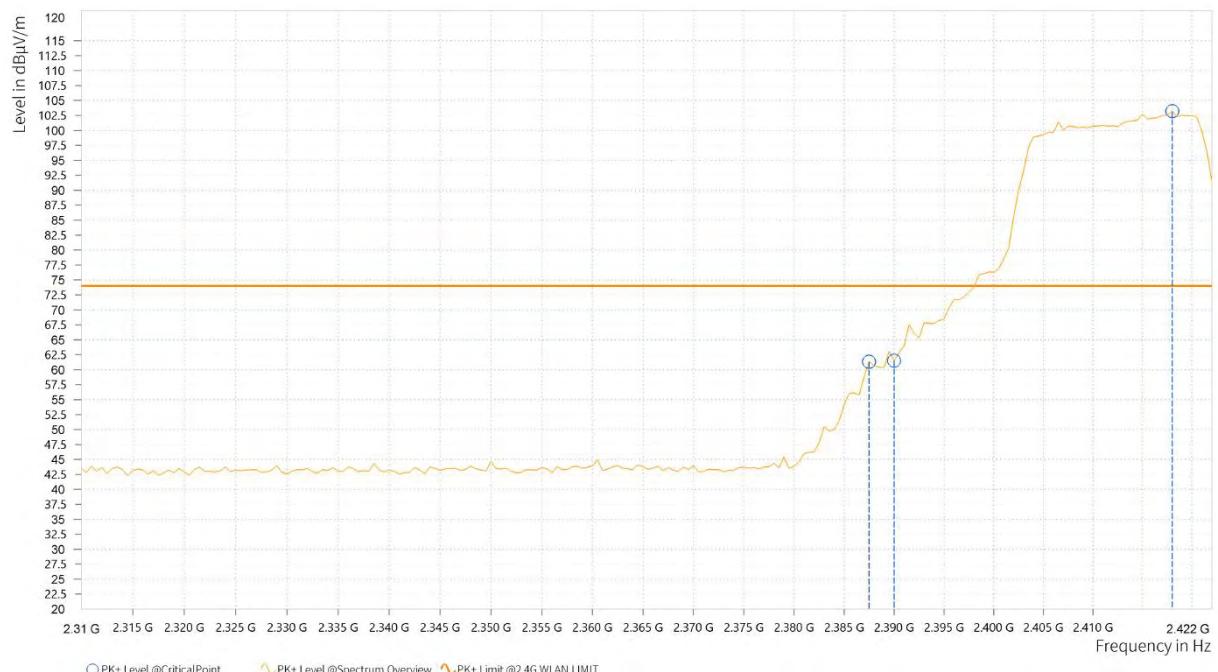


BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,388.000	35.18	54.00	18.82	9.82	V	138.3	1
1	2,390.000	37.64	54.00	16.36	9.84	V	138.3	1
1	2,420.500	82.22			9.88	V	187.3	1

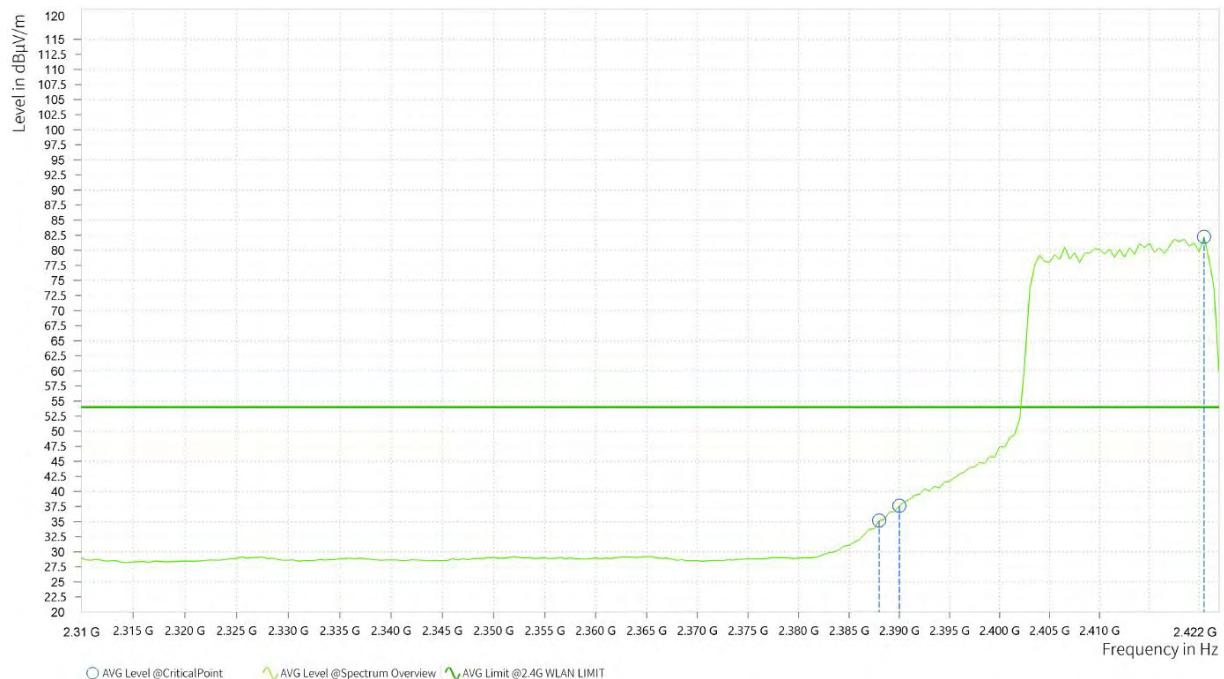



Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,388.500	53.90	74.00	20.10	9.83	V	114.3	1
1	2,390.000	53.82	74.00	20.18	9.84	V	138.3	1
1	2,417.500	94.78			9.88	V	160.9	1

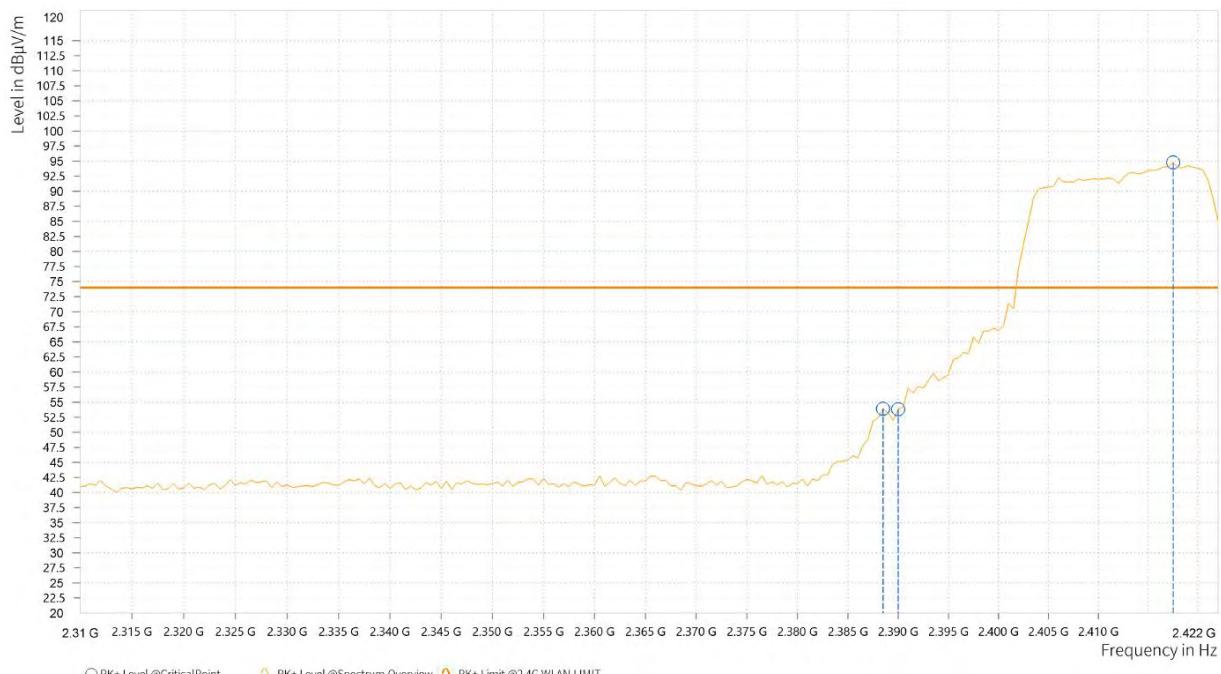

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 2412MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,873.235	51.72	74.00	22.28	40.31	54.00	13.69	15.94	H	359	2
3	5,763.750	63.32	74.00	10.68	45.52	54.00	8.48	19.09	H	0.9	2

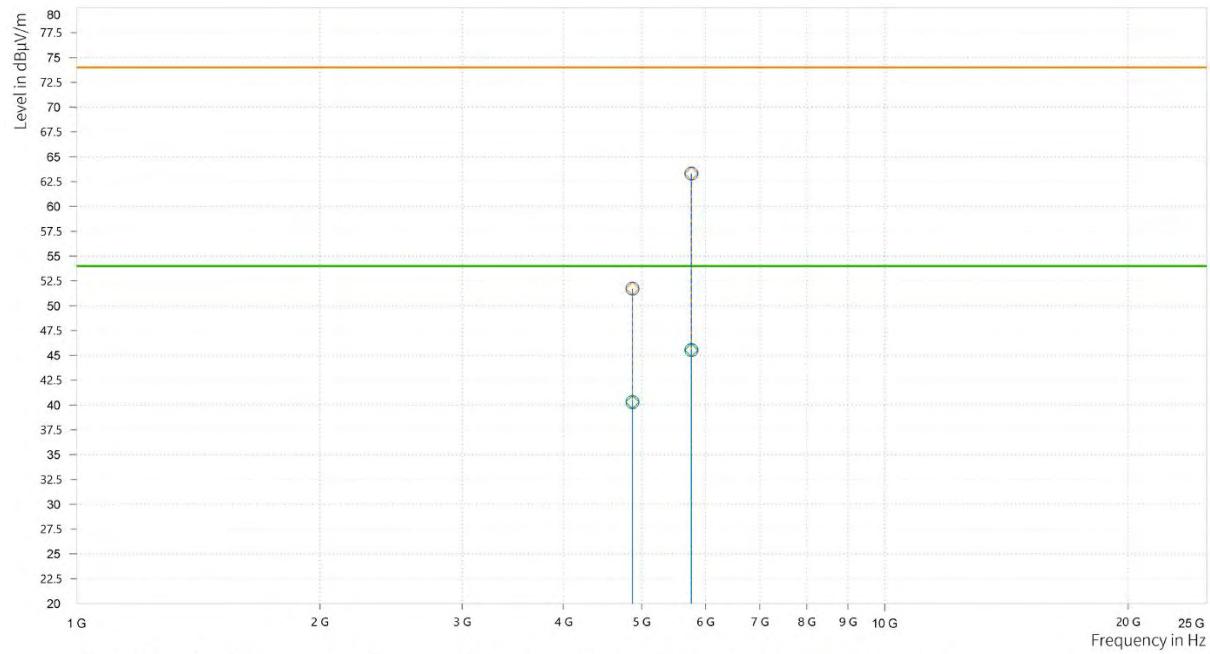




BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,876.147	52.47	74.00	21.53	40.43	54.00	13.57	15.94	V	1	1
3	6,276.706	57.28	74.00	16.72	43.59	54.00	10.41	21.11	V	359.1	1

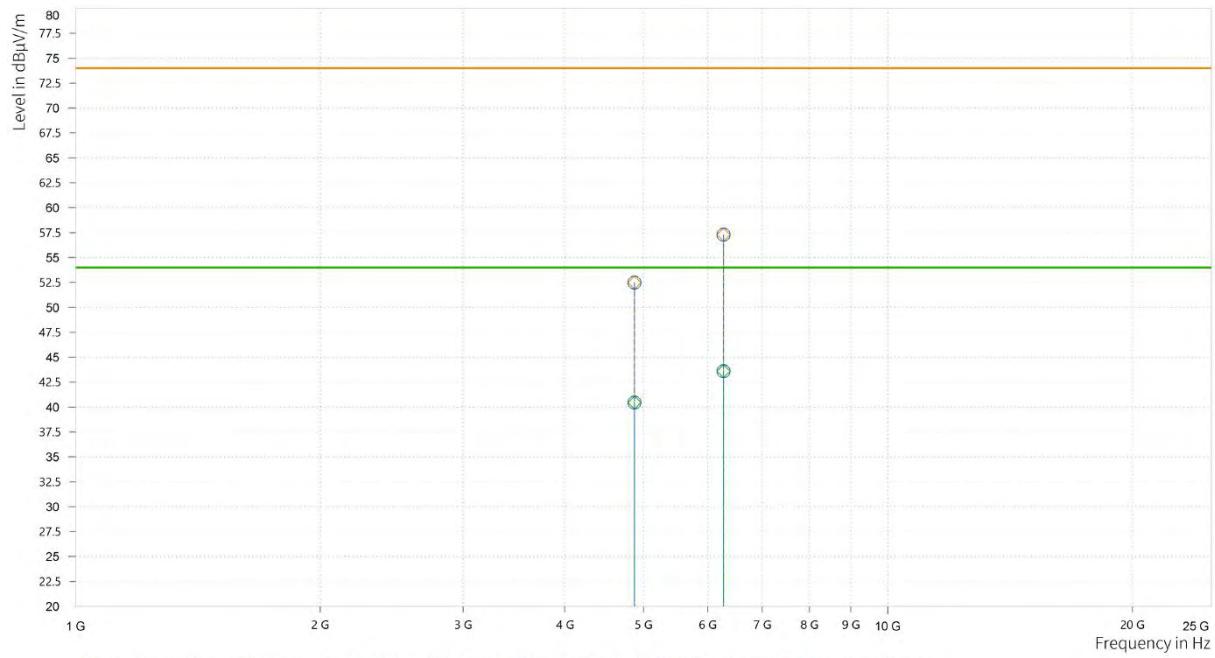

○ AVG Level @CriticalPoint ◇ AVG Level @Final Results ○ PK+ Level @CriticalPoint ◇ PK+ Level @Final Results ▲ AVG Limit @FCC-WLAN ▼ PK+ Limit @FCC-WLAN

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 2437MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,465.000	89.37			9.95	H	234.9	2
1	2,483.500	46.00	54.00	8.00	9.88	H	234.9	2
1	2,484.000	43.99	54.00	10.01	9.88	H	234.9	2

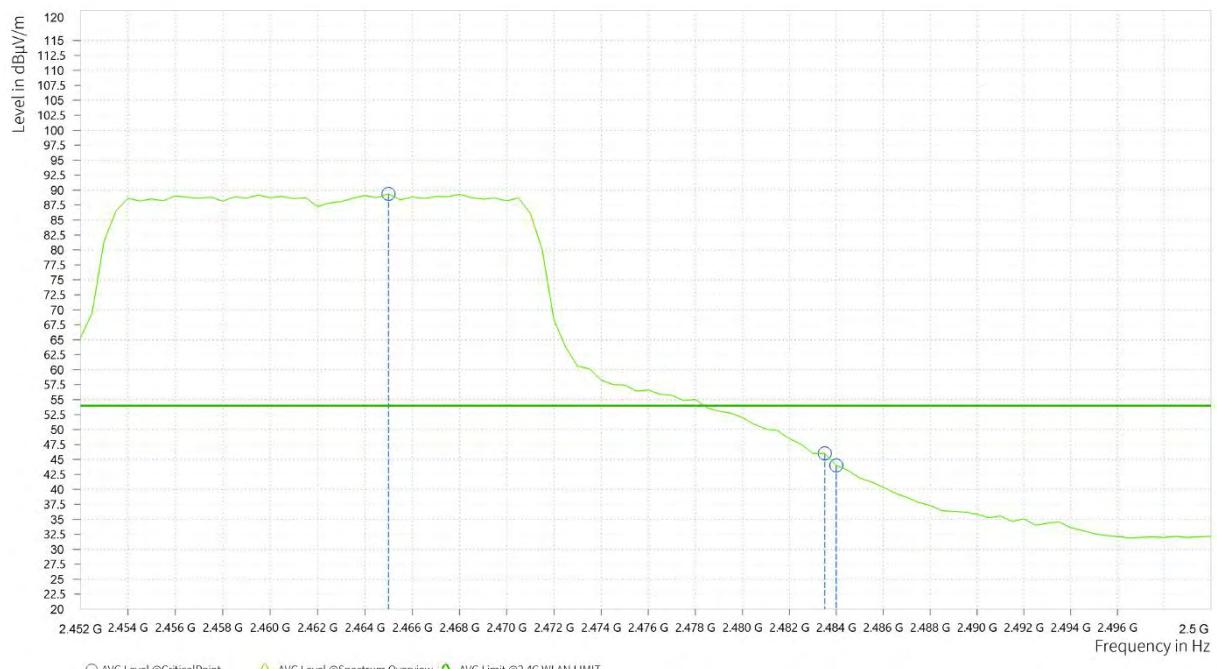




BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,467.500	99.63			9.94	H	243.3	2
1	2,483.500	66.54	74.00	7.46	9.88	H	195.5	2
1	2,484.500	65.34	74.00	8.66	9.88	H	243.3	2

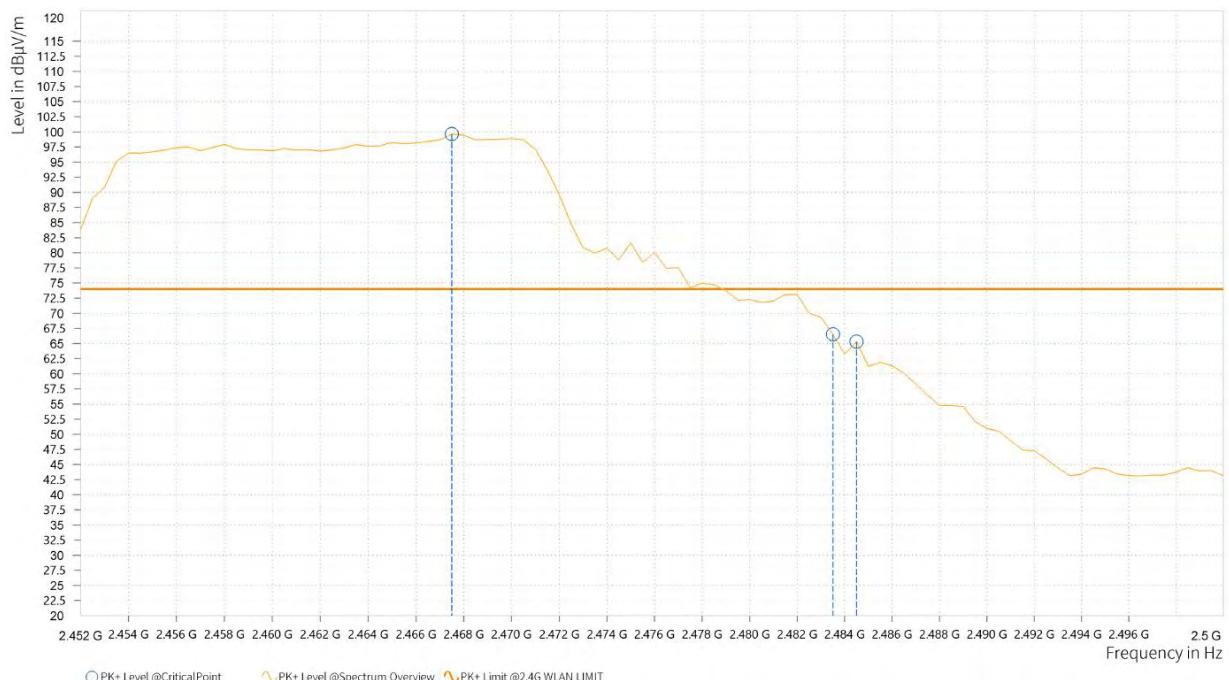



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,469.000	82.13			9.94	V	151.3	1
1	2,483.500	41.40	54.00	12.60	9.88	V	151.3	1
1	2,484.000	40.10	54.00	13.90	9.88	V	151.3	1






BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,467.000	93.18			9.95	V	115.5	1
1	2,483.500	60.37	74.00	13.63	9.88	V	139.4	1
1	2,484.500	56.10	74.00	17.90	9.88	V	139.4	1

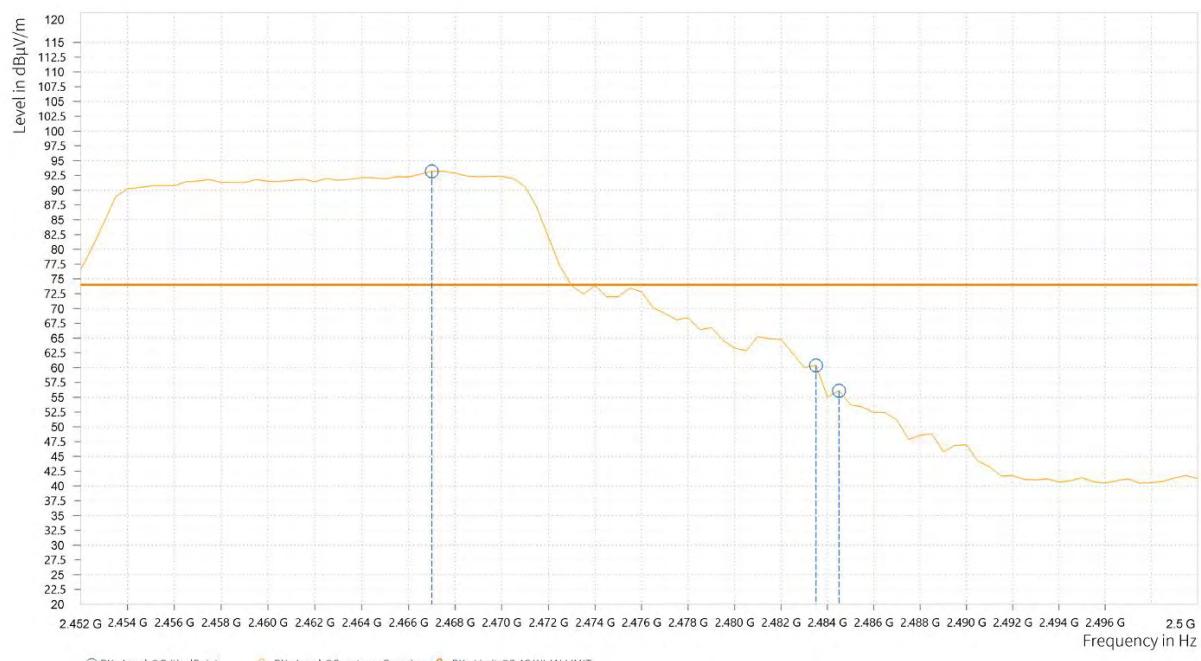

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 2462MHz: Fundamental frequency.



BELOW 1GHz WORST-CASE DATA:


30 MHz – 1GHz data:

BT-LE _1M

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dB μ V/m]	QPK Limit [dB μ V/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	39.846	12.63	40.00	27.37	-18.48	H	162.1	2	120.000
1	49.885	15.37	40.00	24.63	-17.84	H	359	2	120.000
1	97.318	6.77	43.50	36.73	-21.52	H	162.1	2	120.000
1	164.345	-1.00	43.50	44.50	-26.09	H	62.6	2	120.000
1	242.964	-0.77	46.00	46.77	-22.57	H	62.6	2	120.000
1	399.522	0.45	46.00	45.55	-20.22	H	355.6	2	120.000

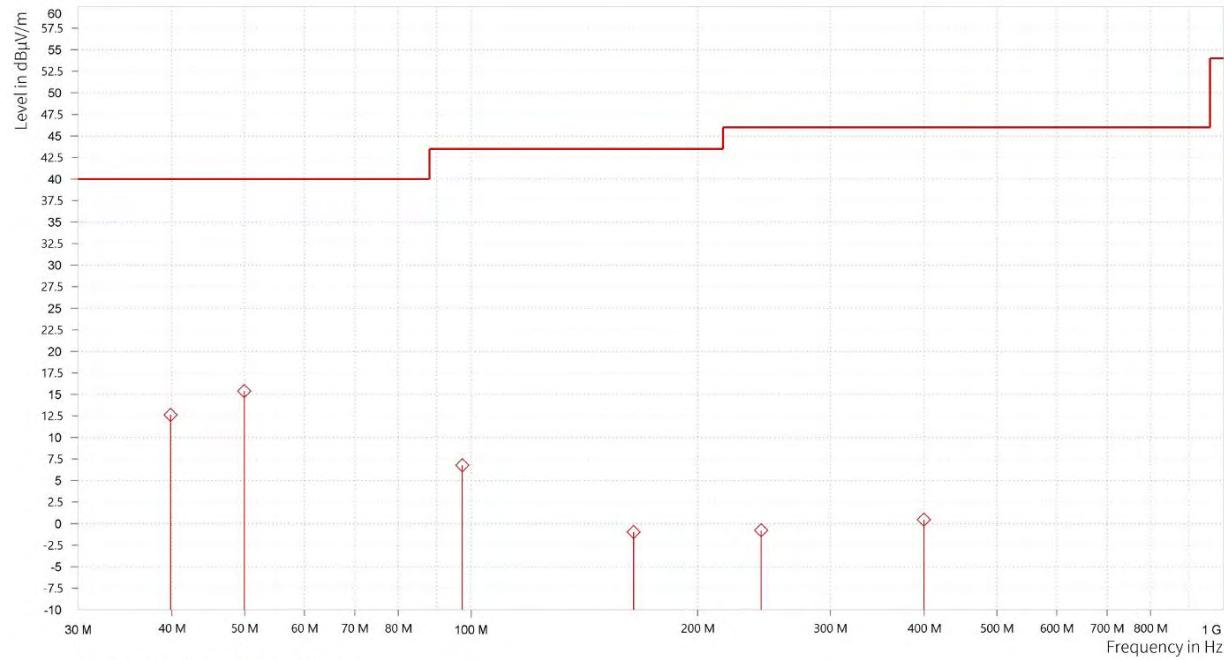

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission level.


BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dB μ V/m]	QPK Limit [dB μ V/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	35.481	19.94	40.00	20.06	-19.99	V	198.8	1	120.000
1	68.315	4.55	40.00	35.45	-22.43	V	198.8	1	120.000
1	136.215	-3.75	43.50	47.25	-25.50	V	198.8	1	120.000
1	180.011	-4.35	43.50	47.85	-25.69	V	355	2	120.000
1	322.164	-1.52	46.00	47.52	-22.03	V	5	1	120.000
1	866.771	7.73	46.00	38.27	-12.97	V	1	1	120.000

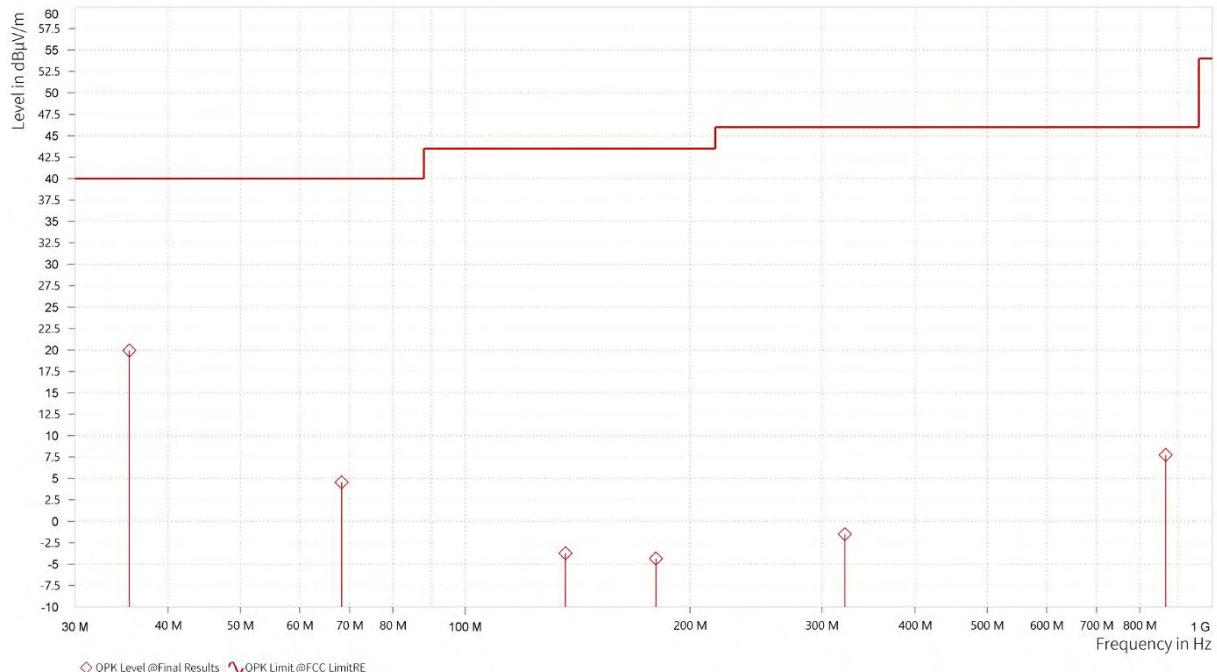**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission level.



ABOVE 1GHz TEST DATA

Note: 1. For radiated emissions testing · the full testing range of different modes have been scanned · only the worst case harmonic data is reported in the sheet.


2. All other emissions were greater than 20dB below the limit was not recorded

BT-LE _1M

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,365.000	29.39	54.00	24.61	9.64	H	342.3	1
1	2,390.000	29.56	54.00	24.44	9.84	H	101.2	1
1	2,402.000	88.23			9.85	H	218.2	2

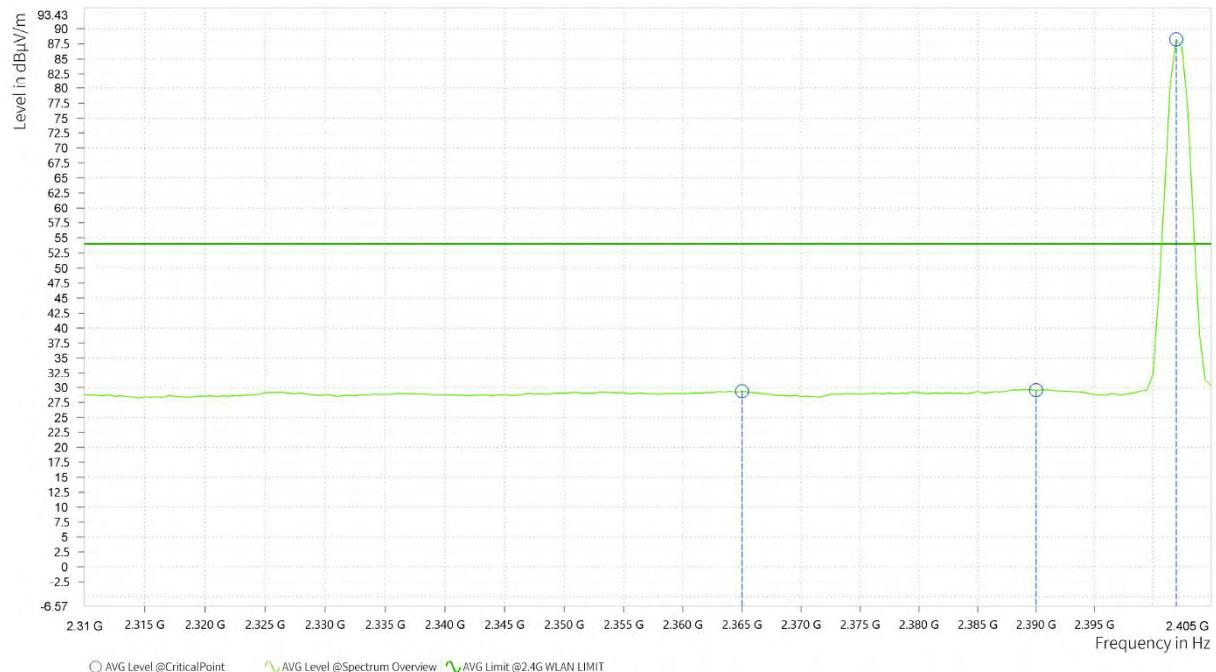



Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,380.500	43.64	74.00	30.36	9.76	H	2.1	2
1	2,390.000	42.28	74.00	31.72	9.84	H	43.8	1
1	2,402.500	93.26			9.85	H	217	2

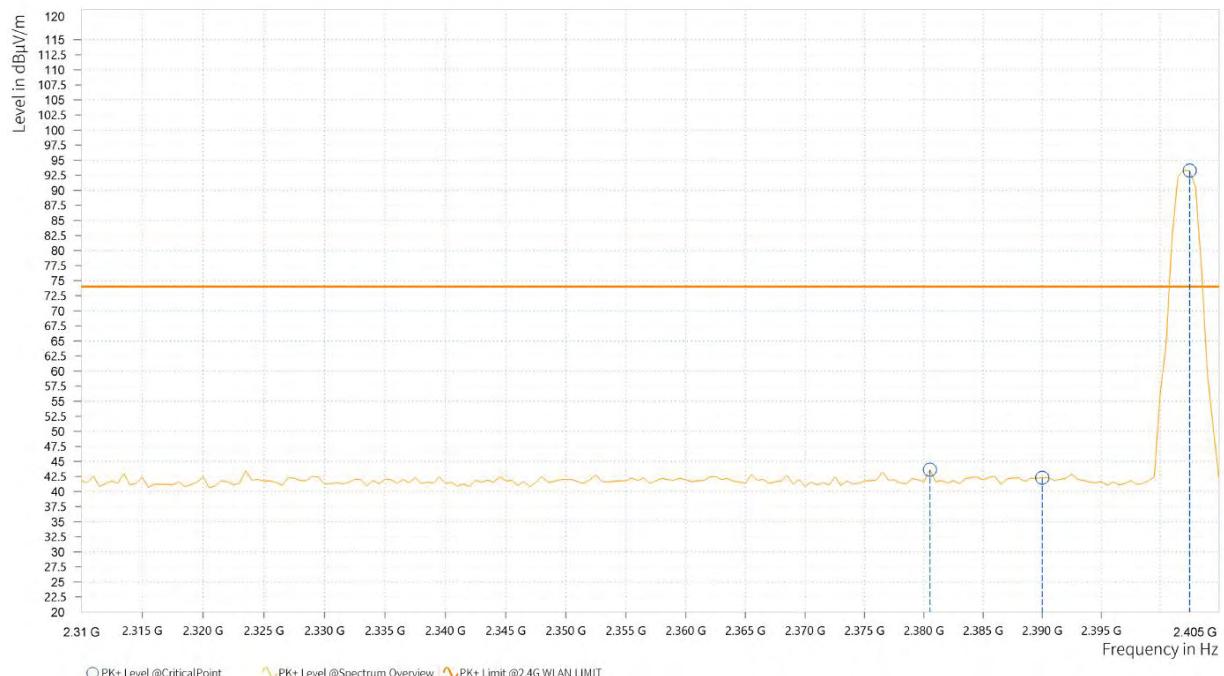



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,365.000	29.33	54.00	24.67	9.64	V	312.6	2
1	2,390.000	29.68	54.00	24.32	9.84	V	312.6	2
1	2,402.000	80.42			9.85	V	181.3	1






BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,385.500	43.29	74.00	30.71	9.80	V	1.1	2
1	2,390.000	43.06	74.00	30.94	9.84	V	192.1	1
1	2,402.500	84.71			9.85	V	168.1	1

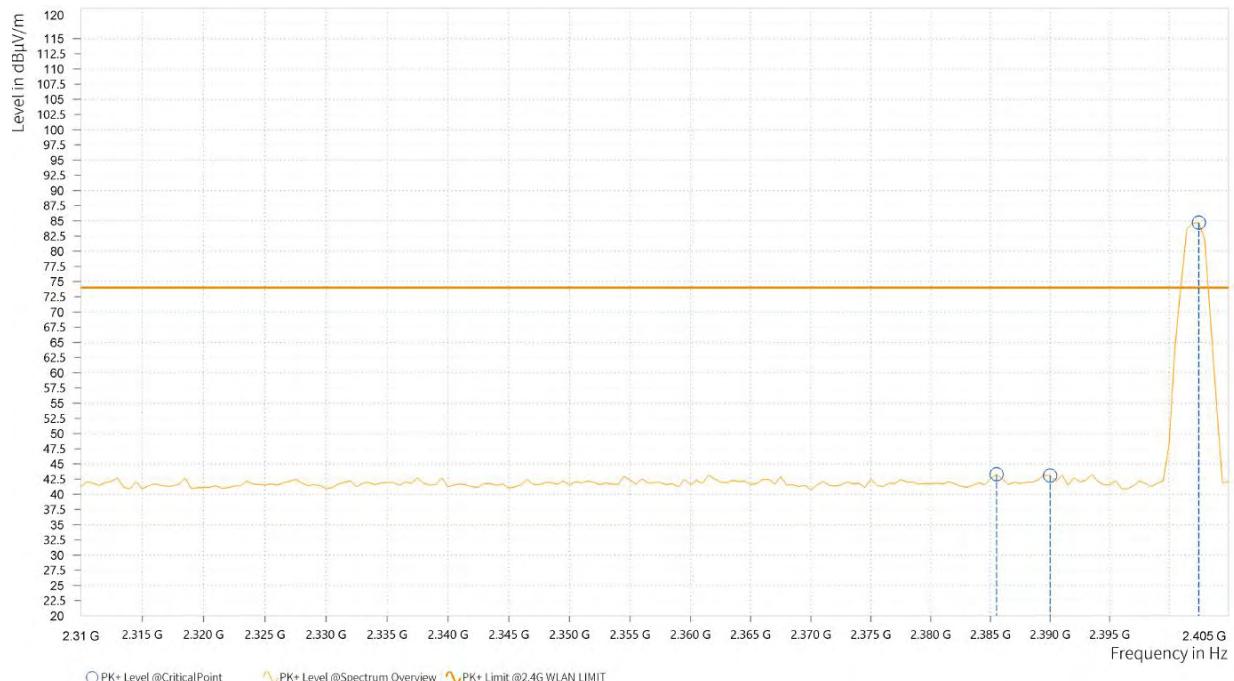

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 2402MHz: Fundamental frequency.




**BUREAU
VERITAS** Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,879.544	51.59	74.00	22.41	40.30	54.00	13.70	15.95	H	1	2
3	6,284.471	57.10	74.00	16.90	44.13	54.00	9.87	21.08	H	359	2

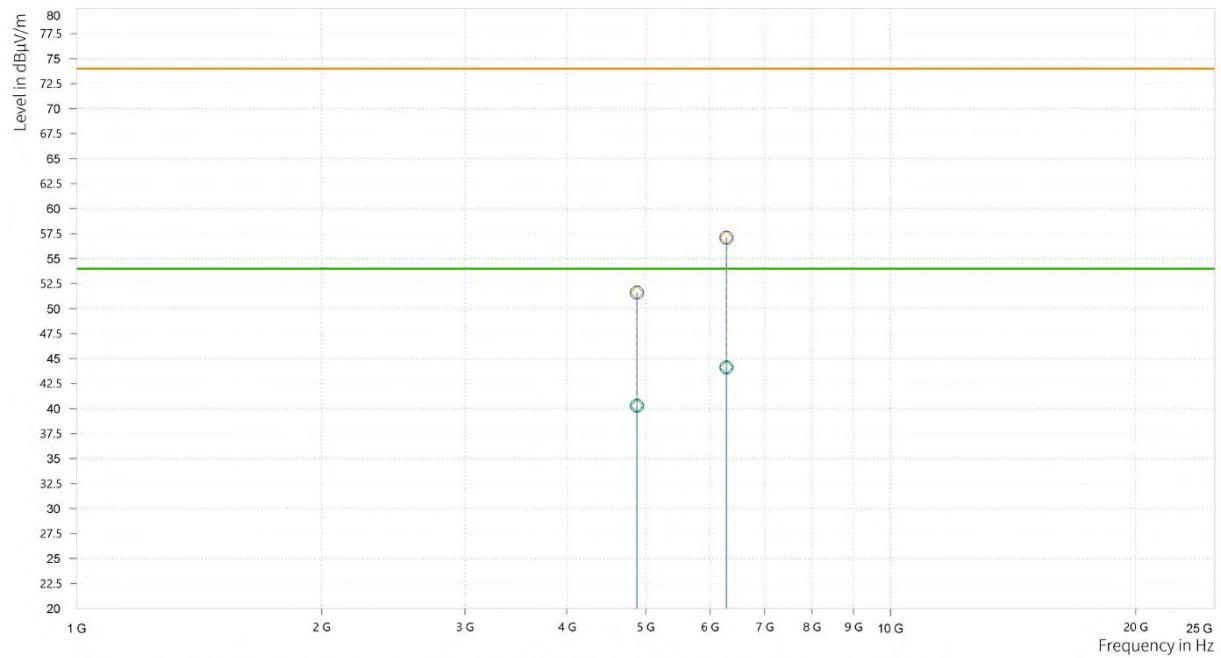


**BUREAU
VERITAS****Test Report No.: W7L-P23010015RF06**

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,879.544	52.31	74.00	21.69	40.29	54.00	13.71	15.95	V	359.1	1
3	6,297.574	56.69	74.00	17.31	43.84	54.00	10.16	21.04	V	359	2

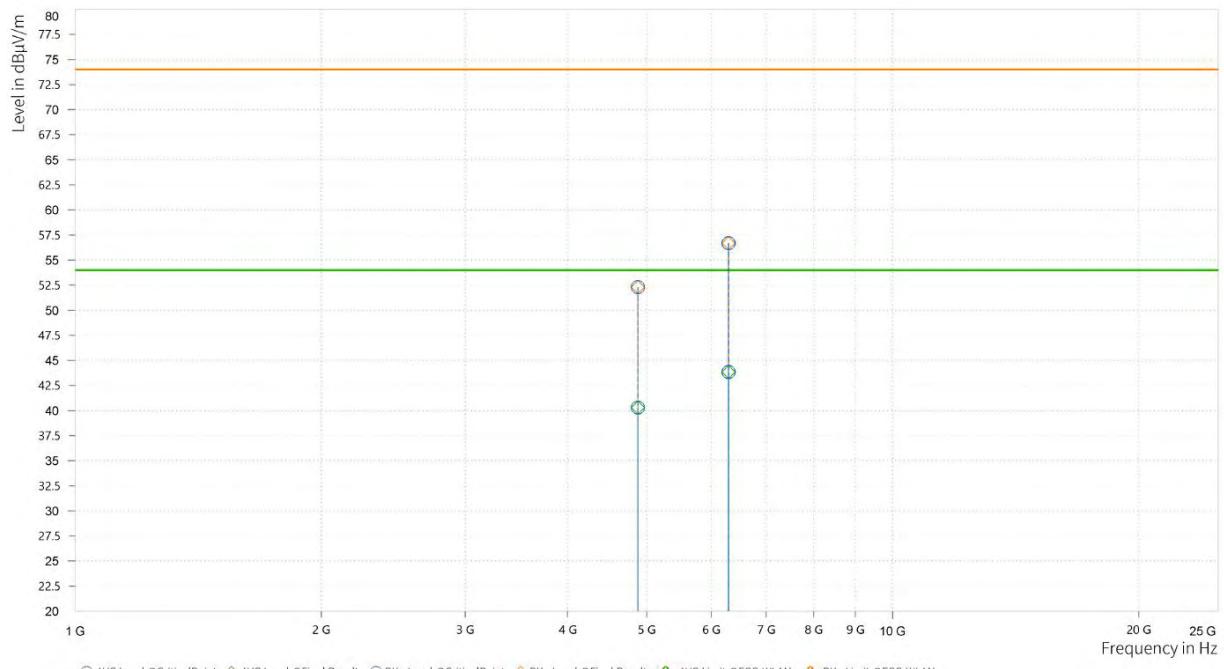**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 2440MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,480.000	83.77			9.89	H	214.6	2
1	2,483.500	29.29	54.00	24.71	9.88	H	165.5	2
1	2,488.000	29.13	54.00	24.87	9.88	H	313.8	2






BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,480.000	87.33			9.89	H	231.3	2
1	2,483.500	42.66	74.00	31.34	9.88	H	359.1	1
1	2,495.500	42.52	74.00	31.48	9.88	H	45	1

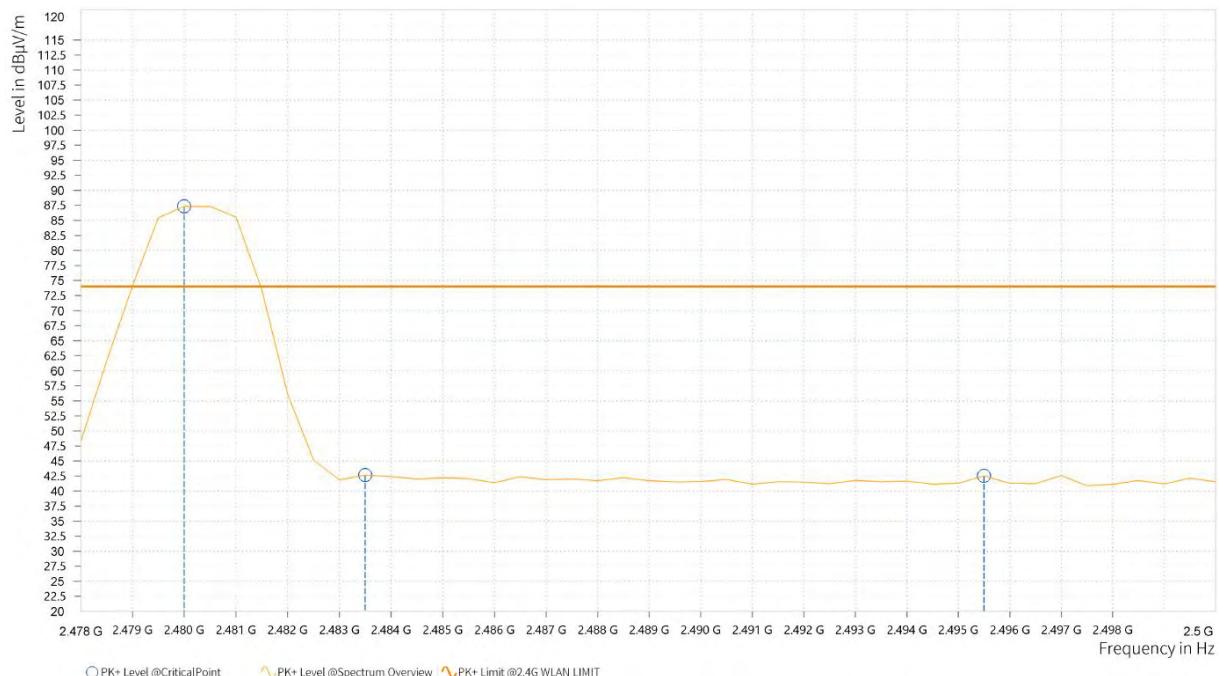




BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,480.000	77.33			9.89	V	143	1
1	2,483.500	29.53	54.00	24.47	9.88	V	242.2	1
1	2,486.000	29.27	54.00	24.73	9.87	V	22.4	2

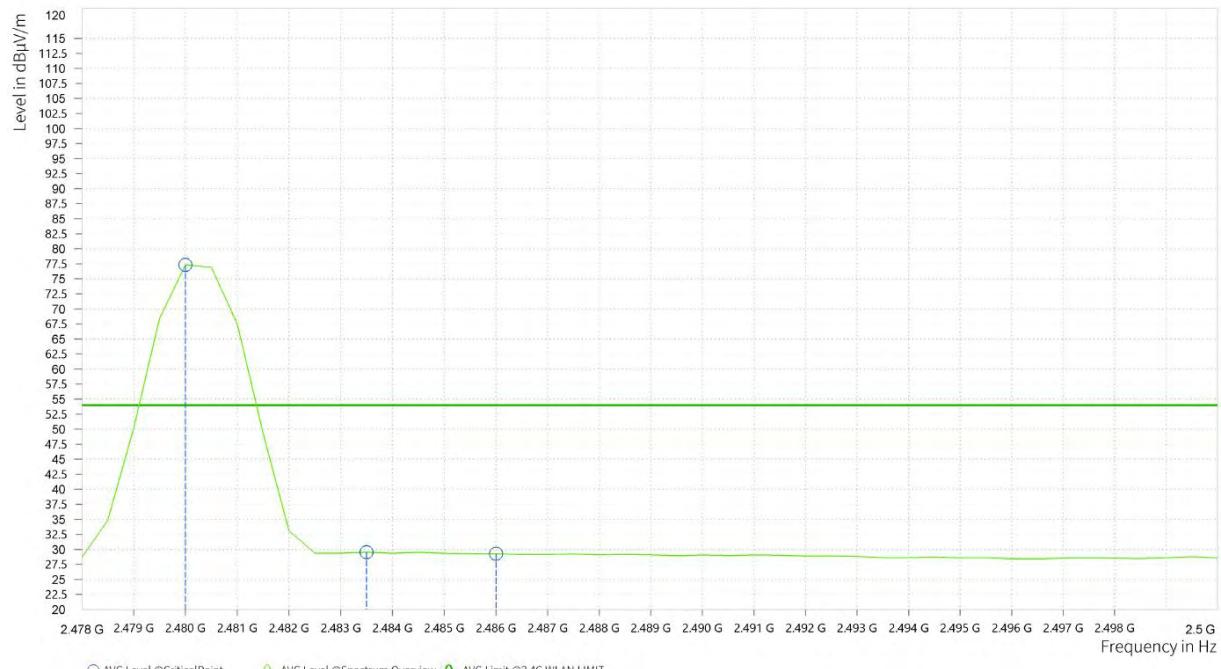




BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,480.500	81.84			9.89	V	143	1
1	2,483.500	42.38	74.00	31.62	9.88	V	5.1	1
1	2,493.000	42.21	74.00	31.79	9.88	V	192	1

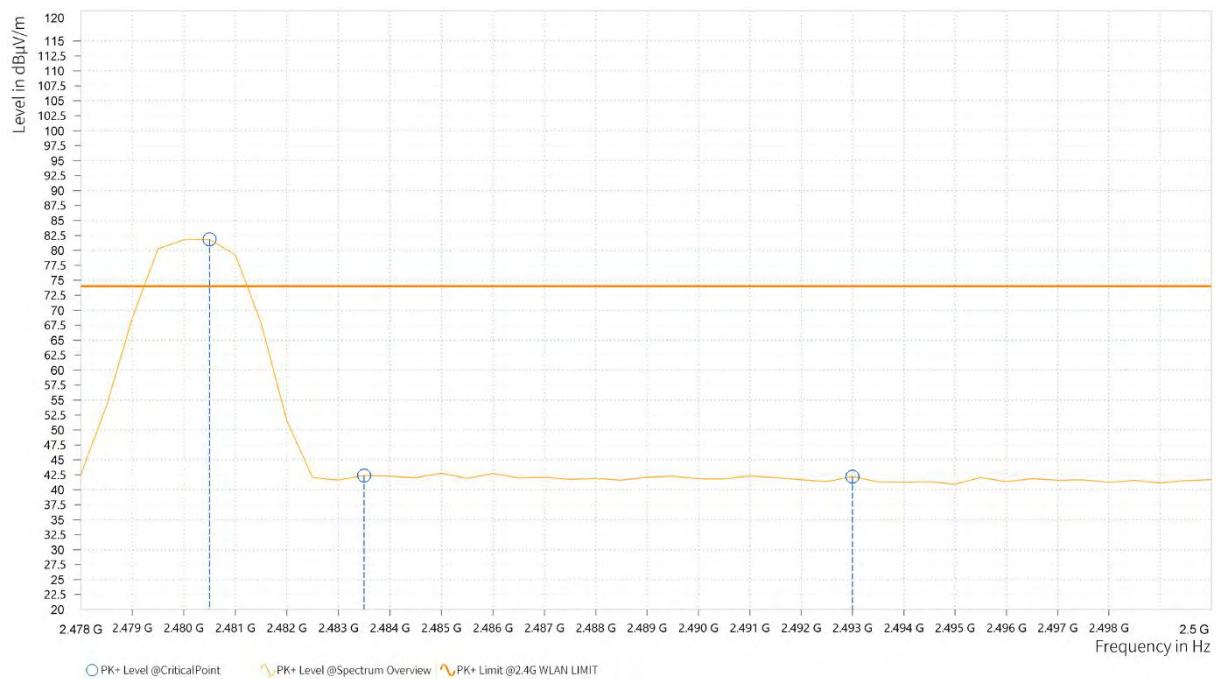

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 2480MHz: Fundamental frequency.



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	R&S	ESW 44	101973	Feb.25,22	Feb.24,24
Open Switch and Control Unit	R&S	OSP-B157W 8	100836	N/A	N/A
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A03	182185	Feb.16,22	Feb.15,24
Wideband Radio Communication	R&S	CMW500	169399	Jun.26,22	Jun.25,24
Hygrothermograph	DELI	20210528	SZ015	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Oct.31,22	Apr.29,23
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Oct.31,22	Apr.29,23
Test Software	EMC32	EMC32	N/A	N/A	N/A
Temperature Chamber	votsch	VT4002	58566078100050	May.31,22	May.30,24

NOTE:

1. The calibration interval of the above test instruments is 6 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.



3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

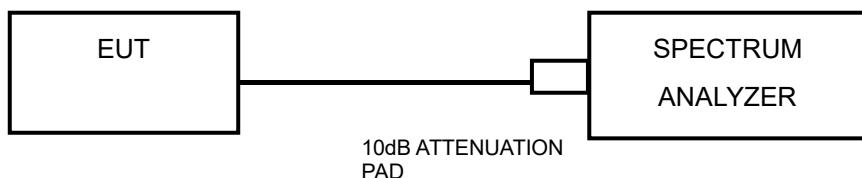

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



**BUREAU
VERITAS** Test Report No.: W7L-P23010015RF06

3.3.7 TEST RESULTS

Please Refer to Appendix1/2 Of this test report.




3.4 CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

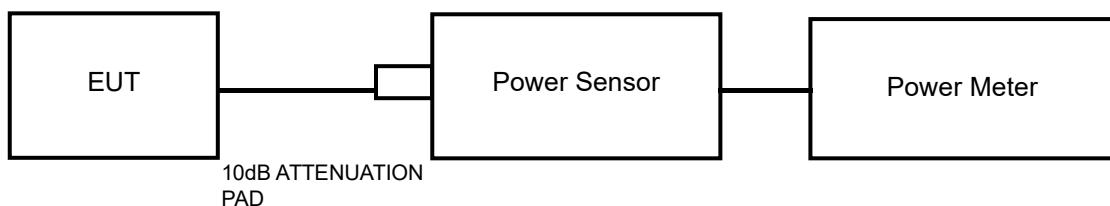

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



**BUREAU
VERITAS** Test Report No.: W7L-P23010015RF06

3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix1/2 Of this test report.



3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix1/2 Of this test report.




3.5 POWER SPECTRAL DENSITY MEASUREMENT

3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW \geq 3 x RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



**BUREAU
VERITAS** Test Report No.: W7L-P23010015RF06

3.5.7 TEST RESULTS

Please Refer to Appendix1/2 Of this test report.




3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 TEST SETUP

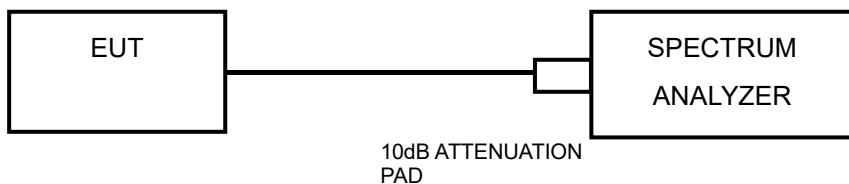

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OUBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix1/2 Of this test report.



**BUREAU
VERITAS** Test Report No.: W7L-P23010015RF06

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS** Test Report No.: W7L-P23010015RF06

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

6 Appendix 1 WLAN 2.4G

DTS BANDWIDTH

TEST RESULT

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant0	2412	8.5090	2408.006	2416.515	0.5	PASS
	Ant0	2437	8.5670	2432.948	2441.515	0.5	PASS
	Ant0	2462	8.5670	2457.485	2466.052	0.5	PASS
11G	Ant0	2412	15.687	2404.475	2420.162	0.5	PASS
	Ant0	2437	16.324	2428.838	2445.162	0.5	PASS
	Ant0	2462	16.324	2453.838	2470.162	0.5	PASS
11N20	Ant0	2412	16.266	2404.475	2420.741	0.5	PASS
	Ant0	2437	17.019	2428.491	2445.510	0.5	PASS
	Ant0	2462	17.135	2453.375	2470.725	0.5	PASS



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

TEST GRAPHS





BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06





BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06





BUREAU
VERITAS


Test Report No.: W7L-P23010015RF06





BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

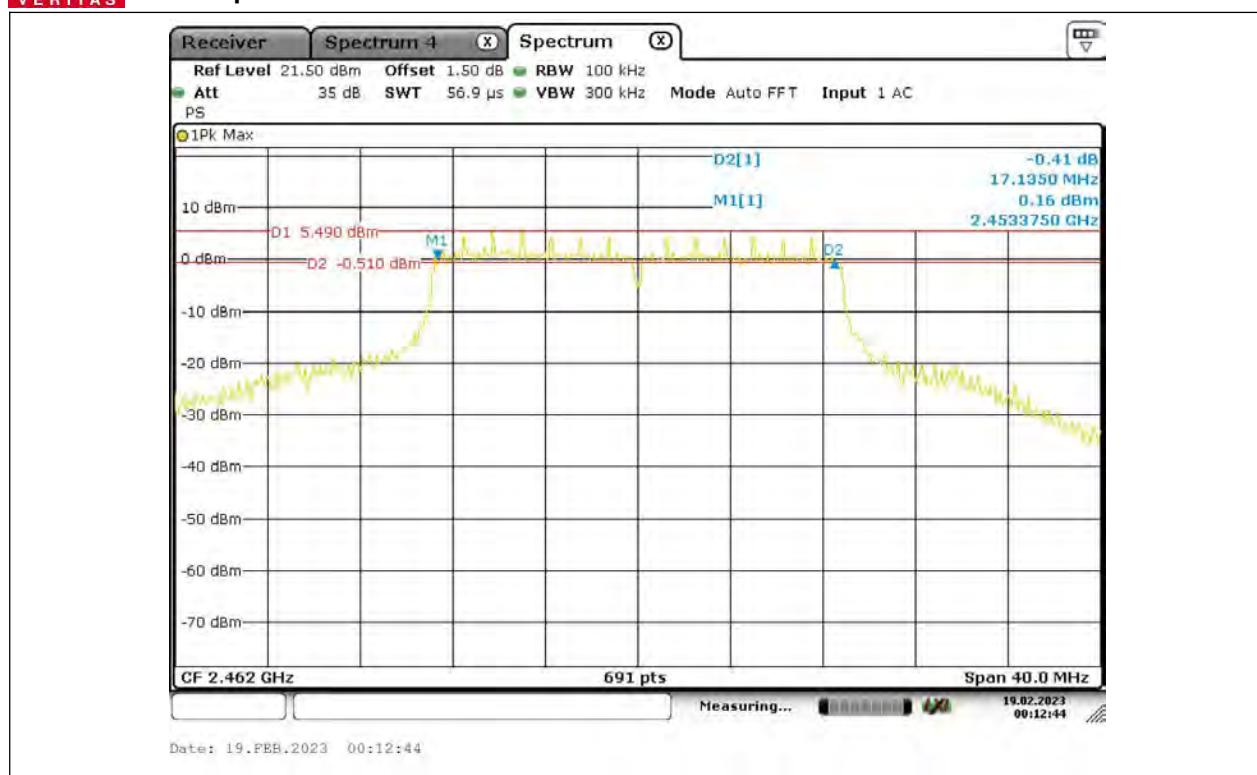



BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

MAXIMUM CONDUCTED OUTPUT POWER

TEST RESULT PEAK

TestMode	Antenna	Frequency [MHz]	Peak power [dBm]	Peak power [mw]	Limit [dBm]	Verdict	Power Setting
11B	Ant0	2412	19.17	82.60	≤30.00	PASS	18
	Ant0	2437	21.40	138.04	≤30.00	PASS	18
	Ant0	2462	18.84	76.56	≤30.00	PASS	18
11G	Ant0	2412	22.37	172.58	≤30.00	PASS	17
	Ant0	2437	24.18	302.00	≤30.00	PASS	17
	Ant0	2462	22.02	159.22	≤30.00	PASS	17
11N20-	Ant0	2412	22.49	177.42	≤30.00	PASS	16
	Ant0	2437	24.31	269.77	≤30.00	PASS	16
	Ant0	2462	21.84	152.76	≤30.00	PASS	16

TEST RESULT AVERAGE

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Limit [dBm]	Verdict	Power Setting
11B -SISO	Ant0	2412	15.23	/	PASS	18
	Ant0	2437	17.58	/	PASS	18
	Ant0	2462	14.84	/	PASS	18
11G -SISO	Ant0	2412	14.27	/	PASS	17
	Ant0	2437	16.28	/	PASS	17
	Ant0	2462	13.91	/	PASS	17
11N20 -SISO	Ant0	2412	15.01	/	PASS	16
	Ant0	2437	16.62	/	PASS	16
	Ant0	2462	14.29	/	PASS	16



BUREAU
VERITAS


Test Report No.: W7L-P23010015RF06

MAXIMUM POWER SPECTRAL DENSITY

TEST RESULT

TestMode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant0	2412	6.51	≤8.00	PASS
	Ant0	2437	7.82	≤8.00	PASS
	Ant0	2462	5.41	≤8.00	PASS
11G	Ant0	2412	-8.67	≤8.00	PASS
	Ant0	2437	-8.13	≤8.00	PASS
	Ant0	2462	-11.05	≤8.00	PASS
11N20	Ant0	2412	-8.35	≤8.00	PASS
	Ant0	2437	-6.51	≤8.00	PASS
	Ant0	2462	-9.95	≤8.00	PASS


TEST GRAPHS

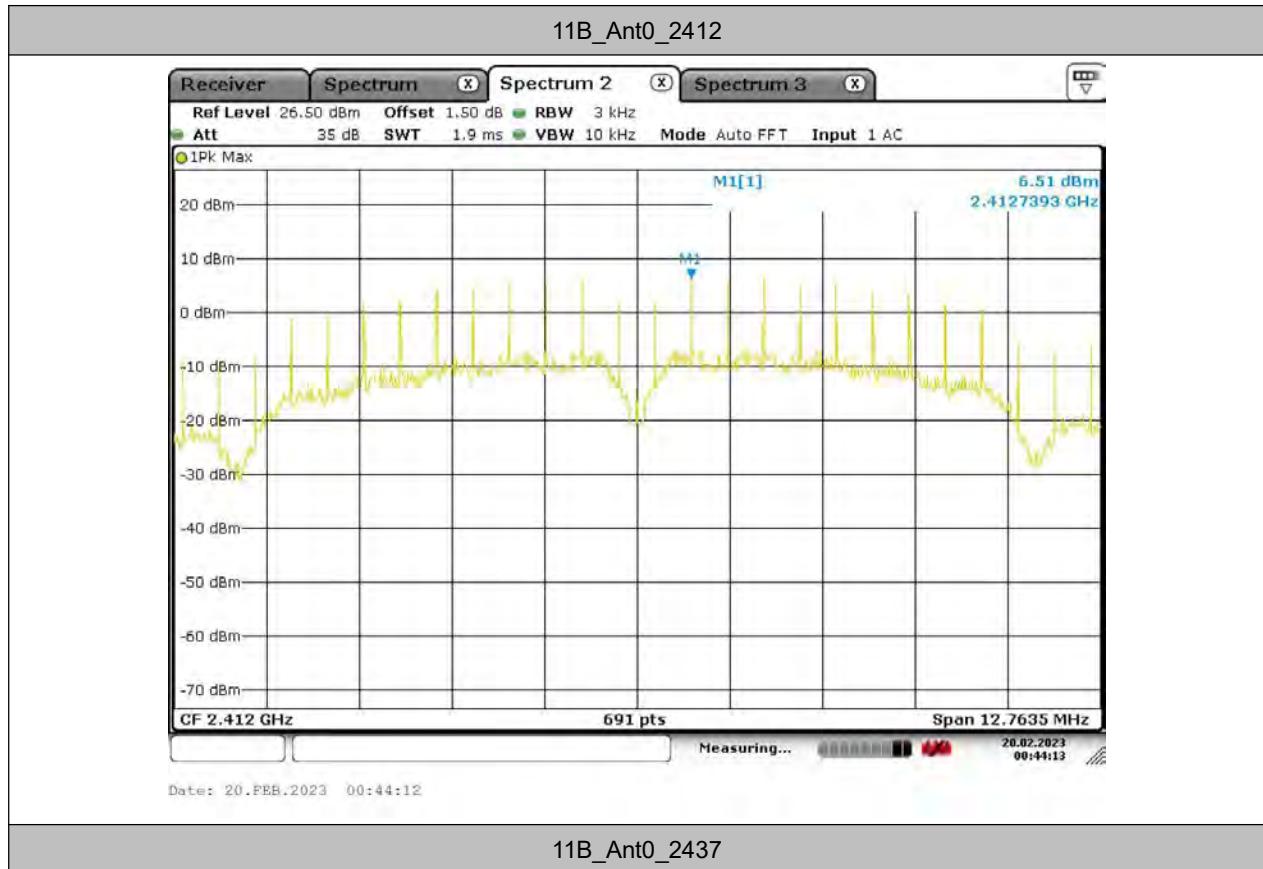




BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

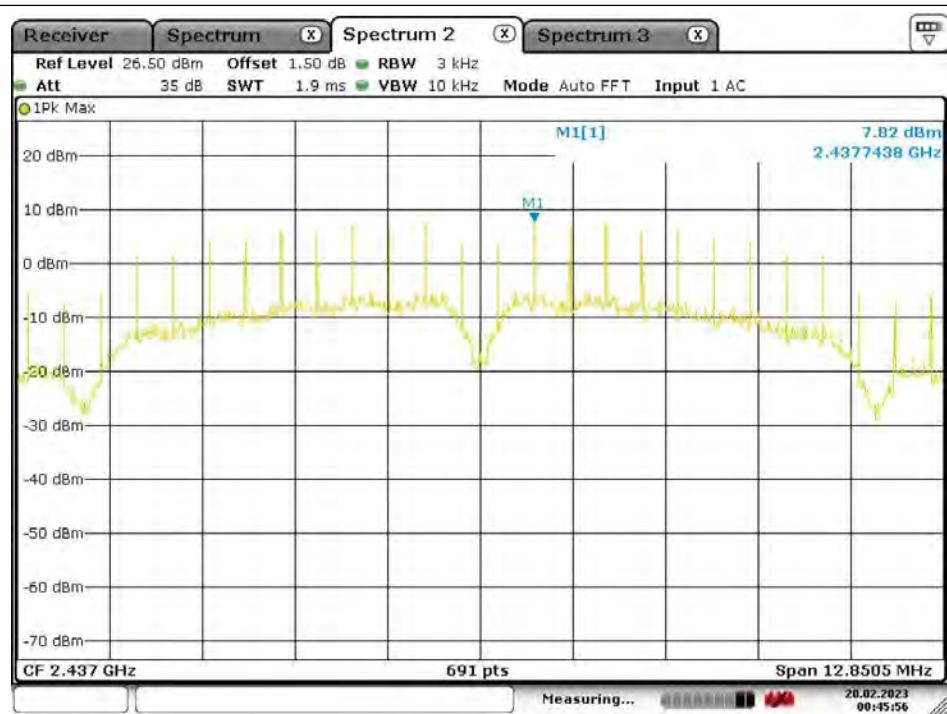

Date: 20.FEB.2023 00:45:56

11B_Ant0_2462

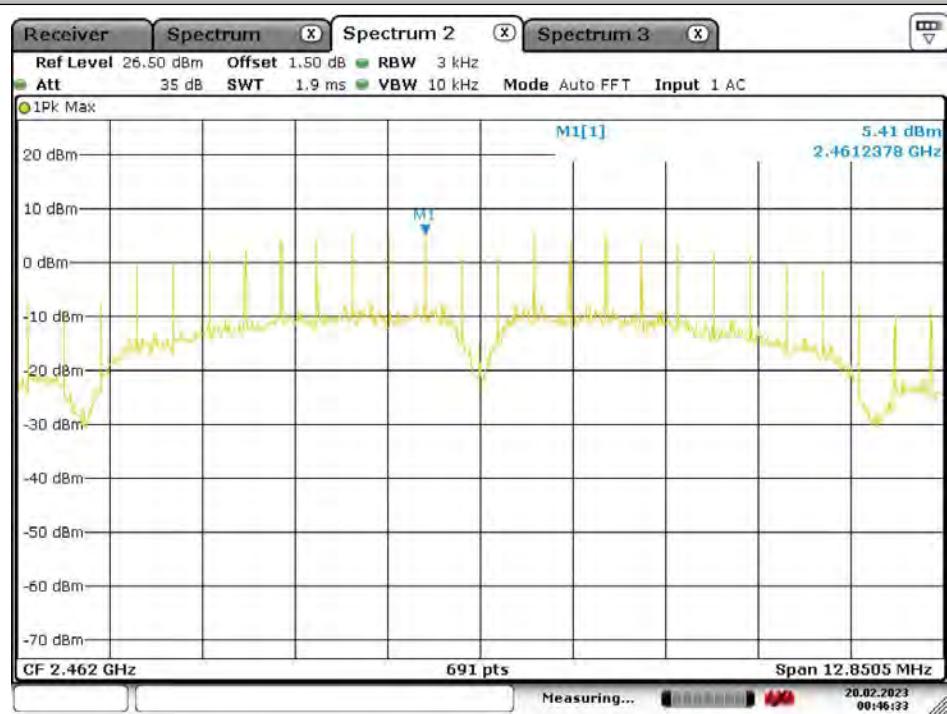


Date: 20.FEB.2023 00:46:33

11G_Ant0_2412




BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

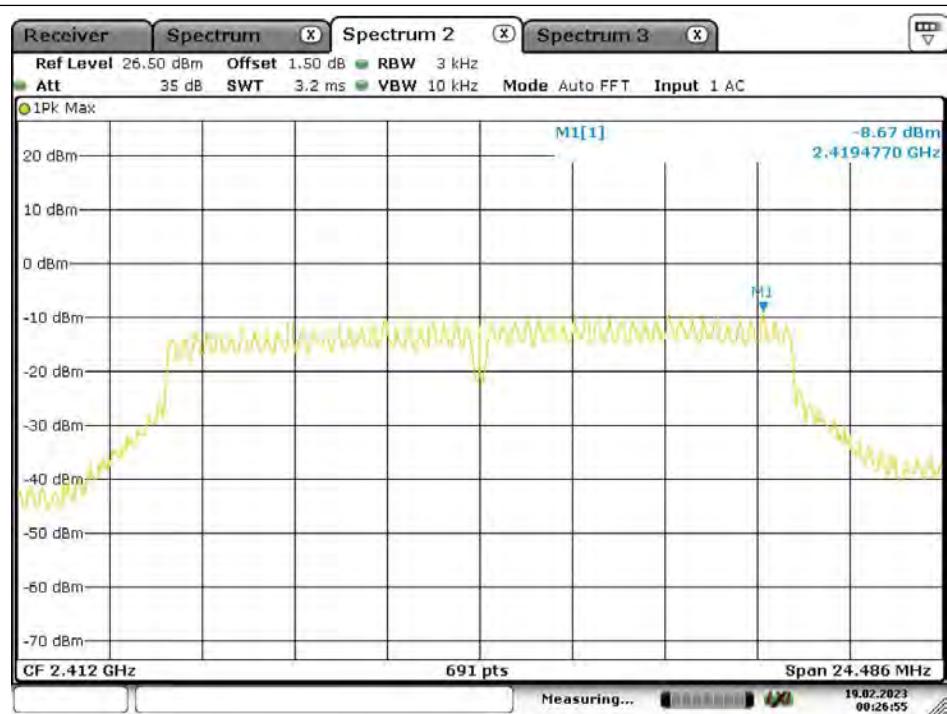

Date: 19.FEB.2023 00:26:54

11G_Ant0_2437

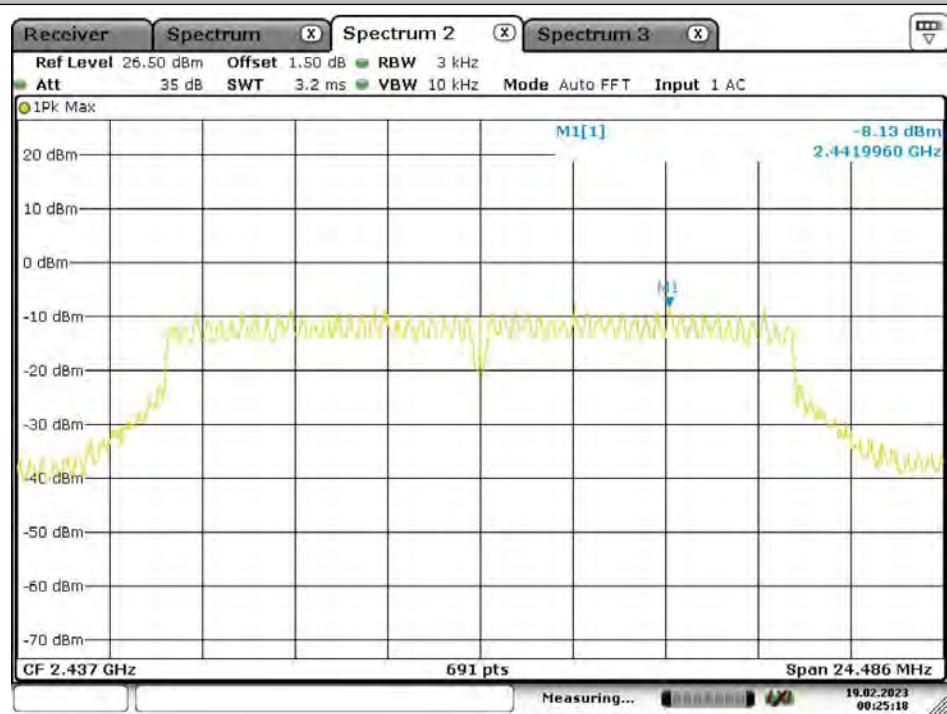


Date: 19.FEB.2023 00:25:18

11G_Ant0_2462




BUREAU
VERITAS

Test Report No.: W7L-P23010015RF06

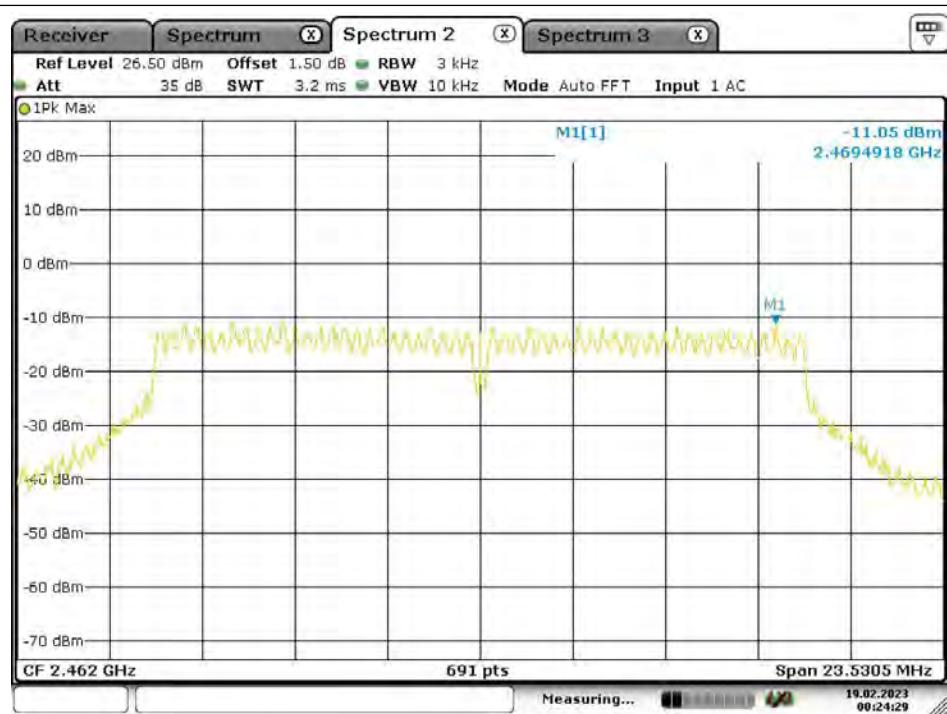

Date: 19.FEB.2023 00:24:29

11N20_Ant0_2412

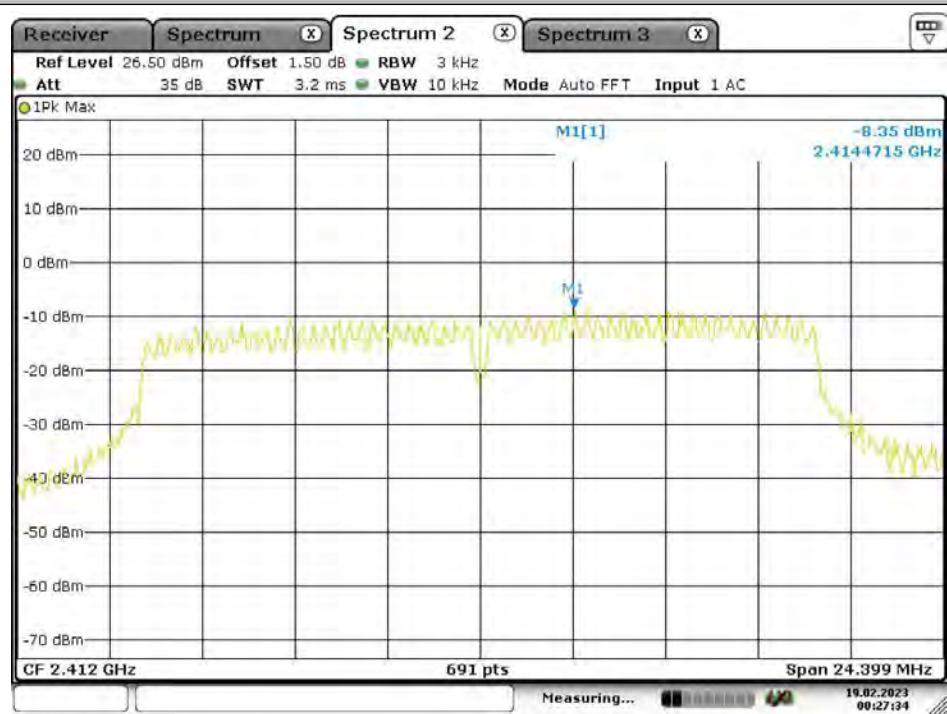

Date: 19.FEB.2023 00:27:34

11N20_Ant0_2437