



Test Report No.: PSU-QSU2308280314RF01



Certificate #6613.01

# FCC TEST REPORT (PART 22)



Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland
Product:	Mobile phone
Brand Name:	NOKIA
Model Name:	TA-1558
FCC ID:	2AJOTTA-1558
Date of tests:	Sep. 04, 2023 ~ Sep. 12, 2023

The tests have been carried out according to the requirements of the following standard:

- FCC PART 22, Subpart H     FCC Part 2
- ANSI/TIA/EIA-603-D     ANSI C63.26-2015
- ANSI/TIA/EIA-603-E

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Chao Wu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Sep. 12, 2023	 Date: Sep. 12, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



# TABLE OF CONTENTS

- RELEASE CONTROL RECORD .....4**
- 1 SUMMARY OF TEST RESULTS .....5**
  - 1.1 MEASUREMENT UNCERTAINTY ..... 6
  - 1.2 TEST SITE AND INSTRUMENTS .....7
- 2 GENERAL INFORMATION ..... 8**
  - 2.1 GENERAL DESCRIPTION OF EUT .....8
  - 2.2 CONFIGURATION OF SYSTEM UNDER TEST ..... 12
  - 2.3 DESCRIPTION OF SUPPORT UNITS .....13
  - 2.4 EUT OPERATING CONDITIONS .....17
  - 2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 18
- 3 TEST TYPES AND RESULTS .....19**
  - 3.1 OUTPUT POWER MEASUREMENT ..... 19
    - 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT ..... 19
    - 3.1.2 TEST PROCEDURES ..... 19
    - 3.1.3 TEST SETUP ..... 20
    - 3.1.4 TEST RESULTS ..... 20
  - 3.2 FREQUENCY STABILITY MEASUREMENT ..... 28
    - 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT ..... 28
    - 3.2.2 TEST PROCEDURE ..... 28
    - 3.2.3 TEST SETUP ..... 28
    - 3.2.4 TEST RESULTS ..... 29
  - 3.3 OCCUPIED BANDWIDTH MEASUREMENT ..... 30
    - 3.3.1 TEST PROCEDURES .....30
    - 3.3.2 TEST SETUP ..... 30
    - 3.3.3 TEST RESULTS ..... 31
  - 3.4 BAND EDGE MEASUREMENT ..... 32
    - 3.4.1 LIMITS OF BAND EDGE MEASUREMENT ..... 32
    - 3.4.2 TEST SETUP ..... 32
    - 3.4.3 TEST PROCEDURES .....33
    - 3.4.4 TEST RESULTS ..... 33
  - 3.5 CONDUCTED SPURIOUS EMISSIONS ..... 34
    - 3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT ..... 34
    - 3.5.2 TEST PROCEDURE ..... 34
    - 3.5.1 TEST SETUP ..... 34
    - 3.5.2 TEST RESULTS ..... 34
  - 3.6 RADIATED EMISSION MEASUREMENT .....35
    - 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....35
    - 3.6.2 TEST PROCEDURES .....35
    - 3.6.3 DEVIATION FROM TEST STANDARD .....35
    - 3.6.4 TEST SETUP ..... 36
    - 3.6.5 TEST RESULTS .....38
  - 3.7 PEAK TO AVERAGE RATIO ..... 38
    - 3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT .....70
    - 3.7.2 TEST SETUP ..... 70
    - 3.7.3 TEST PROCEDURES .....70
    - 3.7.4 TEST RESULTS ..... 70
- 4 PHOTOGRAPHS OF THE TEST CONFIGURATION .....71**
- 5 INFORMATION ON THE TESTING LABORATORIES .....72**



**6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB ..... 73**

**7 APPENDIX: ..... 74**

GSM850 ..... 74

PEAK-TO-AVERAGE RATIO(CCDF) ..... 74

    TEST RESULT ..... 74

    TEST GRAPHS ..... 75

26DB BANDWIDTH AND OCCUPIED BANDWIDTH ..... 78

    TEST RESULT ..... 78

    TEST GRAPHS ..... 79

BAND EDGE ..... 85

    TEST RESULT ..... 85

    TEST GRAPHS ..... 86

CONDUCTED SPURIOUS EMISSION ..... 88

    TEST RESULT ..... 88

    TEST GRAPHS ..... 89

FREQUENCY STABILITY ..... 92

    TEST RESULT ..... 92

WCDMA V ..... 93

PEAK-TO-AVERAGE RATIO ..... 93

    TEST RESULT ..... 93

    TEST GRAPHS ..... 94

26DB BANDWIDTH AND OCCUPIED BANDWIDTH ..... 96

    TEST RESULT ..... 96

    TEST GRAPHS ..... 97

BAND EDGE ..... 101

    TEST RESULT ..... 101

    TEST GRAPHS ..... 102

CONDUCTED SPURIOUS EMISSION ..... 103

    TEST RESULT ..... 103

    TEST GRAPHS ..... 104

FREQUENCY STABILITY ..... 107

    TEST RESULT ..... 107

LTE BAND5 ..... 109

PEAK-TO-AVERAGE RATIO(CCDF) ..... 109

    TEST RESULT ..... 109

    TEST GRAPHS ..... 110

26DB BANDWIDTH AND OCCUPIED BANDWIDTH ..... 119

    TEST RESULT ..... 119

    TEST GRAPHS ..... 120

BAND EDGE ..... 156

    TEST RESULT ..... 156

    TEST GRAPHS ..... 157

CONDUCTED SPURIOUS EMISSION ..... 181

    TEST RESULT ..... 181

    TEST GRAPHS ..... 183

FREQUENCY STABILITY ..... 219

    TEST RESULT ..... 219



Test Report No.: PSU-QSU2308280314RF01

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P23010015RF01	Original release	Mar. 02, 2023
PSU-QSU2308280314RF01	Based on the original product adding 2G PA second supply. The FX5196 add 2nd supply FX5596Y, raw material of Wafer and the printing model have changes. The IC design has not changed and there is no impact on BT and WIFI, other has not changed. This report verify the GSM850,EDGE850 and replace the test result.	Sep. 12, 2023



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	Test lab*
§2.1046	Conducted Output Power	Compliance	A
§22.913 (a)(5)	Effective Radiated Power	Compliance	A
§2.1055 §22.355	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§22.913 (d)	Peak to average ratio*	Compliance	A
§22.917(a)	Band Edge Measurements	Compliance	A
§2.1051 §22.917(a)	Conducted Spurious Emissions	Compliance	A
§2.1053 §22.917(a)	Radiated Spurious Emissions	Compliance	A

\* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

**Note:**

1. Based on the original product adding 2G PA second supply. The FX5196 add 2nd supply FX5596Y, raw material of Wafer and the printing model have changes. The IC design has not changed and there is no impact on BT and WIFI, other has not changed. This report verify the GSM850,EDGE850 and replace the test result.

**\*Test Lab Information Reference**

**Lab A:**

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

**Lab Address:**

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

**Accredited Test Lab Cert 6613.01**

The FCC Site Registration No. is 434559; The Designation No. is CN1325.



### 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Maximum Peak Output Power	±2.06dB
Frequency Stability	±76.97Hz
Radiated emissions (30MHz~1GMHz)	±4.98dB
Radiated emissions (1GMHz ~6GMHz)	±4.70dB
Radiated emissions (6GMHz ~18GMHz)	±4.60dB
Radiated emissions (18GMHz ~40GMHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Band Edge Measurements	±4.70dB
Peak to average ratio	±0.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EM C-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EM C-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	EMC32	EMC32	N/A	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Oct.01,22	Sep.30,24
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W12.14	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.28,23	Oct.27,23
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.28,23	Oct.27,23
Temperature Chamber	votsch	VT4002	58566078100050	May.31,22	May.30,24

### NOTE:

1. The calibration interval of the above test instruments is 6 months or 24 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT*</b>	Mobile phone	
<b>BRAND NAME*</b>	NOKIA	
<b>MODEL NAME*</b>	TA-1558	
<b>NOMINAL VOLTAGE*</b>	5.0Vdc(adapter) 3.85Vdc (Li-ion, battery)	
<b>MODULATION TYPE*</b>	<b>GSM/EDGE</b>	GMSK,8PSK
	<b>WCDMA</b>	HSDPA/HSUPA/DC-HSDPA /HSPA+
	<b>LTE</b>	QPSK/16QAM/64QAM
<b>FREQUENCY RANGE</b>	<b>GSM/EDGE</b>	824.2MHz ~ 848.8MHz
	<b>WCDMA</b>	826.4MHz ~ 846.6MHz
	<b>LTE Band 5 (Channel Bandwidth: 1.4MHz)</b>	824.7MHz ~ 848.3MHz
	<b>LTE Band 5 (Channel Bandwidth: 3MHz)</b>	825.5MHz ~ 847.5MHz
	<b>LTE Band 5 (Channel Bandwidth: 5MHz)</b>	826.5MHz ~ 846.5MHz
	<b>LTE Band 5 (Channel Bandwidth: 10MHz)</b>	829MHz ~ 844MHz
<b>MAX. ERP POWER</b>	<b>GSM</b>	514.04mW
	<b>EDGE</b>	127.94mW
	<b>WCDMA</b>	78.7mW
	<b>LTE Band 5 (Channel Bandwidth: 1.4MHz)</b>	67.45mW
	<b>LTE Band 5 (Channel Bandwidth: 3MHz)</b>	66.68mW
	<b>LTE Band 5 (Channel Bandwidth: 5MHz)</b>	67.3mW
	<b>LTE Band 5 (Channel Bandwidth: 10MHz)</b>	67.45mW
<b>EMISSION DESIGNATOR GOGN</b>	<b>GSM</b>	247KGXW
	<b>EDGE</b>	241KG7W
	<b>WCDMA</b>	4M15F9W
	<b>LTE Band 5 (Channel Bandwidth: 1.4MHz)</b>	QPSK: 1M11G7D
		16QAM: 1M10W7D
		64QAM: 1M10W7D
	<b>LTE Band 5 (Channel Bandwidth: 3MHz)</b>	QPSK: 2M73G7D
		16QAM: 2M76W7D
64QAM: 2M74W7D		





	<b>LTE Band 5 (Channel Bandwidth: 5MHz)</b>	QPSK: 4M49G7D
		16QAM: 4M71W7D
		64QAM: 4M52W7D
	<b>LTE Band 5 (Channel Bandwidth: 10MHz)</b>	QPSK: 9M09G7D
		16QAM: 9M06W7D
		64QAM: 9M06W7D
<b>ANTENNA TYPE*</b>	Fixed Internal Antenna with -3.2dBi gain for GSM850/ WCDMA V/ LTE B5	
<b>HW VERSION*</b>	SPR_S63Q0	
<b>SW VERSION*</b>	00WW_0_122	
<b>I/O PORTS*</b>	Refer to user's manual	
<b>CABLE SUPPLIED*</b>	USB cable1: non-shielded cable, with w/o ferrite core, 1 meter USB cable2: non-shielded cable, with w/o ferrite core, 1 meter USB cable3: non-shielded cable, with w/o ferrite core, 1 meter Earphone: non-shielded cable, with w/o ferrite core, 1.2 meter	
<b>EXTREME TEMPERATURE*</b>	-20-60 °C	
<b>EXTREME VOLTAGE*</b>	EUT 3.4V - EUT 4.4V	

**NOTE:**

- \*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
GSM/EDGE	1TX/1RX
WCDMA	1TX/1RX
LTE	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
- The product of TA-1558(FCC ID: 2AJOTTA-1558), only the following manufacturer of key parts is different between the first and second supply, other parameters are the same. The details are as follows:

NO.	Change Description	specificatons	first supplier	specificatons	second supplier
1	PCBA	64GB EMMC FEMDNN064G-A3A56 BWCTARV11X64G	Longsys	FEMDNN064G-A3A56 BWCTARV11X64G	Biwin
		128GB EMMC FEMDNN128G-A3A56 BWCTAKJ21X128G	Longsys	FEMDNN128G-A3A56 BWCTAKJ21X128G	Biwin
		3GB LPDD FLXC4003G-50 BWMEXX32H2A-24Gb-	Longsys	FLXC4003G-50 BWMEXX32H2A-24Gb-	Biwin



**BUREAU  
VERITAS**

**Test Report No.: PSU-QSU2308280314RF01**

		R	X		X	
		4GB LPDDR	FLXC2004G-30 BWMZCX32H2A-32G- X	Longsys	FLXC2004G-30 BWMZCX32H2A-32G- X	Biwin
		PCB	/	KINGSHIN E	/	wuzhu
2	LCM	LCD	6.517 HKC, 360min,400typ, 2.5D	TCL	6.517 HKC, 360min,400typ, 2.5D	Lia
3	Front camera	Camera	8M FF COM	Lianhe	8M FF COM	Shijia
4	Macro CAM	Camera	2M FF	Shijia	2M FF	Lianhe
5	Acoustic	Speaker	1712 1W	Dong Sheng	1712 1W	Xin Rongda
		Vibrator	1027 FPC	Chao Yin	1027 FPC	Kai Long
		Receiver	0809	Dong Sheng	0809	Xin Rongda
		Glass rear cover	Glass, monochrome printing or film	Kaimao	Glass, monochrome printing or film	Longqin gxiangru i
		FPC	/	Lante	/	Kaihong xin
6	Battery		5000MAH	Gaoyuan	5000MAH	Fenghua
7	Data cable		2A typeC	Yuwei	2A typeC	Juwei




Test Report No.: PSU-QSU2308280314RF01

**List of Accessory:**

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
LCD Panel 1	HKC	MianYang HKC Optoelectronics Technology Co., Ltd.	QM065HS03-1	6.517
LCD Panel 2	BOE	BOE	BV065WBQ-L1B	6.517
Battery 1	Nokia	Guangdong Fenghua New Energy Co.,Ltd.	WT510	Capacity : 3.85 Vdc, 4900mAh
Battery 2	Nokia	HUNAN GAOYUAN BATTERY Co., Ltd.	WT510	Capacity : 3.85 Vdc, 4900mAh
AC Adapter	Nokia	SHENZHEN BAIJUNDA ELECTRONICS.,LTD	AD-010U	I/P: 100-240Vac, 0.35A, O/P: 5.0Vdc, 2.0A
Earphone	Juwei Electronics Co., LTD	Juwei Electronics Co., LTD	JWEP1252-H21H	Signal Line, 1.2meter
USB Cable 1	Juwei Electronics Co., LTD	Juwei Electronics Co., LTD	JWUB1536-H21H	Signal Line, 1.0meter
USB Cable 2	Yu Wei	Dongguan Yuwei Electronic Technology Co., Ltd.	CH2212TC	Signal Line, 1.0meter
USB Cable 3	Sai bao	Saibao (Jiangxi) Industrial Co., Ltd	SHM1-A003A	Signal Line, 1.0meter

## 2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION

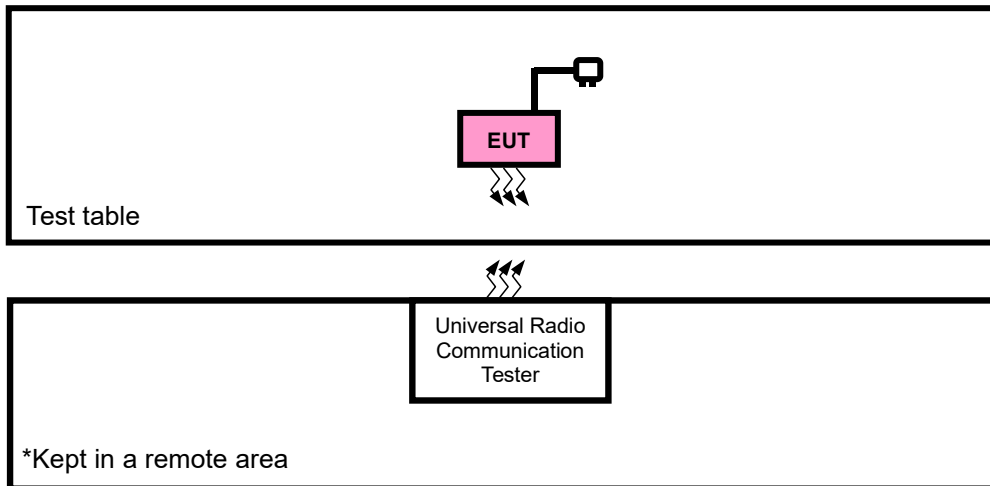



### 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in ERP and radiated emission was found when positioned on X-plane for GSM /WCDMA/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + GSM/WCDMA/LTE
B	EUT + DC source with GSM or WCDMA or LTE link



Test Report No.: PSU-QSU2308280314RF01

### GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	ERP	128 to 251	128, 190, 251	GSM, EDGE
B	FREQUENCY STABILITY	128 to 251	128, 190, 251	GSM, EDGE
A	OCCUPIED BANDWIDTH	128 to 251	128, 190, 251	GSM, EDGE
A	BAND EDGE	128 to 251	128, 251	GSM, EDGE
A	CONDCUDETED EMISSION	128 to 251	128, 190, 251	GSM, EDGE
A	RADIATED EMISSION	128 to 251	128, 190, 251	GSM, EDGE
A	PEAK TO AVERAGE RATIO	128 to 251	128, 190, 251	GSM, EDGE

### WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
B	FREQUENCY STABILITY	4132 to 4233	4132, 4182, 4233	WCDMA
A	OCCUPIED BANDWIDTH	4132 to 4233	4132, 4182, 4233	WCDMA
A	BAND EDGE	4132 to 4233	4132, 4233	WCDMA
A	CONDCUDETED EMISSION	4132 to 4233	4132, 4182, 4233	WCDMA
A	RADIATED EMISSION	4132 to 4233	4132, 4182, 4233	WCDMA
A	PEAK TO AVERAGE RATIO	4132 to 4233	4132, 4182, 4233	WCDMA



LTE BAND 5 MODE

EUT CONFIGURE MODE	TEST ITEM	Available Channel	Tested Channel	Channel bandwidth	modulation	mode
A	ERP	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
A	BAND EDGE	20407 to 20643	20407	1.4 MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
						Full RB / 0 RB Offset
		20407 to 20643	20643	1.4 MHz	QPSK,16QAM, 64QAM	1 RB / 5 RB Offset
						Full RB / 0 RB Offset
		20415 to 20635	20415	3 MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
						Full RB / 0 RB Offset
		20415 to 20635	20635	3 MHz	QPSK,16QAM, 64QAM	1 RB / 14 RB Offset
						Full RB / 0 RB Offset
		20425 to 20625	20425	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
						Full RB / 0 RB Offset
		20425 to 20625	20625	5MHz	QPSK,16QAM, 64QAM	1 RB / 24 RB Offset
						Full RB / 0 RB Offset
		20450 to 20600	20450	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
						Full RB / 0 RB Offset
		20450 to 20600	20600	10MHz	QPSK,16QAM, 64QAM	1 RB / 49 RB Offset
						Full RB / 0 RB Offset



Test Report No.: PSU-QSU2308280314RF01

A	CONDCUDED EMISSION	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	20407 to 20643	20525	1.4MHz	QPSK	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20525	5MHz	QPSK	1 RB / 0 RB Offset
		20450 to 20600	20525	10MHz	QPSK	1 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset Full RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset Full RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset Full RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset Full RB / 0 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.





**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 70%RH	DC 5V By Adapter	Chao Wu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.85V By Battery	Chao Wu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC5V By Adapter	Chao Wu
BAND EDGE	23deg. C, 70%RH	DC 5V By Adapter	Chao Wu
CONDCUDED EMISSION	23deg. C, 70%RH	DC5V By Adapter	Chao Wu
RADIATED EMISSION	23deg. C, 70%RH	DC5V By Adapter	Chao Wu/Jace Hu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC5V By Adapter	Chao Wu

**2.4 EUT OPERATING CONDITIONS**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency



Test Report No.: PSU-QSU2308280314RF01

## 2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 22**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-D**

**ANSI/TIA/EIA-603-E**

**ANSI C63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.



### 3 TEST TYPES AND RESULTS

#### 3.1 OUTPUT POWER MEASUREMENT

##### 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

##### 3.1.2 TEST PROCEDURES

###### **EIRP / ERP MEASUREMENT:**

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_{\text{T}}$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_{\text{C}}$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

###### **CONDUCTED POWER MEASUREMENT:**


The EUT was set up for the maximum power with GSM/WCDMA/LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



### 3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



### 3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GSM850			Max. Tune-up Power
	128	190	251	
Channel	128	190	251	
Frequency	824.2	836.6	848.8	
GSM	32.39	32.37	32.38	33.50
GPRS 1Tx Slot	<b>32.46</b>	32.41	32.37	33.50
GPRS 2Tx Slot	30.75	30.62	30.58	31.50
GPRS 3Tx Slot	29.05	28.91	28.84	30.00
GPRS 4Tx Slot	27.49	27.38	27.28	28.50
EDGE 1Tx Slot	26.42	26.36	26.20	27.50
EDGE 2Tx Slot	25.15	24.68	24.83	26.00
EDGE 3Tx Slot	22.40	21.98	22.18	23.00
EDGE 4Tx Slot	19.48	19.21	19.32	20.50

Band	WCDMA V			Max. Tune-up Power
	4132	4182	4233	
Channel	4132	4182	4233	
Frequency	826.4	836.4	846.6	
RMC 12.2K	24.27	24.29	<b>24.31</b>	25.00
HSDPA Subtest-1	23.49	23.51	23.53	24.50
HSDPA Subtest-2	23.48	23.50	23.52	24.50
HSDPA Subtest-3	22.97	22.99	23.01	24.00
HSDPA Subtest-4	22.96	22.98	23.00	24.00
DC-HSDPA Subtest-1	23.41	23.45	23.45	24.50
DC-HSDPA Subtest-2	23.40	23.44	23.44	24.50
DC-HSDPA Subtest-3	22.98	22.93	22.95	24.00
DC-HSDPA Subtest-4	22.97	22.92	22.94	24.00
HSUPA Subtest-1	23.45	23.47	23.49	24.50
HSUPA Subtest-2	22.44	22.46	22.48	23.50
HSUPA Subtest-3	22.92	22.95	22.97	24.00
HSUPA Subtest-4	22.41	22.44	22.46	23.50
HSUPA Subtest-5	23.40	23.43	23.45	24.50
HSPA+ Subtest-1	22.16	22.20	22.22	23.00



Test Report No.: PSU-QSU2308280314RF01

LTE Band 5

Band/BW	Modulation	RB Size	RB Offset	Low CH 20407	Mid CH 20525	High CH 20643
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz
5/ 1.4	QPSK	1	0	23.49	23.41	23.56
		1	2	23.48	23.57	23.56
		1	5	23.51	23.48	23.59
		3	0	23.42	23.50	23.49
		3	1	23.64	23.58	23.49
		3	3	23.60	23.47	23.61
		6	0	22.48	22.55	22.61
	16QAM	1	0	22.55	22.78	22.84
		1	2	22.73	22.75	22.82
		1	5	22.76	22.73	22.90
		3	0	22.77	22.73	22.81
		3	1	22.75	22.93	22.79
		3	3	22.72	22.87	22.89
		6	0	21.71	21.81	21.77
	64QAM	1	0	21.80	21.94	21.87
		1	2	21.85	21.80	21.88
		1	5	21.87	21.76	21.85
		3	0	22.00	21.64	21.68
		3	1	21.77	21.71	21.67
		3	3	21.76	21.61	22.03
		6	0	20.75	20.77	20.89



**Test Report No.: PSU-QSU2308280314RF01**

Band/BW	Modulation	RB Size	RB Offset	Low CH 20415	Mid CH 20525	High CH 20635
				Frequency 825.5 MHz	Frequency 836.5 MHz	Frequency 847.5 MHz
5/3	QPSK	1	0	23.51	23.43	23.55
		1	7	23.44	23.58	23.56
		1	14	23.47	23.48	23.59
		8	0	22.41	22.53	22.49
		8	3	22.57	22.58	22.51
		8	7	22.57	22.54	22.65
		15	0	22.45	22.56	22.55
	16QAM	1	0	22.52	22.84	22.87
		1	7	22.70	22.78	22.80
		1	14	22.79	22.73	22.90
		8	0	21.73	21.74	21.81
		8	3	21.80	21.88	21.82
		8	7	21.74	21.85	21.85
		15	0	21.71	21.75	21.80
	64QAM	1	0	21.86	21.97	21.81
		1	7	21.88	21.74	21.87
		1	14	21.88	21.78	21.85
		8	0	21.03	20.68	20.69
		8	3	20.81	20.65	20.72
		8	7	20.73	20.65	20.99
		15	0	20.77	20.74	20.93



Test Report No.: PSU-QSU2308280314RF01

Band/BW	Modulation	RB Size	RB Offset	Low CH 20425	Mid CH 20525	High CH 20625
				Frequency 826.5 MHz	Frequency 836.5 MHz	Frequency 846.5 MHz
5 / 5	QPSK	1	0	23.52	23.38	23.56
		1	12	23.49	23.55	23.56
		1	24	23.48	23.47	23.63
		12	0	22.44	22.53	22.46
		12	6	22.57	22.59	22.52
		12	13	22.61	22.50	22.66
		25	0	22.43	22.59	22.58
	16QAM	1	0	22.53	22.80	22.87
		1	12	22.67	22.81	22.79
		1	24	22.79	22.73	22.89
		12	0	21.73	21.72	21.78
		12	6	21.77	21.92	21.78
		12	13	21.69	21.87	21.88
		25	0	21.71	21.76	21.77
	64QAM	1	0	21.80	21.94	21.87
		1	12	21.85	21.80	21.87
		1	24	21.81	21.83	21.85
		12	0	21.04	20.65	20.68
		12	6	20.75	20.72	20.71
		12	13	20.77	20.64	20.96
		25	0	20.73	20.80	20.91



Test Report No.: PSU-QSU2308280314RF01

Band/BW	Modulation	RB Size	RB Offset	Low CH 20450	Mid CH 20525	High CH 20600
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz
5/ 10	QPSK	1	0	23.57	23.45	23.61
		1	24	23.51	23.63	23.58
		1	49	23.53	23.55	<b>23.64</b>
		25	0	22.48	22.58	22.51
		25	12	22.65	22.60	22.57
		25	25	22.65	22.55	22.67
		50	0	22.49	22.61	22.63
	16QAM	1	0	22.60	22.85	22.89
		1	24	22.75	22.83	22.84
		1	49	22.81	22.81	22.91
		25	0	21.81	21.78	21.86
		25	12	21.83	21.94	21.84
		25	25	21.76	21.92	21.90
		50	0	21.77	21.83	21.82
	64QAM	1	0	21.87	21.99	21.89
		1	24	21.93	21.82	21.93
		1	49	21.89	21.84	21.87
		25	0	21.08	20.70	20.76
		25	12	20.83	20.73	20.73
		25	25	20.81	20.69	21.04
		50	0	20.79	20.82	20.94





Test Report No.: PSU-QSU2308280314RF01

**ERP POWER (dBm)**

**GSM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
128	824.2	32.46	-3.2	27.11	514.04	7
190	836.6	32.41	-3.2	27.06	508.16	7
251	848.8	32.38	-3.2	27.03	504.66	7

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

**EDGE**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
128	824.2	26.42	-3.2	21.07	127.94	7
190	836.6	26.36	-3.2	21.01	126.18	7
251	848.8	26.2	-3.2	20.85	121.62	7

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

**WCDMA V**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
4132	826.4	24.27	-3.2	18.92	77.98	7
4182	836.4	24.29	-3.2	18.94	78.34	7
4233	846.6	24.31	-3.2	18.96	78.7	7

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



BUREAU  
VERITAS

Test Report No.: PSU-QSU2308280314RF01

**LTE BAND 5**

**CHANNEL BANDWIDTH: 1.4MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	23.64	-3.2	18.29	67.45	7
20525	836.5	23.58	-3.2	18.23	66.53	7
20643	848.3	23.61	-3.2	18.26	66.99	7

**CHANNEL BANDWIDTH: 1.4MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	22.77	-3.2	17.42	55.21	7
20525	836.5	22.93	-3.2	17.58	57.28	7
20643	848.3	22.9	-3.2	17.55	56.89	7

**CHANNEL BANDWIDTH: 1.4MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	22	-3.2	16.65	46.24	7
20525	836.5	21.94	-3.2	16.59	45.6	7
20643	848.3	22.03	-3.2	16.68	46.56	7

**CHANNEL BANDWIDTH: 3MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	23.51	-3.2	18.16	65.46	7
20525	836.5	23.58	-3.2	18.23	66.53	7
20635	847.5	23.59	-3.2	18.24	66.68	7

**CHANNEL BANDWIDTH: 3MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	22.79	-3.2	17.44	55.46	7
20525	836.5	22.84	-3.2	17.49	56.1	7
20635	847.5	22.9	-3.2	17.55	56.89	7

**CHANNEL BANDWIDTH: 3MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	21.88	-3.2	16.53	44.98	7
20525	836.5	21.97	-3.2	16.62	45.92	7
20635	847.5	21.87	-3.2	16.52	44.87	7



Test Report No.: PSU-QSU2308280314RF01

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	23.52	-3.2	18.17	65.61	7
20525	836.5	23.55	-3.2	18.2	66.07	7
20625	846.5	23.63	-3.2	18.28	67.3	7

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	22.79	-3.2	17.44	55.46	7
20525	836.5	22.81	-3.2	17.46	55.72	7
20625	846.5	22.89	-3.2	17.54	56.75	7

**CHANNEL BANDWIDTH: 5MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	21.85	-3.2	16.5	44.67	7
20525	836.5	21.94	-3.2	16.59	45.6	7
20625	846.5	21.87	-3.2	16.52	44.87	7

**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829	23.57	-3.2	18.22	66.37	7
20525	836.5	23.63	-3.2	18.28	67.3	7
20600	844	23.64	-3.2	18.29	67.45	7

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829	22.81	-3.2	17.46	55.72	7
20525	836.5	22.85	-3.2	17.5	56.23	7
20600	844	22.91	-3.2	17.56	57.02	7

**CHANNEL BANDWIDTH: 10MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829	21.93	-3.2	16.58	45.5	7
20525	836.5	21.99	-3.2	16.64	46.13	7
20600	844	21.93	-3.2	16.58	45.5	7

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

## 3.2 FREQUENCY STABILITY MEASUREMENT

### 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

### 3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 3.2.3 TEST SETUP

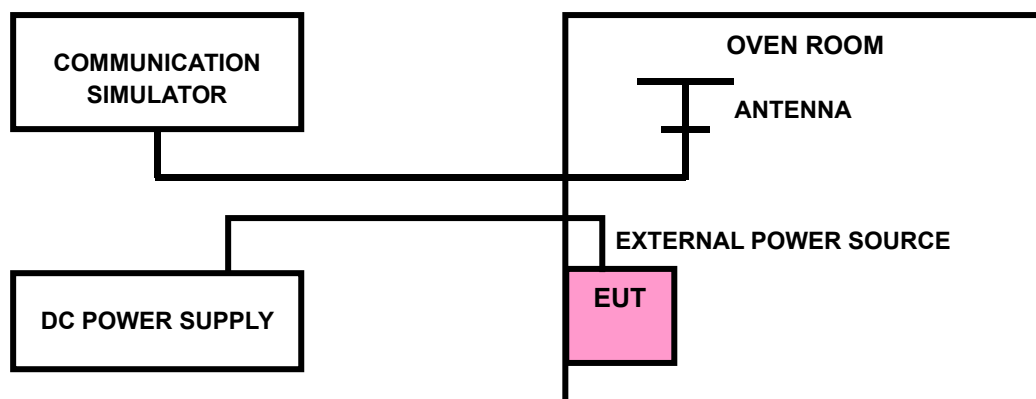



Test Report No.: PSU-QSU2308280314RF01

### 3.2.4 TEST RESULTS


Please Refer to Appendix Of this test report.

### 3.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

#### 3.3.2 TEST SETUP

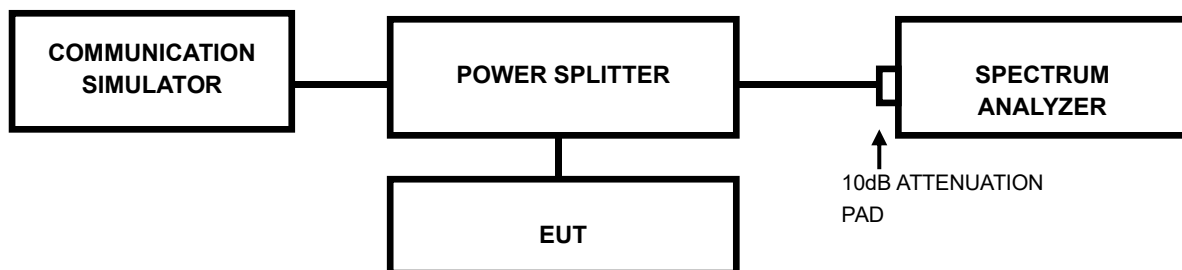



**BUREAU  
VERITAS**

**Test Report No.: PSU-QSU2308280314RF01**

### 3.3.3 TEST RESULTS


Please Refer to Appendix Of this test report.

### 3.4 BAND EDGE MEASUREMENT

#### 3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 3.4.2 TEST SETUP

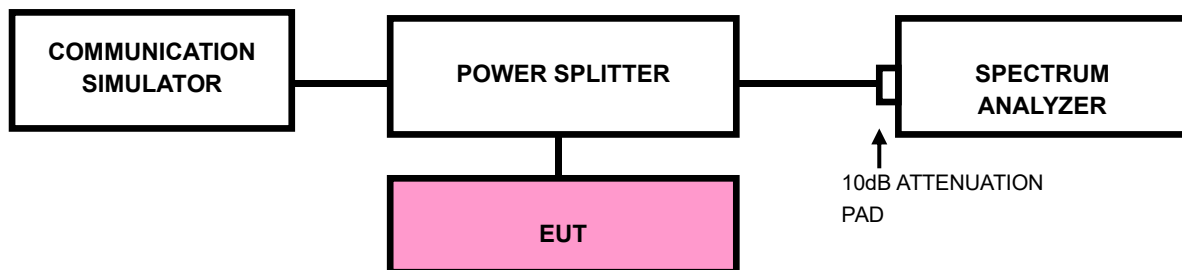





### 3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW)
- d) Set the resolution bandwidth (RBW)  $\cong$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to  $\cong$  3 x RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to  $\cong$  1001.
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.

### 3.4.4 TEST RESULTS

Please Refer to Appendix Of this test report.

### 3.5 CONDUCTED SPURIOUS EMISSIONS


#### 3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10<sup>th</sup> harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

#### 3.5.1 TEST SETUP

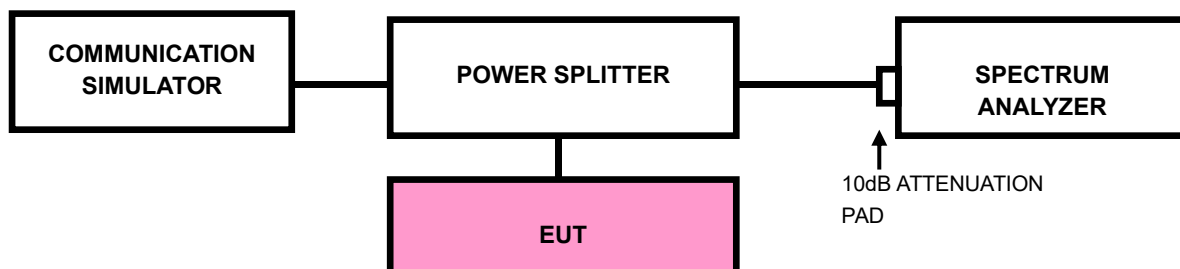

#### 3.5.2 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.



### 3.6 RADIATED EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  
 $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi.}$


**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

#### 3.6.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.6.4 TEST SETUP


#### < Frequency Range below 30MHz >

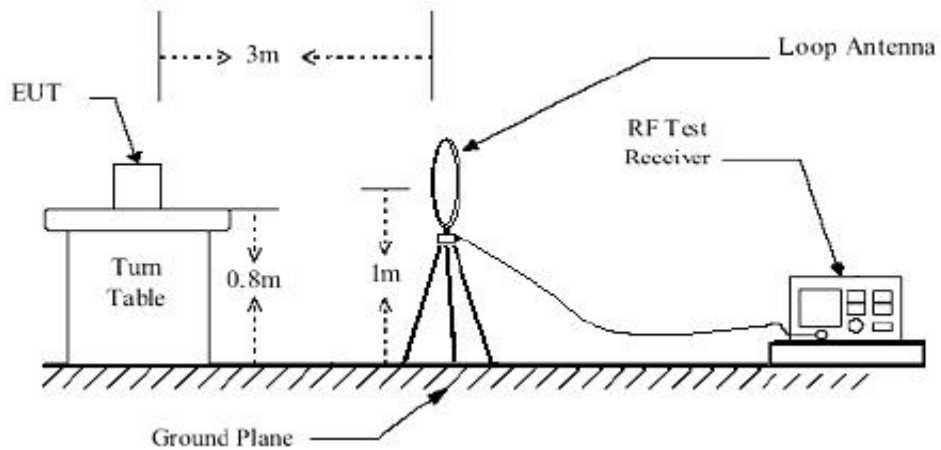

#### < Frequency Range 30MHz~1GHz >

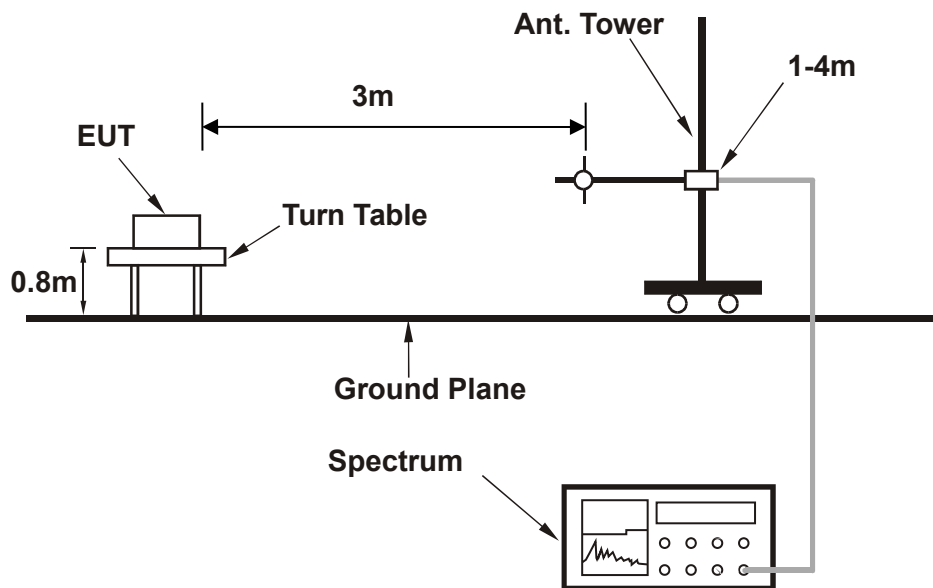

<Frequency Range above 1GHz>

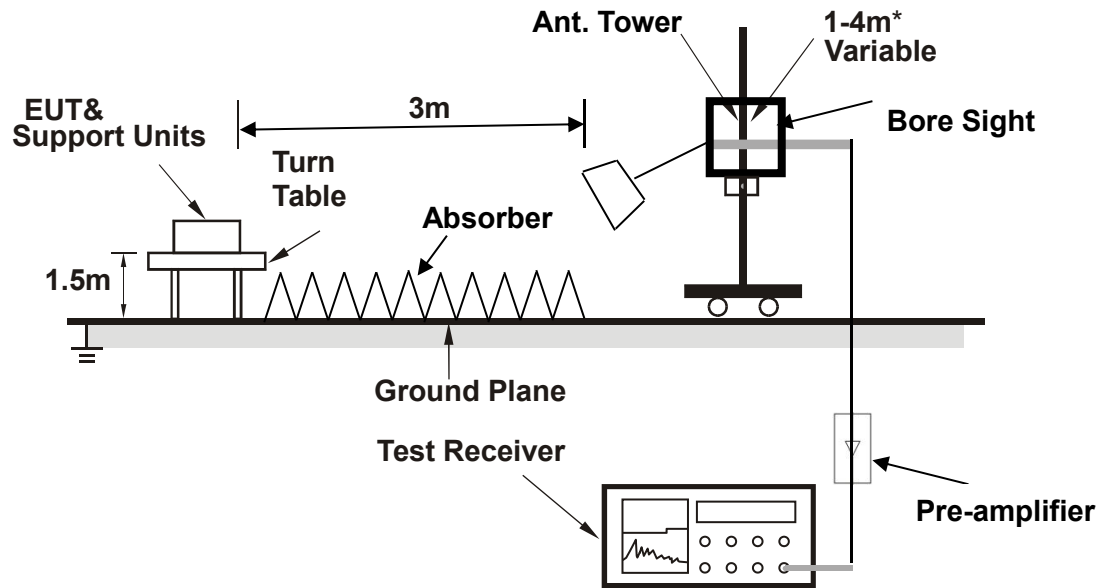

**Note:** Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



### 3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

#### BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

GSM 850

CHANNEL BANDWIDTH: 128 ~ 251

<b>MODE</b>	TX channel 251	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	37.760	-51.87	-13.00	38.87	4.82	H	170.2	1
1	59.585	-49.55	-13.00	36.55	0.42	H	53.1	1
1	101.780	-65.55	-13.00	52.55	-7.60	H	236	1
1	229.820	-53.51	-13.00	40.51	6.20	H	170.2	1
1	423.820	-59.67	-13.00	46.67	5.67	H	358.5	1
1	657.105	-57.27	-13.00	44.27	7.56	H	1	1

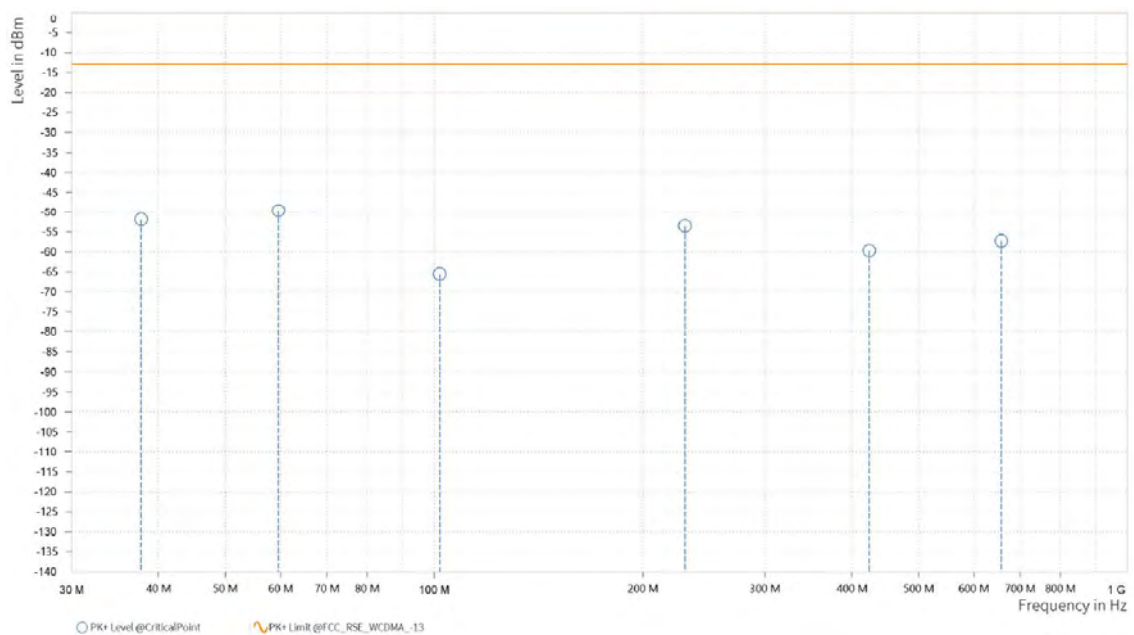




Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 251	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	32.910	-57.82	-13.00	44.82	-1.84	V	165.4	1
1	58.130	-53.77	-13.00	40.77	1.12	V	51.9	1
1	98.870	-49.64	-13.00	36.64	10.06	V	330.5	1
1	227.395	-59.80	-13.00	46.80	-1.16	V	220.5	1
1	435.460	-59.97	-13.00	46.97	5.75	V	359.1	1
1	744.890	-56.72	-13.00	43.72	7.94	V	275.4	1

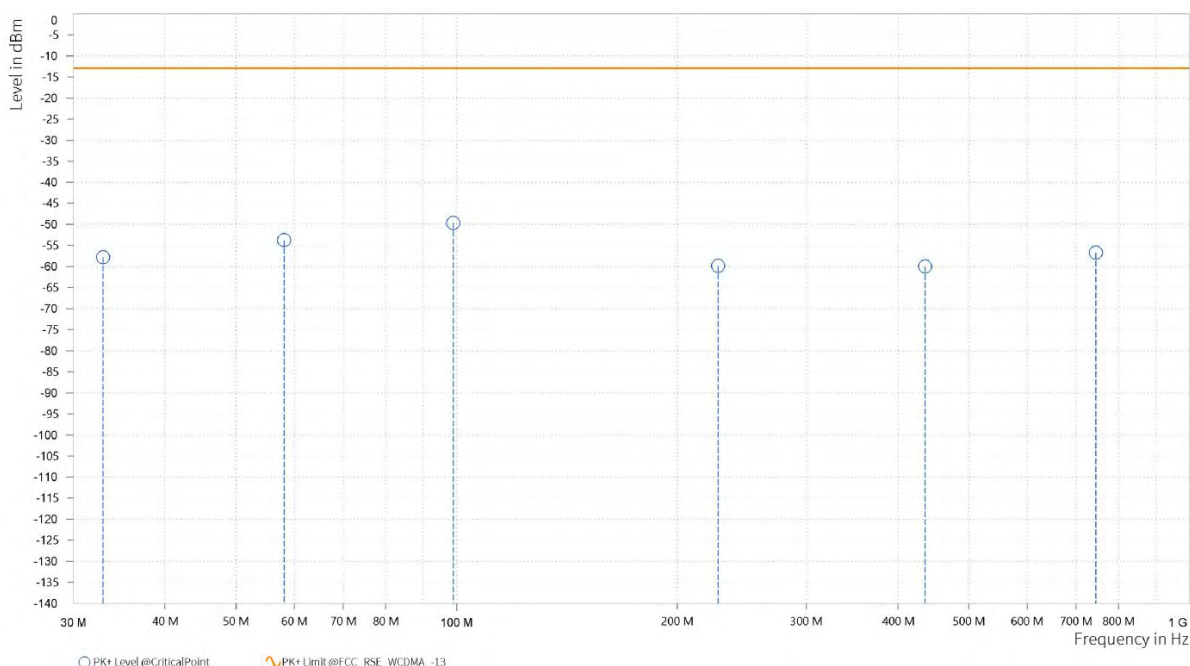





**BUREAU  
VERITAS**

**Test Report No.: PSU-QSU2308280314RF01**

**ABOVE 1GHz DATA**


**Note:** For higher frequency, the emission is too low to be detected.

**GSM 850**

**CH 128:**

<b>MODE</b>	TX channel 128	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,648.500	-48.05	-13.00	35.05	17.46	H	0.9	2
4	7,433.500	-40.05	-13.00	27.05	29.11	H	250.4	1

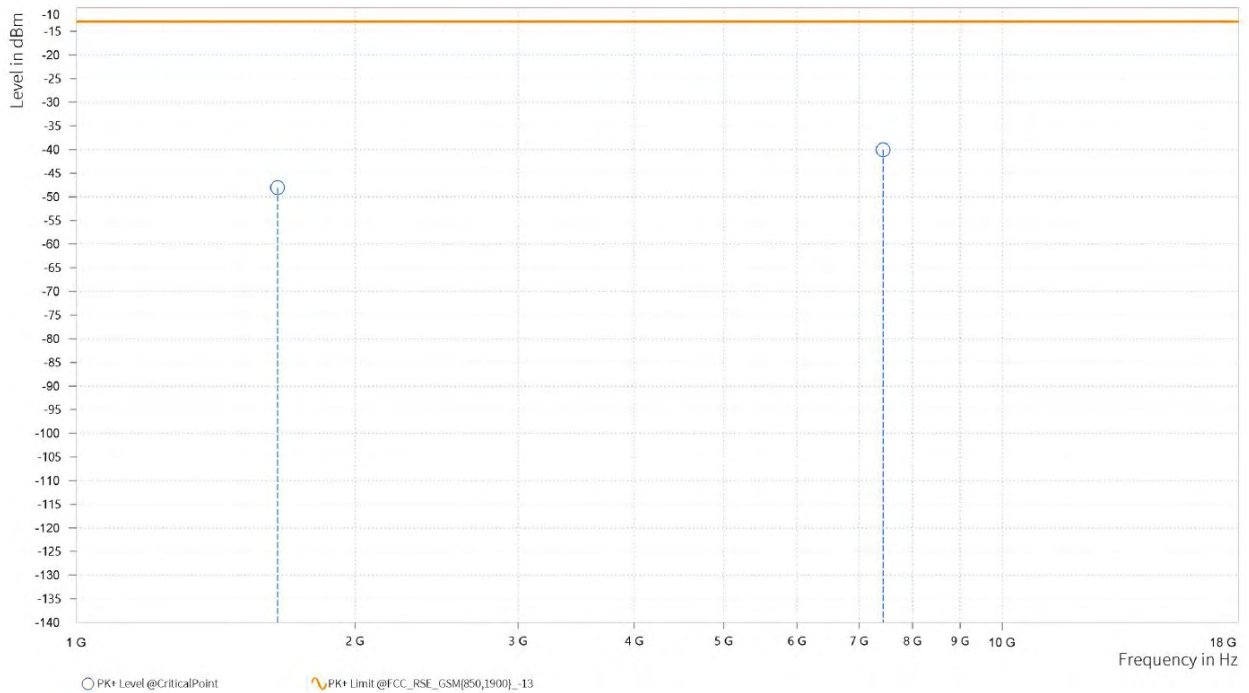






Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 128	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,648.000	-48.28	-13.00	35.28	17.05	V	91.4	1
4	7,431.500	-39.75	-13.00	26.75	29.13	V	359.1	1

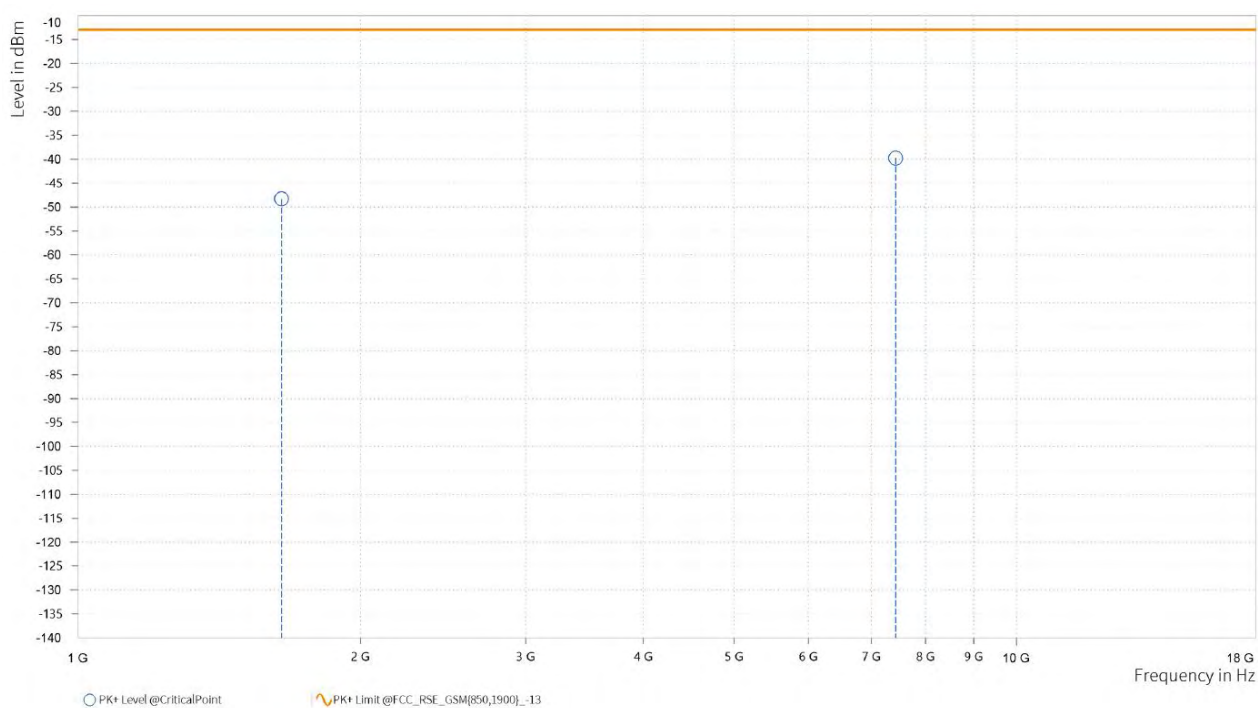




Test Report No.: PSU-QSU2308280314RF01

CH 190:

<b>MODE</b>	TX channel 190	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.500	-49.84	-13.00	36.84	18.24	H	359.1	1
4	7,865.500	-39.72	-13.00	26.72	29.36	H	0.9	2

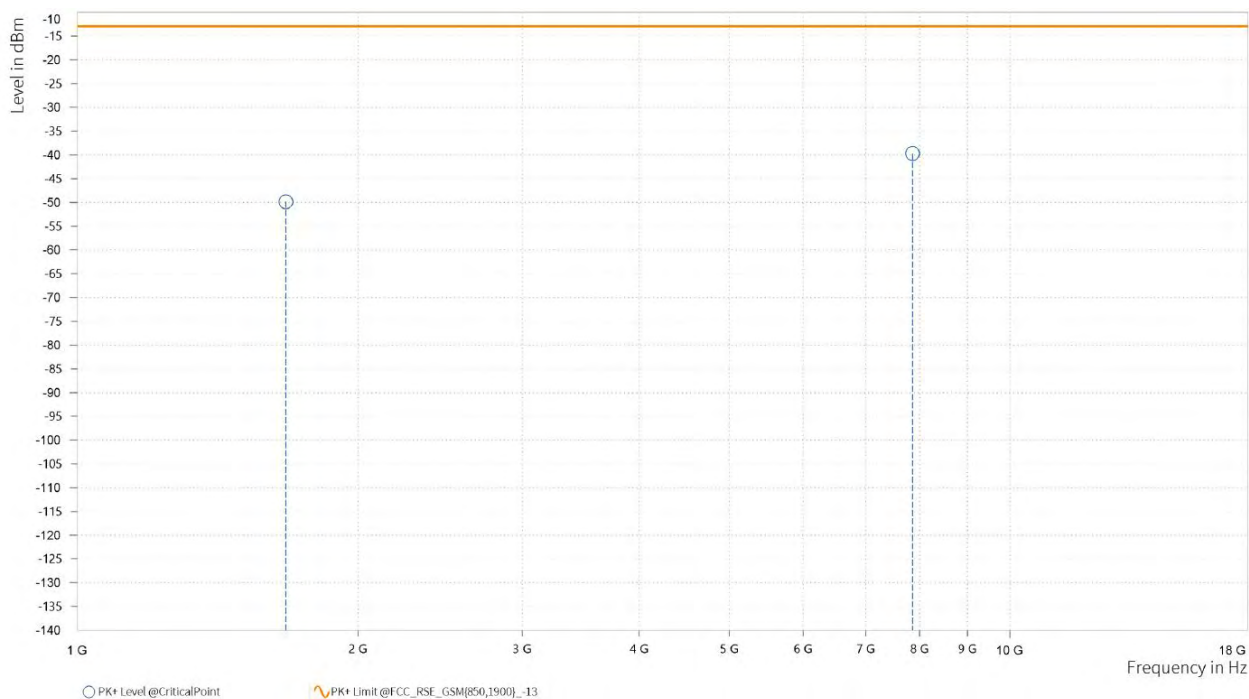




Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 190	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,673.000	-47.30	-13.00	34.30	17.14	V	359	2
4	7,476.500	-39.56	-13.00	26.56	29.04	V	77.4	2

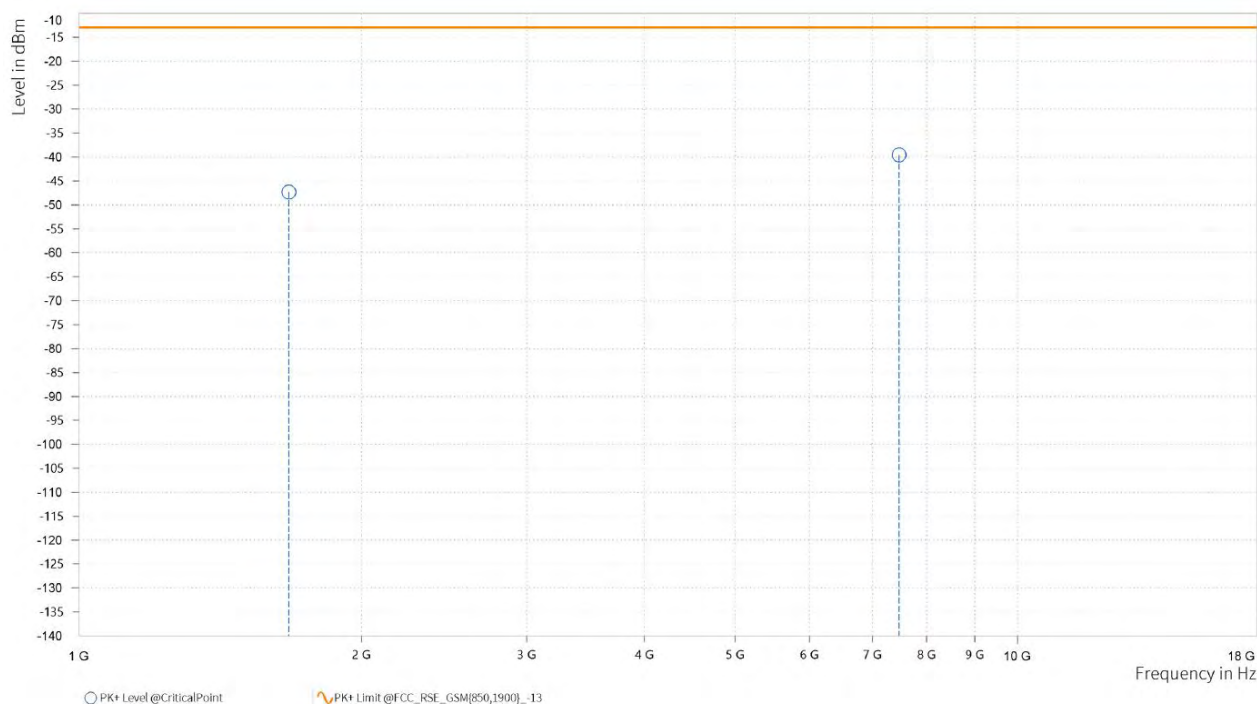




Test Report No.: PSU-QSU2308280314RF01

CH 251:

<b>MODE</b>	TX channel 251	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,697.500	-46.61	-13.00	33.61	18.62	H	0.9	2
4	7,227.000	-40.06	-13.00	27.06	29.62	H	0.9	2

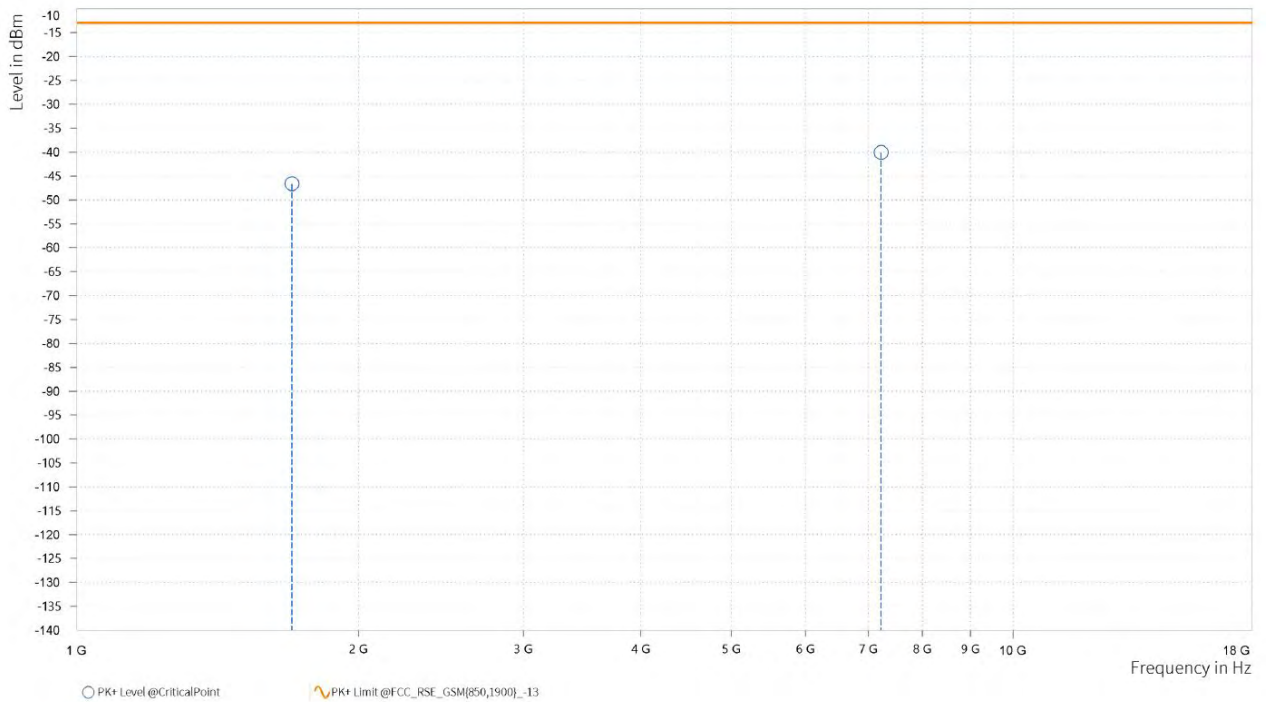






**Test Report No.: PSU-QSU2308280314RF01**

<b>MODE</b>	TX channel 251	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,697.500	-49.09	-13.00	36.09	17.84	V	1	1
4	7,453.000	-39.40	-13.00	26.40	29.12	V	1	2

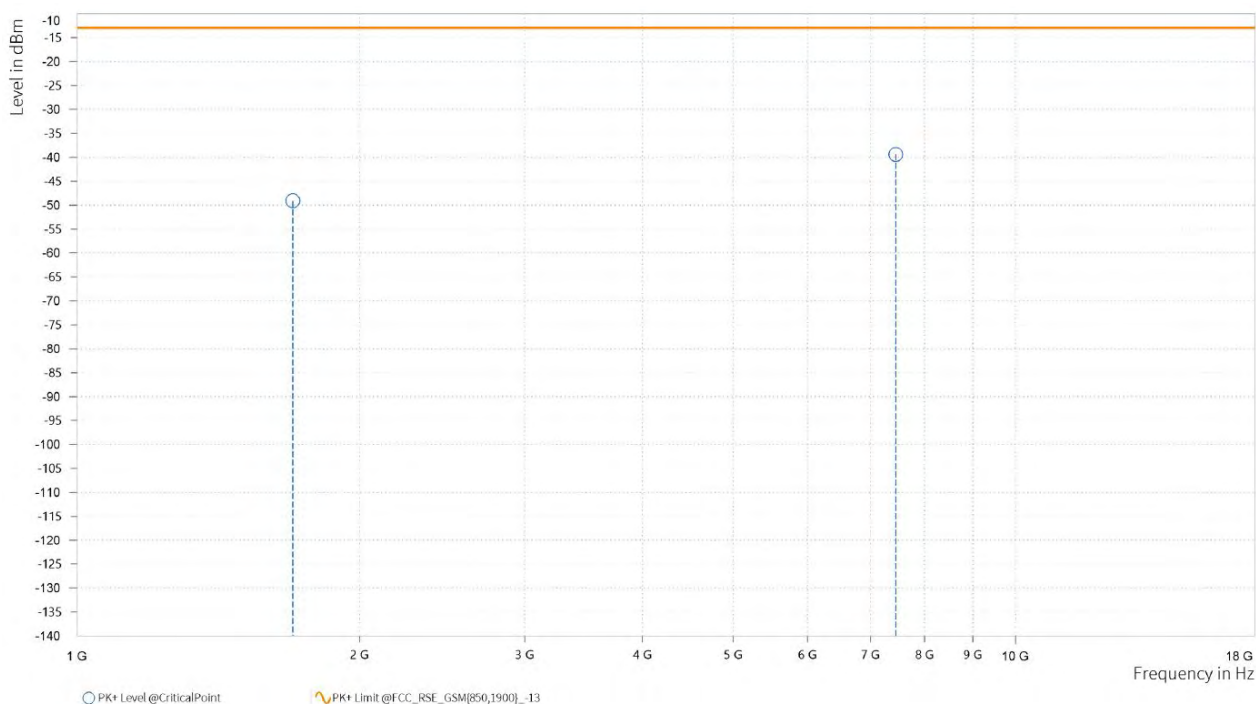




Test Report No.: PSU-QSU2308280314RF01

EDGE 850:

CH 128:

<b>MODE</b>	TX channel 128	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,649.000	-46.66	-13.00	33.66	17.48	H	359	2
3	2,472.500	-41.46	-13.00	28.46	22.42	H	359	2
4	7,437.000	-39.80	-13.00	26.80	29.09	H	250.5	1

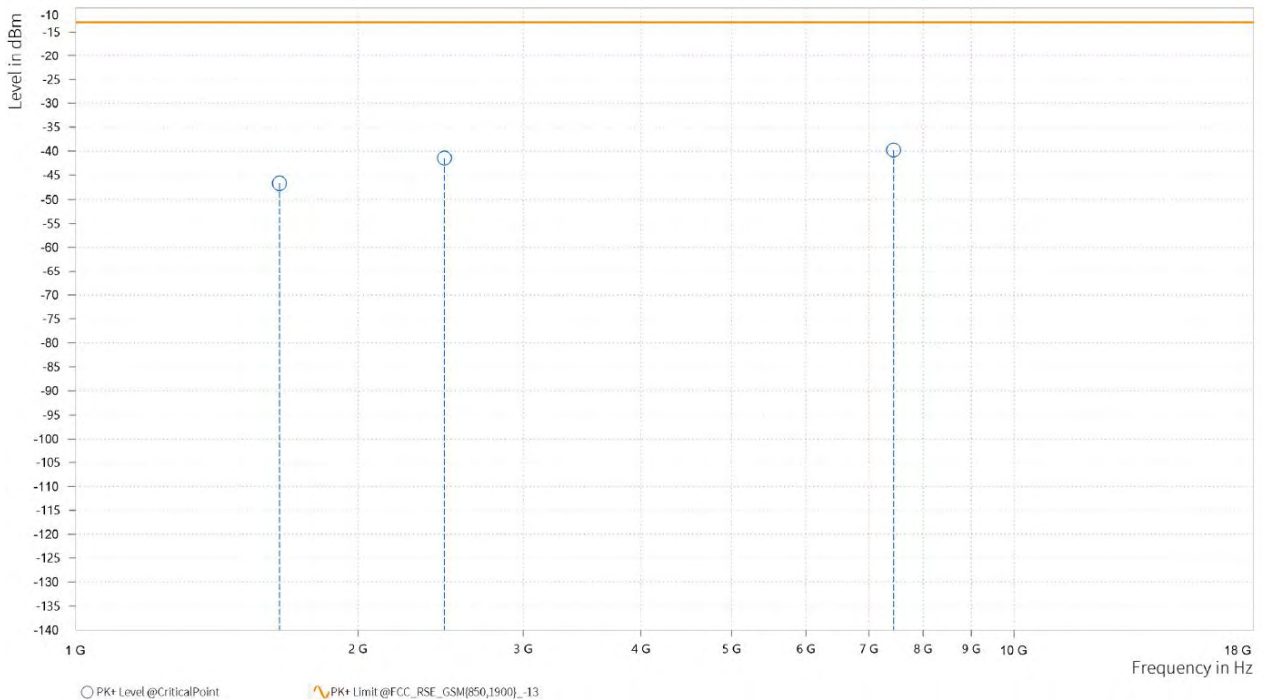




Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 128	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,648.500	-48.71	-13.00	35.71	17.04	V	359	2
3	2,473.000	-43.82	-13.00	30.82	22.68	V	192.2	2
4	7,503.000	-39.65	-13.00	26.65	29.17	V	359	2

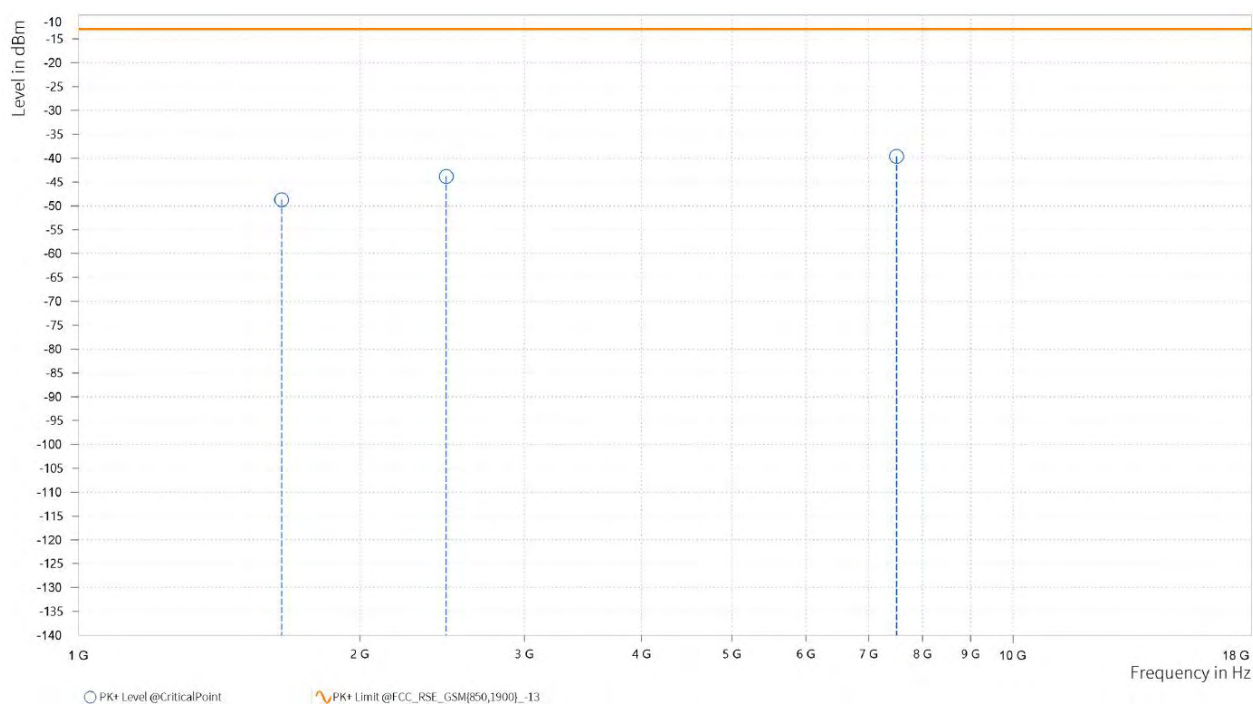




Test Report No.: PSU-QSU2308280314RF01

CH 190:

<b>MODE</b>	TX channel 190	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.000	-47.23	-13.00	34.23	18.24	H	93.8	1
4	7,497.500	-40.27	-13.00	27.27	29.13	H	359.1	1

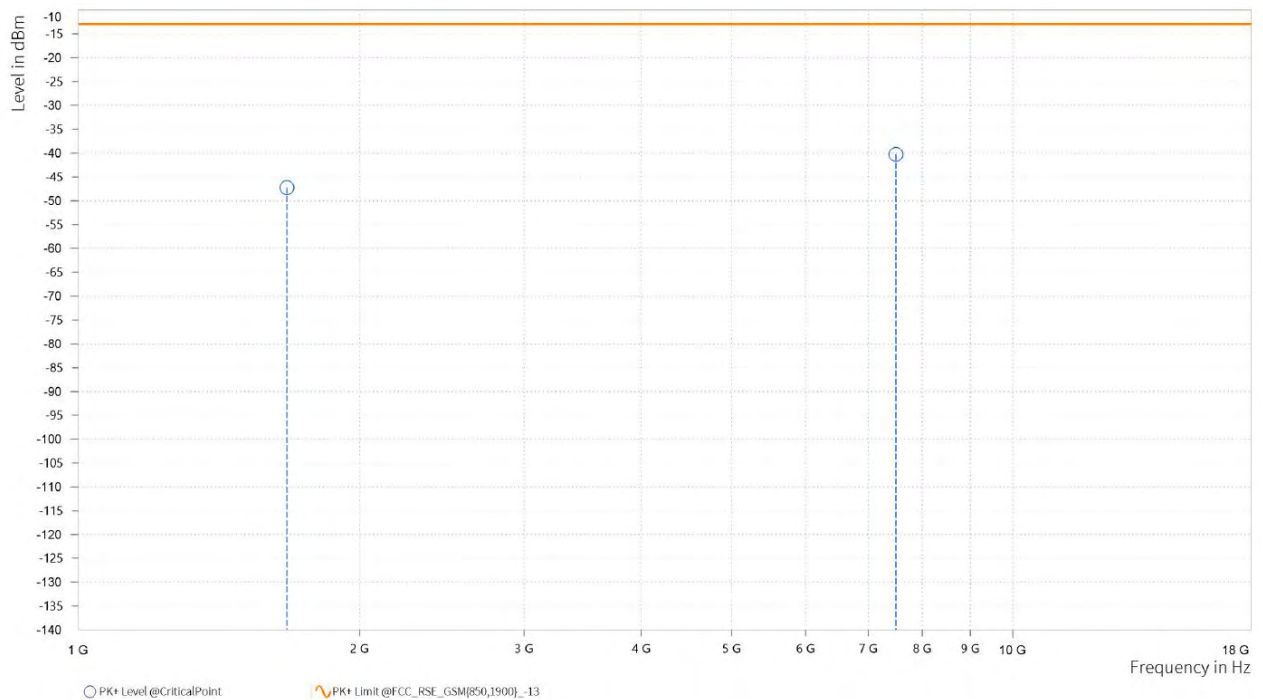






**Test Report No.: PSU-QSU2308280314RF01**

<b>MODE</b>	TX channel 190	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,673.000	-49.90	-13.00	36.90	17.14	V	359	2
4	7,441.500	-39.01	-13.00	26.01	29.10	V	359.1	1

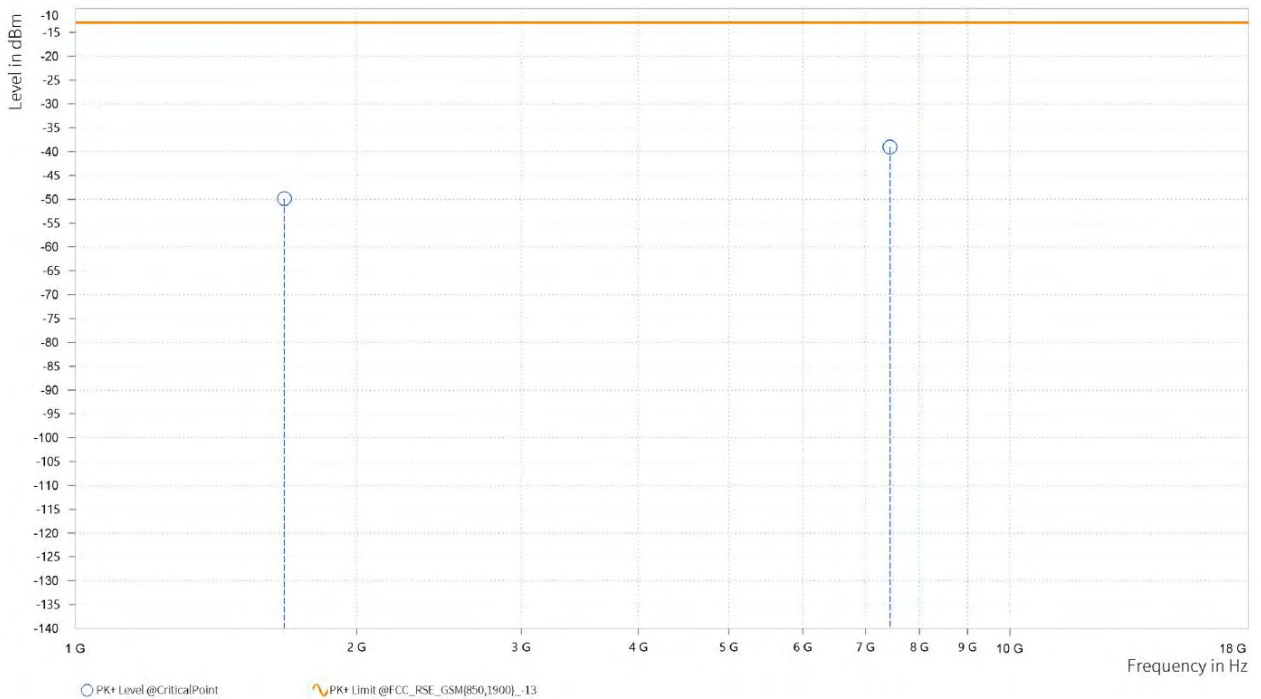




**Test Report No.: PSU-QSU2308280314RF01**

**CH 251:**

<b>MODE</b>	TX channel 251	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,697.500	-49.23	-13.00	36.23	18.62	H	359	1
4	7,961.000	-40.14	-13.00	27.14	29.90	H	1	2

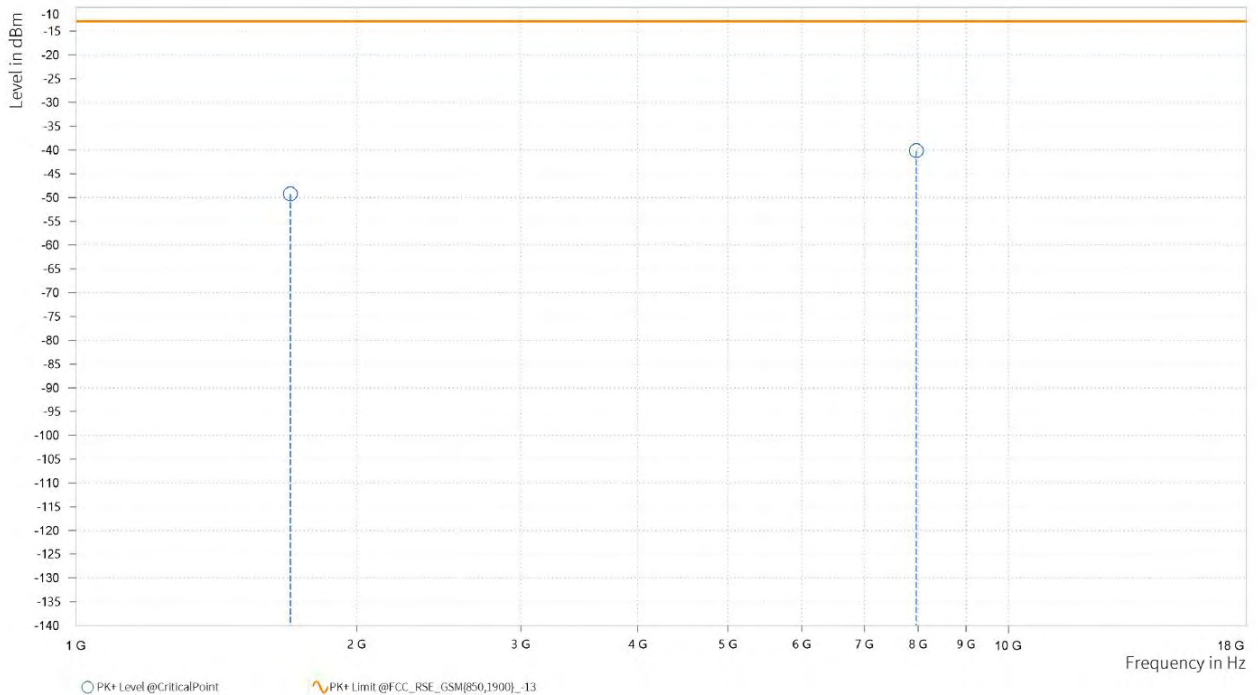




**Test Report No.: PSU-QSU2308280314RF01**

<b>MODE</b>	TX channel 251	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,697.500	-51.49	-13.00	38.49	17.84	V	359.1	1
4	7,475.500	-40.05	-13.00	27.05	29.04	V	0.9	2

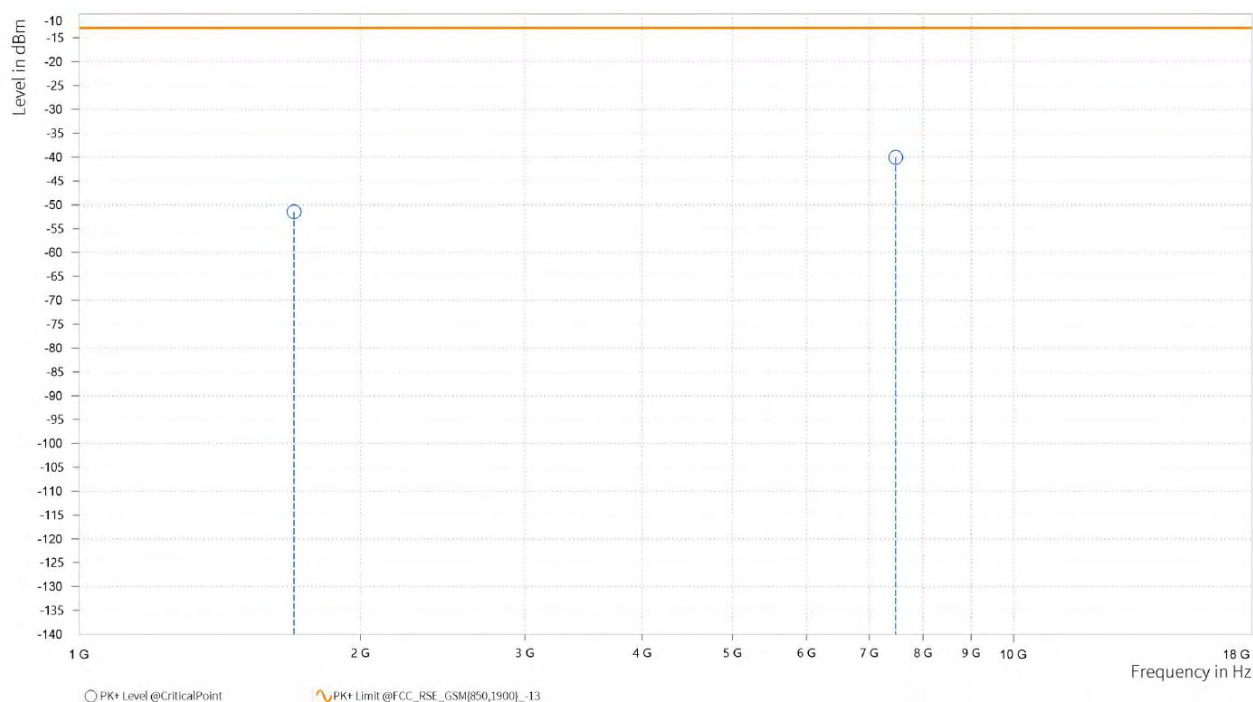




WCDMA Band V:

CH 4132:

<b>MODE</b>	TX channel 4132	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,652.500	-57.96	-13.00	44.96	14.49	H	61.7	1
5	7,946.000	-43.58	-13.00	30.58	32.99	H	359	2

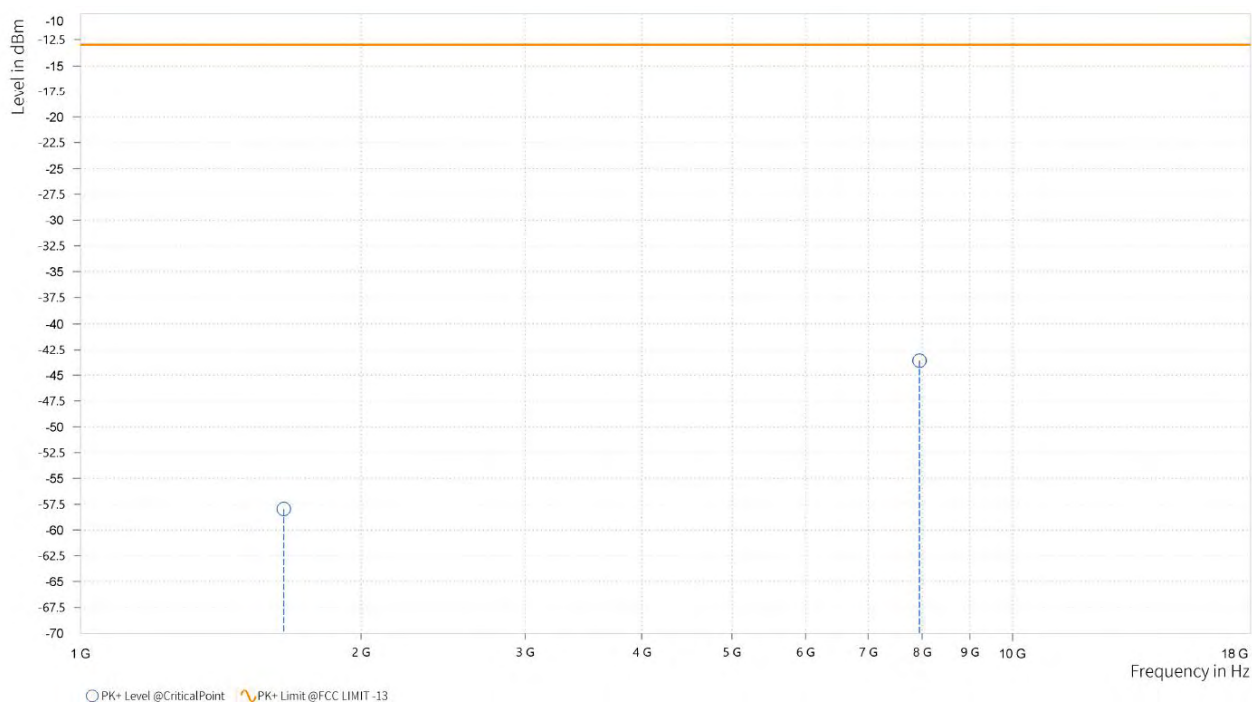






Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 4132	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,653.000	-58.33	-13.00	45.33	14.48	V	359	2
5	7,915.500	-43.45	-13.00	30.45	33.11	V	1	1

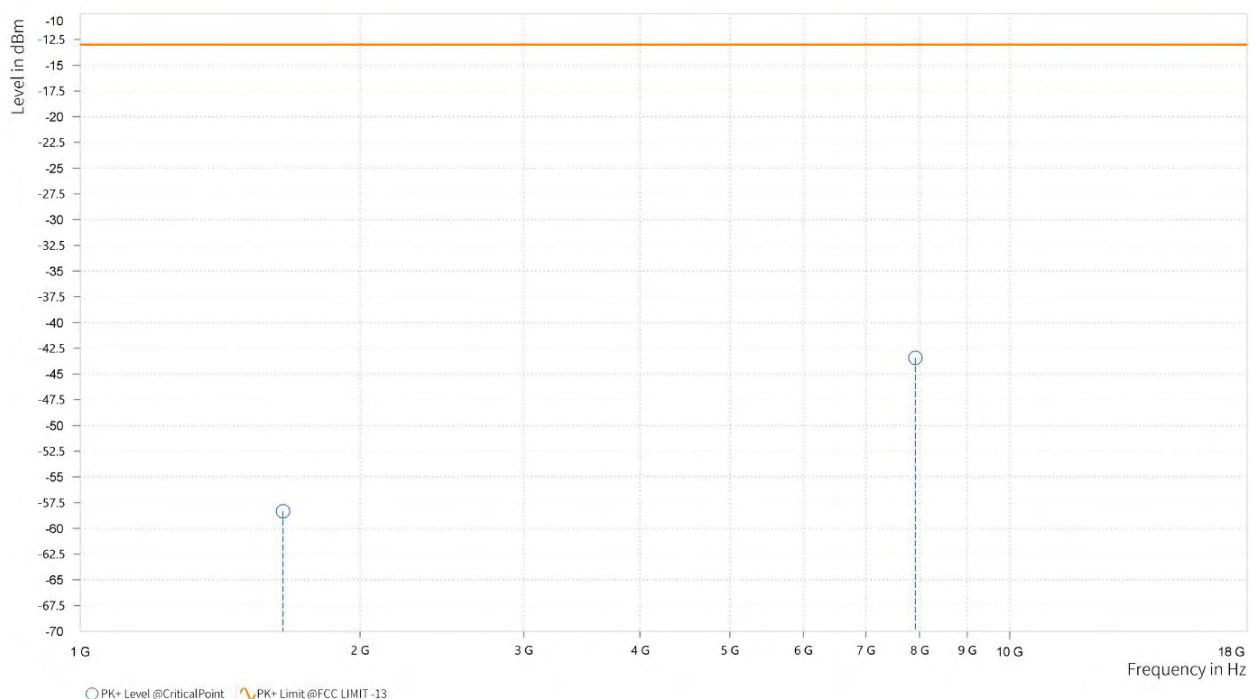




CH 4182:

<b>MODE</b>	TX channel 4182	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.500	-55.55	-13.00	42.55	15.07	H	297	2
5	7,874.500	-43.86	-13.00	30.86	33.00	H	92.6	2

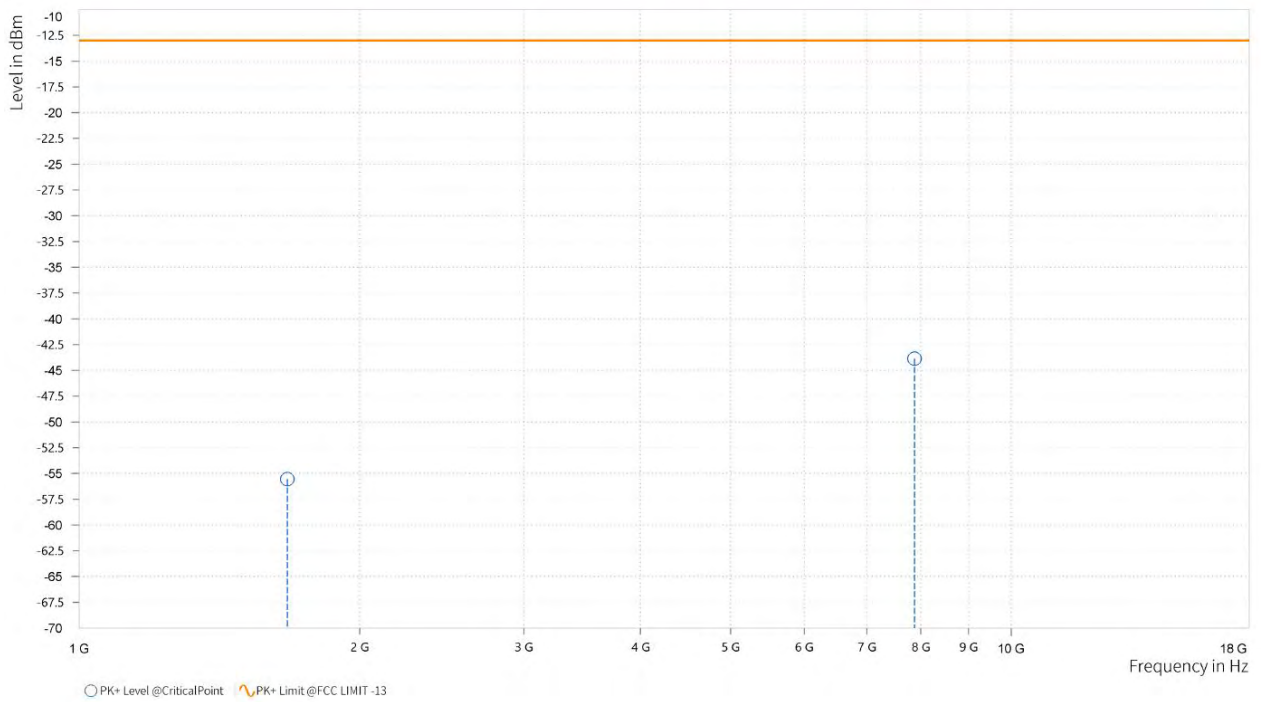




Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 4182	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.000	-54.36	-13.00	41.36	15.09	V	1	1
5	7,876.000	-43.35	-13.00	30.35	33.05	V	266.2	1

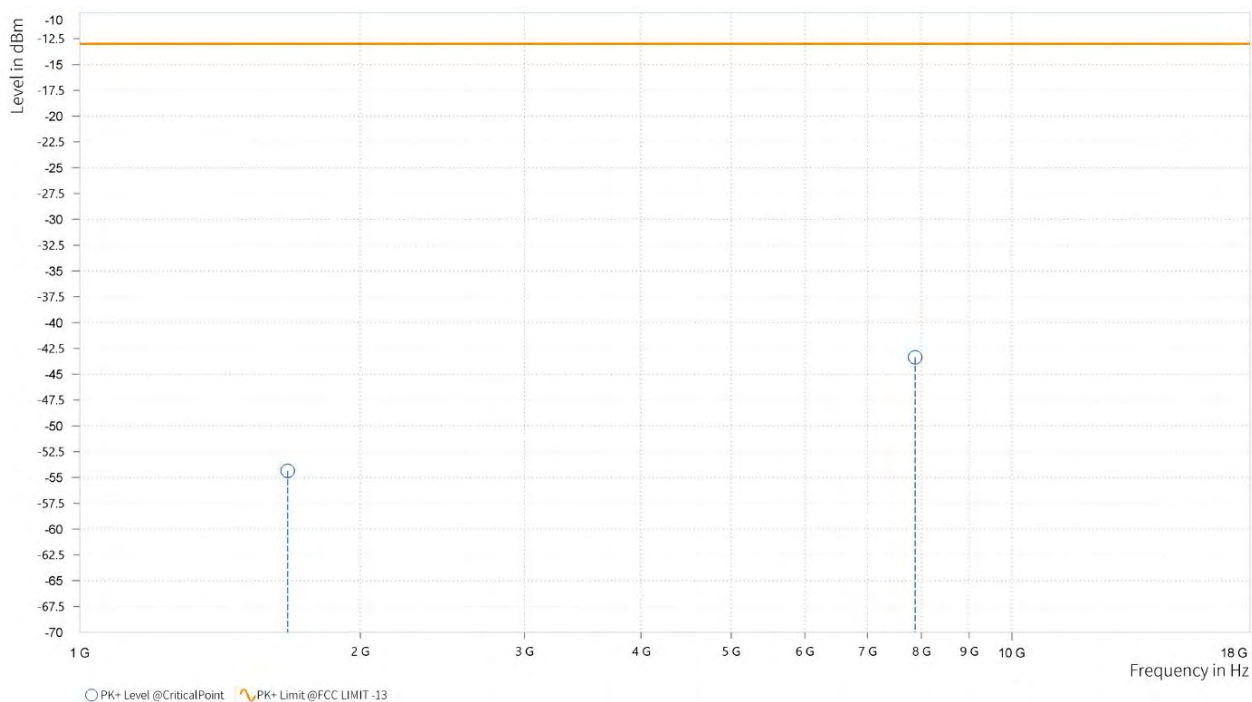




Test Report No.: PSU-QSU2308280314RF01

CH 4233:

<b>MODE</b>	TX channel 4233	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,692.500	-57.14	-13.00	44.14	15.32	H	61.7	1
5	7,759.000	-42.93	-13.00	29.93	32.83	H	1	1

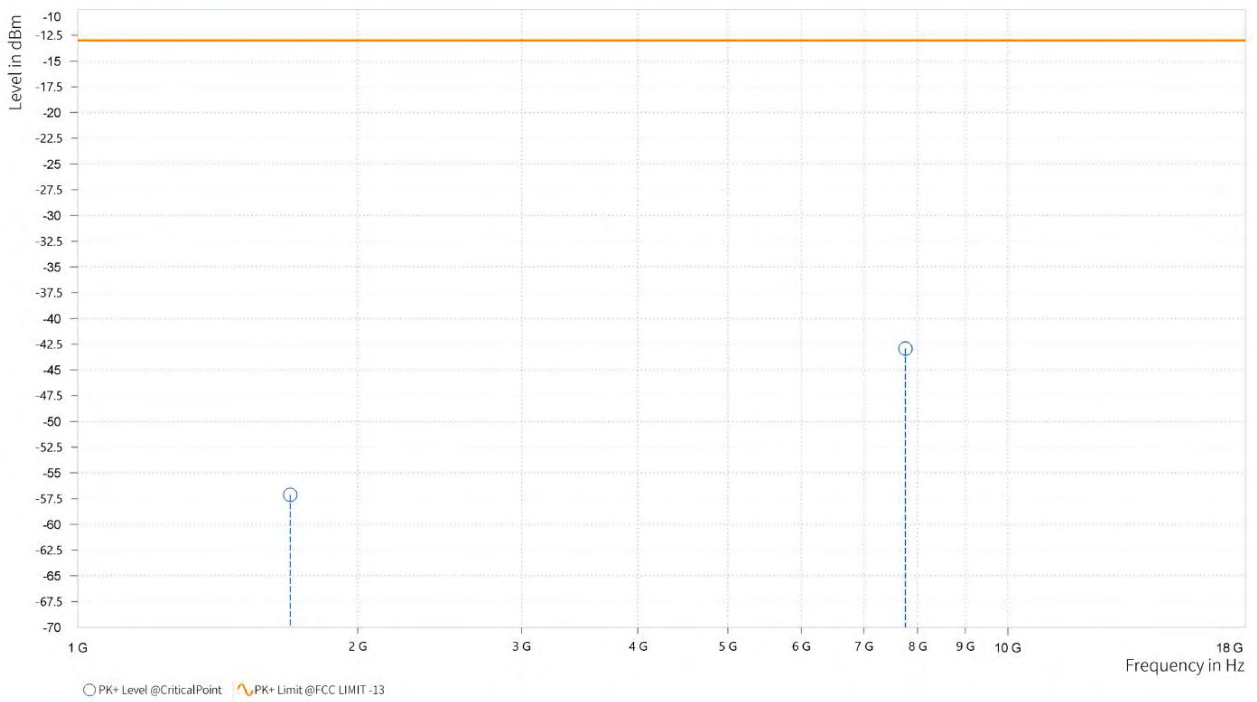






Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 4233	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,693.000	-56.53	-13.00	43.53	15.97	V	359	2
5	7,989.500	-43.38	-13.00	30.38	33.33	V	1	2

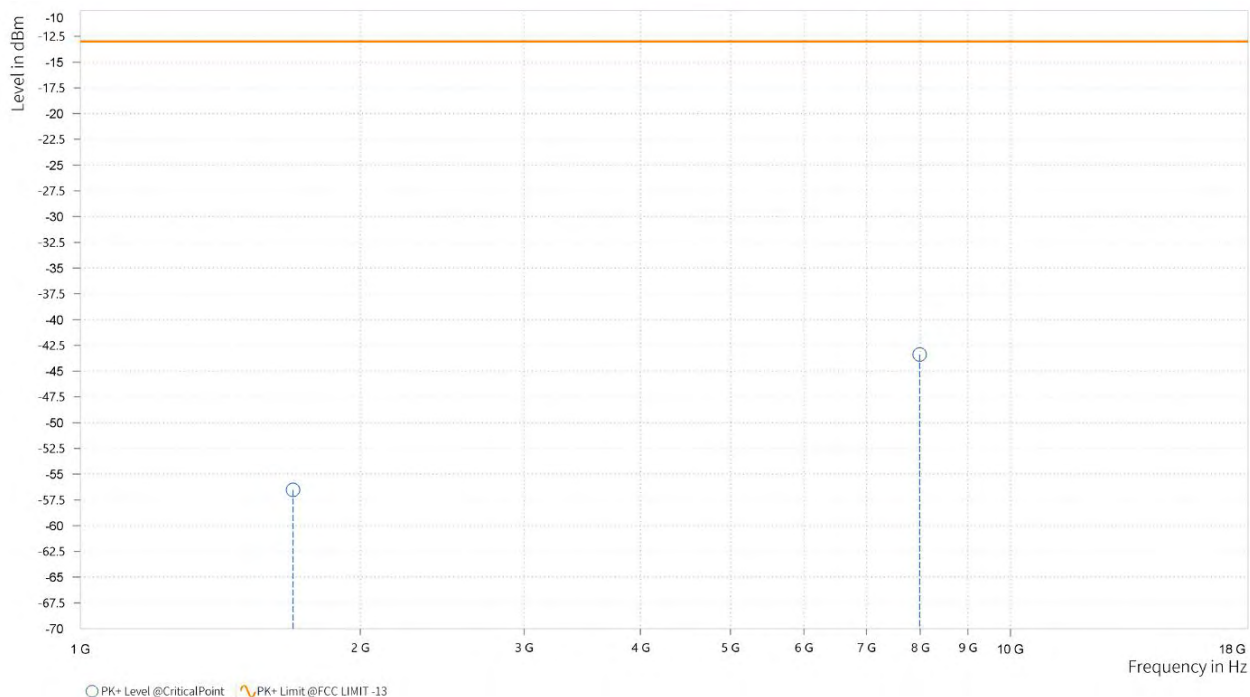




**LTE Band 5**

**CHANNEL BANDWIDTH: 1.4MHz / QPSK**

**CH 20525:**

<b>MODE</b>	TX channel 20525	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.000	-54.49	-13.00	41.49	15.06	H	64.2	1
5	7,702.000	-43.97	-13.00	30.97	32.74	H	272.2	1

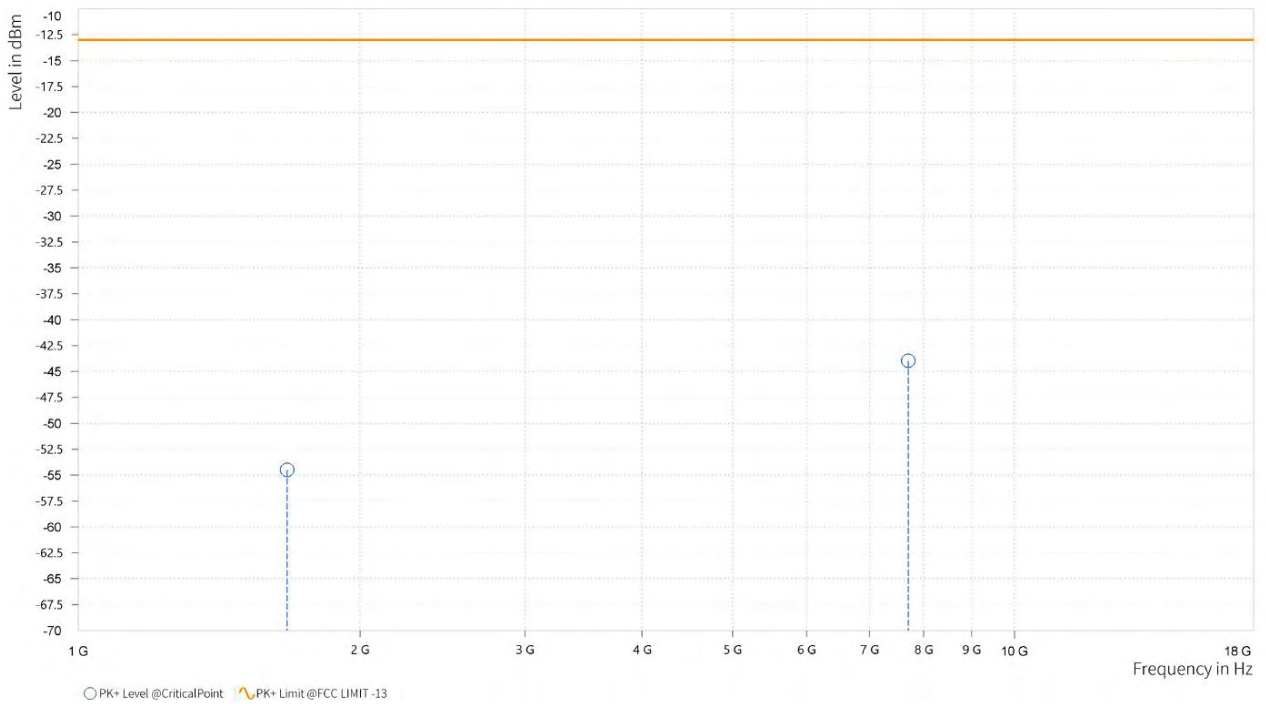




Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 20525	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.500	-55.22	-13.00	42.22	15.10	V	1	2
5	7,842.000	-43.57	-13.00	30.57	33.06	V	269.7	1

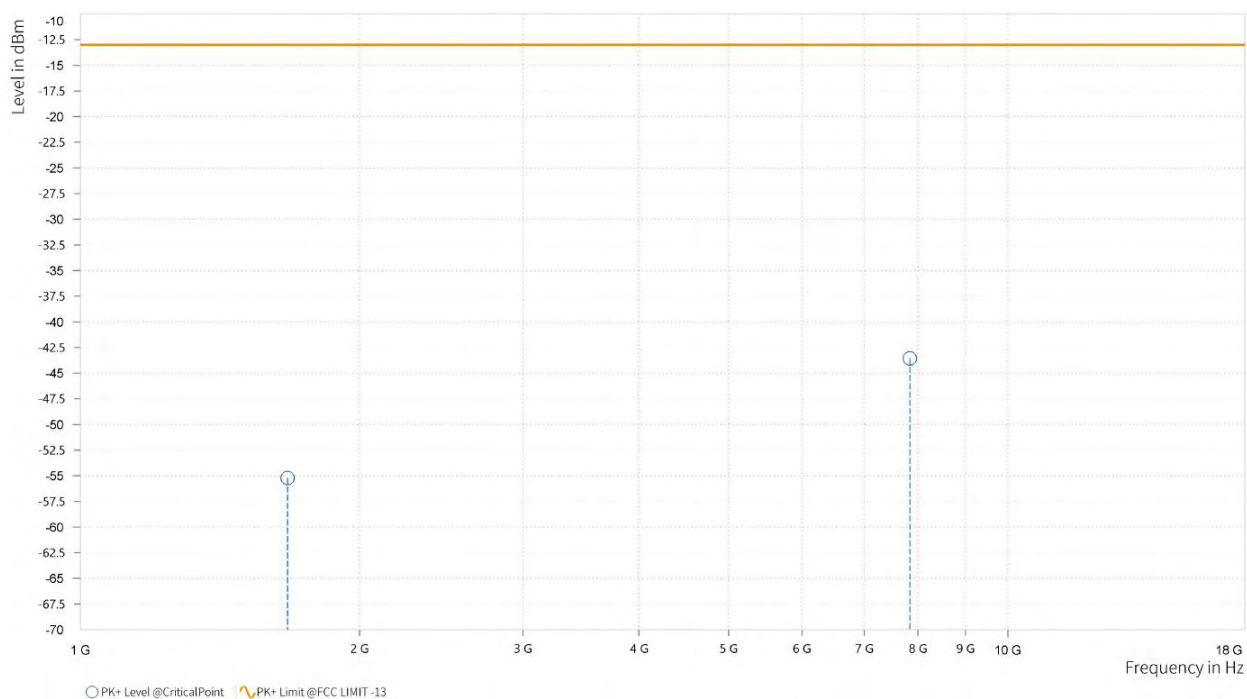




**CHANNEL BANDWIDTH: 3MHz / QPSK**

**CH 20415:**

<b>MODE</b>	TX channel 20415	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,646.500	-49.69	-13.00	36.69	14.20	H	359.1	1
5	7,854.000	-43.98	-13.00	30.98	32.98	H	272.2	1

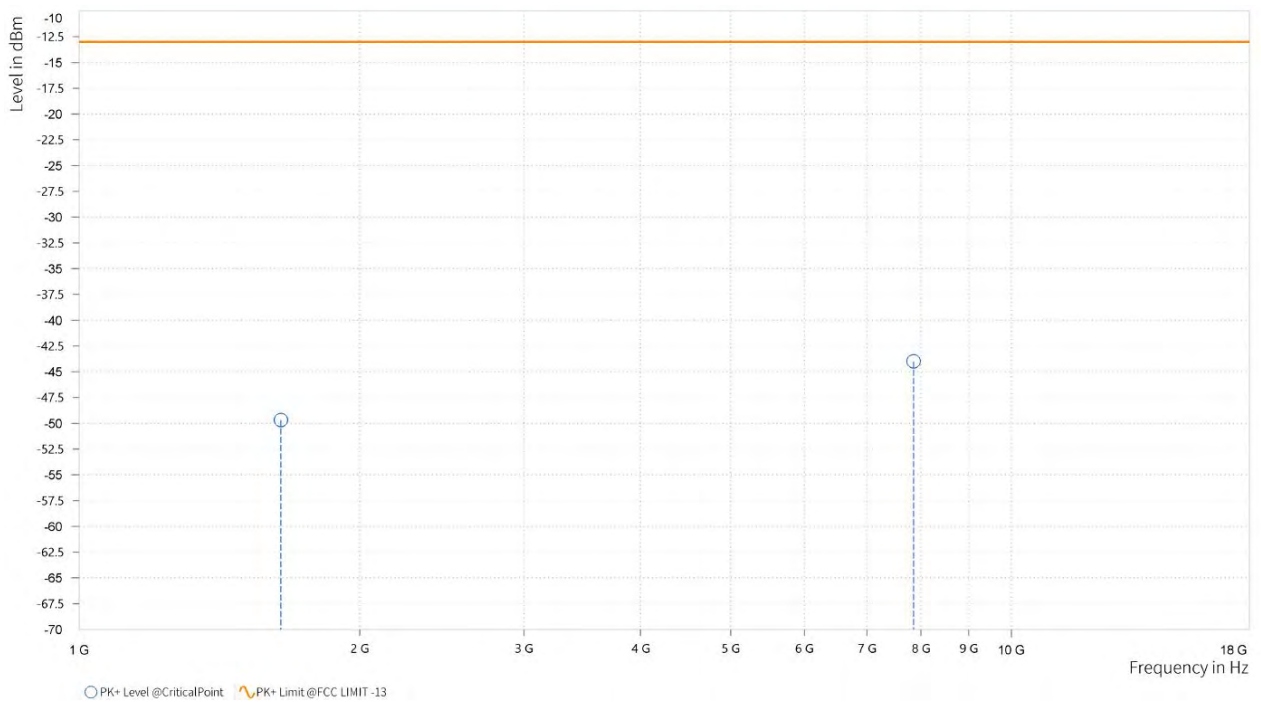






Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 20415	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,646.500	-56.55	-13.00	43.55	14.13	V	359.1	1
5	7,854.000	-43.90	-13.00	30.90	33.06	V	273.4	1

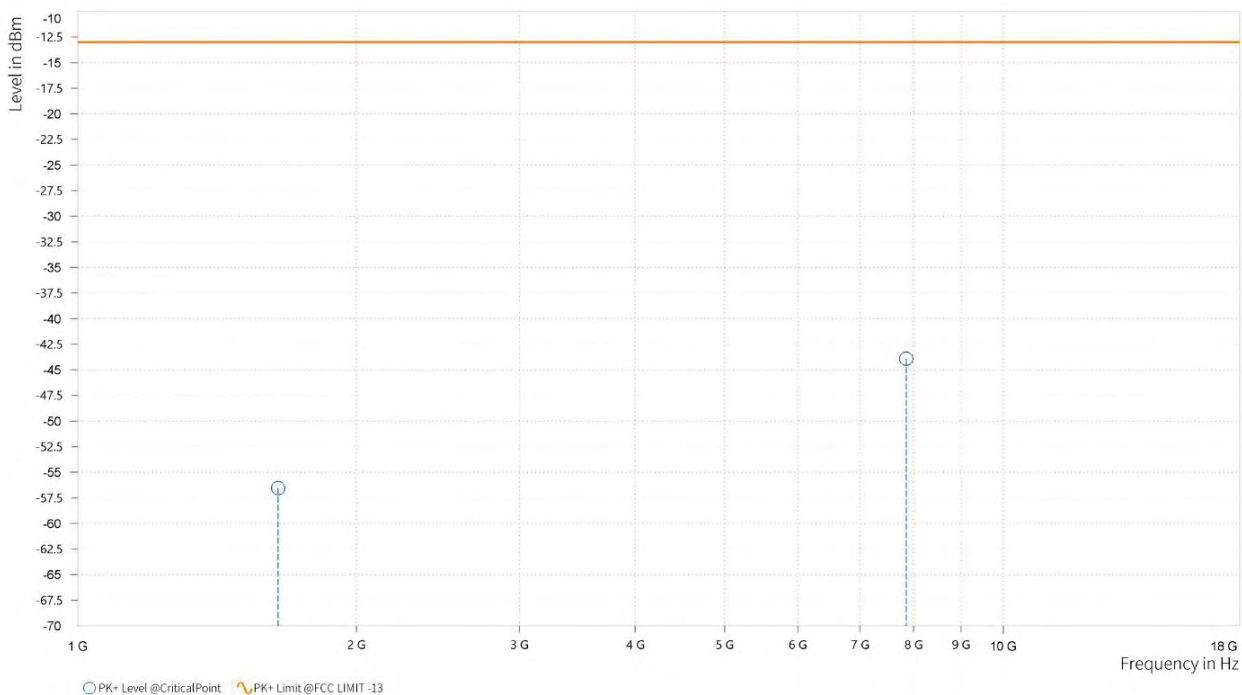




Test Report No.: PSU-QSU2308280314RF01

CH20525

<b>MODE</b>	TX channel 20525	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,670.500	-54.42	-13.00	41.42	15.02	H	295.9	2
5	7,903.000	-44.13	-13.00	31.13	33.01	H	359.1	1

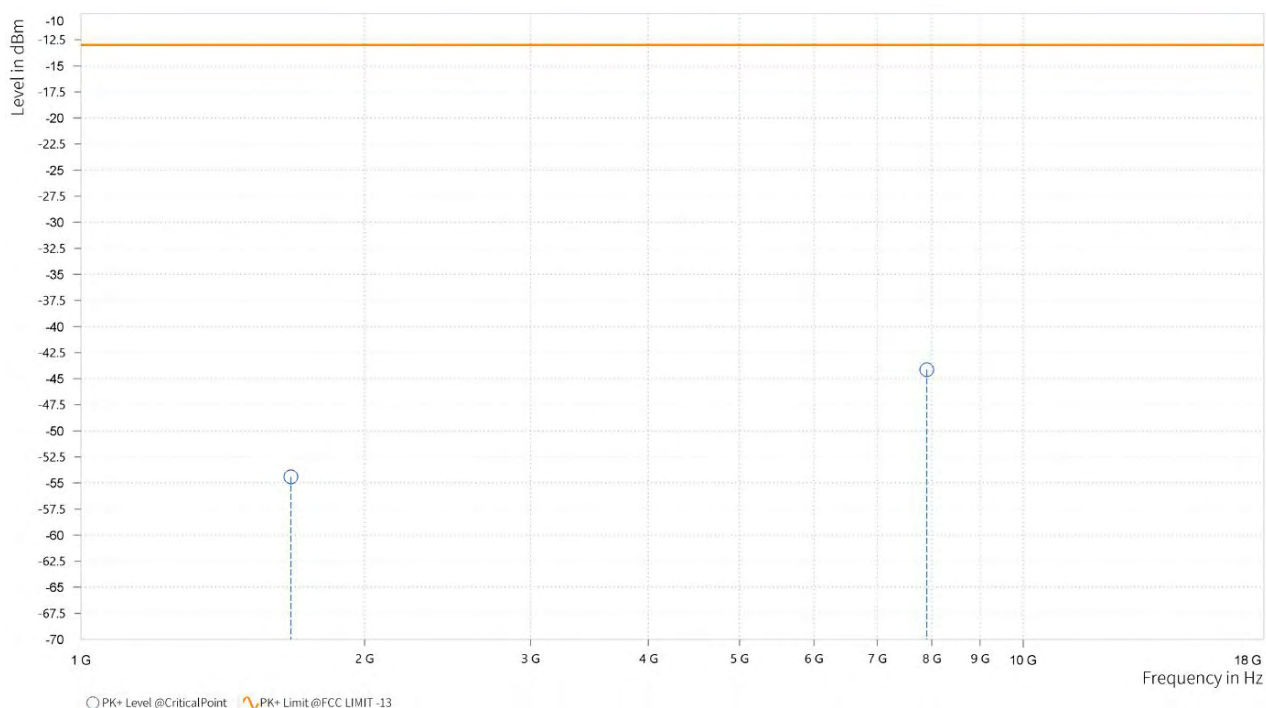




Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 20525	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,670.000	-54.94	-13.00	41.94	15.04	V	359.1	1
5	7,879.500	-42.37	-13.00	29.37	33.04	V	359.1	1

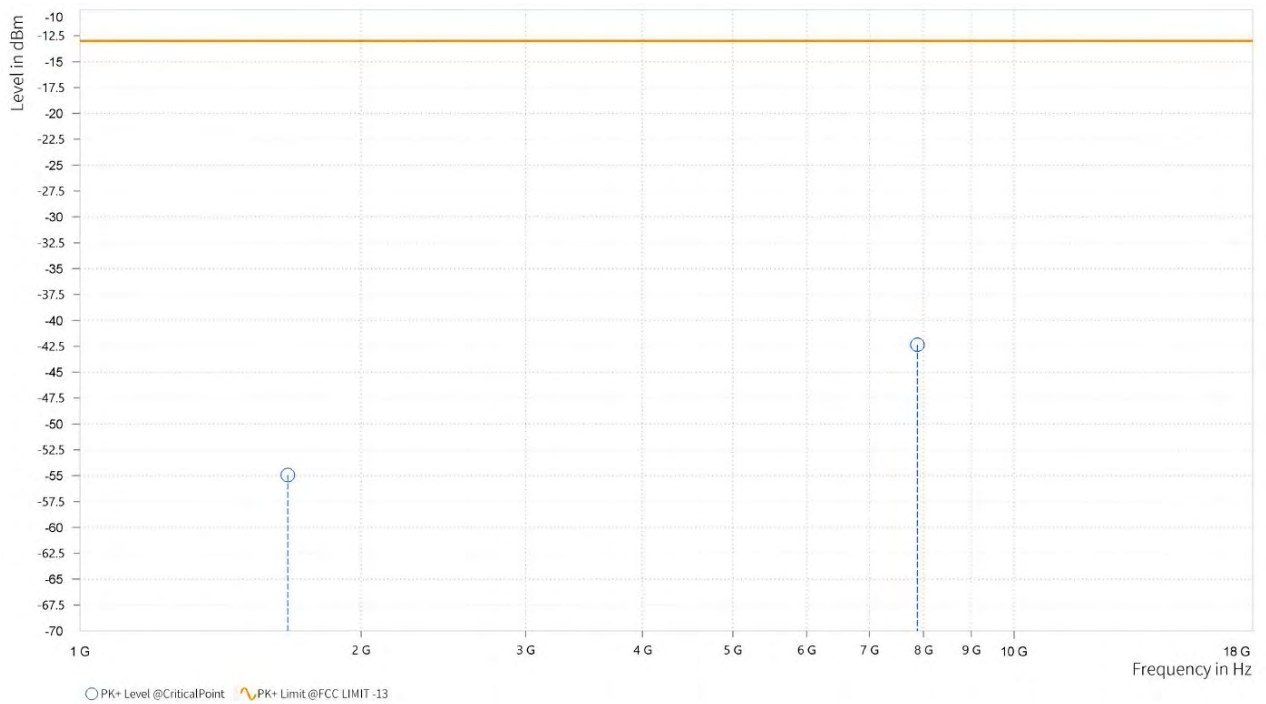




Test Report No.: PSU-QSU2308280314RF01

CH 20635:

<b>MODE</b>	TX channel 20635	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,690.500	-50.52	-13.00	37.52	15.27	H	294.6	2
5	7,895.000	-43.81	-13.00	30.81	33.01	H	1	1

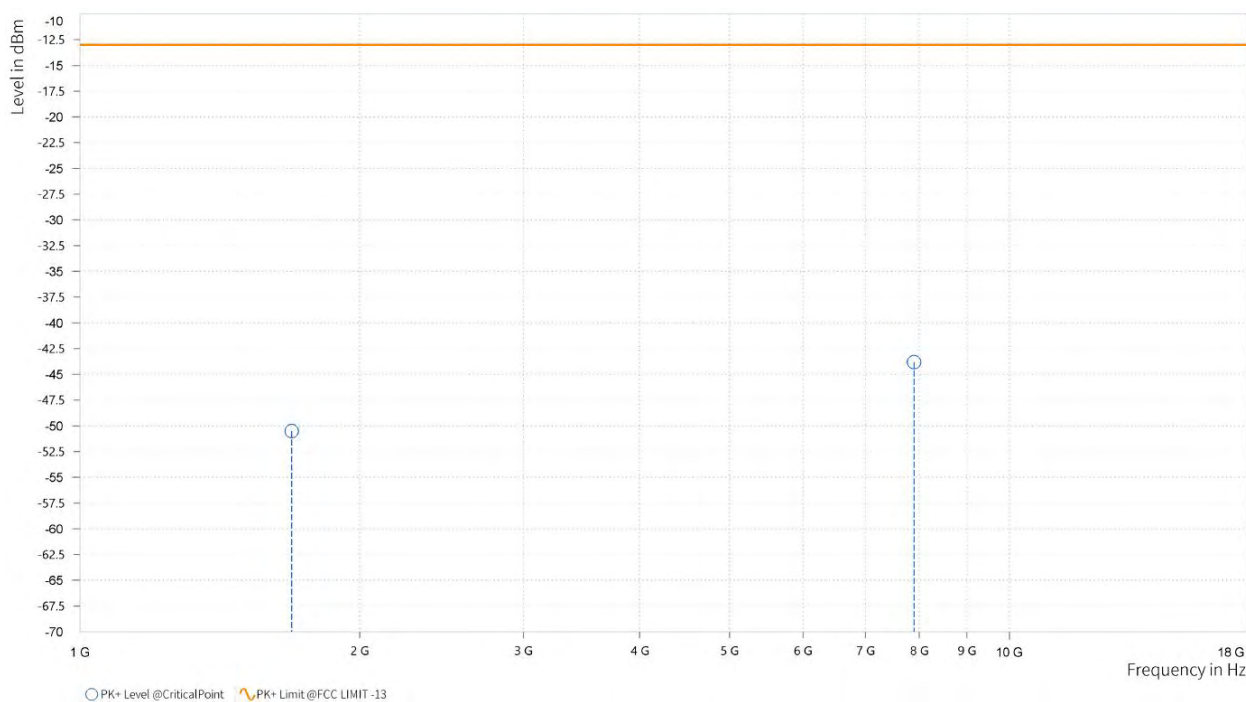






Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 20635	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,690.500	-54.81	-13.00	41.81	15.83	V	1	1
5	7,838.500	-43.62	-13.00	30.62	33.06	V	86.6	2

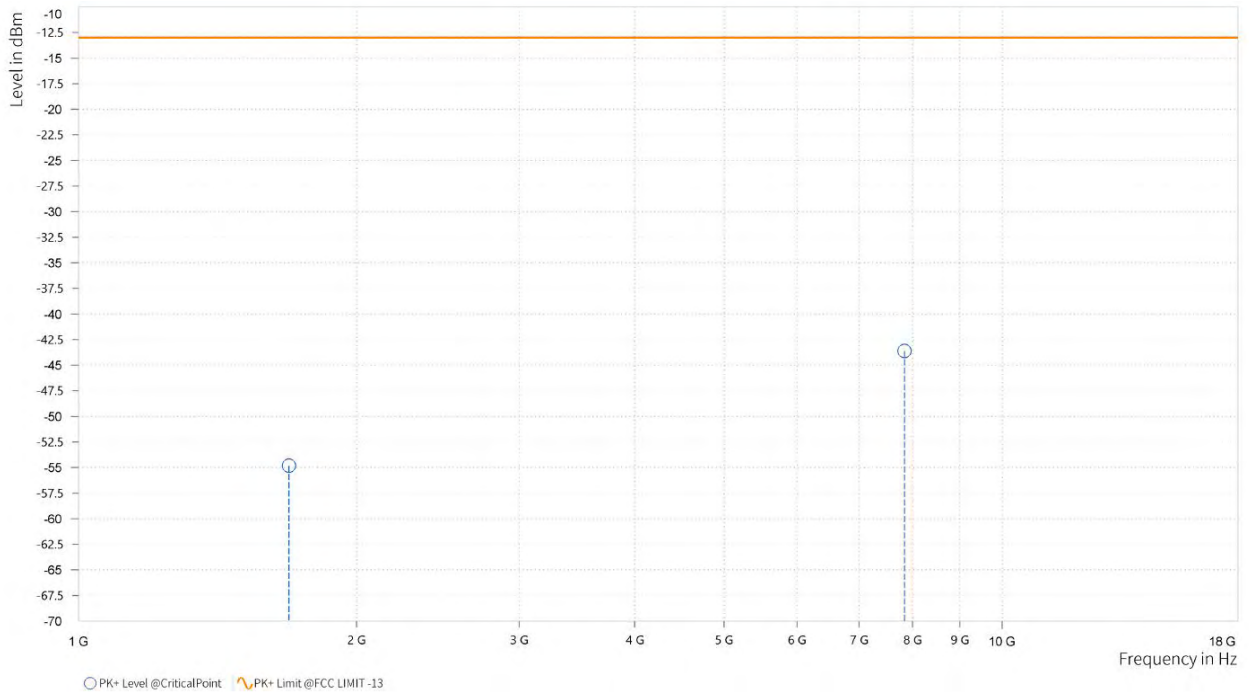




CHANNEL BANDWIDTH: 5MHz / QPSK

CH 20525

<b>MODE</b>	TX channel 20525	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,669.000	-50.26	-13.00	37.26	14.99	H	359	1
5	7,857.500	-43.91	-13.00	30.91	32.98	H	86.6	2

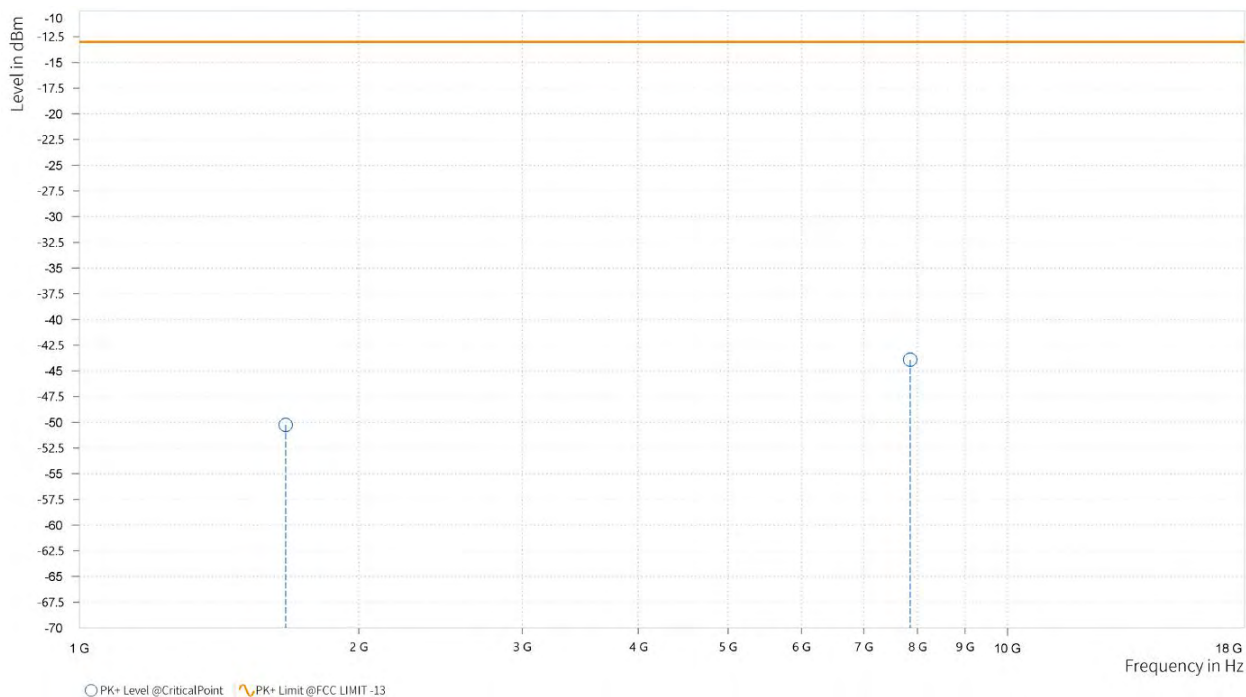




Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 20525	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,668.500	-56.79	-13.00	43.79	15.00	V	359	2
5	7,930.500	-43.73	-13.00	30.73	33.16	V	359	1

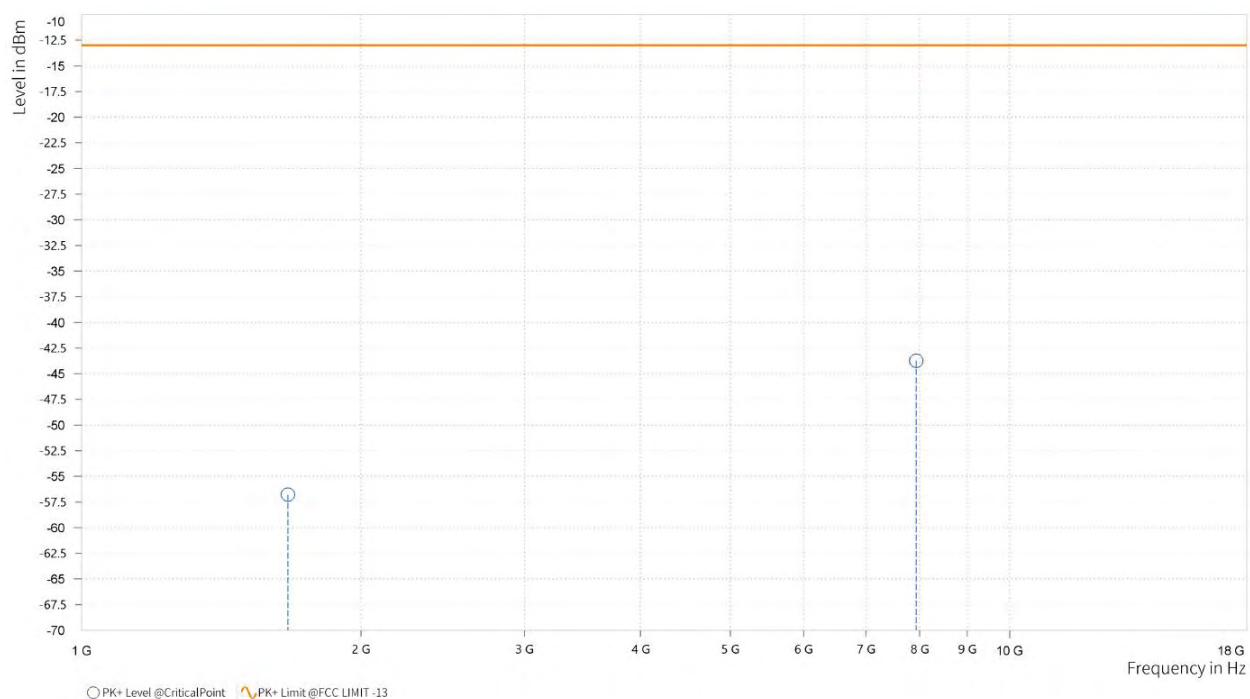




**CHANNEL BANDWIDTH: 10MHz / QPSK**

**CH 20525**

<b>MODE</b>	TX channel 20525	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.500	-56.04	-13.00	43.04	14.89	H	0.9	2
5	7,291.000	-44.36	-13.00	31.36	31.53	H	92.6	2

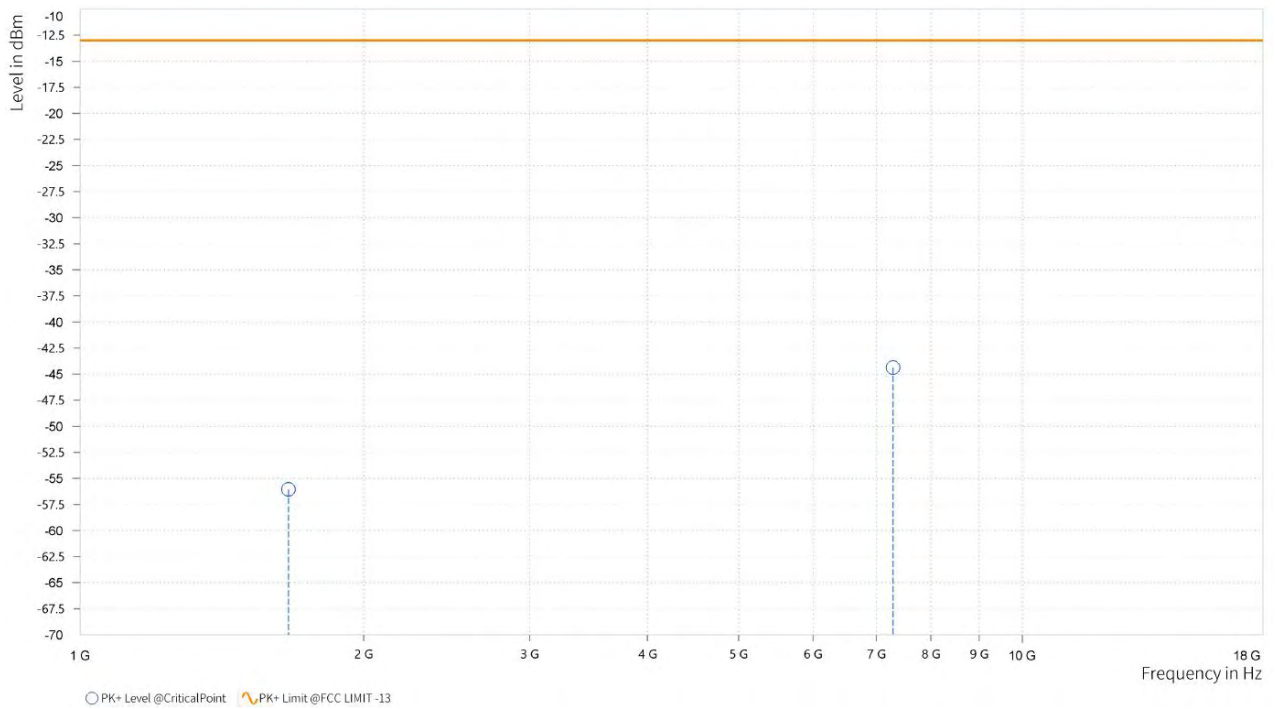






Test Report No.: PSU-QSU2308280314RF01

<b>MODE</b>	TX channel 20525	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.000	-58.10	-13.00	45.10	14.89	V	359	2
5	7,859.000	-43.43	-13.00	30.43	33.05	V	268.5	1

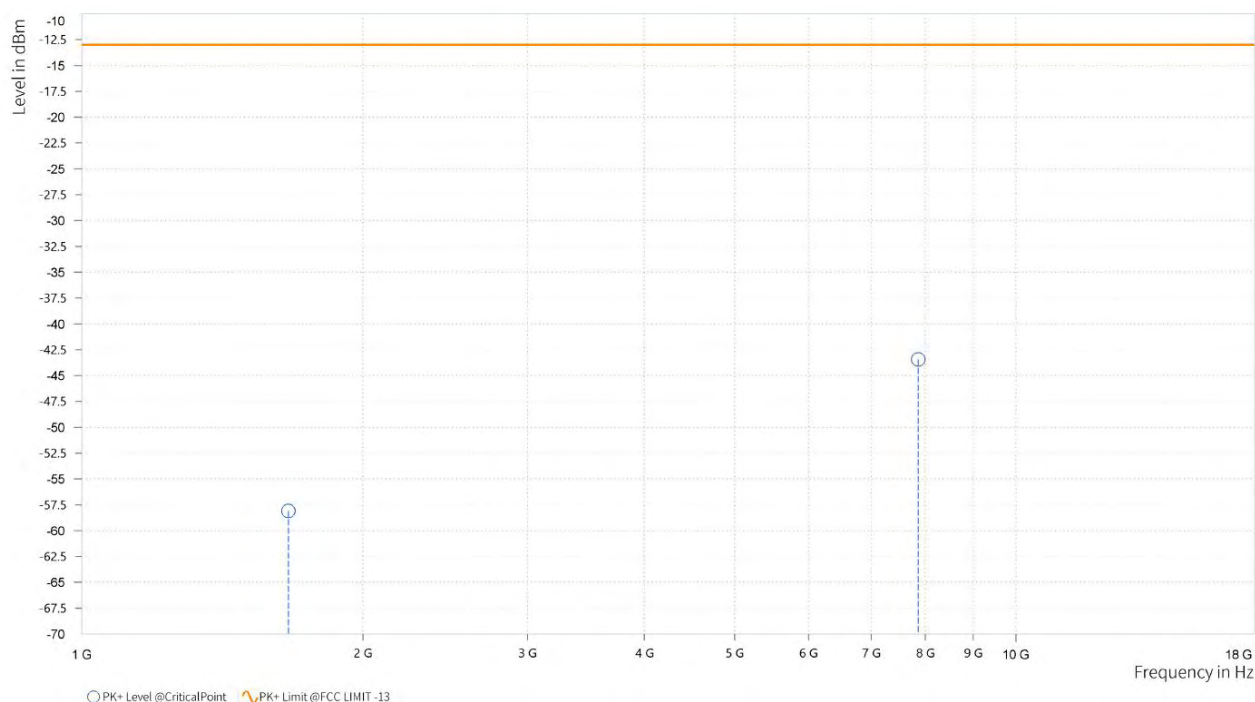


### 3.7 PEAK TO AVERAGE RATIO

#### 3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

#### 3.7.2 TEST SETUP

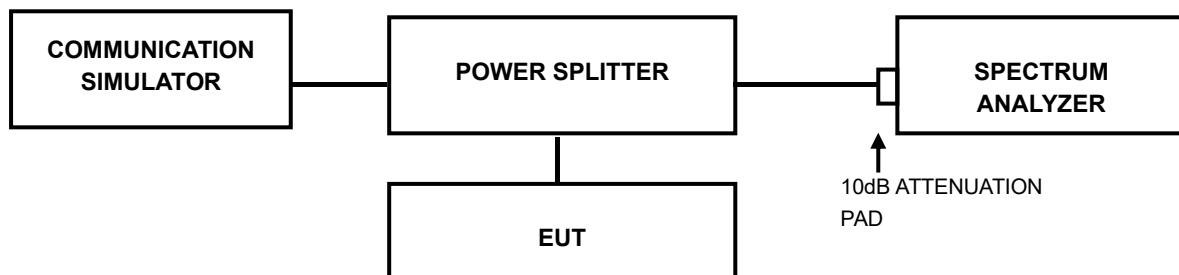

#### 3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

#### 3.7.4 TEST RESULTS

Please Refer to Appendix Of this test report.



Test Report No.: PSU-QSU2308280314RF01

## 4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: PSU-QSU2308280314RF01

## 5 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. ,were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Suzhou EMC/RF Lab:**

Tel: +86 (0557) 368 1008





Test Report No.: PSU-QSU2308280314RF01

## **6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.



## 7 APPENDIX:


### GSM850

#### PEAK-TO-AVERAGE RATIO(CCDF)

##### Test Result

Band	Channel	Result(dB)	Limit(dB)	Verdict
GSM850	128	8.28	13	PASS
GSM850	189	8.28	13	PASS
GSM850	251	8.20	13	PASS
EGPRS850	128	11.24	13	PASS
EGPRS850	189	11.28	13	PASS
EGPRS850	251	11.38	13	PASS


### Test Graphs

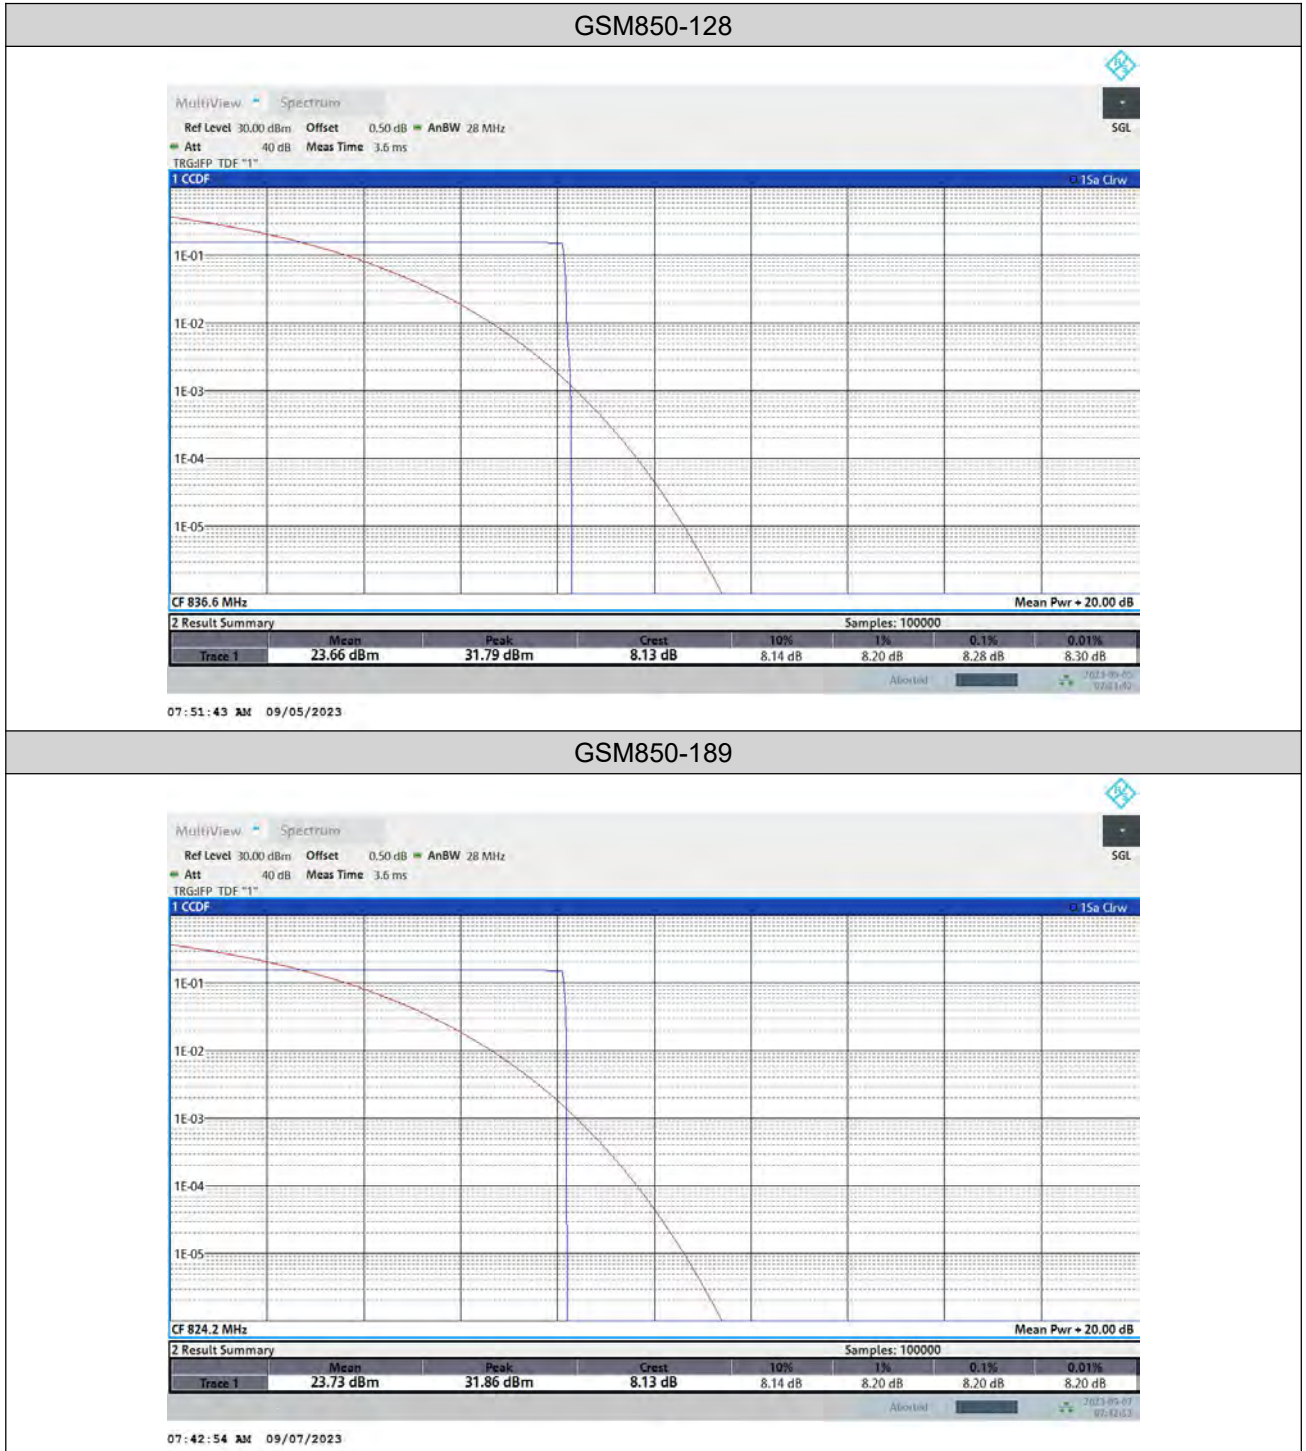




Test Report No.: PSU-QSU2308280314RF01

GSM850-251

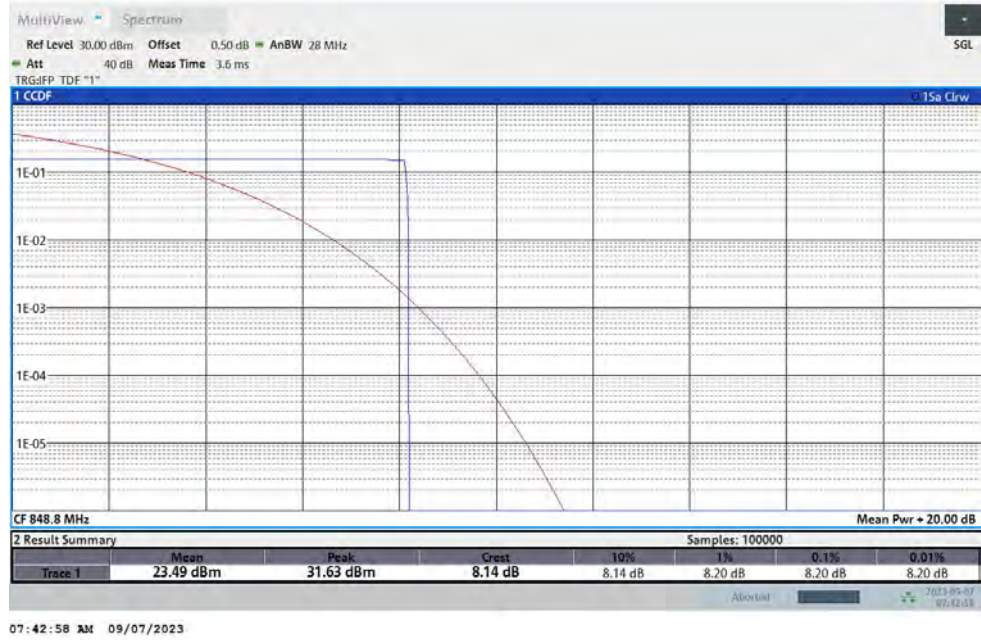

EGPRS850-128

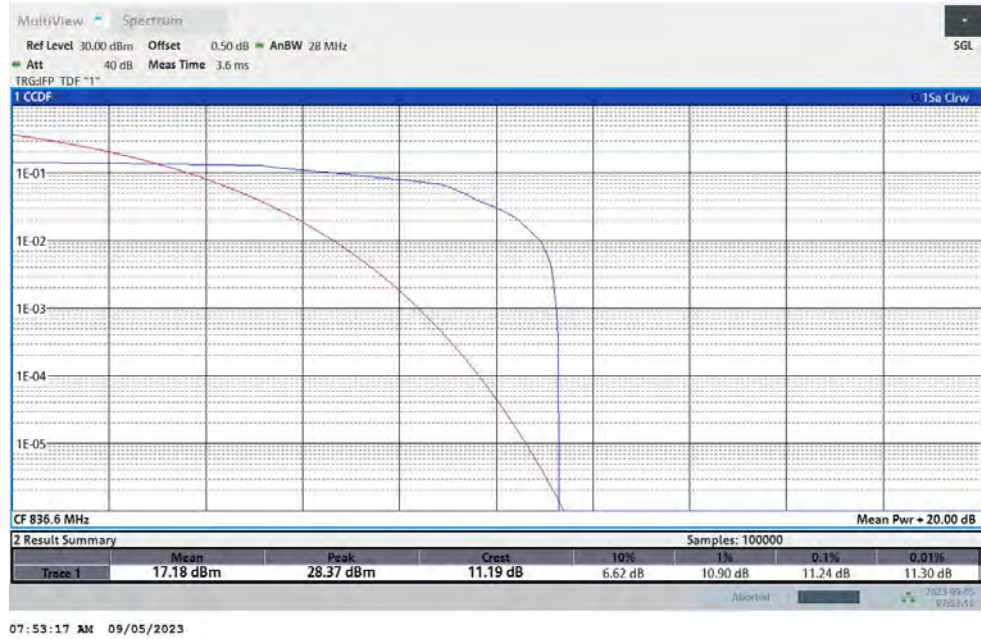







Test Report No.: PSU-QSU2308280314RF01

EGPRS850-189

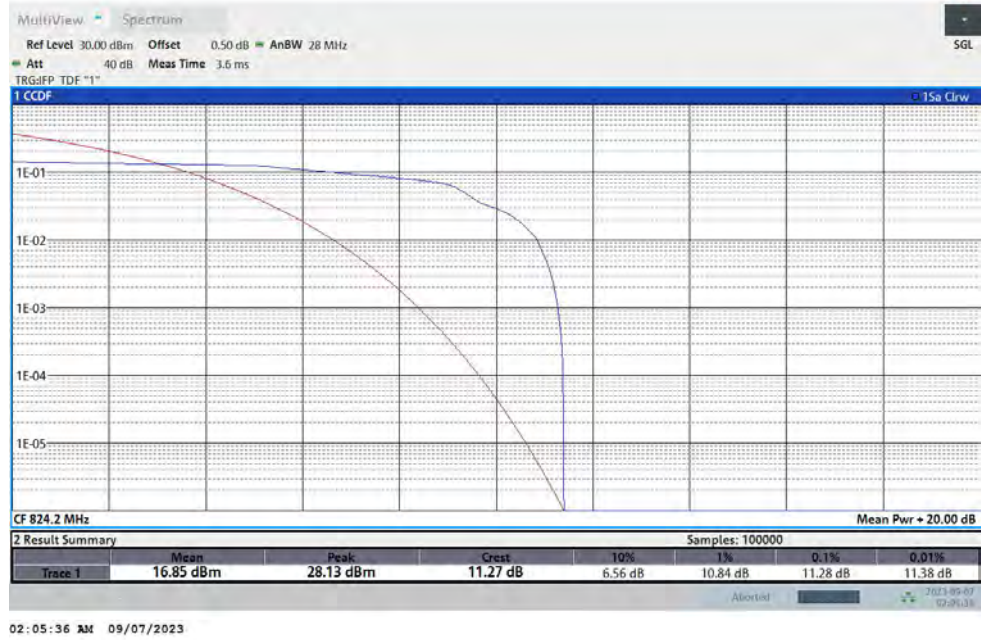

EGPRS850-251

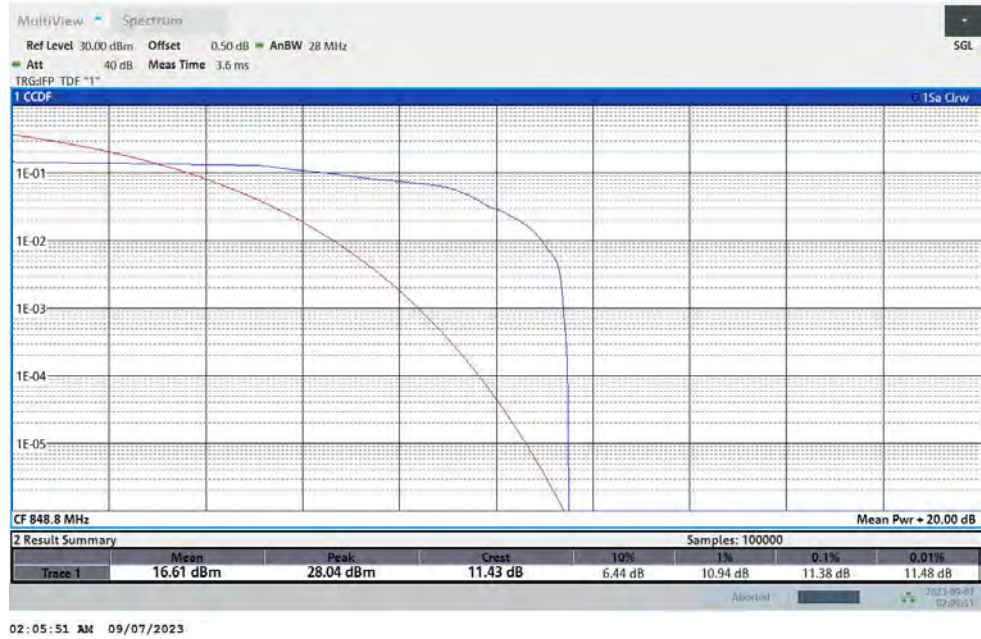



Test Report No.: PSU-QSU2308280314RF01

## 26DB BANDWIDTH AND OCCUPIED BANDWIDTH

### Test Result

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM850	128	244.484	315.680	---	PASS
GSM850	189	246.885	317.180	---	PASS
GSM850	251	245.273	315.180	---	PASS
EGPRS850	128	240.910	315.680	---	PASS
EGPRS850	189	241.016	312.690	---	PASS
EGPRS850	251	240.895	313.690	---	PASS



## Test Graphs

### 26dB Bandwidth









Test Report No.: PSU-QSU2308280314RF01

GSM850-251

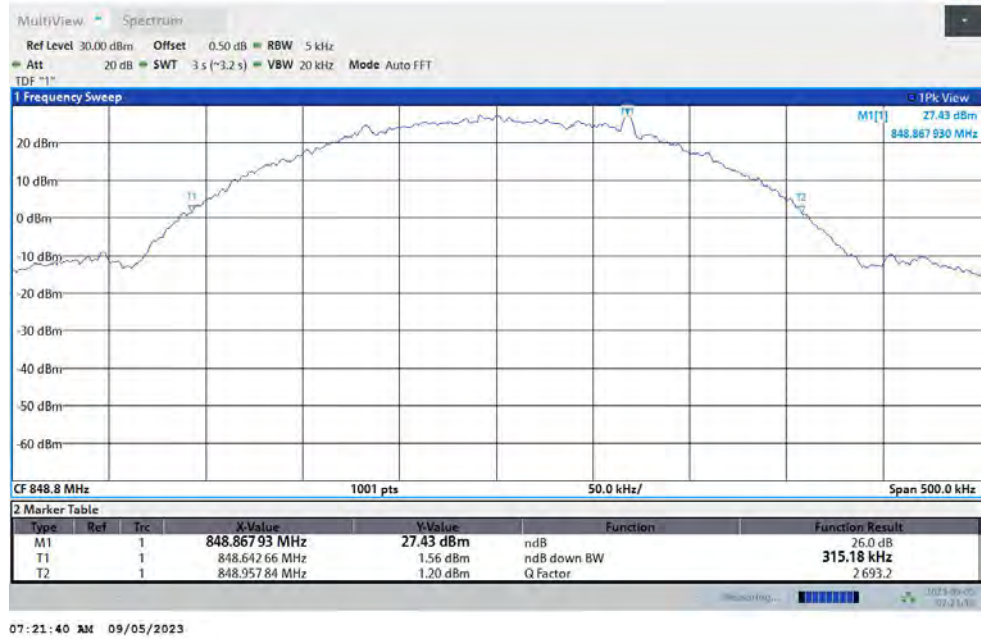

EGPRS850-128

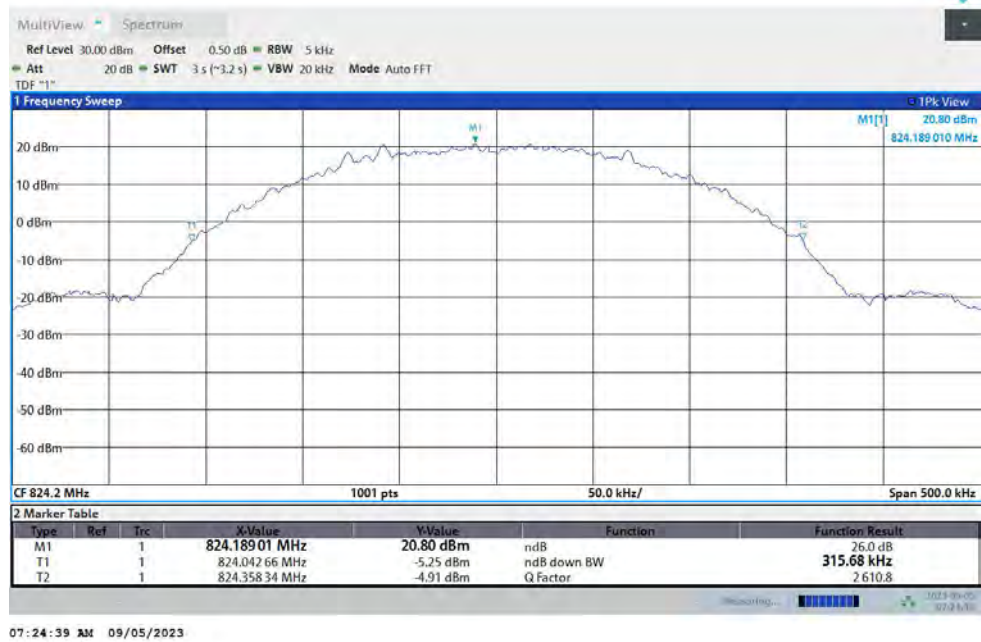



Test Report No.: PSU-QSU2308280314RF01

EGPRS850-189



EGPRS850-251






Occupied Bandwidth

GSM850-128



GSM850-189

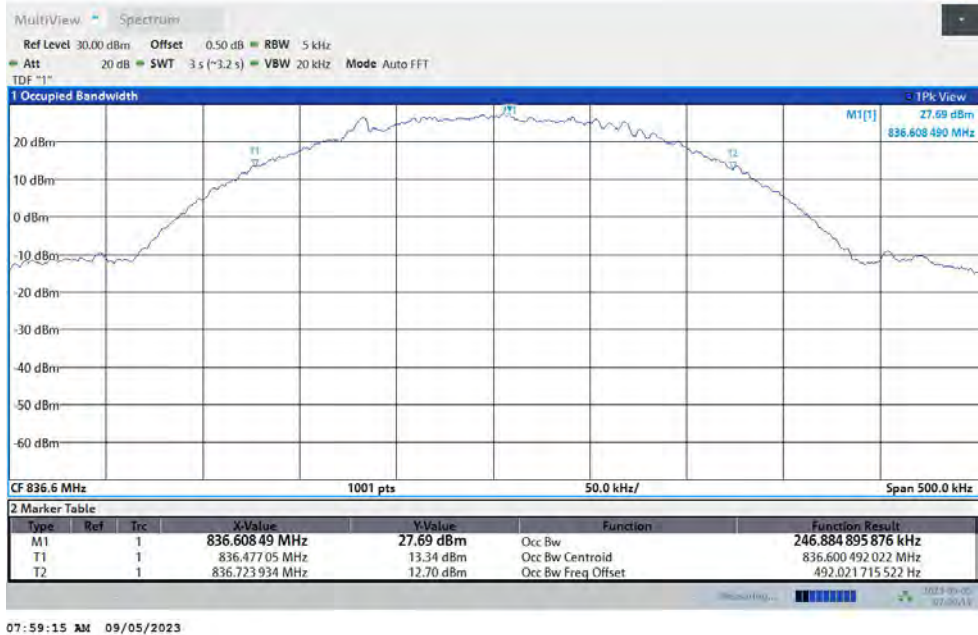

GSM850-251




**BUREAU  
VERITAS**

**Test Report No.: PSU-QSU2308280314RF01**



07:59:39 AM 09/05/2023

**EGPRS850-128**

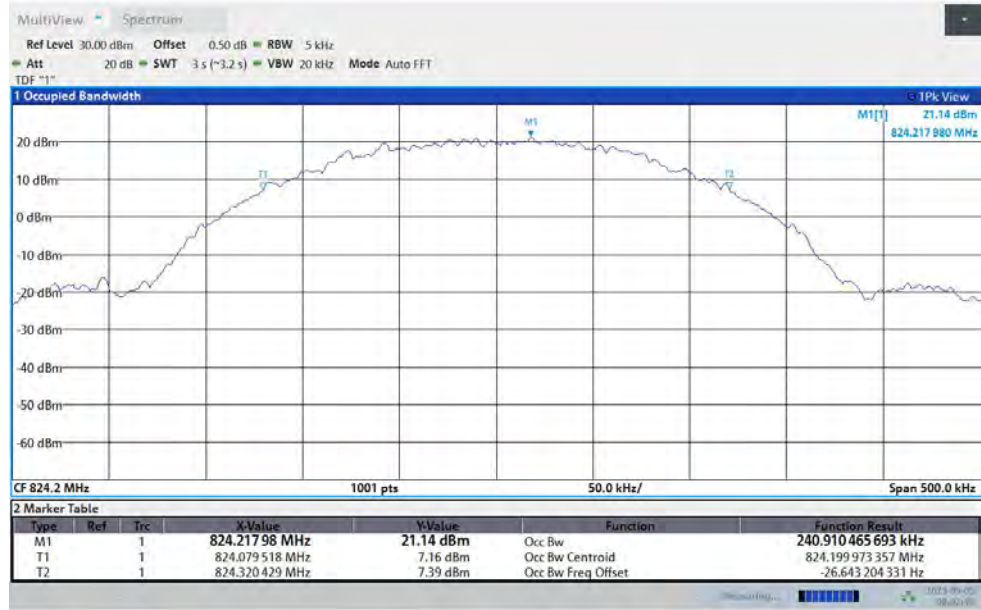

08:02:50 AM 09/05/2023


**EGPRS850-189**






**BUREAU  
VERITAS**

**Test Report No.: PSU-QSU2308280314RF01**

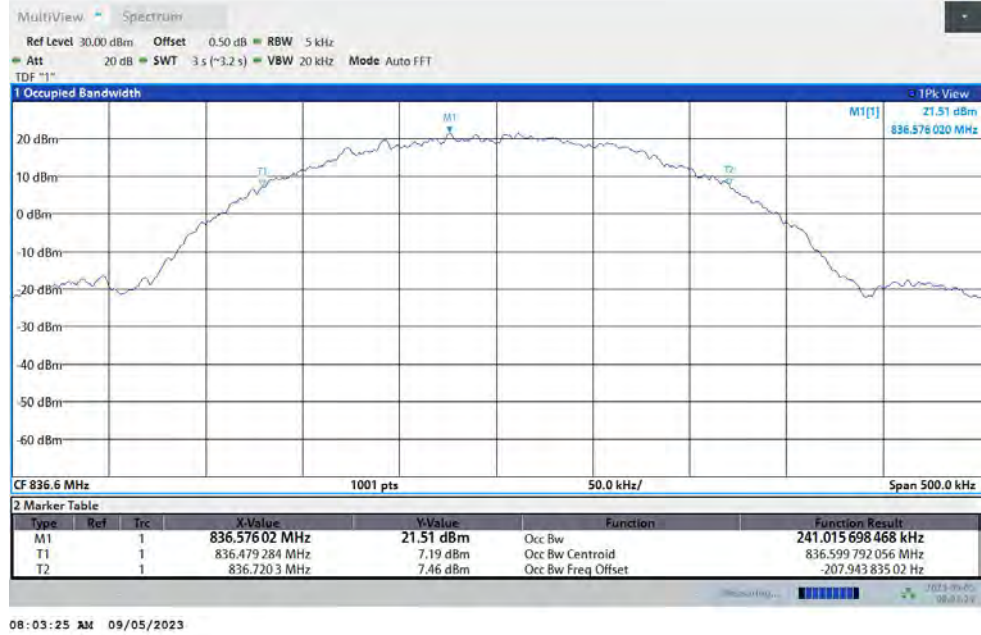

**EGPRS850-251**

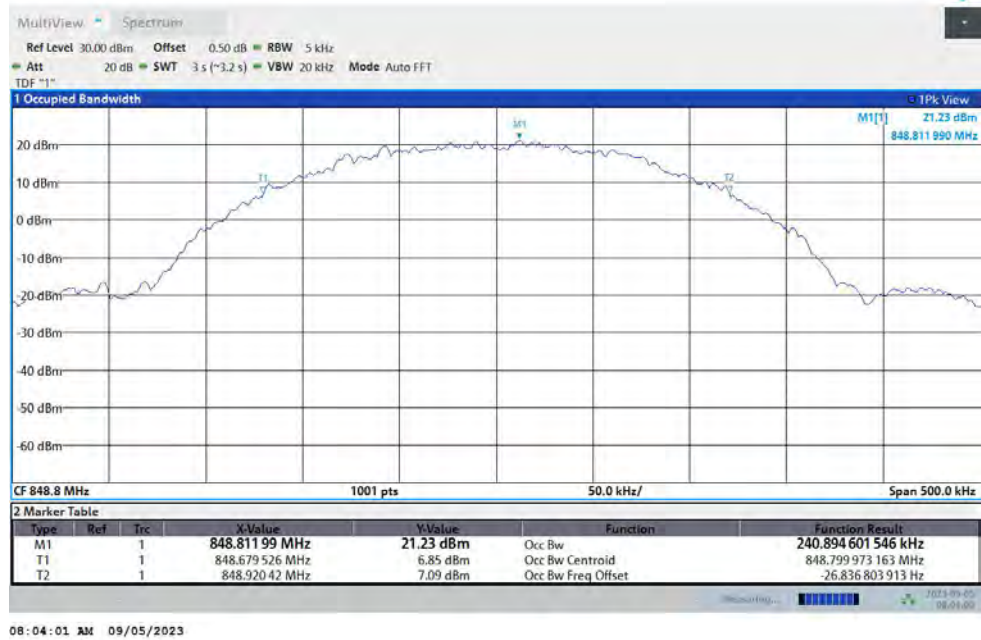



Test Report No.: PSU-QSU2308280314RF01


## BAND EDGE

### Test Result

Band	Channel	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM850	128	See Graph	See Graph	-13	PASS
GSM850	251	See Graph	See Graph	-13	PASS
EGPRS850	128	See Graph	See Graph	-13	PASS
EGPRS850	251	See Graph	See Graph	-13	PASS



### Test Graphs

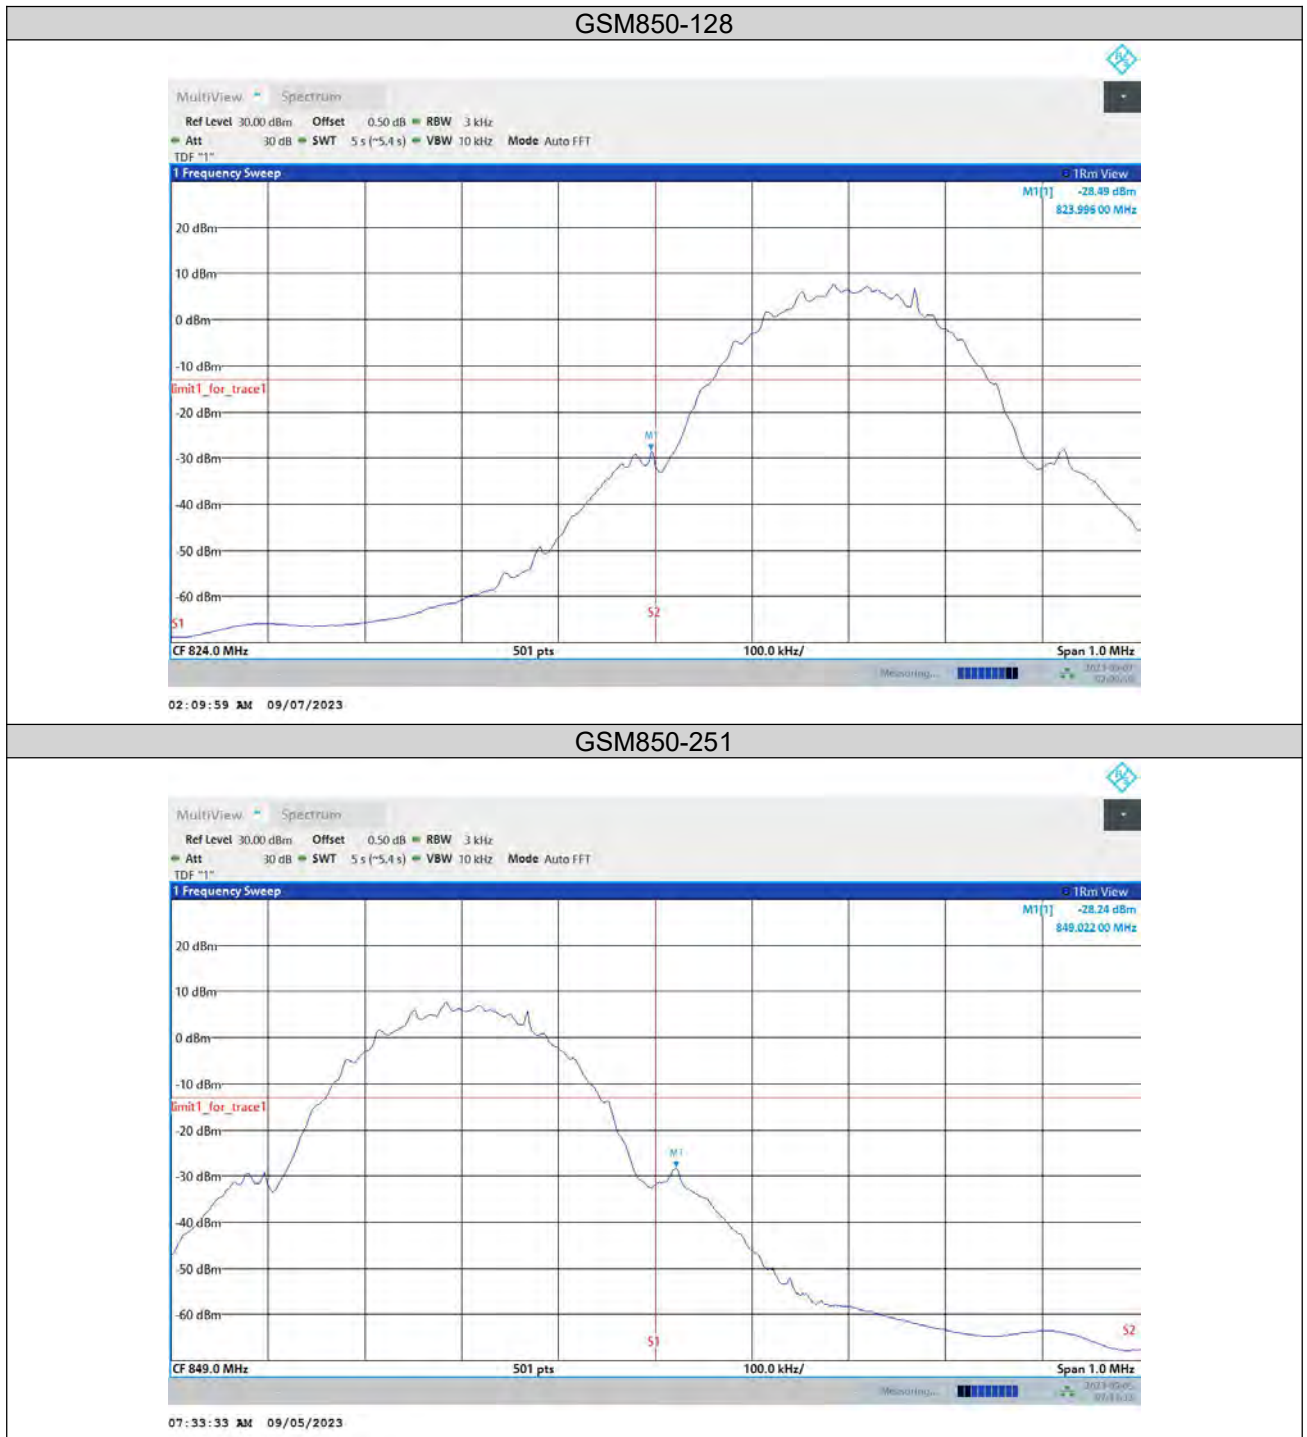







Test Report No.: PSU-QSU2308280314RF01

### EGPRS850-128

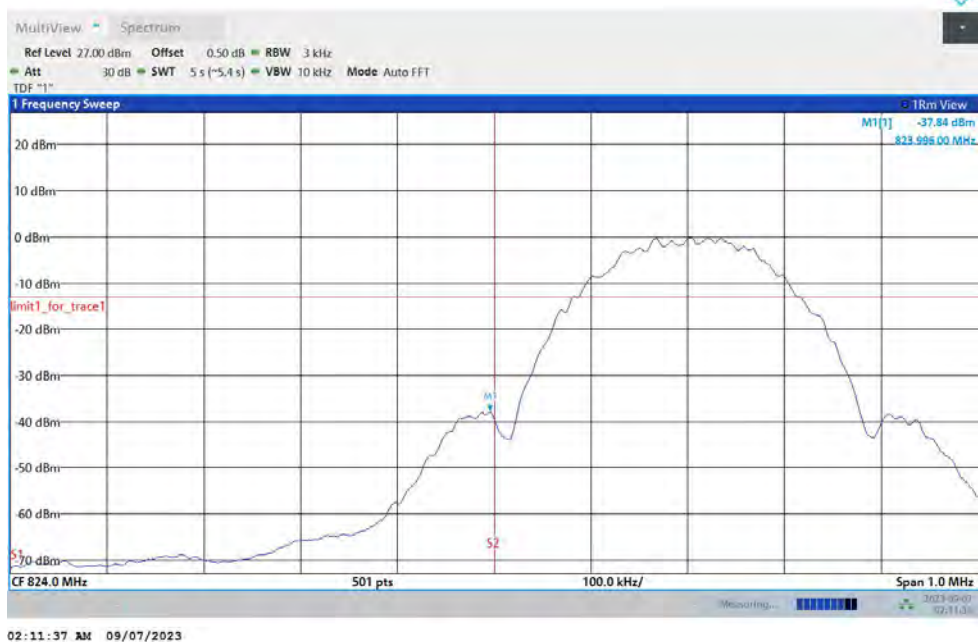

### EGPRS850-251

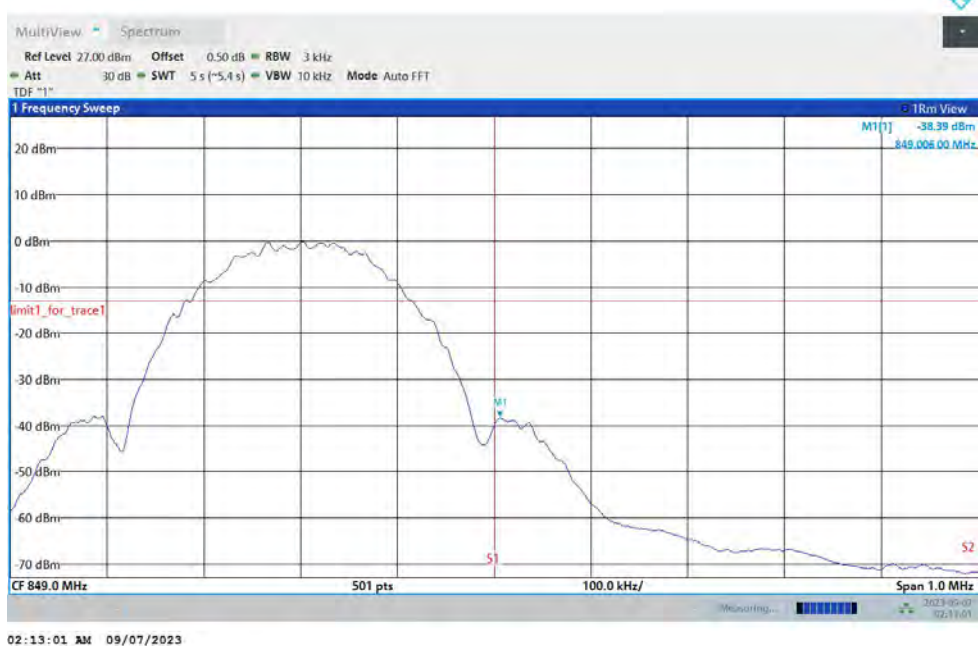



Test Report No.: PSU-QSU2308280314RF01



## CONDUCTED SPURIOUS EMISSION

### Test Result

Band	Channel	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	30~8490MHZ	See Graph	See Graph	-13	PASS
GSM850	189	30~8490MHZ	See Graph	See Graph	-13	PASS
GSM850	251	30~8490MHZ	See Graph	See Graph	-13	PASS
EGPRS850	128	30~8490MHZ	See Graph	See Graph	-13	PASS
EGPRS850	189	30~8490MHZ	See Graph	See Graph	-13	PASS
EGPRS850	251	30~8490MHZ	See Graph	See Graph	-13	PASS




### Test Graphs

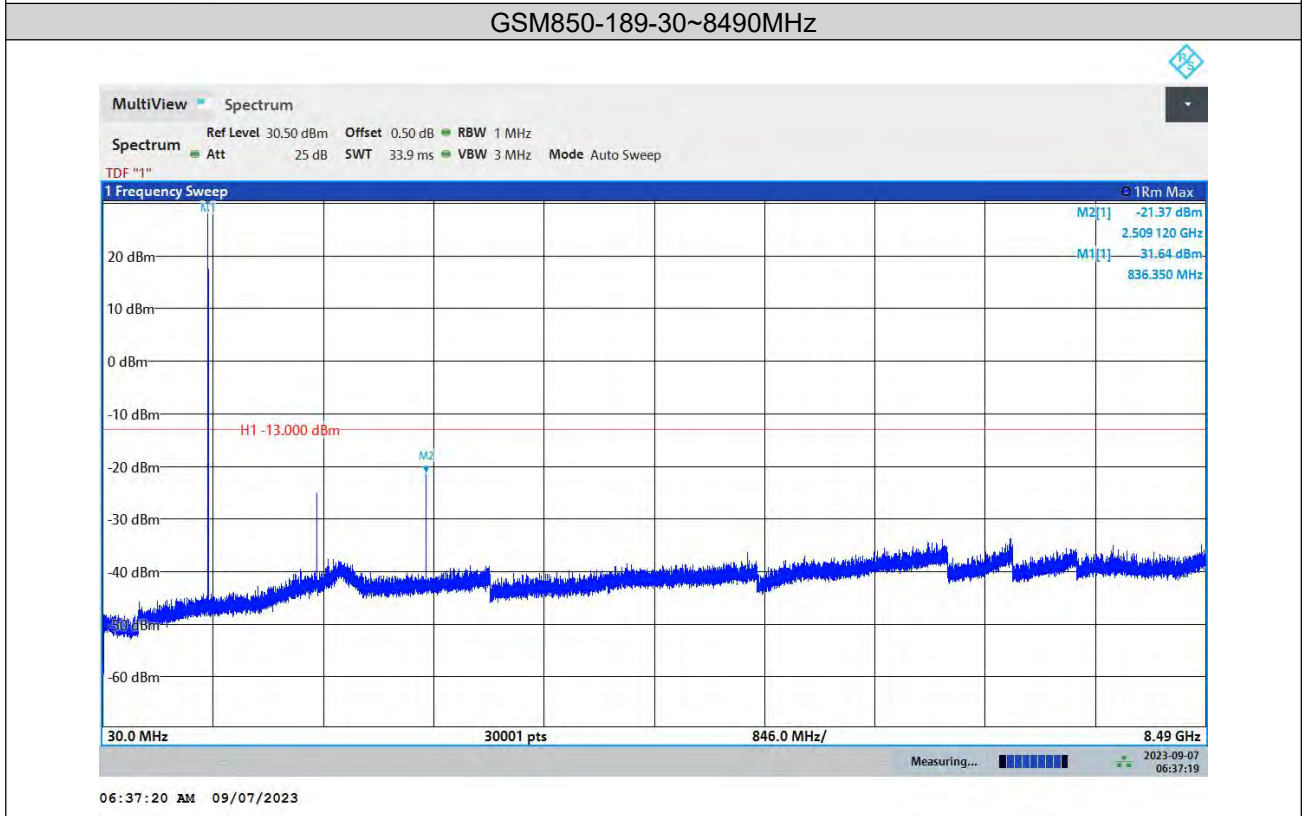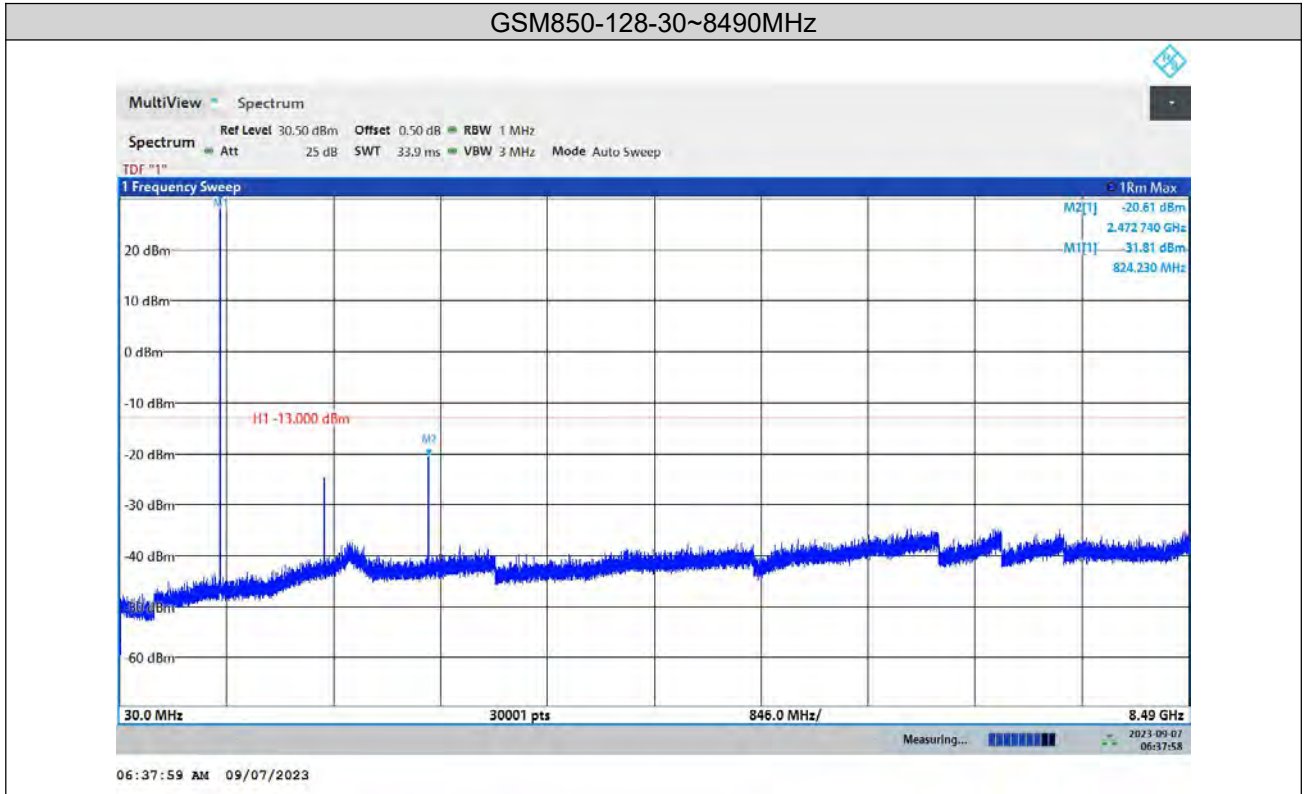




### GSM850-251-30~8490MHz

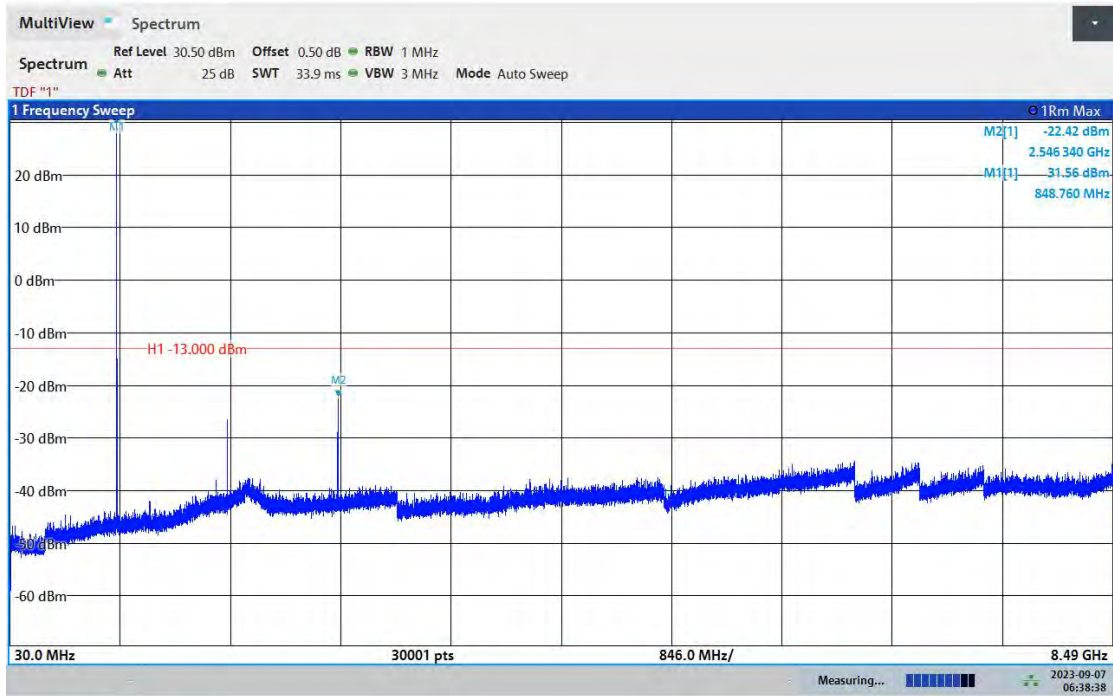

### EGPRS850-128-30~8490MHz

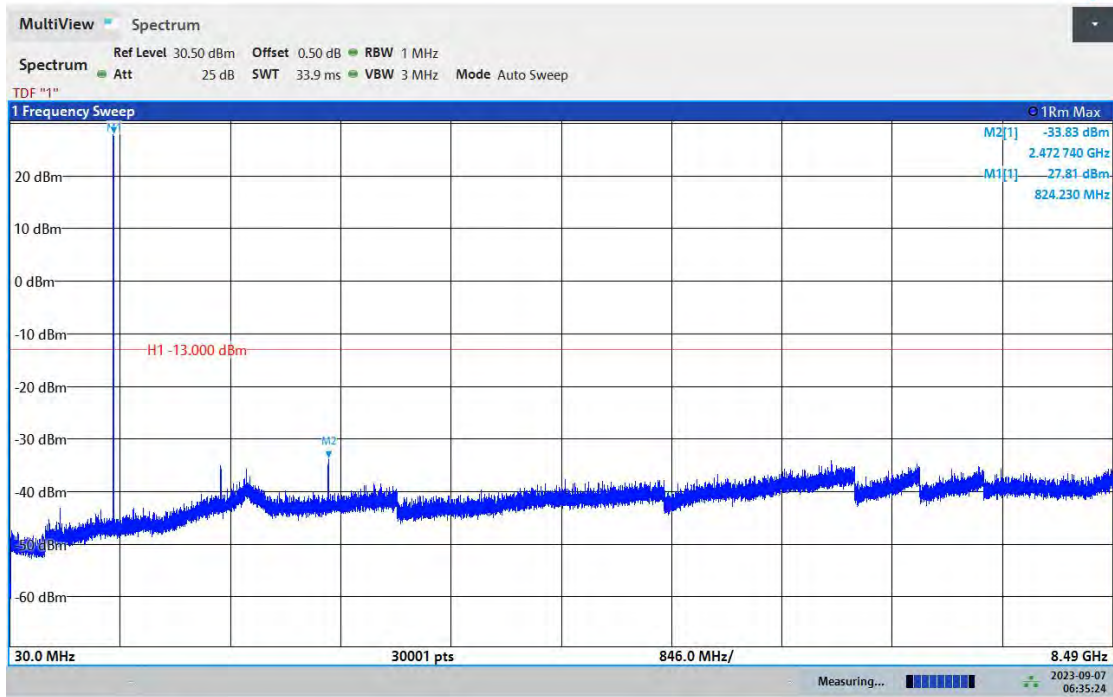







Test Report No.: PSU-QSU2308280314RF01

EGPRS850-189-30~8490MHz

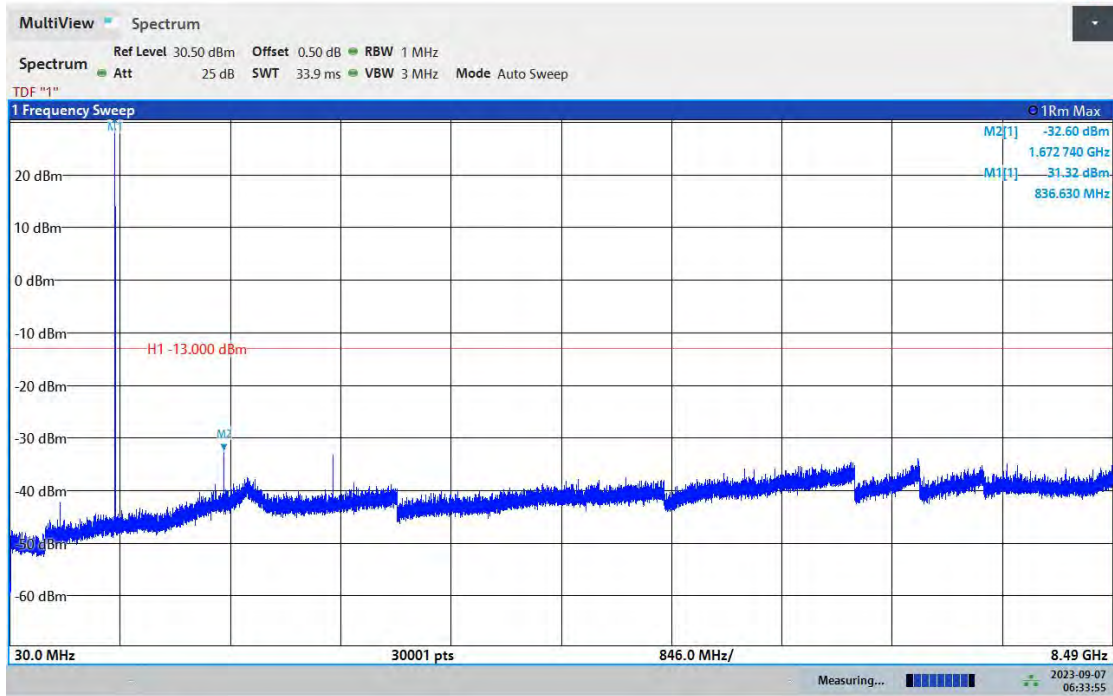

06:33:56 AM 09/07/2023

EGPRS850-251-30~8490MHz

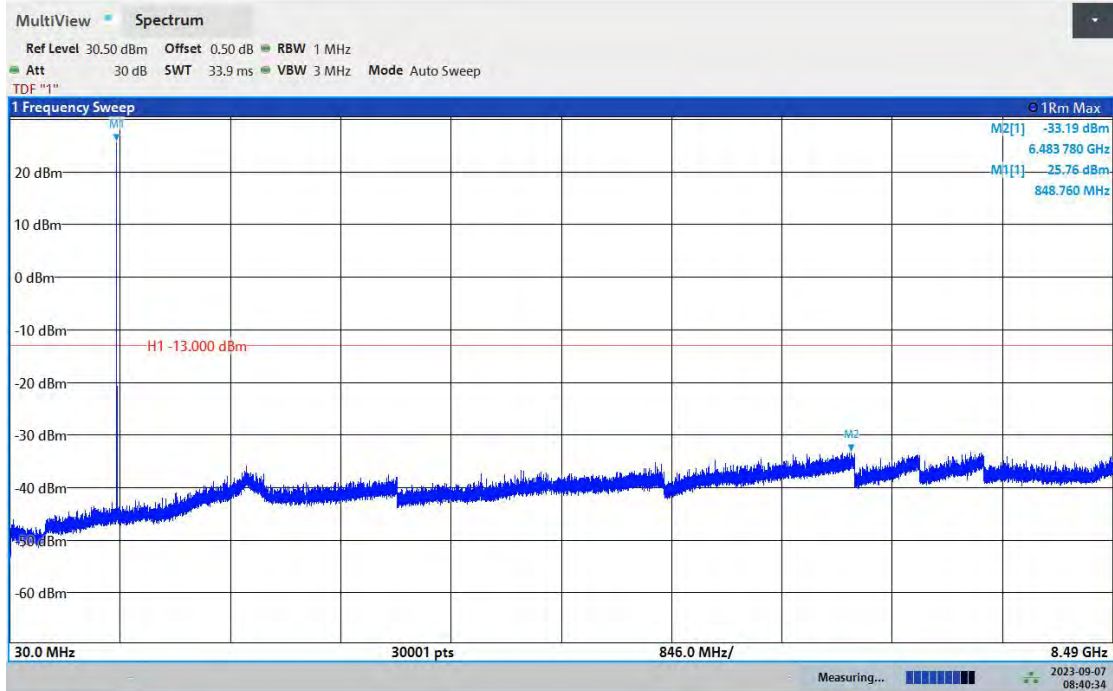

08:40:34 AM 09/07/2023



## FREQUENCY STABILITY

### Test Result

Voltage							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM850	128	VL	NT	2.6	0.003155	±2.5	PASS
GSM850	128	VN	NT	-6.66	-0.008081	±2.5	PASS
GSM850	128	VH	NT	-7.31	-0.008869	±2.5	PASS
GSM850	189	VL	NT	4.14	0.004950	±2.5	PASS
GSM850	189	VN	NT	3.73	0.004460	±2.5	PASS
GSM850	189	VH	NT	-4.97	-0.005942	±2.5	PASS
GSM850	251	VL	NT	5.76	0.006786	±2.5	PASS
GSM850	251	VN	NT	6.94	0.008176	±2.5	PASS
GSM850	251	VH	NT	0.98	0.001155	±2.5	PASS
EGPRS850	128	VL	NT	2.98	0.003616	±2.5	PASS
EGPRS850	128	VN	NT	-0.28	-0.000340	±2.5	PASS
EGPRS850	128	VH	NT	6.38	0.007741	±2.5	PASS
EGPRS850	189	VL	NT	-3.49	-0.004173	±2.5	PASS
EGPRS850	189	VN	NT	-6.63	-0.007927	±2.5	PASS
EGPRS850	189	VH	NT	7	0.008369	±2.5	PASS
EGPRS850	251	VL	NT	0.01	0.000012	±2.5	PASS
EGPRS850	251	VN	NT	-8.87	-0.010450	±2.5	PASS
EGPRS850	251	VH	NT	4.92	0.005796	±2.5	PASS

Temperature							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM850	128	NV	-30	7.6	0.009221	±2.5	PASS
GSM850	128	NV	-20	-2.97	-0.003603	±2.5	PASS
GSM850	128	NV	-10	-4.59	-0.005569	±2.5	PASS
GSM850	128	NV	0	6.56	0.007959	±2.5	PASS
GSM850	128	NV	10	7.99	0.009694	±2.5	PASS
GSM850	128	NV	20	0.96	0.001165	±2.5	PASS
GSM850	128	NV	30	-5.51	-0.006685	±2.5	PASS
GSM850	128	NV	40	-3.22	-0.003907	±2.5	PASS
GSM850	128	NV	50	9.99	0.012121	±2.5	PASS
GSM850	189	NV	-30	-3	-0.003587	±2.5	PASS
GSM850	189	NV	-20	-5.12	-0.006121	±2.5	PASS
GSM850	189	NV	-10	5.53	0.006612	±2.5	PASS
GSM850	189	NV	0	6.99	0.008357	±2.5	PASS
GSM850	189	NV	10	-3.85	-0.004603	±2.5	PASS
GSM850	189	NV	20	7.97	0.009529	±2.5	PASS
GSM850	189	NV	30	-6.86	-0.008202	±2.5	PASS
GSM850	189	NV	40	9.62	0.011502	±2.5	PASS
GSM850	189	NV	50	4.31	0.005153	±2.5	PASS
GSM850	251	NV	-30	-3.73	-0.004394	±2.5	PASS
GSM850	251	NV	-20	-9.97	-0.011746	±2.5	PASS



BUREAU  
VERITAS

Test Report No.: PSU-QSU2308280314RF01

GSM850	251	NV	-10	7.16	0.008435	±2.5	PASS
GSM850	251	NV	0	9.99	0.011770	±2.5	PASS
GSM850	251	NV	10	-3.36	-0.003959	±2.5	PASS
GSM850	251	NV	20	-9.63	-0.011345	±2.5	PASS
GSM850	251	NV	30	5.59	0.006586	±2.5	PASS
GSM850	251	NV	40	3.34	0.003935	±2.5	PASS
GSM850	251	NV	50	5.51	0.006492	±2.5	PASS
EGPRS850	128	NV	-30	0.39	0.000211	±2.5	PASS
EGPRS850	128	NV	-20	8.2	0.004432	±2.5	PASS
EGPRS850	128	NV	-10	-1.84	-0.000994	±2.5	PASS
EGPRS850	128	NV	0	6.12	0.003308	±2.5	PASS
EGPRS850	128	NV	10	2.09	0.001130	±2.5	PASS
EGPRS850	128	NV	20	3.4	0.001838	±2.5	PASS
EGPRS850	128	NV	30	7.06	0.003816	±2.5	PASS
EGPRS850	189	NV	40	-0.4	-0.000216	±2.5	PASS
EGPRS850	189	NV	50	-0.55	-0.000297	±2.5	PASS
EGPRS850	189	NV	-30	1.98	0.001053	±2.5	PASS
EGPRS850	189	NV	-20	-9.17	-0.004878	±2.5	PASS
EGPRS850	189	NV	-10	9.52	0.005064	±2.5	PASS
EGPRS850	189	NV	0	-8.27	-0.004399	±2.5	PASS
EGPRS850	189	NV	10	-1.73	-0.000920	±2.5	PASS
EGPRS850	189	NV	20	3.44	0.001830	±2.5	PASS
EGPRS850	189	NV	30	-5.72	-0.003043	±2.5	PASS
EGPRS850	189	NV	40	2.86	0.001521	±2.5	PASS
EGPRS850	189	NV	50	-5.5	-0.002926	±2.5	PASS
EGPRS850	251	NV	-30	5.16	0.002702	±2.5	PASS
EGPRS850	251	NV	-20	-2.82	-0.001477	±2.5	PASS
EGPRS850	251	NV	-10	-8.95	-0.004686	±2.5	PASS
EGPRS850	251	NV	0	-2.95	-0.001545	±2.5	PASS
EGPRS850	251	NV	10	-6.54	-0.003424	±2.5	PASS
EGPRS850	251	NV	20	2.5	0.001309	±2.5	PASS
EGPRS850	251	NV	30	-7.97	-0.004173	±2.5	PASS
EGPRS850	251	NV	40	-3.55	-0.001859	±2.5	PASS
EGPRS850	251	NV	50	-4.7	-0.002461	±2.5	PASS

## WCDMA V

### PEAK-TO-AVERAGE RATIO



#### Test Result

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
Band5	4132	3.01	13	PASS
Band5	4182	2.99	13	PASS
Band5	4233	2.87	13	PASS






### Test Graphs

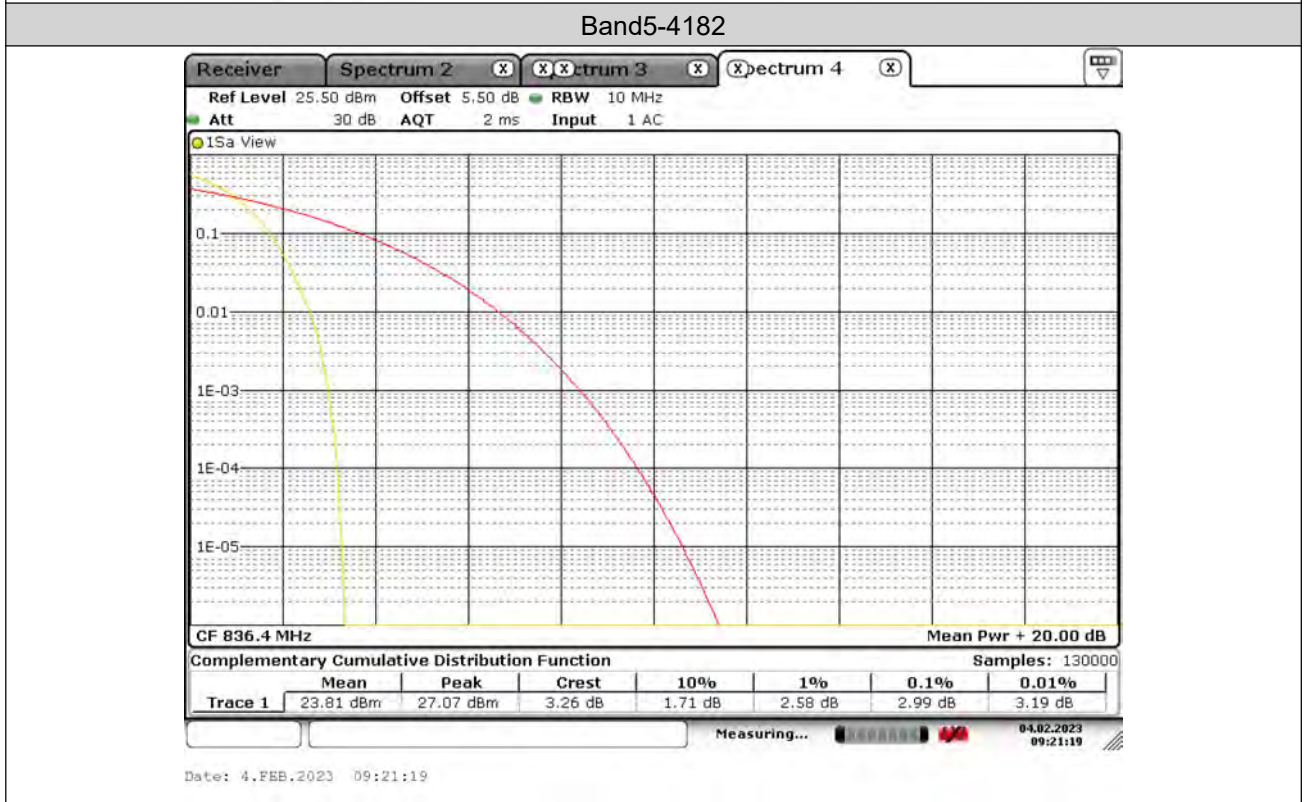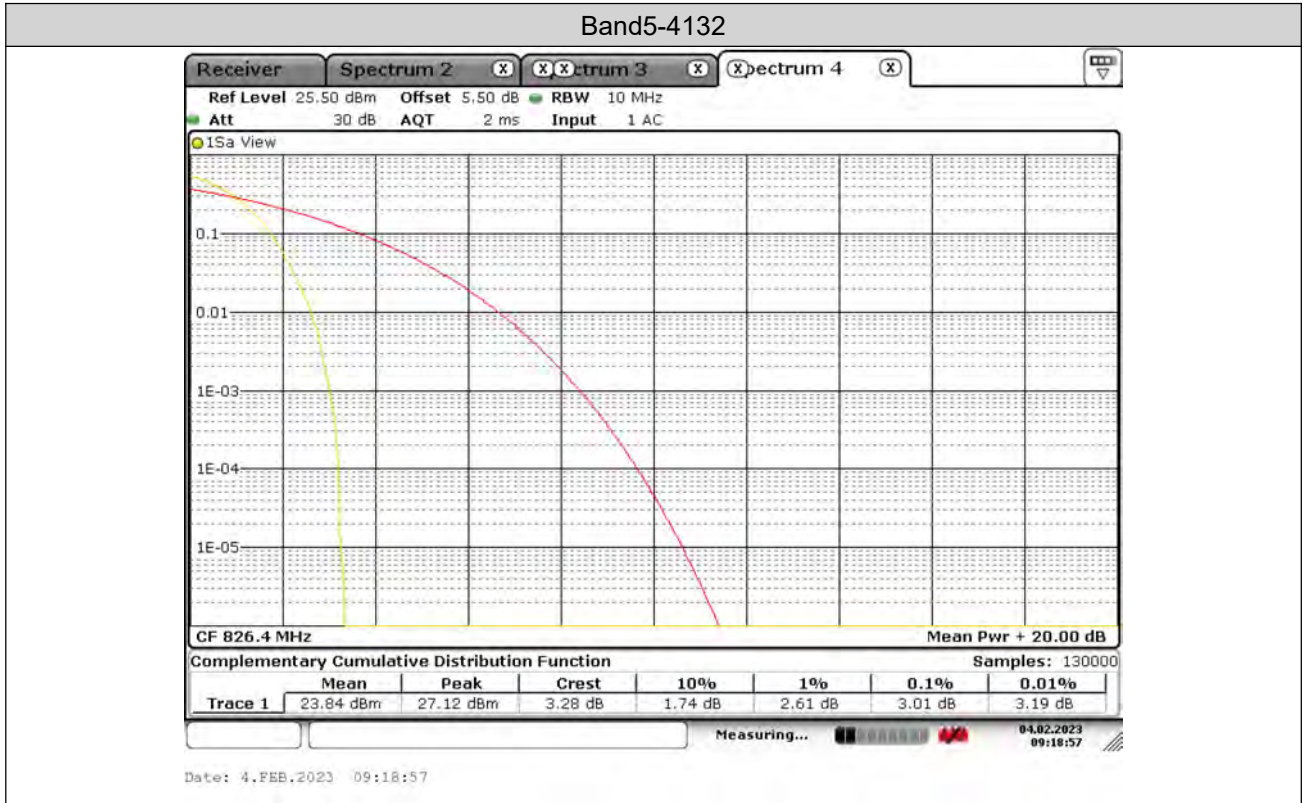



Test Report No.: PSU-QSU2308280314RF01

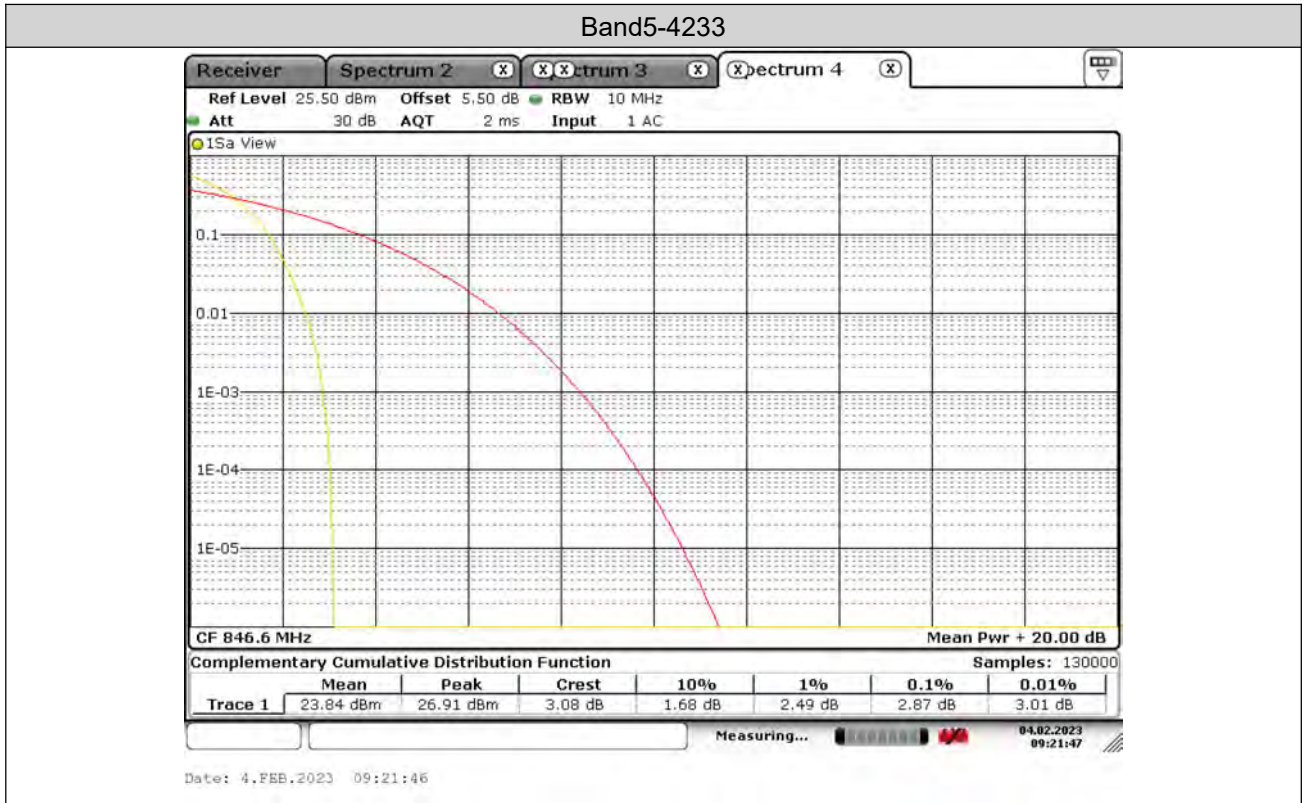



Test Report No.: PSU-QSU2308280314RF01

## 26DB BANDWIDTH AND OCCUPIED BANDWIDTH

### Test Result


Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit(kHz)	Verdict
Band5	4132	4.153	4.689	---	PASS
Band5	4182	4.139	4.689	---	PASS
Band5	4233	4.139	4.689	---	PASS









Test Report No.: PSU-QSU2308280314RF01

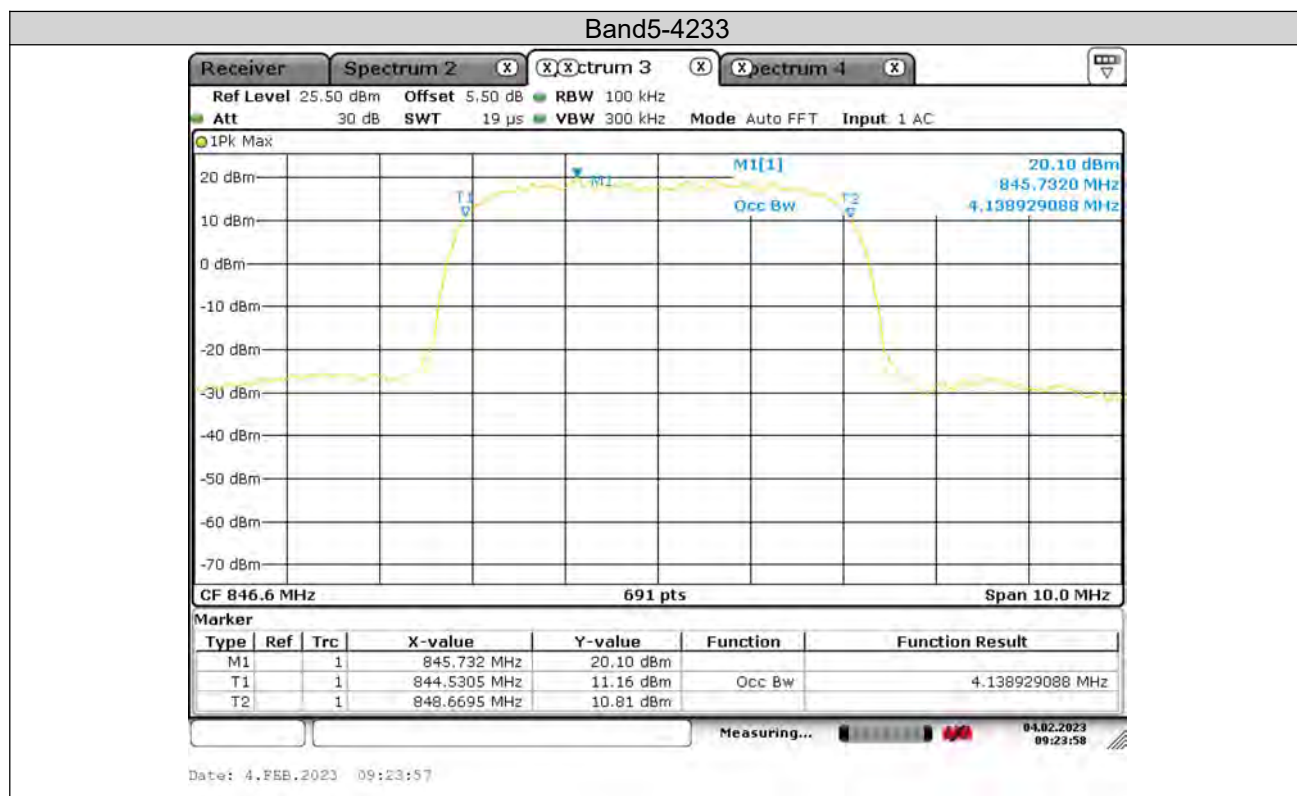




Test Report No.: PSU-QSU2308280314RF01

26dB Bandwidth

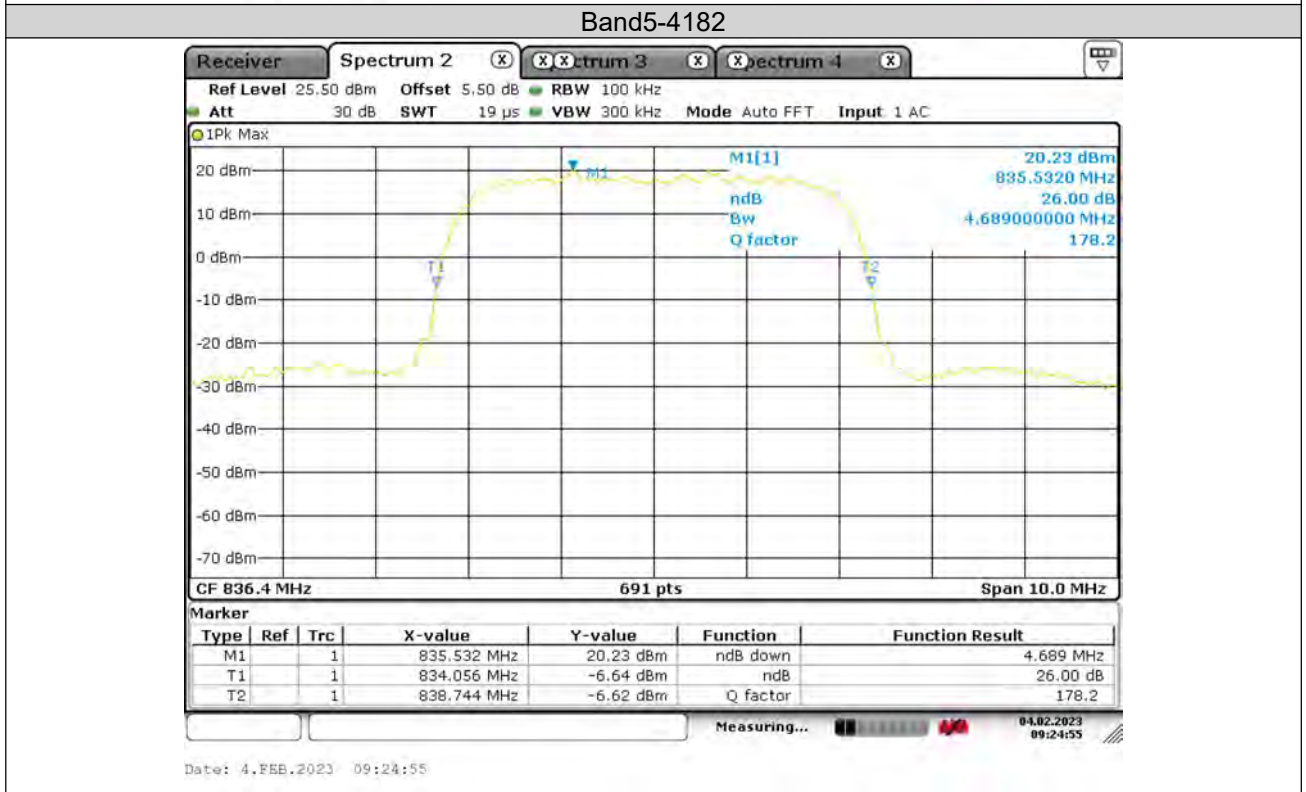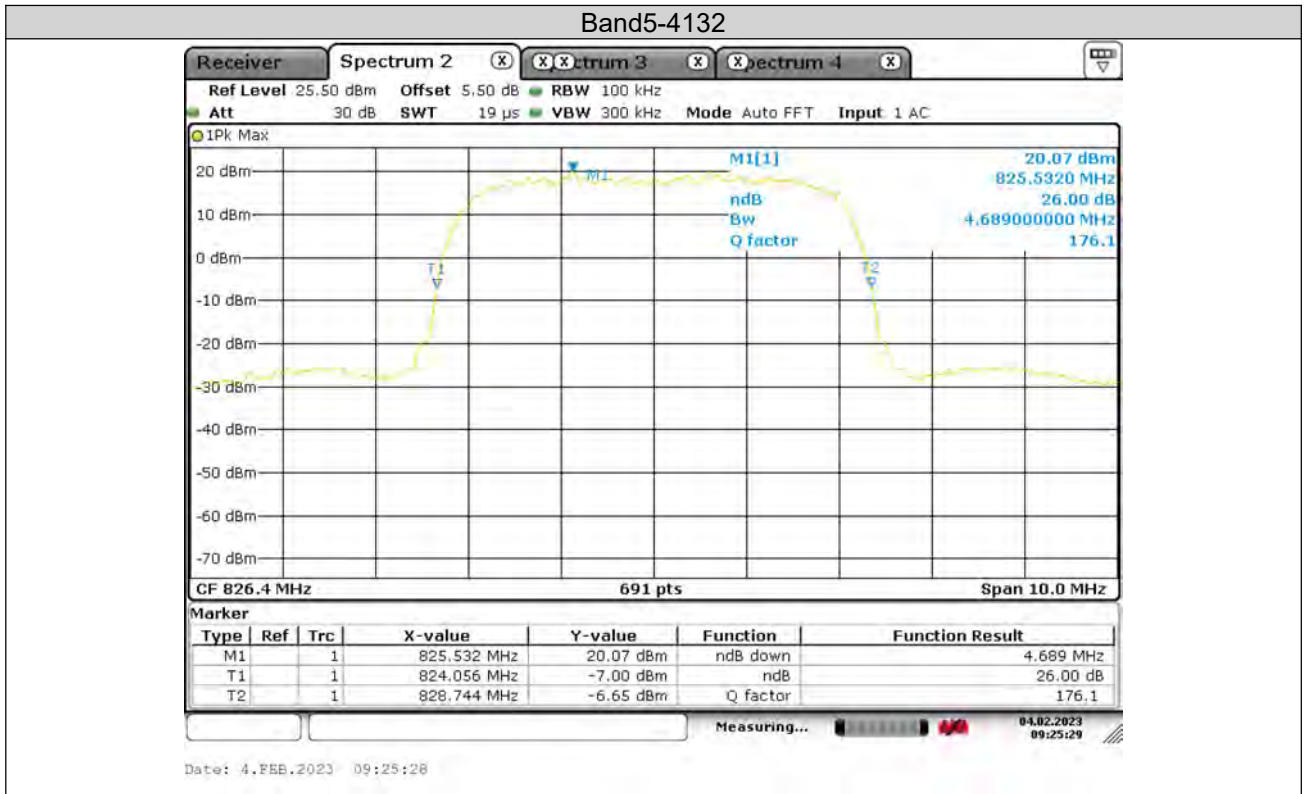



Test Report No.: PSU-QSU2308280314RF01

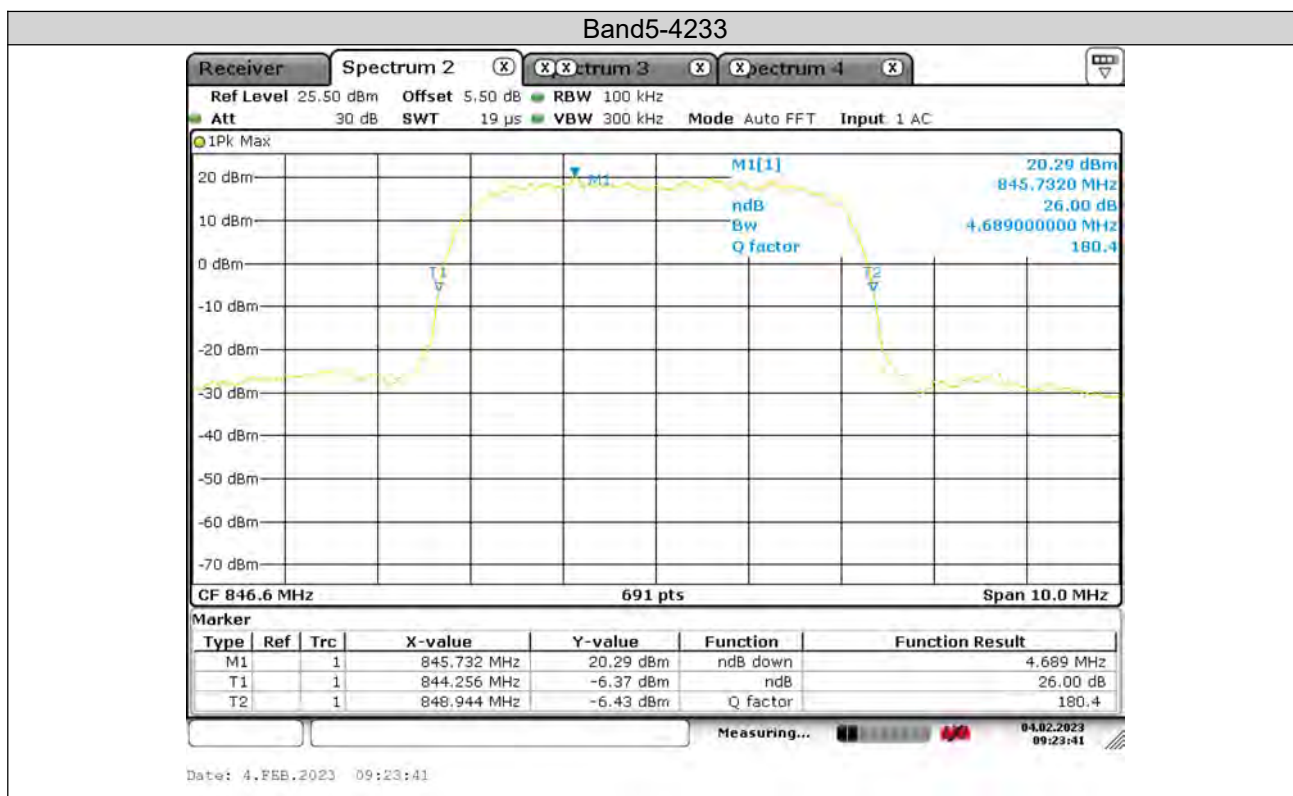







Test Report No.: PSU-QSU2308280314RF01

## BAND EDGE

### Test Result

Band	Channel	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band5	4132	823.93778	-32.49	-13	PASS
Band5	4233	849.04423	-34.43	-13	PASS

### Test Graphs

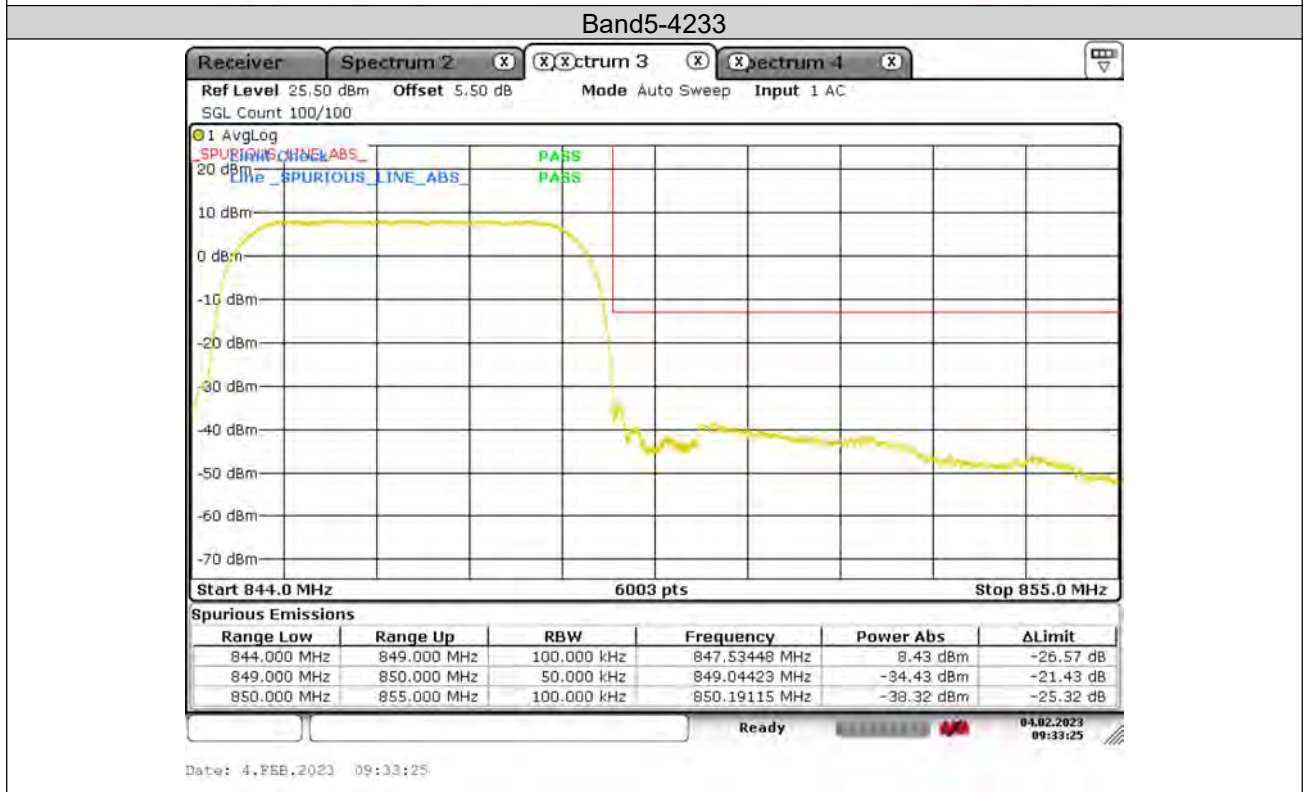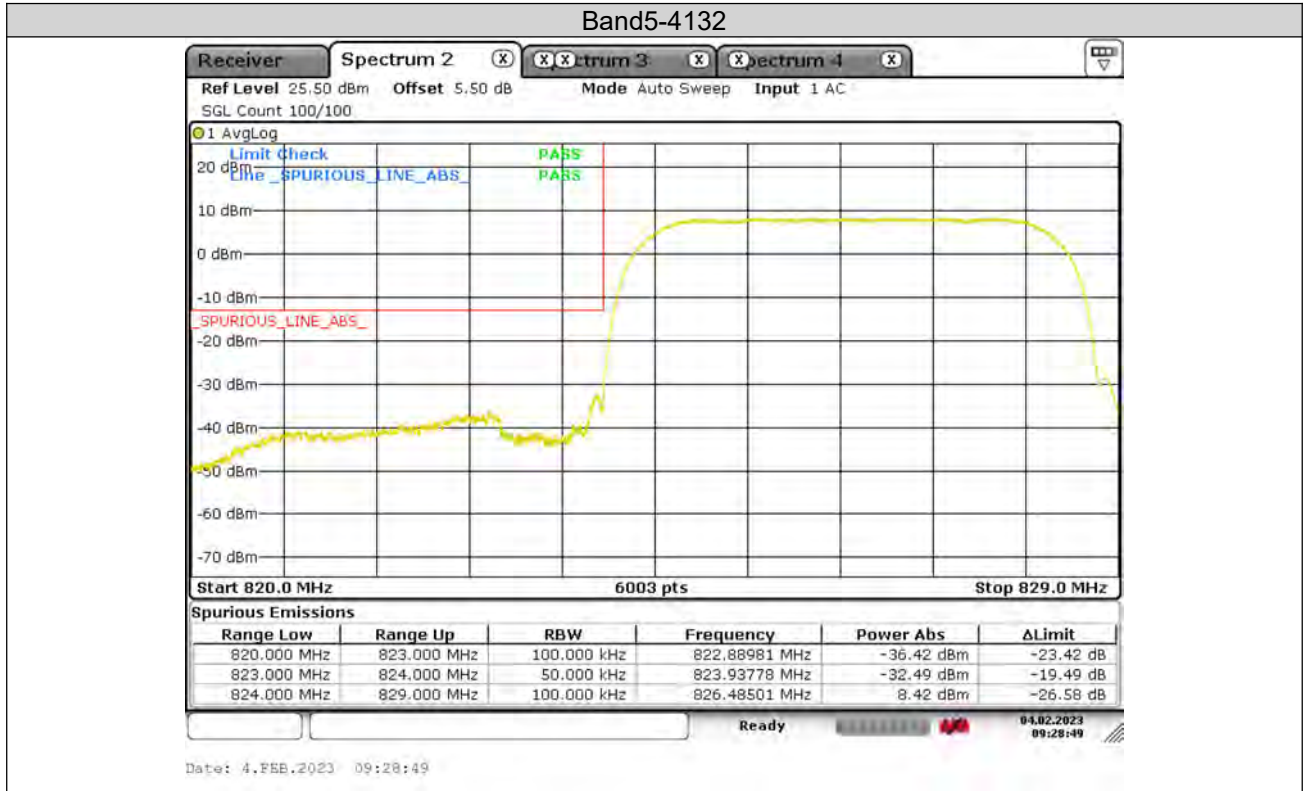





Test Report No.: PSU-QSU2308280314RF01

## CONDUCTED SPURIOUS EMISSION

### Test Result



Band	Channel	Frequency Range (Mhz)	Frequency (dBm)	Result (dBm)	Limit (dBm)	Verdict
Band5	4132	30~1000MHz	819.8026	-43.95	-13	PASS
Band5	4132	1000~9000MHz	6996.75	-34.95	-13	PASS
Band5	4182	30~1000MHz	881.05072	-48.75	-13	PASS
Band5	4182	1000~9000MHz	5759.41	-34.76	-13	PASS
Band5	4233	30~1000MHz	855.1087	-42.68	-13	PASS
Band5	4233	1000~9000MHz	6078.37	-35.06	-13	PASS

### Test Graphs

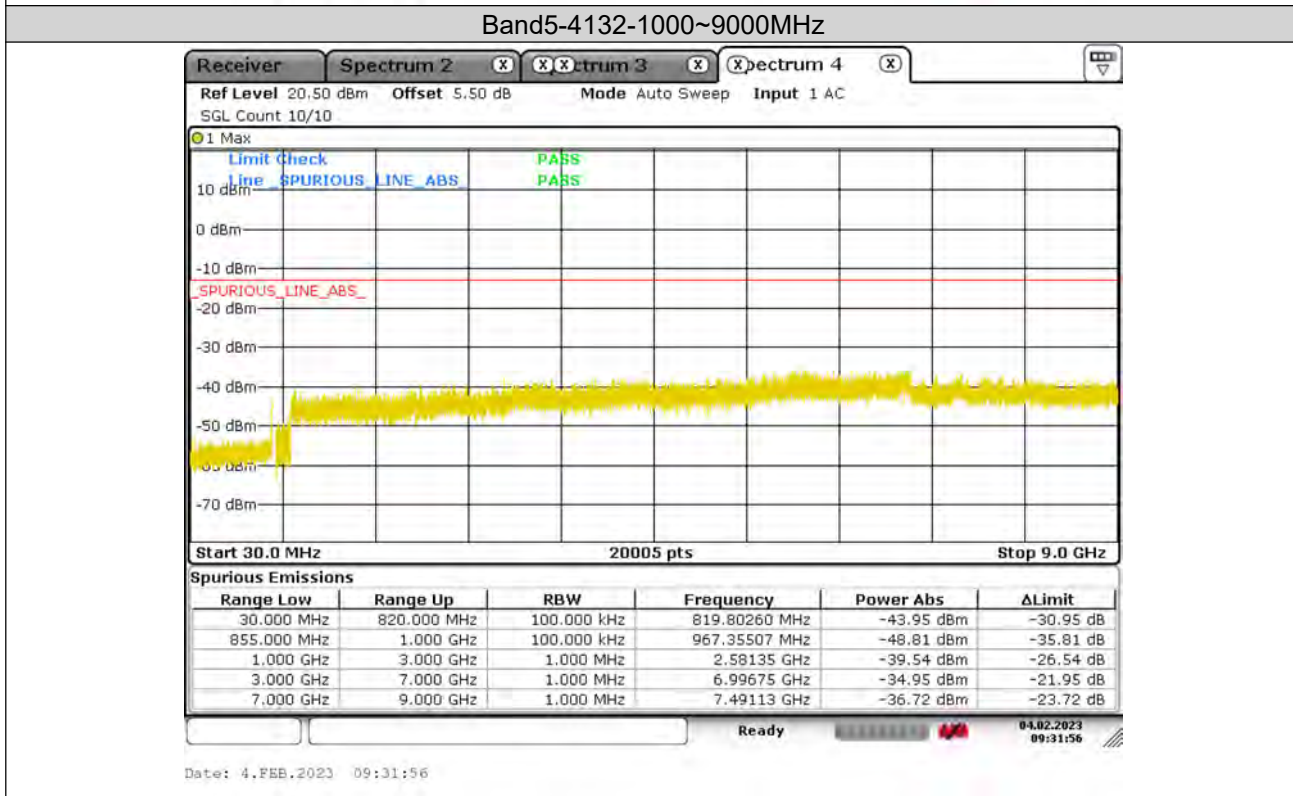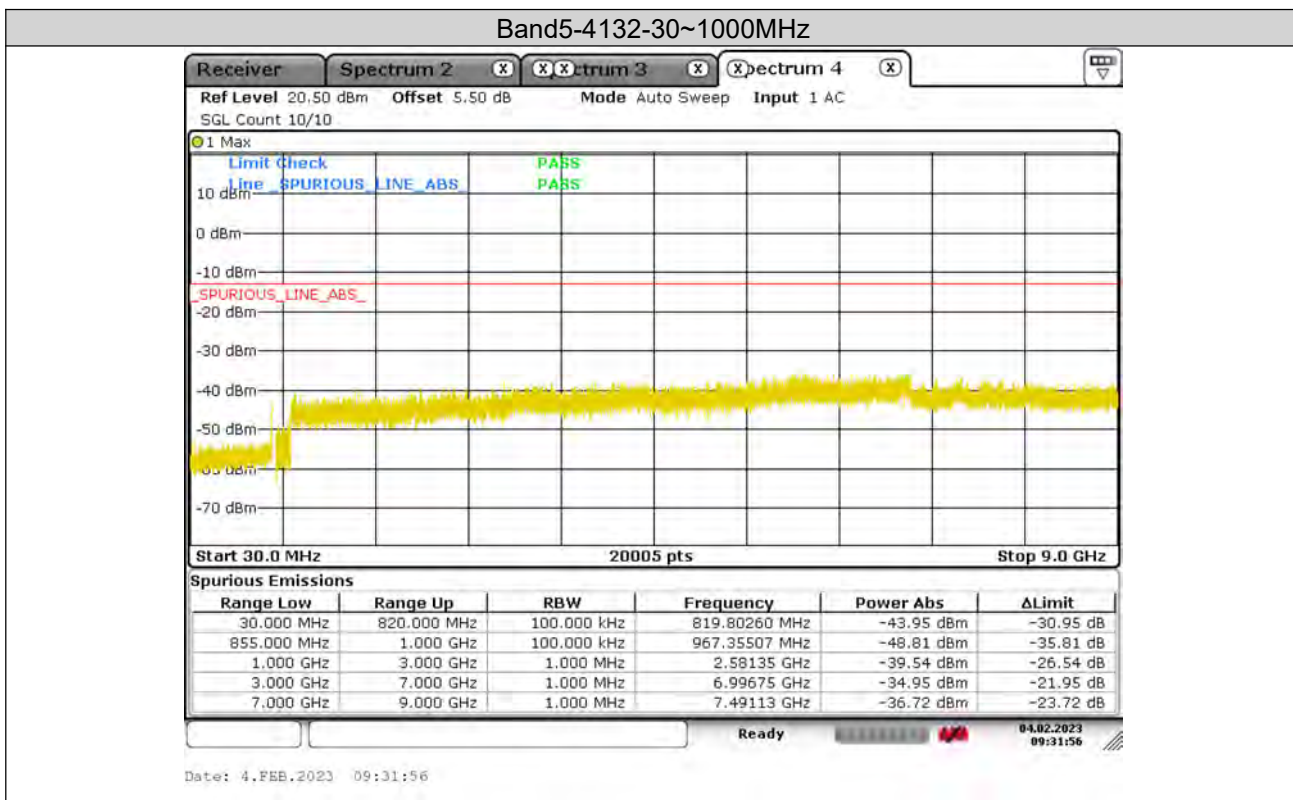





Test Report No.: PSU-QSU2308280314RF01

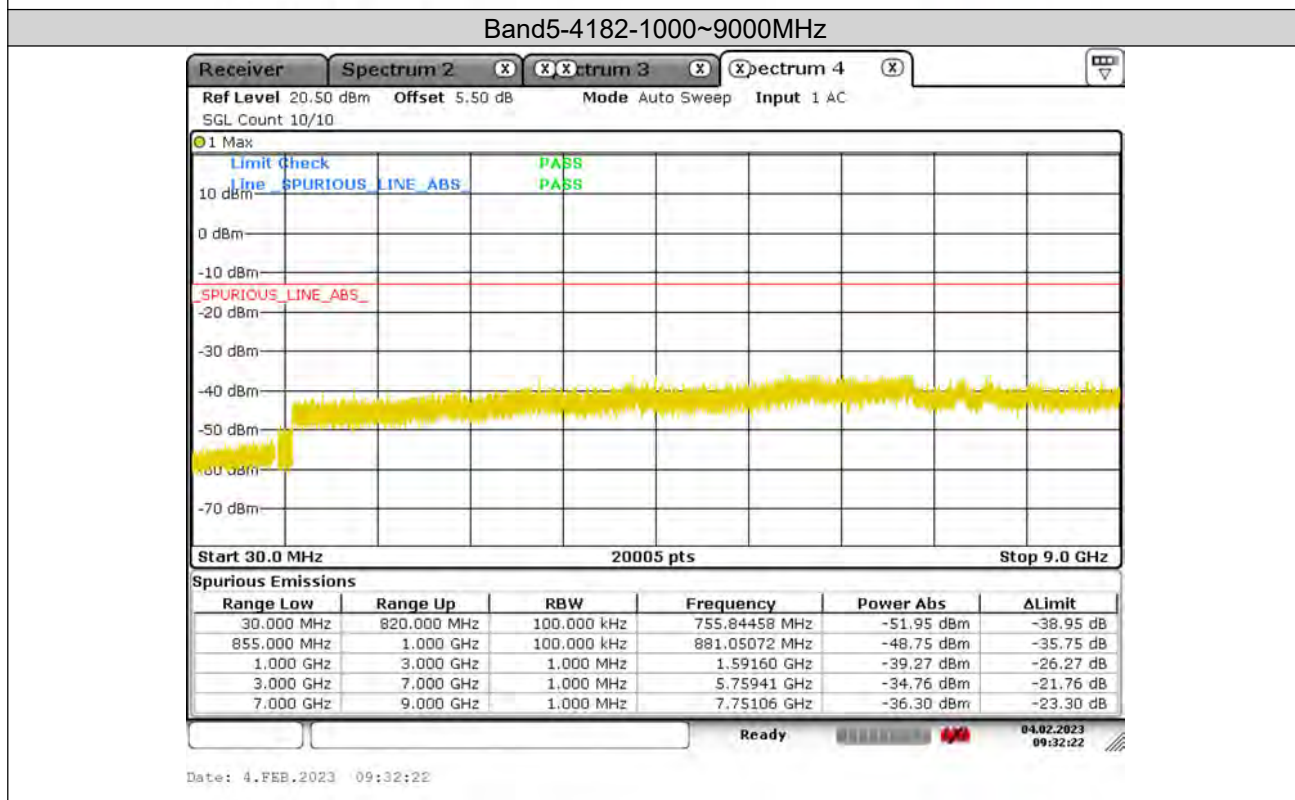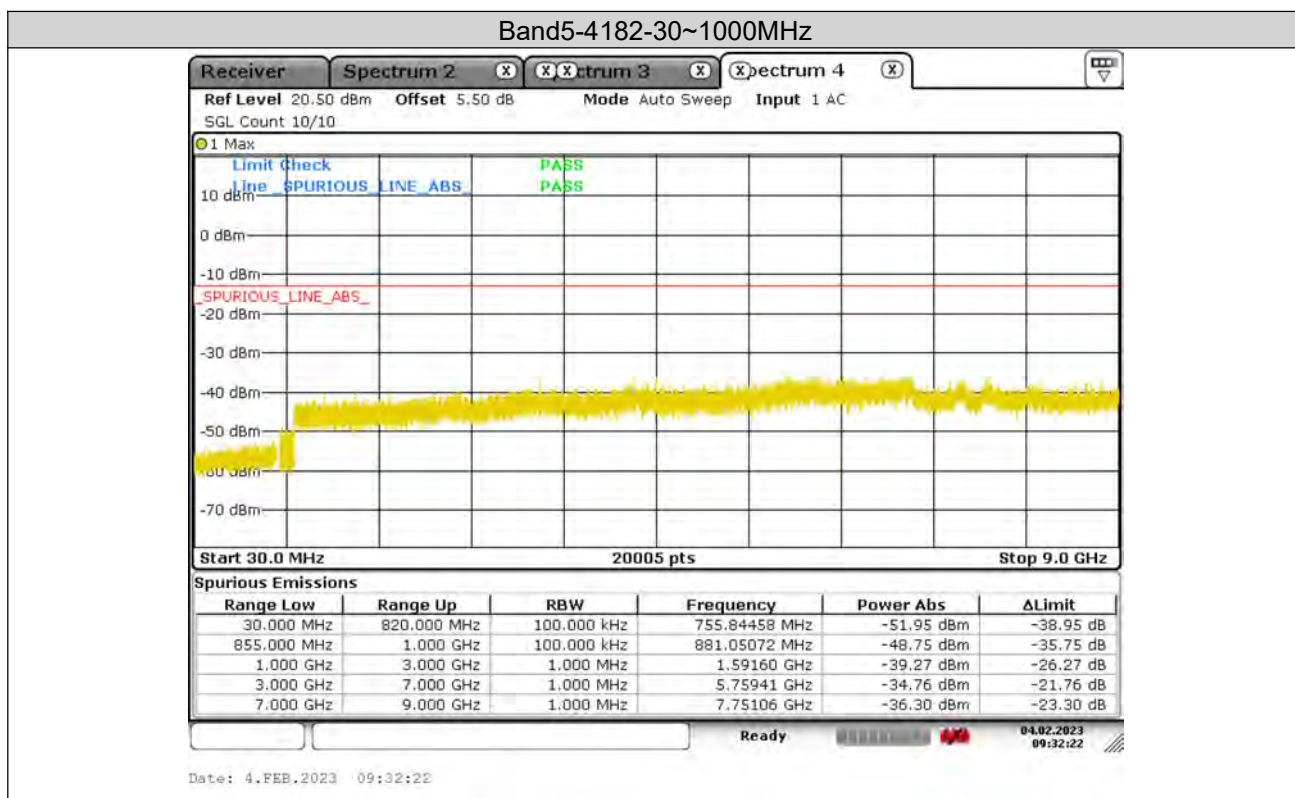





Test Report No.: PSU-QSU2308280314RF01

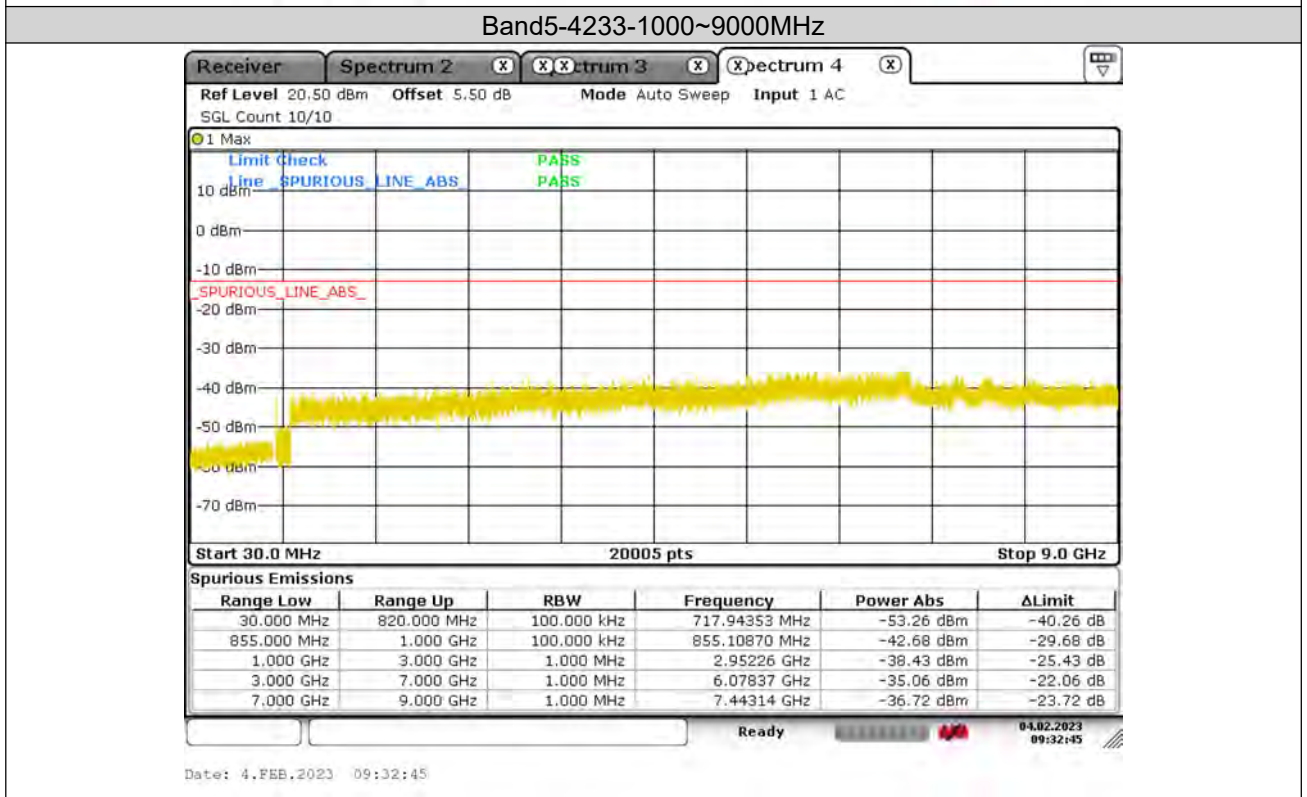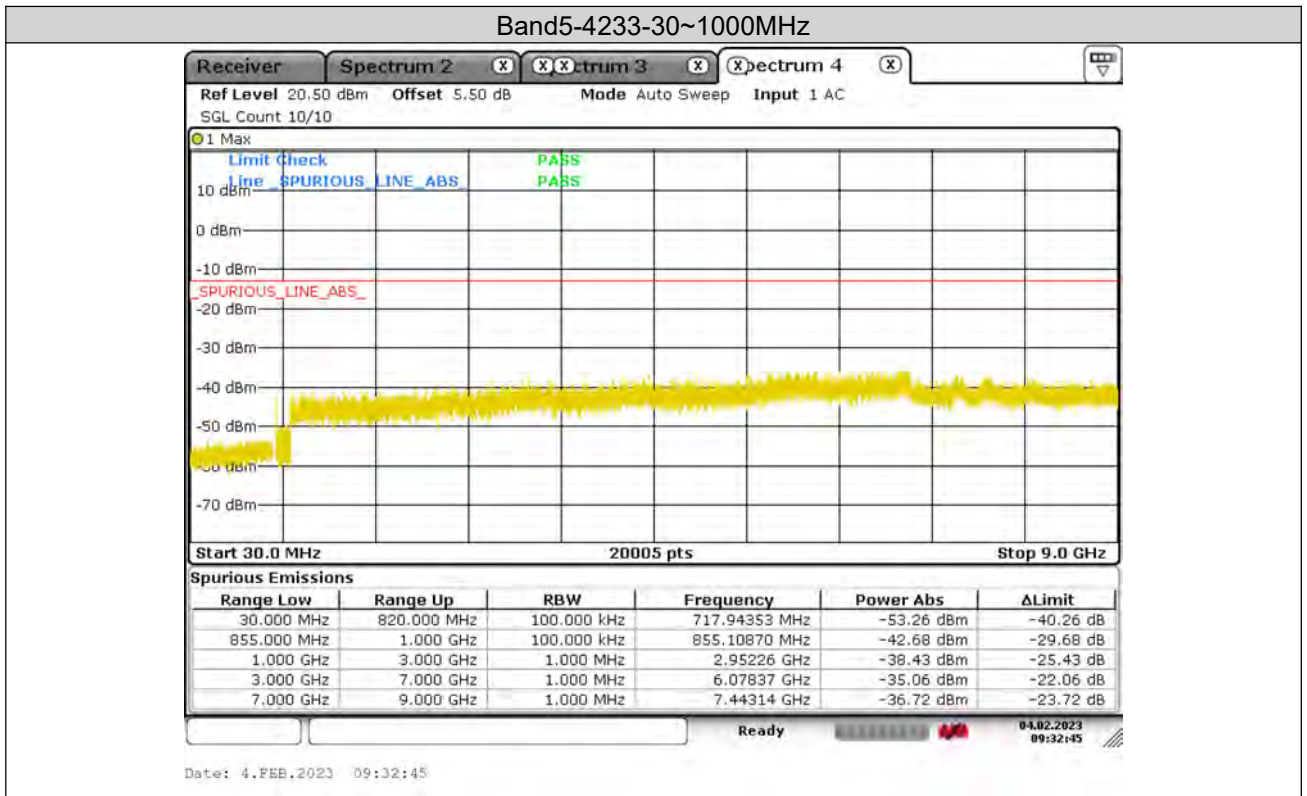





## FREQUENCY STABILITY

### Test Result

Voltage							
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band5	4132	VL	NT	-6.64	-0.008035	±2.5	PASS
Band5	4132	VN	NT	9.51	0.011508	±2.5	PASS
Band5	4132	VH	NT	-7.52	-0.009100	±2.5	PASS
Band5	4182	VL	NT	9.77	0.011678	±2.5	PASS
Band5	4182	VN	NT	0.18	0.000215	±2.5	PASS
Band5	4182	VH	NT	-4.06	-0.004853	±2.5	PASS
Band5	4233	VL	NT	1.13	0.001335	±2.5	PASS
Band5	4233	VN	NT	-2.29	-0.002705	±2.5	PASS
Band5	4233	VH	NT	9.75	0.011517	±2.5	PASS



Test Report No.: PSU-QSU2308280314RF01

Temperature							
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band5	4132	NV	-30	4.45	0.005385	±2.5	PASS
Band5	4132	NV	-20	-1.08	-0.001307	±2.5	PASS
Band5	4132	NV	0	1.8	0.002178	±2.5	PASS
Band5	4132	NV	10	2.51	0.003037	±2.5	PASS
Band5	4132	NV	20	-9.86	-0.011931	±2.5	PASS
Band5	4132	NV	30	4.34	0.005252	±2.5	PASS
Band5	4132	NV	40	1.1	0.001331	±2.5	PASS
Band5	4132	NV	50	7.51	0.009088	±2.5	PASS
Band5	4182	NV	-30	-7.12	-0.008511	±2.5	PASS
Band5	4182	NV	-20	-9.85	-0.011774	±2.5	PASS
Band5	4182	NV	0	9.48	0.011332	±2.5	PASS
Band5	4182	NV	10	7.78	0.009300	±2.5	PASS
Band5	4182	NV	20	0.92	0.001100	±2.5	PASS
Band5	4182	NV	30	-3.7	-0.004423	±2.5	PASS
Band5	4182	NV	40	-3.26	-0.003897	±2.5	PASS
Band5	4182	NV	50	-4.51	-0.005391	±2.5	PASS
Band5	4233	NV	-30	4.52	0.005339	±2.5	PASS
Band5	4233	NV	-20	4.89	0.005776	±2.5	PASS
Band5	4233	NV	0	-3.6	-0.004252	±2.5	PASS
Band5	4233	NV	10	-4.59	-0.005422	±2.5	PASS
Band5	4233	NV	20	2.32	0.002740	±2.5	PASS
Band5	4233	NV	30	8.11	0.009579	±2.5	PASS
Band5	4233	NV	40	-0.12	-0.000142	±2.5	PASS
Band5	4233	NV	50	-6.29	-0.007430	±2.5	PASS



## LTE BAND5

### PEAK-TO-AVERAGE RATIO(CCDF)



#### Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band5	10MHz	QPSK	20450	1RB#0	4.81	13	PASS
Band5	10MHz	QPSK	20450	50RB#0	5.86	13	PASS
Band5	10MHz	QPSK	20525	1RB#0	5.01	13	PASS
Band5	10MHz	QPSK	20525	50RB#0	5.57	13	PASS
Band5	10MHz	QPSK	20600	1RB#0	5.1	13	PASS
Band5	10MHz	QPSK	20600	50RB#0	5.59	13	PASS
Band5	10MHz	16QAM	20450	1RB#0	5.88	13	PASS
Band5	10MHz	16QAM	20450	50RB#0	6.72	13	PASS
Band5	10MHz	16QAM	20525	1RB#0	6.29	13	PASS
Band5	10MHz	16QAM	20525	50RB#0	6.32	13	PASS
Band5	10MHz	16QAM	20600	1RB#0	6.32	13	PASS
Band5	10MHz	16QAM	20600	50RB#0	6.23	13	PASS
Band5	10MHz	64QAM	20450	1RB#0	6.58	13	PASS
Band5	10MHz	64QAM	20450	50RB#0	6.61	13	PASS
Band5	10MHz	64QAM	20525	1RB#0	6.32	13	PASS
Band5	10MHz	64QAM	20525	50RB#0	6.55	13	PASS
Band5	10MHz	64QAM	20600	1RB#0	6.55	13	PASS
Band5	10MHz	64QAM	20600	50RB#0	6.43	13	PASS



Test Report No.: PSU-QSU2308280314RF01

### Test Graphs

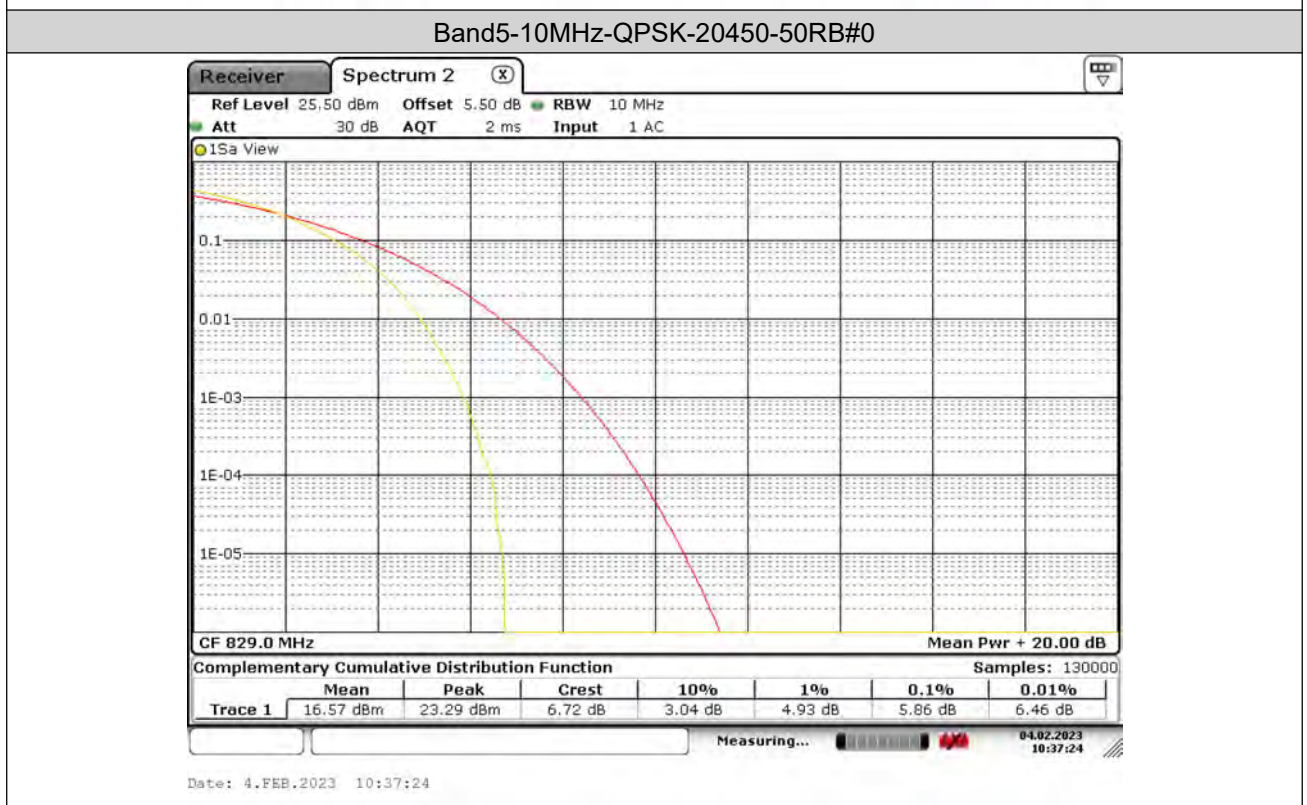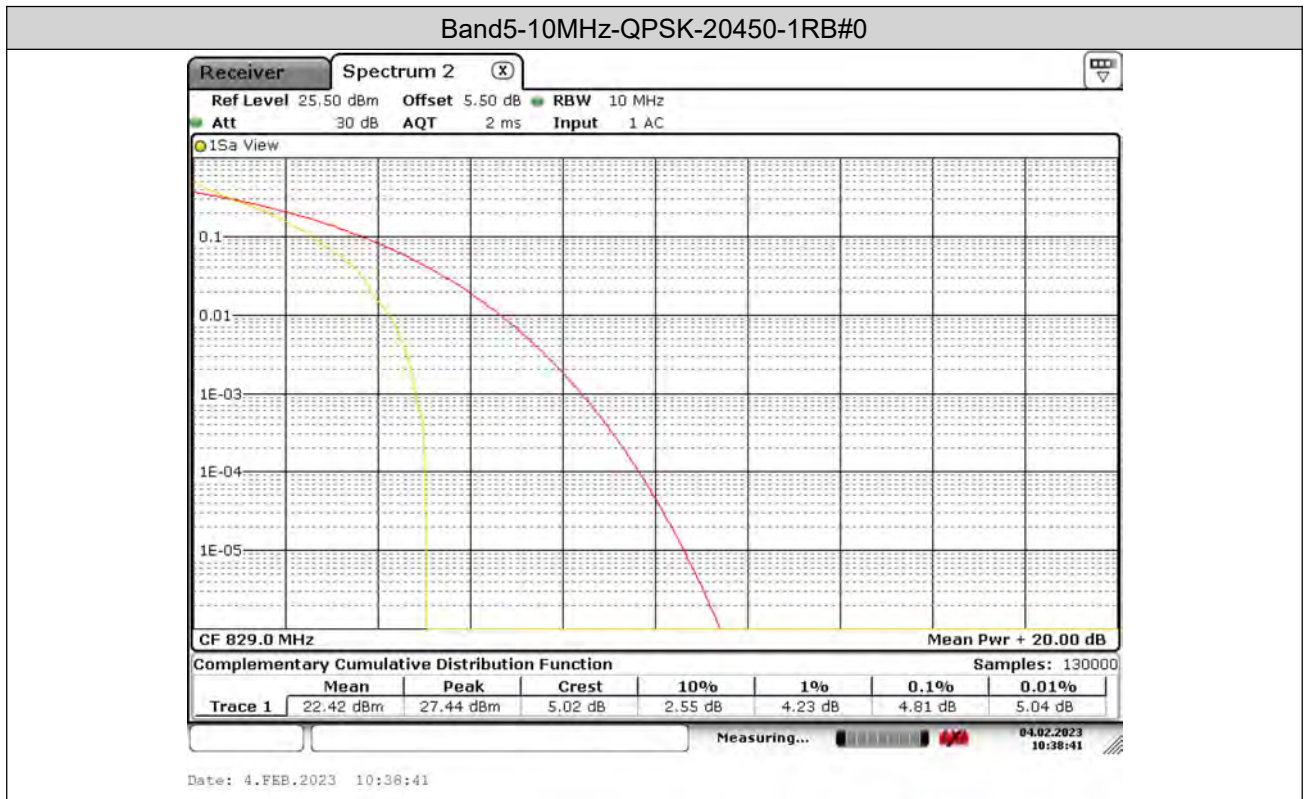







Test Report No.: PSU-QSU2308280314RF01

Band5-10MHz-QPSK-20525-1RB#0

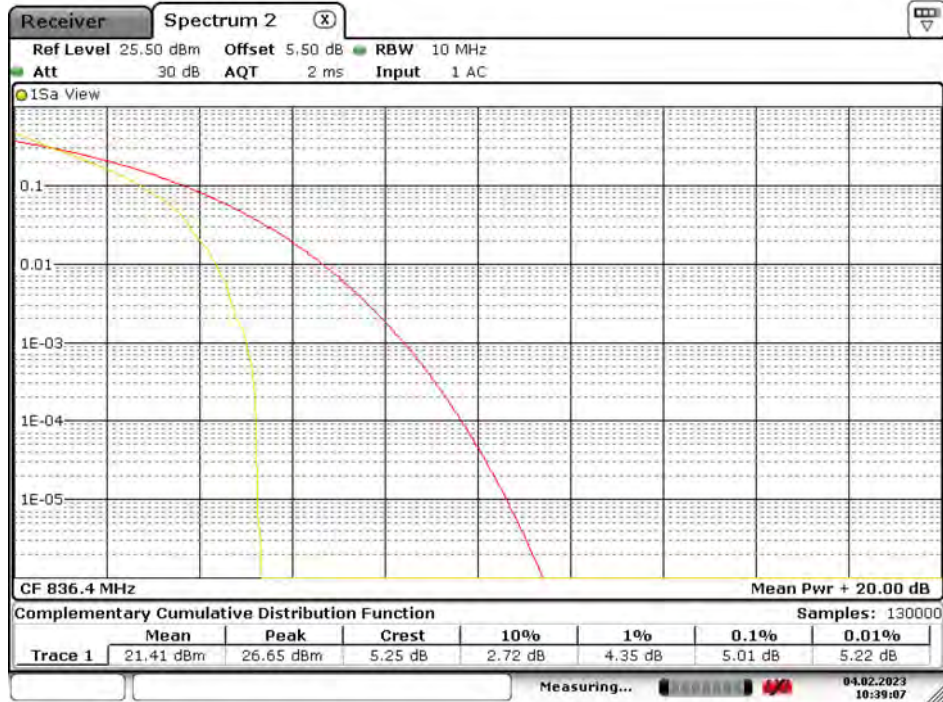

Date: 4.FEB.2023 10:39:06

Band5-10MHz-QPSK-20525-50RB#0

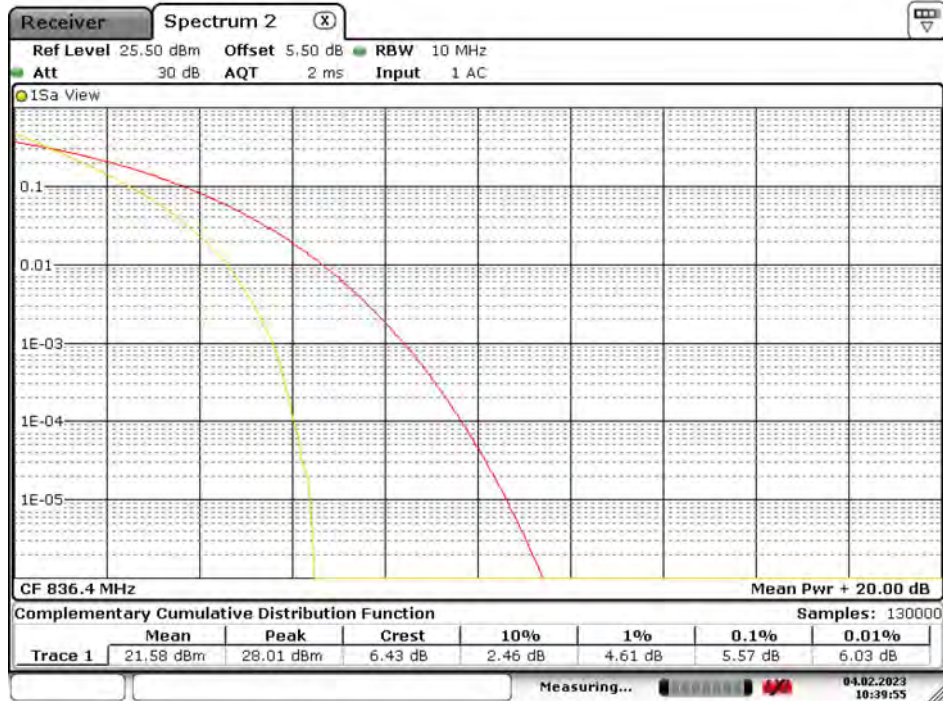


Date: 4.FEB.2023 10:39:55



Test Report No.: PSU-QSU2308280314RF01

### Band5-10MHz-QPSK-20600-1RB#0

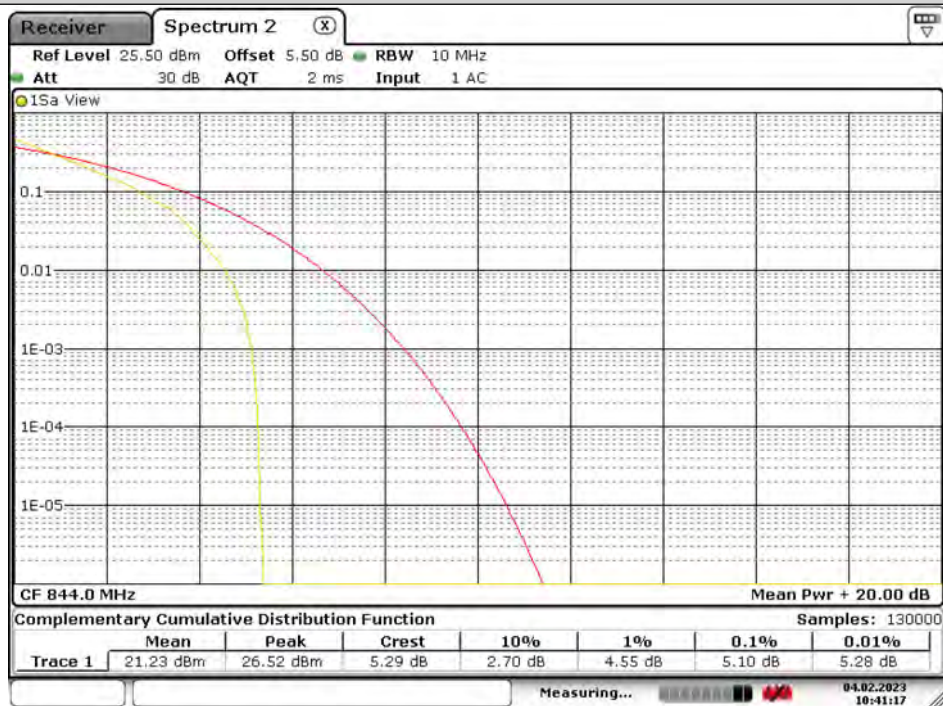

Date: 4.FEB.2023 10:41:17

### Band5-10MHz-QPSK-20600-50RB#0




Date: 4.FEB.2023 10:40:25





Test Report No.: PSU-QSU2308280314RF01

Band5-10MHz-16QAM-20450-1RB#0

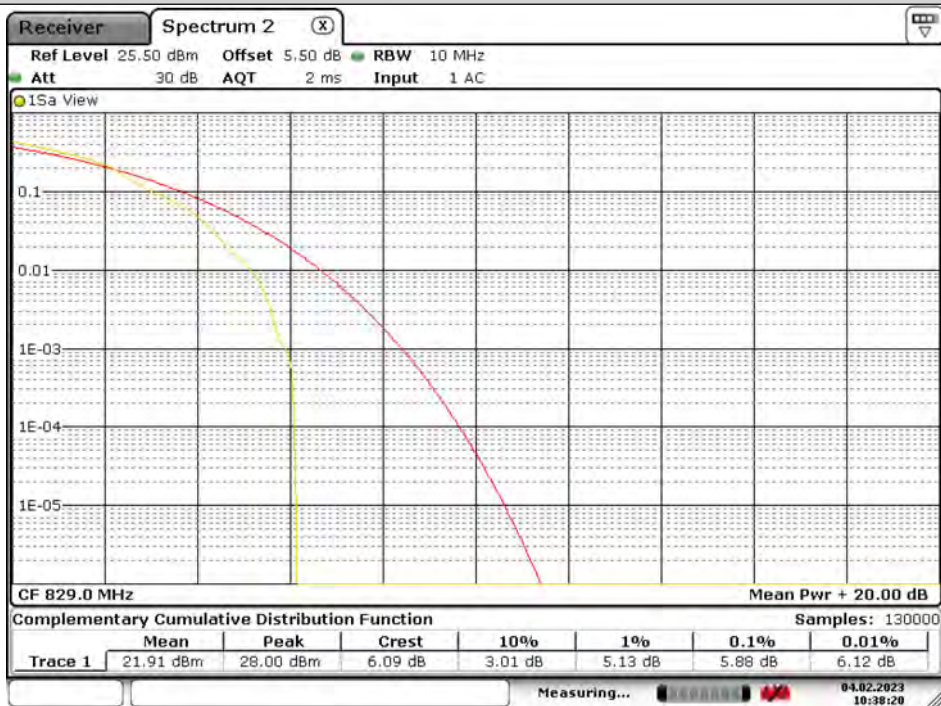

Date: 4.FEB.2023 10:38:20

Band5-10MHz-16QAM-20450-50RB#0




Date: 4.FEB.2023 10:38:02




Test Report No.: PSU-QSU2308280314RF01

Band5-10MHz-16QAM-20525-1RB#0

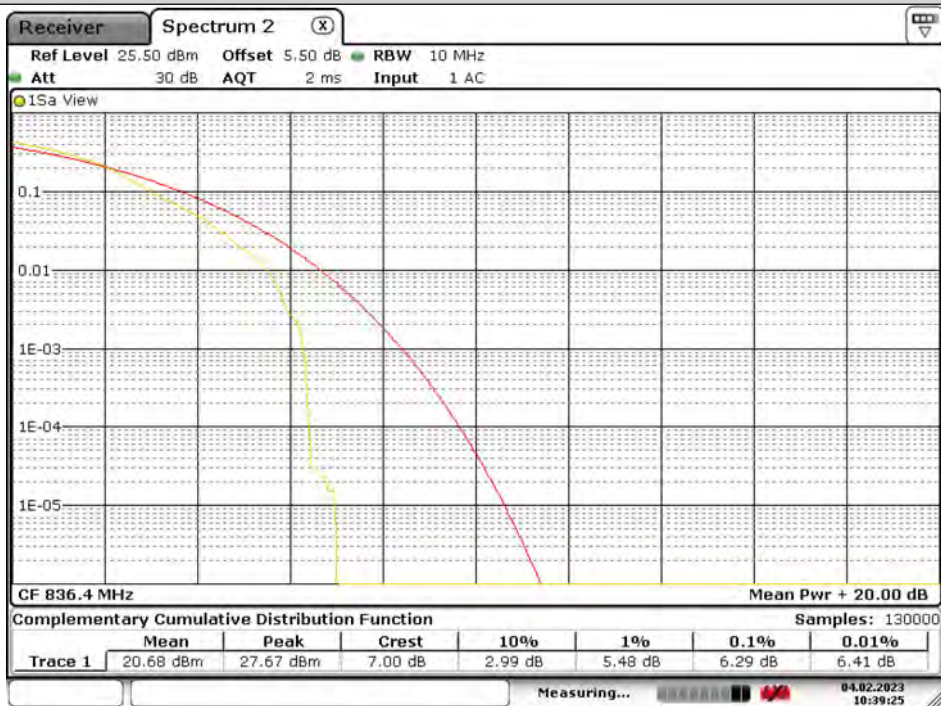

Date: 4.FEB.2023 10:39:25

Band5-10MHz-16QAM-20525-50RB#0

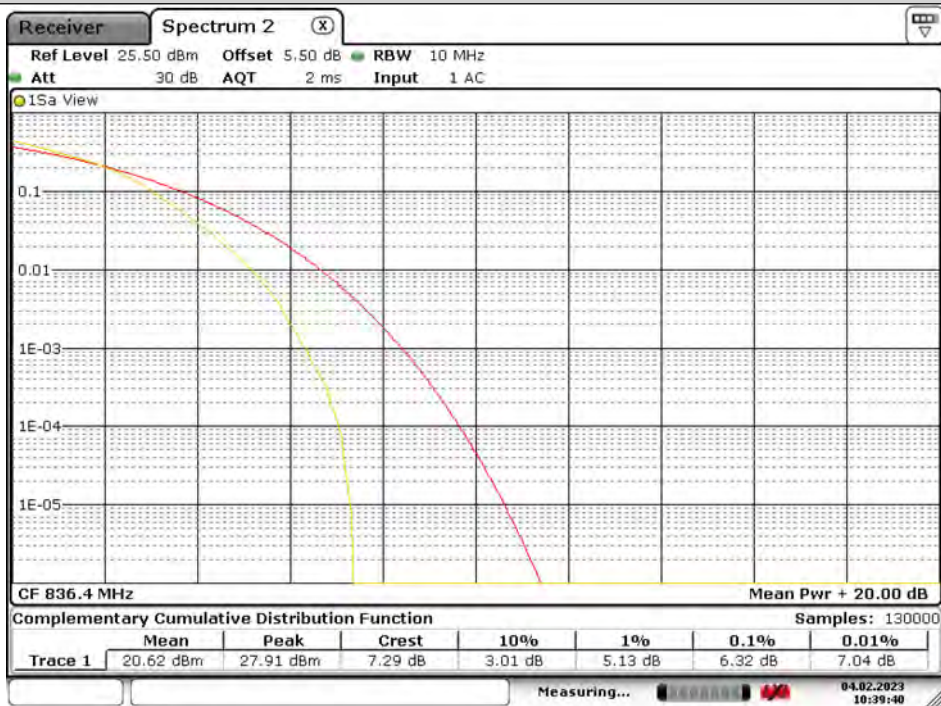


Date: 4.FEB.2023 10:39:40






Test Report No.: PSU-QSU2308280314RF01

Band5-10MHz-16QAM-20600-1RB#0

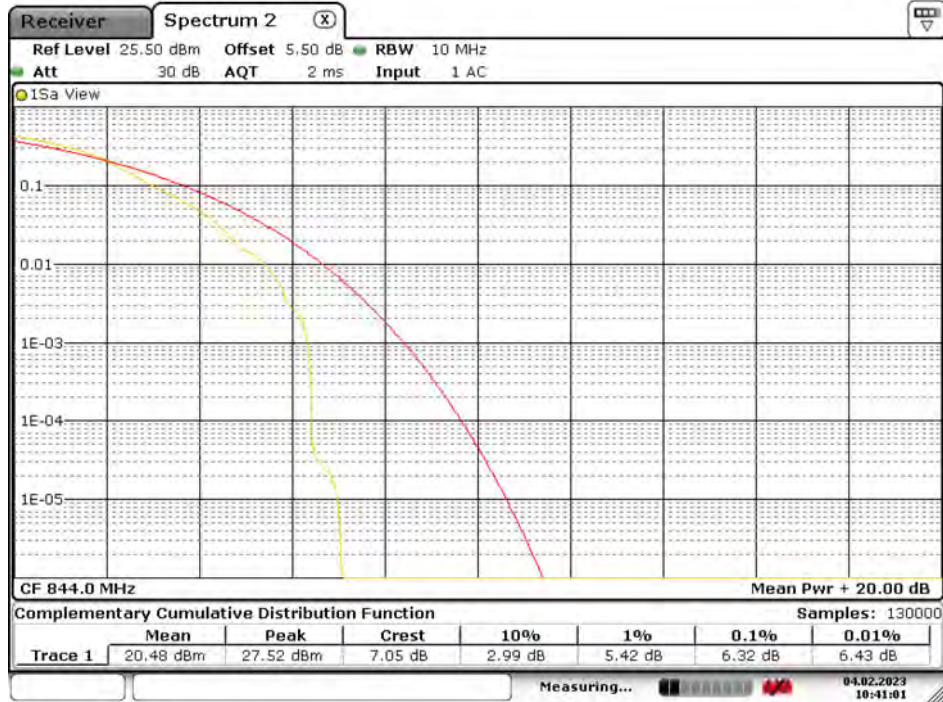

Date: 4.FEB.2023 10:41:01

Band5-10MHz-16QAM-20600-50RB#0

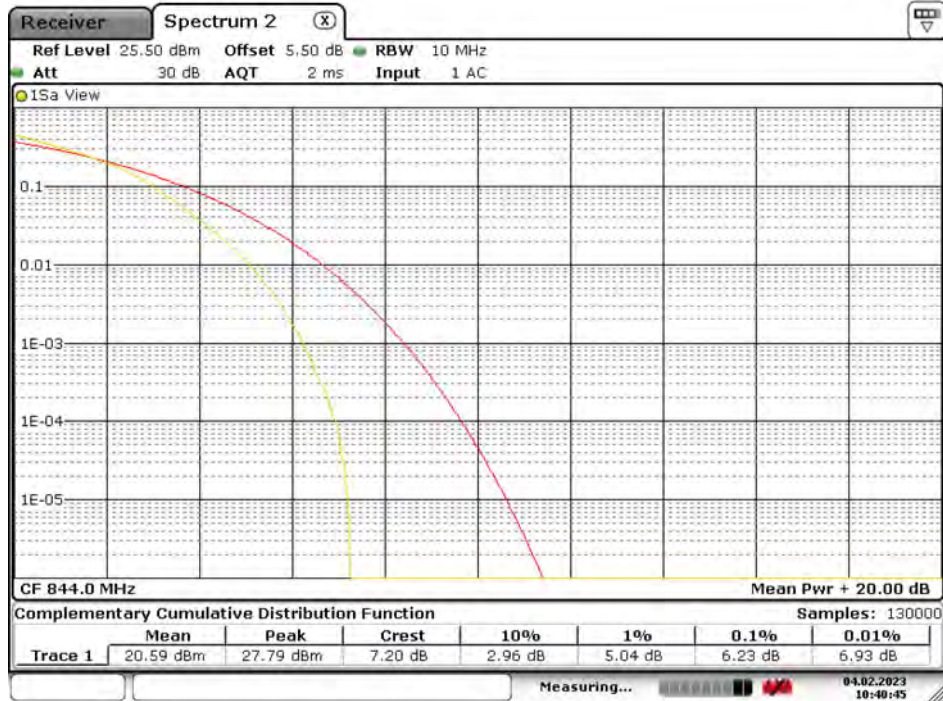

Date: 4.FEB.2023 10:40:45




Test Report No.: PSU-QSU2308280314RF01

Band5-10MHz-64QAM-20450-1RB#0



Date: 23.FEB.2023 02:11:44

Band5-10MHz-64QAM-20450-50RB#0


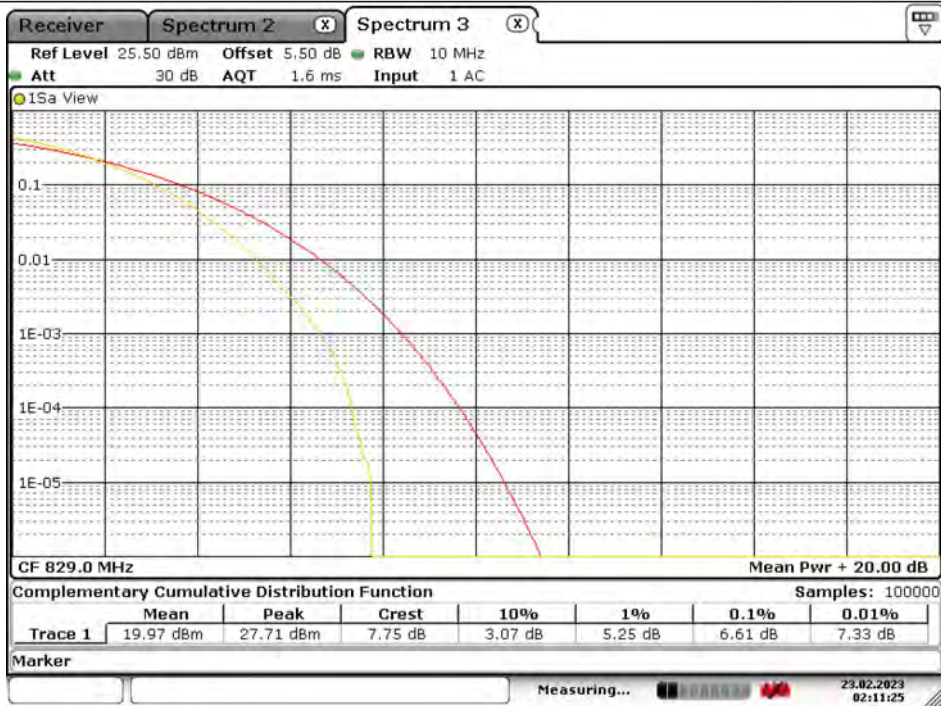


Date: 23.FEB.2023 02:11:25







Test Report No.: PSU-QSU2308280314RF01

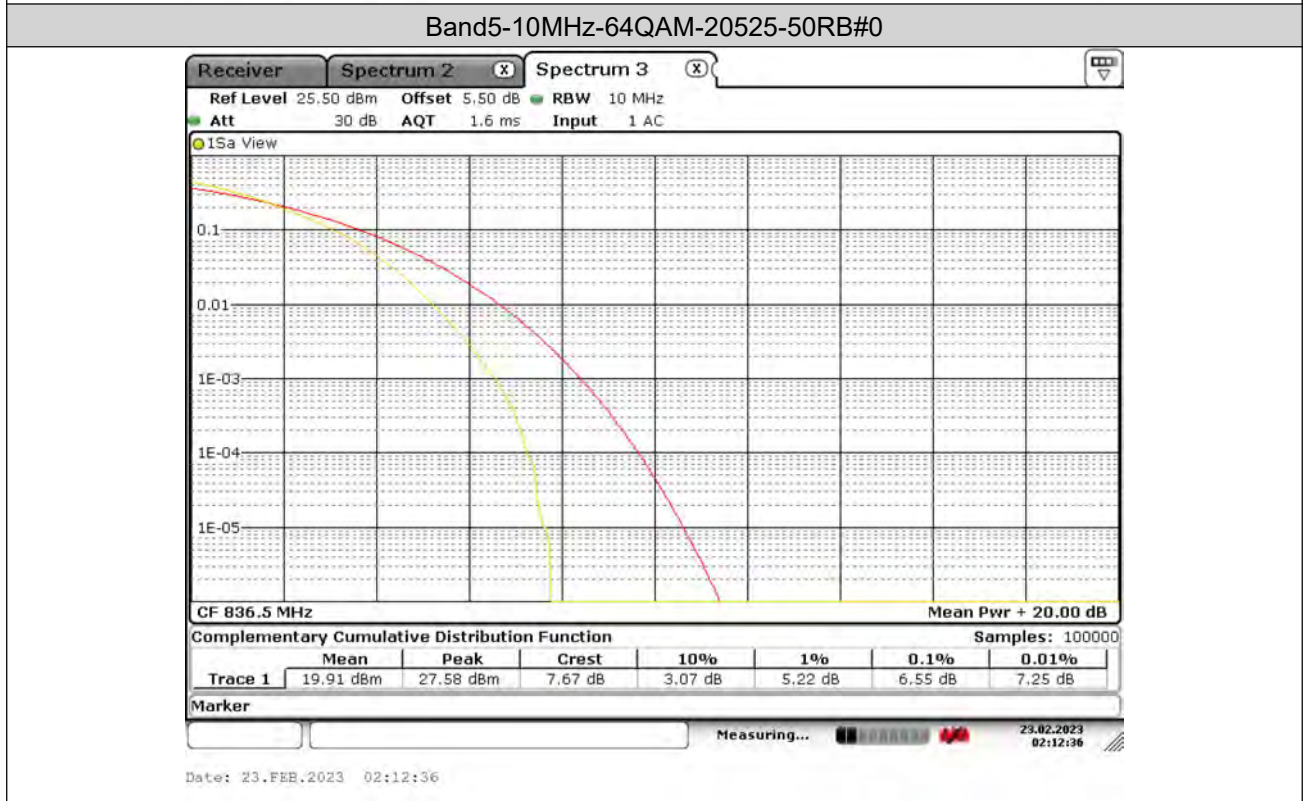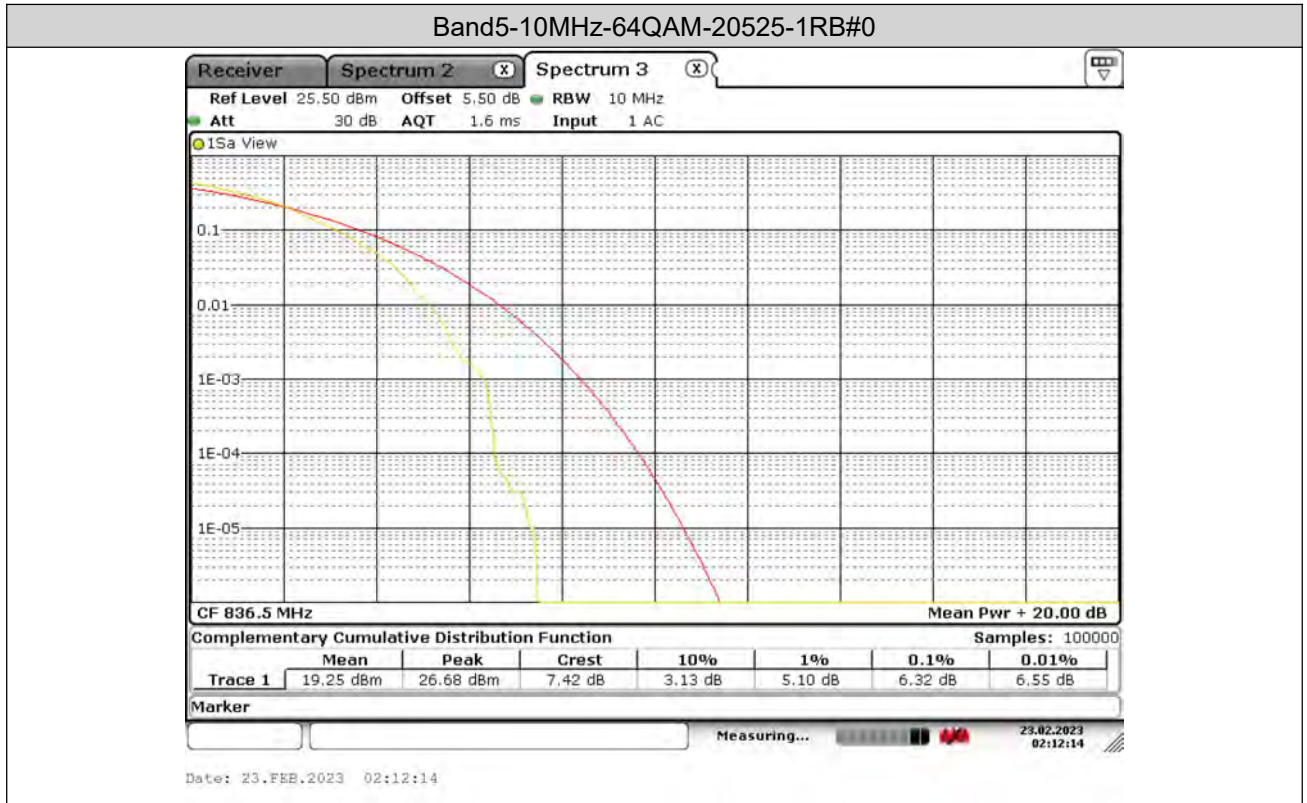



Test Report No.: PSU-QSU2308280314RF01

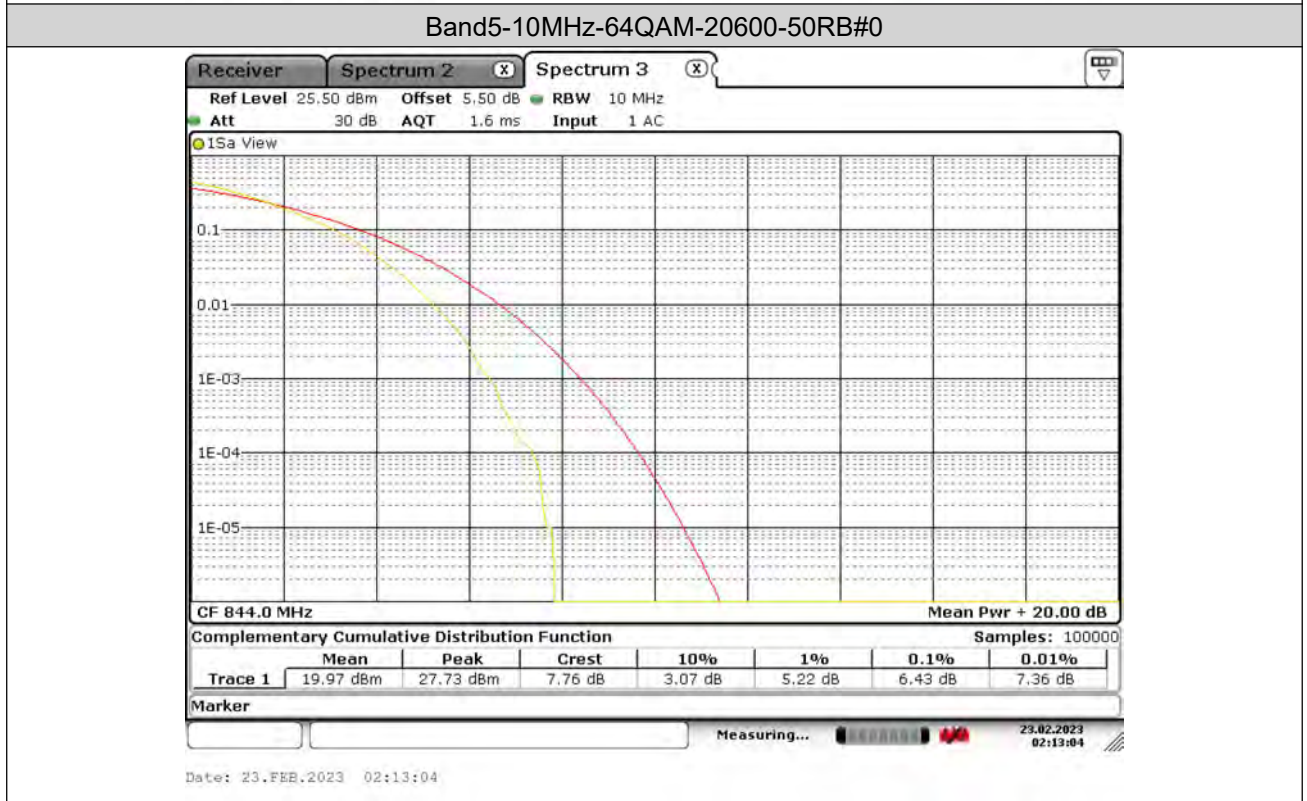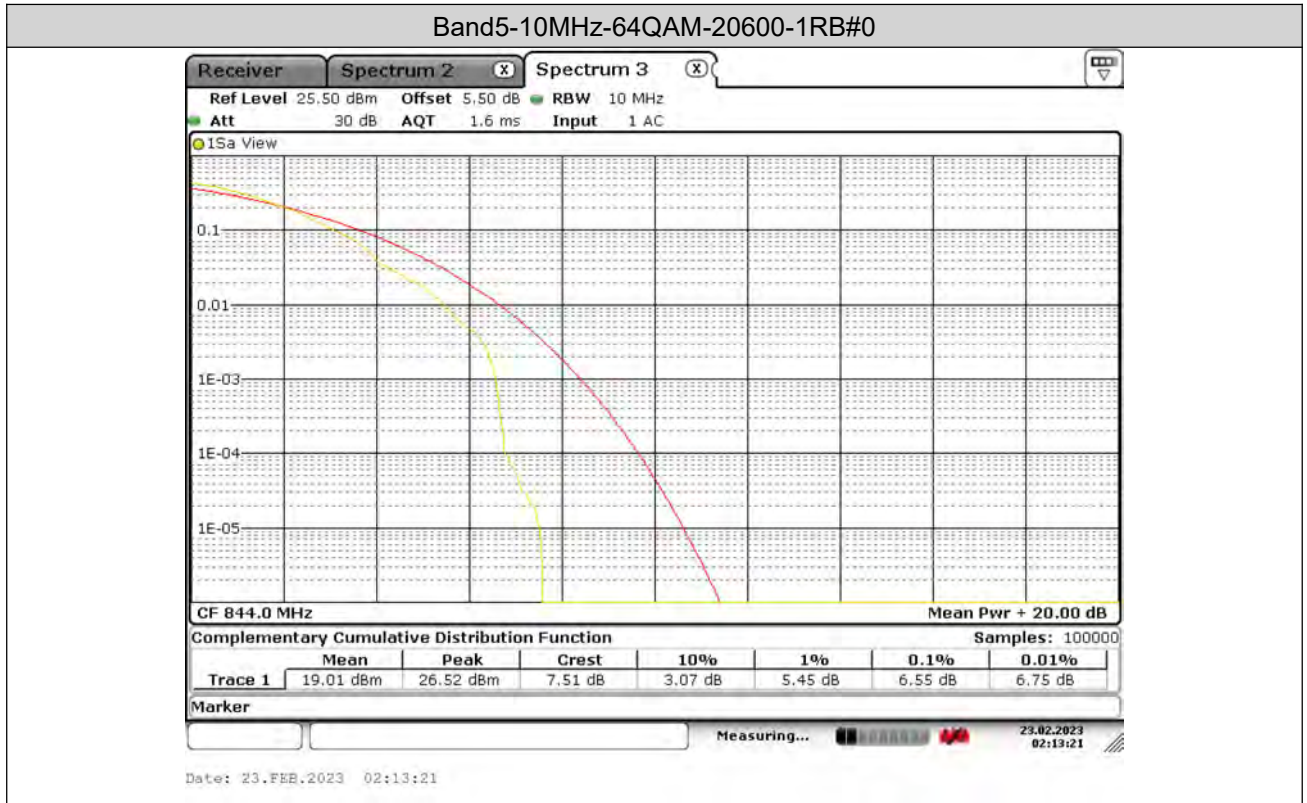







## 26DB BANDWIDTH AND OCCUPIED BANDWIDTH

### Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band5	1.4MHz	QPSK	20407	6RB#0	1.106	1.2399	PASS
Band5	1.4MHz	QPSK	20525	6RB#0	1.094	1.248	PASS
Band5	1.4MHz	QPSK	20643	6RB#0	1.094	1.2399	PASS
Band5	1.4MHz	16QAM	20407	6RB#0	1.086	1.244	PASS
Band5	1.4MHz	16QAM	20525	6RB#0	1.094	1.2359	PASS
Band5	1.4MHz	16QAM	20643	6RB#0	1.102	1.2318	PASS
Band5	3MHz	QPSK	20415	15RB#0	2.726	3.0304	PASS
Band5	3MHz	QPSK	20525	15RB#0	2.709	3.0825	PASS
Band5	3MHz	QPSK	20635	15RB#0	2.709	3.0738	PASS
Band5	3MHz	16QAM	20415	15RB#0	2.744	3.0651	PASS
Band5	3MHz	16QAM	20525	15RB#0	2.744	3.0825	PASS
Band5	3MHz	16QAM	20635	15RB#0	2.761	2.987	PASS
Band5	5MHz	QPSK	20425	25RB#0	4.486	4.891	PASS
Band5	5MHz	QPSK	20525	25RB#0	4.486	4.935	PASS
Band5	5MHz	QPSK	20625	25RB#0	4.486	4.834	PASS
Band5	5MHz	16QAM	20425	25RB#0	4.712	4.891	PASS
Band5	5MHz	16QAM	20525	25RB#0	4.515	4.92	PASS
Band5	5MHz	16QAM	20625	25RB#0	4.486	4.935	PASS
Band5	10MHz	QPSK	20450	50RB#0	9.001	9.725	PASS
Band5	10MHz	QPSK	20525	50RB#0	9.030	9.783	PASS
Band5	10MHz	QPSK	20600	50RB#0	9.088	9.87	PASS
Band5	10MHz	16QAM	20450	50RB#0	9.059	9.841	PASS
Band5	10MHz	16QAM	20525	50RB#0	9.030	9.754	PASS
Band5	10MHz	16QAM	20600	50RB#0	9.059	9.783	PASS
Band5	1.4MHz	64QAM	20407	6RB#0	1.098	1.2318	PASS
Band5	1.4MHz	64QAM	20525	6RB#0	1.098	1.244	PASS
Band5	1.4MHz	64QAM	20643	6RB#0	1.098	1.2359	PASS
Band5	3MHz	64QAM	20415	15RB#0	2.735	3.0391	PASS
Band5	3MHz	64QAM	20525	15RB#0	2.726	3.0304	PASS
Band5	3MHz	64QAM	20635	15RB#0	2.735	3.0478	PASS
Band5	5MHz	64QAM	20425	25RB#0	4.486	4.834	PASS
Band5	5MHz	64QAM	20525	25RB#0	4.515	4.920	PASS
Band5	5MHz	64QAM	20625	25RB#0	4.501	4.920	PASS
Band5	10MHz	64QAM	20450	50RB#0	9.059	9.812	PASS
Band5	10MHz	64QAM	20525	50RB#0	9.001	9.986	PASS
Band5	10MHz	64QAM	20600	50RB#0	9.059	9.928	PASS




### Test Graphs

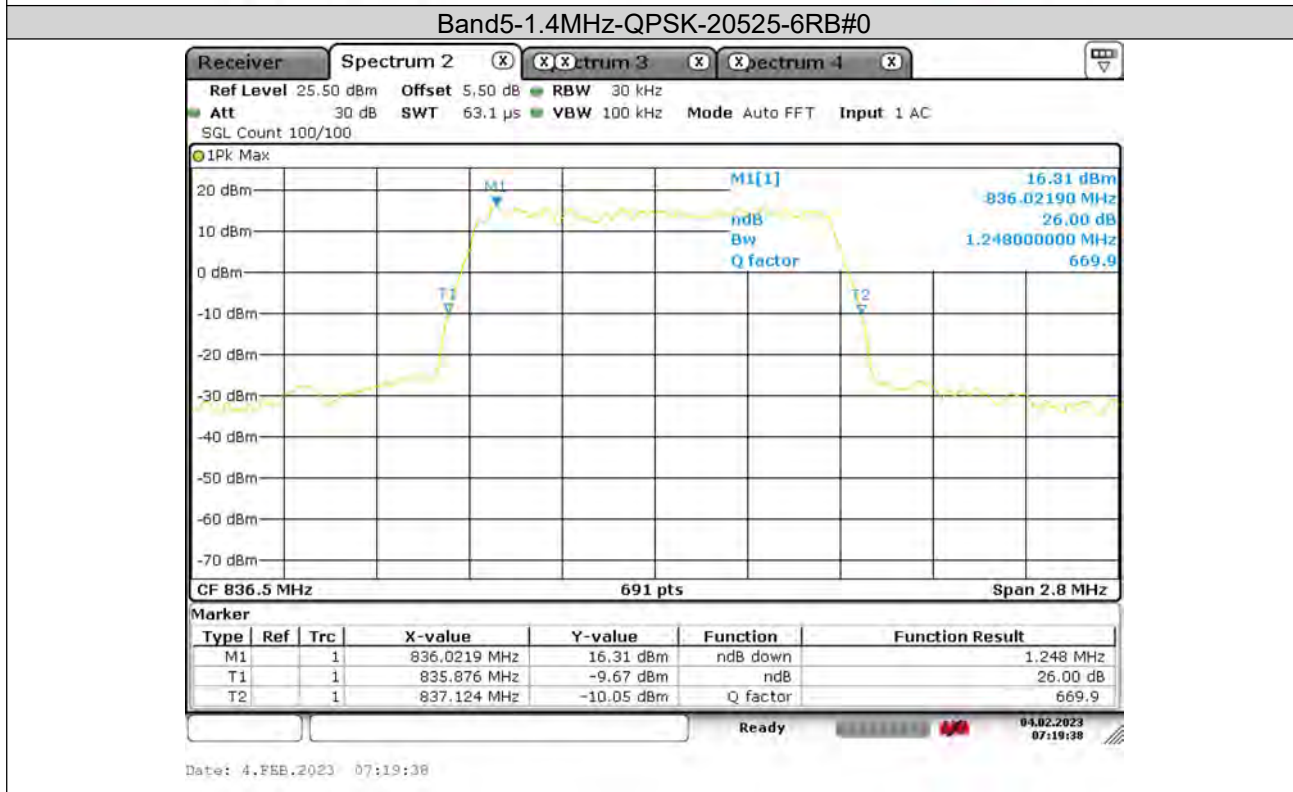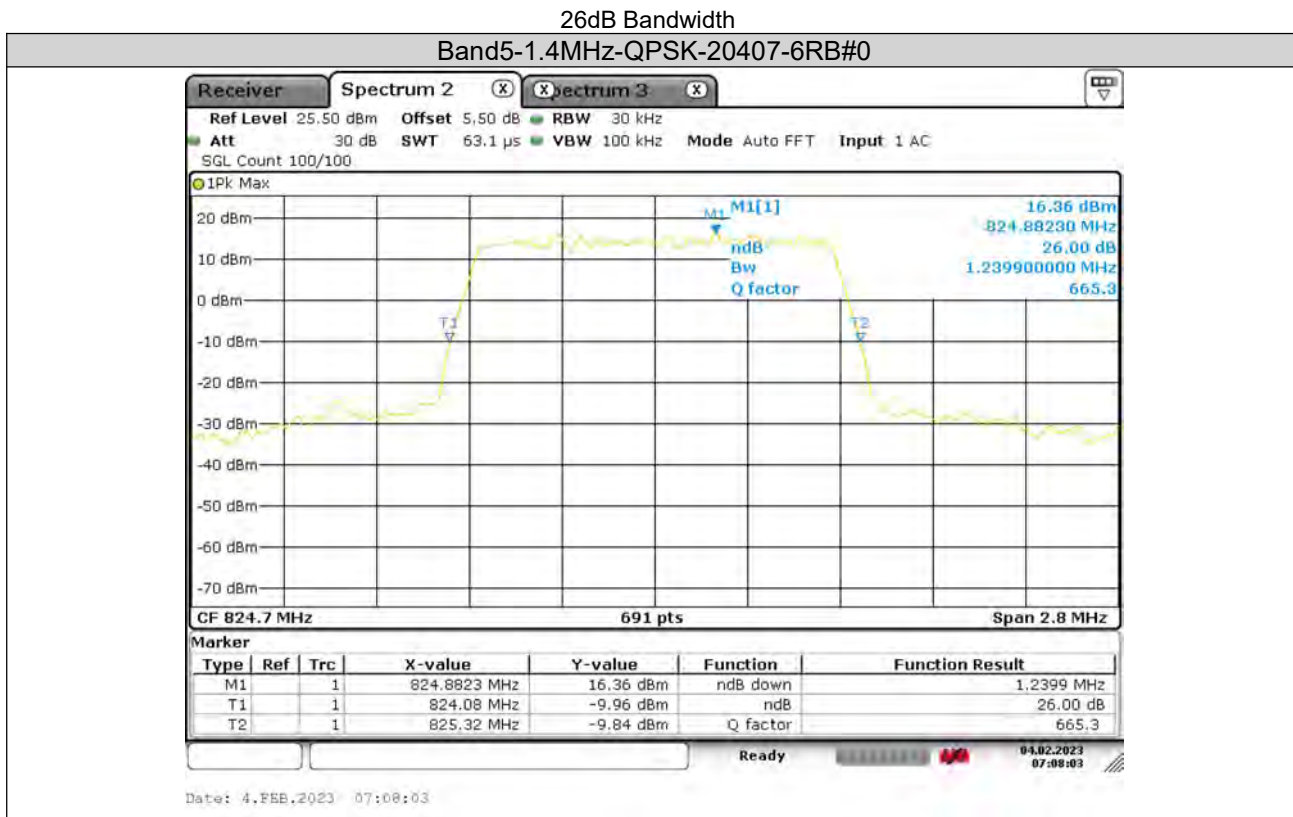




Test Report No.: PSU-QSU2308280314RF01

Band5-1.4MHz-QPSK-20643-6RB#0

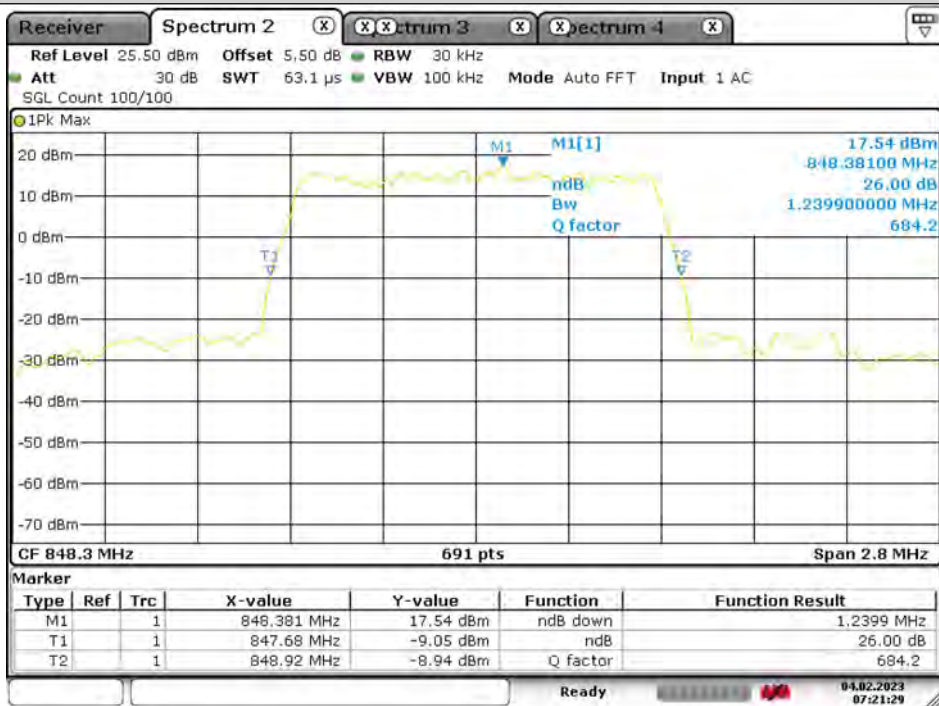

Date: 4.FEB.2023 07:21:29

Band5-1.4MHz-16QAM-20407-6RB#0

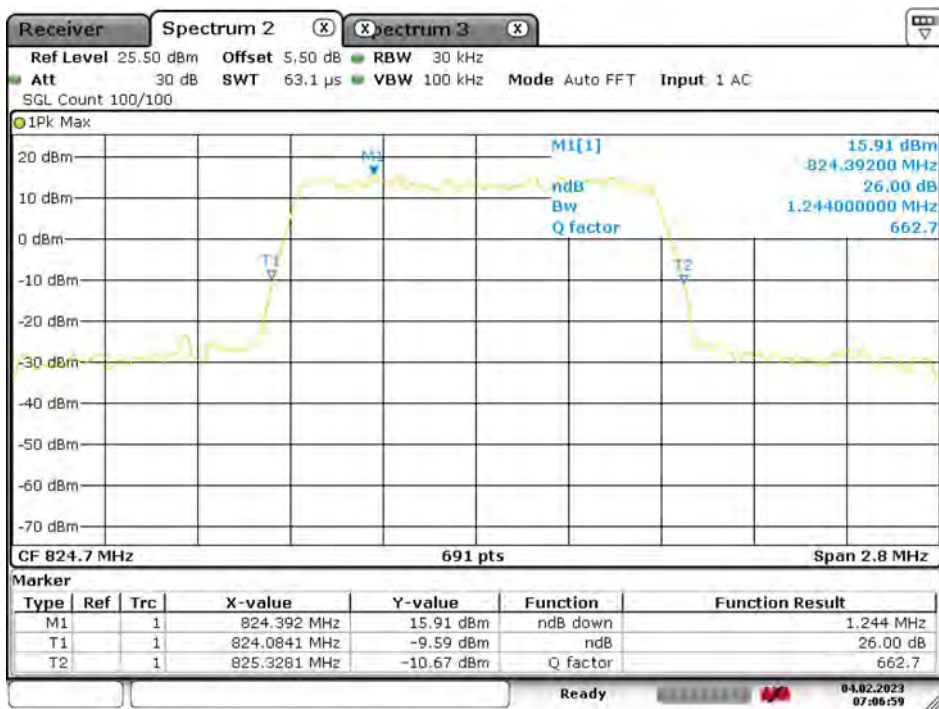



Date: 4.FEB.2023 07:06:59









Test Report No.: PSU-QSU2308280314RF01

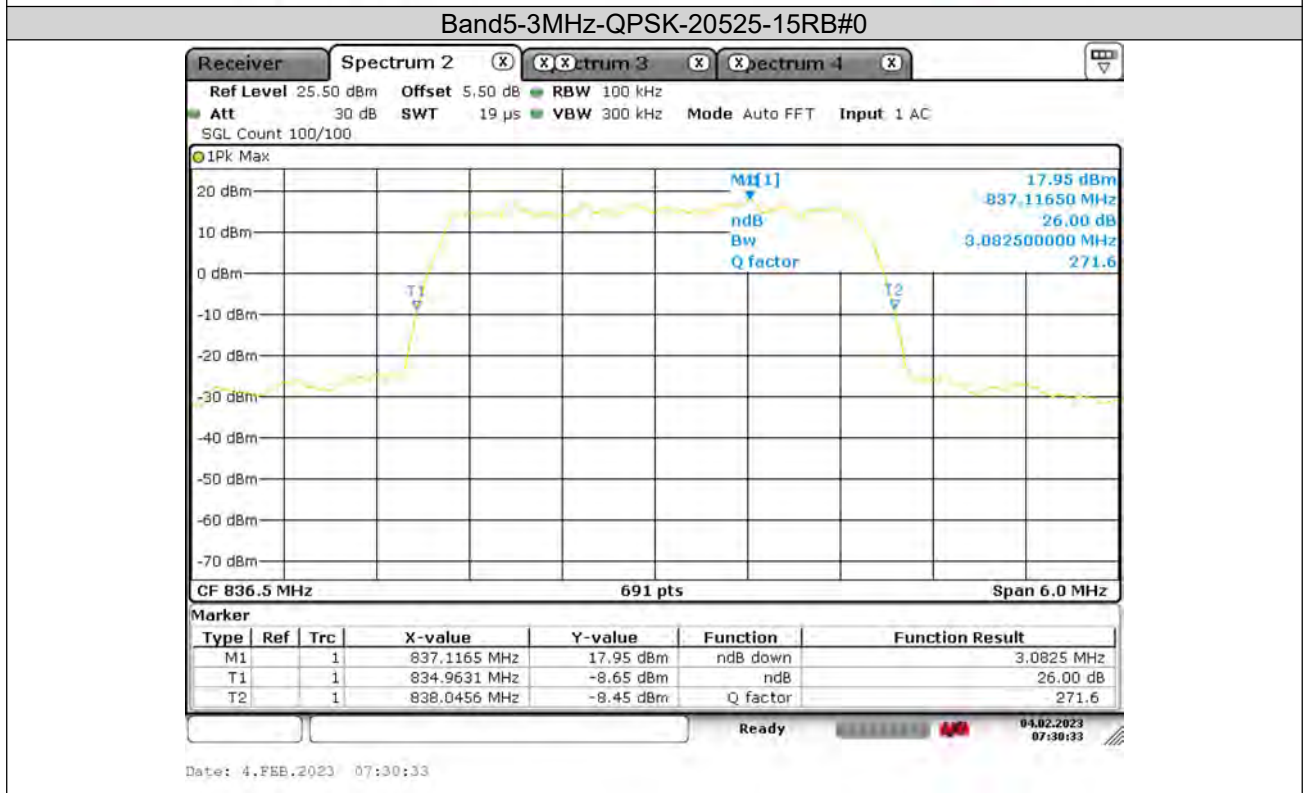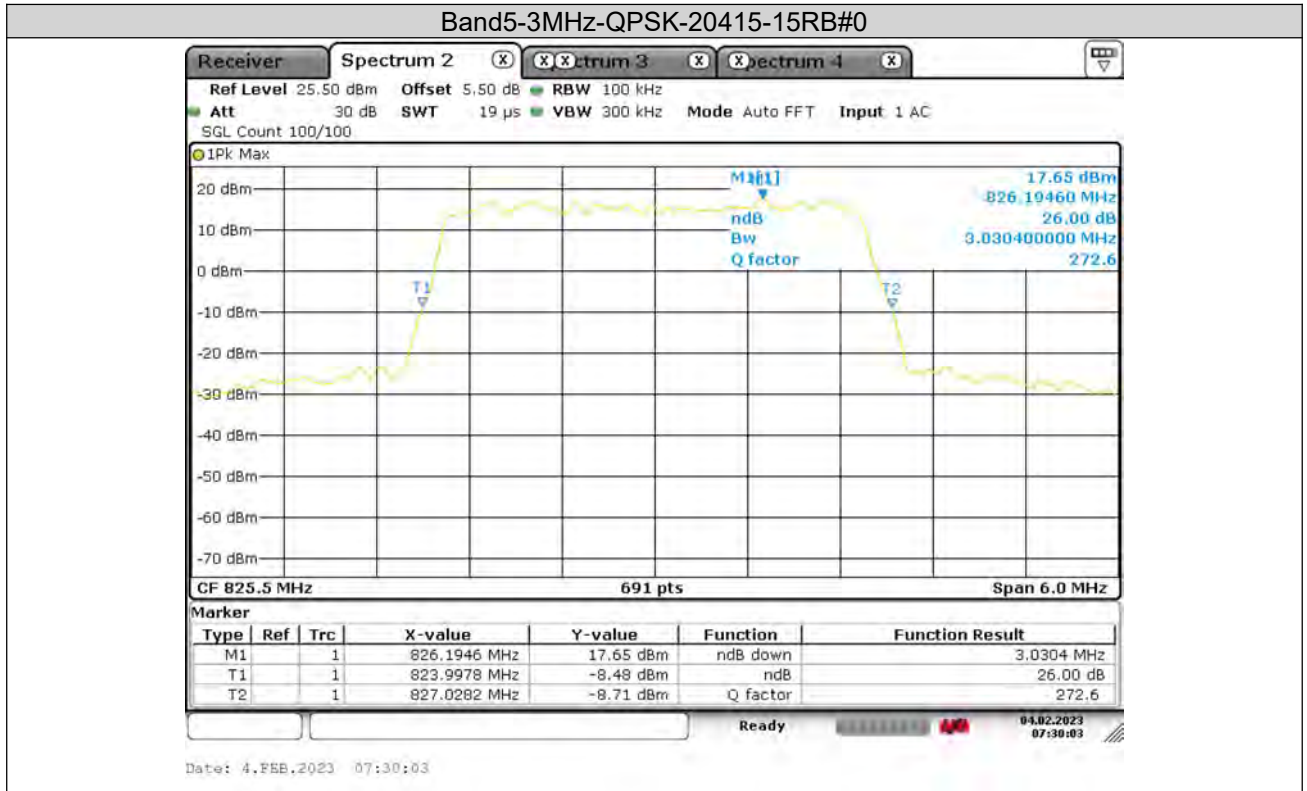







Test Report No.: PSU-QSU2308280314RF01

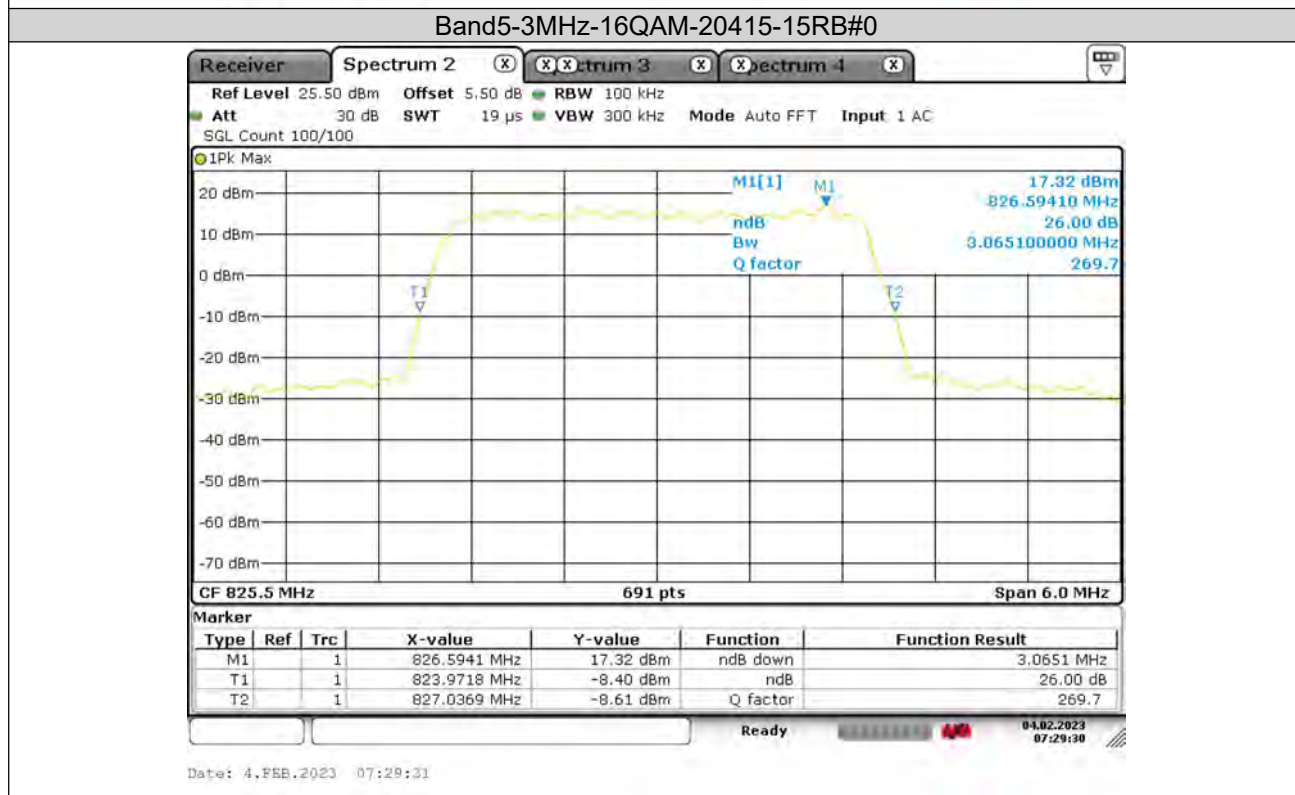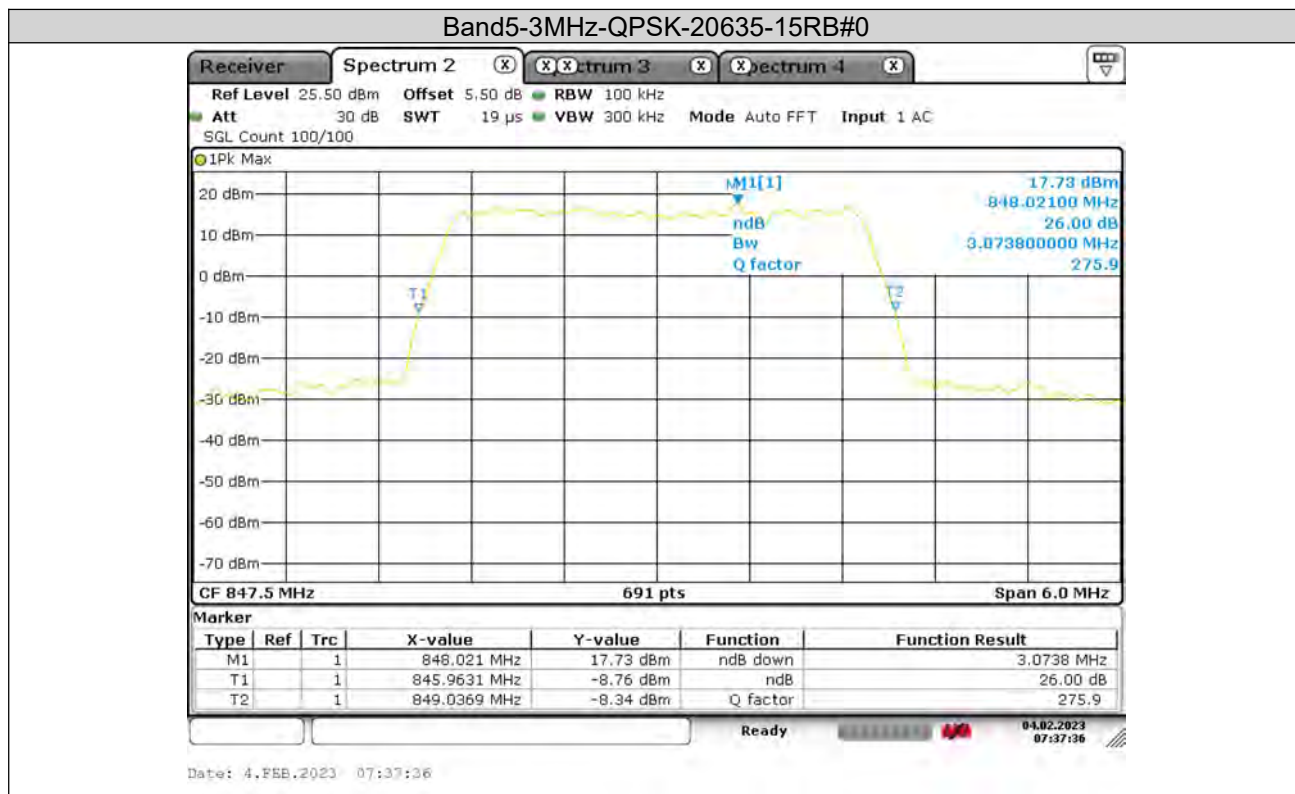



Test Report No.: PSU-QSU2308280314RF01

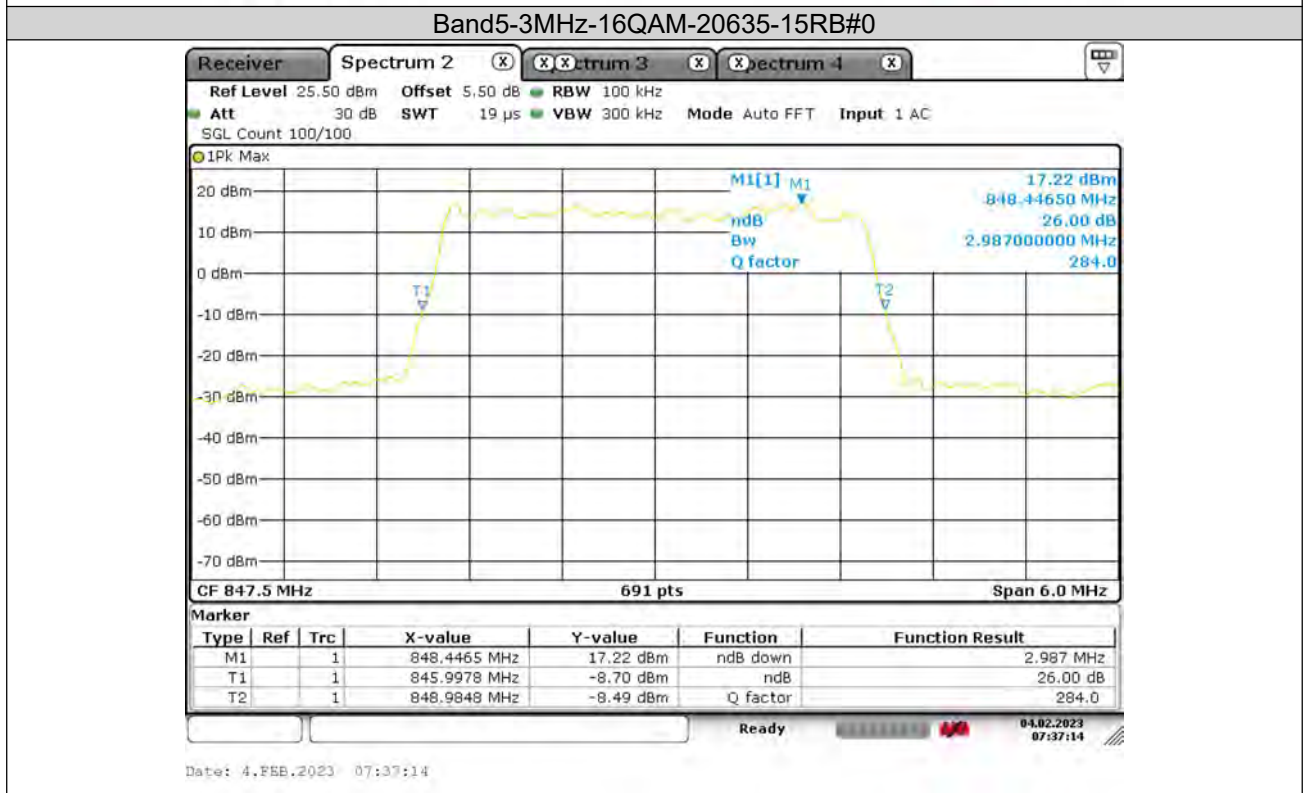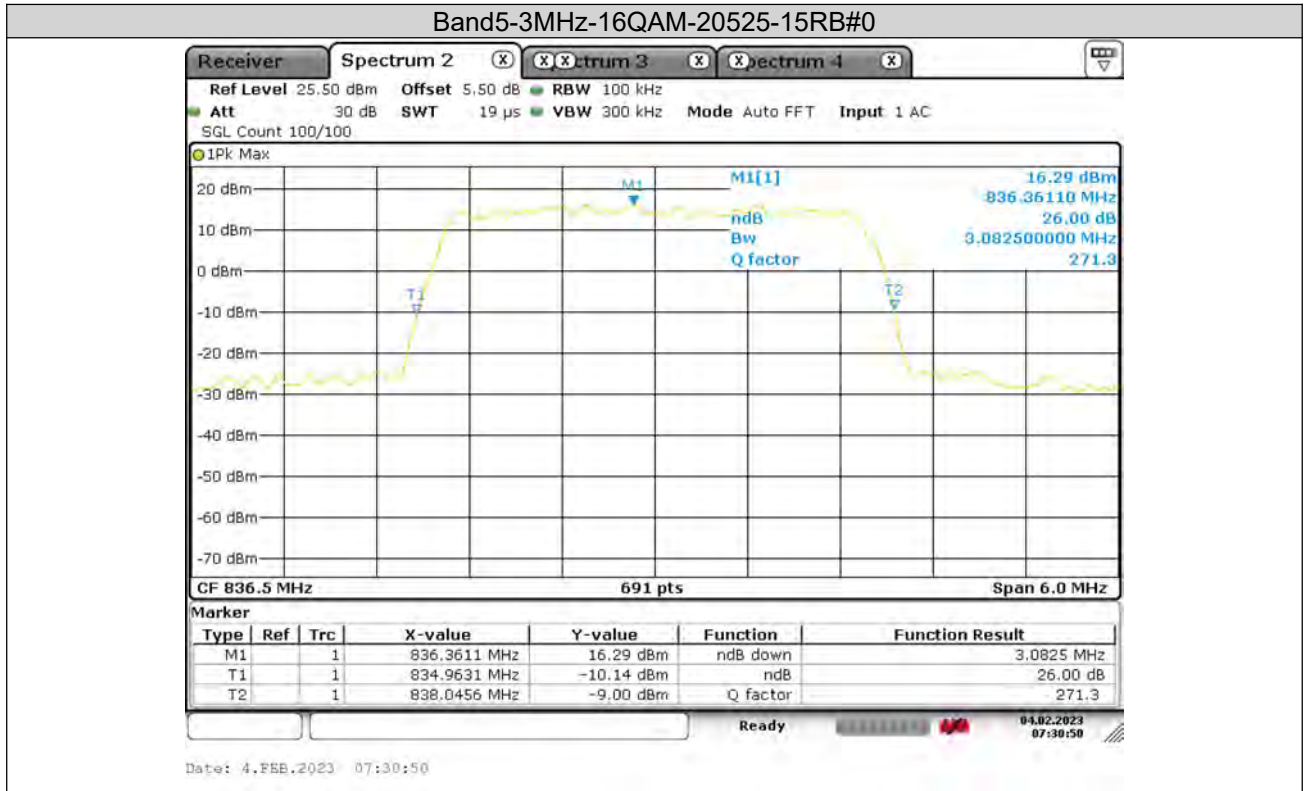









Test Report No.: PSU-QSU2308280314RF01

Band5-5MHz-QPSK-20625-25RB#0

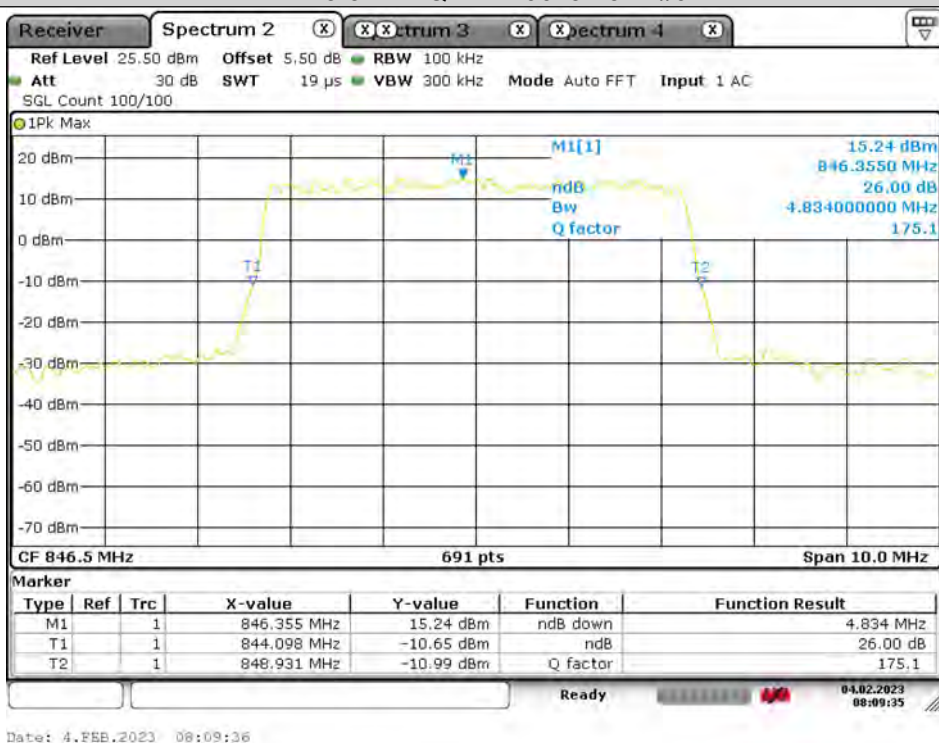

Band5-5MHz-16QAM-20425-25RB#0

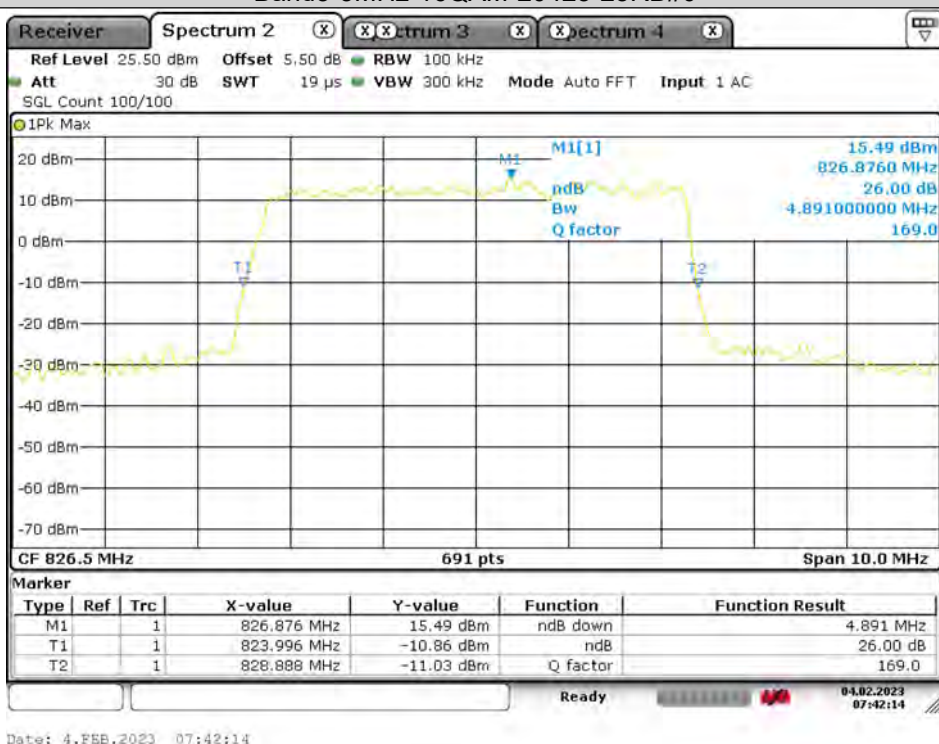



Test Report No.: PSU-QSU2308280314RF01

