



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,478.000	87.18			-0.88	V	194.3	1.00
6	2,483.500	32.45	54.00	21.55	-0.87	V	218.2	2.00
6	2,485.500	32.97	54.00	21.03	-0.86	V	1.9	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,478.000	92.57			-0.88	V	195.4	1.00
6	2,483.500	46.08	74.00	27.92	-0.87	V	17.8	2.00
6	2,497.500	46.76	74.00	27.24	-0.83	V	313.9	2.00



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2.478MHz: Fundamental frequency.




BUREAU VERITAS Test Report No.: PSU-NQN2403180115RF02

BT-LE _S2

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,387.000	50.31	74.00	23.69	-1.07	H	264.8	2.00
5	2,390.000	49.41	74.00	24.59	-1.05	H	241	1.00
5	2,402.000	86.19			-0.96	H	214.6	2.00

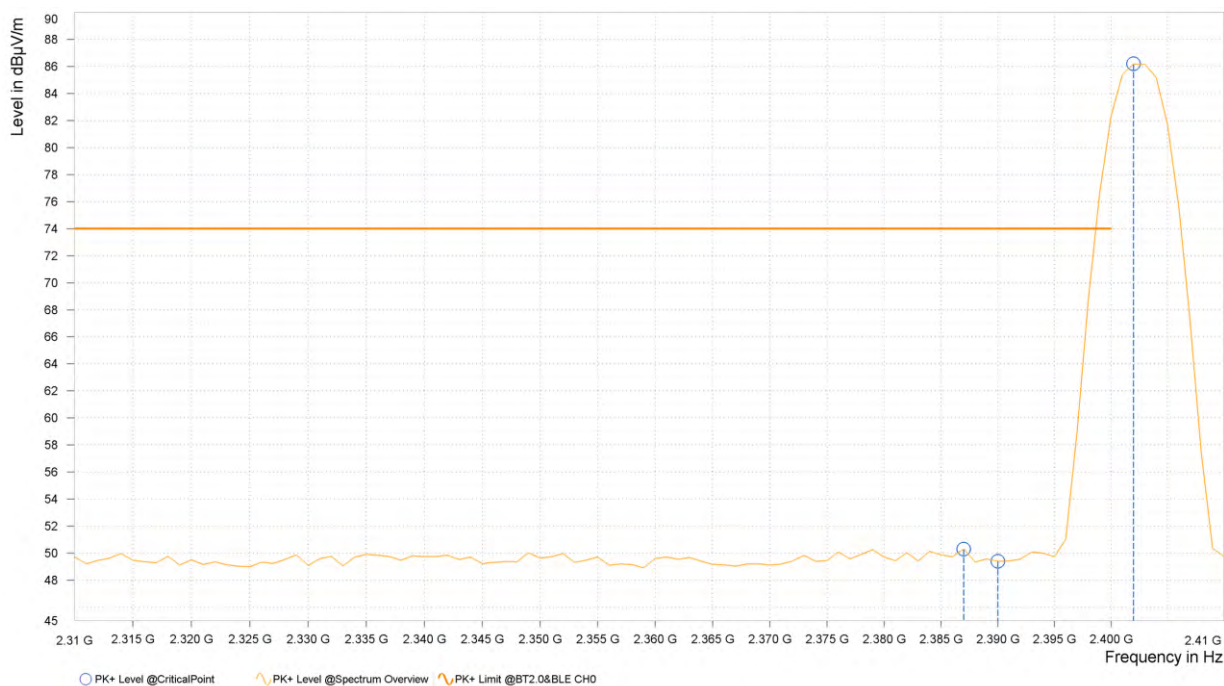



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,385.000	36.36	54.00	17.64	-1.09	H	157.4	1.00
5	2,390.000	36.27	54.00	17.73	-1.05	H	157.4	1.00
5	2,402.000	82.87			-0.96	H	215.8	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,387.000	36.33	54.00	17.67	-1.07	V	215.8	2.00
5	2,390.000	36.23	54.00	17.77	-1.05	V	215.8	2.00
5	2,402.000	90.04			-0.96	V	195.5	1.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,354.000	50.20	74.00	23.80	-1.25	V	292.4	1.00
5	2,390.000	48.95	74.00	25.05	-1.05	V	1	1.00
5	2,403.000	92.96			-0.95	V	193.1	1.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2402MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	49.61	74.00	24.39	38.54	54.00	15.46	13.54	H	359	1.00
2	7,320.000	54.74	74.00	19.26	44.18	54.00	9.82	18.90	H	29.5	2.00

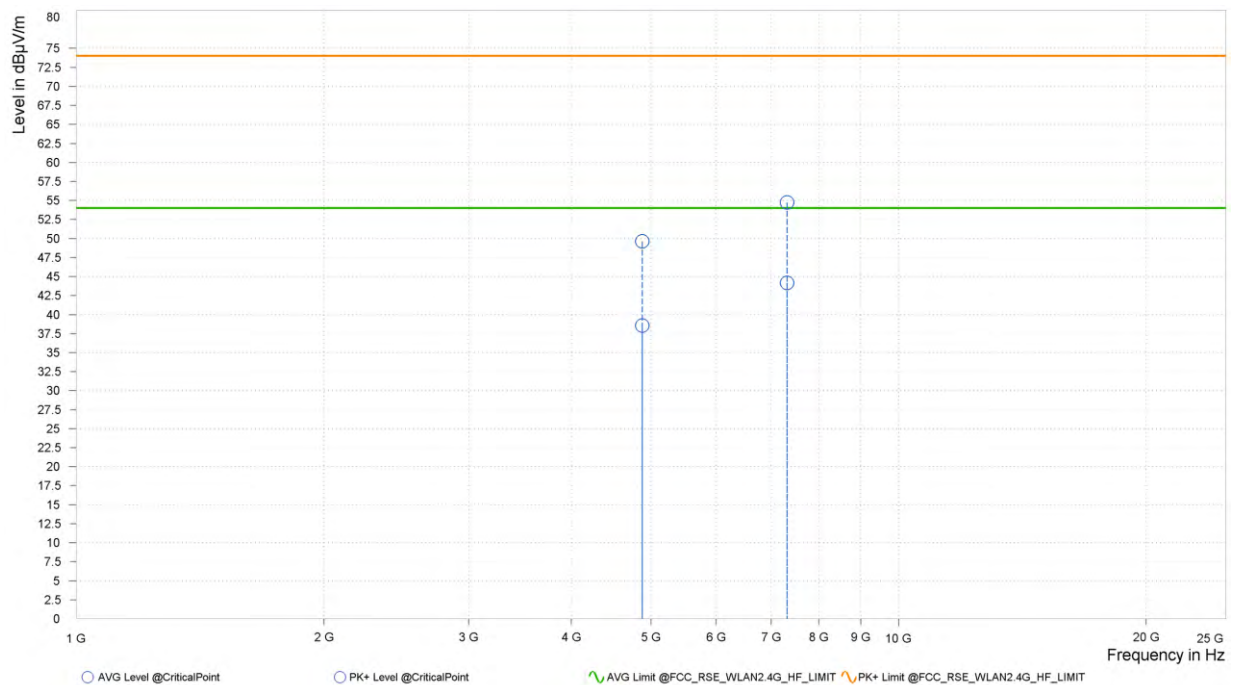




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	49.02	74.00	24.98	38.43	54.00	15.57	13.54	V	269.8	2.00
2	7,320.000	54.97	74.00	19.03	44.19	54.00	9.81	18.90	V	30.7	2.00

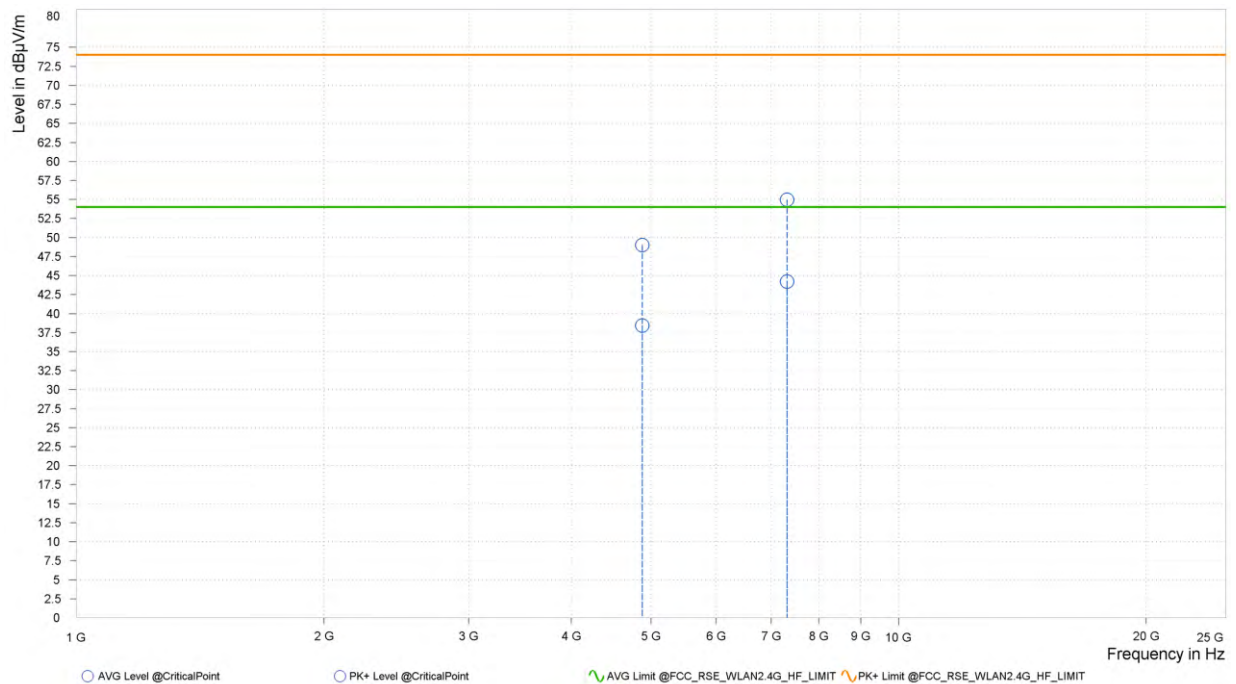

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2440MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.200	87.15			-0.88	H	213.4	2.00
6	2,483.500	45.17	74.00	28.83	-0.87	H	213.4	2.00
6	2,494.500	46.42	74.00	27.58	-0.84	H	147.7	1.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	80.95			-0.88	H	214.6	2.00
6	2,483.500	30.17	54.00	23.83	-0.87	H	1	1.00
6	2,485.920	30.21	54.00	23.79	-0.86	H	214.6	2.00






BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.540	92.45			-0.88	V	205.1	1.00
6	2,483.500	53.93	74.00	20.07	-0.87	V	264.9	2.00
6	2,484.160	53.74	74.00	20.26	-0.87	V	316.3	2.00

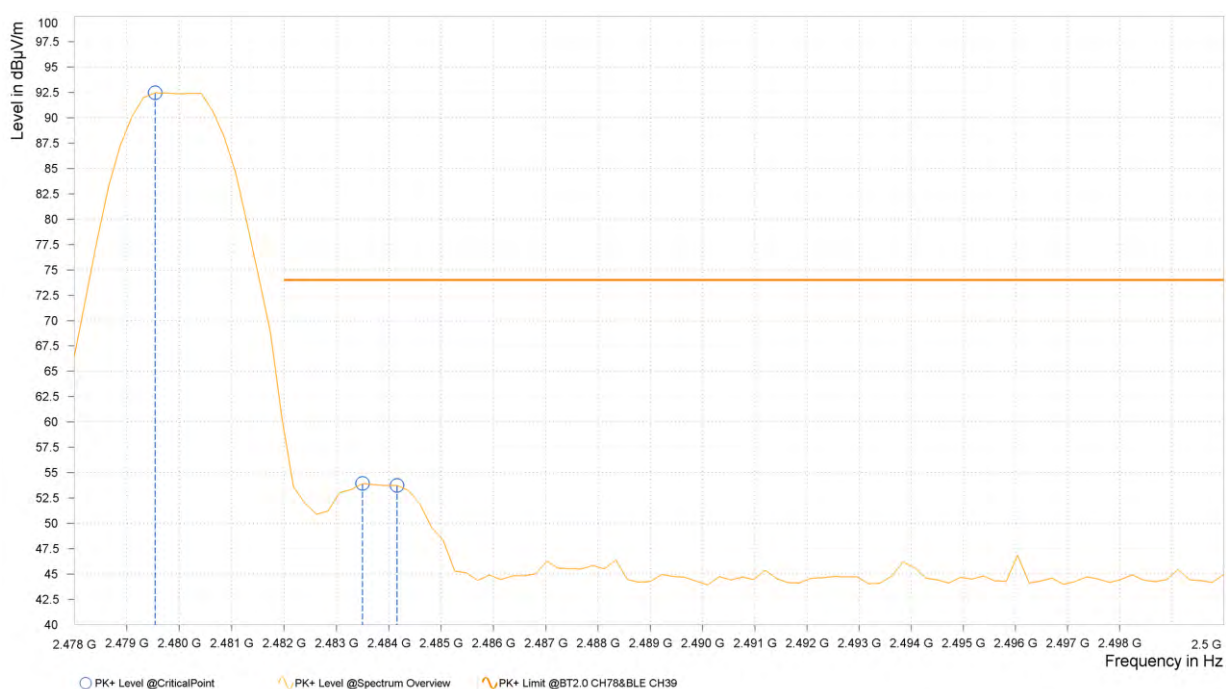



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	88.40			-0.88	V	352.6	1.00
6	2,483.500	30.36	54.00	23.64	-0.87	V	203.9	1.00
6	2,483.940	30.41	54.00	23.59	-0.87	V	0.9	2.00



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2480MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

BT-LE _S8

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,349.000	50.42	74.00	23.58	-1.26	H	2	2.00
5	2,390.000	49.21	74.00	24.79	-1.05	H	266.1	2.00
5	2,402.000	84.75			-0.96	H	217.1	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,385.000	34.89	54.00	19.11	-1.09	H	218.2	2.00
5	2,390.000	34.79	54.00	19.21	-1.05	H	143	1.00
5	2,402.000	84.27			-0.96	H	218.2	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,387.000	34.88	54.00	19.12	-1.07	V	215.8	2.00
5	2,390.000	34.78	54.00	19.22	-1.05	V	215.8	2.00
5	2,402.000	89.41			-0.96	V	144.2	1.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,346.000	50.48	74.00	23.52	-1.27	V	9.4	2.00
5	2,390.000	50.16	74.00	23.84	-1.05	V	95.2	1.00
5	2,402.000	93.32			-0.96	V	194.3	1.00



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2402MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	50.28	74.00	23.72	38.25	54.00	15.75	13.54	H	359.1	1.00
2	7,320.000	54.63	74.00	19.37	44.15	54.00	9.85	18.90	H	271.1	2.00

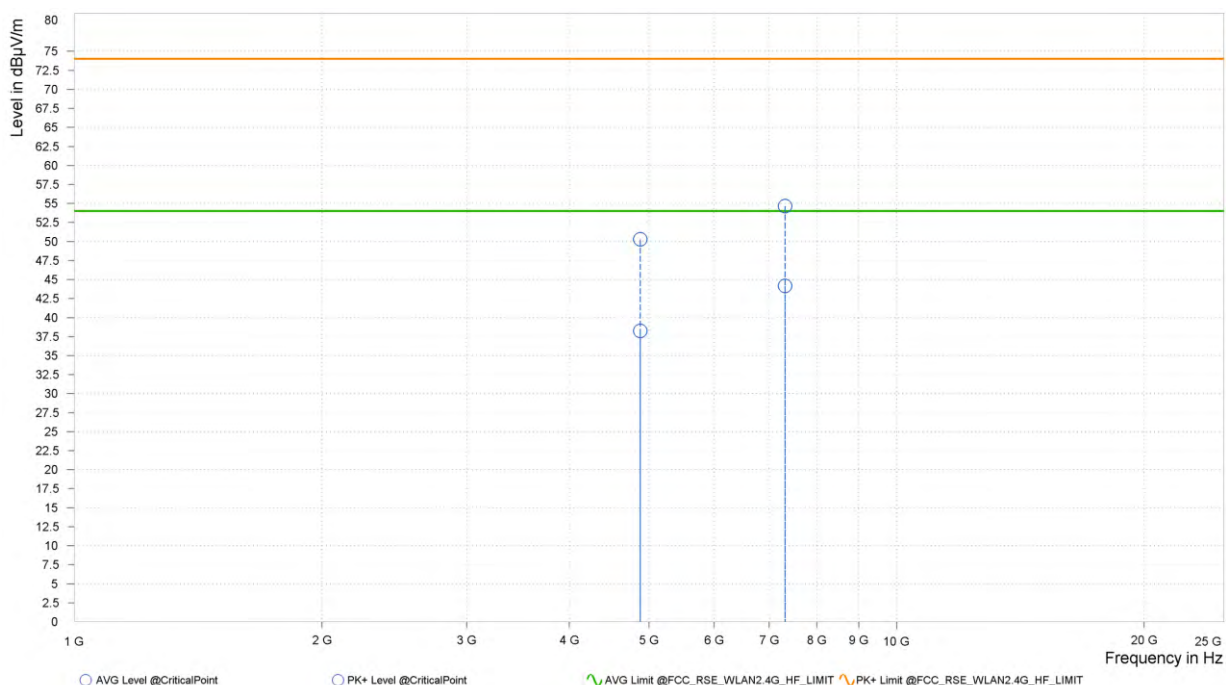

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	49.65	74.00	24.35	38.40	54.00	15.60	13.54	V	0.9	2.00
2	7,320.000	54.51	74.00	19.49	44.20	54.00	9.80	18.90	V	359.1	1.00

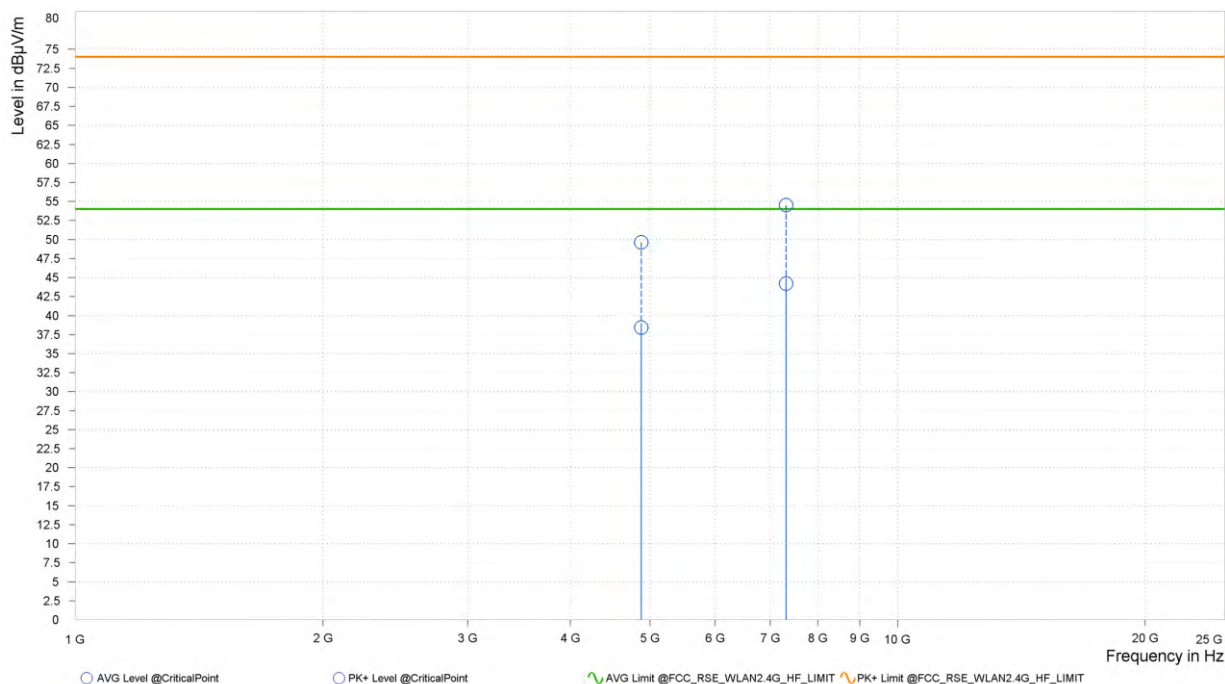

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2440MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.200	83.60			-0.88	H	214.6	2.00
6	2,483.500	43.96	74.00	30.04	-0.87	H	16.3	2.00
6	2,489.880	45.49	74.00	28.51	-0.85	H	359	1.00

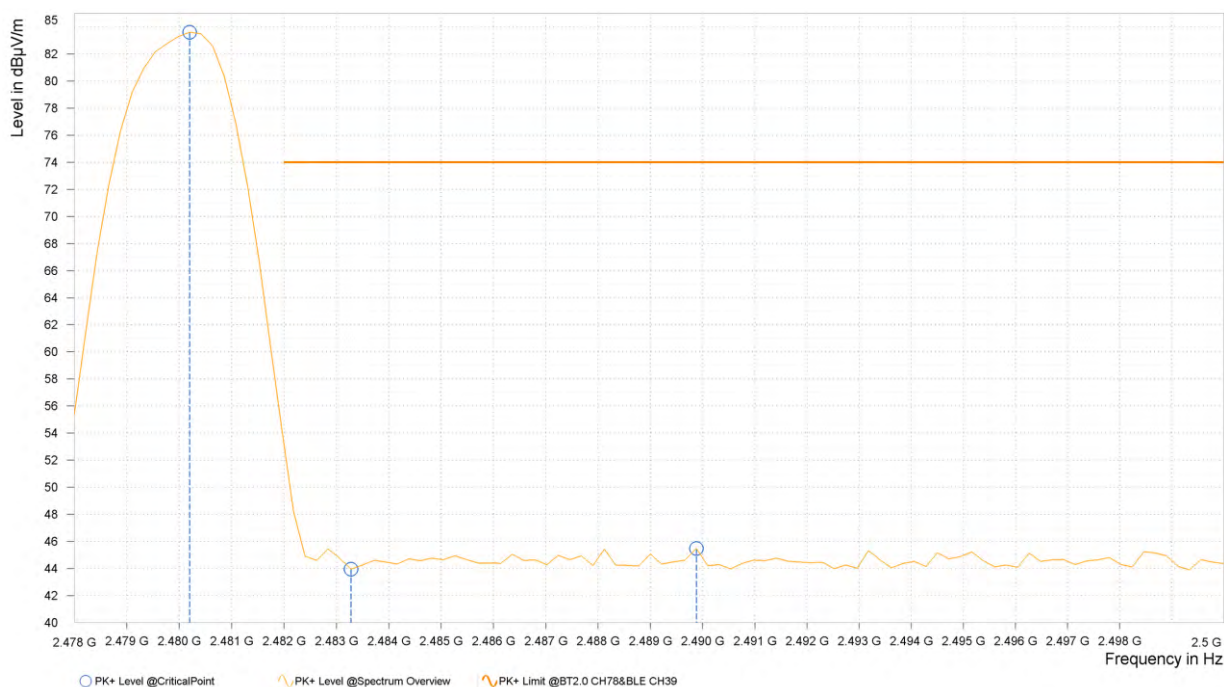



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	84.21			-0.88	H	205.1	2.00
6	2,483.500	30.98	54.00	23.02	-0.87	H	58.1	2.00
6	2,489.880	31.00	54.00	23.00	-0.85	H	44.9	1.00






BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.540	92.71			-0.88	V	194.4	1.00
6	2,483.500	52.88	74.00	21.12	-0.87	V	263.7	2.00
6	2,483.940	53.40	74.00	20.60	-0.87	V	263.7	2.00

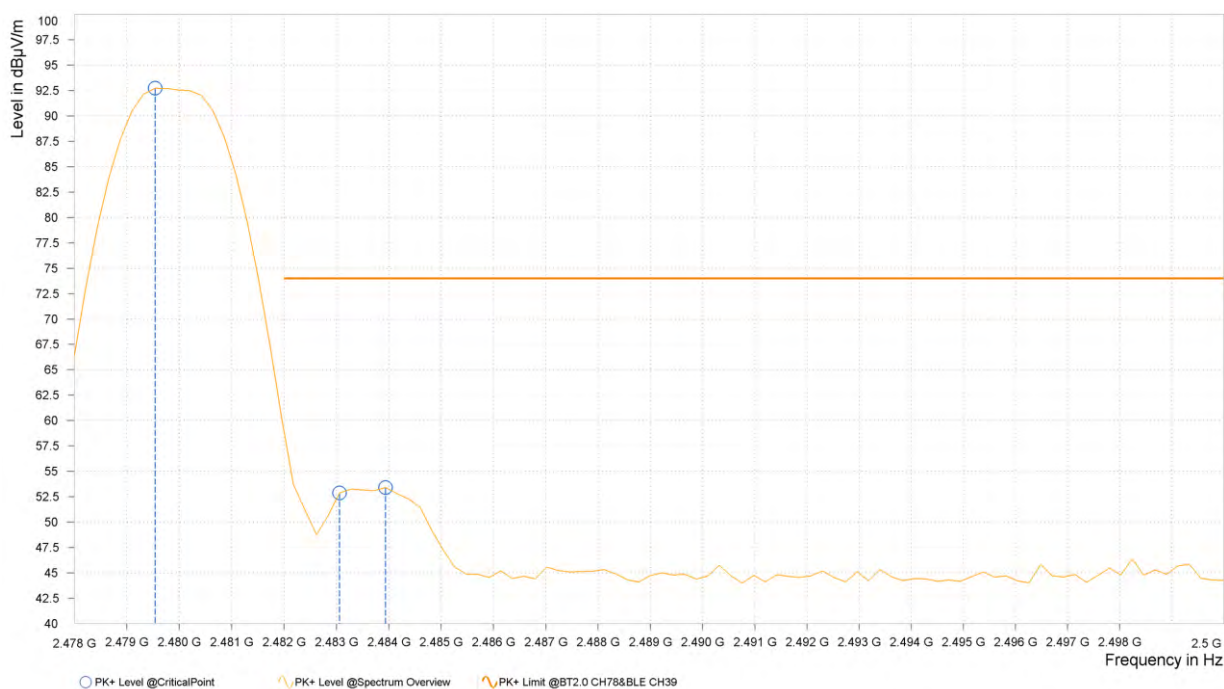



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	91.74			-0.88	V	191.9	1.00
6	2,483.500	31.18	54.00	22.82	-0.87	V	217	2.00
6	2,483.940	31.11	54.00	22.89	-0.87	V	2	2.00



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2480MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHAIN 1:

BT-LE _1M

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,346.000	51.19	74.00	22.81	-1.27	H	194.2	1.00
5	2,390.000	49.26	74.00	24.74	-1.05	H	1	1.00
5	2,403.000	84.29			-0.95	H	214.6	2.00



BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,387.000	34.94	54.00	19.06	-1.07	H	44.9	1.00
5	2,390.000	34.84	54.00	19.16	-1.05	H	194.2	1.00
5	2,402.000	78.29			-0.96	H	1.8	2.00






BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,388.000	50.46	74.00	23.54	-1.06	V	5	1.00
5	2,390.000	49.27	74.00	24.73	-1.05	V	315.2	2.00
5	2,403.000	92.19			-0.95	V	193.1	1.00

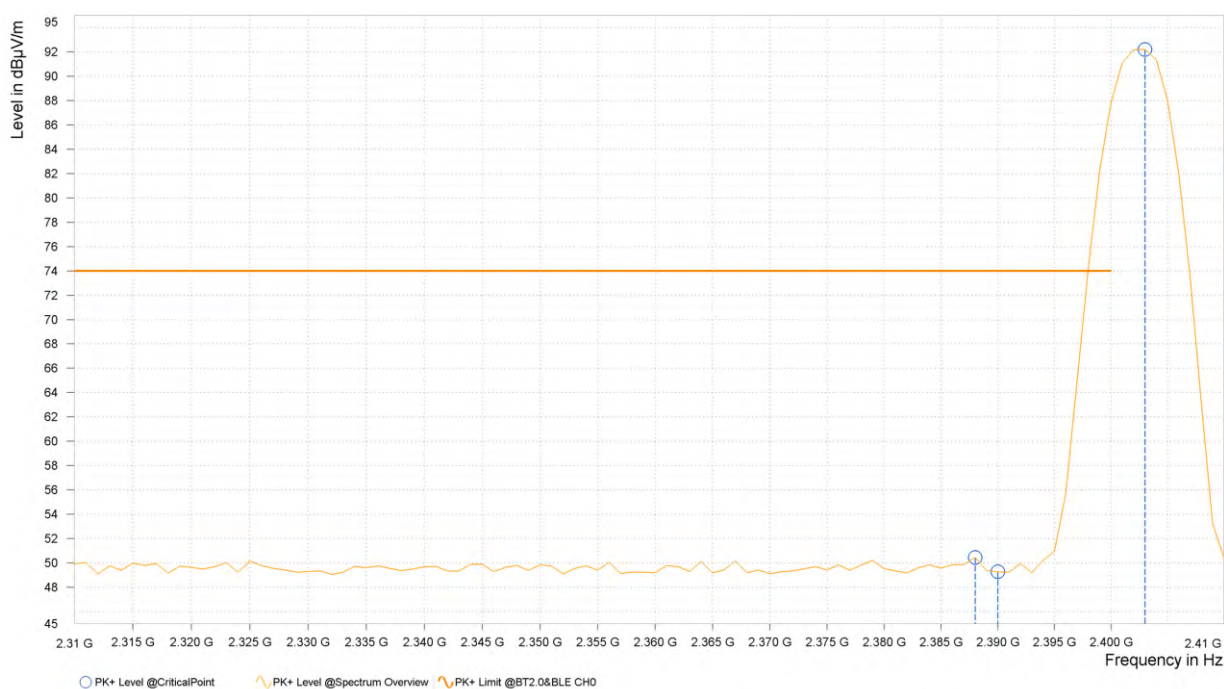



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,387.000	34.91	54.00	19.09	-1.07	V	1	1.00
5	2,390.000	34.83	54.00	19.17	-1.05	V	144.1	1.00
5	2,402.000	87.26			-0.96	V	194.2	1.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2402MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	48.82	74.00	25.18	37.87	54.00	16.13	13.54	H	29.5	2.00
2	7,320.000	55.50	74.00	18.50	43.79	54.00	10.21	18.90	H	1	2.00

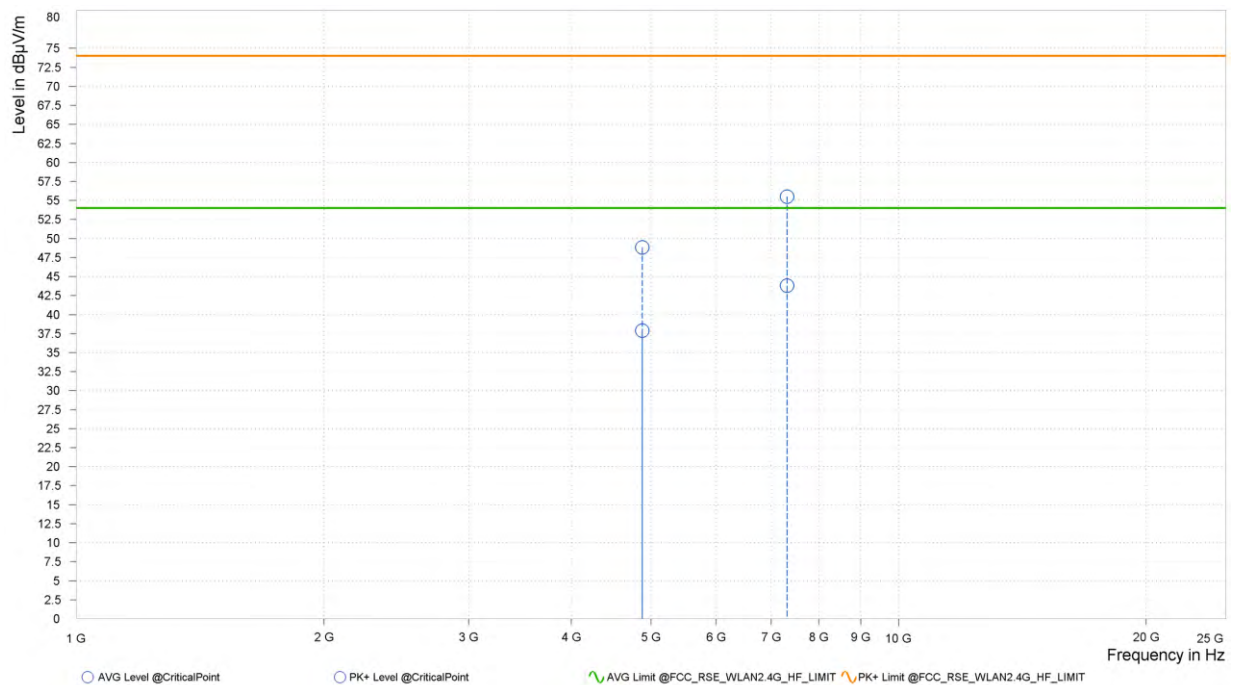




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	48.37	74.00	25.63	37.85	54.00	16.15	13.54	V	24.7	2.00
2	7,320.000	55.28	74.00	18.72	43.80	54.00	10.20	18.90	V	24.7	2.00

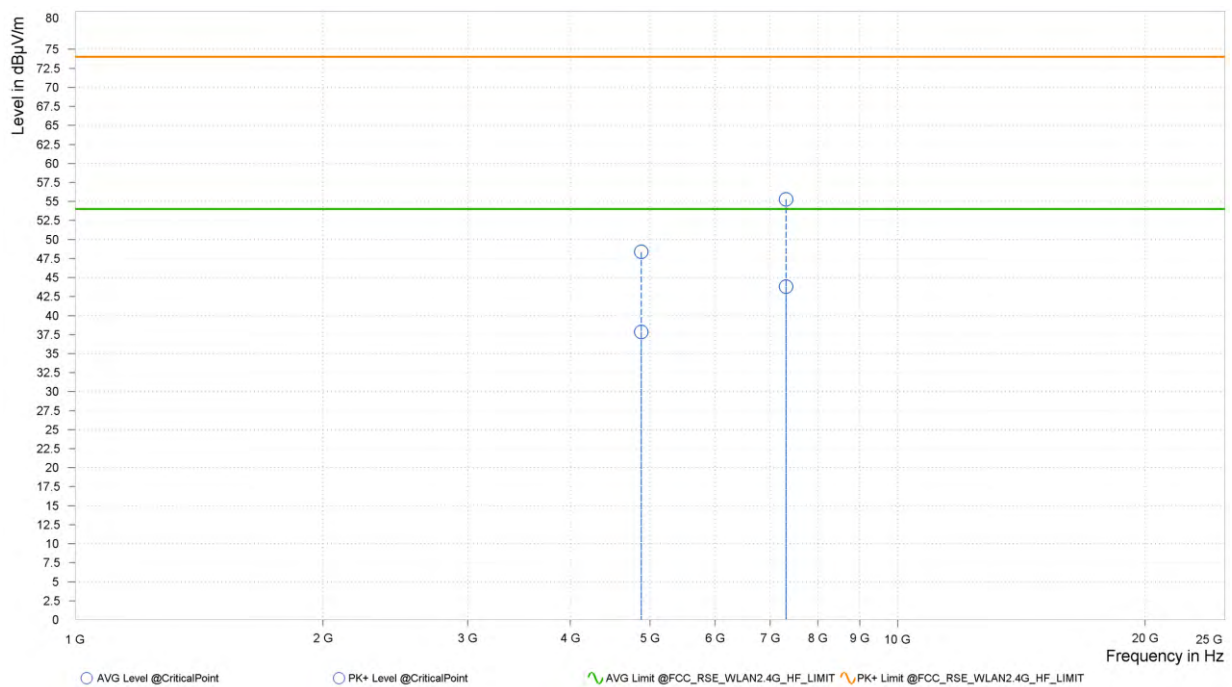

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2440MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.200	84.43			-0.88	H	207.5	2.00
6	2,483.500	44.25	74.00	29.75	-0.87	H	7.4	2.00
6	2,487.900	46.19	74.00	27.81	-0.86	H	0.8	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	78.25			-0.88	H	215.8	2.00
6	2,483.500	30.21	54.00	23.79	-0.87	H	1	1.00
6	2,496.920	30.31	54.00	23.69	-0.83	H	215.8	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	92.35			-0.88	V	214.6	2.00
6	2,483.500	50.80	74.00	23.20	-0.87	V	315.1	2.00
6	2,484.160	50.42	74.00	23.58	-0.87	V	266.1	2.00





**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	86.49			-0.88	V	264.8	2.00
6	2,483.500	40.16	54.00	13.84	-0.87	V	315.1	2.00
6	2,483.940	40.76	54.00	13.24	-0.87	V	315.1	2.00



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2480MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

BT-LE _2M

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,327.000	50.52	74.00	23.48	-1.33	H	358.2	1.00
5	2,390.000	49.38	74.00	24.62	-1.05	H	1	1.00
5	2,404.000	84.64			-0.94	H	19.6	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,386.000	34.91	54.00	19.09	-1.08	H	264.8	2.00
5	2,390.000	34.78	54.00	19.22	-1.05	H	44.9	1.00
5	2,404.000	72.50			-0.94	H	214.6	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,385.000	34.85	54.00	19.15	-1.09	V	132.2	1.00
5	2,390.000	34.76	54.00	19.24	-1.05	V	79.6	1.00
5	2,404.000	78.53			-0.94	V	359	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,377.000	50.51	74.00	23.49	-1.15	V	4.6	2.00
5	2,390.000	49.70	74.00	24.30	-1.05	V	359.1	1.00
5	2,405.000	94.00			-0.93	V	193.1	1.00



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2404MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	49.23	74.00	24.77	37.82	54.00	16.18	13.54	H	1	2.00
2	7,320.000	54.67	74.00	19.33	43.88	54.00	10.12	18.90	H	359	2.00

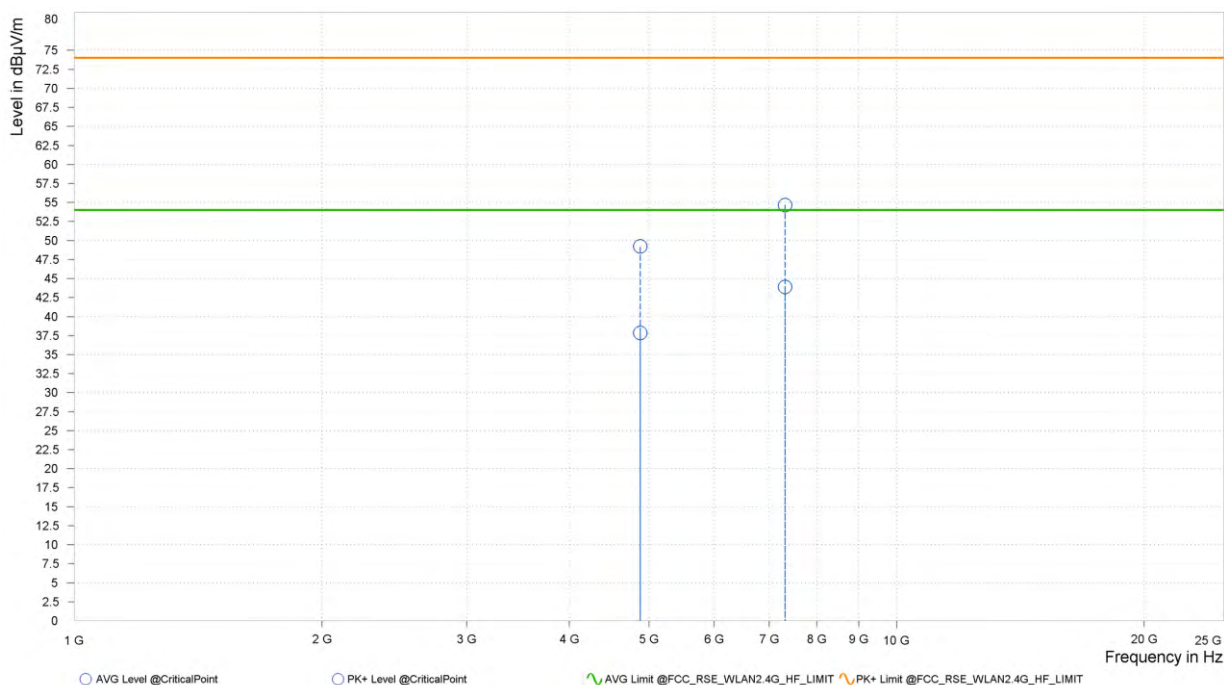




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	48.97	74.00	25.03	38.02	54.00	15.98	13.54	V	359	2.00
2	7,320.000	54.41	74.00	19.59	43.75	54.00	10.25	18.90	V	359	2.00

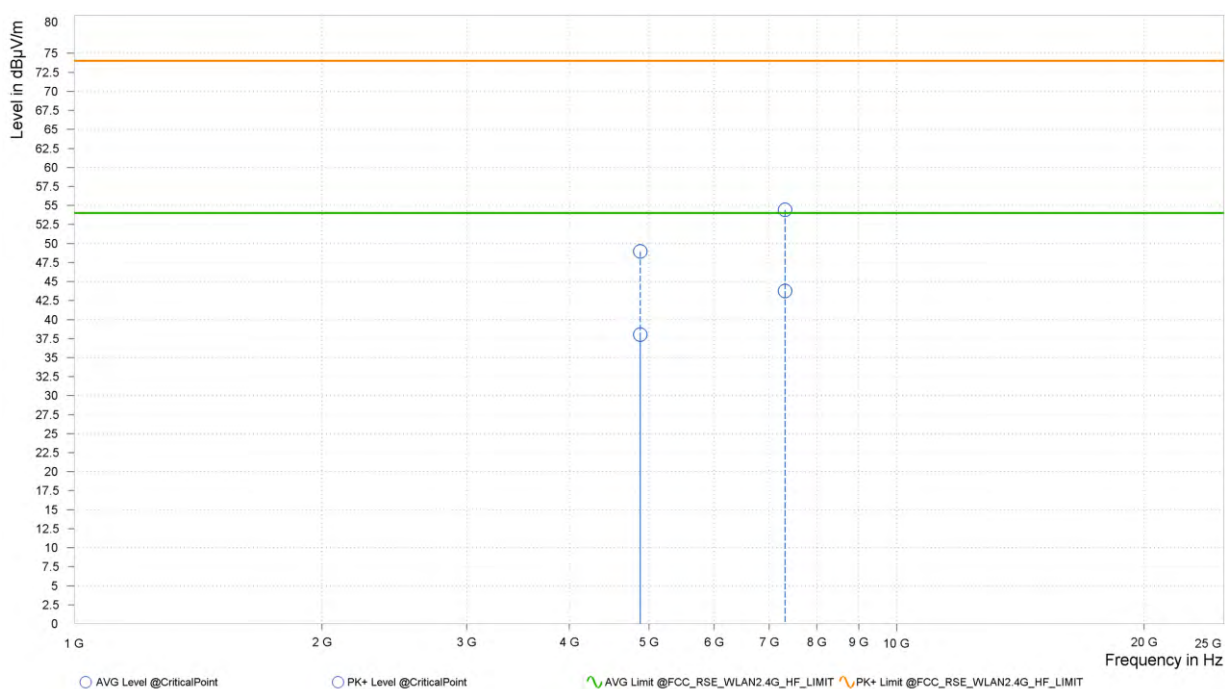

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2440MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,477.500	82.44			-0.88	H	214.7	2.00
6	2,483.500	45.55	74.00	28.45	-0.87	H	0.9	2.00
6	2,497.250	45.90	74.00	28.10	-0.83	H	144.2	1.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,478.000	69.45			-0.88	H	214.6	2.00
6	2,483.500	30.19	54.00	23.81	-0.87	H	145.4	1.00
6	2,497.500	30.19	54.00	23.81	-0.83	H	214.6	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,478.500	92.22			-0.88	V	264.9	2.00
6	2,483.500	44.97	74.00	29.03	-0.87	V	355	2.00
6	2,491.250	47.17	74.00	26.83	-0.85	V	0.8	2.00





**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,478.000	76.98			-0.88	V	314	2.00
6	2,483.500	30.70	54.00	23.30	-0.87	V	355	2.00
6	2,485.500	30.46	54.00	23.54	-0.86	V	13.5	2.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2478MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

BT-LE_S2

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,383.000	50.48	74.00	23.52	-1.10	H	1.5	2.00
5	2,390.000	49.71	74.00	24.29	-1.05	H	264.9	2.00
5	2,402.000	84.85			-0.96	H	213.4	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,385.000	34.88	54.00	19.12	-1.09	H	263.7	2.00
5	2,390.000	34.74	54.00	19.26	-1.05	H	263.7	2.00
5	2,402.000	79.48			-0.96	H	214.7	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,369.000	51.09	74.00	22.91	-1.20	V	5.1	1.00
5	2,390.000	49.44	74.00	24.56	-1.05	V	65.2	2.00
5	2,402.000	93.96			-0.96	V	195.5	1.00





**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,385.000	34.81	54.00	19.19	-1.09	V	96.3	1.00
5	2,390.000	34.73	54.00	19.27	-1.05	V	145.3	1.00
5	2,402.000	89.23			-0.96	V	196.6	1.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2402MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	49.36	74.00	24.64	37.99	54.00	16.01	13.54	H	269.8	2.00
2	7,320.000	55.45	74.00	18.55	43.88	54.00	10.12	18.90	H	0.9	2.00

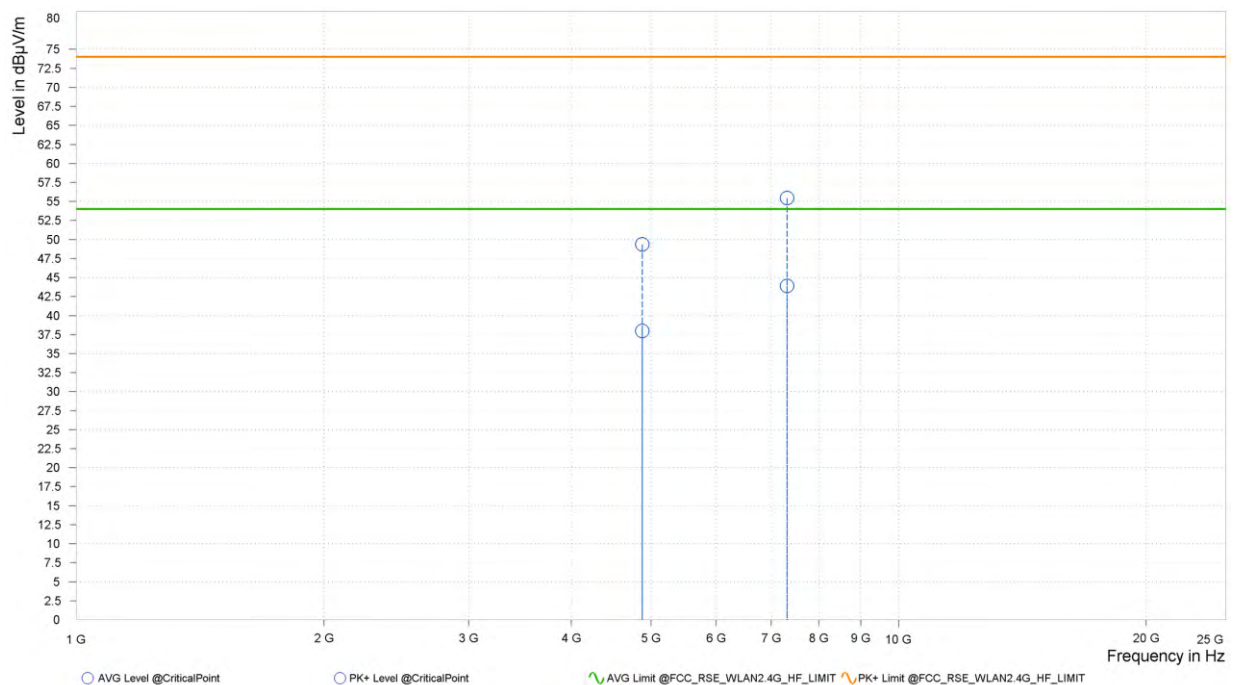

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	48.65	74.00	25.35	37.94	54.00	16.06	13.54	V	97.3	1.00
2	7,320.000	54.61	74.00	19.39	43.92	54.00	10.08	18.90	V	0.9	2.00

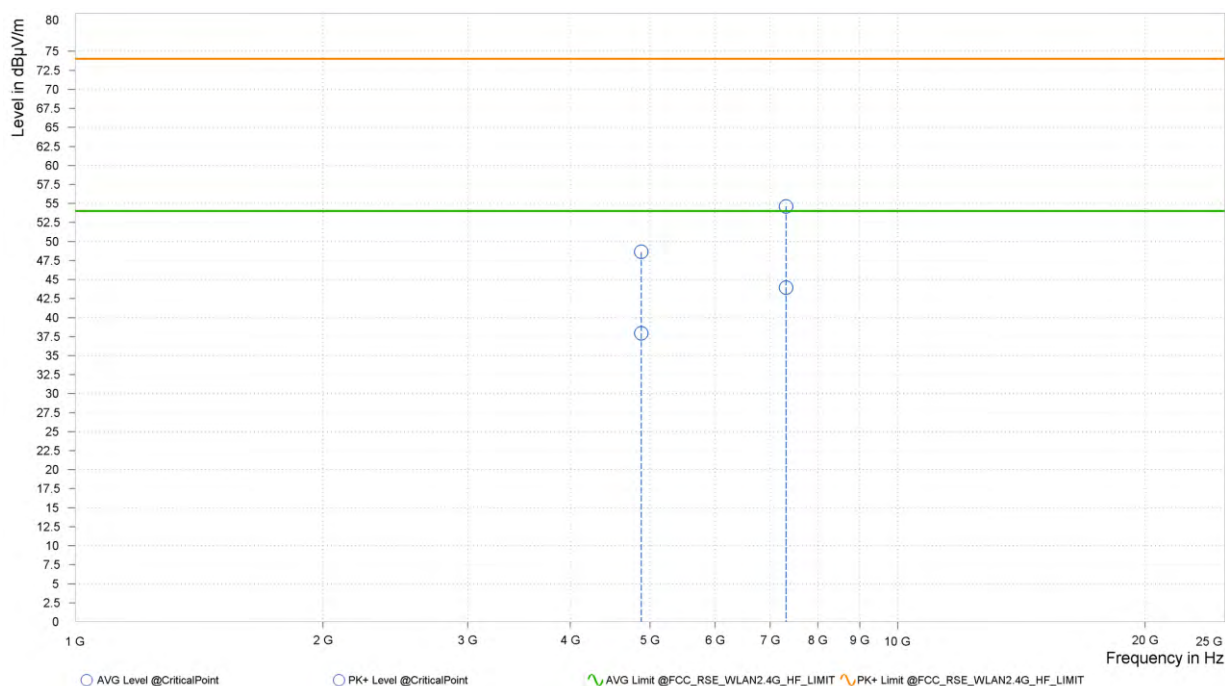

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2440MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.540	83.19			-0.88	H	212.2	2.00
6	2,483.500	44.19	74.00	29.81	-0.87	H	359	2.00
6	2,491.860	46.18	74.00	27.82	-0.84	H	212.2	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	77.74			-0.88	H	212.2	2.00
6	2,483.500	30.16	54.00	23.84	-0.87	H	96.4	1.00
6	2,496.700	30.22	54.00	23.78	-0.83	H	212.2	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.200	92.14			-0.88	V	311.6	2.00
6	2,483.500	51.49	74.00	22.51	-0.87	V	19.6	2.00
6	2,483.720	51.60	74.00	22.40	-0.87	V	19.6	2.00






**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	87.94			-0.88	V	212.3	2.00
6	2,483.500	32.08	54.00	21.92	-0.87	V	0.9	2.00
6	2,484.160	32.21	54.00	21.79	-0.87	V	0.9	2.00

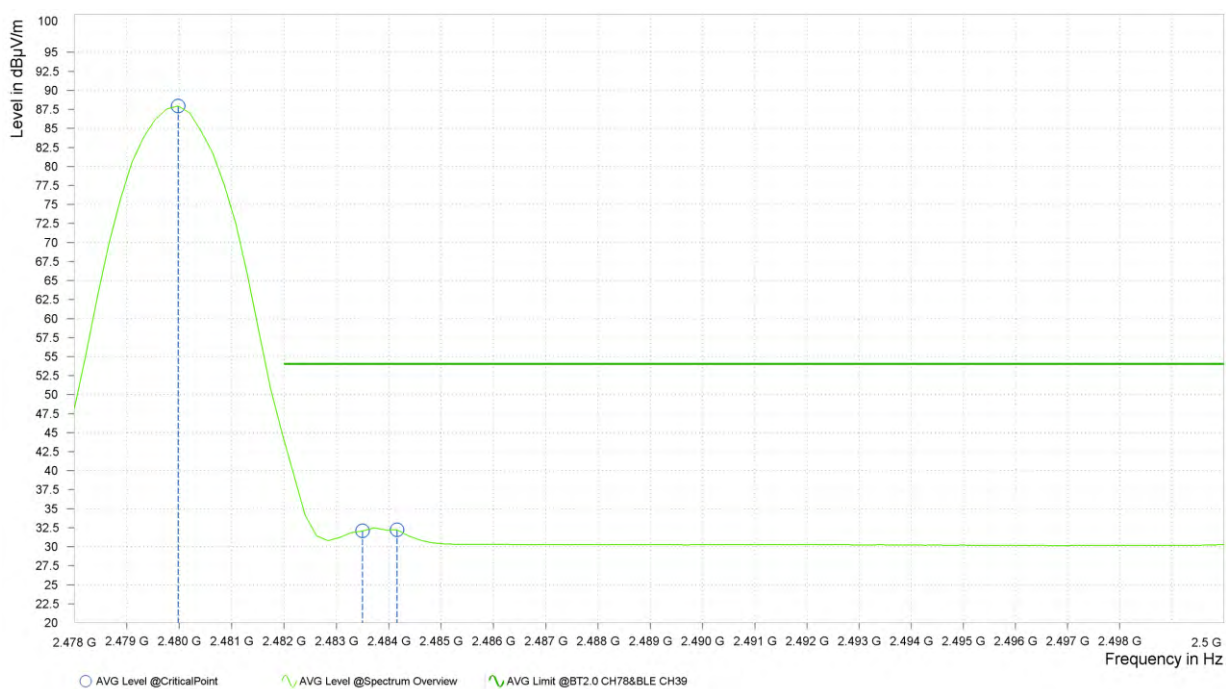

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2480MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

BT-LE_S8

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,343.000	50.63	74.00	23.37	-1.28	H	217	2.00
5	2,390.000	49.39	74.00	24.61	-1.05	H	1	1.00
5	2,403.000	84.22			-0.95	H	217	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,386.000	34.95	54.00	19.05	-1.08	H	264.9	2.00
5	2,390.000	34.82	54.00	19.18	-1.05	H	264.9	2.00
5	2,402.000	82.85			-0.96	H	264.9	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,366.000	50.68	74.00	23.32	-1.21	V	264.9	2.00
5	2,390.000	49.47	74.00	24.53	-1.05	V	351.8	1.00
5	2,402.000	92.16			-0.96	V	211.1	1.00





**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,384.000	34.90	54.00	19.10	-1.09	V	214.7	2.00
5	2,390.000	34.81	54.00	19.19	-1.05	V	214.7	2.00
5	2,403.000	90.86			-0.95	V	195.5	1.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2402MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	49.89	74.00	24.11	38.04	54.00	15.96	13.54	H	269.8	2.00
2	7,320.000	54.98	74.00	19.02	43.80	54.00	10.20	18.90	H	90.1	1.00

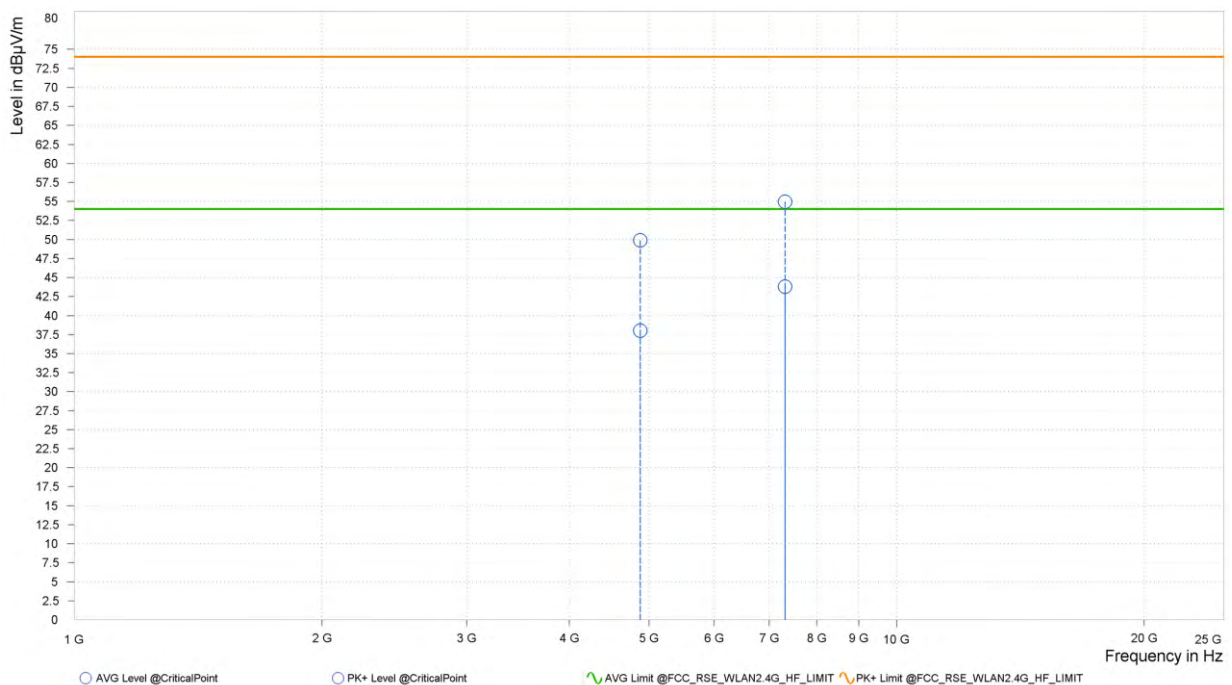




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	48.88	74.00	25.12	38.14	54.00	15.86	13.54	V	359	2.00
2	7,320.000	55.08	74.00	18.92	44.09	54.00	9.91	18.90	V	0.9	2.00

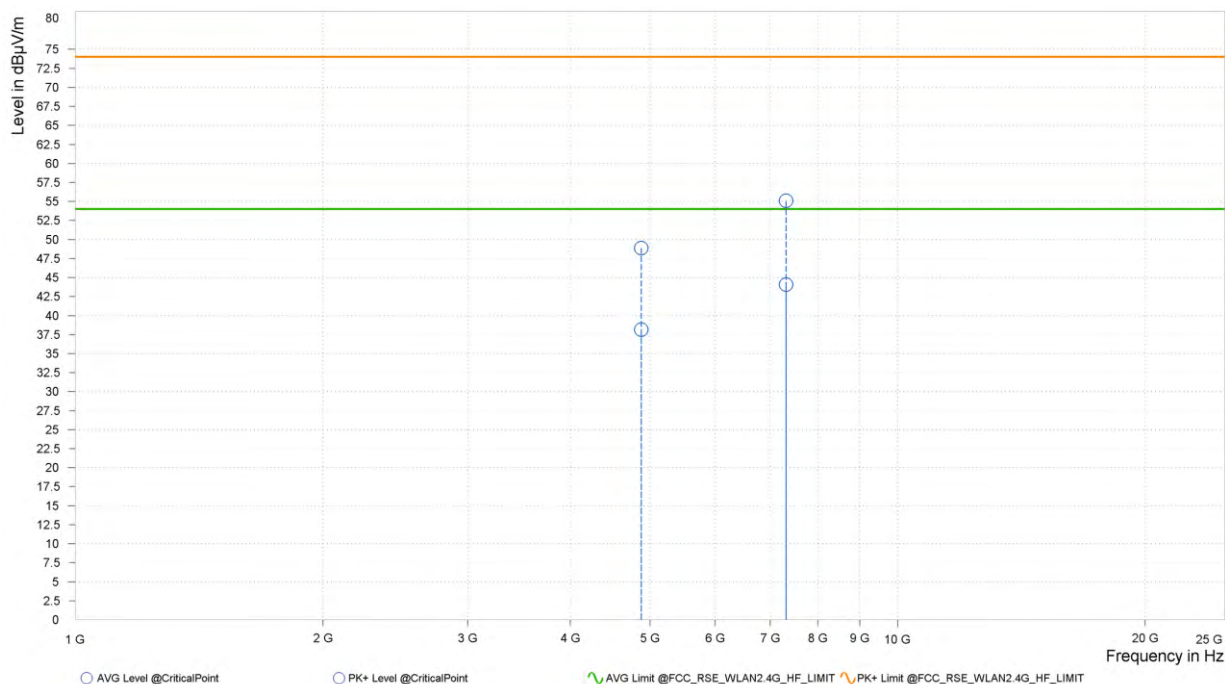

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2440MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.760	83.38			-0.88	H	214.6	2.00
6	2,483.500	44.40	74.00	29.60	-0.87	H	315.1	2.00
6	2,495.600	46.35	74.00	27.65	-0.83	H	214.6	2.00

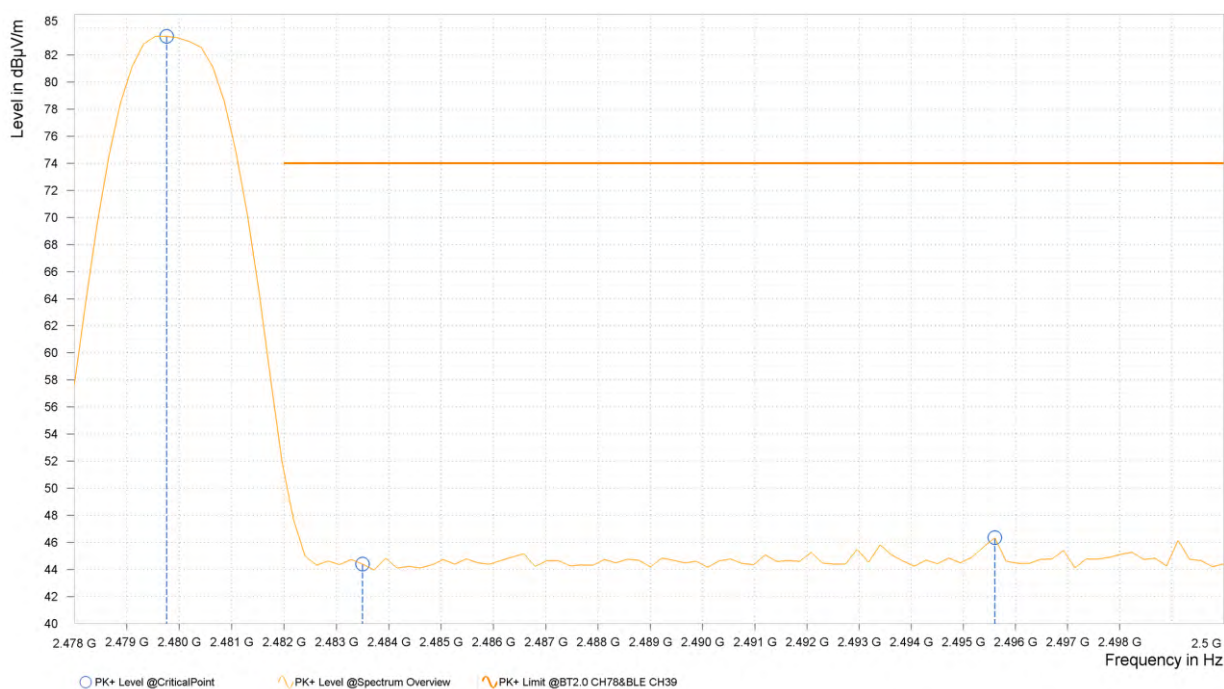



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	81.97			-0.88	H	214.6	2.00
6	2,483.500	30.24	54.00	23.76	-0.87	H	60.5	2.00
6	2,484.600	30.28	54.00	23.72	-0.86	H	214.6	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.200	92.70			-0.88	V	215.8	2.00
6	2,483.500	50.10	74.00	23.90	-0.87	V	267.3	2.00
6	2,484.160	50.12	74.00	23.88	-0.87	V	267.3	2.00






BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	90.39			-0.88	V	215.8	2.00
6	2,483.500	30.46	54.00	23.54	-0.87	V	314	2.00
6	2,490.980	30.89	54.00	23.11	-0.85	V	16.3	2.00

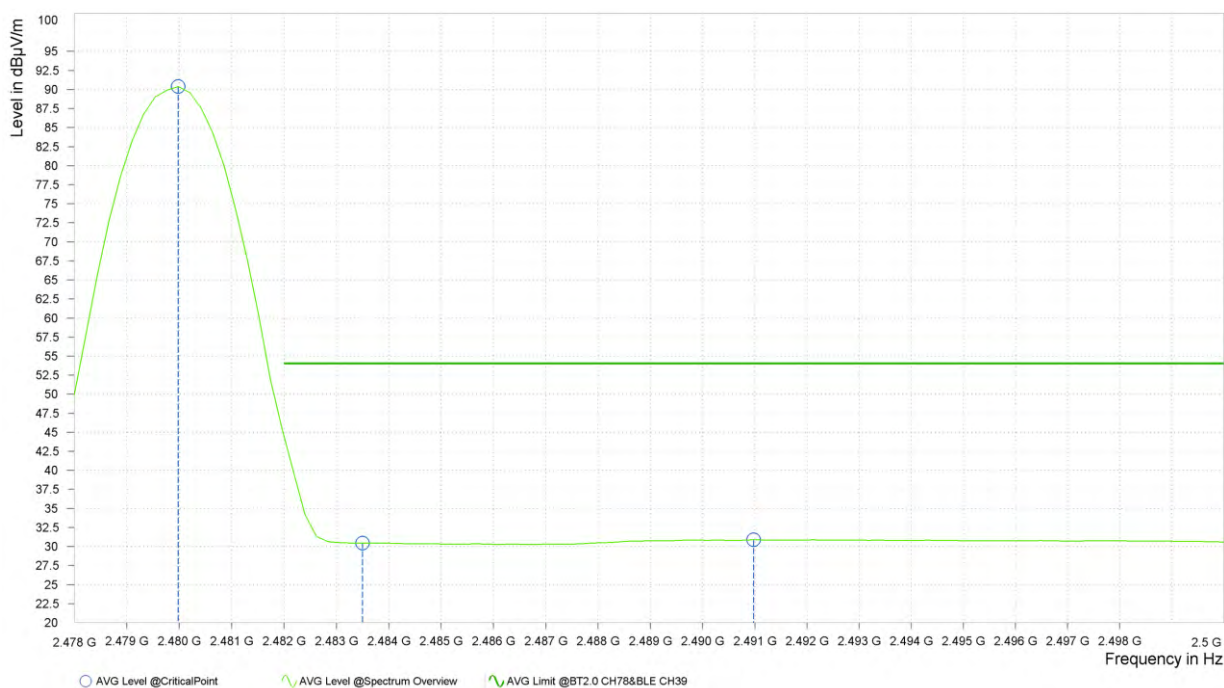

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2480MHz: Fundamental frequency.



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	R&S	ESW 44	101973	Feb.24,24	Feb.23,26
Open Switch and Control Unit	R&S	OSP-B157W8	100836	N/A	N/A
Vector Signal Generator	R&S	SMBV100B	102176	Feb.15,24	Feb.14,26
Signal Generator	R&S	SMB100A03	182185	Feb.15,24	Feb.14,26
Wideband Radio Communication	R&S	CMW500	169399	Jun.26,22	Jun.25,24
Hygrothermograph	DELI	20210528	SZ015	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.28,23	Apr.27,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.27,24	Apr.26,26
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.28,23	Apr.27,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.27,24	Apr.26,26
Test Software	EMC32	EMC32	N/A	N/A	N/A
Temperature Chamber	votsch	VT4002	58566078100050	May.31,22	May.30,24
Temperature Chamber	votsch	VT4002	58566078100050	May.30,24	May.29,26
Power Meter	R&S	NRX	102380	Feb.15,24	Feb.14,26
Power Meter probe	R&S	NRP6A	102942	Feb.15,24	Feb.14,26

NOTE:

1. The calibration interval of the above test instruments is 12/ 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

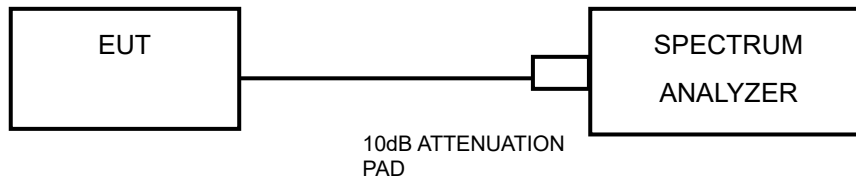

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: PSU-NQN2403180115RF02

3.3.7 TEST RESULTS


Please Refer to Appendix B Of this test report..

3.4 CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

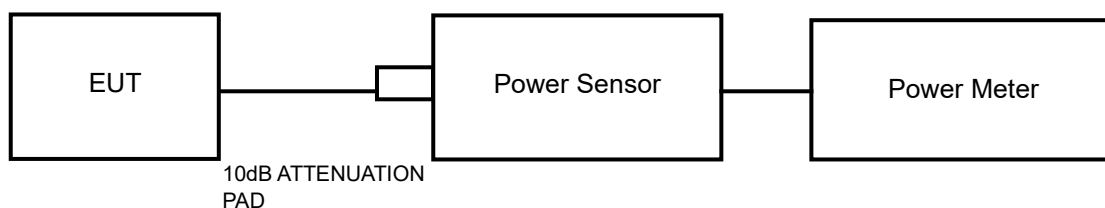

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: PSU-NQN2403180115RF02

3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix B Of this test report..



Test Report No.: PSU-NQN2403180115RF02

3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.


Please Refer to Appendix B Of this test report..

3.5 POWER SPECTRAL DENSITY MEASUREMENT

3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: PSU-NQN2403180115RF02

3.5.7 TEST RESULTS

Please Refer to Appendix B Of this test report..




3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 TEST SETUP

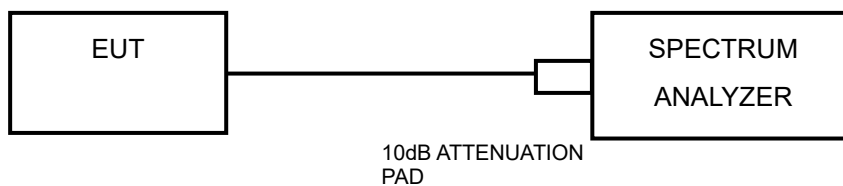

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix B Of this test report..



3.7 ANTENNA REQUIREMENTS

3.7.1 STANDARD APPLICABLE

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 ANTENNA CONNECTED CONSTRUCTION

An embedded-in antenna design is used.

3.7.3 ANTENNA GAIN

According to FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain=GANT +Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain= 10 log(NANT/ Nss) dB;

For power measurements on IEEE 802.11 devices,Array Gain = 0 dB for NANT≤ 4;

The EUT supports Cyclic Delay Diversity (CDD) mode,

For power measurements,the directional GANT is set equal to the antenna having the highest gain as following formulas.

Directional Gain = Max.Gain + Array Gain.

For PSD measurements,the directional GANT is calculation is following F)2)f)ii of KDB 662911 D01 v02r01.

The directional gain is calculated as following table.

2.4GHz	Ant 9 (dBi)	Ant 10 (dBi)	DG For Power (dBi)	DG For PSD (dBi)	Beamforming Gain	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	-2	-2	-2	1.01	1.01	0.00	0.00

NOTE: DG= directional gain, Power Limit Reduction = DG For Power Gain -6dBi<0

PSD Limit Reduction = DG For PSD – 6dBi<0. Therefore, it is not necessary to reduce maximum peak output power and PSD limit.



Test Report No.: PSU-NQN2403180115RF02

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: PSU-NQN2403180115RF02

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--END--