



No. 24T04Z101721-018

For

HMD Global Oy

Mobile Phone

Model Name: TA-1658

with

Hardware Version: V1.0

Software Version: 000T_0_362

FCC ID: 2AJOTTA-1658

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

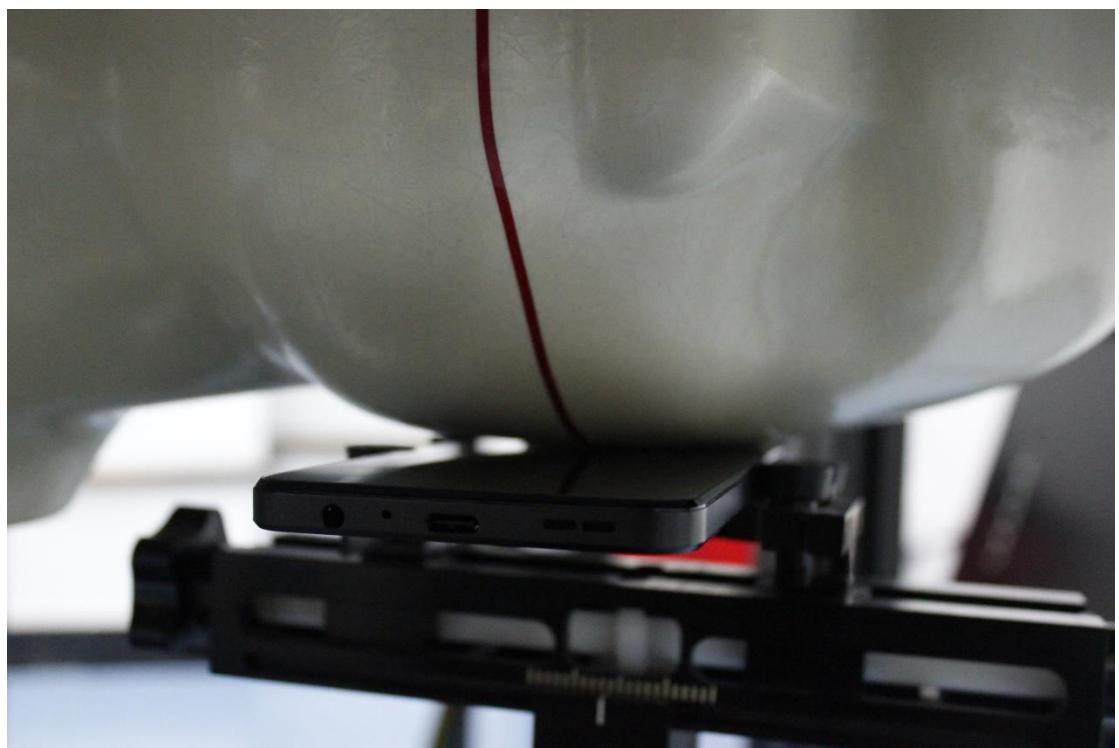


Picture 2: Left Head Touch Cheek Position

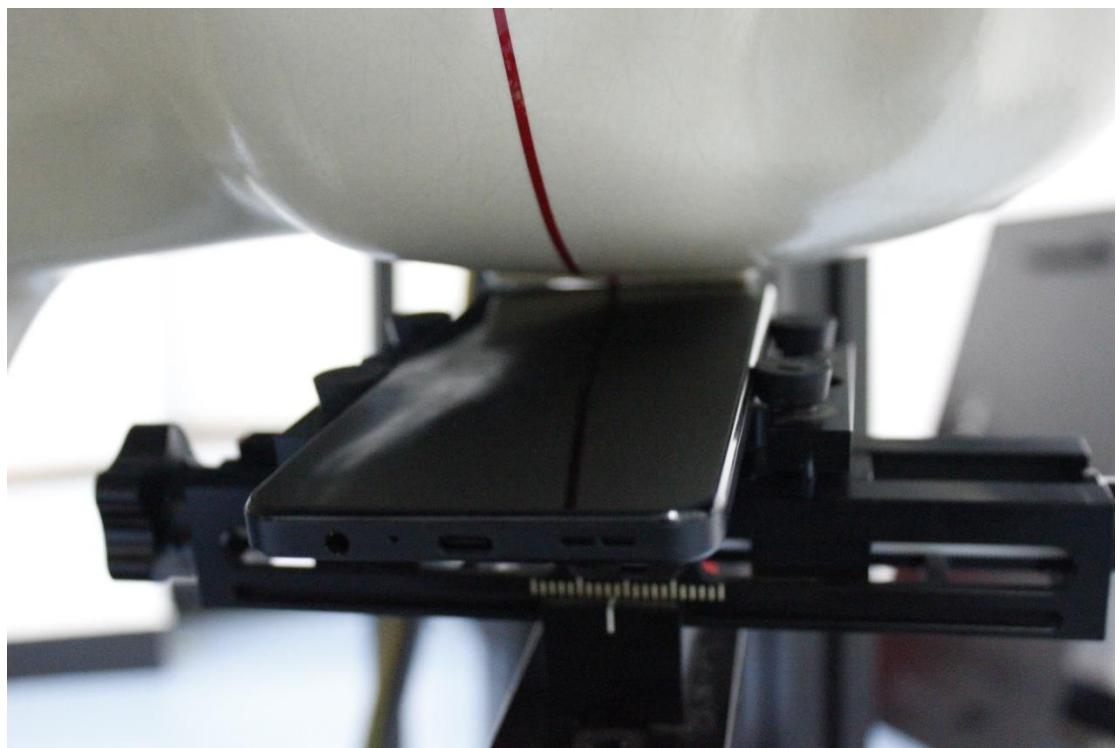

Picture 3: Left Head Tilt 15° Position

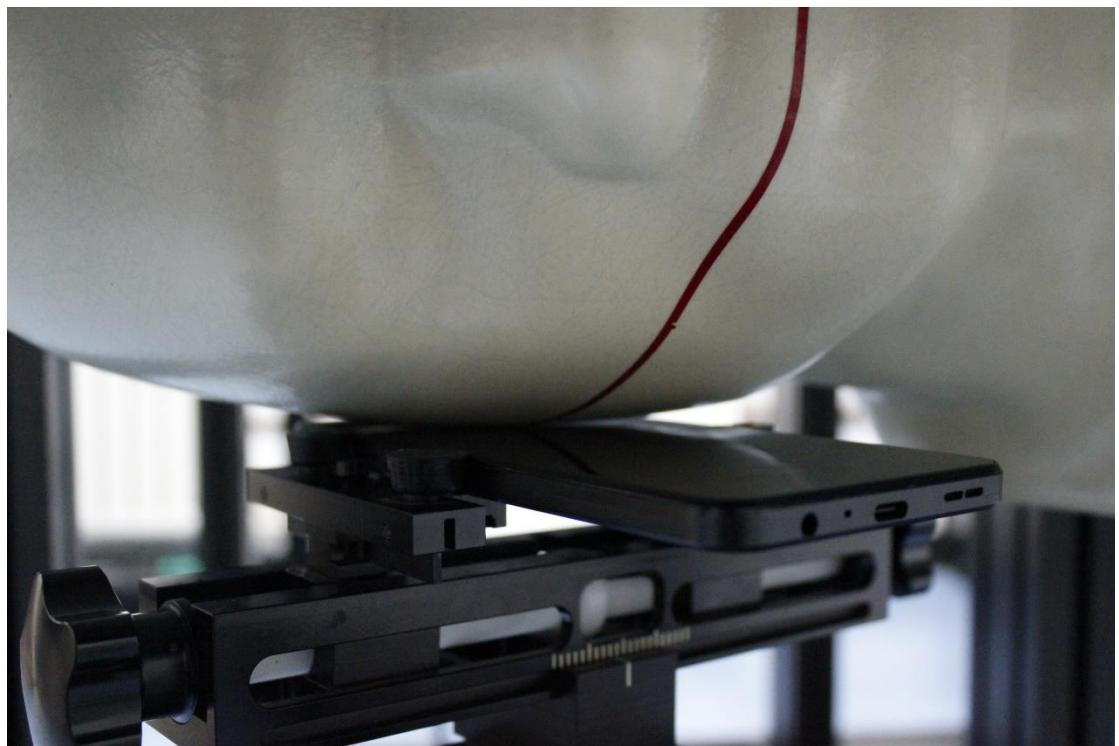


Picture 4: Right Head Touch Cheek Position

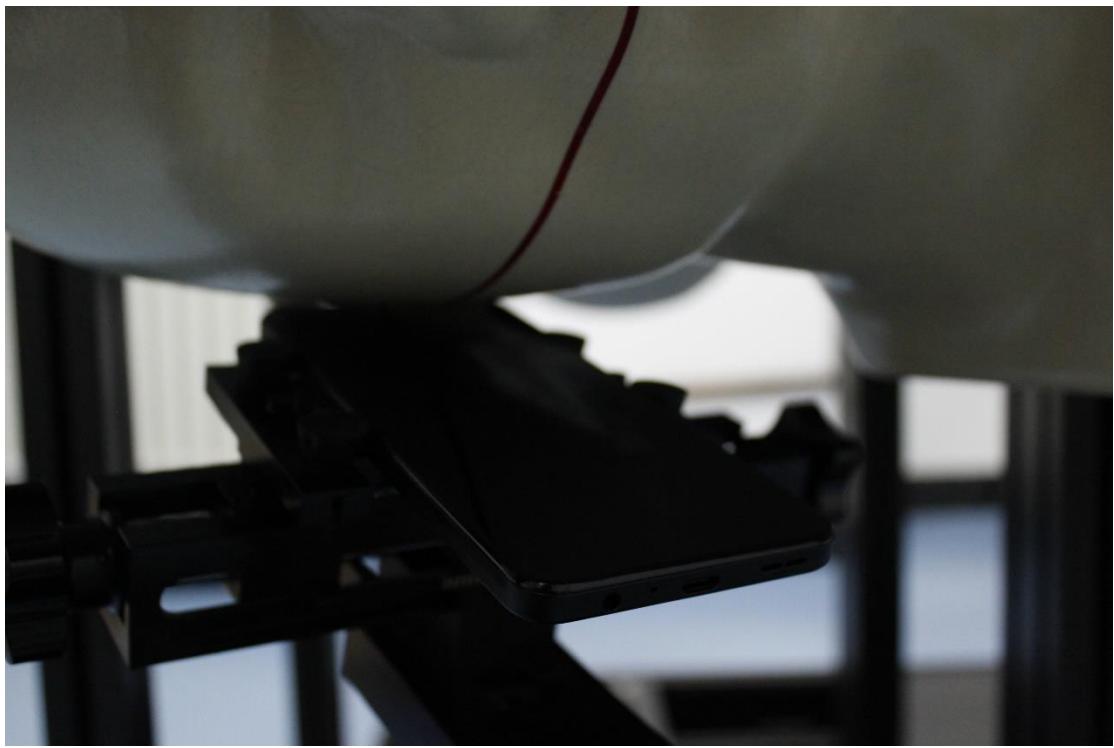


Picture 5: Right Head Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 9 test positions all with the distance =10/15/22mm between the EUT and the phantom bottom:

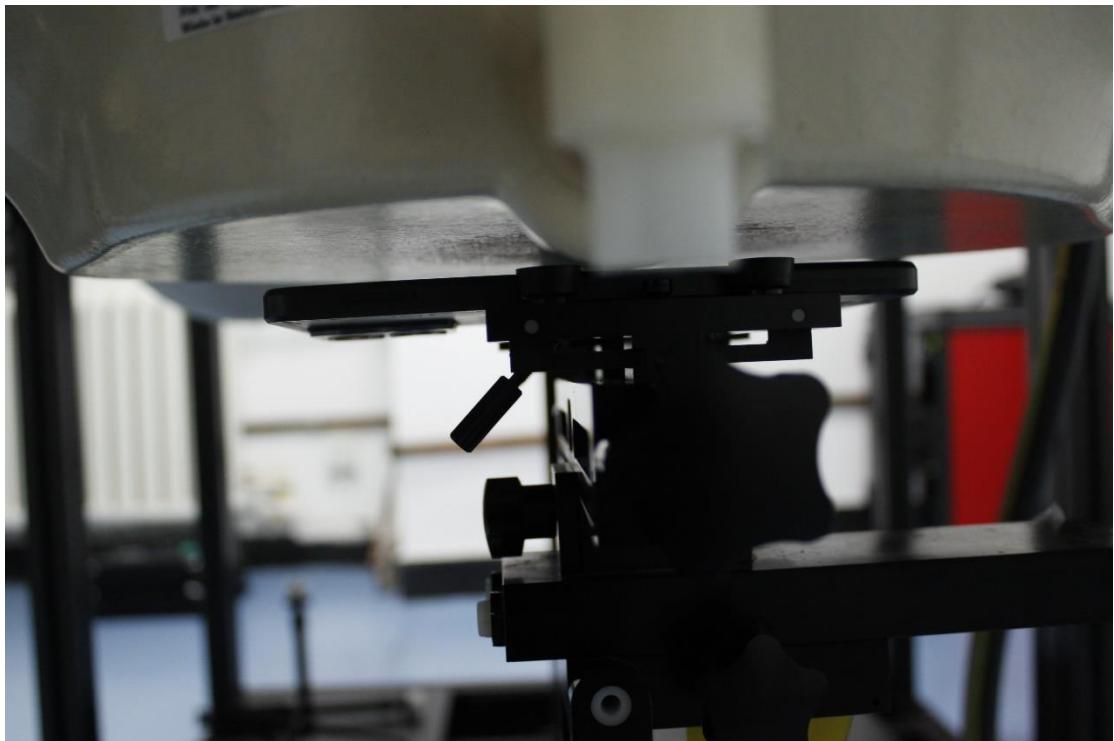


Picture 6: Front 10mm

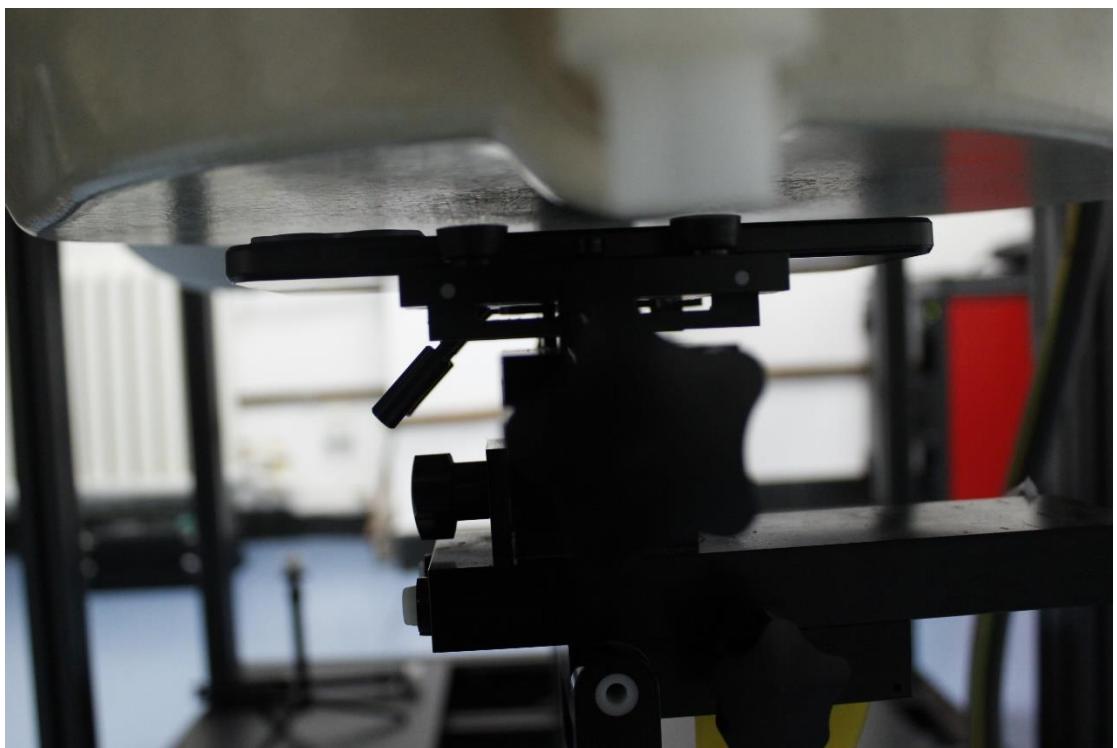

Picture 7: Rear 10mm



Picture 8: Left 10mm

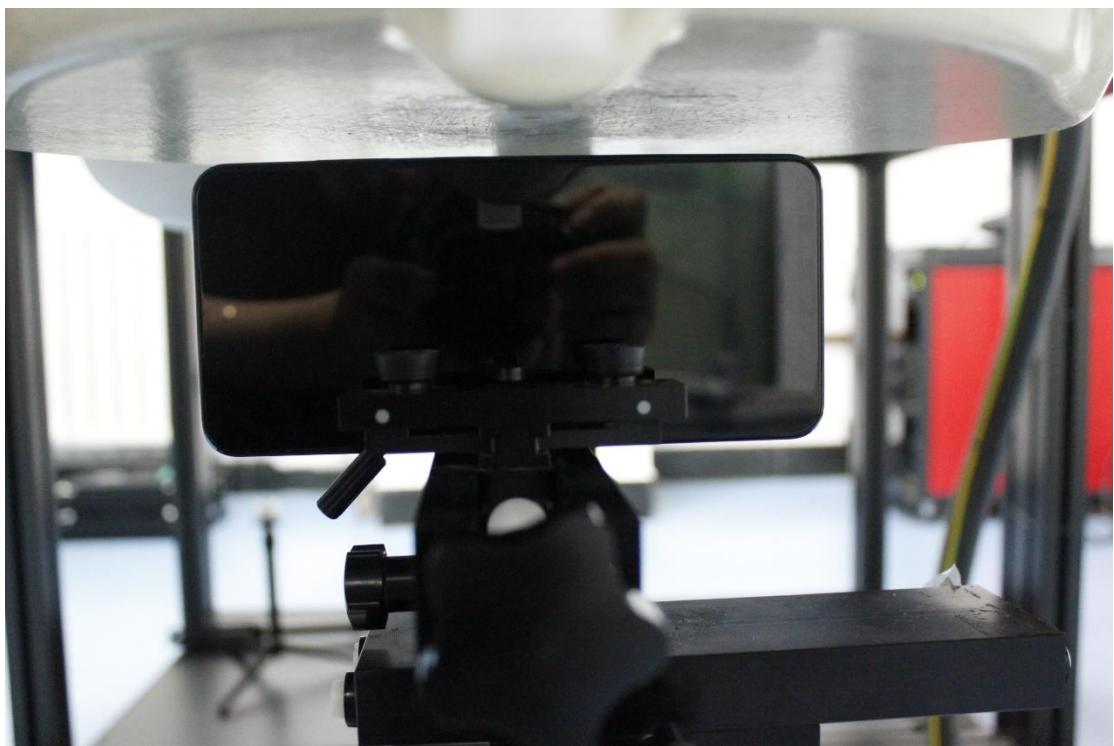


Picture 9: Right 10mm




Picture 10: Top 10mm



Picture 11: Bottom 10mm

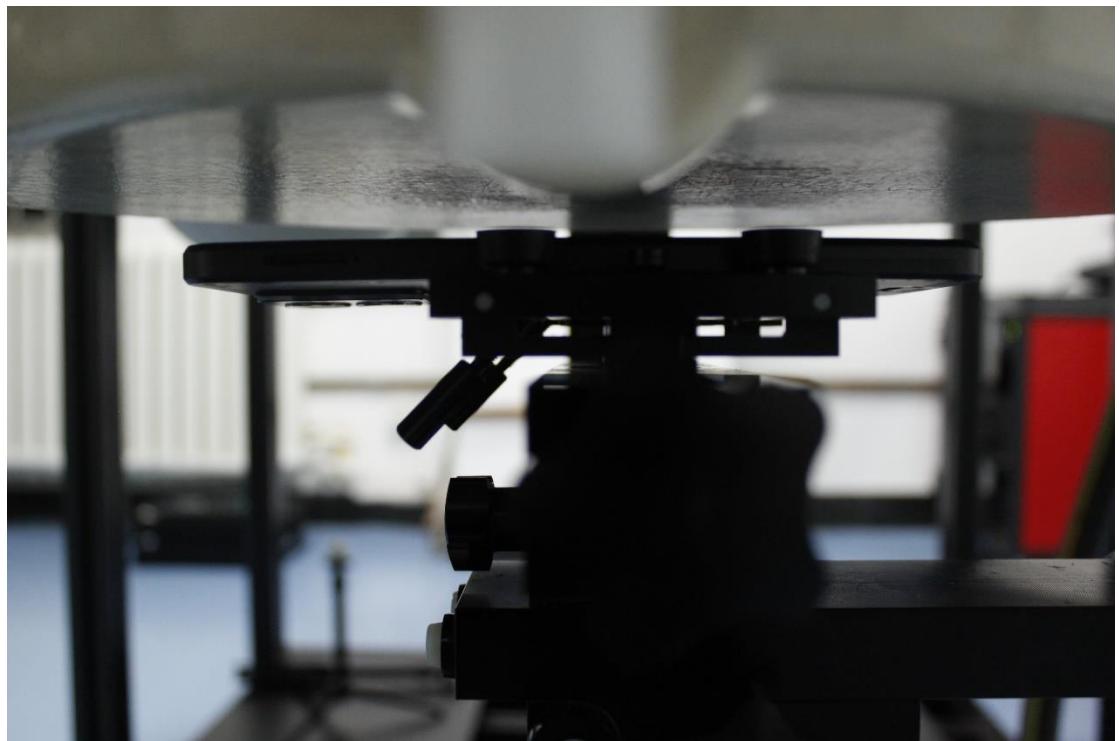

Picture 12: Front 15mm

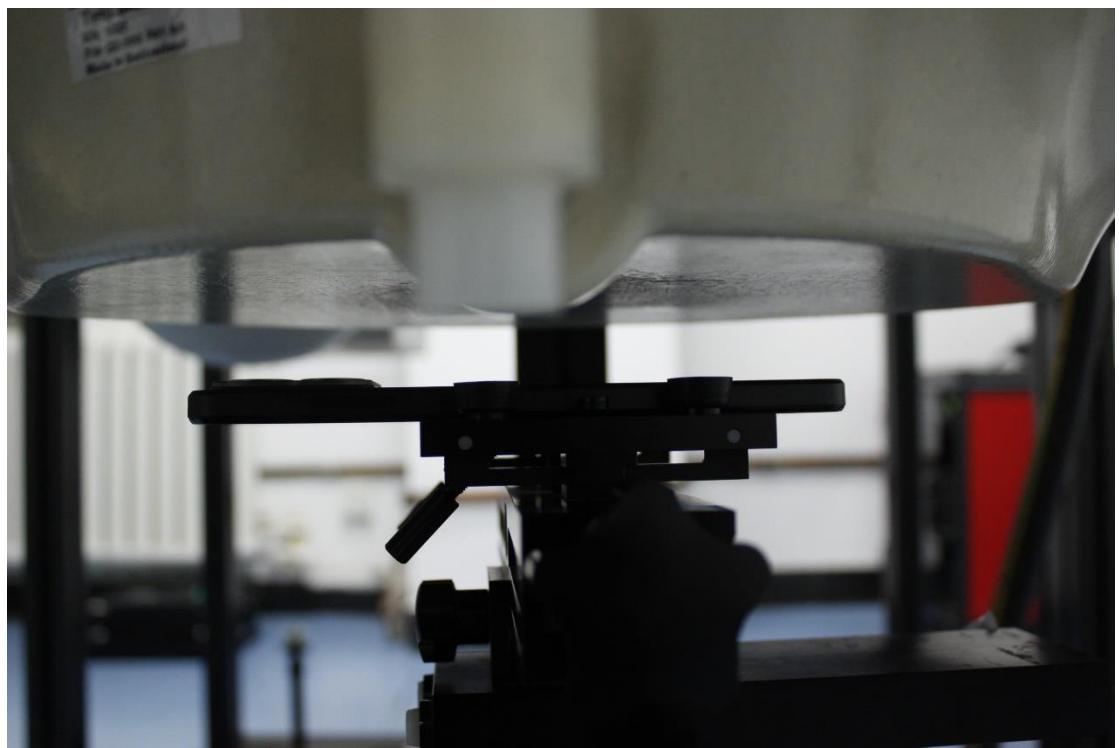

Picture 13: Rear 22mm



Picture 14: Top 22mm

Transmit Antenna Separation Distances



Picture 15 Antenna Locations