



FCC TEST REPORT

(Part 15, Subpart E)

Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland
Product:	Mobile phone
Brand Name:	HMD
Model Name:	H1702V
FCC ID:	2AJOTTA-1702
Date of tests:	Jan, 13, 2025 ~ Apr. 08, 2025

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart E, Section 15.407

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
Date: Apr. 08, 2025	Date: Apr. 08, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
1.1 MEASUREMENT UNCERTAINTY	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT.....	7
2.2 DESCRIPTION OF TEST MODES.....	10
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	13
2.3 DUTY CYCLE OF TEST SIGNAL	17
2.4 DESCRIPTION OF SUPPORT UNITS.....	18
2.4.1 CONFIGURATION OF SYSTEM UNDER TEST	19
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	20
3 TEST TYPES AND RESULTS.....	21
3.4 RADIATED EMISSION AND BANDEDGE MEASUREMENT	21
3.4.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	21
3.4.2 LIMITS OF UNWANTED EMISSION	22
3.4.3 TEST INSTRUMENTS.....	23
3.4.4 TEST PROCEDURES	24
3.4.5 DEVIATION FROM TEST STANDARD	24
3.4.6 TEST SETUP	25
3.4.7 EUT OPERATING CONDITION	26
3.4.8 TEST RESULTS	27
3.5 CONDUCTED EMISSION MEASUREMENT.....	245
3.5.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	245
3.5.2 TEST INSTRUMENTS.....	245
3.5.3 TEST PROCEDURES	246
3.5.4 DEVIATION FROM TEST STANDARD	247
3.5.5 TEST SETUP	247
3.5.6 EUT OPERATING CONDITIONS	247
3.5.7 TEST RESULTS	248
3.6 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	250
3.6.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	250
3.6.2 TEST SETUP	251
3.6.3 TEST INSTRUMENTS.....	252
3.6.4 TEST PROCEDURE.....	253



BUREAU
VERITAS

Test Report No.: PSU-NQN2412090110RF10

3.6.5	DEVIATION FROM TEST STANDARD	254
3.6.6	EUT OPERATING CONDITIONS	254
3.6.7	TEST RESULTS	255
3.7	MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT	256
3.7.1	LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT	256
3.7.2	TEST SETUP	256
3.7.3	TEST INSTRUMENTS	256
3.7.4	TEST PROCEDURES	257
3.7.5	DEVIATION FROM TEST STANDARD	257
3.7.6	EUT OPERATING CONDITIONS	257
3.7.7	TEST RESULTS	258
3.8	AUTOMATICALLY DISCONTINUE TRANSMISSION	259
3.8.1	LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	259
3.8.2	TEST INSTRUMENTS	259
3.8.3	TEST RESULT	259
3.10	ANTENNA REQUIREMENTS	260
3.10.1	STANDARD APPLICABLE	260
3.10.2	ANTENNA CONNECTED CONSTRUCTION	260
3.10.3	ANTENNA GAIN	260
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	261
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	
	262	
6	APPENDIX	263



**BUREAU
VERITAS** Test Report No.: PSU-NQN2412090110RF10

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2412090110RF10	Original release	Apr. 08, 2025



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
15.407(b)(9)	AC Power Conducted Emission	Compliance
15.407(b) (1/2/3/4/5)	Radiated Emission & Band Edge Measurement	Compliance
15.407(a/1/2/3)	Maximum conducted output Power	Compliance
15.407(a/1/2/3)	Peak Power Spectral Density	Compliance
15.407(a)(2)(12)	26 dB Bandwidth	Compliance
15.407(e)	6 dB Bandwidth	Compliance
15.203	Antenna Requirement	Compliance

NOTE:

1. Except the data of RSE and Band Edge Measurement, other data please refer to Appendix.
2. For 802.11n HT20/ ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing is assessed only 802.11n HT20/ HT40 by referring to their higher conducted power.
3. Only the worse data was reported.

***Test Lab Information Reference**

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.




1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

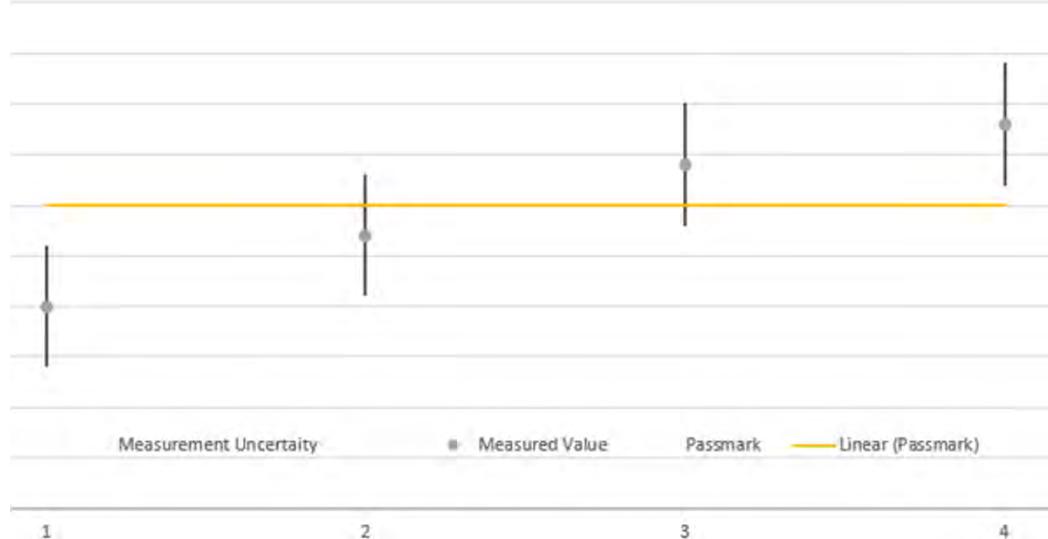

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	Mobile phone	
BRAND NAME*	HMD	
MODEL NAME*	H1702V	
NOMINAL VOLTAGE*	3.87Vdc (Li-ion, battery)	
MODULATION *	OFDM	
TRANSFER RATE*	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 150Mbps 802.11ac: up to 433.3Mbps	
OPERATING FREQUENCY*	5180~5240MHz, 5260~5320MHz 5500~5720MHz, 5745~5825MHz	
NUMBER OF CHANNEL	5180~5240MHz	4 for 802.11a,802.11n/ac (20MHz)
		2 for 802.11n/ac (40MHz)
		1 for 802.11ac (80MHz)
	5260~5320MHz	4 for 802.11a,802.11n/ac(20MHz)
		2 for 802.11n/ac(40MHz)
		1 for 802.11ac(80MHz)
	5500~5720MHz	12 for 802.11a, 802.11n/ac (20MHz)
		6 for 802.11n/ac(40MHz)
		3 for 802.11ac (80MHz)
	5745~5825MHz	5 for 802.11a, 802.11n/ac (20MHz)
		2 for 802.11n/ac (40MHz)
		1 for 802.11ac (80MHz)
MAX. OUTPUT POWER	78.70mW for 5180 ~ 5240MHz	
	75.34mW for 5260 ~ 5320MHz	
	90.99mW for 5500 ~ 5720MHz	
	81.66mW for 5745 ~ 5825MHz	



ANTENNA TYPE*	Ant 6: PIFA Antenna	
ANTENNA GAIN*	5180 ~ 5240MHz	-2dBi
	5260 ~ 5320MHz	-2dBi
	5500 ~ 5720MHz	-2dBi
	5745 ~ 5825MHz	-2dBi
HW VERSION*	V1.0	
SW VERSION*	000T_0_310	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	N/A	

NOTE:

1. *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11a	1TX/1RX
802.11n/802.11ac (20MHz)	1TX/1RX
802.11n/802.11ac (40MHz)	1TX/1RX
802.11ac (80MHz)	1TX/1RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
5. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.



6. The differences between the sample 1 and sample 2 as Listings below, others are the same. And only the worst case was shown in the test report.

Raptor 5G(H1702V)

Object	Sample 1 1 st source		Sample 2 2 nd source	
	Specifications	Supplier	Specifications	Supplier
Display	Y92232	DZX	TD-TCHJ6615-5D	CDOT
Memory	LPDDR4X 6GB FLXC4006G-49	Longsys	BWCC4X32N2A-48G-X	Biwin
	128GB eMMC5.1 MEMDNN128G-M1D03	Longsys	MEMDNN128G-M1D03	Biwin
Motor	C0830H-C138ZN-021	KunWang	CY0830-05-FPC-182	Chaoying
Mic	SM2718B381YR2-01	Rayking	S150B381-155	Goertek
Charger IC	UPM6720	Unisemi	SC8541CFFR	Southchip

7. List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery	HMD	HuiZhou GanFeng LiEnergy Battery Technology Co., Ltd.	HBA-5033AA	Capacity: 3.87Vdc, 4900mAh
USB Cable	Saibao	Saibao (Jiangxi) Industry Co.,Ltd.	SZN-A047A	Signal Line,1.0meter



2.2 DESCRIPTION OF TEST MODES

FOR 5180~5240MHz			
802.11a, 802.11n, 802.11ac(20MHz)			
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

802.11n, 802.11ac (40MHz)			
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

802.11ac (80MHz)			
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
42	5210 MHz		

FOR 5260 ~ 5320MHz			
802.11a, 802.11n, 802.11ac (20MHz)			
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

802.11n, 802.11ac (40MHz)			
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270 MHz	62	5310 MHz

802.11ac (80MHz)			
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
58	5290 MHz		



FOR 5500 ~ 5720MHz			
802.11a, 802.11n, 802.11ac (20MHz)			
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500 MHz	124	5620MHz
104	5520 MHz	128	5640MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

802.11n, 802.11ac(40MHz)			
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510 MHz	126	5630MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

802.11ac (80MHz)			
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
106	5530 MHz	122	5610 MHz
138	5690 MHz		



FOR 5745 ~ 5825MHz

802.11a, 802.11n, 802.11ac(20MHz)

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

802.11n, 802.11ac (40MHz)

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
142	5710 MHz	159	5795 MHz
151	5755 MHz		

802.11ac (80MHz)

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
138	5690 MHz	155	5775 MHz



2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	-	Powered by Adapter with wifi(5G) link
B	-	-	-	√	Powered by Battery with wifi(5G) link
C	-	-	-	-	Powered by USB with wifi(5G) link

Where

RE≥1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE:

The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

NOTE: "-"means no effect

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11ac(80MHz)	5260-5320	58	58	OFDM	MCS0



**BUREAU
VERITAS** Test Report No.: PSU-NQN2412090110RF10

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
A	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	MCS0
A	802.11ac (80MHz)		42	42	OFDM	MCS0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
A	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	MCS0
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	MCS0
A	802.11ac (80MHz)		58	58	OFDM	MCS0
A	802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.0
A	802.11n (20MHz)		100 to 144	100, 116, 140, 144	OFDM	MCS0
A	802.11n (40MHz)		102 to 142	102, 110, 134, 142	OFDM	MCS0
A	802.11ac (80MHz)		106 to 138	106, 122, 138	OFDM	MCS0
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
A	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	MCS0
A	802.11ac (80MHz)		155	155	OFDM	MCS0



**BUREAU
VERITAS** Test Report No.: PSU-NQN2412090110RF10

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11ac(80MHz)	5260-5320	58	58	OFDM	MCS0

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
A	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	MCS0
A	802.11ac (80MHz)		42	42	OFDM	MCS0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
A	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	MCS0
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	MCS0
A	802.11ac (80MHz)		58	58	OFDM	MCS0
A	802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.0
A	802.11n (20MHz)		100 to 144	100, 116, 140, 144	OFDM	MCS0
A	802.11n (40MHz)		102 to 142	102, 110, 134, 142	OFDM	MCS0
A	802.11ac (80MHz)		106 to 138	106, 122, 138	OFDM	MCS0
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
A	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	MCS0
A	802.11ac (80MHz)		155	155	OFDM	MCS0



ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
A	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	MCS0
A	802.11ac (80MHz)		42	42	OFDM	MCS0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
A	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	MCS0
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	MCS0
A	802.11ac (80MHz)		58	58	OFDM	MCS0
A	802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.0
A	802.11n (20MHz)		100 to 144	100, 116, 140, 144	OFDM	MCS0
A	802.11n (40MHz)		102 to 142	102, 110, 134, 142	OFDM	MCS0
A	802.11ac (80MHz)		106 to 138	106, 122, 138	OFDM	MCS0
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
A	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	MCS0
A	802.11ac (80MHz)		155	155	OFDM	MCS0

TEST CONDITION			
APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	23deg. C, 70%RH	DC5.0V By Adapter	Hanwen Xu
RE≥1G	23deg. C, 70%RH	DC5.0V By Adapter	Hanwen Xu
PLC	25deg. C, 52%RH	DC5.0V By Adapter	Hanwen Xu
APCM	25deg. C, 60%RH	DC5.0V By Adapter	Hanwen Xu



**BUREAU
VERITAS** Test Report No.: PSU-NQN2412090110RF10

2.3 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix of this test report.



**BUREAU
VERITAS** Test Report No.: PSU-NQN2412090110RF10

2.4 DESCRIPTION OF SUPPORT UNITS




The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Adapter	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB Line: Shielded, Detachable 1.0m;



2.4.1 CONFIGURATION OF SYSTEM UNDER TEST

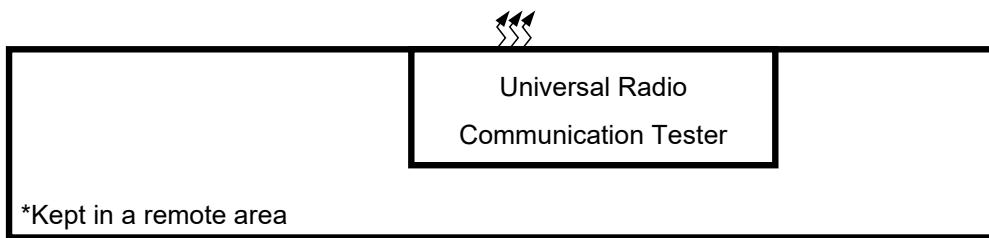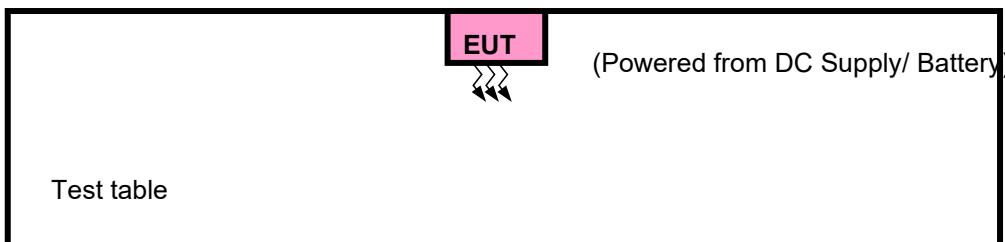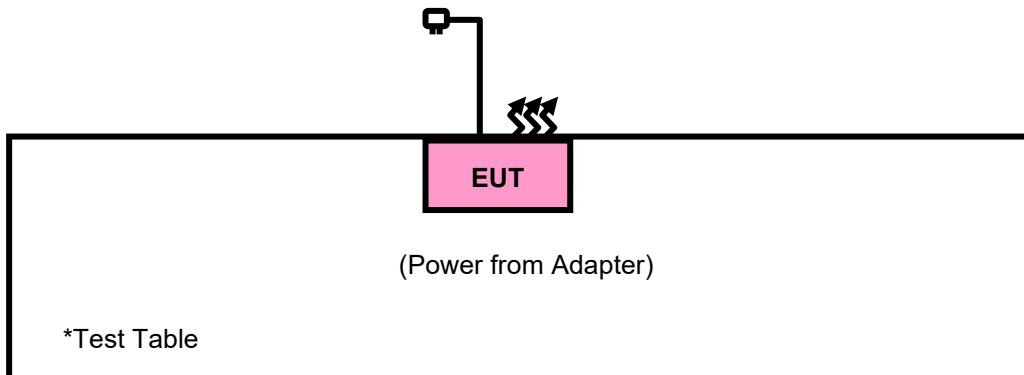



**BUREAU
VERITAS** Test Report No.: PSU-NQN2412090110RF10

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

ANSI C63.10-2020

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.



3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.1.2 LIMITS OF UNWANTED EMISSION

RESTRICTED BANDS	APPLICABLE TO	LIMIT	
		FIELD STRENGTH AT 3m (dB μ V/m)	
OUT OF THE RESTRICTED BANDS	789033 D02 General UNII Test Procedures New Rules v02r01	PK : 74	AV : 54
	APPLICABLE TO	EIRP LIMIT (dBm/MHz)	EQUIVALENT FIELD STRENGTH AT 3m (dB μ V/m)
	15.407(b)(1)	PK : -27	PK : 68.2
	15.407(b)(2)		
	15.407(b)(3)		
	15.407(b)(4)	See note 2 (FCC 16-24)	

NOTE:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:
$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$$
, where P is the eirp (Watts).
2. All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



3.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,23	Aug.29,25
Pre-Amplifier	R&S	SCU08F1	101028	Jan.22,24	Jan.21,26
Signal Generator	R&S	SMB100A	182185	Mar.29,24	Mar.28,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESW44	101973	Mar.28,24	Mar.27,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Dec.26,23	Dec.25,25
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,23	Aug.21,25
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Jul.15,24	Jul.14,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,23	Aug.21,25
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,23	Feb.22,25
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,25	Feb.21,27
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.19,24	Jun.18,26
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,23	Aug.30,25
Hygrothermograph	DELI	20210528	SZ014	Sep.06,23	Sep.05,25
6dB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.27,24	Apr.26,25
CABLE	R&S	W12.14	N/A	Apr.27,24	Apr.26,25

NOTE:

1. The calibration interval of the above test instruments is 12/ 24 / 36 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.
2. The test was performed in 3m Chamber.
3. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



3.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise, the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated, and the worst-case emissions are reported.


3.1.5 DEVIATION FROM TEST STANDARD

No deviation.




3.1.6 TEST SETUP

<Frequency Range 9KHz~30MHz >

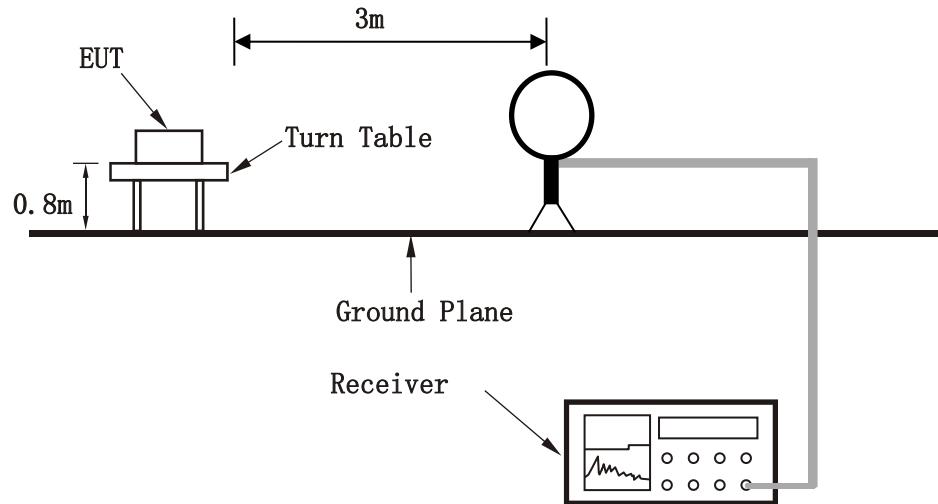


< Frequency Range 30MHz~1GHz >

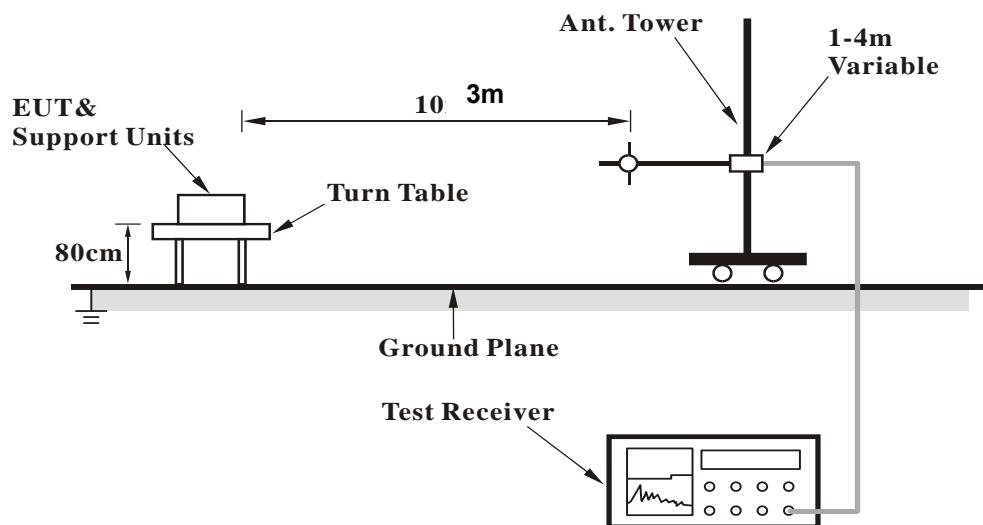



<Frequency Range above 1GHz>

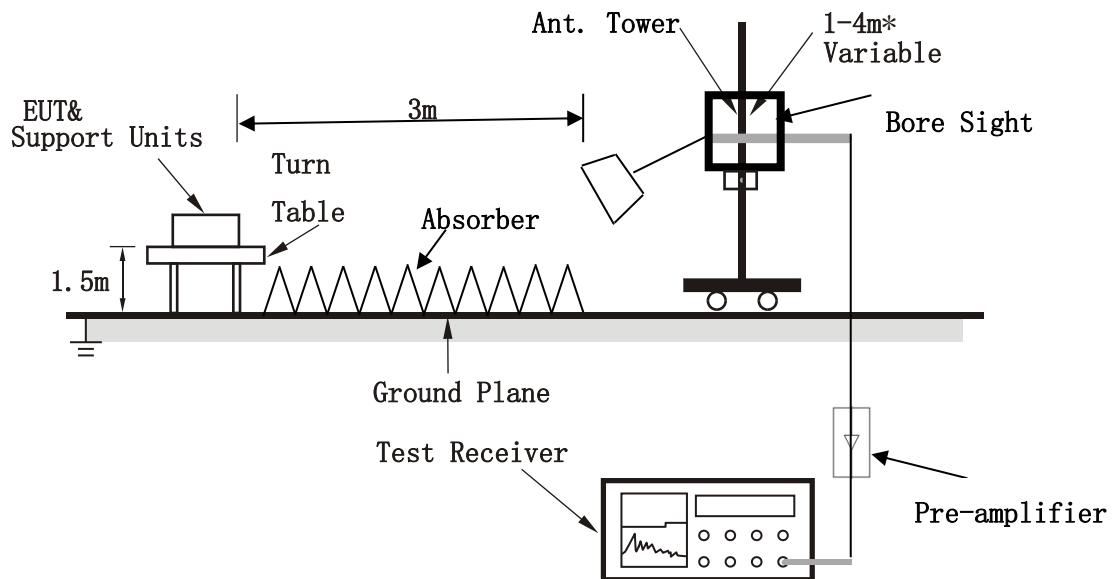

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.7 EUT OPERATING CONDITION

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



**BUREAU
VERITAS** Test Report No.: PSU-NQN2412090110RF10

3.1.8 TEST RESULTS

NOTE : 1.The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.


BAND EDGE MEASUREMENT


BADN 1


802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE			1GHz ~ 40GHz

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,149.150	64.40	74.00	9.60	15.19	H	310.4	1.00
1	5,150.000	63.56	74.00	10.44	15.21	H	310.4	1.00
1	5,181.550	111.52			16.20	H	310.4	1.00

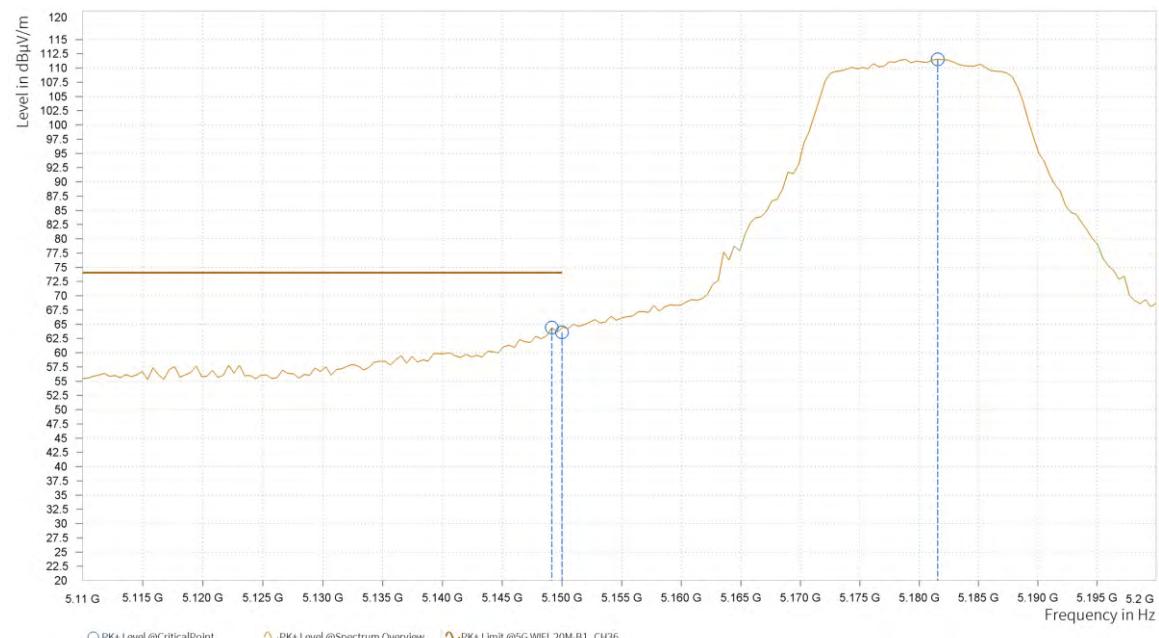

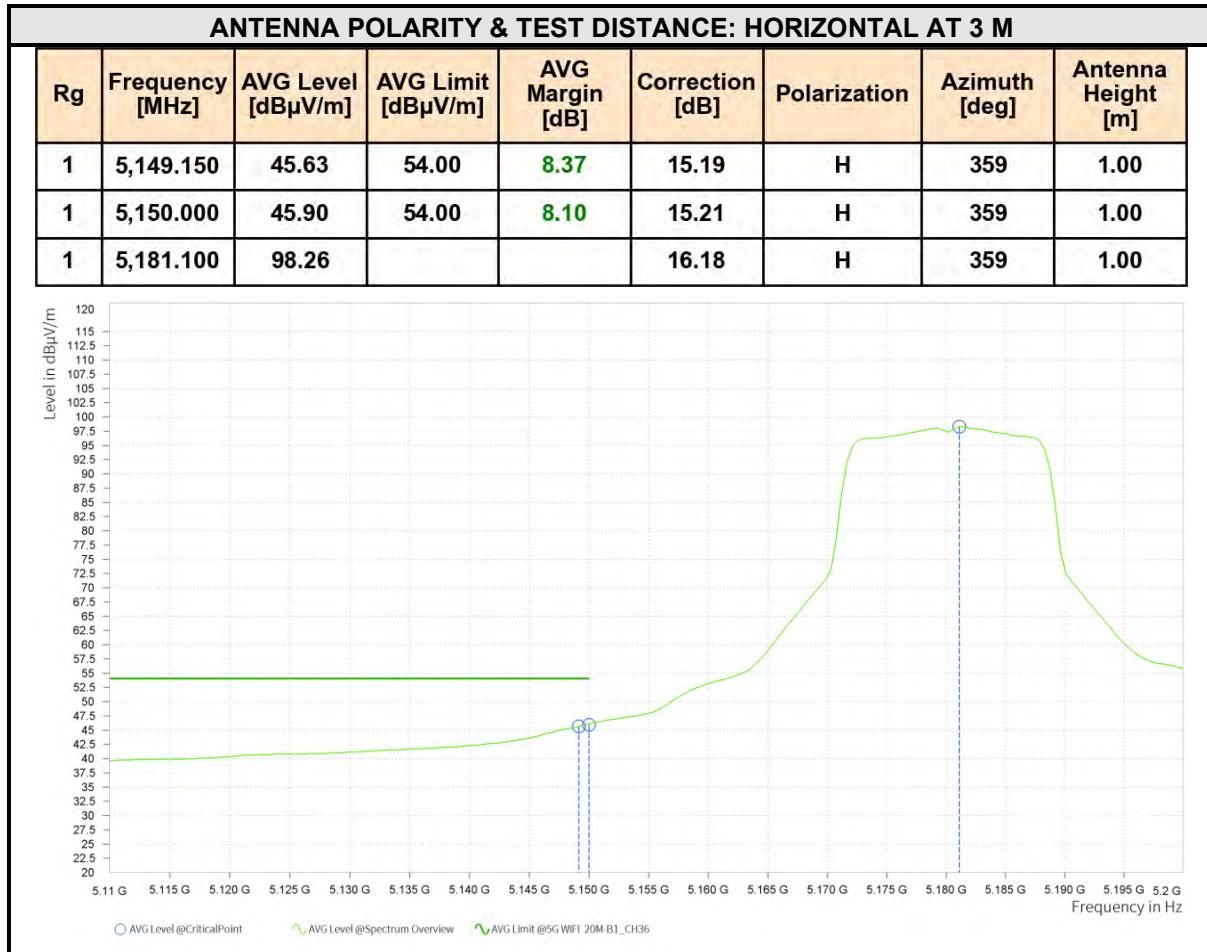

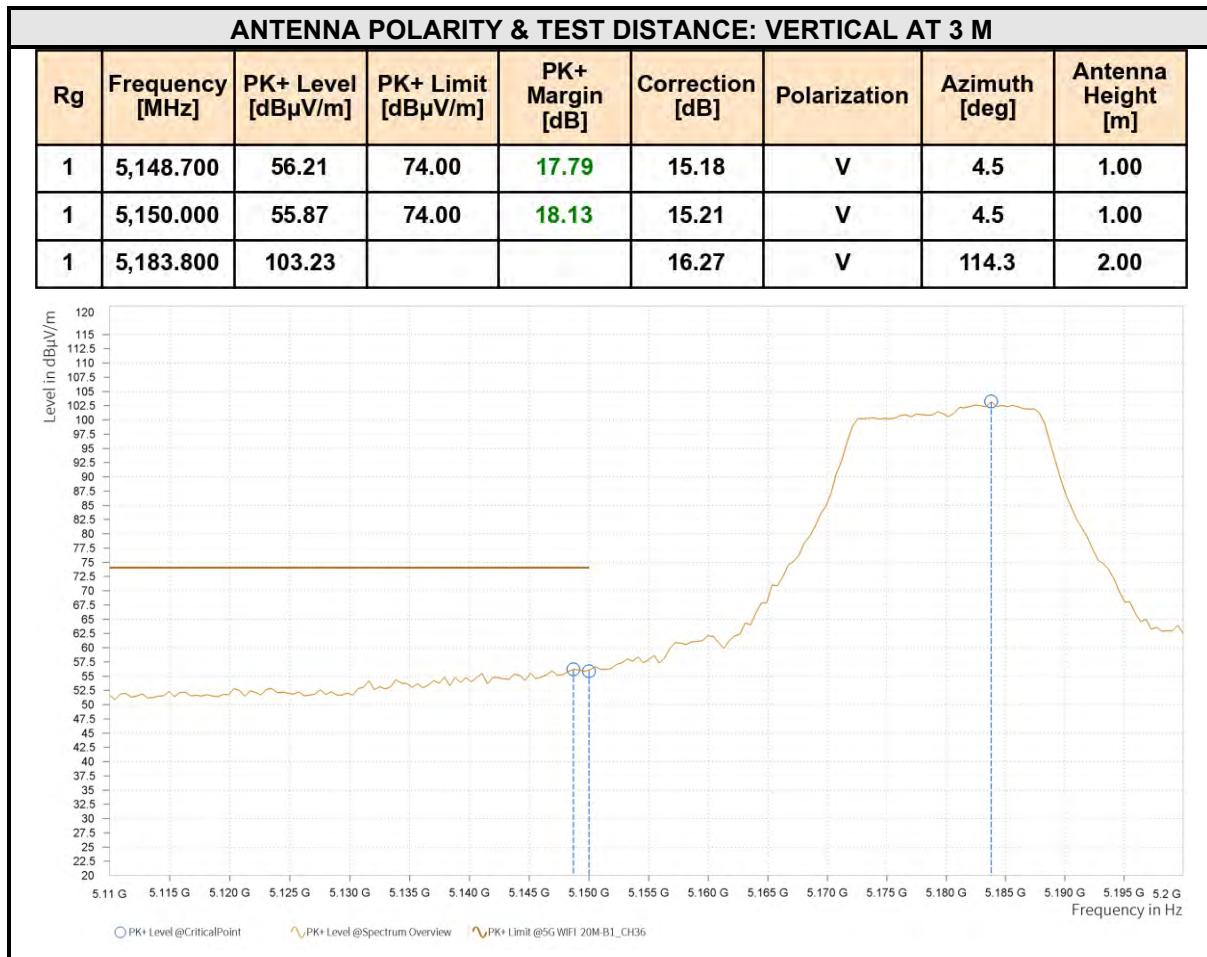



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	Avg Level [dB μ V/m]	Avg Limit [dB μ V/m]	Avg Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,149.150	39.84	54.00	14.16	15.19	V	5.8	1.00
1	5,150.000	39.97	54.00	14.03	15.21	V	5.8	1.00
1	5,181.550	91.37			16.20	V	5.8	1.00

Level in dB μ V/m

Frequency in Hz

Legend: ○ Avg Level @CriticalPoint ^ Avg Level @Spectrum Overview ~ Avg Limit @5G WiFi 20M-B1_CH36

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5180MHz: Fundamental frequency.



CHANNEL		TX Channel 40		DETECTOR FUNCTION		Peak (PK) Average (AV)		
FREQUENCY RANGE		1GHz ~ 40GHz						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,146.300	58.91	74.00	15.09	15.11	H	300.8	1.00
2	5,150.000	58.25	74.00	15.75	15.21	H	300.8	1.00
2	5,201.200	110.54			16.63	H	354.2	2.00

Level in dB μ V/m


Frequency in Hz


Legend: ○ PK+ Level @CriticalPoint ^ PK+ Level @Spectrum Overview | PK+ Limit @5G WiFi 20M-B1_CH40



BUREAU
VERITAS

Test Report No.: PSU-NQN2412090110RF10

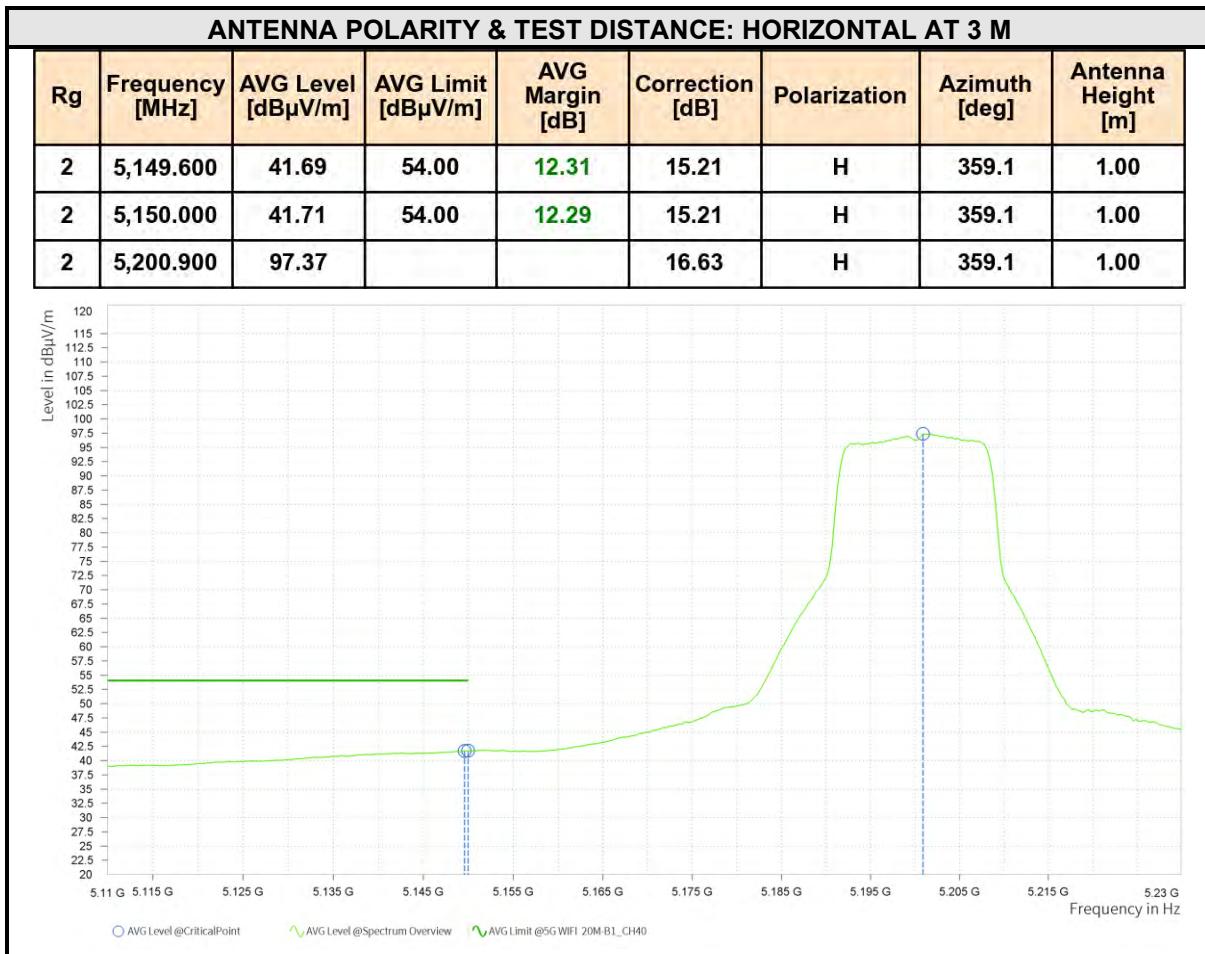

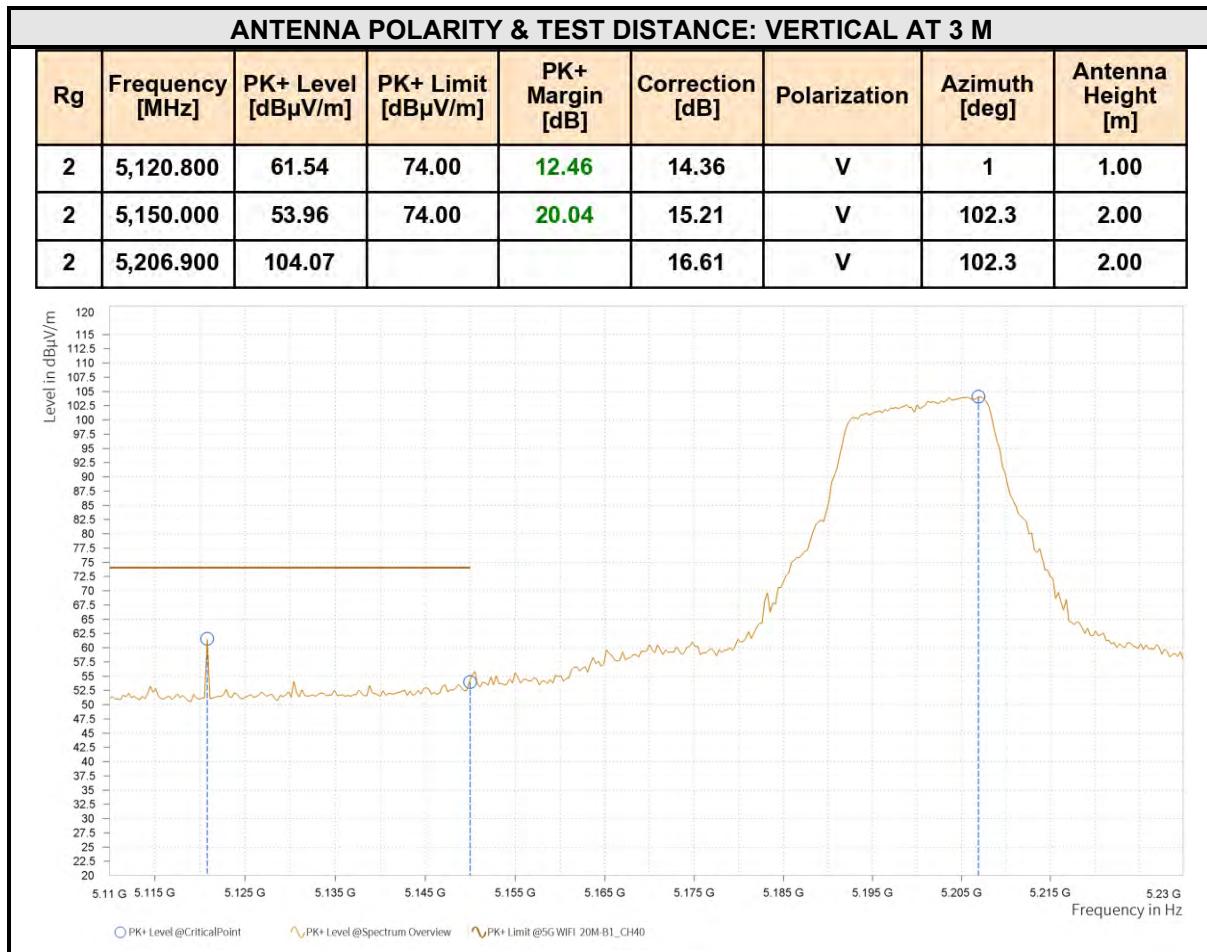



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,149.600	38.90	54.00	15.10	15.21	V	125	2.00
2	5,150.000	38.87	54.00	15.13	15.21	V	125	2.00
2	5,201.800	91.57			16.63	V	10.8	1.00

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5200MHz: Fundamental frequency.





CHANNEL		TX Channel 48		DETECTOR FUNCTION		Peak (PK) Average (AV)		
FREQUENCY RANGE		1GHz ~ 40GHz						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,142.250	54.03	74.00	19.97	14.99	H	256.6	2.00
3	5,150.000	53.08	74.00	20.92	15.21	H	354.9	2.00
3	5,241.630	108.61			16.45	H	354.9	2.00

Level in dB μ V/m

Frequency in GHz

PK+ Level @CriticalPoint PK+ Level @Spectrum Overview PK+ Limit @5G WiFi 20M-B1_CH48

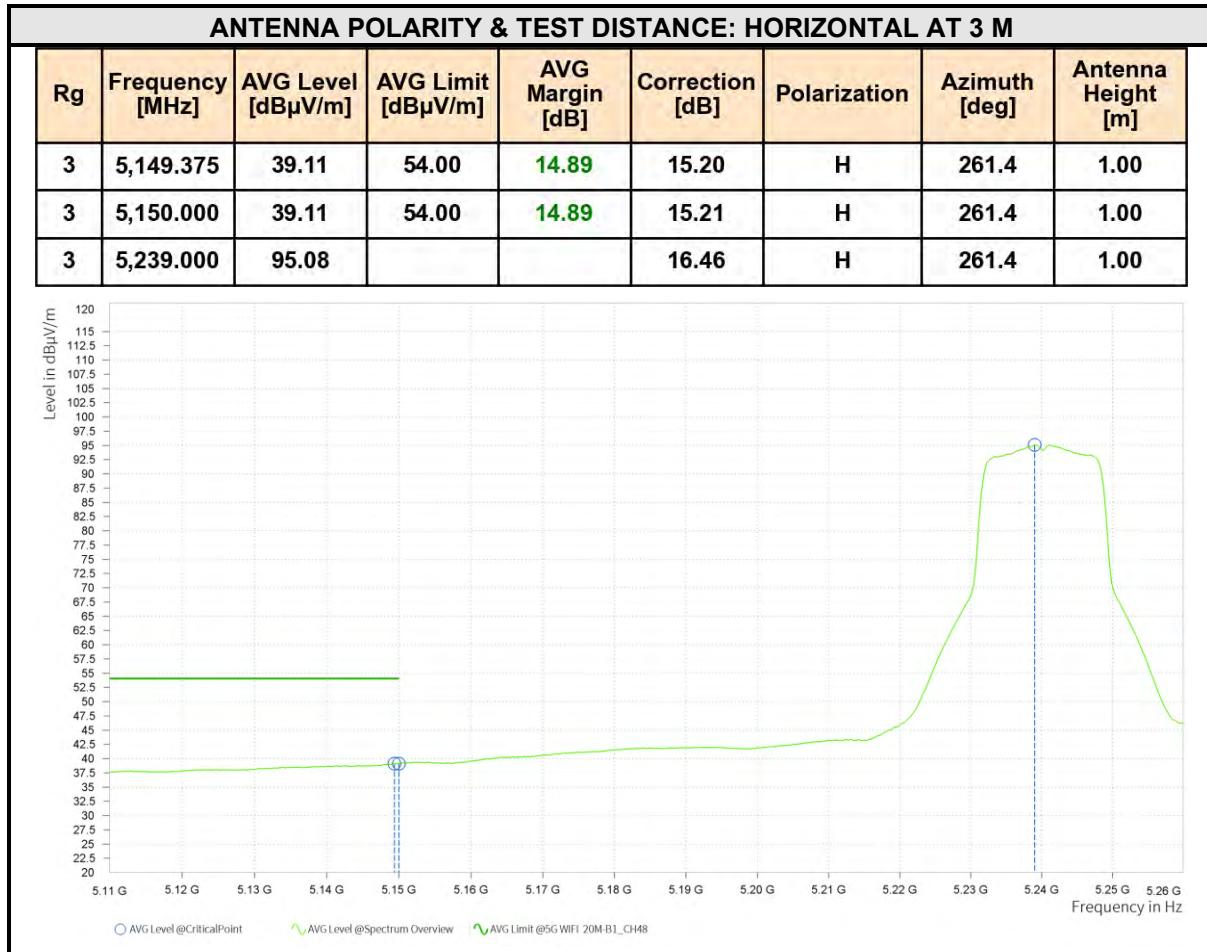

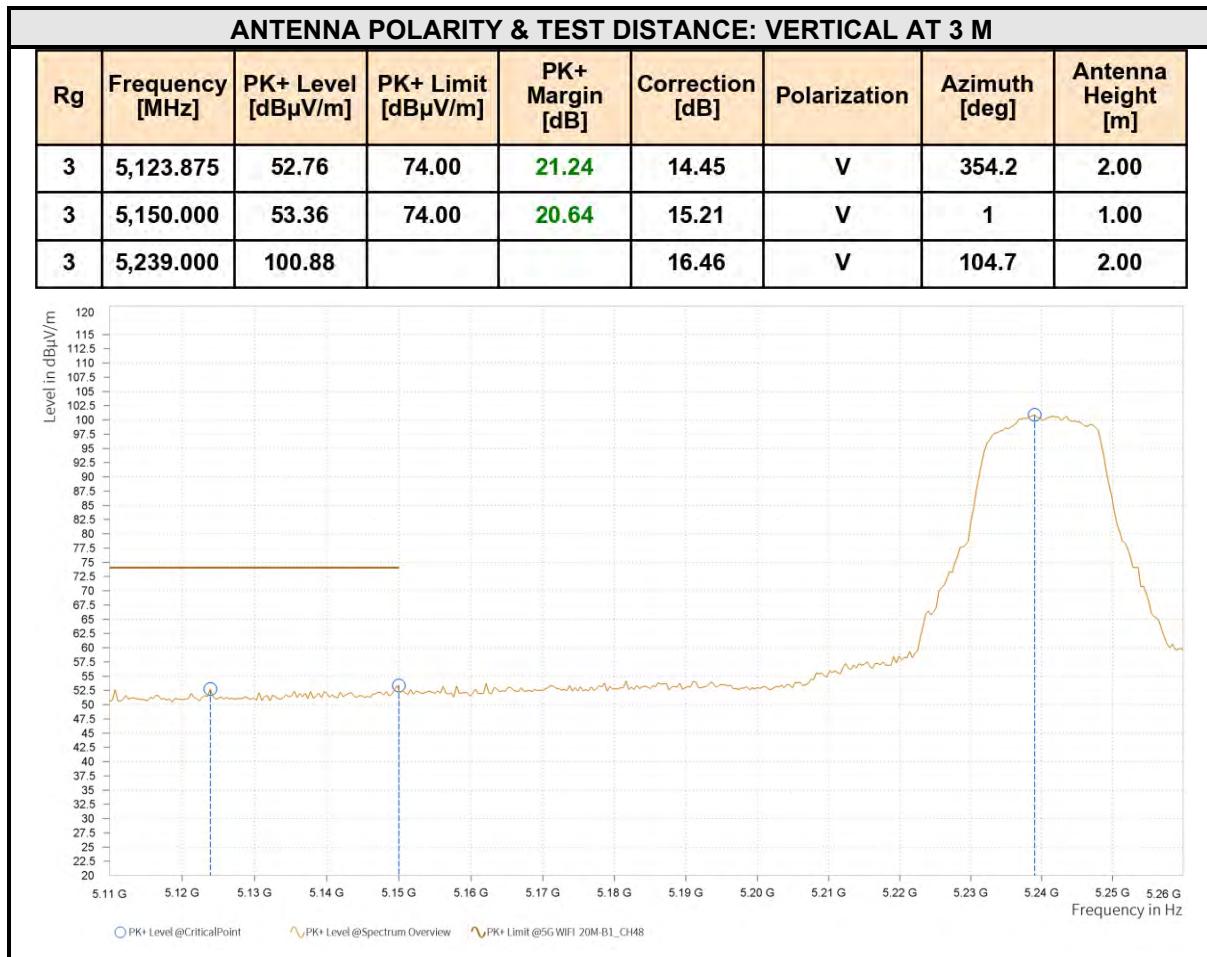



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	Avg Level [dB μ V/m]	Avg Limit [dB μ V/m]	Avg Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,149.000	38.06	54.00	15.94	15.19	V	1	1.00
3	5,150.000	38.09	54.00	15.91	15.21	V	1	1.00
3	5,239.000	90.62			16.46	V	5.2	1.00

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5240MHz: Fundamental frequency.



802.11n (20MHz)								
CHANNEL		TX Channel 36		DETECTOR		Peak (PK)		
FREQUENCY RANGE		1GHz ~ 40GHz		FUNCTION		Average (AV)		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,149.600	64.38	74.00	9.62	15.21	H	303.1	1.00
1	5,150.000	64.38	74.00	9.62	15.21	H	303.1	1.00
1	5,182.000	111.55			16.21	H	359	1.00

Level in dB μ V/m


Frequency in Hz


PK+ Level @CriticalPoint PK+ Level @Spectrum Overview PK+ Limit @5G WiFi 20M-B1_CH36




BUREAU
VERITAS

Test Report No.: PSU-NQN2412090110RF10

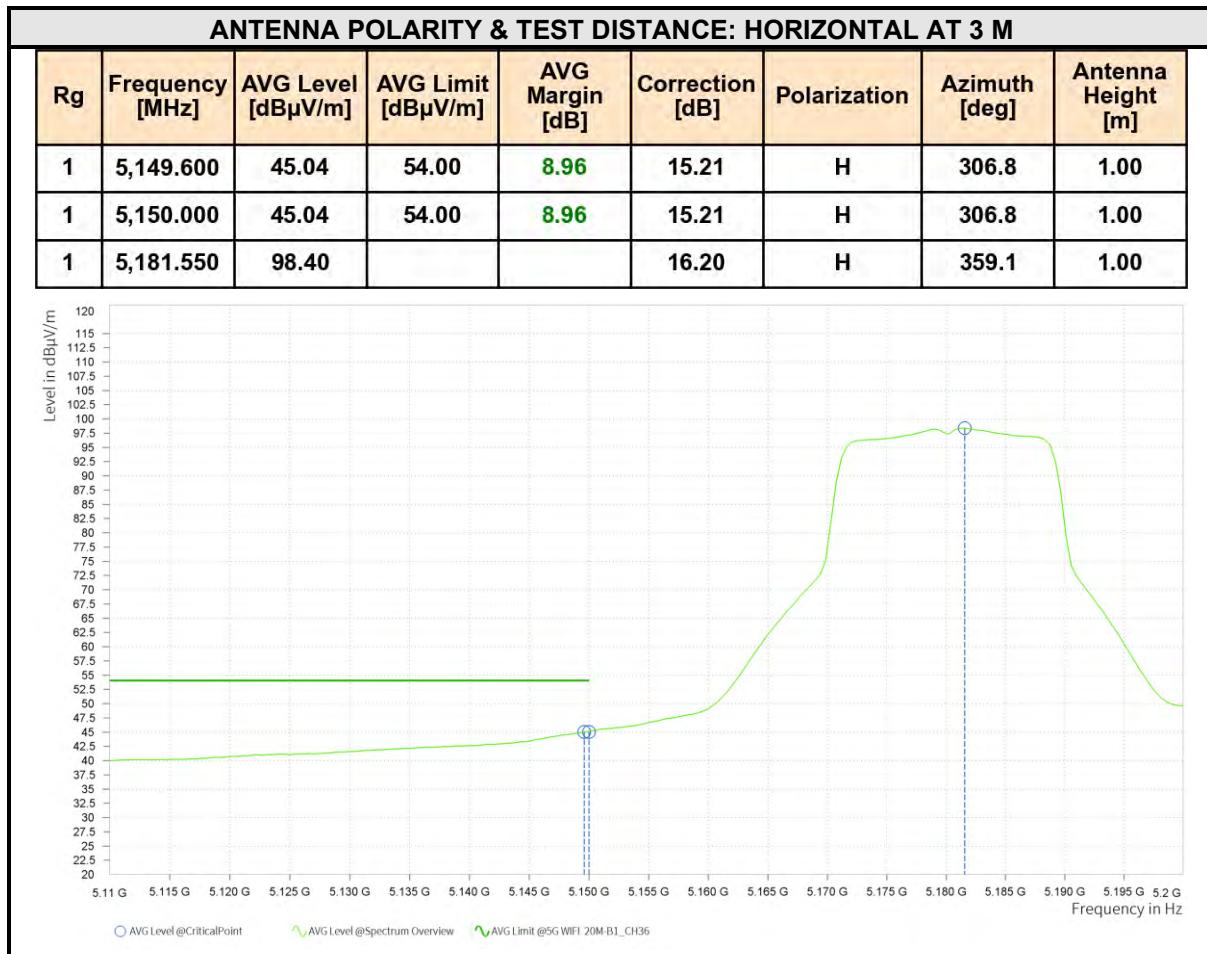

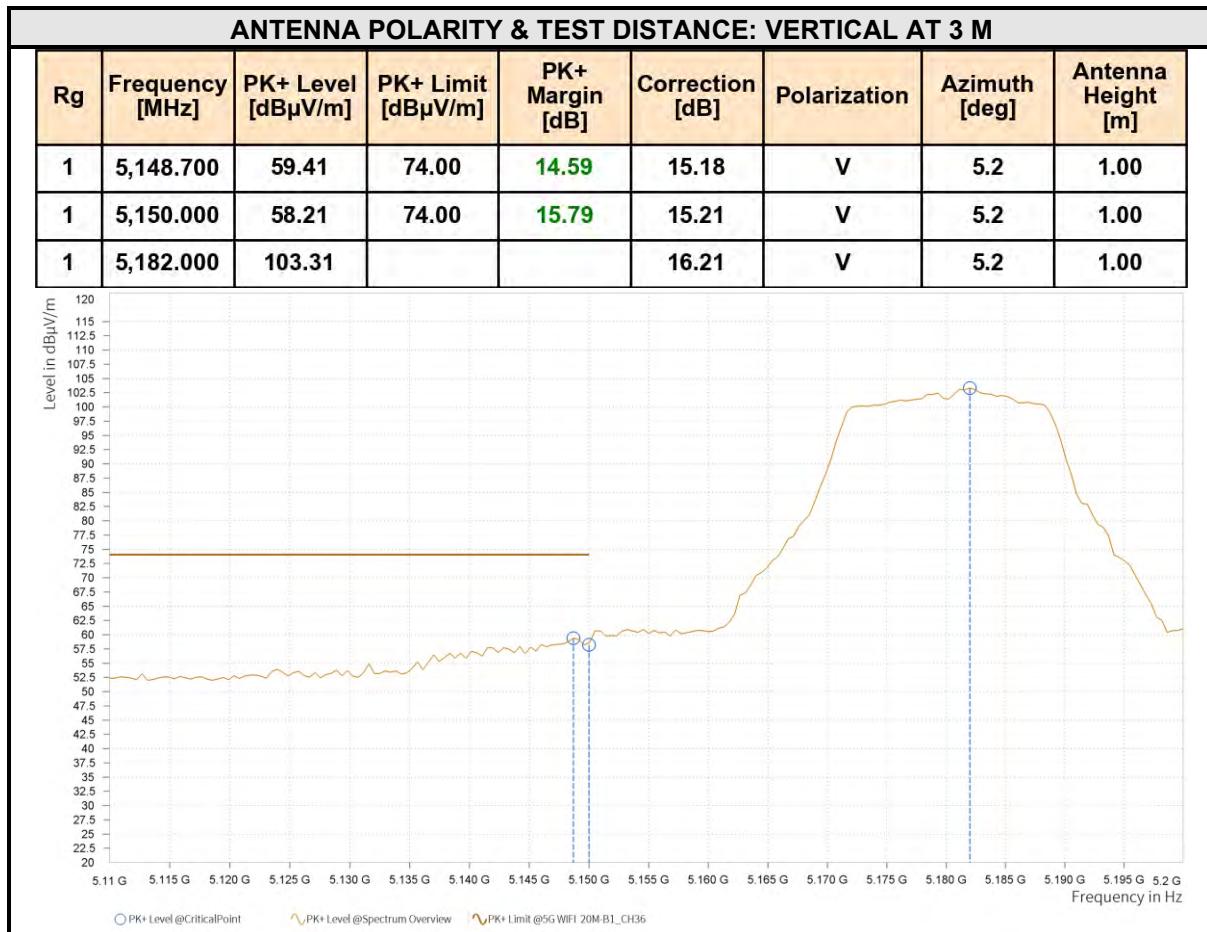

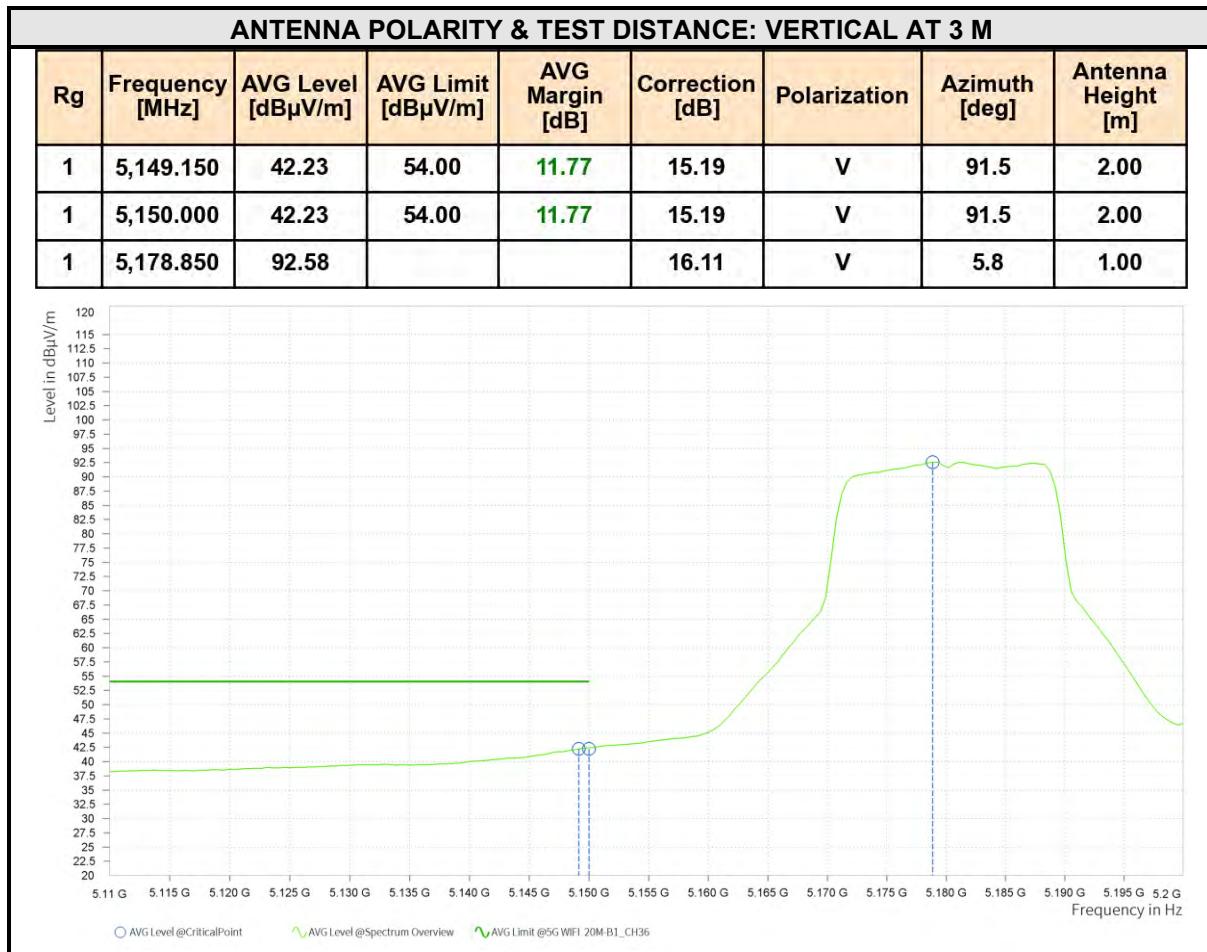

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5180MHz: Fundamental frequency.




CHANNEL		TX Channel 40		DETECTOR FUNCTION		Peak (PK) Average (AV)		
FREQUENCY RANGE		1GHz ~ 40GHz						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,148.100	60.03	74.00	13.97	15.16	H	359.1	1.00
2	5,150.000	60.02	74.00	13.98	15.18	H	261.3	1.00
2	5,202.100	109.77			16.63	H	1	1.00

Level in dB μ V/m

Frequency in Hz

PK+ Level @CriticalPoint PK+ Level @Spectrum Overview PK+ Limit @5G WiFi 20M-B1_CH40

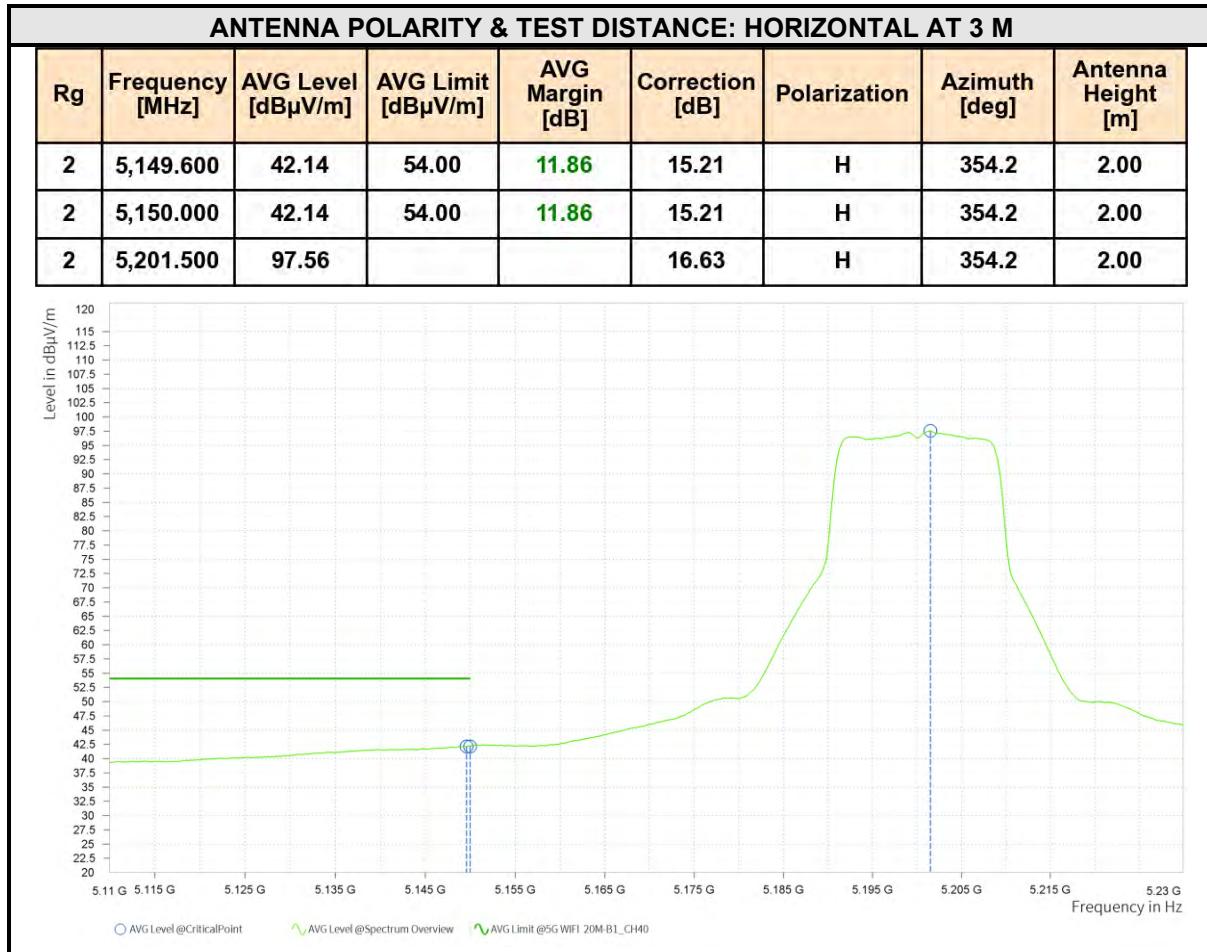



BUREAU
VERITAS

Test Report No.: PSU-NQN2412090110RF10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,149.600	54.03	74.00	19.97	15.21	V	5.8	1.00
2	5,150.000	54.03	74.00	19.97	15.21	V	5.8	1.00
2	5,207.500	100.81			16.60	V	137	2.00



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,149.300	39.63	54.00	14.37	15.20	V	5.1	1.00
2	5,150.000	39.62	54.00	14.38	15.21	V	5.1	1.00
2	5,203.600	91.36			16.62	V	95.1	2.00

Level in dB μ V/m

Frequency in Hz

Legend: AVG Level @CriticalPoint (Blue Circle), AVG Level @Spectrum Overview (Green Line), AVG Limit @5G WIFI 20M-B1_CH40 (Blue Line)

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5200MHz: Fundamental frequency.





CHANNEL		TX Channel 48		DETECTOR FUNCTION		Peak (PK) Average (AV)		
FREQUENCY RANGE		1GHz ~ 40GHz						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,135.875	54.74	74.00	19.26	14.81	H	359.1	1.00
3	5,150.000	53.63	74.00	20.37	15.21	H	97.6	2.00
3	5,241.250	108.87			16.45	H	261.3	1.00

Level in dB μ V/m

Frequency in GHz

PK+ Level @CriticalPoint PK+ Level @Spectrum Overview PK+ Limit @5G WiFi 20M-B1_CH48

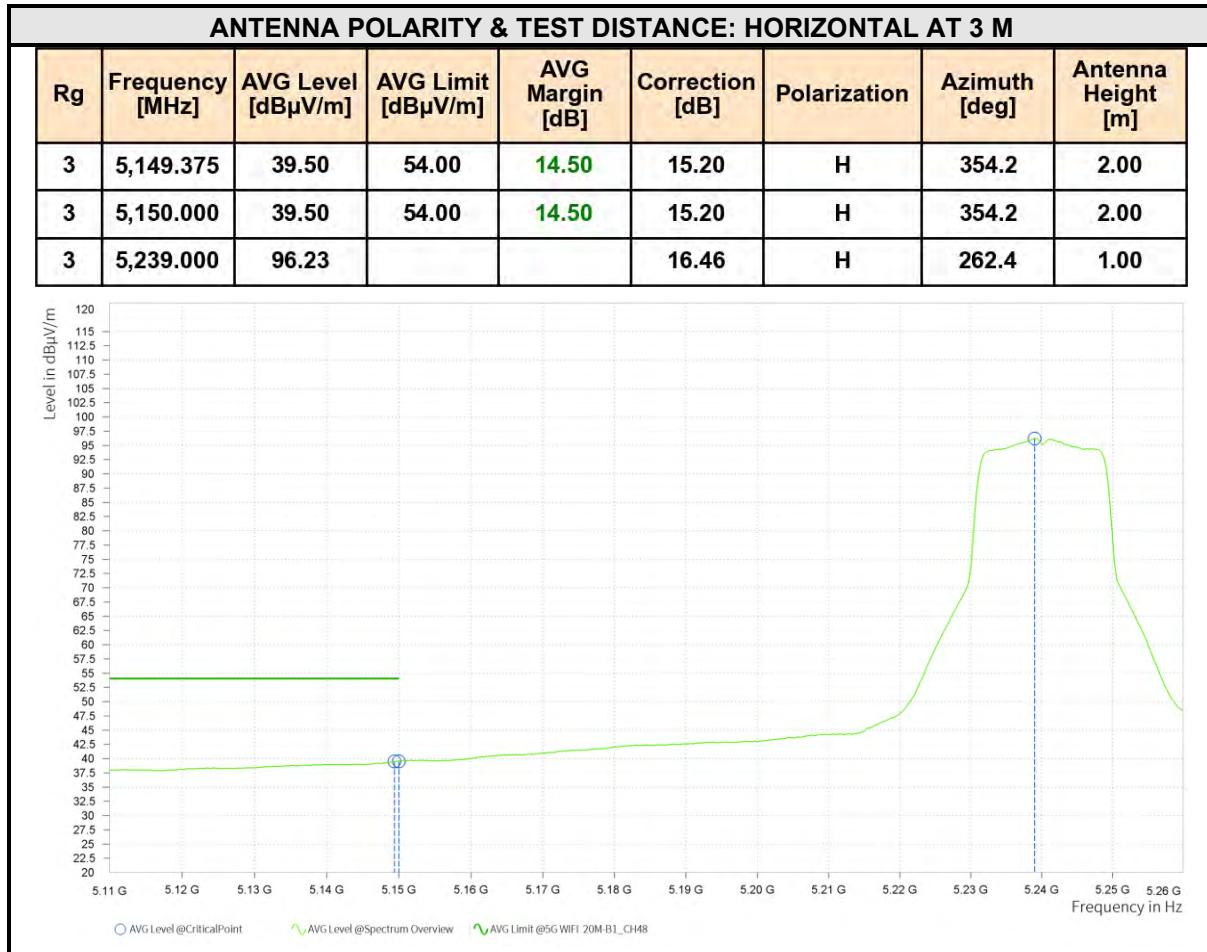

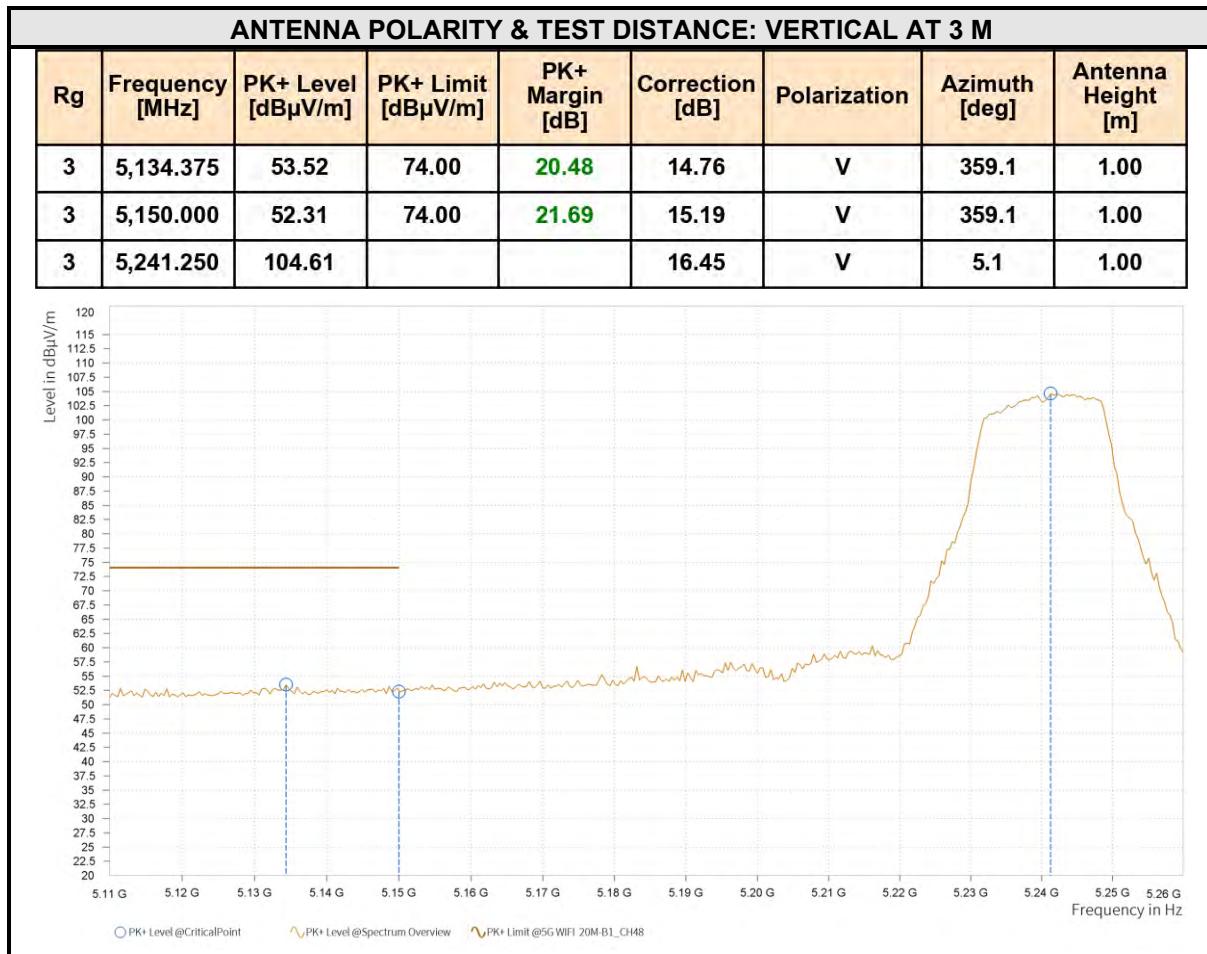



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,149.000	38.86	54.00	15.14	15.19	V	5.1	1.00
3	5,150.000	38.92	54.00	15.08	15.21	V	5.1	1.00
3	5,241.250	90.70			16.45	V	97.6	2.00

Level in dB μ V/m

Frequency in Hz

Legend: ○ AVG Level @CriticalPoint ^ AVG Level @Spectrum Overview ▼ AVG Limit @5G WiFi 20M B1_CH48

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5240MHz: Fundamental frequency.




802.11n (40MHz)								
CHANNEL		TX Channel 38		DETECTOR FUNCTION		Peak (PK) Average (AV)		
FREQUENCY RANGE		1GHz ~ 40GHz						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,149.500	64.17	74.00	9.83	15.20	H	1	1.00
1	5,150.000	61.18	74.00	12.82	15.22	H	0.9	2.00
1	5,186.500	105.57			16.35	H	278.6	1.00

Level in dB μ V/m

Frequency in Hz

Legend: ○ PK+ Level @CriticalPoint ^ PK+ Level @Spectrum Overview ▼ PK+ Limit @5G WiFi 40M-B1_CH38

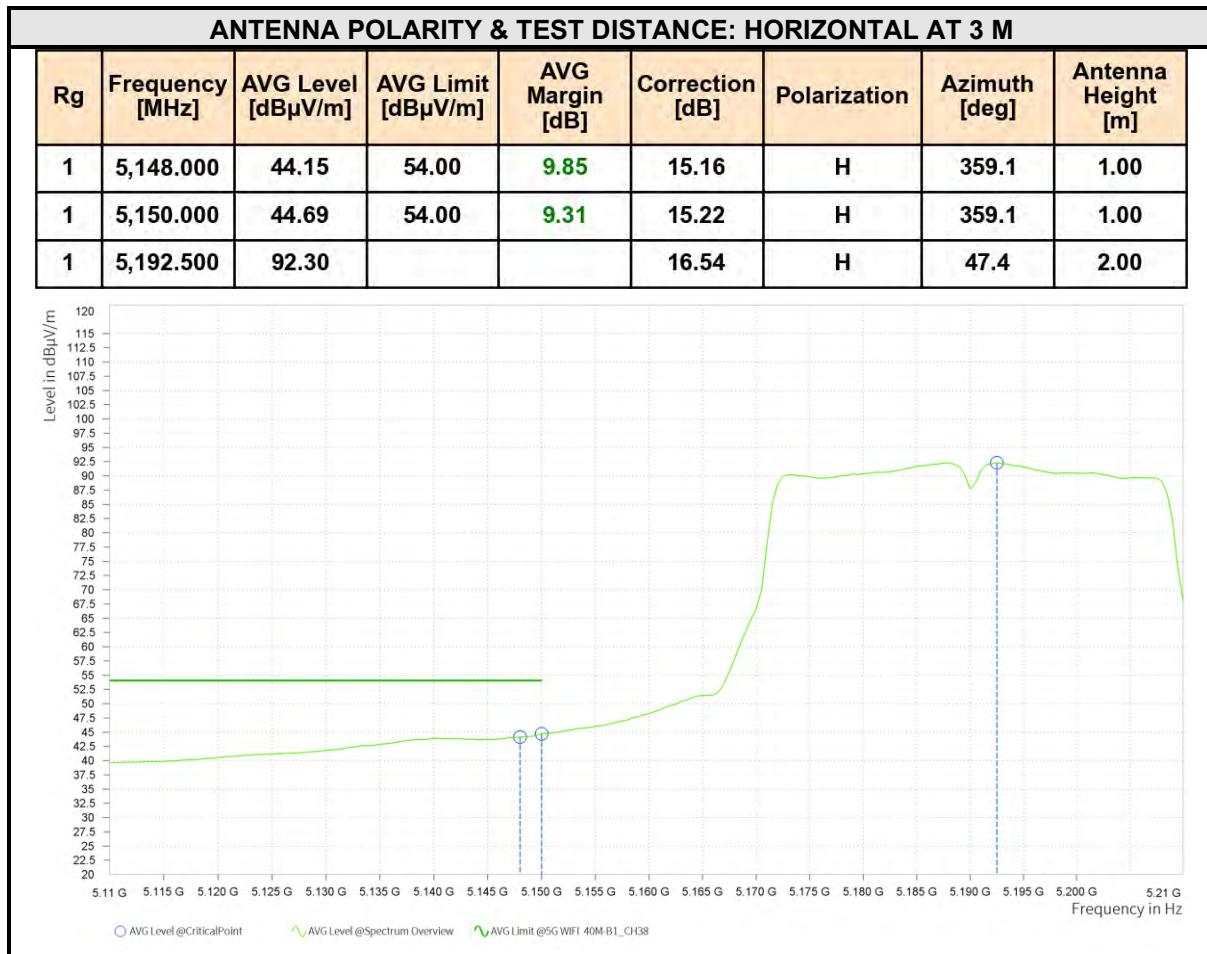



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,111.500	61.09	74.00	12.91	14.09	V	1	1.00
1	5,150.000	57.57	74.00	16.43	15.22	V	55.2	1.00
1	5,192.500	100.06			16.54	V	28.5	1.00

Level in dB μ V/m

Frequency in Hz

PK+ Level @CriticalPoint PK+ Level @Spectrum Overview PK+ Limit @5G WiFi 40M-B1_CH38




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,149.000	41.00	54.00	13.00	15.19	V	54	1.00
1	5,150.000	41.07	54.00	12.93	15.22	V	54	1.00
1	5,192.500	87.18			16.54	V	27.8	1.00

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5190MHz: Fundamental frequency.

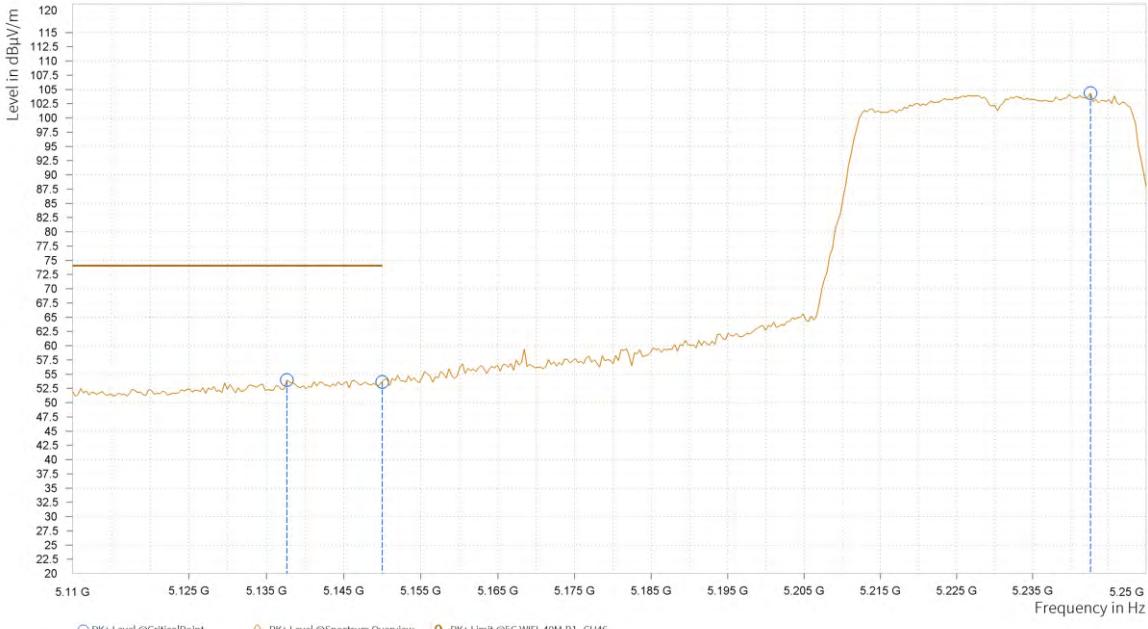



CHANNEL		TX Channel 46		DETECTOR FUNCTION		Peak (PK) Average (AV)		
FREQUENCY RANGE		1GHz ~ 40GHz						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,137.650	53.99	74.00	20.01	14.86	H	1.8	2.00
2	5,150.000	53.65	74.00	20.35	15.21	H	359	1.00
2	5,242.650	104.38			16.45	H	97	2.00
								




BUREAU
VERITAS

Test Report No.: PSU-NQN2412090110RF10

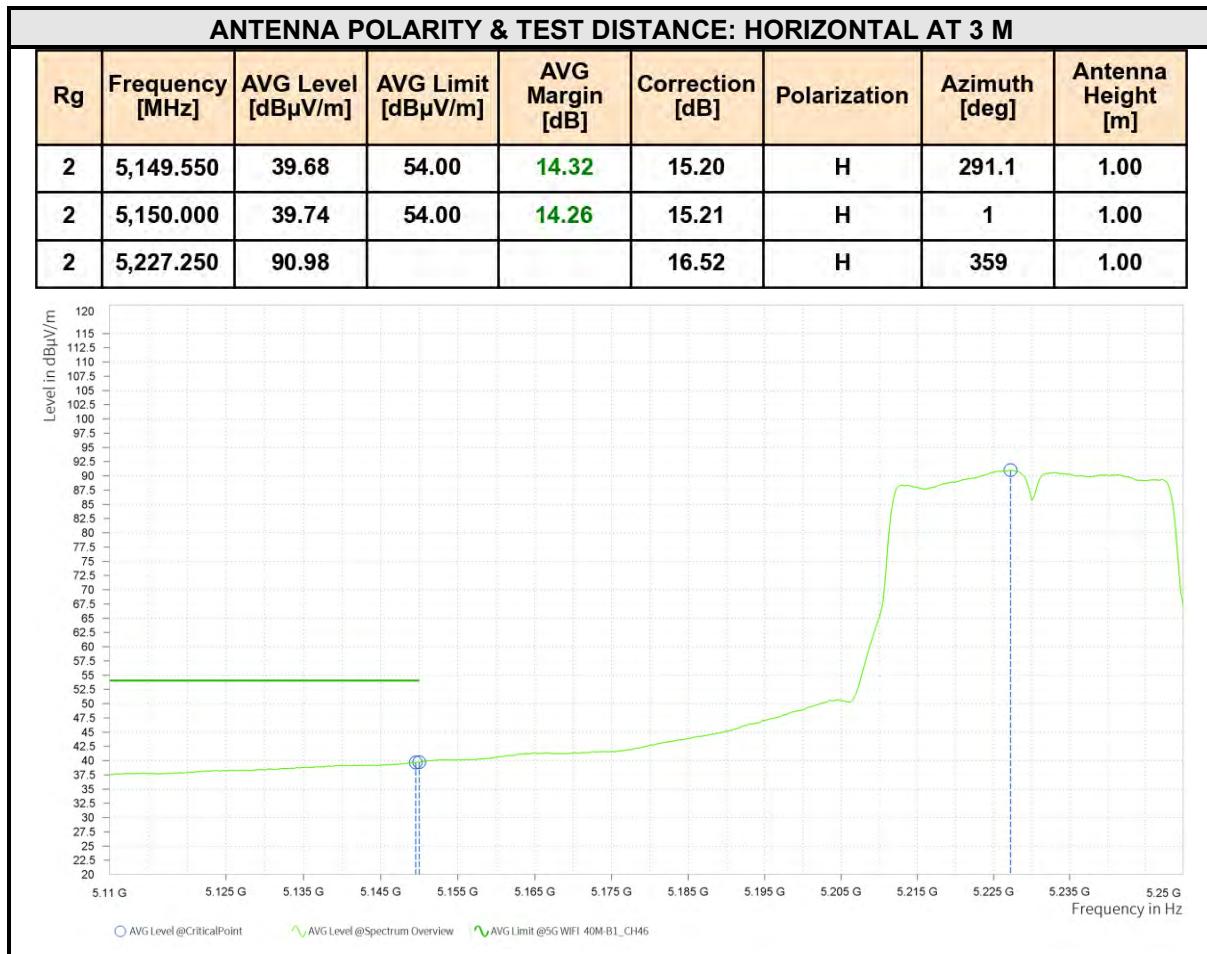

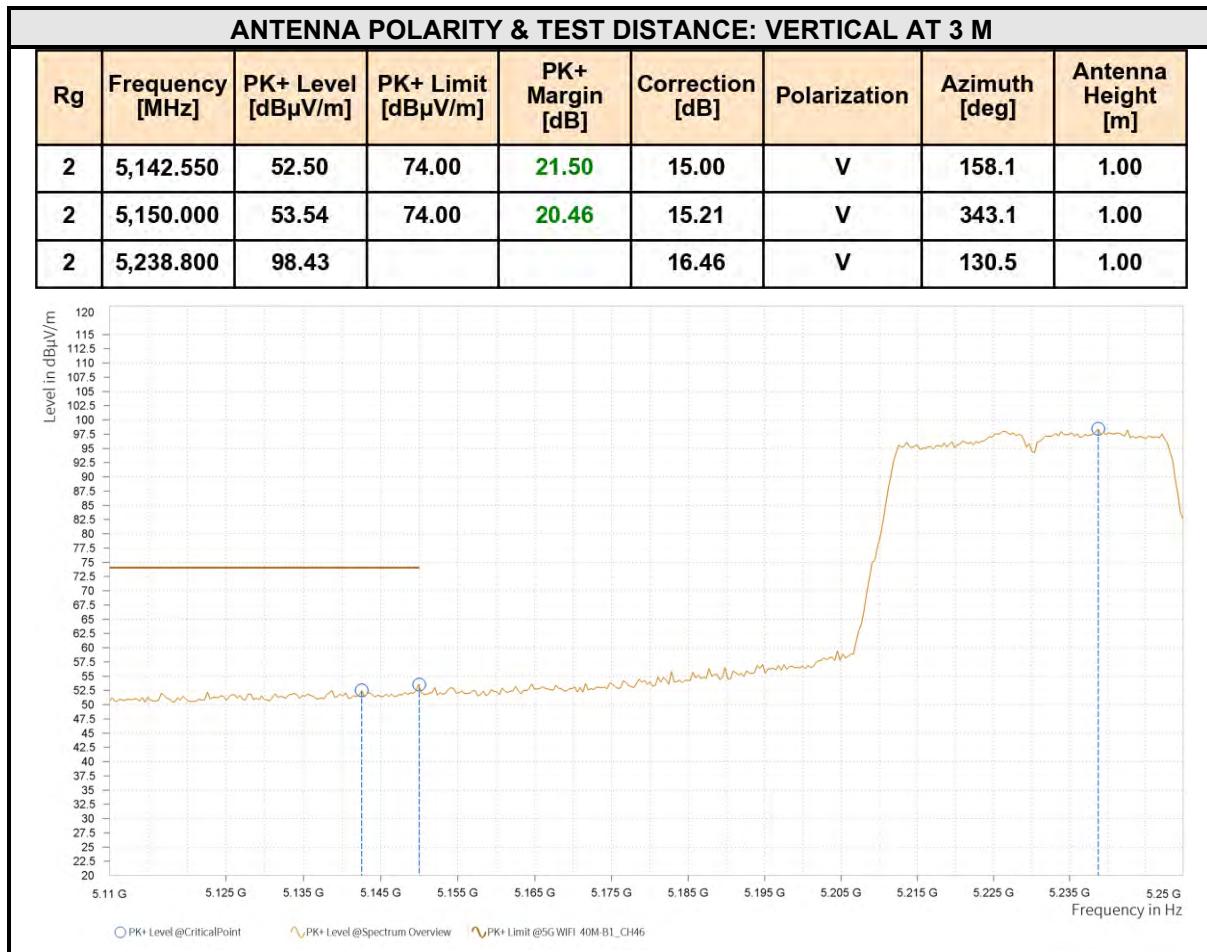

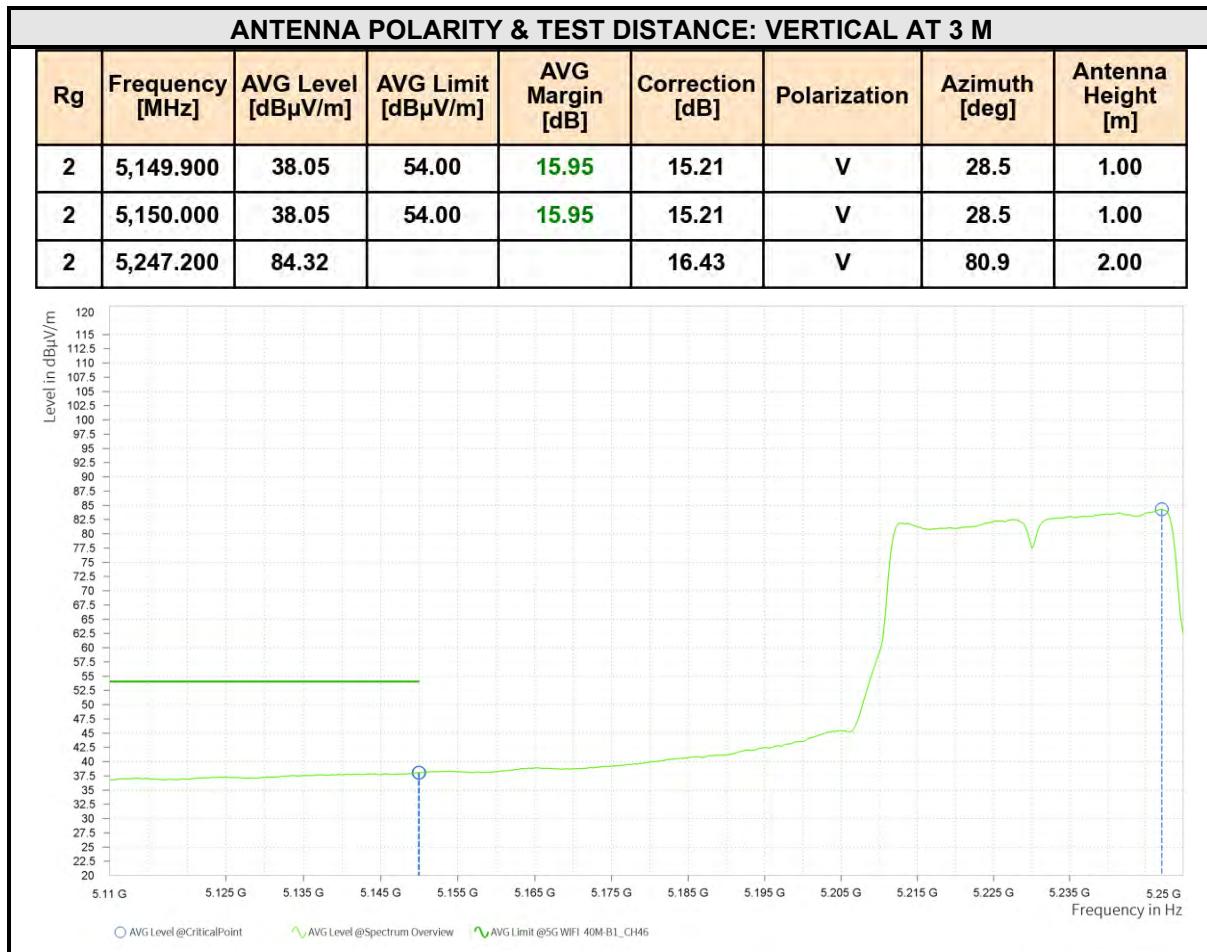

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5230MHz: Fundamental frequency.



802.11ac (20MHz)								
CHANNEL		TX Channel 36		DETECTOR		Peak (PK)		
FREQUENCY RANGE		1GHz ~ 40GHz		FUNCTION		Average (AV)		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,149.500	58.74	74.00	15.26	11.76	H	354.6	1.00
1	5,150.000	58.56	74.00	15.44	11.76	H	354.6	1.00
1	5,182.000	103.92			11.85	H	318.5	1.00

Level in dB μ V/m


Frequency in Hz


PK+ Level @CriticalPoint PK+ Level @Spectrum Overview PK+ Limit @5G WiFi 20M B1_C136



BUREAU
VERITAS

Test Report No.: PSU-NQN2412090110RF10

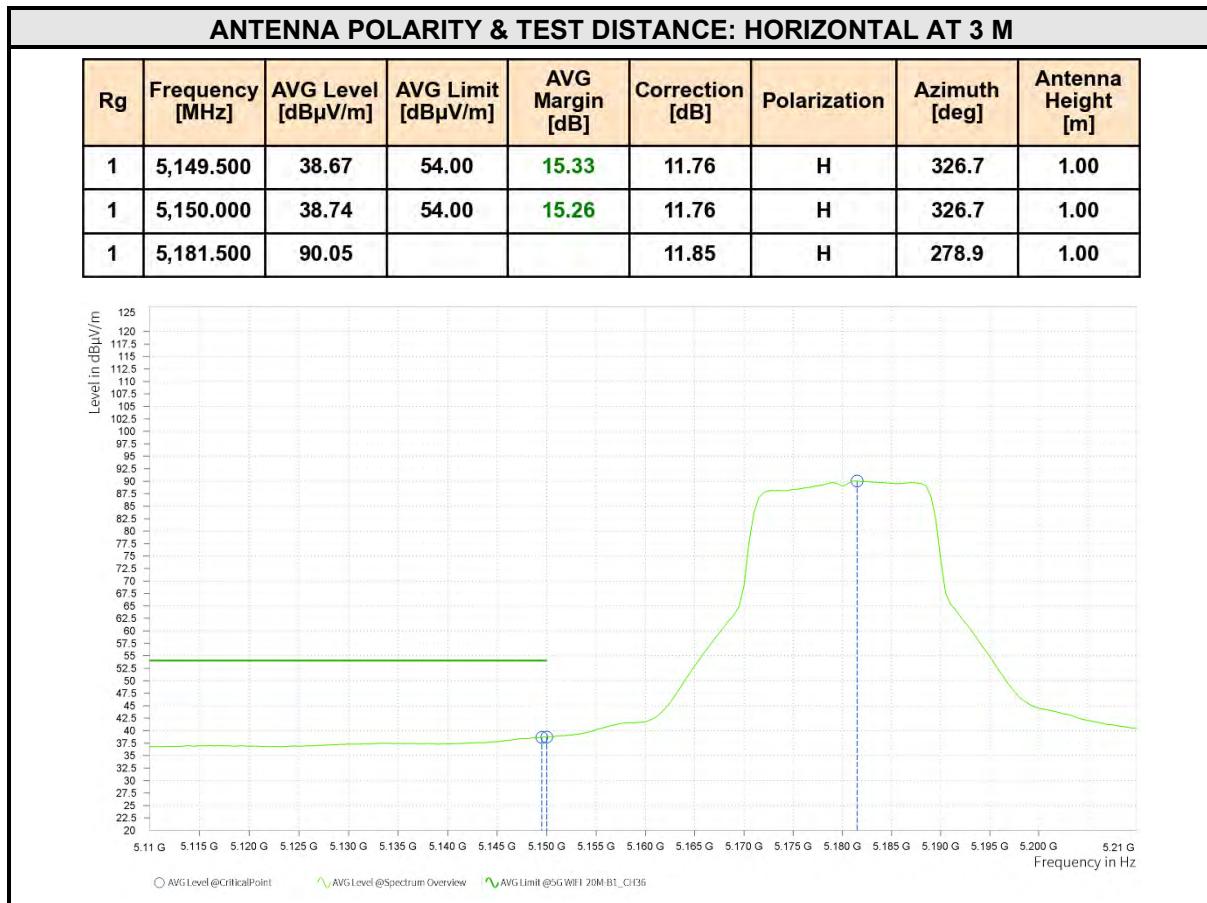

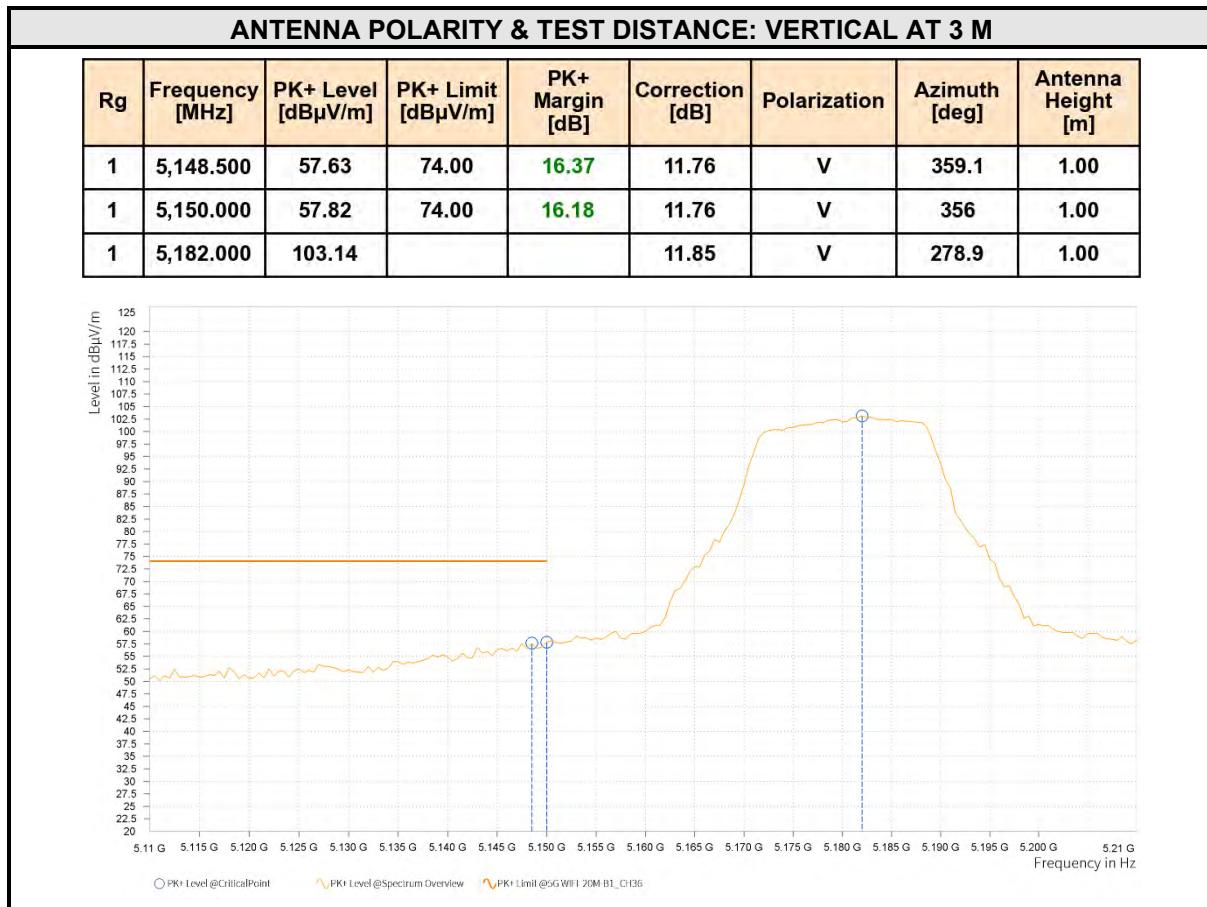



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,148.500	39.23	54.00	14.77	11.76	V	90.1	1.00
1	5,150.000	39.14	54.00	14.86	11.76	V	90.1	1.00
1	5,181.500	89.76			11.85	V	5	1.00

Level in dB μ V/m

Frequency in Hz

Legend: AVG Level @CriticalPoint AVG Level @Spectrum Overview AVG Limit @5G WiFi 20M-B1_CH36

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5180MHz: Fundamental frequency.



CHANNEL		TX Channel 40		DETECTOR FUNCTION		Peak (PK) Average (AV)					
FREQUENCY RANGE		1GHz ~ 40GHz									
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]			
2	5,149.500	56.29	74.00	17.71	11.76	H	328	1.00			
2	5,150.000	53.65	74.00	20.35	11.76	H	359.1	1.00			
2	5,201.500	107.79			11.92	H	281.4	1.00			

Level in dB μ V/m

Frequency in Hz

PK+ Level @CriticalPoint PK+ Level @Spectrum Overview PK+ Limit @5G WiFi 20M B1_C140





BUREAU
VERITAS

Test Report No.: PSU-NQN2412090110RF10

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,149.500	39.23	54.00	14.77	11.76	H	355.1	2.00
2	5,150.000	39.24	54.00	14.76	11.76	H	355.1	2.00
2	5,199.000	95.89			11.91	H	264.6	1.00

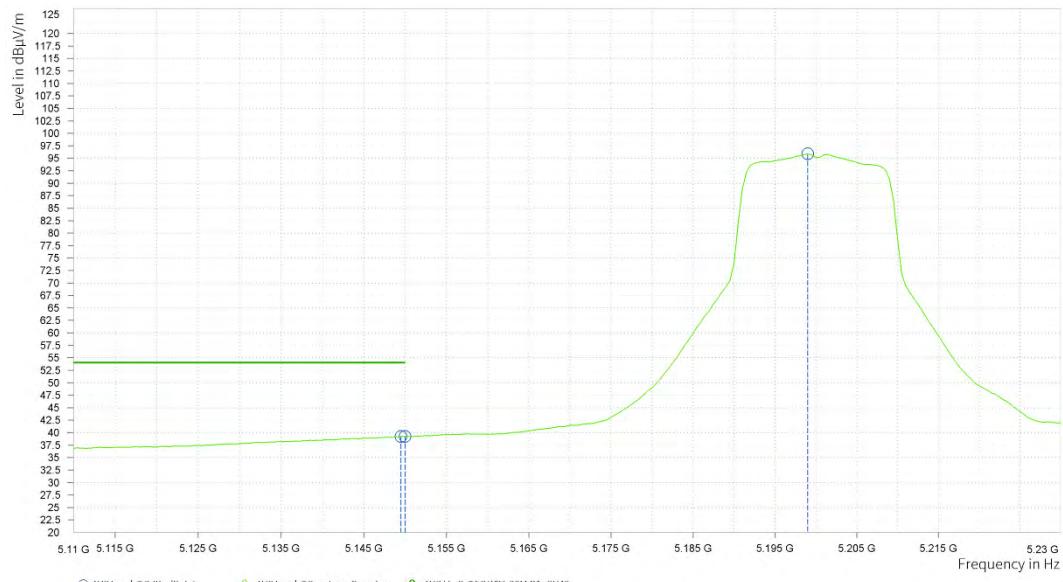

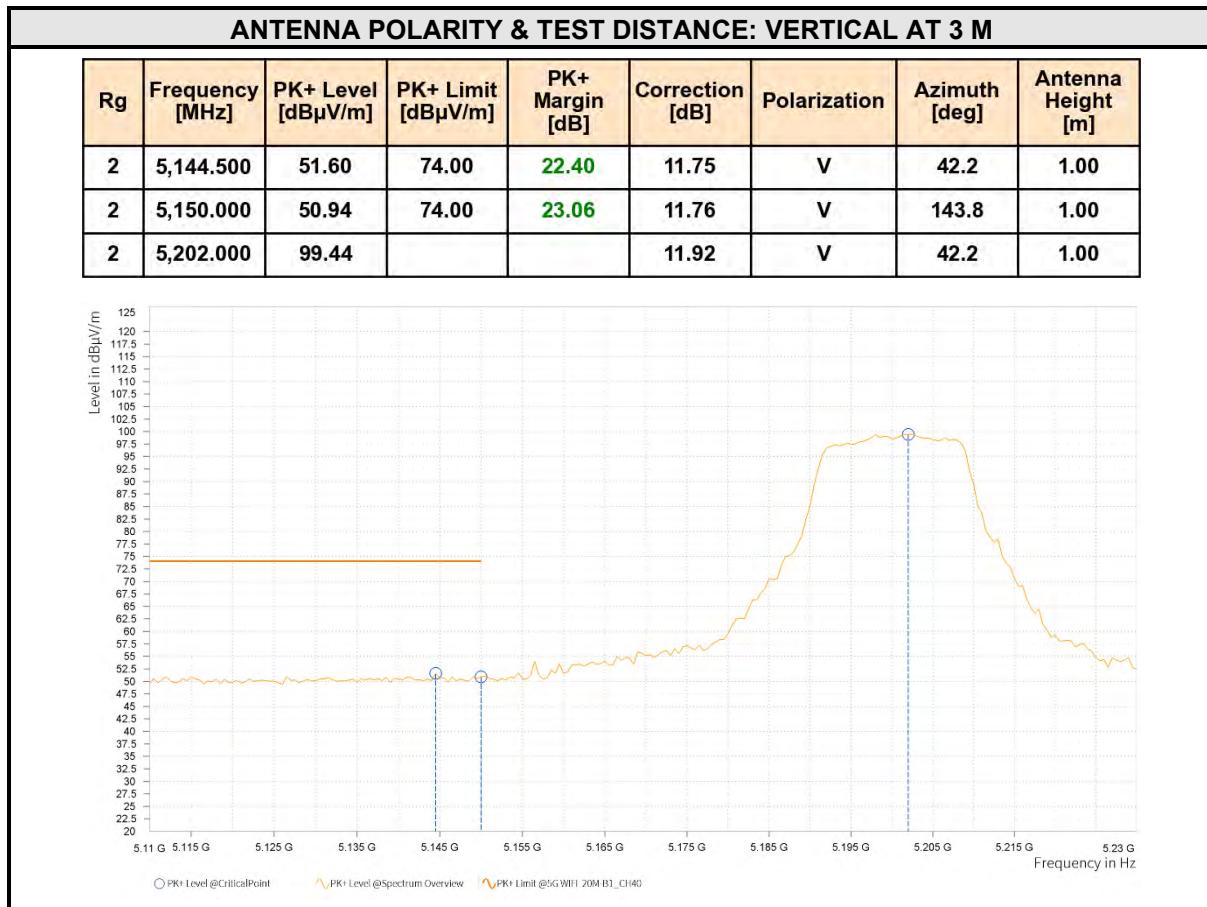



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,148.000	36.99	54.00	17.01	11.76	V	50.7	1.00
2	5,150.000	36.94	54.00	17.06	11.76	V	50.7	1.00
2	5,199.000	88.48			11.91	V	9.6	1.00

Level in dB μ V/m

Frequency in Hz

Legend: AVG Level @CriticalPoint AVG Level @Spectrum Overview AVG Limit @5G WiFi 20M B3_C140

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5200MHz: Fundamental frequency.



CHANNEL		TX Channel 48		DETECTOR FUNCTION		Peak (PK) Average (AV)		
FREQUENCY RANGE		1GHz ~ 40GHz						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,147.500	51.69	74.00	22.31	11.76	H	357.5	1.00
3	5,150.000	50.06	74.00	23.94	11.76	H	332.7	1.00
3	5,238.000	106.10			11.93	H	285	1.00

Level in dB μ V/m

Frequency in Hz

PK+ Level @CriticalPoint PK+ Level @Spectrum Overview PK+ Limit @5G WiFi 20M B1_CH48





BUREAU
VERITAS

Test Report No.: PSU-NQN2412090110RF10

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,149.500	36.88	54.00	17.12	11.76	H	355	2.00
3	5,150.000	36.91	54.00	17.09	11.76	H	355	2.00
3	5,241.500	94.69			11.93	H	289.8	1.00

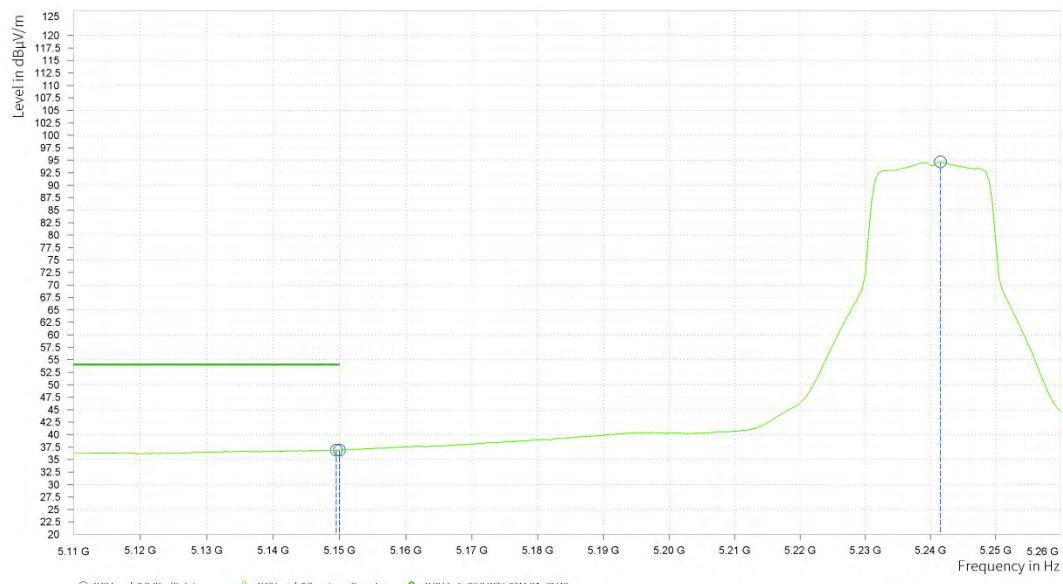

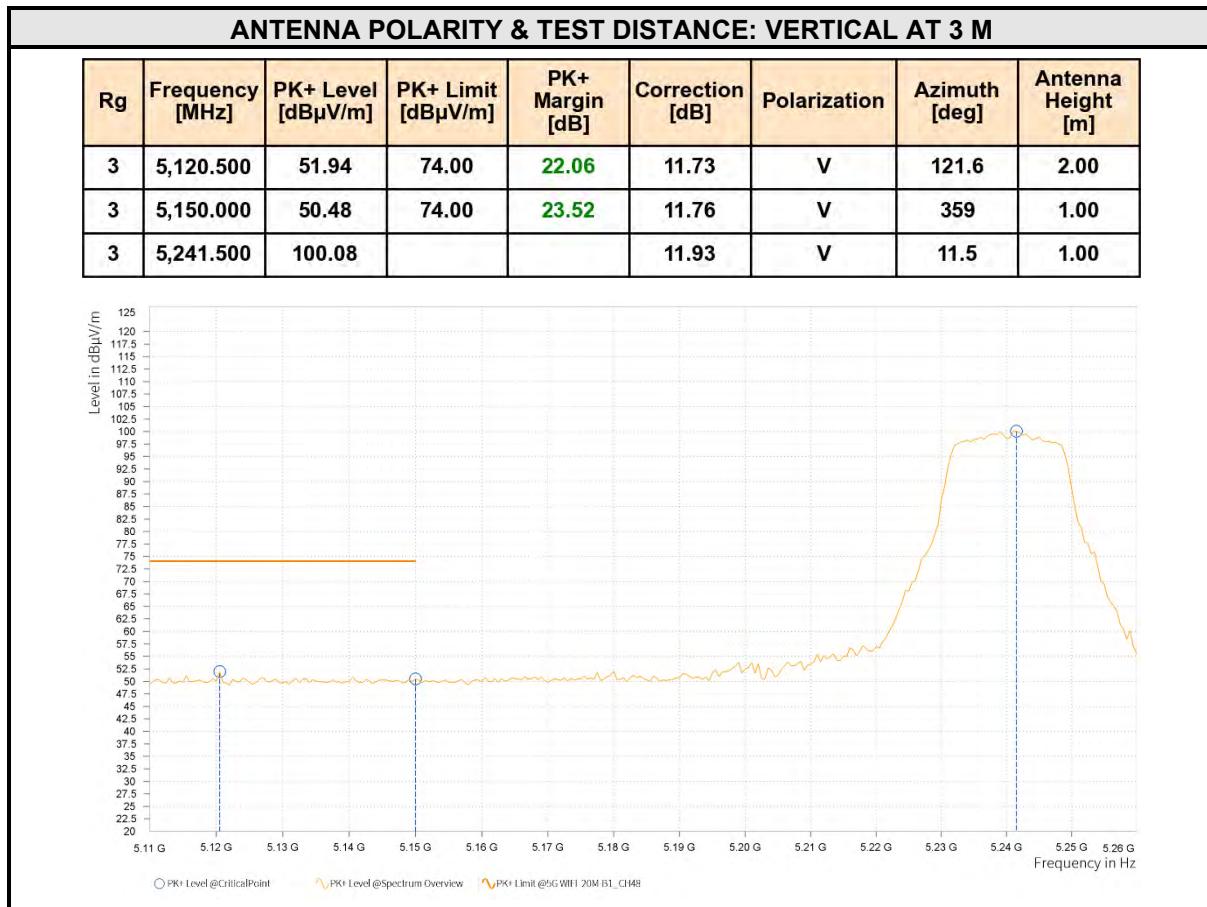



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,147.000	36.38	54.00	17.62	11.75	V	44.6	1.00
3	5,150.000	36.30	54.00	17.70	11.76	V	154.6	1.00
3	5,241.500	86.35			11.93	V	70.3	2.00

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5240MHz: Fundamental frequency.





802.11ac (40MHz)										
CHANNEL		TX Channel 38		DETECTOR FUNCTION		Peak (PK)				
FREQUENCY RANGE		1GHz ~ 40GHz				Average (AV)				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]		
1	5,149.500	63.68	74.00	10.32	15.20	H	355	2.00		
1	5,150.000	58.53	74.00	15.47	15.22	H	1	1.00		
1	5,194.500	105.04			16.60	H	359.1	1.00		

Level in dB μ V/m

Frequency in Hz

PK+ Level @CriticalPoint PK+ Level @Spectrum Overview PK+ Limit @5G WiFi 40M-B1_CH38

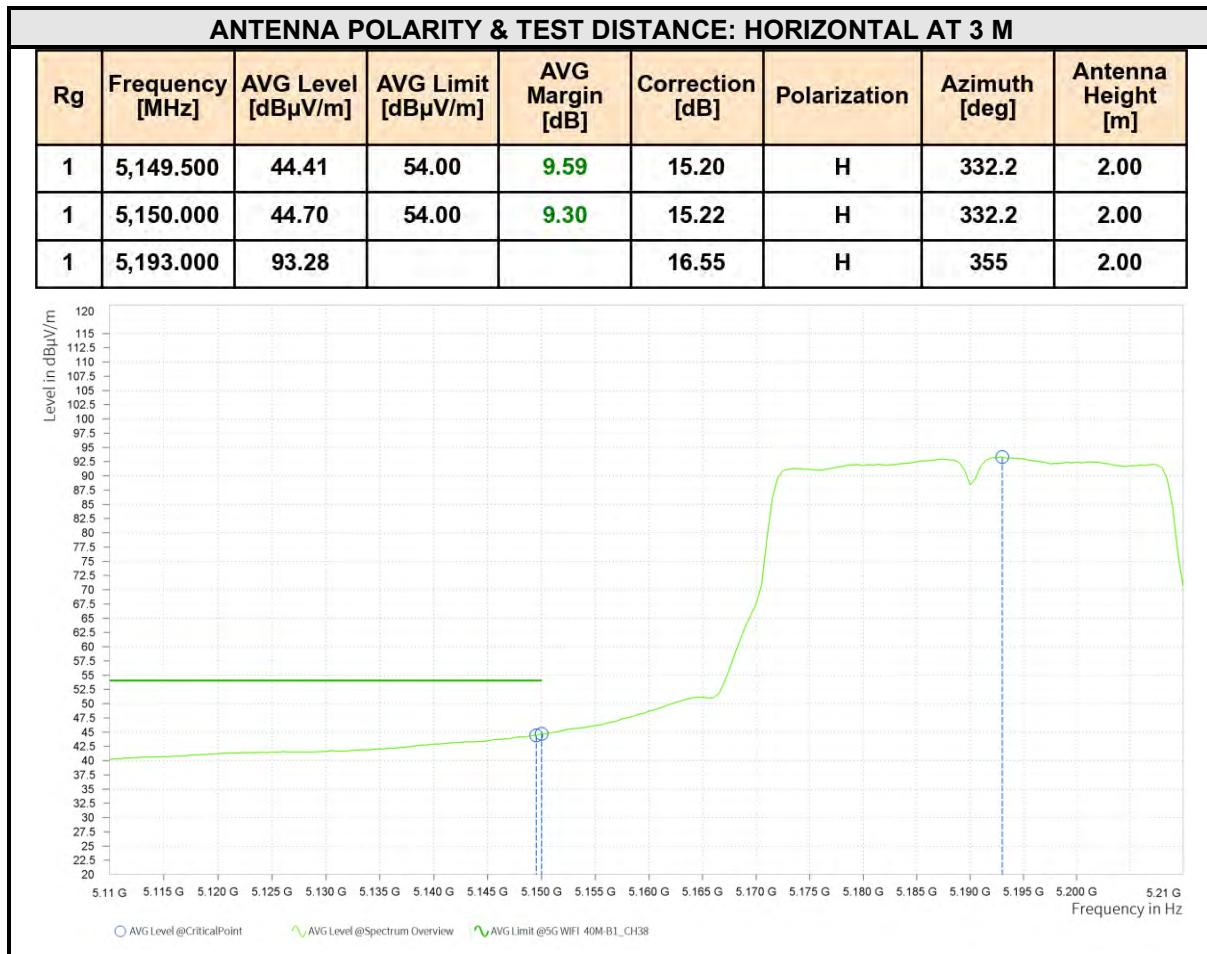

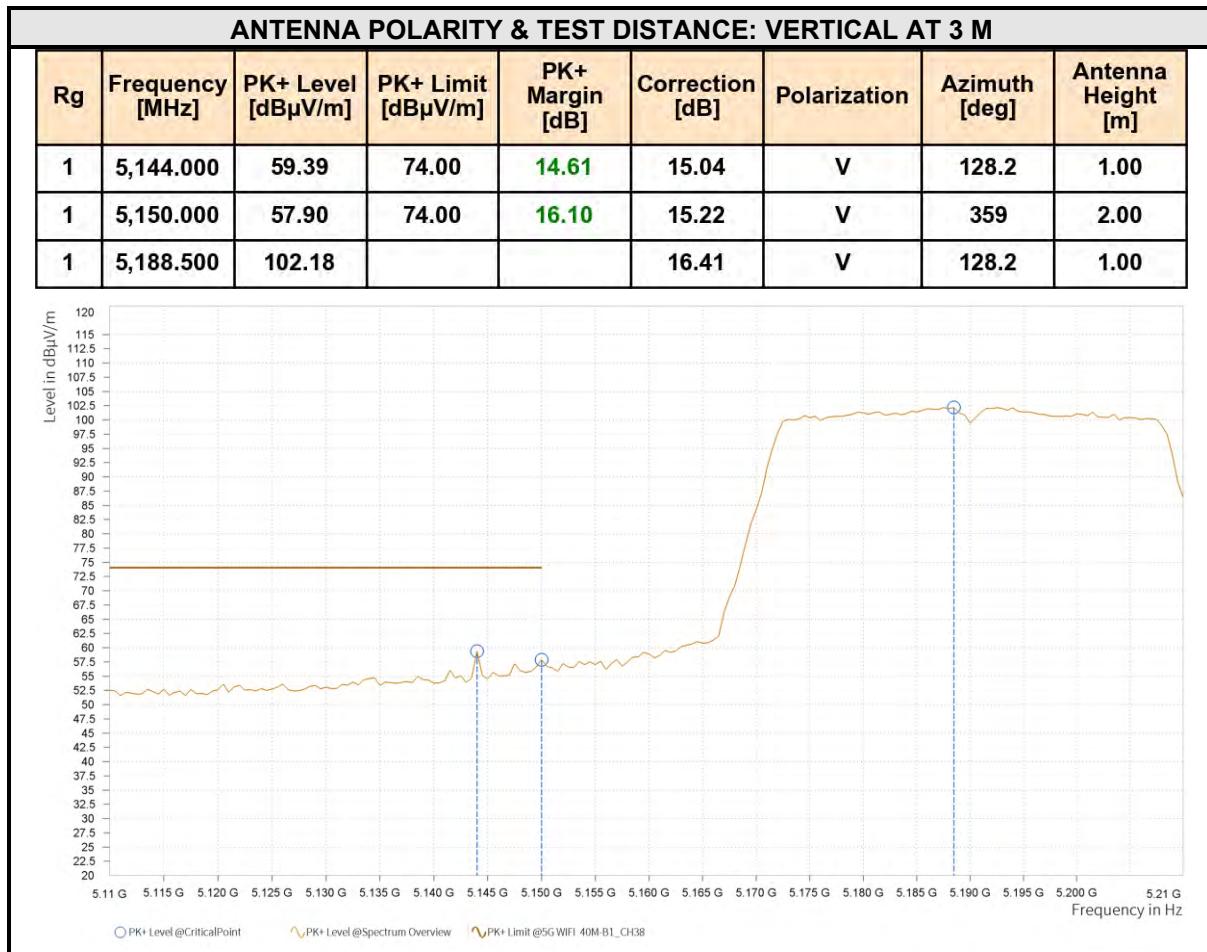




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,149.500	40.91	54.00	13.09	15.20	V	27.9	1.00
1	5,150.000	41.04	54.00	12.96	15.22	V	27.9	1.00
1	5,185.500	87.89			16.32	V	27.9	1.00


REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5190MHz: Fundamental frequency.



CHANNEL		TX Channel 46		DETECTOR FUNCTION		Peak (PK) Average (AV)		
FREQUENCY RANGE		1GHz ~ 40GHz						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,148.150	57.53	74.00	16.47	15.16	H	359.1	1.00
2	5,150.000	56.84	74.00	17.16	15.21	H	359.1	1.00
2	5,225.500	106.71			16.52	H	355.5	2.00

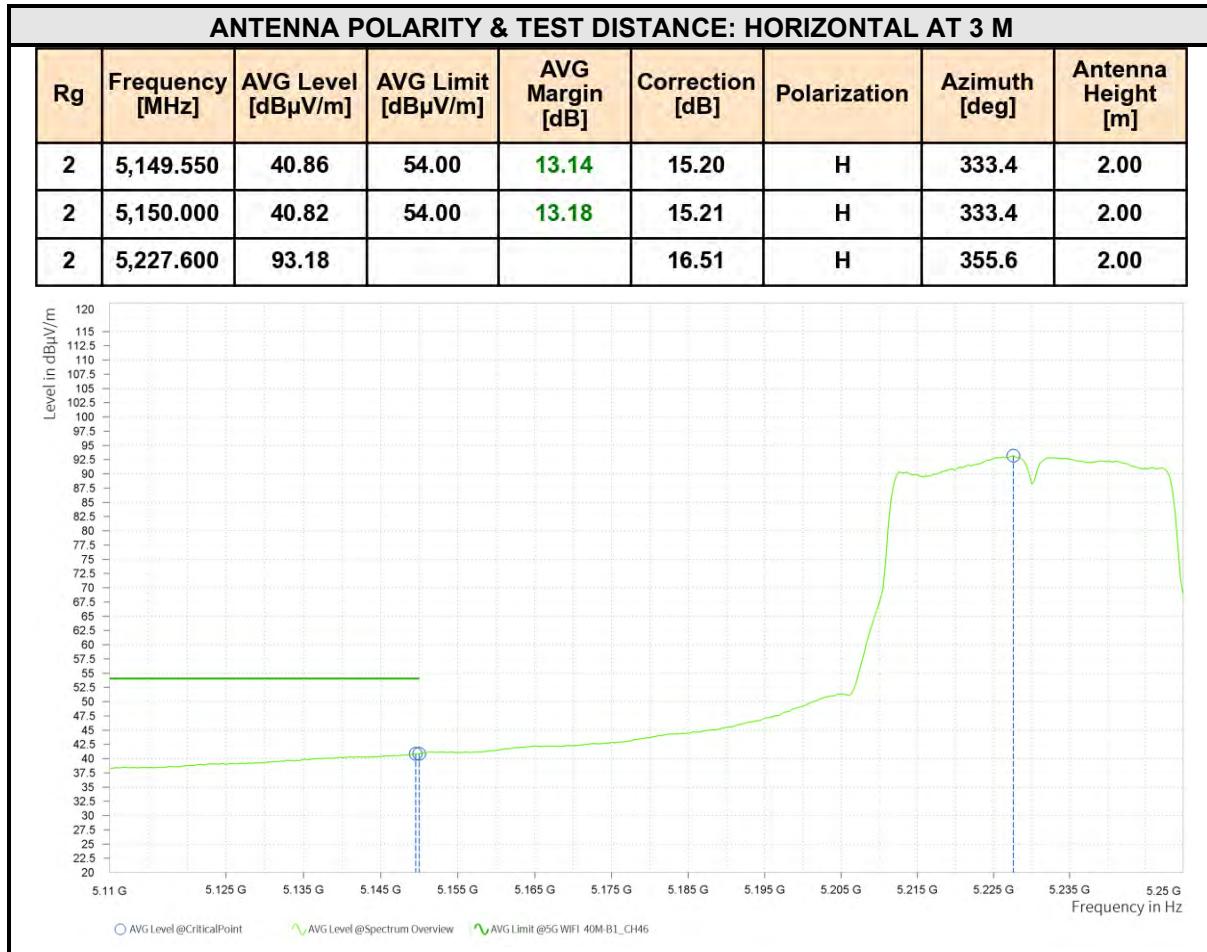

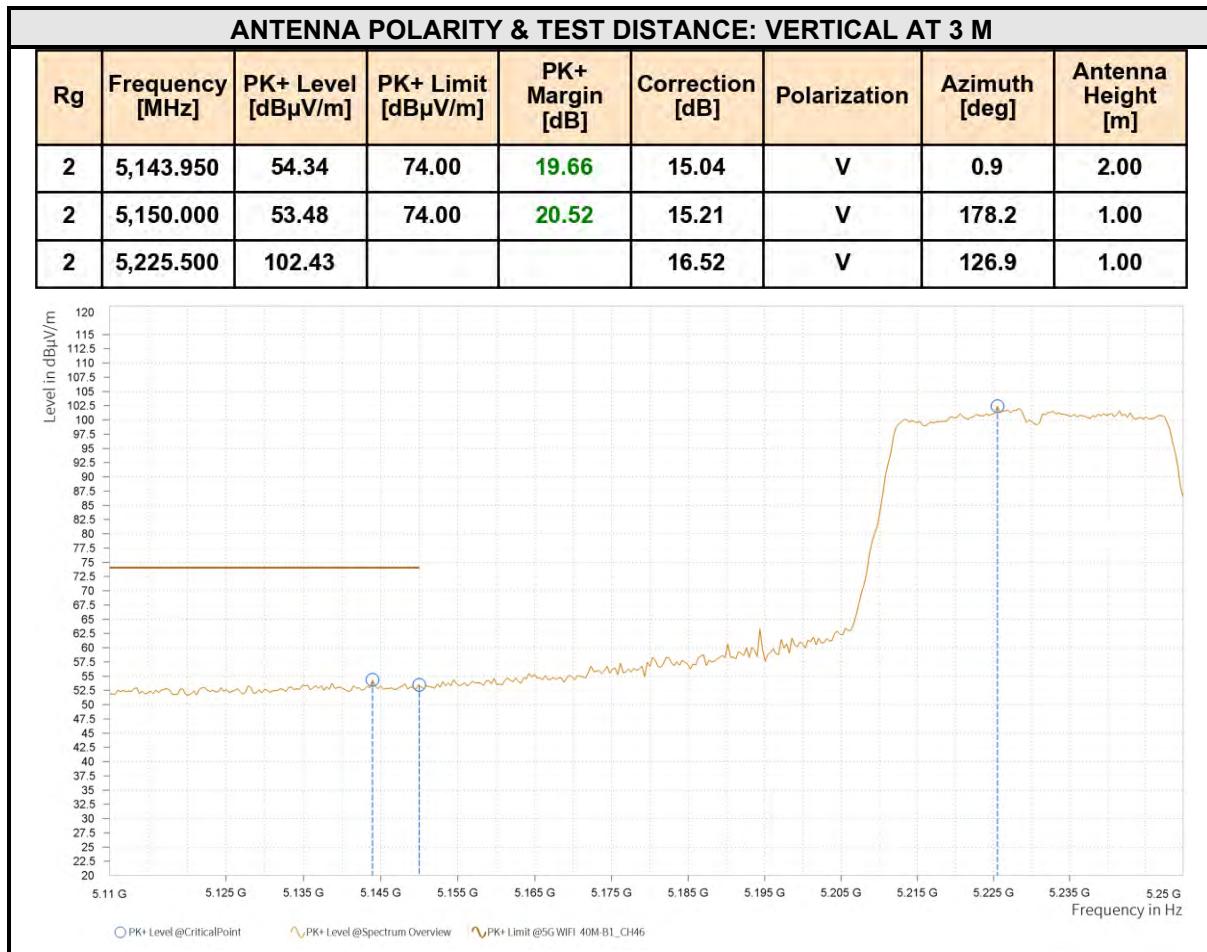

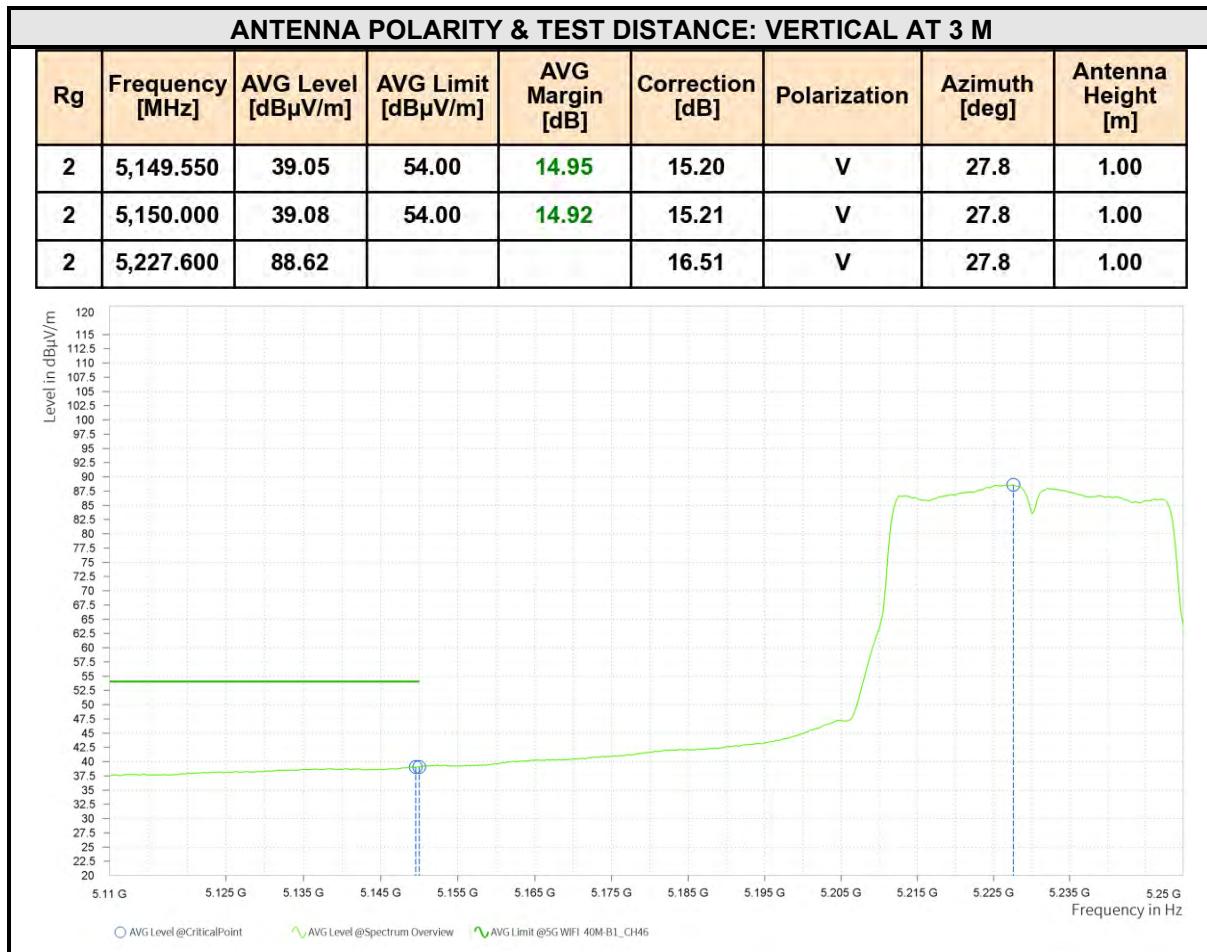

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5230MHz: Fundamental frequency.



802.11ac (80MHz)										
CHANNEL		TX Channel 42		DETECTOR FUNCTION		Peak (PK)				
FREQUENCY RANGE		1GHz ~ 40GHz				Average (AV)				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]		
10	5,147.825	62.28	74.00	11.72	15.15	H	359.1	1.00		
10	5,150.000	61.89	74.00	12.11	15.22	H	302	1.00		
10	5,203.500	101.25			16.62	H	302	1.00		


Level in dB μ V/m


Frequency in Hz


PK+ Level @CriticalPoint

PK+ Level @Spectrum Overview

PK+ Limit @5G WiFi 80M B1_CH42

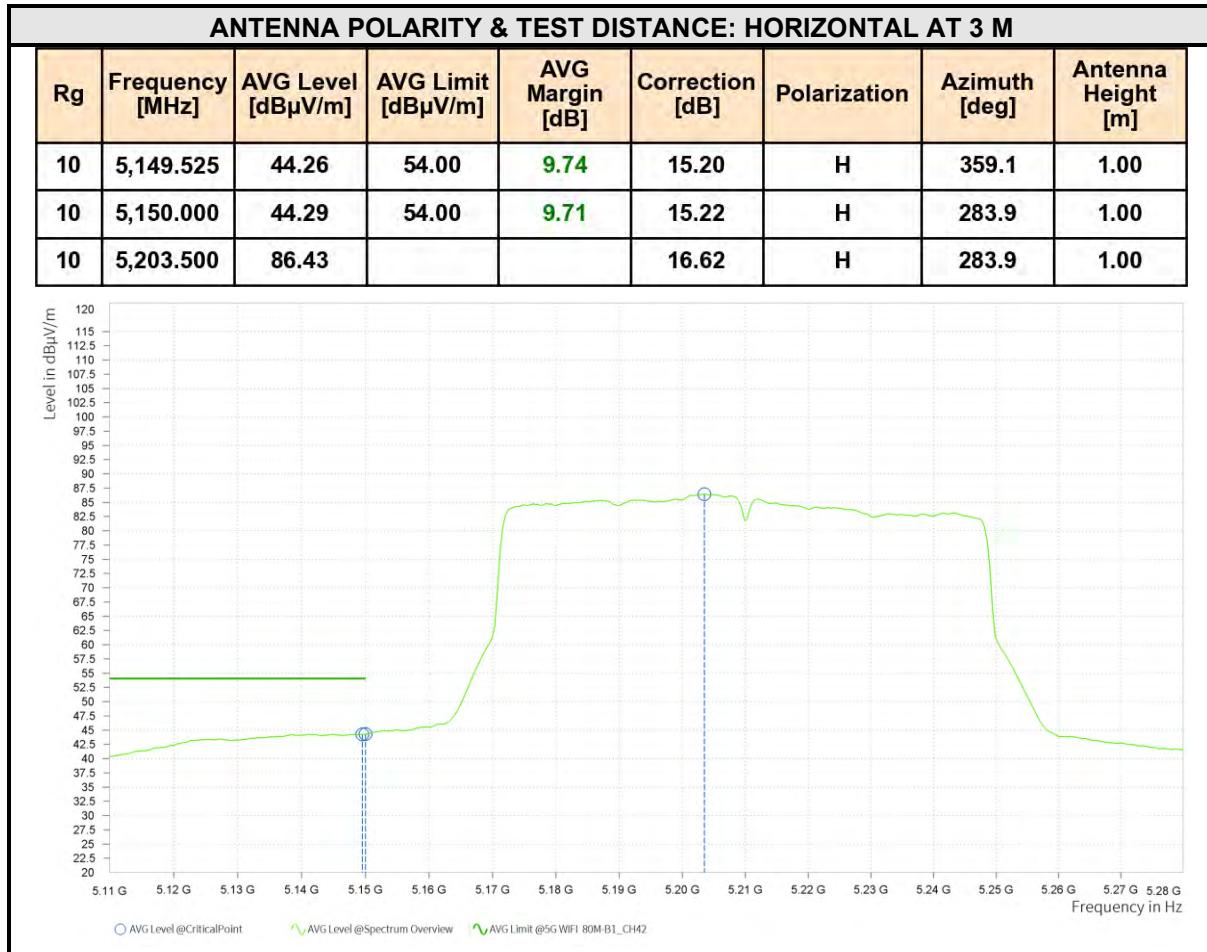

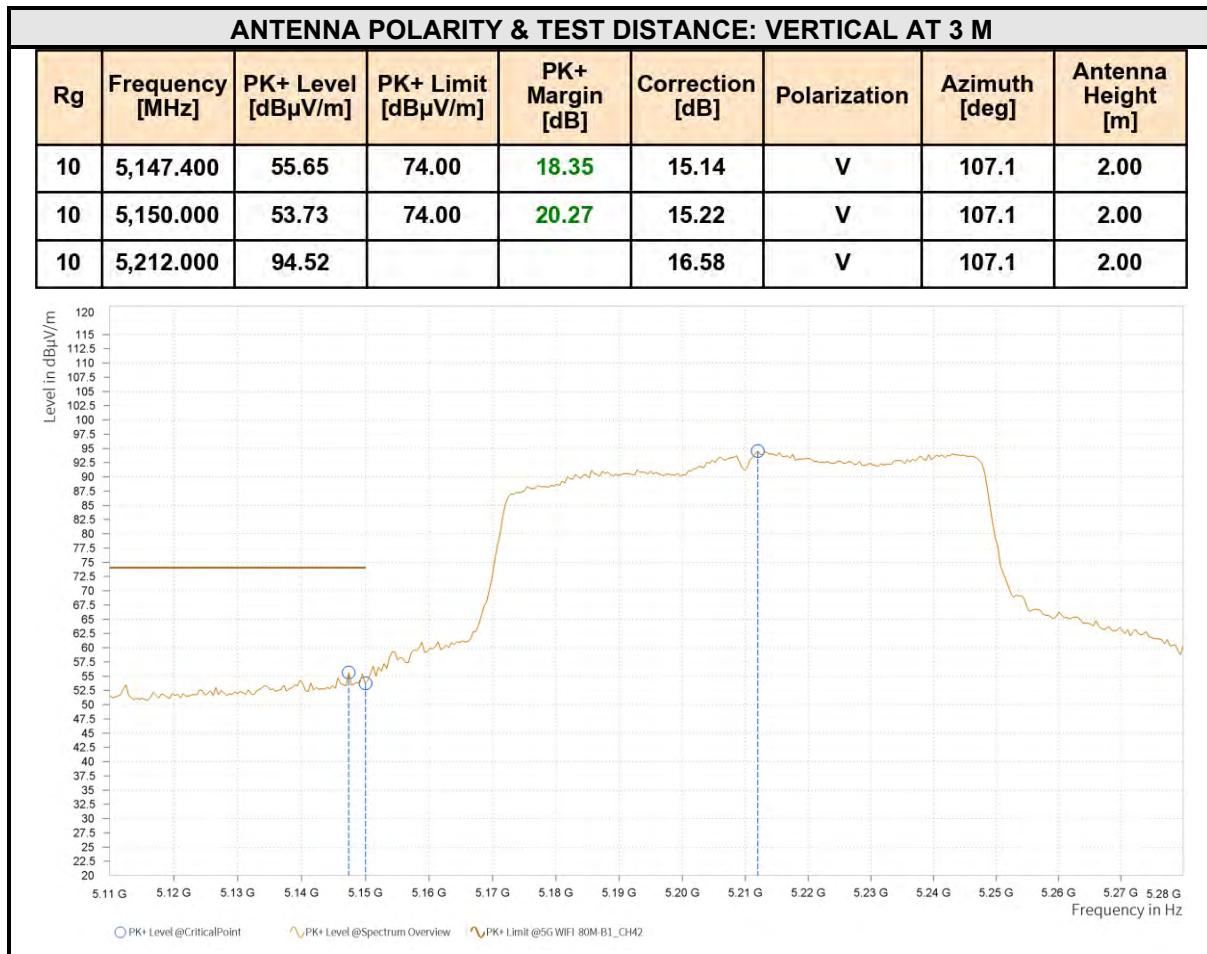

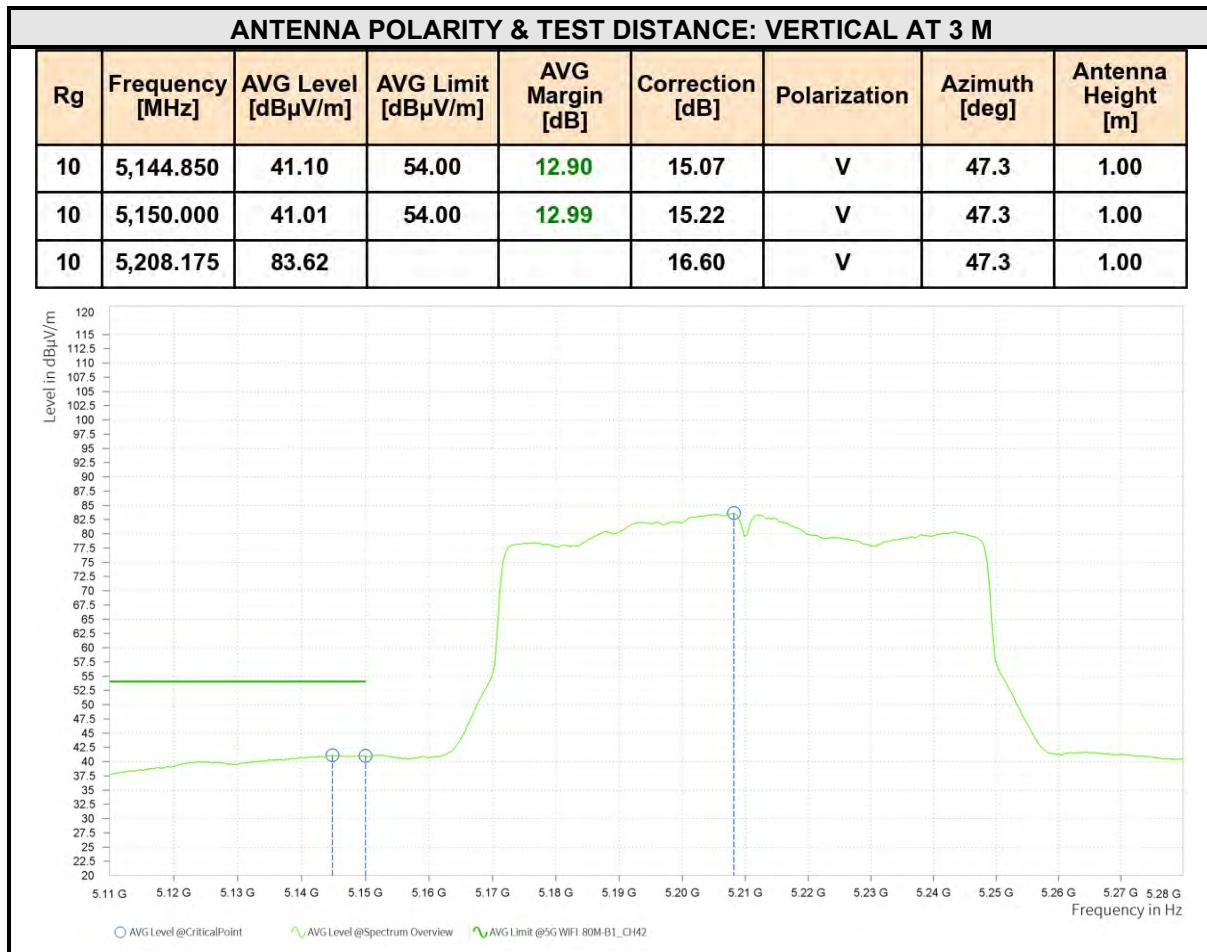




Band 2

802.11a

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,261.280	106.79			16.39	H	355	2.00
4	5,350.000	53.54	74.00	20.46	16.73	H	119	2.00
4	5,371.000	54.99	74.00	19.01	16.87	H	315.2	2.00

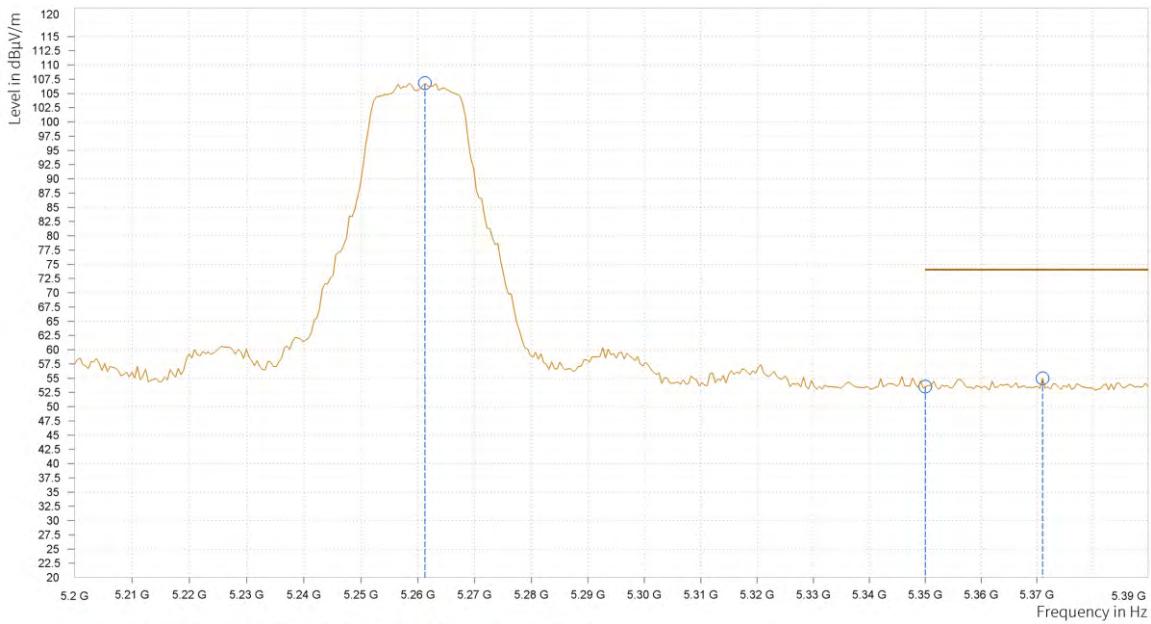

Huarui 7layers High Technology (Suzhou) Co., Ltd.	Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province	Tel: +86 (0557) 368 1008
--	--	--------------------------

