IC: N/A



Test Report No.: 16092202.fcc01 Page 1 of 43 Client: Interactive Playsystems B.V. Ampere 10, 7942DD Meppel, Netherlands **Digital Transmission System (DTS)** Test Item: 81419 (conducted tests), 81410 (radiated tests) Identification: Scorepanel Serial Numbers: and 81468 (AC power line con. em.) 16092202 October 17, 2016 Project No.: Date of Receipt: TÜV Rheinland Nederland B.V. Testing Location: Eiberkamp 10 9351VT Leek Test Specification: FCC 47 CFR Part 15, Subpart C, Section 15.247 (10-1-15 Edition) ANSI C63.10-2013 This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland Nederland B.V. The test results relate only to the item(s) tested. Test Result: The test item **passed** the test specification(s). TÜV Rheinland Nederland B.V. Eiberkamp 10 Testing Laboratory: 9351 VT Leek Tested by: Reviewed by: 2016-11-03 R. van der Meer / Inspector 2016-11-03 P. de Beer / Reviewer Name/Position Date Name/Position Date Signature Signature Other Aspects:-. Abbreviations: passed P(ass) F(ail) . failed N/A not applicable not tested

IC: N/A



Test Report No.: 16092202.fcc01 Page 2 of 43

## **TEST SUMMARY**

5.1.1 CONDUCTED MEASUREMENTS AT ANTENNA PORT

**RESULT: PASS** 

5.1.2 6DB AND 99% BANDWIDTH

**RESULT:** PASS

5.1.3 PEAK POWER SPECTRAL DENSITY

**RESULT:** PASS

5.1.4 BAND EDGE CONDUCTED EMISSIONS

RESULT: Pass

5.1.5 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER

**RESULT:** PASS

5.2.1 AC POWER LINE CONDUCTED EMISSION OF TRANSMITTER

RESULT: Pass

IC: N/A



Test Report No.: 16092202.fcc01 Page 3 of 43

# Contents

1.	GENERAL REMARKS4
1.1	COMPLEMENTARY MATERIALS4
2.	TEST SITES4
2.1	TEST FACILITIES4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS TABLE 1: LIST OF TEST AND MEASUREMENT EQUIPMENT
2.3	MEASUREMENT UNCERTAINTY6
3.	GENERAL PRODUCT INFORMATION7
3.1	PRODUCT FUNCTION AND INTENDED USE7
3.2	SYSTEM DETAILS
3.3	COUNTERMEASURES TO ACHIEVE COMPLIANCE
4.	TEST SET-UP AND OPERATION MODES
4.1	TEST METHODOLOGY9
4.2	OPERATION MODES9
4.3	PHYSICAL CONFIGURATION FOR TESTING10
4.4	TEST SOFTWARE
4.5	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT
5.	TEST RESULTS
5.1	CONDUCTED MEASUREMENTS AT ANTENNA PORT14
5.1.1	- · · · · · · · · · · · · · · · · · · ·
5.1.2 5.1.3	
5.1.3 5.1.4	· · · · · · · · · · · · · · · · · · ·
5.1.5	
5.2	AC Power Line Conducted Measurements
5.2.1	AC Power Line Conducted Emission of Transmitter41
5.2.2	Plots of the AC Power-line Conducted Emissions42

IC: N/A



Test Report No.: 16092202.fcc01 Page 4 of 43

#### 1. General Remarks

## 1.1 Complementary Materials

There is no attachment to this test report.

#### 2. Test Sites

#### 2.1 Test Facilities

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland Nederland B.V., located in Leek, 9351VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-2. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

#### Normal test conditions:

Temperature (\*) : +15°C to +35°C Relative humidity(\*) : 20 % to 75 % Supply voltage : 120 VAC.

When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.

IC: N/A



Test Report No.: 16092202.fcc01 Page 5 of 43

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment** 

Kind of Equipment	Manufacturer	Model Name	Inventory number	Calibration date (mm/yyyy)	Calibration due date (mm/yyyy)
For Antenna Port Cond	lucted Emissions				
Temperature- Humiditymeter	Extech	SD500	A00446	04/2016	04/2017
Spectrum Analyzer	Rohde & Schwarz	FSV	A01744	07/2016	07/2017
RF Cable	Huber + Suhner	Sucoflex 102	A00344	05/2016	05/2017
For Radiated Emission	S				
Measurement Receiver	Rohde & Schwarz	ESCI	A00314	03/2016	03/2017
RF Cable S-AR	Gigalink	APG0500	A00447	01/2016	01/2017
Controller	Maturo	SCU/088/ 8090811	A00450	N/A	N/A
Controller	EMCS	DOC202	A00257	N/A	N/A
Test facility	Comtest	FCC listed: 90828 IC: 2932G-2	A00235	04/2014	04/2017
Spectrum Analyzer	Rohde & Schwarz	FSV	A00337	06/2016	06/2017
Antenna mast	EMCS	AP-4702C	A00258	N/A	N/A
Temperature- Humiditymeter	Extech	SD500	A00444	04/2016	04/2017
Guidehorn 1-18 GHz	EMCO	3115	A00009	04/2016	04/2017
Guidehorn 18-40 GHz	EMCO	RA42-K-F-4B-C	A00012	04/2016	04/2017
Biconilog Testantenna	Teseq	CBL 6111D	A00466	10-12/2016	10-12/2017
2.4 GHz bandreject filter	BSC	XN-1783	A00065	N/A	N/A
Bandpass filter 4-10 GHz	Reactel	7AS-7G-6G- 511	A00131	N/A	N/A
Bandpass filter 10-26 GHz	Reactel	9HS- 10G/26.5G- S11	A00151	N/A	N/A
Preamplifier 0.5 - 18 GHz	Miteq	AMF-5D- 005180-28- 13p	A00247	N/A	N/A
Filterbox	EMCS	RFS06S	A00255	02/2016	02/2017

IC: N/A



Test Report No.: 16092202.fcc01 Page 6 of 43

Kind of Equipment	Manufacturer	Model Name	Inventory number	Calibration date (mm/yyyy)	Calibration due date (mm/yyyy)
For AC Powerline Conducted Emissions					
Pulse limiter	R&S	ESH3-Z2	A00051	01/2016	01/2017
Variac	RFT	LSS020	A00171	NA	NA
LISN	EMCO	3625/2	A00022	01/2016	01/2018
Measurement Receiver	Rohde & Schwarz	ESCS30	A00726	10/2016	10/2017
RF Cable	-	-	A01844	NA	NA
Shielded room for Conducted emissions			A00437	NA	NA
Temperature-Humidity meter	Extech	SD500	A00441	04/2016	04/2017

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing. NA= Not Applicable

## 2.3 Measurement Uncertainty

**Table 2: Emission Measurement Uncertainty** 

Measurement Type	Frequency	Uncertainty
Antenna Port Conducted Emission	< 6GHz	±2.5dB
	> 6GHz	±2.7 to ± 4.2
Radiated Emission		
	30MHz - 1GHz	±5.22dB
	> 1GHz	±5.22dB
AC Power Line Conducted Emissions	150kHz - 30MHz	±3.6dB

IC: N/A



Test Report No.: 16092202.fcc01 Page 7 of 43

#### 3. General Product Information

#### 3.1 Product Function and Intended Use

The brand Interactive playsystems model Scorepanel, hereafter referred to as EUT, is a transmitter used in an Interactive games system. The system contains a panel (covered in this test report) and a series of lamps (covered in a separate test report).

The content of this report and measurement results have not been changed other than the way of presenting the data.

#### 3.2 System Details

Details and an overview of the system and all of its components, as it has been tested, may be found below.

EUT : Digital Transmission System
Manufacturer : Interactive Playsystems B.V.
Brand : Interactive playsystems

Model(s) : Scorepanel

Serial Number : 81419 (conducted tests), 81410 (radiated tests) and

81468 (AC Power linde conducted emissions)

Voltage input rating : 3.6 – 4.2 Vdc (battery operated, chargeable)

Voltage output rating : -- Current input rating : --

Antenna : Internal, integrated on the PCB

Antenna Gain : + 3.3 dBi

Operating frequency : 2402 MHz-2481 MHz.

Modulation : GFSK
Data-rate : 2 Mbps
Remarks : n.a.

The EUT is battery operated and the battery can be charged with a provided AC/DC power supply of 5Vdc.

IC: N/A



Test Report No.:	16092202.fcc01	Page 8 of 43
Table 3: Interfaces	present on the EUT	
There are no interfac	e ports present on the EUT.	
3.3 Counterme	asures to achieve compliance	
No additional measu	res were employed to achieve compliance	<b>)</b> .

IC: N/A



Test Report No.: 16092202.fcc01 Page 9 of 43

## 4. Test Set-up and Operation Modes

#### 4.1 Test Methodology

The test methodology used is based on the requirements of 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209, 15.247.

The test methods, which have been used, are based on ANSI C63.10-2013.

#### 4.2 Operation Modes

Testing was performed at the lowest operating frequency (2402 MHz), at the operating frequency in the middle of the specified frequency band (2440 MHz) and at the highest operating frequency (2481 MHz). These operation modes were selected after review of the capabilities and characteristics of the EUT. The test software as mentioned in section 4.4 enabled the settings of these modes.

The EUT has been tested in the modes as described in table below

Operation Mode	EUT Status	Frequency (MHz)	TX power control setting
Transmit (Tx)	On	2402 (Ch2)	+4 dBm
Transmit (Tx)	On	2440 (Ch40)	+4 dBm
Transmit (Tx)	On	2481 (Ch81)	+4 dBm

IC: N/A



Test Report No.: 16092202.fcc01 Page 10 of 43


## 4.3 Physical Configuration for Testing

For programming purposes only the EUT was connected to the usb port of a laptop computer. The laptop computer was used to configure the EUT to continuously transmit at a specified output power and channel as specified in the test data. See section 4.5 for Auxiliary details.

The EUT was tested on a stand-alone basis.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10-2013.

Figure 1a: Test Setup Diagram – antenna port conducted tests and programming.

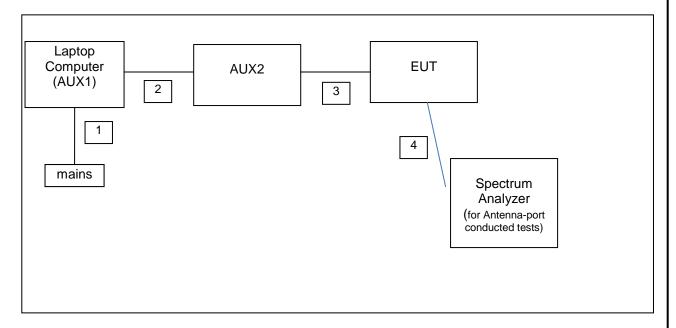


No.	Port	From	То	Remarks
1.	Mains	Mains	Laptop (AUX1)	Through a power supply
2.	Data com.	Laptop USB	AUX2	
3.	Data com.	AUX2	EUT	
4.	Antenna port	EUT	Spectrum	Conducted tests
			analyzer	


IC: N/A



Test Report No.: 16092202.fcc01 Page 11 of 43

Figure 2b: Test Setup Photos – conducted tests and programming.

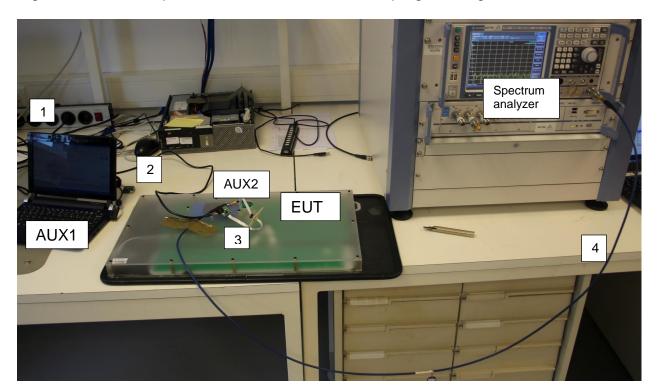

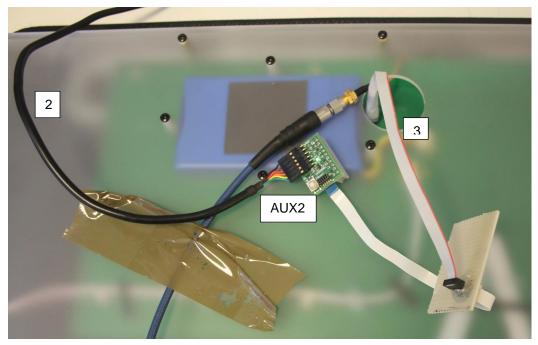

IC: N/A




Test Report No.: 16092202.fcc01 Page 12 of 43

#### 4.4 Test Software

A continuous transmit mode could be initiated by using test software as supplied by the applicant. The test software was used to define various different operational modes of the EUT for the purpose of compliance testing. The version of the test software, as supplied by the applicant and used during all tests is:

Test software : Terminal v1.9b

This software was running on a laptop computer (AUX1). It was used to enable the test operation modes listed in section 4.2 as appropriate.

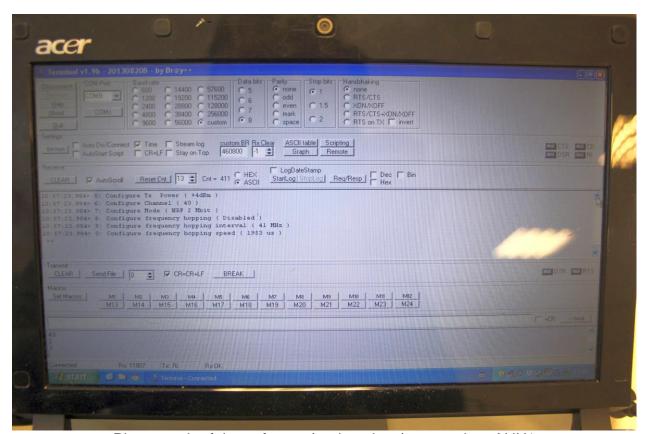

Photograph of the software (and settings) as used on AUX1

IC: N/A



Test Report No.: 16092202.fcc01 Page 13 of 43

## 4.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

The auxiliary items were not used during testing, but instead are only used to make the required settings for testing. For setting the transmit frequency, enable modulation etc.

1. AUX1

Product: Laptop Computer

Brand: ACER
Model: Aspire One

Serial Number: LUS680B17493528A231601

Remark: host for test software, property applicant

2. AUX2

Product: Programming interface

Brand: -Model: -Serial Number: -

Remark: property applicant

3. AUX3

Product: AC/DC Power Supply (charger)

Brand: -

Model: \$030ABM0500500

Serial Number: 1634 G3

Input Voltage 100 – 240 Vac

Output Voltage 5V dc

Remark: as supplied with the EUT for charging purposes

IC: N/A



Test Report No.: 16092202.fcc01 Page 14 of 43

#### 5. Test Results

#### 5.1 Conducted Measurements at Antenna Port

## 5.1.1 Conducted Output Power

**RESULT: PASS** 

Date of testing: 2016-10-17

Requirements:

FCC 15.247(b)(3)

For systems using digital modulation in the 2400-2483.5 MHz band, the maximum peak output power is 1W (+30dBm).

#### Test procedure:

The Peak Conducted Output Power was measured using the method according to section 11.9.1.1 in ANSI C63.10-2013.

The maximum peak output power (conducted) was measured at the antenna connector with a spectrum analyzer. The final measurement takes into account the loss generated by all the involved cables.

Measurement uncertainty is +/- 2.5 dB.

Notes:  $mW = 10 \land (dBm/10)$  $dBm = 10 \times log(mW)$ 

plots: Peak power plots,

Figures 1a, 1b and 1c show plots of the Peak Power outputs, correction factors (= 1.2 dB Cableloss) included in the reading.


IC: N/A



Test Report No.: 16092202.fcc01 Page 15 of 43

## **Conducted Output Power**

Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Verdict [Pass/Fail]	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	Plot number
2402	1.12 (1.29 mW)	+30	Pass	+3.3	4.42	2.77	1A
2440	1.40 ( 1.38 mW)	+30	Pass	+3.3	4.70	2.95	1B
2481	1.08 ( 1.28 mW)	+30	Pass	+3.3	4.38	2.74	1C

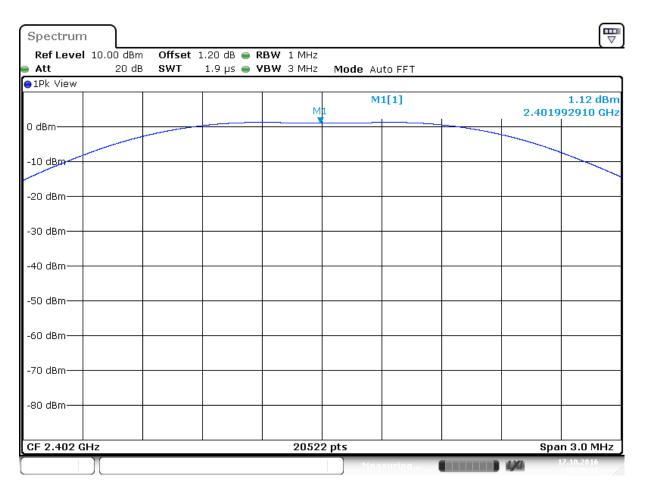


Date:17.0CT.2016 10:39:47

Plot A

IC: N/A



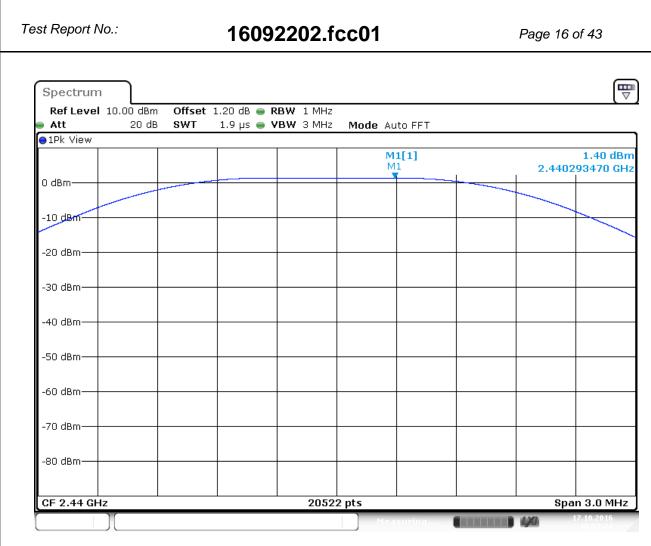


Date: 17.0CT.2016 10:51:44

Plot B

IC: N/A



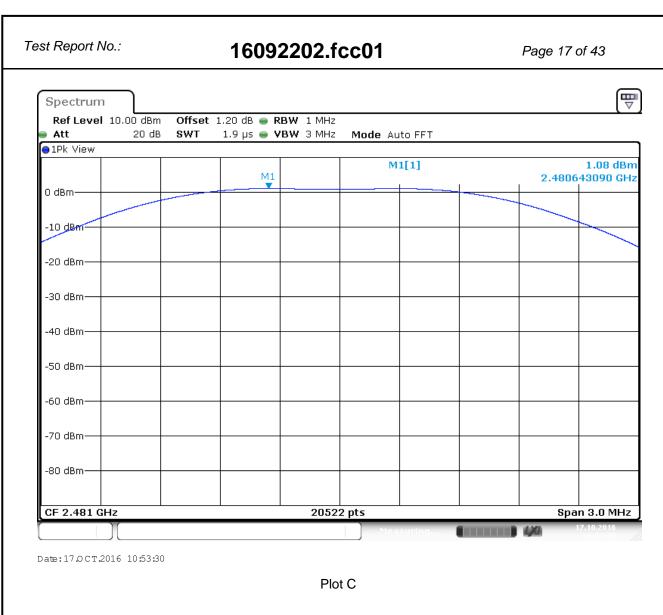

IC: N/A



Test Report No.: 16092202.fcc01 Page 18 of 43

#### 5.1.2 6dB Bandwidth

**RESULT: PASS** 

Date of testing: 2016-10-17

Requirements:

FCC 15.247(a)(2)

For systems using digital modulation in the 2400-2483.5MHz band, the 6dB bandwidth shall be at least 500kHz.

Test procedure 6dB bandwidth:

ANSI C63.10-2013 section 11.8.1 Option 1

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 100kHz, video bandwidth to 300kHz and the span wide enough to capture the modulated carrier.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 1% of the selected span, Video bandwidth was set to 3 times the resolution bandwidth. The span was set to capture the whole modulation process. The Spectrum analyzers automated function for 6 dB BW was used. Measurement uncertainty is +/- 26kHz.

Plots A1,B1 and C1 shown on the next pages are of the 6 dB bandwidth. The 20 dB bandwidth data and plots are provided for info only.

IC: N/A




Test Report No.: 16092202.fcc01 Page 19 of 43

#### 6dB Bandwidth

Operating Frequency [MHz]	*20dB Bandwidth [kHz]	6dB Bandwidth [kHz]	Limit [kHz]	Verdict [Pass/Fail]	Plot number
2402	2056.82	871.75	>500	Pass	A1/A2
2440	2075.58	824.24	>500	Pass	B1/B2
2481	2041.47	847.38	>500	Pass	C1/C2

<sup>\*20</sup>dB BW for info only

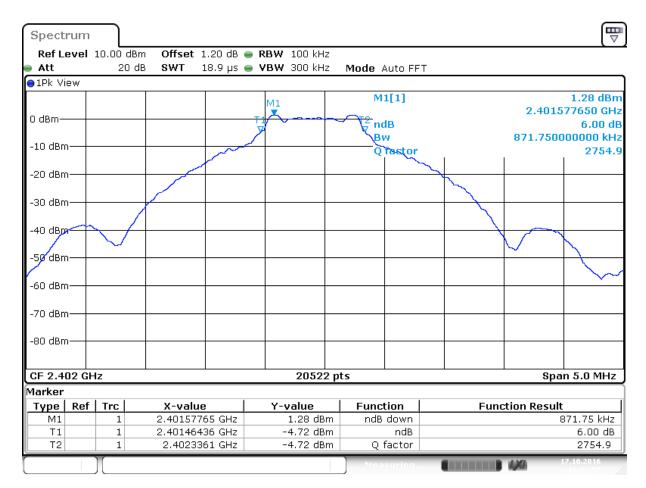


Date:17.0CT.2016 11:22:58

Plot A1

IC: N/A



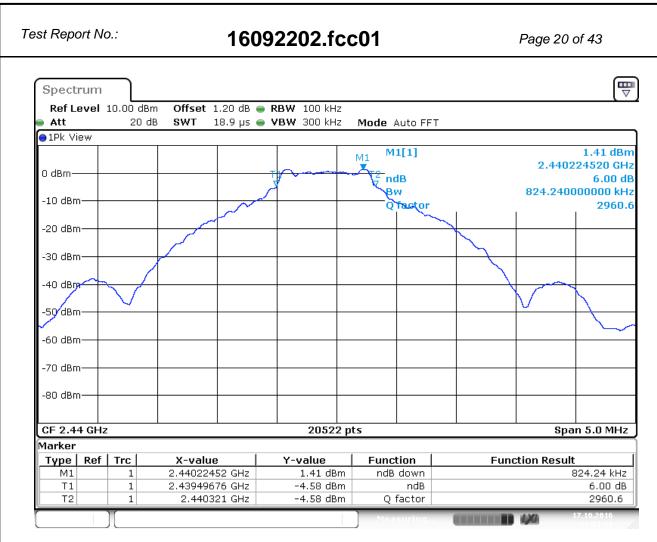


Date:17.0CT.2016 11:21:10

Plot B1

IC: N/A



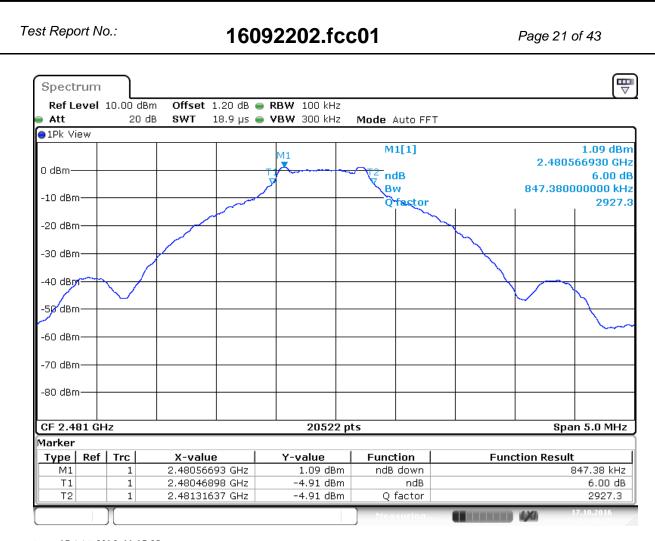


Date: 17.0CT.2016 11:17:25

Plot C1

IC: N/A



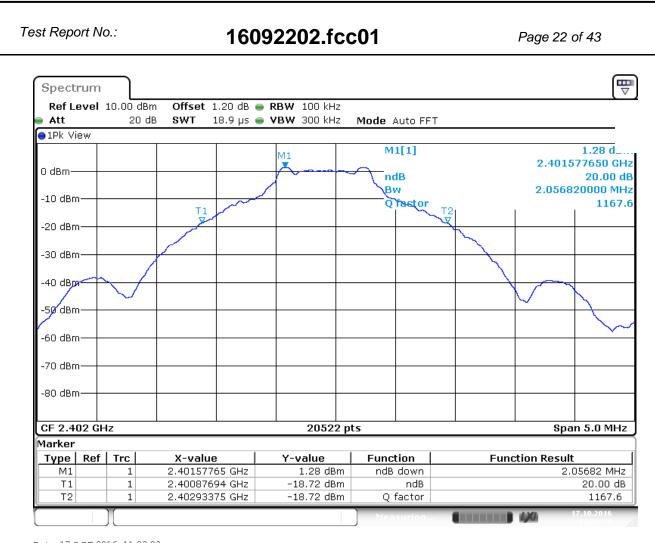


Date:17.0CT.2016 11:23:29

Plot A2

IC: N/A



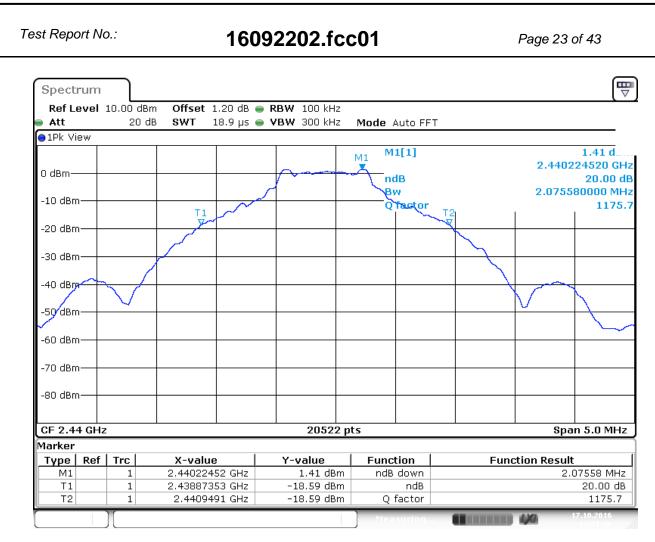


Date: 17.0CT.2016 11:21:47

Plot B2

IC: N/A



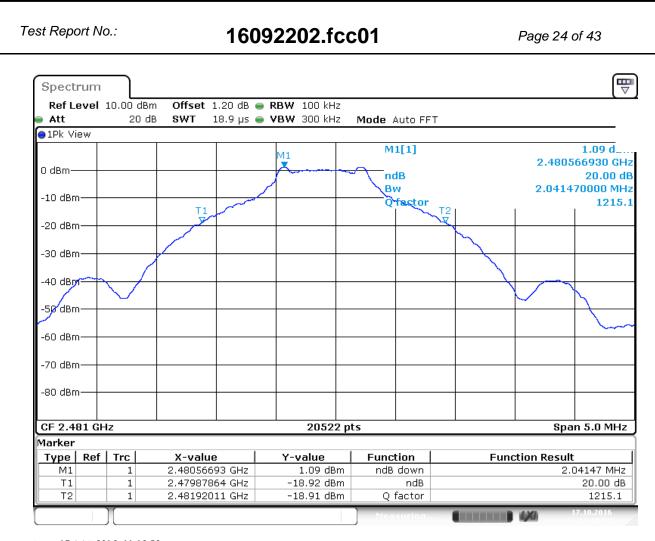

Date: 17.0CT.2016 11:18:52

Plot C2

IC: N/A



ge 25 of 43
је

## 5.1.3 Peak Power Spectral Density

**RESULT: PASS** 

Date of testing: 2016-10-17

Requirements:

FCC 15.247(e)

For digitally modulated systems, the power spectral density (PSD) conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test procedure:

ANSI C63.10-2013

The section 11.10.2 PKPSD peak PSD procedure was used. A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 3kHz and the video bandwidth was set to 10kHz. The sweep time was set to auto couple and the trace was allowed to stabilize before making the final measurement. By using the Peak marker function the maximum amplitude was determined. The final measurement takes into account the loss generated by all the involved cables (1.2 dB).

Measurement uncertainty is +/- 1.1 dB.


IC: N/A



Test Report No.: 16092202.fcc01 Page 26 of 43

## **Peak Power Spectral Density**

Operating Frequency	Max PSD	Limit	Verdict	Plot
[MHz]	[dBm]	[dBm]	[Pass/Fail]	
2402	-7.41	8	Pass	А
2440	-7.48	8	Pass	В
2481	-7.66	8	Pass	С

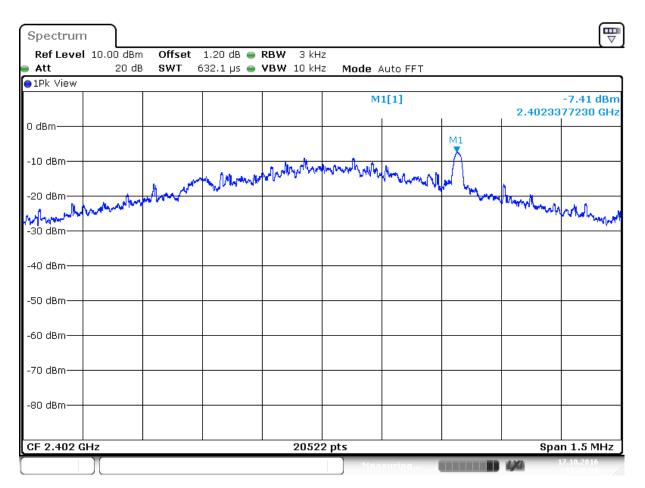


Date:17.0CT.2016 11:28:59

Plot A


IC: N/A



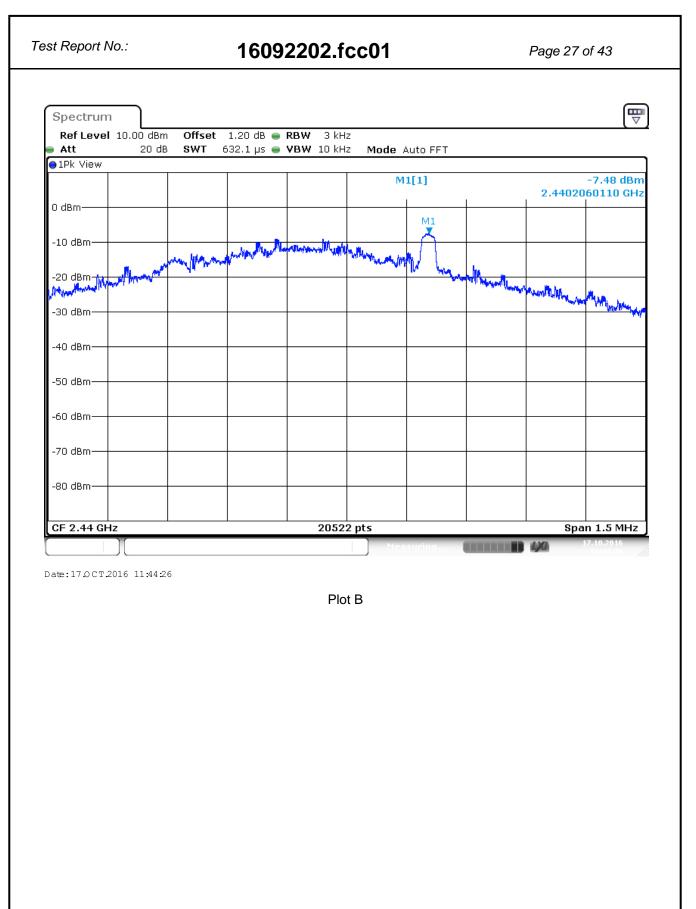

IC: N/A



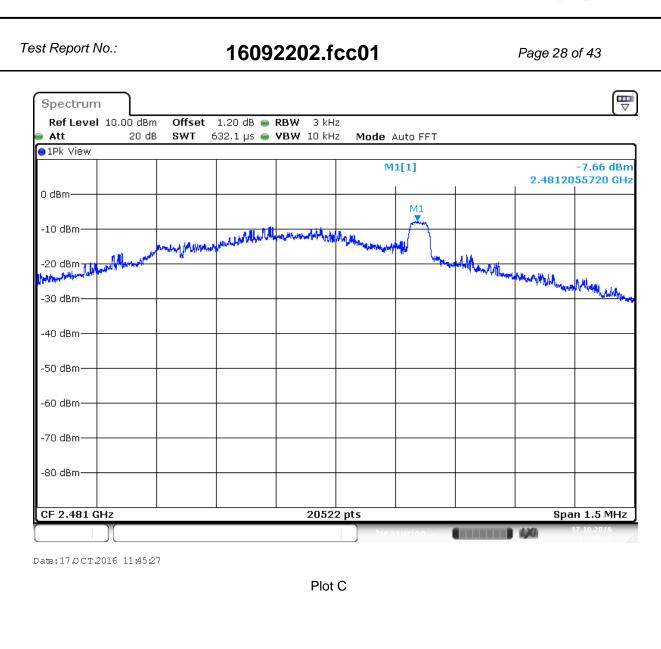

IC: N/A



Test Report No.: 16092202.fcc01 Page 29 of 43

## 5.1.4 Band Edge Conducted Emissions

**RESULT: Pass** 

Date of testing: 2016-10-17

Requirements:

FCC 15.205, FCC 15.209, FCC 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test procedure:

ANSI C63.10-2013 Section 11.13

The marker-delta method, as described in ANSI C63.10 was used.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings:

RBW = 100kHz, VBW = 300kHz.


The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Measurement uncertainty is +/- 2.5 dB.

Results: All out of band spurious emissions are more than 20 dB below the fundamental. See the figures on the following pages.

IC: N/A



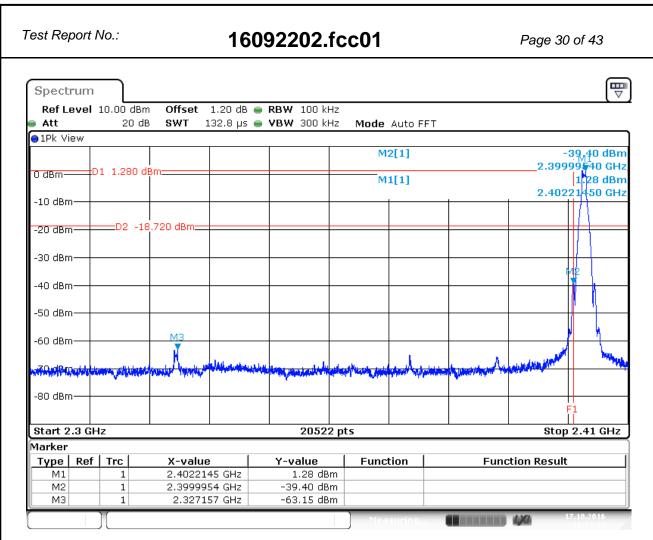


Date: 17.0CT.2016 11:53:22

Plot: Band Edge Conducted Emission, Spectral Diagram, 2402 MHz

Plot showing more than 20 dB band edge attenuation.

F1 shows the band edge frequency of 2400 MHz.

IC: N/A

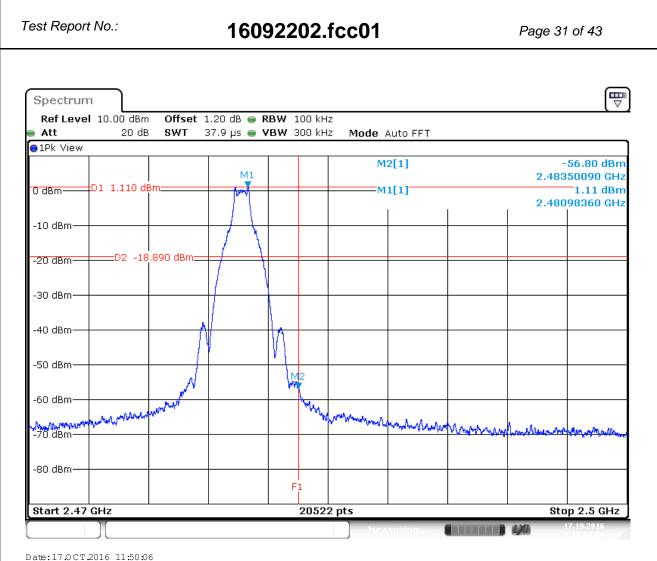

Plot: Band Edge Conducted Emission, Spectral Diagram, 2481 MHz. Plot showing more than 20 dB band edge attenuation. F1 shows the band edge frequency of 2483.5 MHz.

IC: N/A



Test Report No.: 16092202.fcc01 Page 32 of 43

#### **5.1.5 Radiated Spurious Emissions of Transmitter**

**RESULT: PASS** 

Date of testing: 2016-10-21

Frequency range: 30MHz - 25GHz

Requirements:

FCC 15.209 and FCC 15.247(d)

Radiated emissions which fall outside the operation frequency band and outside restricted bands shall either meet the limit specified in FCC 15.209(a) or be attenuated at least 20dB below the power level in the 100kHz bandwidth within the band that contains the highest level of the desired power (the less severe limit applies). Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a).

Test procedure:

ANSI C63.10-2013

The EUT was placed on the test site turntable. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit. The levels are expressed in dBm which are derived from dBm =  $E(dB\mu V/m) - 95.2dB$ . Where Peak (Pk) values where at least 6 dB under the Average (Av) limits, Av value was not tested. Were Average values were tested, Average values were measured using a 10Hz Video Bandwidth.

IC: N/A



Test Report No.: 16092202.fcc01 Page 33 of 43


#### Radiated Emissions, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations

Frequency [MHz]	Antenna Orientation	Level QP [dBµV/m]	Limit QP [dBµV/m]	Verdict [Pass/Fail]
68.80	Vertical	10.0	40.0	Pass
154.02	Vertical	21.3	43.5	Pass
156.10	Vertical	16.1	43.5	Pass
225.94	Horizontal	21.3	46.0	Pass
483.10	Vertical	16.7	46.0	Pass
745.86 (noize)	Vertical	21.6	46.0	Pass

Note: - Level QP = Reading QP + Factor

- Tested in modes as described in section 4.2, the 6 highest values noted. Preliminary measurements indicated that the radiated emissions from EUT were not affected by the EUT's operating mode or frequency.

- \*R refers to a frequency in a restricted band
- Quasi Peak detector used with a bandwidth of 120 kHz.
- Measurement uncertainty is +/- 5.22 dB.

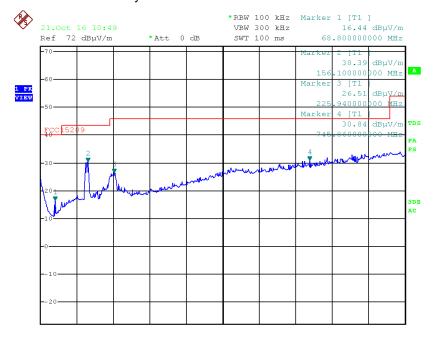

ORI

Date: 21.0CT.2016 10:49:57

Plot of the emissions in the frequency range 30 – 1000 MHz (example shown: EUT set in Normal operation, Peak detector values)

IC: N/A



Test Report No.: 16092202.fcc01 Page 34 of 43

## Radiated Emissions, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, 2402 MHz.

Frequency [MHz]	Antenna Orientation	Detector	Bandwidth (MHz)	Level [dBm]	Limit [dBm]	Result
2483.5 – 2500 <sup>*R</sup>	Horizontal	Pk	1	-55.9	-41.2 (Av) -21.2 (Pk)	Pass
4801.5* <sup>H*R</sup>	Horizontal	Pk	1	-42.9	-21.2 (Pk)	Pass
4801.5* <sup>H*R</sup>	Horizontal	Av	1	-53.5	-41.2 (Av)	Pass
11484.5 <sup>*R</sup>	Horizontal	Pk	1	-44.6	-21.2 (Pk)	Pass
11484.5 <sup>*R</sup>	Horizontal	Av	1	-50.5	-41.2 (Av)	Pass

## Radiated Emissions, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, 2440 MHz.

Frequency [MHz]	Antenna Orientation	Detector	Bandwidth (MHz)	Level [dBm]	Limit [dBm]	Result
2483.5 – 2500 <sup>*R</sup>	Horizontal	Pk	1	-55.0	-41.2 (Av) -21.2 (Pk)	Pass
4879.5* <sup>H*R</sup>	Horizontal	Pk	1	-42.8	-21.2 (Pk)	Pass
4879.5* <sup>H*R</sup>	Horizontal	Av	1	-49.6	-41.2 (Av)	Pass
11495.5 <sup>*R</sup>	Horizontal	Pk	1	-44.0	-21.2 (Pk)	Pass
11495.5 <sup>*R</sup>	Horizontal	Av	1	-50.7	-41.2 (Av)	Pass

## Radiated Emissions, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, 2481 MHz.

Frequency [MHz]	Antenna Orientation	Detector	Bandwidth (MHz)	Level [dBm]	Limit [dBm]	Result
2483.5 – 2500 <sup>*R</sup>	Horizontal	Pk	1	-47.0	-41.2 (Av) -21.2 (Pk)	Pass
4961.5*H*R	Horizontal	Pk	1	-41.4	-21.2 (Pk)	Pass
4961.5*H*R	Horizontal	Av	1	-51.5	-41.2 (Av)	Pass
11540.5 <sup>*R</sup>	Horizontal	Pk	1	-48.1	-41.2 (Av) -21.2 (Pk)	Pass

IC: N/A




Test Report No.: 16092202.fcc01 Page 35 of 43


#### Radiated field strength measurements (1 - 25 GHz, E-field), EUT normal operation

Frequency [MHz]	Antenna Orientation	Detector	Resolution Bandwidth (MHz)	Level [dBm]	Limit [dBm]	Result	
[IVITIZ]			(IVITIZ)	Lapini			
2483.5 – 2500 <sup>*R</sup>	Horizontal	Pk	1	-50.6	-41.2 Av	Pass	
2 100.0 2000	Honzontai	1 10	·	00.0	-21.2 Pk	. 400	
4860.5*H*R	l lawi-amtal	DI	4	FO 4	-41.2 Av	Door	
4860.5	Horizontal	Pk	1	-52.4	-21.2 Pk	Pass	
4000*R		D.	4	50.0	-41.2 Av	_	
4922 <sup>*R</sup>	Horizontal	Pk	1	-50.0	-21.2 Pk	Pass	
11519.5 <sup>*R</sup>	Horizontal	Pk	1	-43.8	-21.2 Pk	Pass	
11519.5 <sup>*R</sup>	Horizontal	Av	1	-50.8	-41.2 Av	Pass	

- Notes: \*R refers to a frequency in a restricted band,
  - \*H refers to a frequency which is a harmonic of the fundamental.
  - Field strength values of radiated emissions not listed in the tables above are more than 20 dB below the applicable limit.
  - Measurement uncertainty is +/- 5.5 dB.
  - a selection of plots is provided on the next pages.



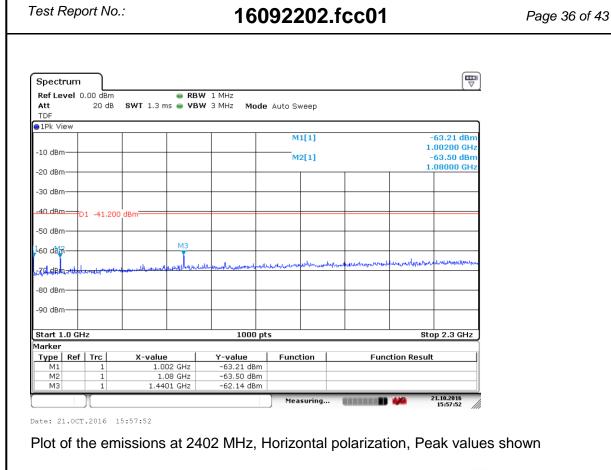

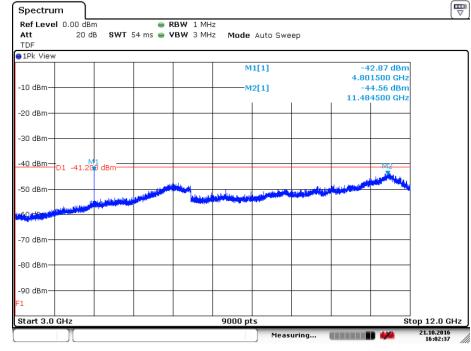


Plot of the emissions at 2402 MHz, Horizontal polarization, Peak values shown

IC: N/A






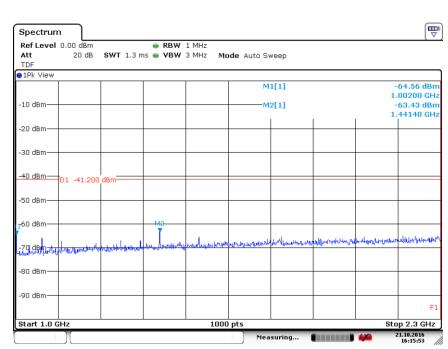

Date: 21.0CT.2016 16:15:54


Plot of the emissions at 2440 MHz, Horizontal polarization, Peak values shown

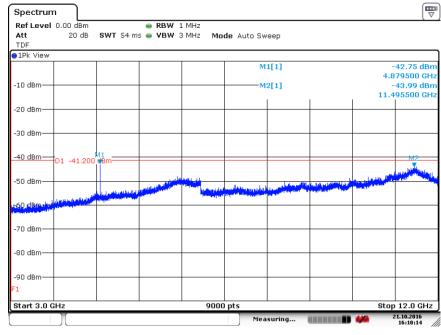


Date: 21.0CT.2016 16:10:14

Plot of the emissions at 2440 MHz, Horizontal polarization, Peak values shown



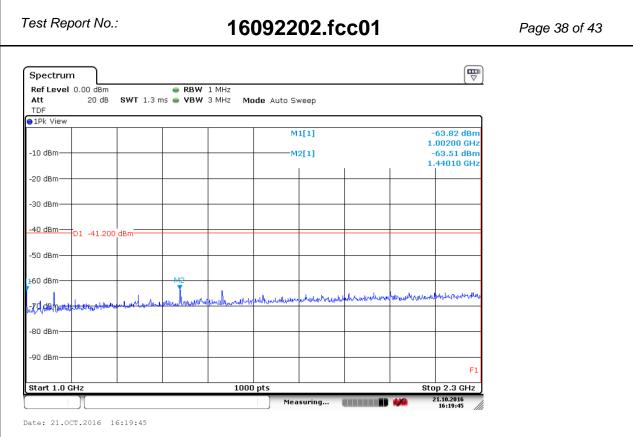


Plot of the emissions at 2481 MHz, Horizontal polarization, Peak values shown

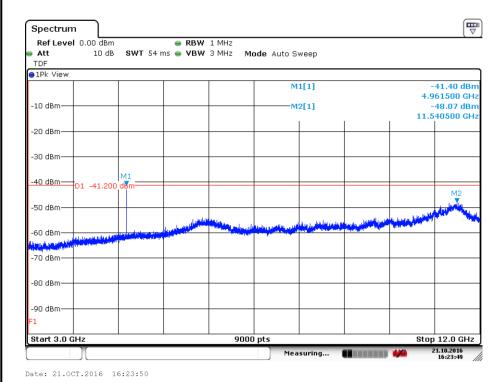


Plot of the emissions at 2481 MHz, Horizontal polarization, Peak values shown



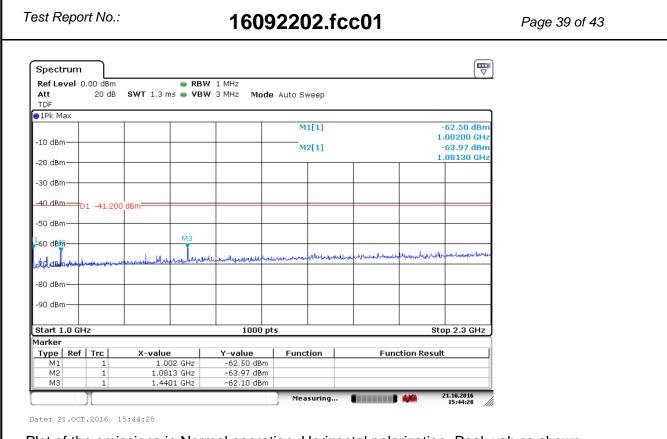

Plot of the emissions in Normal operation, Horizontal polarization, Peak values shown

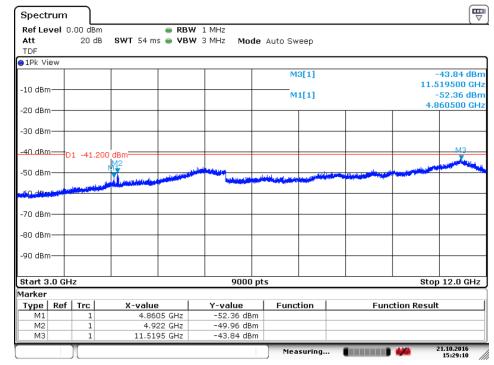

Date: 21.0CT.2016 15:29:10

Plot of the emissions in Normal operation, Horizontal polarization, Peak values shown

IC: N/A



Test Report No.: 16092202.fcc01 Page 40 of 43

#### 5.2 AC Power Line Conducted Measurements

**RESULT: Pass.** 

Date of testing: 2016-11-03

Requirements: for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency of Emission (MHz)	Conducted Limit (dBµV) Quasi-Peak	Conducted Limit (dBµV) Average		
0.15 – 0.5	66 to 56*	56 to 46*		
0.5 – 5	56	46		
5 - 30	46	50		

 $<sup>\</sup>ensuremath{^*\text{Decreases}}$  with the logarithm of the frequency.

Test procedure:

ANSI C63.10-2013.

Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a 50  $\mu H$  / 50  $\Omega$  LISN. The frequency range from 150kHz to 30MHz was searched. The six highest EUT emissions relative to the limit were noted. The EUT was positioned at least 80cm from the LISN. The power cable was routed over the non-conductive plate to the LISN.

The EUT is battery operated and the battery can be charged with a AC/DC power Supply that is provided with the EUT.

IC: N/A



Test Report No.: 16092202.fcc01 Page 41 of 43

#### 5.2.1 AC Power Line Conducted Emission of Transmitter

Frequency	Measurement results L1 (dBµV)		Measurement results L2/Neutral (dBµV)		Limits (dBµV)		Verdict
(MHz)	QP	AV	QP	AV	QP	AV	(Pass/Fail)
0.15000	35.0	-	38.5	-	66.0	56.0	Pass
0.18500	37.9	-	35.0	-	64.0	54.0	Pass
12.480	29.6	-	25.0	-	60.0	50.0	Pass
12.905	30.4	-	30.0	-	60.0	50.0	Pass
15.755	35.0	-	38.0	-	60.0	50.0	Pass
16.230	36.8	-	35.0	-	60.0	50.0	Pass

The results of the AC power line conducted emission tests, carried out in accordance with 47 CFR Part 15 section 15.207(a), at the 120 Volts/ 60 Hz AC mains connection terminals to the AC/DC power supply (AUX3) that connects to the EUT of the EUT, are depicted in the table above.

#### Notes:

- 1. The resolution bandwidth used was 9 kHz.
- 2. Pre-test proved that the transmitting frequency of the EUT was not of influence on the results. Worst case values noted.
- 3. Qp values were already within Av limits, therefore Av not tested.
- 4. Measurement uncertainty is +/- 3.6 dB.
- 5. Tested on SN: 81468.
- 6. Plots are provided on the next pages.

IC: N/A




Test Report No.: 16092202.fcc01 Page 42 of 43

## 5.2.2 Plots of the AC Power-line Conducted Emissions

83. Nov 16 11:26

Soan Settings (1 Range) !------ Frequencies ------:!------ Receiver Settings ------: Start Stop Step IF BW Detector M-Time Atten Preamp 150k 30M 5k 9k PK 20ms 0dBLN OFF

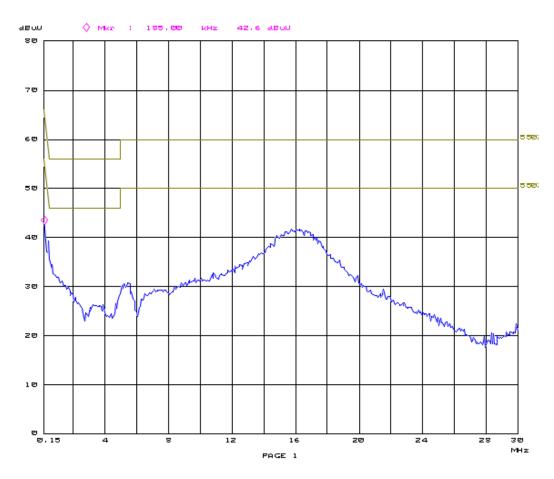

Plot of the AC Power-line Conducted emissions on L1


IC: N/A



Test Report No.: 16092202.fcc01 Page 43 of 43

83. Nov 16 11:33



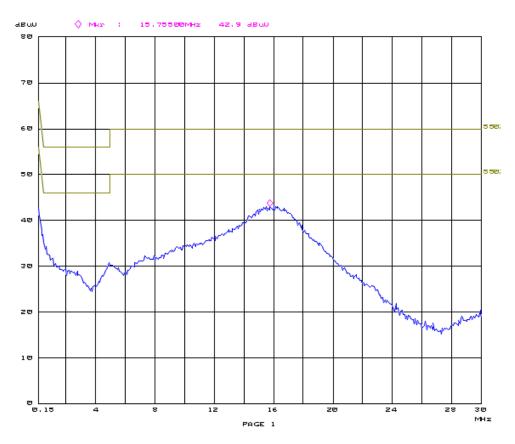

Plot of the AC Power-line Conducted emissions on L2

**End of report**